Informatica® Application Integration
October 2022

# Workday V2 Connector Guide

Informatica Application Integration Workday V2 Connector Guide
October 2022

© Copyright Informatica LLC 1993, 2025

Publication Date: 2025-08-30

# Table of Contents


**Preface** . . . . . 4

**Chapter 1: Introduction to Workday Connector** . . . . . 5

Workday Connector . . . . . 5

Workday Operations . . . . . 6

Generic Workday operations . . . . . 6

Configuring custom operations . . . . . 6

Administration of Workday Connector . . . . . 7

**Chapter 2: Connections for Workday** . . . . . 8

Workday connections overview . . . . . 8

Basic connection properties . . . . . 9

Workday connection properties . . . . . 9

Workday connection metadata . . . . . 10

**Chapter 3: Workday Connector Processes** . . . . . 12

Workday Connector processes overview . . . . . 12

Workday Connector process example . . . . . 12

Step 1: Create a Workday connection . . . . . 13

Step 2: Configure the input and output fields . . . . . 13

Step 3: Assign values to the input and output fields . . . . . 13

Step 4: Configure a service call . . . . . 13

Step 5: Select the fields in the Workday response . . . . . 14

Step 6: Run the process . . . . . 14

**Index** . . . . . 15

# Preface

Read the *Workday V2 Connector Guide* to learn how to set up and use Workday Connector. Learn how organization administrators and business users can use Workday Connector to perform operations in Workday.

CHAPTER 1

# Introduction to Workday Connector

This chapter includes the following topics:


- Workday Connector, 5
- Workday Operations, 6
- Administration of Workday Connector, 7


## Workday Connector

You can connect to Workday from Application Integration to create real-time application integration processes that enable you to interact with Workday. The Workday Connector is available as a service call in Application Integration. You can connect to Workday from Application Integration to create real-time application integration processes that enable you to interact with Workday. The Workday Connector is available as a service call in Application Integration.

Workday is an on-demand Cloud-based Enterprise Resource Application that includes financial management and human capital management applications. Workday exposes the web service API, which the Secure Agent uses to read or write data and perform web service-based integration of processes, applications, and systems in real time.

With Workday V2 connection, you can access all the services and operations supported for the SOAP-based web service version in Workday. When you perform an operation from Informatica Cloud®, you can convert the hierarchical data structure for data retrieved from Workday to a relational format before you write to relational tables. You can also convert the relational format to hierarchical format before you write data from relational sources to Workday.

### Example

You are a human resources administrator and you want to archive the details of employees who left the organization in the past month. You can find the employee in Workday based on the employee ID, retrieve worker data through the Get_Workers operation, and then write the details to an Oracle database target. With Workday Connector, you retrieve the worker data in an XML structure and then define a corresponding relational structure to write to the relational target.

# Workday Operations

Workday exposes the web service API that the Secure Agent uses to perform integration tasks through the SOAP protocol.

When you create a process, you can associate a Workday connection and an operation. Based on the Workday WSDL version and module you specify in the connection, the Secure Agent connects to the corresponding web service in Workday to access, transform, or deliver data. The request and response are SOAP messages. The SOAP request and response messages contain hierarchical data, where the data follows an XML schema. If you want to write data to a relational target, the Secure Agent converts the hierarchical data fetched from Workday to relational data.

## Generic Workday operations

The following table describes some of the generic operations that you can perform with Workday services:

| Operation Name | Description |
|---|---|
| Find_* | Responds with a set of references to objects that match the criteria specified in the request element.<br>For example, Find_Organization. |
| Add_Update*<br>Submit_*<br>Import_* | Adds an object if it does not exist or updates an object that matches the criteria specified in the request element.<br>For example, Add_Update_Organization. |
| Add_*<br>Put_* | Adds a record in the Workday object that matches the criteria specified in the request element.<br>For example, Add_Workday_Account and Put_Holiday_Calendar. |
| Get_* | Gets the list of objects that matches the criteria specified in the request element.<br>For example, Get_Workers |
| Update_*<br>Change_* | Modifies the objects that match the criteria specified in the request element.<br>For example, Update_Academic_Appointment. |
| Cancel_* | Cancels the operations that match the criteria specified in the request element.<br>For example, Cancel_Cash_Sale. |

## Configuring custom operations

You can perform operations for custom objects that the Workday Web Services support.

You must specify the tenant specific for a WSDL in a connection to access the schema for a custom object in Workday. When you configure a web service operation for custom objects, the operations display as Additional Data.

You can perform the following web service operations that support custom objects:

- Get Job Application Additional Data
- Put Job Application Additional Data
- Edit Worker Additional Data
- Edit Job Requisition Additional Data

- Edit Position Restrictions Additional Data

# Administration of Workday Connector

As a user, you can use Workday Connector after the organization administrator performs the following tasks:

- Ensures that the machine hosting the Secure Agent has a minimum memory size of 2048 MB.
- Defines the security group in Workday that controls the required permissions for a user to perform an operation. For more information about defining security groups and permissions for a user in Workday, see the Workday documentation.

CHAPTER 2

# Connections for Workday

Use the Workday connection to read data from or write data to Workday.

You can associate a domain, tenant, Workday module, and a WSDL version with a Workday connection.

The agent programmatically creates the URL that accesses the specified corresponding WSDL.

For example, `https://<Domain Name>/ccx/service/<tenant name>/<Module name>/<version>?wsdl`.

If you want to perform an operation for customized objects, choose Customized in the Workday connection properties. The Secure Agent creates the following URL that accesses custom data from the corresponding WSDL.

For example, `https://<Domain Name>/ccx/service/<tenant name>/ Custom/Data/<Module name>/<version>?wsdl`.

You can use the Workday connection when you create a mapping.

## Workday connections overview

Use the Workday connection to read data from or write data to Workday.

You can associate a domain, tenant, Workday module, and a WSDL version with a Workday connection.

The Secure Agent programmatically creates the URL internally that accesses the specified corresponding WSDL.

For example, `https://<Domain Name>/ccx/service/<tenant name>/<Module name>/<version>?wsdl`.

If you want to perform an operation for customized objects, choose Customized in the Workday connection properties. The Secure Agent creates the following URL that accesses custom data from the corresponding WSDL.

For example, `https://<Domain Name>/ccx/service/<tenant name>/ Custom/Data/<Module name>/<version>?wsdl`.

You can use the Workday connection when you create a process.

# Basic connection properties

| Property | Description |
|---|---|
| Name | Required. Unique name for this connection that identifies it in the Process Designer. |
| Description | Optional. Description of the connection. |
| | Required. The connector or service connector to use for this connection. Select the type you want to configure. |
| Runtime Environment | Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine. |
| Connection Test | If supported for the connection type, displays the results of the last connection test. |
| OData-Enabled | If supported for the connection type, select Yes to enable OData feeds and specify the allowed users and groups. |

Along with these basic properties, depending on the connector, you also define:

- Properties applicable to the connection type
- The **Event Sources** and **Event Targets**, if available

# Workday connection properties

The following table defines the Workday connection properties that you must configure on the **Connection Settings** section:

| Property | Description |
|---|---|
| Username | Required. User name for the Workday tenant to log in to the Workday service.<br>You can enter the user name, or the user name and tenant in the following format: <username>@<tenant name>. For example, jjoe@informatica_pt1.<br>If you do not provide the tenant name, the Secure Agent internally appends the tenant name value you specify in the connection property to the user name. |
| Password | Required. Password associated with the user name. |
| Domain Name | Required. Name of the Workday domain that contains the resources that you want to access. |
| Tenant Name | Required. The Workday tenant ID that you want to access. For example, informatica_pt1 |
| Module Name | Required. The Workday service that you want to access. For example, Human_Resources, Financial_Management, and Staffing.<br>For example, to view the available modules for version 26.1 of the web services, see the following link: https://community.workday.com/custom/developer/API/index.html |


| Property | Description |
|---|---|
| Version | Required. The Web Service Description Language (WSDL) version for a service that you want to fetch from Workday. The list of operations supported for a service depends on the WSDL version that you select.<br>For the supported versions, see the following link:<br>https://community.workday.com/custom/developer/API/versions/index.html<br>Default is **v24.0** |
| Customized | The Standard or Custom WSDL to fetch Workday object fields.<br>To fetch Workday custom object fields, select Customized. Default is Standard WSDL.<br>Default is **No**. |
| Object Filter | The operation that you want to perform in Workday. You can specify more than one operation, separated by commas. |

# Workday connection metadata

After you create a Workday connection, save the connection. You can then publish the Workday connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a Workday connection, a list of **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Workday connection:

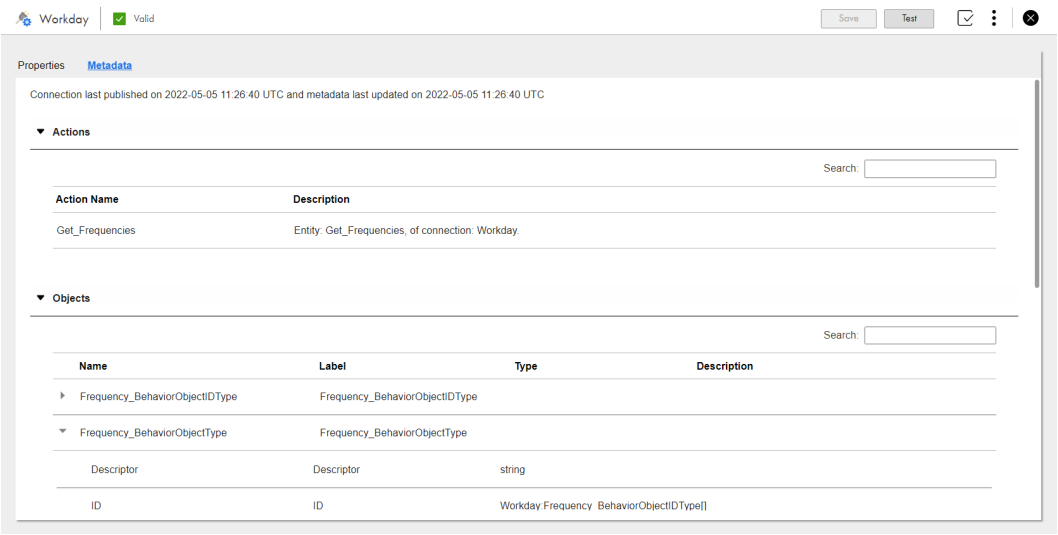


When you publish a Workday connection, the **Metadata** tab is refreshed by default. You can click **Publish - Skip Metadata Refresh** to skip the metadata refresh and reduce the publishing time.

## Best practices for metadata refresh

- When you create a Workday connection for the first time, click **Publish** to download the metadata. Subsequently, you can click **Publish - Skip Metadata Refresh** if there are no metadata changes.
- If you want to change credentials in a Workday connection but you know that the metadata has not changed, skip the metadata refresh while publishing the connection to apply just the credential changes.

- If you know that the metadata has changed, you must click **Publish** to retrieve the metadata changes.

CHAPTER 3

# Workday Connector Processes

This chapter includes the following topics:


- Workday Connector processes overview, 12
- Workday Connector process example, 12


## Workday Connector processes overview

You can use the Process Designer in Application Integration to read from and write data to Workday.

The Workday Connector is available as a service call in Application Integration. In a process, you can configure the Workday connection in a service call and specify the parameters and operations that associate with a specific service that you want to make available in a process to read or write data in Workday.

## Workday Connector process example

You want to fetch the employee details from Workday. You need to configure an XML request and then connect to Workday through a service call using the Get Worker Details operation to fetch the employee details from Workday.

In this example, configure a service call to perform the Get Worker Details operation to read the employee information, such as first name, last name, and date of birth, based on the Workday employee ID.

To read the employee information from a Workday source, perform the following steps:

1. Create a Workday connection in Application Integration.
2. Configure the input and output fields required to read worker details from Workday.
3. Assign values to the fields in the process.
4. Configure a Workday service call in the process.
5. Specify the elements required in the response XML.
6. Run the process.

The following image shows the configured process on the canvas:

## Step 1: Create a Workday connection

Create a Workday connection in Application Integration to connect to Workday. Configure the connection to use the Get Workers operation in Workday. Use the connection in a process to access the employee details.

You can create a Workday connection from the Design Home page in the Process Designer.

1. Select **New** > **Connection**.
2. Enter a name and description for the connection.
3. Enter the Secure Agent on which the connection must run.
4. Enter the Workday connection properties.
   The OData Enable option is not applicable for Workday connection.
5. Test the connection.
6. Save and publish the connection.

## Step 2: Configure the input and output fields

Assign the input fields that you want to pass in a request to Workday and then specify the output fields that you want the Workday service to return.

1. To create a request input field to read worker details from Workday, perform the following steps:
   a. Specify an input field name, `iGetworkersRequest`.
   b. Select **Get_Workers_RequestType**.

## Step 3: Assign values to the input and output fields

After you create the input and output fields, assign values to input and output fields for the Get Workers Request operation. Use the Assignment Step to set the value to the fields.

Configure the Assignment step to add the Workday input variable field iGetworkersRequest.

## Step 4: Configure a service call

Create a Workday service call in the Process Designer to use the Workday connection that accesses the Get Workers operation.

1. Configure the in the process to configure the input to the Workday input parameter.
   The following image shows the configuration:
2. Configure the input field in the to read from the Workday input variable. Perform the following steps:
   a. Add a Get_Workers input field, `Get_Workers_Request`.
   b. On the **Input Fields** tab, select **Field** as the source of the Workday input field value, and then select the iGetWorkersRequest input field.
   The following image shows the configuration of the input field in the :

## Step 5: Select the fields in the Workday response

The configured Get Workers request returns a Workday response. Add fields that you require in the response structure from Workday.

To add the fields, perform the following steps:

1. Create an Assignment Step.
2. Click **Add Field** to assign the following names and specify Field as the source value for each of the fields.
   - oFirstname
   - oLastname
   - oDateofBirth
3. Select the corresponding paths from where you want to fetch the data from a specific level in the hierarchy tree.
   The following image shows the configured fields in the response and their corresponding paths in the hierarchy:

## Step 6: Run the process

After you save the process, the new process appears on the **Processes** tab.

1. Click the **Start** tab in the **Process Properties** dialog box
2. Enable the **Allow anonymous access** option.
3. Select the process in the Design Home page and copy the Service URL.
4. Use the Service URL to run the process.
   The process runs and the Secure Agent fetches the employee details.

   **Note:** Sometimes, using a self-referenced Workday schema causes recursion followed by a stack overflow issue. To avoid this issue, you must configure the maximum depth limit of the ae.metadata.hierarchy.depth property of the JVM additional arguments in Administrator. For example, `-Dae.metadata.hierarchy.depth=15`.

   To prevent potential issues, such as truncated data or errors due to exceeding payload limits, the maximum depth limit that you set in Application Integration must be greater than the value supported by your Workday payload.

# INDEX

## P

process example
  assigning field values 13
  assigning values 13
  configuring service call 13
  creating connections 13
  overview 12
  running the process 14
  selecting fields in response XML 14

## W

Workday
  connection properties 9
  Operations Overview 6
Workday connections
  overview 8
  published metadata 10
Workday Connector
  administration 7
  example 12
  overview 5
Workday Connector processes
  overview 12