Informatica® Cloud Application Integration
October 2025

Email Connector Guide

Informatica Cloud Application Integration Email Connector Guide
October 2025

© Copyright Informatica LLC 2021, 2025

Publication Date: 2025-10-03

Table of Contents

Preface 4

Chapter 1: Introduction to Email Connector 5

Email Connector overview 5

Chapter 2: Email Connections 6

Email connection overview 6

Basic Connection Properties 6

Email Connection Properties 7

Event source properties 9

Publishing Email Connections 11

Using Email Objects in a Process or Guide 13

Chapter 3: Using an Email connection in a process 15

Sending an email message from an email server 15

Reading an email message from an email server 16

Index 17

Preface

Read the *Email Connector Guide* to learn how to create an Email connection and use it in a process or guide.

CHAPTER 1

Introduction to Email Connector

This chapter includes the following topic:

- Email Connector overview, 5

Email Connector overview

Application Integration provides multiple connectors that help you integrate with services and data sources outside Informatica Intelligent Cloud Services℠. When you automate business processes, you might want to send email notifications and read emails. For example, in an order management process, you might want to send email notifications to customers to inform them about the order delivery date and also read their email response. You can use Email Connector for this requirement.

Use Email Connector to read email messages stored on an email server and send an email from an email server to a specified list of recipients or distribution lists. After you create an Email connection, you can use it in a Service step in a process or guide to send and read emails.

Email Connector supports the Simple Mail Transfer Protocol (SMTP) and Internet Message Access Protocol (IMAP). You can also configure the Transport Layer Security (TLS) and Secure Sockets Layer (SSL) protocols in an email connection for secure email transmission.

CHAPTER 2

Email Connections

This chapter includes the following topics:

- Email connection overview, 6
- Basic Connection Properties, 6
- Email Connection Properties, 7
- Event source properties, 9
- Publishing Email Connections, 11
- Using Email Objects in a Process or Guide, 13

Email connection overview

Use an Email connection to read email messages stored on an email server and send an email from an email server to a specified list of recipients or distribution lists.

After you create an Email connection, you can validate, save, and publish the connection.

Basic Connection Properties

The following table describes the basic properties that you can configure on the connection creation page:

Property	Description
Name	Required. Unique name for the Email connection that identifies it in Process Designer. The name must start with an alphabet, and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.

Property	Description
Type	Required. The type of connection that you want to use for the connector or service connector. Select **IICS Cloud Application Integration Email Service (Licensed for use)**.
Runtime Environment	Required. The Cloud Server, the name of the Secure Agent group, or the Secure Agent machine where the connection must run. **Note:** If you configure and publish an Email connection to run on a specific Secure Agent, you can't invoke it in a Service step of a process that runs on a different Secure Agent.
Connection Test	Indicates whether the connection test was successful or not. By default, the property displays the results of the last connection test.
OData-Enabled	Not supported for Email Connector.

After you configure the basic connection properties, you must also define additional connection properties that apply to the Email connection type.

Email Connection Properties

You can use OAuth 2.0 authentication or password-based authentication for an Email app connection. You can use OAuth 2.0 authentication only for a Microsoft Outlook email account. You can't use IMAP with the OAuth 2.0 authentication type.

In some cases, you might want to define multiple Email connections. For example, you might use different SMTP hosts for each school within a university or have multiple domains that each require a unique SMTP configuration. Each SMTP host requires a separate connection.

When you select **IICS Cloud Application Integration Email (Licensed for use)** as the connection type, you can configure the email-specific connection properties on the connection creation page.

To create an email connection using password-based authentication, configure the following properties on the connection creation page:

Property	Description
Authentication	Required. Specifies whether the Email connection must use password-based authentication. If you select **Enable**, Email Connector authenticates the user name and password that you enter in the email connection properties. If you select **Disable**, Email Connector does not perform authentication, and ignores the user name and password that you enter in the email connection properties. Default is **Enable**.
User Name	Required if you enable password-based authentication. Enter the user name to log in to the email server. The user name is either the account name or the email address. For example: `notifyme@mydomain.com` If you disable password-based authentication, Email Connector does not perform authentication, and ignores any value that you enter in this field. **Note:** If you have configured SMTP in your environment to work without password-based authentication, do not enter a user name and password.

Property	Description
Password	Required if you enable password-based authentication. Enter the password for the email address. If you disable password-based authentication, Email Connector does not perform authentication, and ignores any value that you enter in this field. **Note:** If you have configured SMTP in your environment to work without password-based authentication, do not enter a user name and password.
Security	Required. Specify the security protocol that the Email connection must use. Select one of the following values: - **None**. The Email connection does not use a security protocol. - **TLS**. The Email connection uses the TLS protocol. - **SSL**. The Email connection uses the SSL protocol. Default is **None**.
Connection Timeout	Optional. Specify the number of milliseconds to wait when attempting to connect to the email server. Default is **30000** milliseconds. If you encounter a timeout while using an Email connection, review your network and firewall configuration.

An Email connection that uses password-based authentication might fail if you use your Gmail account credentials. For more information, see the Informatica Knowledge Base article 000258043.

To create an email connection using OAuth authentication, configure the following properties on the connection creation page:

Property	Description
Authorization URL	Required. Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the email application.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`
Authorization Status	Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

Note: In the OAuth provider, set the redirect URI to the host of the Application Integration POD in which you create the connection. The redirect URI must contain the `/oauthcallback` string. For example: `https://<Informatica Cloud Application Integration URL>/oauthcallback`

Configure the following common properties on the connection creation page:

Property	Description
Host	Required. Enter the email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Required. Enter the port for communication between the Process Server and the email server. Default is **25**.
Test Email Address	Optional. Enter the email address to which you want to send a test message when you test the Email connection. Separate multiple email addresses with a comma character.
From Email Address	Optional. Enter the email address that you want to appear in the **From** field of emails sent from the connection. For example: `no-reply@example.com`

Event source properties

You can configure an event source in an Email connection to read email messages sent by an email server. The Email connection uses the IMAP protocol to read unseen email messages.


For AWS PODs, you can configure an event source on both the Cloud Server and Secure Agent, while in other PODs, you configure an event source on the Secure Agent only. After configuring the event source, publish the connection to the selected runtime environment. You can then access the event source in a process and deploy it to the same runtime environment to consume the events generated by the event source.

Perform the following steps to create an event source in an Email connection:

1. Go to the **Event Sources** tab.
2. Click **Add Event Source**.
3. Select the event source type as **Email Listener**.

You can add only one event source for each connection.

The following image shows the event source properties:

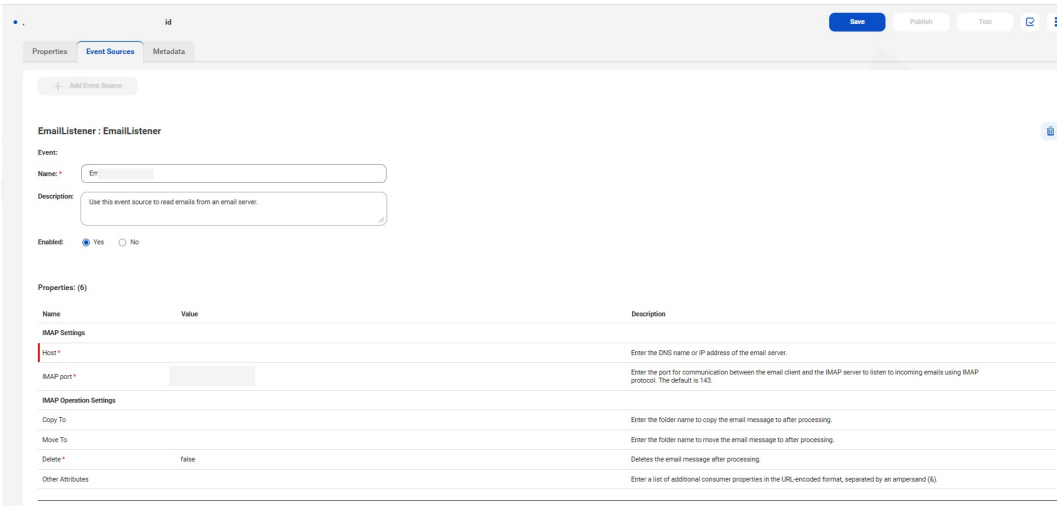

The following table describes the event source properties:

Property	Description
Name	Required. Enter a unique name for the event source. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Description	Optional. A description for the event source.
Enabled	Select **Yes** to make the event source available immediately after it is published. Select **No** to disable the event source until you are ready to use it. Default is **Yes**.

The following table describes the advanced event source properties that you can configure for IMAP Settings:

Property	Description
Host	Required. Enter the DNS name or IP address of the email server.
IMAP port	Required. Enter the port for communication between the email client and the IMAP server to listen to incoming emails using the IMAP protocol. Default is 993.

Note: You can't use TLS with Gmail and Yahoo when configuring an event source. Use SSL with port 993 instead. For more information, see Google documentation.

The following table describes the advanced event source properties that you can configure for IMAP operation settings:

Property	Description
Copy To	Enter the folder name to copy the email message to after processing.
Move To	Enter the folder name to move the email message to after processing.

Property	Description
Delete	Required. Deletes the email message after processing. Default is **false**.
Other Attributes	Enter a list of additional consumer properties in the URL-encoded format, separated by an ampersand (&). **Note:** - By default, you read emails from the `INBOX` folder. - The `unseen` property is always set to `true`.

Publishing Email Connections


After you create an Email connection, you can validate, save, and publish the connection. For more information, see *Design*.

When you publish an Email connection, Application Integration creates the following items on the **Metadata** tab:

sendEmailService

sendEmailService is the action that you must select in a Service step of a process or guide to send an email.


The following image shows the sendEmailService action:

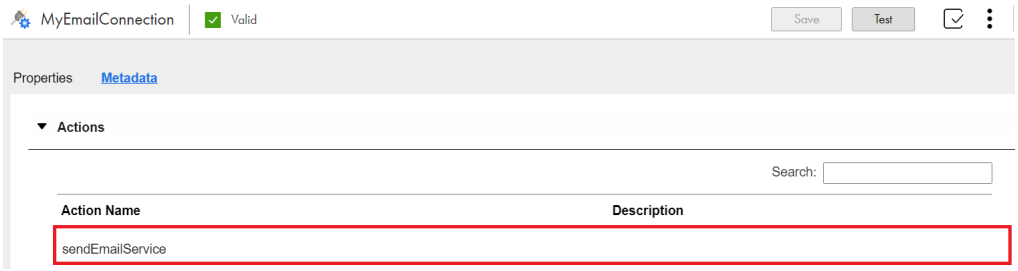

AttachmentInformation

The AttachmentInformation object defines the attachments to be sent with the email. You can use XQuery attachment functions to construct attachments. For more information about creating and using attachments, see the following link: Attachments.


The following image shows the AttachmentInformation object:

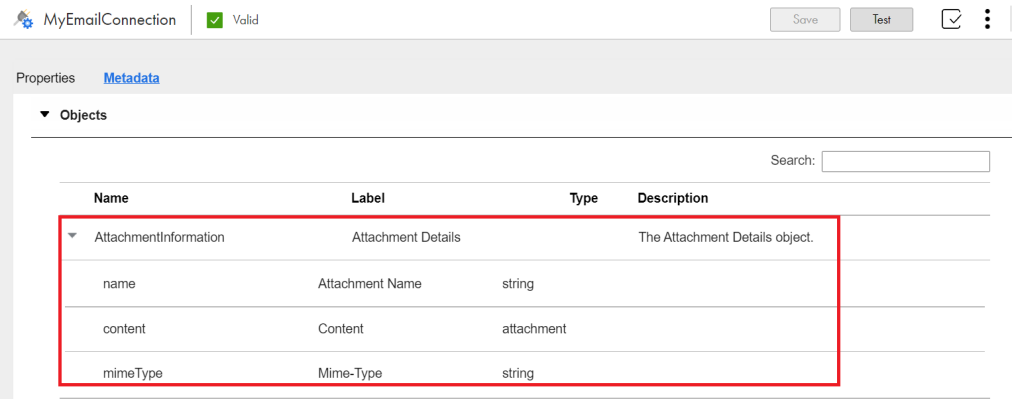

EmailMessage

The EmailMessage object defines the details of the email message read from the email server. The object defines the sender and recipient email addresses, including cc and bcc. It also captures the date, subject, content, and attachment details of the email.


The following image shows the EmailMessage object:

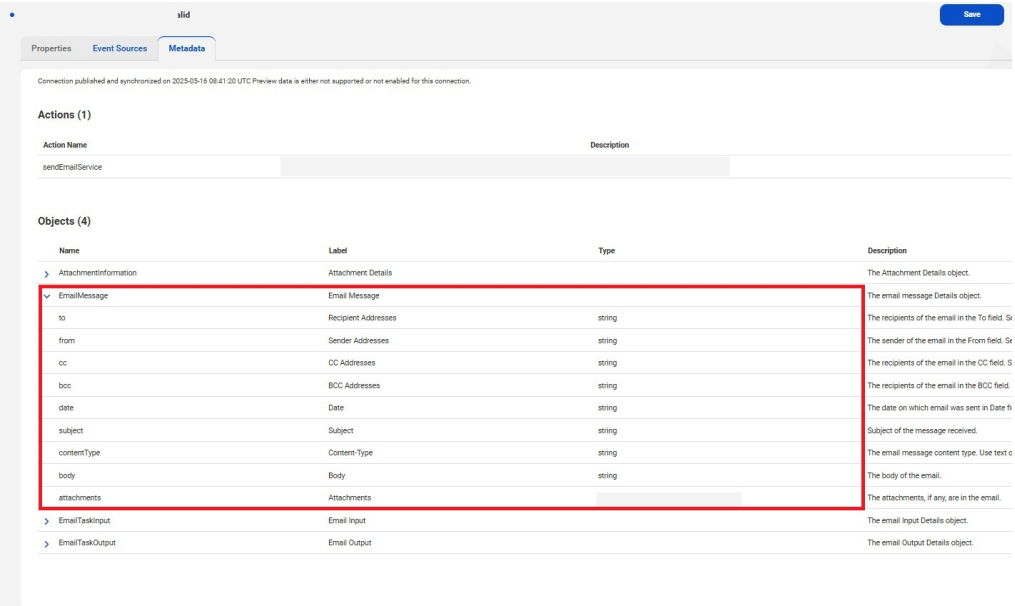

EmailTaskInput

The EmailTaskInput object defines the input for the email. The object defines the recipients, email subject, email content type, email body, and attachment information.

The following image shows the EmailTaskInput object:

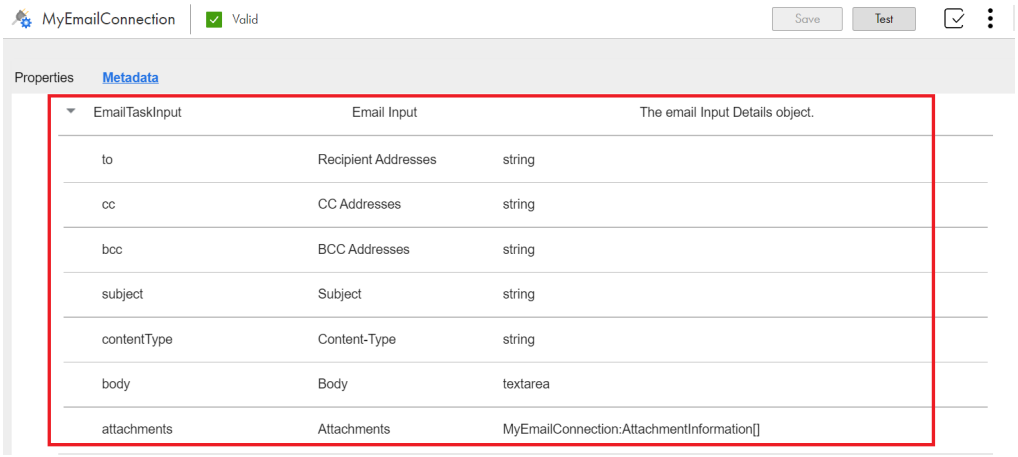


EmailTaskOutput

The EmailTaskOutput object defines the response of the sendEmailService action. The object defines whether the email was sent successfully, and also lists the following details:

- Email addresses to which the email was sent
- Email addresses that are valid but to which the email was not sent
- Email addresses that are not valid

The following image shows the EmailTaskOutput object:

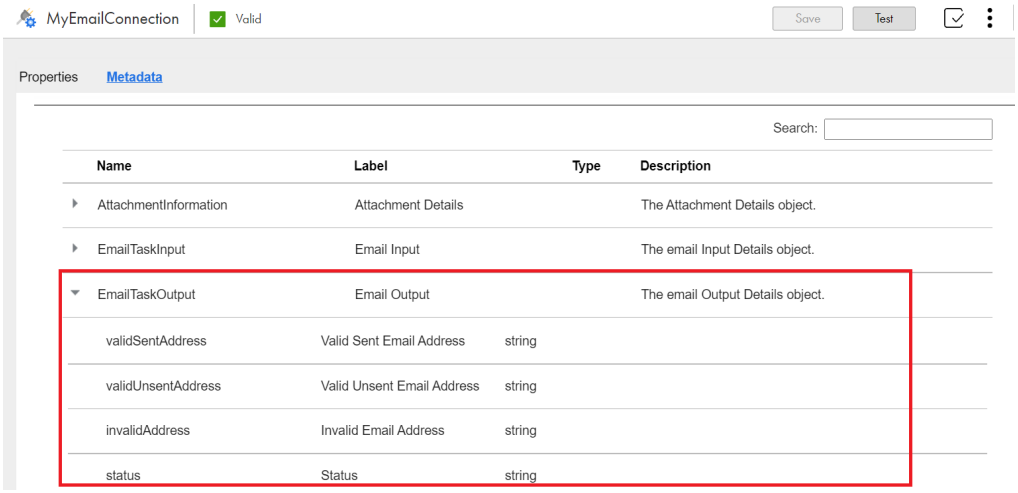


Using Email Objects in a Process or Guide

To use the email objects in a process or guide, perform the following steps:

1. Create a field to which you want to assign the email object.
2. From the **Type** list, select **More types**.
3. From the **Category** list, select **Connection defined Types**.
4. From the **Connection** list, select the email connection.

5. From the **Types** section, select the required email object as shown in the following image:

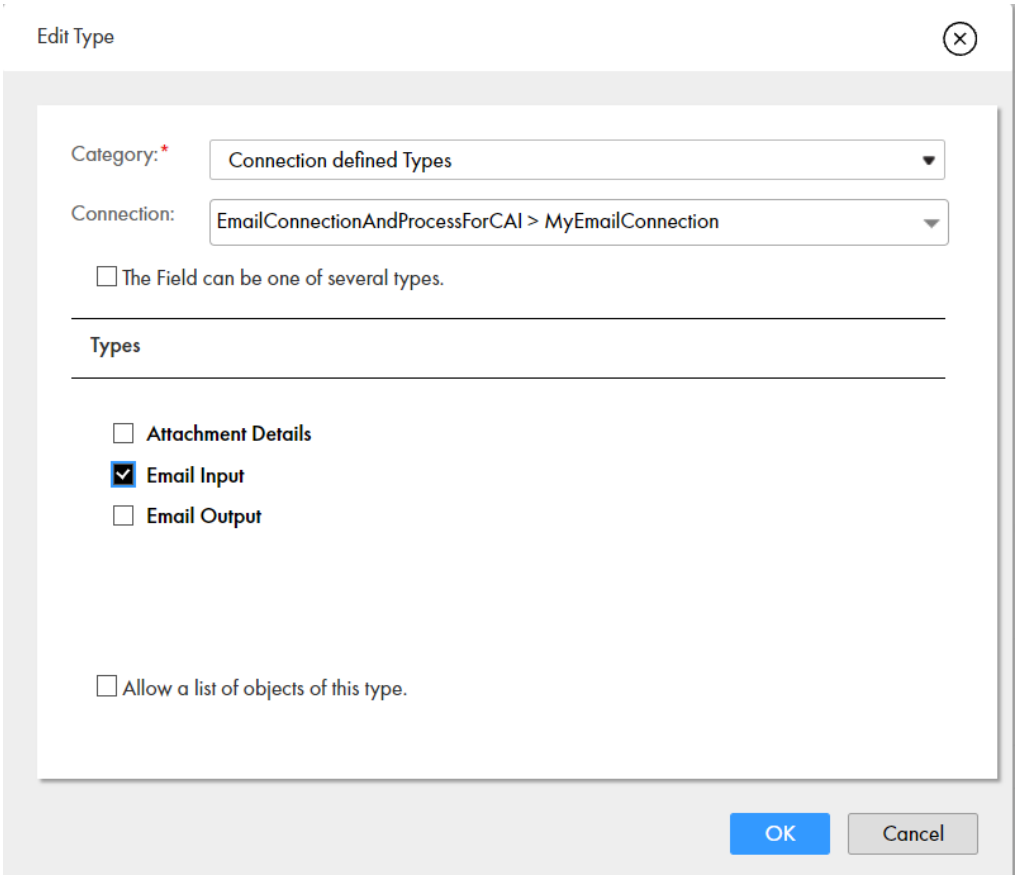

You can then assign values to the email object fields in the process or guide.

CHAPTER 3

Using an Email connection in a process

After you create an Email connection, you can use it in a Service step within a process or guide.

Sending an email message from an email server

You can create and publish a process to send an email from an email server to a specified list of recipients or distribution lists.

1. Create a process.
2. Add a Service step to a process or guide.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Email connection you created.
5. From the **Action** list, select the **sendEmailService** action that was created when the Email connection was published. Application Integration populates the **emailTaskInput** object under input fields and the **emailTaskOutput** object under output fields.
   The following image shows a sample Service step that sends an email:



6. Click the **Input Fields** tab.
7. Set the content of the email message in the **emailTaskInput** field.
   To send an email to multiple recipients, separate the email addresses with a comma character.

8. Configure email attachments and output fields as needed.
9. Validate, save, publish, and run the process or guide.

Reading an email message from an email server

You can create and publish a process to read email messages stored on an email server.

1. Create a process and click the **Start** step.
2. Click the **Start** tab and select the process binding type as **Event**.
3. In the **Event Source Name** field, select the Email listener that you created.

   Note: The process automatically creates an **event** field in the **Input Fields** section.
4. Configure other steps and properties as needed.
5. Validate, save, and publish the process.

INDEX

E

Email action
  sendEmailService 11
Email connections
  basic properties 6
  overview 6
  properties 7
Email Connector
  overview 5
Email objects
  AttachmentInformation 11
  EmailTaskInput 11
  EmailTaskOutput 11
  using in a guide 13
  using in a process 13