Informatica® Cloud Application Integration
October 2025

HubSpot Connector Guide

Informatica Cloud Application Integration HubSpot Connector Guide
October 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-11-13

Table of Contents

Preface 5

Chapter 1: Introduction to HubSpot Connector 6

HubSpot overview 6

Creating a HubSpot app 6

Chapter 2: HubSpot connections 10

Basic connection properties 10

HubSpot connection authentication properties 11

HubSpot connection properties 12

HubSpot connection metadata 12

HubSpot connection actions and objects 12

Using a HubSpot connection in a process 15

Preface

Read the *HubSpot Connector Guide* to learn how to set up and use HubSpot connections. Use a HubSpot connection to securely read data from and write data to HubSpot by using Application Integration. This guide assumes that you have an understanding of HubSpot concepts.

CHAPTER 1

Introduction to HubSpot Connector

Use HubSpot Connector to seamlessly integrate your application or platform with HubSpot's CRM and marketing services. It enables automated data exchange, synchronization, and workflows between systems, empowering businesses to better manage contacts, deals, marketing campaigns, and customer interactions.

You can use HubSpot Connector to securely read data from and write data to HubSpot. HubSpot supports create, read, update, and delete operations on existing resources, such as Users, Companies, and Notes.

HubSpot Connector provides the following key features:

- Bi-directional data synchronization between HubSpot and external systems
- Support for common HubSpot objects, such as Contacts, Companies, Deals, and Tickets
- Ability to create, read, update, and delete records through APIs
- Event-based triggers and actions to automate processes

HubSpot overview


HubSpot is a leading cloud-based platform that provides a comprehensive suite of tools for inbound marketing, sales, customer service, and customer relationship management (CRM). It enables businesses to attract visitors, convert leads, manage contacts, automate marketing campaigns, and track customer interactions all within a unified platform.

HubSpot covers a broad range of use cases, including CRM, inbound marketing, lead generation and nurturing, sales automation, customer service and support, content management system (CMS), marketing analytics and reporting, customer data management, workflow automation, event and webinar management, and e-commerce integration.


Creating a HubSpot app

Before you use a Hubspot connection, you must create a Hubspot app. When you create a public app in HubSpot, you associate an app that you have built with a HubSpot developer account.


1. Create a new developer account or log in to an existing HubSpot account.
2. In your developer account, go to **Apps** and click **Create app** as shown in the following image:

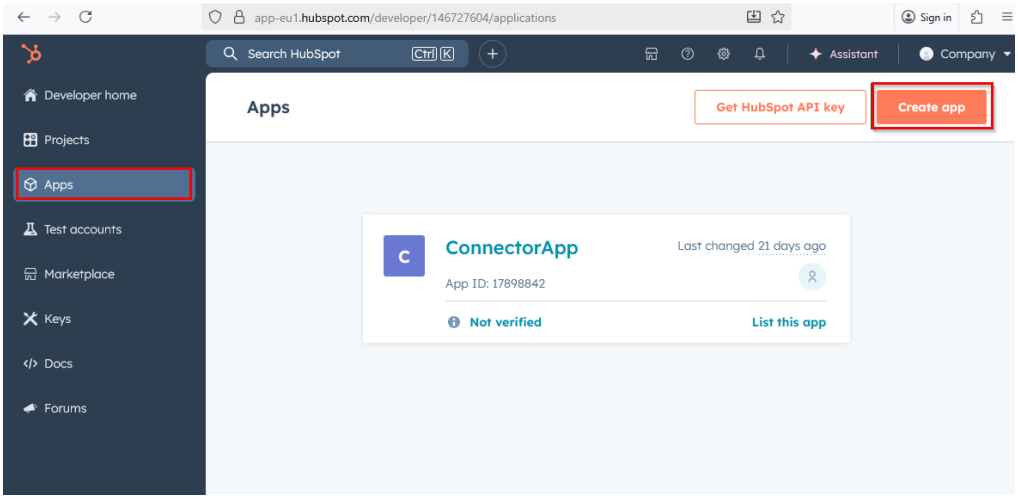

3. Enter the app name, description, and logo, and then save the app as shown in the following image:

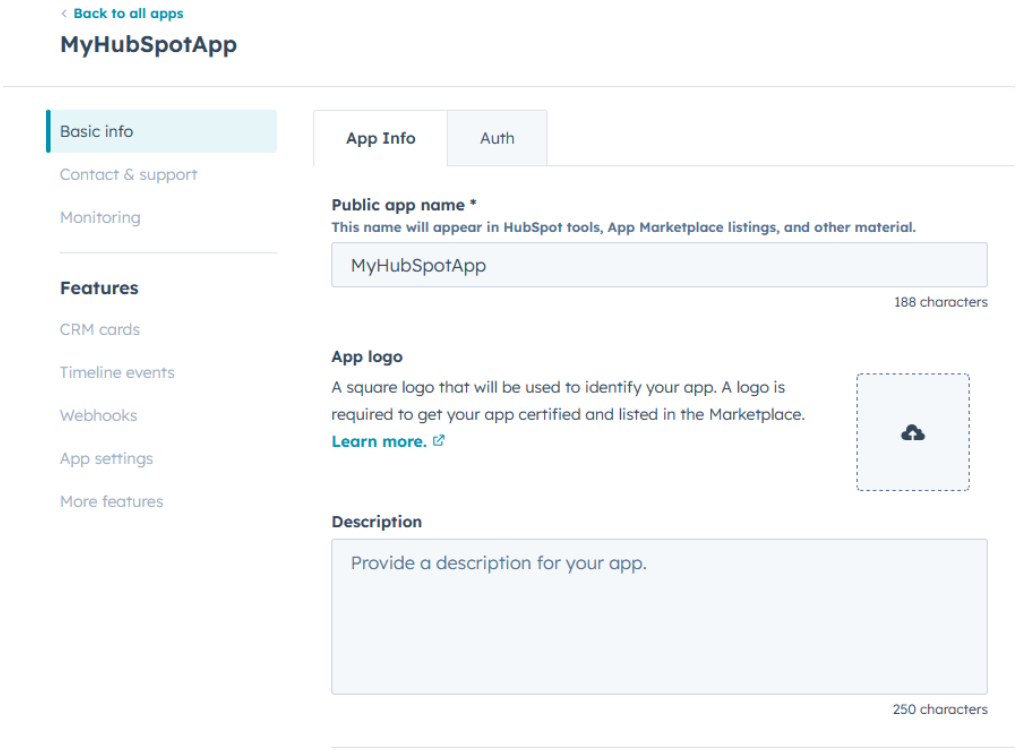


4. Click the **Auth** tab.
5. Copy the **App ID**, **Client ID**, and **Client secret**. You will need these details to configure the HubSpot connection.
6. Enter a **Redirect URL** for your app as shown in the following image:

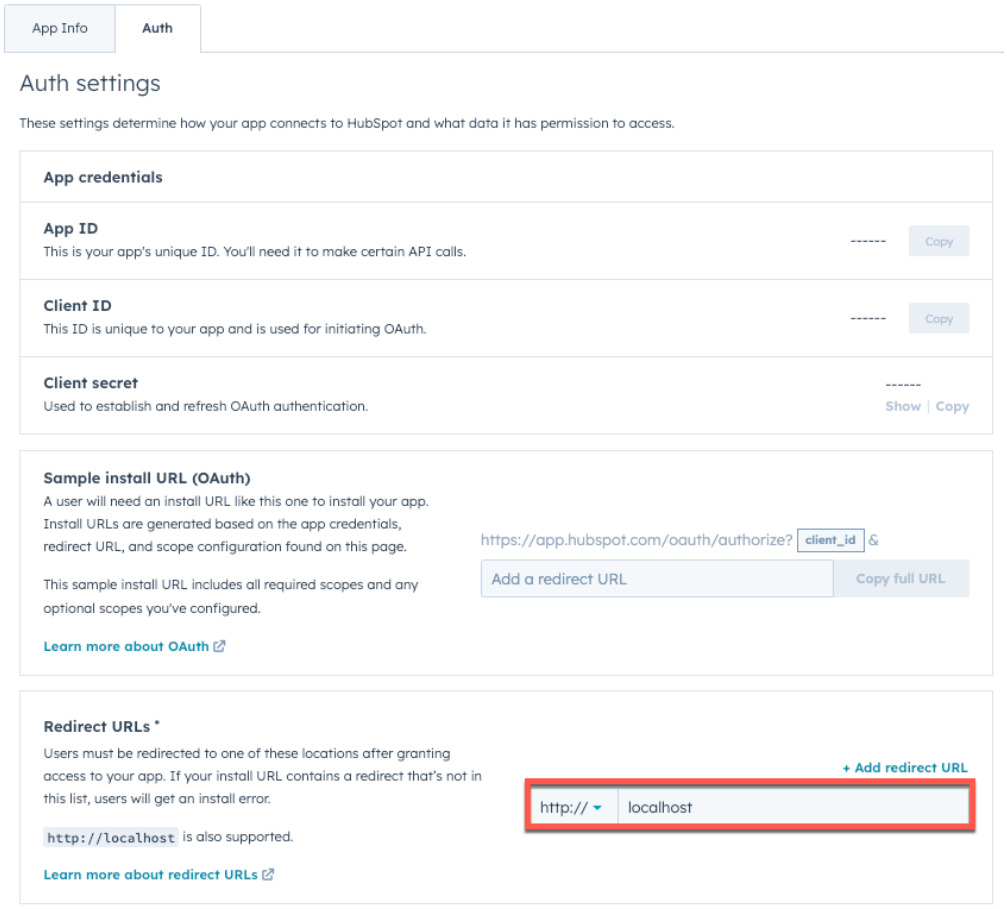

The redirect URL is the callback URL of your server. After granting access and the associated account permissions to your app, you will be redirected to this URL. If you don't have an official redirect URL, you can use `http://localhost` for local development while you build and test your app.

7. To configure the scopes that your app will require, in the **Scopes** section, click **Add new scope** as shown in the following image:

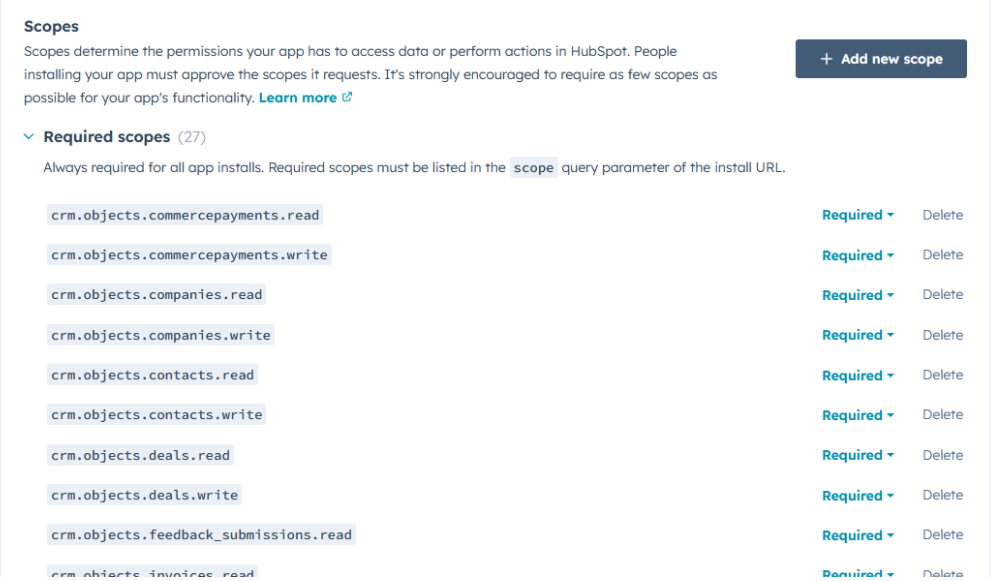

8. Select the check box corresponding to the scopes that you want the user to authorize.
9. Click the scope list and select a scope type.
10. Click **Update**.
11. After configuring the app settings, click **Create app**.

CHAPTER 2

HubSpot connections

Use HubSpot Connector to enable your application or tool to communicate securely with a specific HubSpot instance.

You can perform CRUD operations, such as create, read, update, and delete, on existing resources, such as Users, Companies, and Notes.

You can perform actions, such as get object, create object, update object, delete object, and upsert object.

After you create a HubSpot connection, you can validate and save the connection.

You can then publish the HubSpot connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the HubSpot connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **HubSpot**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server, a Secure Agent group, or a Secure Agent machine.
Connection Test	Not supported for HubSpot Connector.
OData-Enabled	Not supported for HubSpot Connector.

After you configure the basic properties, you can define the OAuth 2.0 authentication properties for the HubSpot connection.

HubSpot connection authentication properties

When you create a HubSpot connection, you can configure the OAuth 2.0 authentication properties.

To authenticate the HubSpot connection using OAuth2 authentication, select **OAuth2** in the **Authentication Type** list and configure the following properties:

Property	Description
Grant Type	Required. Select the required grant type based on your use case. The grant type is set to **Authorization Code** for OAuth 2 configuration.
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://app.hubspot.com/oauth/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://api.hubapi.com/oauth/v1/token` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the email application.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For example, `crm.objects.subscriptions.write crm.objects.subscriptions.read crm.objects.orders.write oauth crm.objects.commercepayments.read crm.objects.orders.read crm.objects.invoices.read`
Session duration	Optional. Enter the number of minutes to wait before refreshing the session. This value is used if you can't get the token expiration from the OAuth provider. Default is 60 minutes.
Other Parameters	Optional. Enter parameters to customize the authorization request, separated with semicolons. You can provide additional information or specify requirements of the OAuth provider.
Authorization Status	Optional. Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

Use the **Client ID**, **Client Secret**, and **Scope** that you copied from the Hubspot app.

HubSpot connection properties


To configure the HubSpot connection, enter the base URL or domain in the **Host** property within the **Connection Properties** section. The host name is used to access the HubSpot instance.

HubSpot connection metadata

After you create a HubSpot connection, you can validate and save the connection. You can then publish the HubSpot connection and click the **Metadata** tab to view the generated process objects for the connection.

When you publish a HubSpot connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published HubSpot connection:

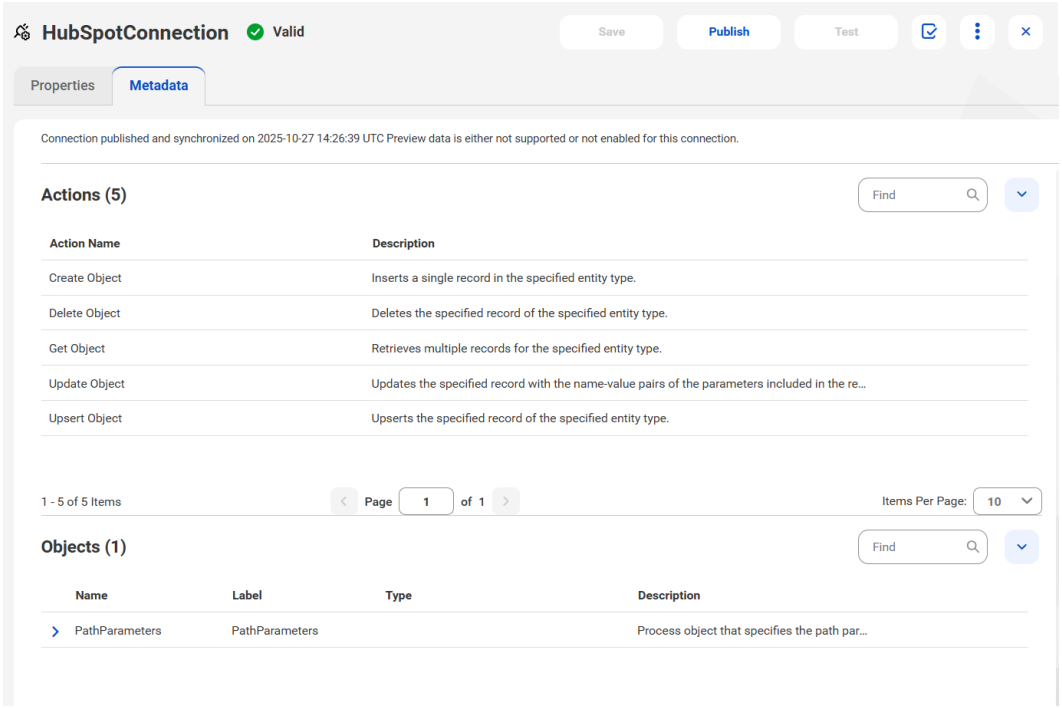

HubSpot connection actions and objects

When you publish a HubSpot connection in Application Integration, the **Actions** and **Objects** appear on the **Metadata** tab.

To use fields with data types, such as array, boolean, double, or integer, you must use annotations as shown in the following sample code:

```
<root xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<field_array m:isArray="true">
<property_1> ...</property_1>
```

```
</field_array>
<field_boolean m:type="xs:boolean">true</field_boolean>
<field_double m:type="xs:double">10.3</field_double>
<field_integer m:type="xs:int">5</field_integer>
</root>
```

Consider the following information when you use specific actions and objects:

- The **Get Object** action retrieves multiple records for the specified entity type.
  You must specify the path parameters for the objects that you want to retrieve. Additionally, provide values for the **queryParameters** field, if required.

  Example: Getting contacts

  The following snippet is a sample input for the pathParameters field:

  ```
  <root>
  <pathParameter>crm</pathParameter>
  <pathParameter>v3</pathParameter>
  <pathParameter>objects</pathParameter>
  <pathParameter>contacts</pathParameter>
  </root>
  ```

  The following snippet is a sample response body:

  ```
  <root>
     <results>
        <createdAt>2025-08-14T07:37:29.965Z</createdAt>
        <archived>false</archived>
        <id>404861480135</id>
        <url>https://app-eu1.hubspot.com/contacts/146727578/record/0-1/404861480135</
  url>
        <properties>
           <firstname>Maria</firstname>
           <lastmodifieddate>2025-08-14T15:37:37.422Z</lastmodifieddate>
           <hs_object_id>404861480135</hs_object_id>
           <createdate>2025-08-14T07:37:29.965Z</createdate>
           <email>emailmaria@hubspot.com</email>
           <lastname>Johnson (Sample Contact)</lastname>
        </properties>
        <updatedAt>2025-08-14T15:37:37.422Z</updatedAt>
     </results>
  ...
  ...
     <results>
        <createdAt>2025-10-14T06:39:05.099Z</createdAt>
        <archived>false</archived>
        <id>483386338550</id>
        <url>https://app-eu1.hubspot.com/contacts/146727578/record/0-1/483386338550</
  url>
        <properties>
           <firstname>John</firstname>
           <lastmodifieddate>2025-10-14T14:26:00.680Z</lastmodifieddate>
           <hs_object_id>483386338550</hs_object_id>
           <createdate>2025-10-14T06:39:05.099Z</createdate>
           <email>john.doe@example.com</email>
           <lastname>Doe</lastname>
        </properties>
        <updatedAt>2025-10-14T14:26:00.680Z</updatedAt>
     </results>
  </root>
  ```

- The **Create Object** action inserts a single record for the specified entity type.
  You must specify the path parameters and request body for the object that you want to create. Additionally, provide values for the **queryParameters** field, if required.

  Example: Creating notes

The following snippet is a sample input for the pathParameters field:

```
<root>
<pathParameter>crm</pathParameter>
<pathParameter>v3</pathParameter>
<pathParameter>objects</pathParameter>
<pathParameter>notes</pathParameter>
</root>
```

The following snippet is a sample request body:

```
<root>
  <properties>
    <hs_note_body>Contacted client about pricing</hs_note_body>
    <hs_timestamp>2025-11-17T01:32:44.872Z</hs_timestamp>
  </properties>
</root>
```

The following snippet is a sample response body:

```
<root>
   <createdAt>2025-10-28T15:27:36.245Z</createdAt>
   <archived>false</archived>
   <id>329136066770</id>
   <url>https://app-eu1.hubspot.com/contacts/146727578/record/0-46/329136066770</url>
   <properties>
      <hs_timestamp>2025-11-17T01:32:44.872Z</hs_timestamp>
      <hs_lastmodifieddate>2025-10-28T15:27:36.245Z</hs_lastmodifieddate>
      <hs_object_source_id>17898842</hs_object_source_id>
      <hs_body_preview_html><html>
<head></head>
<body>
Contacted client about pricing
</body>
</html></hs_body_preview_html>
      <hs_obj_coords>0-46-329136066770</hs_obj_coords>
      <hs_createdate>2025-10-28T15:27:36.245Z</hs_createdate>
      <hs_object_id>329136066770</hs_object_id>
      <hs_object_source>INTEGRATION</hs_object_source>
      <hs_note_body>Contacted client about pricing</hs_note_body>
      <hs_body_preview_is_truncated>false</hs_body_preview_is_truncated>
      <hs_body_preview>Contacted client about pricing</hs_body_preview>
      <hs_object_source_label>INTEGRATION</hs_object_source_label>
   </properties>
   <updatedAt>2025-10-28T15:27:36.245Z</updatedAt>
</root>
```

- The **Update Object** action updates the specified record with the name-value pairs of the parameters included in the request body.
  You must specify the path parameters and request body for the object that you want to update. Additionally, provide values for the **queryParameters** field, if required.

  Example: Updating a meeting

  The following snippet is a sample input for the pathParameters field:

  ```
  <root>
  <pathParameter>crm</pathParameter>
  <pathParameter>v3</pathParameter>
  <pathParameter>objects</pathParameter>
  <pathParameter>meetings</pathParameter>
  <pathParameter>266126487794</pathParameter>
  </root>
  ```

  The following snippet is a sample request body:

  ```
  <root>
      <properties>
  <hs_meeting_title>Updated title</hs_meeting_title>
      </properties>
  </root>
  ```

The following snippet is a sample response:

```
<root>
   <createdAt>2025-08-17T07:37:30.739Z</createdAt>
   <archived>false</archived>
   <id>266126487794</id>
   <url>https://app-eu1.hubspot.com/contacts/146727578/record/0-47/266126487794</url>
   <properties>
      <hs_lastmodifieddate>2025-10-14T07:38:17.482Z</hs_lastmodifieddate>
      <hs_object_source_id>sample-contact</hs_object_source_id>
      <hs_meeting_title>Updated title</hs_meeting_title>
      <hs_obj_coords>0-47-266126487794</hs_obj_coords>
      <hs_createdate>2025-08-17T07:37:30.739Z</hs_createdate>
      <hs_object_id>266126487794</hs_object_id>
      <hs_object_source>INTERNAL_PROCESSING</hs_object_source>
      <hs_object_source_label>INTERNAL_PROCESSING</hs_object_source_label>
   </properties>
   <updatedAt>2025-10-14T07:38:17.482Z</updatedAt>
</root>
```

- The **Delete Object** action deletes the specified record of the given entity type.
  You must specify the path parameters for the object that you want to delete. Additionally, provide values for the **queryParameters** field, if required.

  Example: Deleting a company

  The following snippet is a sample input for the pathParameters field:

  ```
  <root>
  <pathParameter>crm</pathParameter>
  <pathParameter>v3</pathParameter>
  <pathParameter>objects</pathParameter>
  <pathParameter>companies</pathParameter>
  <pathParameter>256294758628</pathParameter>
  </root>
  ```

  The above set of path parameters contains the ID of the company to be deleted.

  The Delete Object action returns a `204 No Content` response.

- The **Upsert Object** action upserts the specified record of a given entity type.
  You must specify the path parameters and the request body for the object that you want to upsert. Additionally, provide values for the **queryParameters** field, if required.

  Example: Updating a meeting

  The following snippet is a sample input for the pathParameters field:

  ```
  <root>
    <pathParameter>marketing</pathParameter>
    <pathParameter>v3</pathParameter>
    <pathParameter>marketing-events</pathParameter>
    <pathParameter>associations</pathParameter>
    <pathParameter>854707947747</pathParameter>
    <pathParameter>lists</pathParameter>
    <pathParameter>4</pathParameter>
  </root>
  ```


  The Upsert Object action returns a `204 No Content` response.

Using a HubSpot connection in a process

After you create a HubSpot connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.

3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the HubSpot connection that you created.
5. From the **Action** list, select the action that you want to perform. For example, select the **Get Object** action to retrieve multiple records for the specified entity type as shown in the following image:

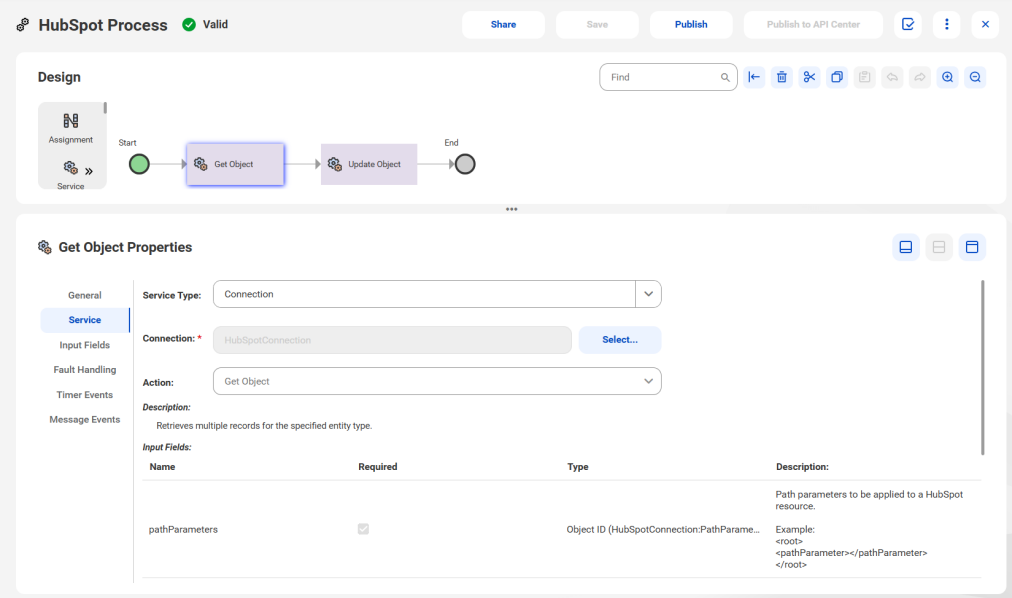

   In this case, Application Integration populates the **pathParameters** and **queryParameters** objects under the input fields and the **response** and **statusCode** objects under the output fields.
6. Configure further steps as needed.
7. Validate, save, and publish the process.