Informatica

Informatica® Application Integration
October 2025

Salesforce Streaming Event Connector Guide

Informatica Application Integration Salesforce Streaming Event Connector Guide
October 2025

© Copyright Informatica LLC 1993, 2025

Publication Date: 2025-10-03

Table of Contents

Preface 4

Chapter 1: Introduction to Salesforce Streaming Event Connector 5

Salesforce overview 5

Configuring permissions for Salesforce events 6

Chapter 2: Salesforce Streaming Event connections 7

Salesforce Streaming Event connections overview 7

Basic Salesforce connection properties 8

Salesforce Streaming Event connection authentication properties 9

Salesforce Streaming Event source properties 13

Salesforce event target properties 15

Salesforce Streaming Event connection metadata 16

Chapter 3: Salesforce processes 18

Salesforce Streaming Event connector processes 18

Process guidelines for subscribing to Salesforce platform events and PushTopic queries 18

Process guidelines for publishing messages to Salesforce platform events 19

Rules and guidelines for Salesforce processes 19

Index 21

Preface

Read the *Salesforce Streaming Event Connector Guide* to learn how organization administrators and business users can use Salesforce Streaming Event Connector to connect to Salesforce events and services. Learn how to create Salesforce streaming event sources and event targets, and use them in a process.

CHAPTER 1

Introduction to Salesforce Streaming Event Connector

Use Salesforce Streaming Event Connector to subscribe to Salesforce custom platform events, PushTopic queries, and change events. You can also publish messages to Salesforce platform events.

With Salesforce Streaming Event Connector, you can create a Salesforce Streaming Event connection and use it in an Application Integration process. You can create connections to the following Salesforce editions:

- Professional Edition
- Enterprise Edition
- Unlimited Edition

Application Integration supports the OAuth and Password methods to authenticate the Salesforce connection.

You can create an Application Integration process to perform the following tasks:

- Subscribe to events from Salesforce streaming channels such as platform events, PushTopic queries, and change events.
- Publish messages to Salesforce platform events.

  Note: You can't use Salesforce Streaming Event Connector to subscribe to or publish messages to standard platform events.

Salesforce overview

Salesforce is a cloud-based Customer Relationship Management (CRM) solution for sales teams to manage contacts and sales activities. Use Salesforce to store and manage contacts and data of the sales activities of your organization.

Salesforce provides a Streaming API that enables streaming of events using the push technology. You can use the Streaming API to subscribe to Salesforce platform events, PushTopic queries, and change events. You can also publish messages to Salesforce platform events in near real time.

Configuring permissions for Salesforce events

To subscribe to or publish messages to Salesforce custom platform events, you must configure permissions in your Salesforce environment.

1. Log in to Salesforce.
2. Under **Administer** on the left pane, click **Manage Users** > **Profiles**, and click on the user profile name for which you want to assign permissions.
3. Edit the profile to assign object permissions to the Salesforce custom platform event that you created.

CHAPTER 2

Salesforce Streaming Event connections

This chapter includes the following topics:

- Salesforce Streaming Event connections overview, 7
- Basic Salesforce connection properties, 8
- Salesforce Streaming Event connection authentication properties, 9
- Salesforce Streaming Event source properties, 13
- Salesforce event target properties, 15
- Salesforce Streaming Event connection metadata, 16

Salesforce Streaming Event connections overview

Create a Salesforce Streaming Event connection to connect to Salesforce events. You can configure an event source in a Salesforce connection to subscribe to Salesforce custom platform events, PushTopic queries, and change events. You can configure an event target to publish messages to Salesforce platform events.

After you create a Salesforce Streaming Event connection, you can validate and save the connection. You can then publish the Salesforce Streaming Event connection and click the **Metadata** tab to view the generated events for the connection.

Basic Salesforce connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. A name for the Salesforce Streaming Event connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-). The name must be unique within the project or folder where you create the connection.
Location	Optional. The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. A description of the connection.
Type	Required. The type of connection that you want to use for the connector or service connector. Select **Salesforce Streaming Event**.
Runtime Environment	Required. The runtime environment for the connection. You can run the connection on the Cloud Server.
Connection Test	Indicates whether the connection test was successful or not.
OData-Enabled	Not supported for Salesforce Streaming Event Conenctor.

After you configure the basic properties, you must also define the following properties:

- The authentication properties for the Salesforce Streaming Event connection
- The event source properties for the Salesforce Streaming Event connection
- The event target properties for the Salesforce Streaming Event connection

Salesforce Streaming Event connection authentication properties

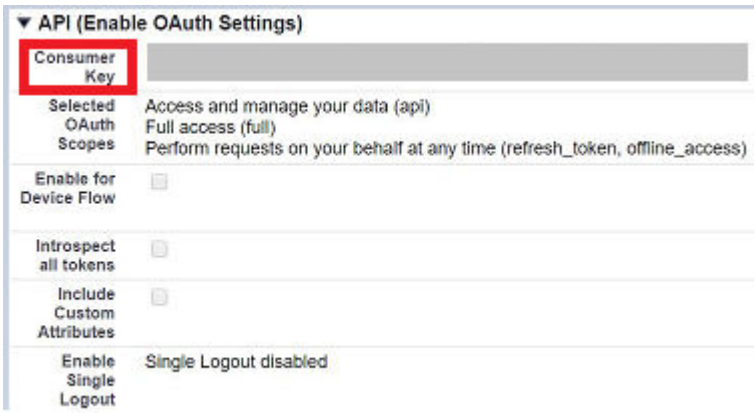
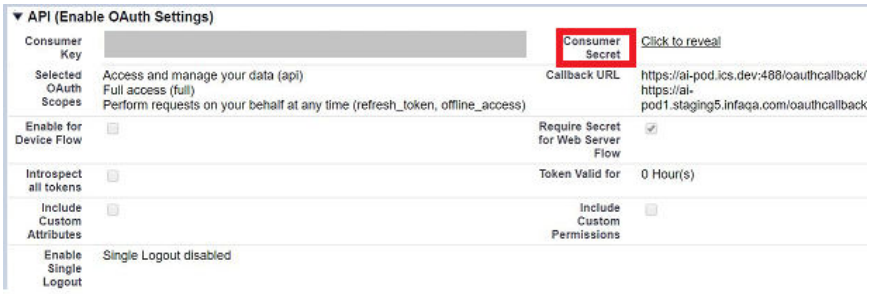
When you create a Salesforce Streaming Event connection, configure the connection using Password or OAuth authentication properties. Default is **Password** authentication.

Password authentication

To authenticate the Salesforce connection using Password authentication, select **Password** in the **Authentication Type** list and configure the following properties:

Property	Description
User name	Required. Salesforce developer account user name.
Password	Required. Salesforce developer account password.
Security Token	Required. The security token to connect to Salesforce. This is a case-sensitive alphanumeric code used as a second level of authentication.
Service URL	Required. Enter the following SOAP service URL of the Salesforce Streaming Event endpoint. For example, enter `https://login.salesforce.com/services/Soap/c/56.0` To subscribe to Salesforce Streaming platform events, PushTopic queries, and change events, or publish messages to Salesforce Streaming platform events, the supported version for the soap service URL for Salesforce login is 56.0. Enter the following value: `https://login.salesforce.com/services/Soap/c/56.0`

To subscribe to Salesforce Streaming platform events, PushTopic queries, and change events, or publish messages to Salesforce Streaming platform events, you must configure the following properties in the **Event API Settings** section:

Property	Description
Consumer Key	The consumer key associated with the Salesforce user account for API access. This field is required to subscribe to platform events, PushTopic queries, and change events, or publish messages to platform events. To find the consumer key, perform the following steps: - Log in to Salesforce. - Click **Create** > **Apps**. The connected apps are displayed. - Click the connected app. The **API** section displays the consumer key as shown in the following image: 
Consumer Secret	The consumer secret associated with the Salesforce user account for API access. This field is required to subscribe to Salesforce platform events, PushTopic queries, and change events, or publish messages to Salesforce platform events. To find the consumer secret, perform the following steps: - Log in to Salesforce. - Click **Create** > **Apps**. The connected apps are displayed. - Click the connected app. The **API** section displays the consumer secret as shown in the following image: 

OAuth authentication

Use OAuth to connect to a Salesforce through an API. If you choose OAuth authentication, you enter your Salesforce developer account credentials in a Salesforce window that opens when you authenticate the connection. You do not enter your Salesforce developer account credentials in the Application Integration UI. For more information about using OAuth to authorize external applications, see the Salesforce documentation.

To authenticate the Salesforce connection using OAuth authentication, select **OAuth** in the **Authentication Type** list and configure the following properties:

Property	Description
Authorization URL	Required. Endpoint used to make OAuth authorization requests to Salesforce. The following URLs are the default production and sandbox authorization URLs: - https://login.salesforce.com/services/oauth2/authorize - https://test.salesforce.com/services/oauth2/authorize
Token Request URL	Required. Endpoint used to make OAuth token requests to Salesforce. The following URLs are the default production and sandbox token request URLs: - https://login.salesforce.com/services/oauth2/token - https://test.salesforce.com/services/oauth2/token
Session Duration	Optional. Number of minutes after which the OAuth token expires. When this duration ends, the connection makes a token request and performs authorization again. You do not need to manually authorize the connection when the session times out. Default is 60 minutes.
Authorization Status	The current authorization status. The name of the last user who authorized the connection and the time of authorization appears, if applicable.
Authorize Access	Required. Starts the OAuth authentication process. Perform the following tasks: 1. Click **Authorize** next to **Authorize Access**. 2. In the Salesforce window that appears, enter your Salesforce developer account credentials. 3. Click **Allow** next to the message that prompts you to authorize access.

OAuth JWT authentication

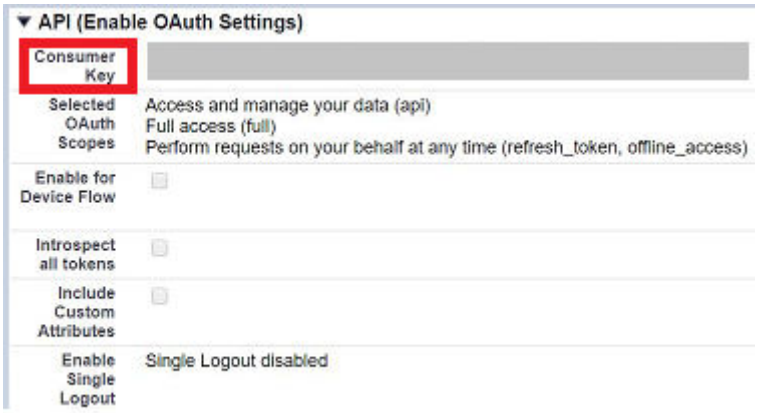
You can configure OAuth JSON Web Token (JWT) authentication in a Salesforce connection to connect to Salesforce.

Use OAuth JWT authentication to authorize servers to access data without logging in each time the servers exchange information. The OAuth JWT authentication uses a certificate to sign the JWT request and does not require explicit user interaction.

Before you configure OAuth JWT authentication, ensure that you have the keystore file and password.

To authenticate the Salesforce connection using OAuth JWT authentication, select **OAuth JWT** in the **Authentication Type** list and configure the following properties:

Property	Description
User Name	Required. Salesforce user name that has access to the connected app.
Keystore File	Required. Select a keystore file of the PKCS12 format.
Keystore Password	Required. Enter the keystore password.
Session Duration	Optional. Number of minutes after which the session expires. When this duration ends, the connected app makes a token request and performs authorization again. You do not need to manually authorize the connection when the session times out. Default is 60 minutes.

Property	Description
Consumer Key	Required. The consumer key associated with the Salesforce connected app. This field is required to subscribe to Salesforce platform events, PushTopic queries, and change events, or publish messages to Salesforce platform events. To find the consumer key, perform the following steps: - Log in to Salesforce. - Click **Create** > **Apps**. The connected apps are displayed. - Click the connected app. The **API** section displays the consumer key as shown in the following image: 
Token Request URL	Required. Endpoint used to make OAuth token requests to Salesforce. The following URL is the default production token request URL: - https://login.salesforce.com/services/oauth2/token
Audience	Required. Endpoint of the authorized servers of the intended audience for the token. The following URLs are the default production and Experience Cloud site token request URLs: - https://login.salesforce.com - https://site.force.com/customers

Note: To use a platform event-based Salesforce connection with OAuth JWT authentication in a process, ensure that the platform event is in the same Salesforce organization and the event is enabled. Otherwise, in the input fields of the process, instead of the connection event type, you might see the type as `$any`.

While configuring the Salesforce connection with OAuth JWT authentication, you might encounter the following errors:

- `invalid_grant : user has not approved this consumer`
  To resolve this issue, you must change the OAuth policy of the connected app from **All users may self-authorize** to **Admin approved users are pre-authorized** in Salesforce.
- `invalid_app_access : user is not admin approve to access this app`
  To resolve this issue, you must provide the connected app access to the user's profile in Salesforce.

For more information about OAuth JWT authentication, see the Salesforce documentation.

Salesforce Streaming Event source properties

Salesforce Streaming Event Connector supports the Salesforce Streaming API. You can configure an event source in a Salesforce Streaming Event connection to subscribe to Salesforce platform events, PushTopic queries, and change events. You can use the event source in a process to consume changes in near real time.

After you define an event source for a Salesforce Streaming Event connection, you can publish the connection on the Cloud Server. You can then access the event source in a process and deploy the process on the Cloud Server to consume the events generated by the event source downstream.

After the connection is published for the first time, Salesforce Streaming Event connector assigns a default replay ID of -1. When the event is delivered to the subscribers, the replay ID is auto-generated based on the position of the event in the event stream. The Process Server persists the replay IDs and uses them to process subsequent requests. In case of a connection failure, the Process Server uses the persisted replay ID to retrieve missed events and avoid message loss.

Salesforce retains messages for 24 hours. If the replay ID points to a message older than 24 hours, the replay ID is reset to -1 and only the recent events are processed. To facilitate at-most once delivery, the Informatica Cloud Server uses an idempotent repository to store the replay ID, thereby avoiding duplicate processing when the replay ID is reset.

To create event sources for a Salesforce connection, click **Add Event Source** on the **Event Sources** tab. Select the event source type as **Event Source**. You can add one or more event sources for each Salesforce connection that you create.

The following table describes the basic event source properties that you can configure:

Property	Description
Name	Required. The event source name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Salesforce event source that appears in the Process Designer.
Enabled	Select **Yes** to make the event source available immediately after it is published. Select **No** to disable the event source until you are ready to use it. Default is **Yes**.

You can configure the following properties for an event source:

Event Consumer

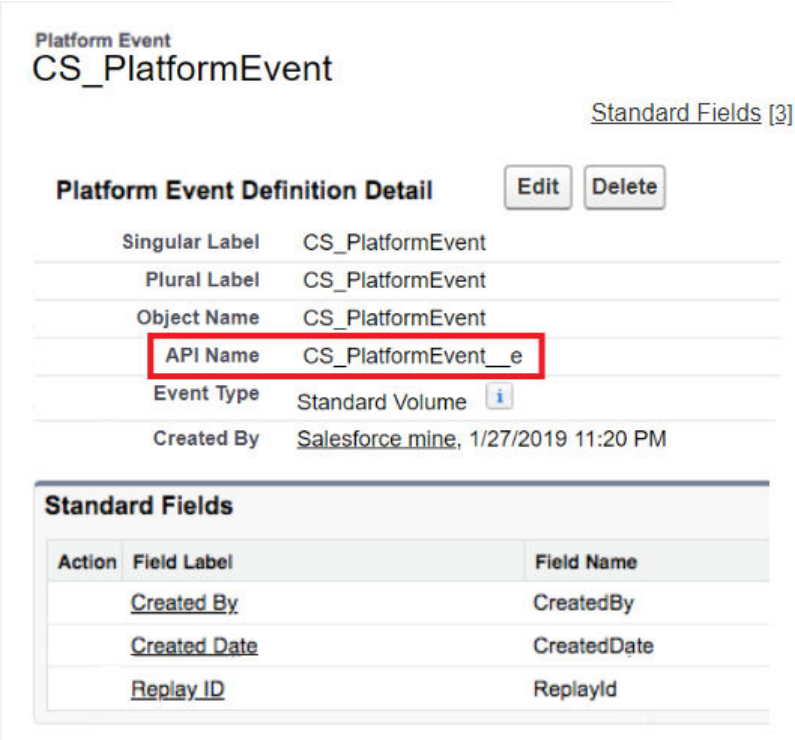
Required. Name of the Salesforce platform event, PushTopic query, or change event that you want to subscribe to.

Use one of the following ways to configure the property based on the type of event that you want to subscribe to:

Subscribing to Salesforce platform events

To subscribe to platform events, enter the API name that you defined for the platform event in Salesforce, prefixed by the term **/event/**.

For example, consider a Salesforce platform event with the API name set to **CS_PlatformEvent_e** as shown in the following image:



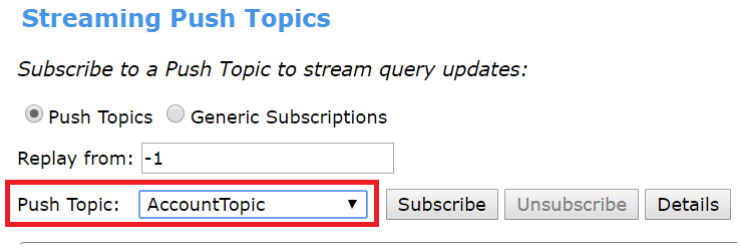
For this Salesforce platform event, enter the following value in the **Event Consumer** field:

```
/event/CS_PlatformEvent_e
```

Subscribing to Salesforce PushTopic queries

To subscribe to PushTopic queries, enter the streaming push topic name that you defined for the PushTopic query in Salesforce Streaming Event, prefixed by the term **/topic/**.

For example, consider a Salesforce PushTopic query with the push topic name set to **AccountTopic** as shown in the following image:



For this Salesforce PushTopic query, enter the following value in the **Event Consumer** field:

```
/topic/AccountTopic
```

Subscribing to change events

You can use Salesforce Streaming Event Connector to subscribe to change events in Salesforce and synchronize the corresponding data in an external data store.

Change events represent the changes that have been made to a record. Changes include creating a new record, updating an existing record, deleting a record, and undeleting a record.

To subscribe to change events, use one of the following formats:

- `/data/ChangeEvents` to subscribe to the change events of all the Salesforce CDC-enabled entities
- `/data/<standard_object_name>ChangeEvent` to subscribe to the change events of a specific standard object
- `/data/<custom_object_name>__ChangeEvent` to subscribe to the change events of a specific custom object

If you update the list of CDC-enabled entities in Salesforce, you must republish the Salesforce connection and process to listen to the new or updated CDC-enabled entities.

By default, Salesforce Streaming Event Connector listens to all the change events of all the entities in an organization that are enabled for Change Data Capture (CDC) in Salesforce. To filter the change events, you can define specific CDC-enabled entities that you want to listen to in the **Event Filter** field.

Event Filter

In the **Event Filter** field, enter a comma-separated list of names of the CDC-enabled entities for which you want to filter the change events.

You can view the status of each event source in the published connection. If the status of the event source is stopped, you can republish the connection and restart the event source. When you republish the connection, all the event sources in the connection start by default.

For more information about starting and stopping event sources in a listener-based connection, see *Connectors for Cloud Application Integration and Monitor*.

Salesforce event target properties

Salesforce Connector supports the Salesforce Streaming API. You can configure an event target in a Salesforce connection to publish messages to Salesforce platform events. You can use the event target in a process to publish mesages in near real time.

Note: You can't configure an event target to publish messages to Salesforce PushTopic queries.

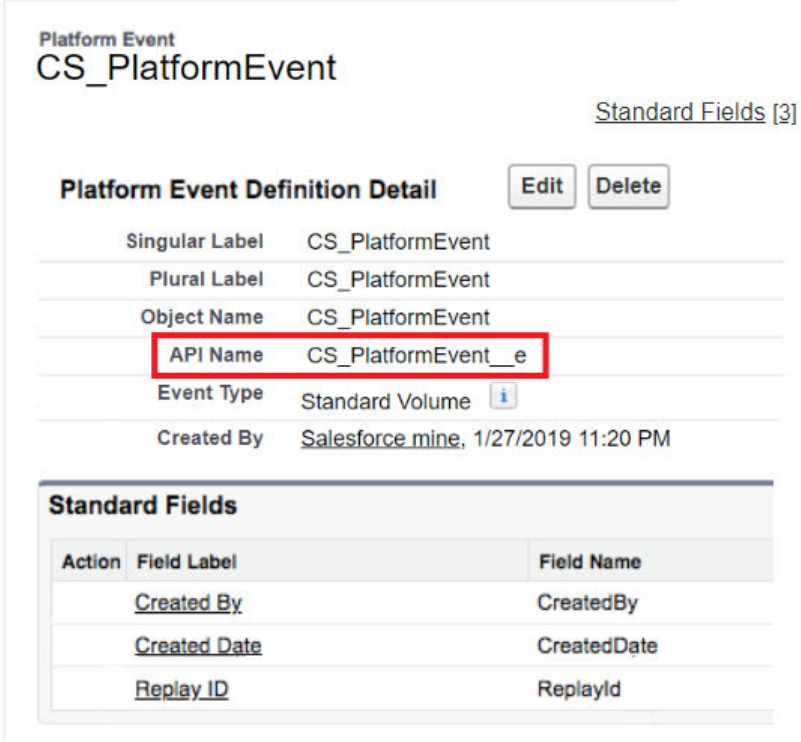
After you define an event target for a Salesforce connection, you can publish the connection on the Cloud Server. You can then access the event target in a process and deploy the process on the Cloud Server to produce the events generated by the event target downstream.

To create event targets for a Salesforce connection, click **Add Event Target** on the **Event Targets** tab. Select the event target type as **Event Target**. You can add one or more event targets for each Salesforce Streaming Event connection that you create.

The following table describes the basic event target properties that you can configure:

Property	Description
Name	Required. The event target name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Salesforce event target that appears in the Process Designer.

The following table describes the event target property that you can configure:

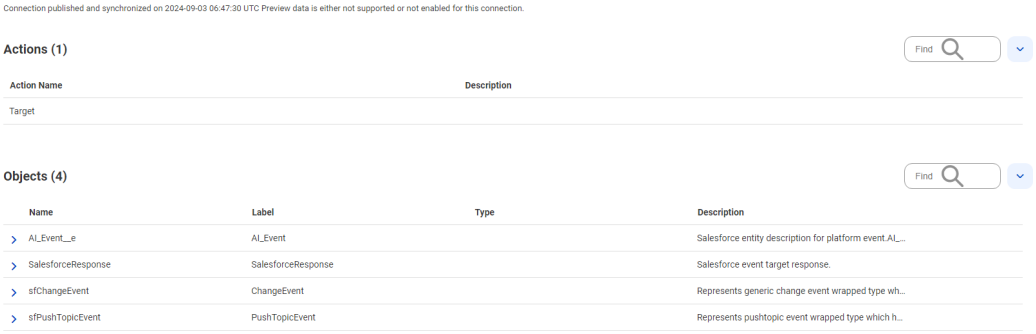
Event Target Property	Description
Event Producer	Required. Name of the Salesforce platform event to which you want to publish messages. To publish messages to platform events, enter the API name that you defined for the platform event in Salesforce, prefixed by the term **/event/**. For example, consider a Salesforce platform event with the API name set to **CS_PlatformEvent_e** as shown in the following image:  For this Salesforce platform event, enter the following value in the **Event Producer** field: `/event/CS_PlatformEvent_e`

Salesforce Streaming Event connection metadata

After you create a Salesforce Streaming Event connection, save the connection. You can then publish the Salesforce Streaming Event connection and click the **Metadata** tab to view the generated process objects for the connection.

When publish a Salesforce Streaming Event connection in Application Integration, a list of **Actions** and **Objects** appear in the **Metadata** tab.

The following image shows the **Metadata** tab for a published Salesforce Streaming Event connection:



When you publish a Salesforce connection, the **Metadata** tab is refreshed by default.

CHAPTER 3

Salesforce processes

This chapter includes the following topics:

- Salesforce Streaming Event connector processes, 18
- Process guidelines for subscribing to Salesforce platform events and PushTopic queries, 18
- Process guidelines for publishing messages to Salesforce platform events, 19
- Rules and guidelines for Salesforce processes, 19

Salesforce Streaming Event connector processes

After you create a Salesforce Streaming Event connection, you can use it in a process along with the associated event sources and event targets.

You can create an Application Integration process to perform the following tasks:

- Subscribe to events from Salesforce streaming channels such as custom platform events, PushTopic queries, and change events.
- Publish messages to Salesforce custom platform events.

Salesforce Streaming Event Connector processes can be triggered upon an event such as an insertion, update, or deletion of a record in Salesforce.

The Salesforce Streaming Event connection and the Salesforce Streaming Event consumer process must run on the Cloud Server. Similarly, the Salesforce Streaming Event connection and the Salesforce producer process must run on the Cloud Server only.

To view a video about publishing and subscribing to Salesforce platform events, and download a sample process, see the following community article:

https://knowledge.informatica.com/s/article/DOC-18453

Process guidelines for subscribing to Salesforce platform events and PushTopic queries

Use the following guidelines when you create a process to subscribe to Salesforce platform events, PushTopic queries, and change events:

1. Create a process and click the Start step.

2. Click the **Start** tab and select the process binding type as **Event**.
3. In the **Event Source Name** field, select the event source that you created in the Salesforce Streaming Event connection. Application Integration creates an input field called **event** to capture the event details. You can't delete this input field. You also can't add more input fields.
4. Configure other steps and properties as needed.
5. Validate, save, and publish the process.

When an event occurs for the custom platform event, PushTopic query, or change event that you specified in the Salesforce connection, the process gets invoked.

You can view the process execution details in Application Integration Console. Click the **Processes** tab and select the agent where you configured the process to run. Click the ID to view details of the process execution.

Process guidelines for publishing messages to Salesforce platform events

Use the following guidelines when you create a process to publish messages to Salesforce platform events:

1. Create a process and click the Start step.
2. Click the **Start** tab and select the process binding type as **REST/SOAP**.
3. Add a Service step and then perform the following steps:
   - From the **Service Type** list, select **Connection**.
   - From the **Connection** list, browse and select the Salesforce Streaming Event connection that you created.
   - From the **Action** list, select the Salesforce event target that you created in the Salesforce connection. Application Integration creates an input field called **event** to capture the event details. You can't delete this input field. You also can't add more input fields.
   - Configure the message that you want to publish to the Salesforce platform event.
4. Configure other steps and properties as needed.
5. Validate, save, and publish the process.
6. Invoke the process to publish messages to the Salesforce platform event.

You can view the process execution details in Application Integration Console. Click the **Processes** tab and select the agent where you configured the process to run. Click the ID to view details of the process execution.

Rules and guidelines for Salesforce processes

Consider the following rules and guidelines when you create a Salesforce Streaming Event process:

- You can only use Salesforce Streaming Event Connector to subscribe to or publish messages to Salesforce standard platform events and not process objects.

- If you add a Wait step to a process to subscribe to Salesforce custom platform events, PushTopic queries, and change events, you must ensure that the wait period is earlier than 40 seconds. If the wait period exceeds 40 seconds, you might encounter a message loss. Add a Milestone step for an early reply and to prevent message loss.
- When a process that consumes Salesforce streaming events fails, the process is incorrectly triggered two more times.

INDEX

S

Salesforce
  overview 5
Salesforce connections
  basic properties 8
Salesforce Connector administration
  assigning custom platform event permissions 6