How-To Library

Informatica

Automate Informatica processing unit monitoring and alerting

© Copyright Informatica LLC 2024, 2025. Informatica, the Informatica logo, and Informatica Cloud are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

This article describes how you can automate the monitoring of Informatica processing unit (IPU) usage and schedule an alert to be sent when the usage is higher than expected on a particular day.

Supported Versions

- Informatica Cloud Application Integration February 2024

Table of Contents

Overview. 2
Prerequisites. 2
Automating IPU monitoring and alerting. 3
Step 1: Import the attached assets into your organization 3
Step 2: Publish assets 3
Step 3: Create a schedule. 5

Overview

You can use Application Integration to automate Informatica processing unit (IPU) monitoring and alerting. You can create a scheduled process to monitor the IPU usage and send an alert when the usage is higher than expected on a particular day or month.

For example, you have configured 60 IPUs to be used monthly. This means that you have allotted approximately 2 IPUs to consume every day in a month. On a particular day, if the consumption exceeds 2 IPUs, you will receive an email notification about the over consumption of IPUs. This helps you take the necessary actions.

The process calculates the IPU usage for the month based on the current day's IPU usage.

For example, if you pass 5 IPUs as input and run the process on the 18th day of the month, the output is calculated as follows:

(5 / 30) * 18 = 3

Informatica provides an Application Integration project that contains the necessary assets configured to automate IPU monitoring and alerting. You can import this project into your organization and schedule the process to run as per your requirement.

Note: The processes are designed for Windows machines.

Prerequisites

Before you import the assets into your organization, verify that the following prerequisites are met:

- Install the Secure Agent to save the IPU reports.
- On a Windows machine, create the following folder where the Secure Agent is installed: `C://IICSFiles`
- Install PowerShell version 6 on the Secure Agent machine.

Automating IPU monitoring and alerting

To automate your IPU monitoring and alerting, perform the following steps:

Step 1. Import the attached assets into your organization

Step 2. Publish the assets

Step 3. Schedule the process to run daily or monthly to send alerts


Step 1: Import the attached assets into your organization

1. Download the project named 1829-attachment.zip to the machine where the Secure Agent is installed.
2. Log in to the organization and import the zip file.

   For information about importing assets, see Import assets.

   Note: Do not select the **Publish Application Integration assets after import** option while importing because you must publish the assets in sequence after changing the existing Point of Deployment (POD) details to your organization's POD details.

   The following image shows the imported assets from the project:

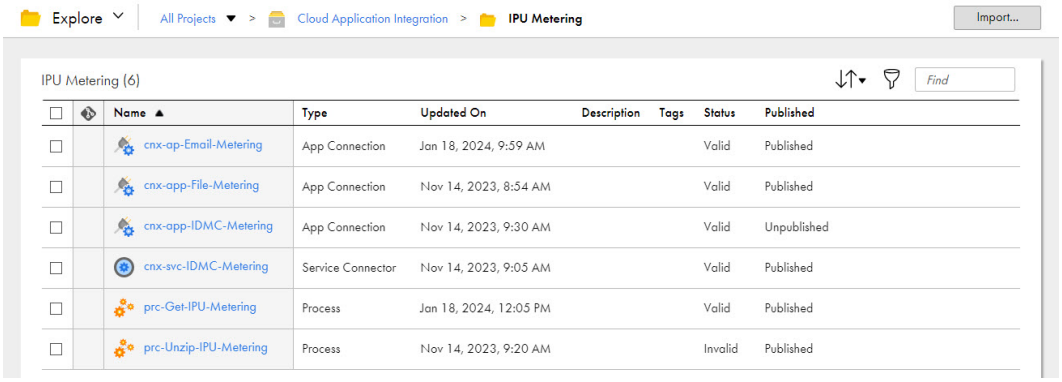

Step 2: Publish assets

1. Open the **cnx-svc-IDMC-Metering** service connector.

   The cnx-svc-IDMC-Metering connector is used to connect to your organization.

   a. Update the loginHost, podHost, user, and password information in the connection properties based on your organization.

   b. Save and publish the service connector.
2. Open the **cnx-ap-Email-Metering** connection.

   The cnx-ap-Email-Metering connection is used to send the report through email.

   a. Enter the user name and password from which you want to send the email report.

   b. Update the SMTP server host information in the **Connections Properties** section.

   c. Save and publish the connection.
3. Open the **cnx-app-File-Metering** connection.

   The cnx-app-File-Metering connection is used to write the files onto the Secure Agent.

   a. Select the appropriate Secure Agent.

b. Save and publish the connection.

Note: The zip file will be saved in the `C:/IICSFiles` location by default. You can also create a folder at a different location and update the file path in the **Directory** field on the **Events Targets** tab.

4. Open the **cnx-app-IDMC-Metering** connection.


The cnx-app-IDMC-Metering connection is used to connect to the Informatica Cloud Server to run the API.

a. Update the loginHost, podHost, user, and password information in the connection properties to connect to the Informatica Cloud Server.


b. Save and publish the connection.

5. Open the **prc-Unzip-IPU-Metering** process.

The prc-Unzip-IPU-Metering process uses the **Run a Shell Command** service as shown in the following image:

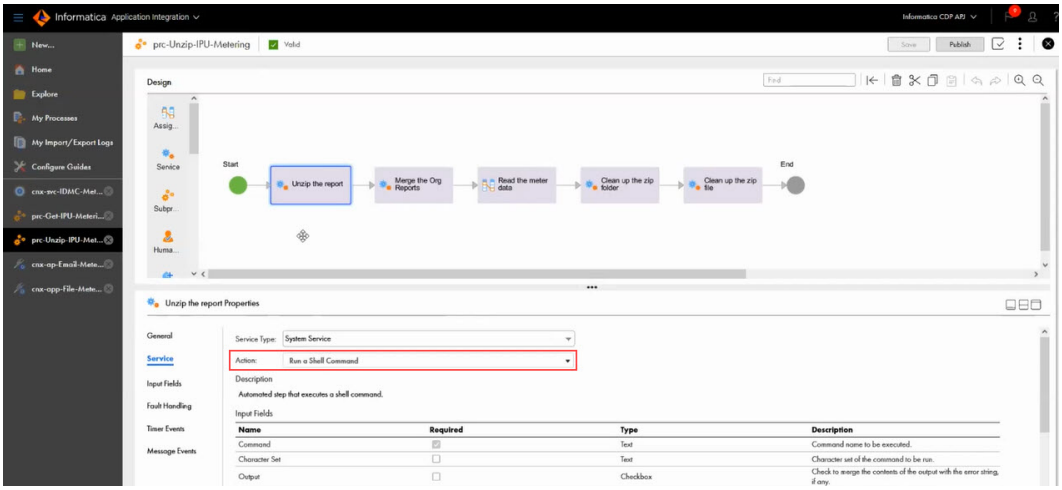

To enable the shell service, navigate to **Application Integration Console** > **Server Configuration** > select the Secure Agent > **System Services** > **Shell Service** > select the **Enable Shell Service** check box > and click **Save** as shown in the following image:

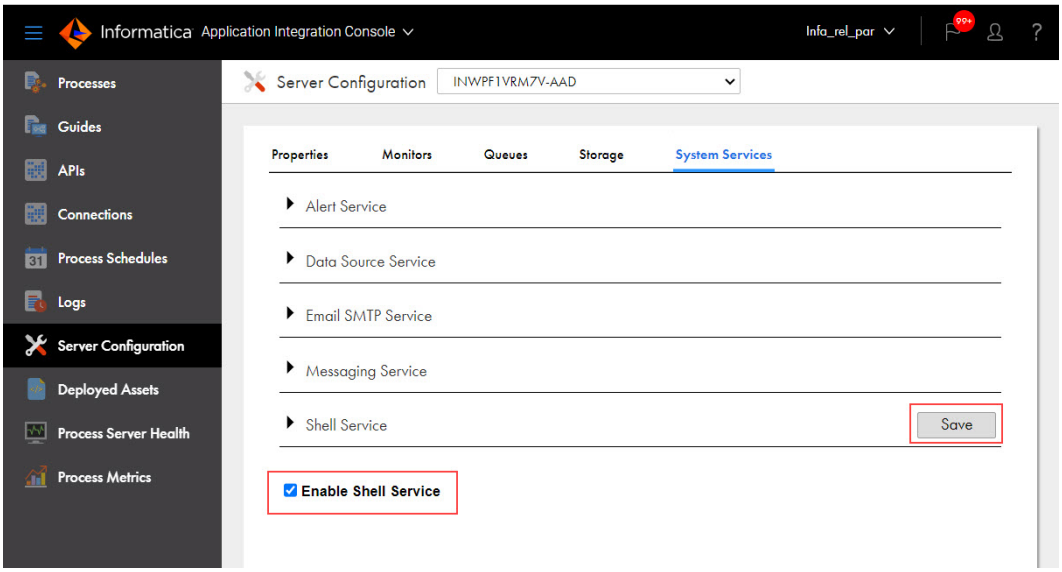

The prc-Unzip-IPU-Metering process is designed as follows:


1. The process unzips the report. All the reports in the organization are combined and an XML file is created to read the data for IPU metering.
2. The zip file and folder on the Secure Agent are cleaned up to remove any junk data.

To use the prc-Unzip-IPU-Metering process, perform the following steps:

1. Select the appropriate Secure Agent.
2. Save and publish the process.

6. Open the **prc-Get-IPU-Metering** process.

The following image shows the prc-Get-IPU-Metering process:

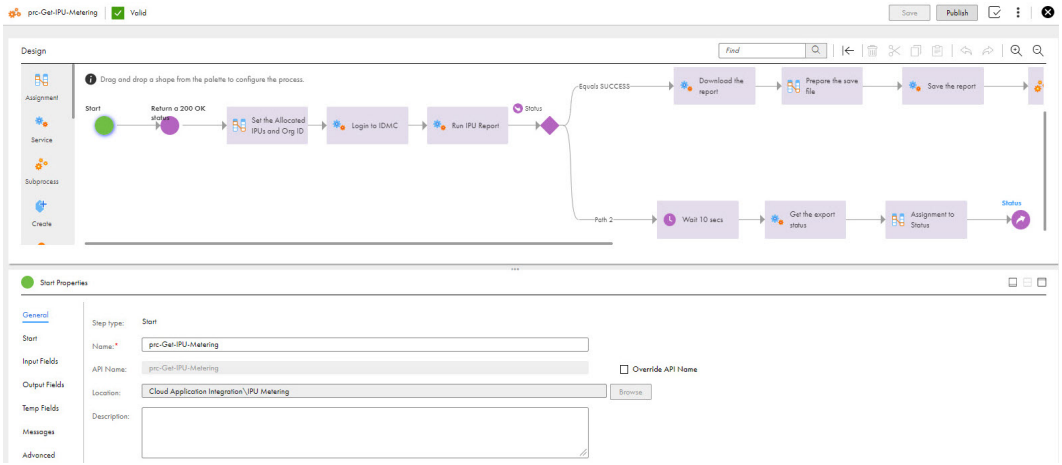

The prc-Get-IPU-Metering process is designed to perform the following tasks:

1. Allocate the total number of IPUs for a month.
2. Run the API that creates the IPU metering report.
3. The process waits for 10 seconds to create the report.
4. After the report zip file is created, it is downloaded and saved to the following Secure Agent location: `C:/IICSFiles`
5. The prc-Unzip-IPU-Metering process unzips the report.
6. Based on the data collected, the process calculates the total number of IPUs consumed. If the total number of IPUs consumed is greater than expected based on the schedule, an alert email is sent to the recipient.


To use the prc-Get-IPU-Metering process, perform the following steps:


1. (Optional) Set the total number of IPUs that you want to allocate for a month. 60 IPUs are allocated by default.
2. In the **Prepare the Email** assignment step, enter the recipient details and the message that you want to send.
3. Save and publish the process.

Step 3: Create a schedule

You can create a schedule to run the process daily or monthly based on when you want to send alerts.

For example, create a schedule named IPU-Usage-Monitoring to run the prc-Get-IPU-Metering process every day as shown in the following images:

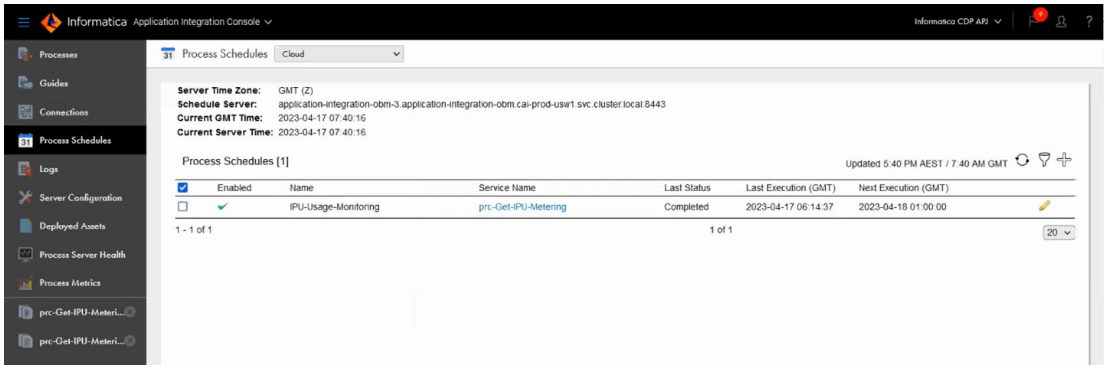


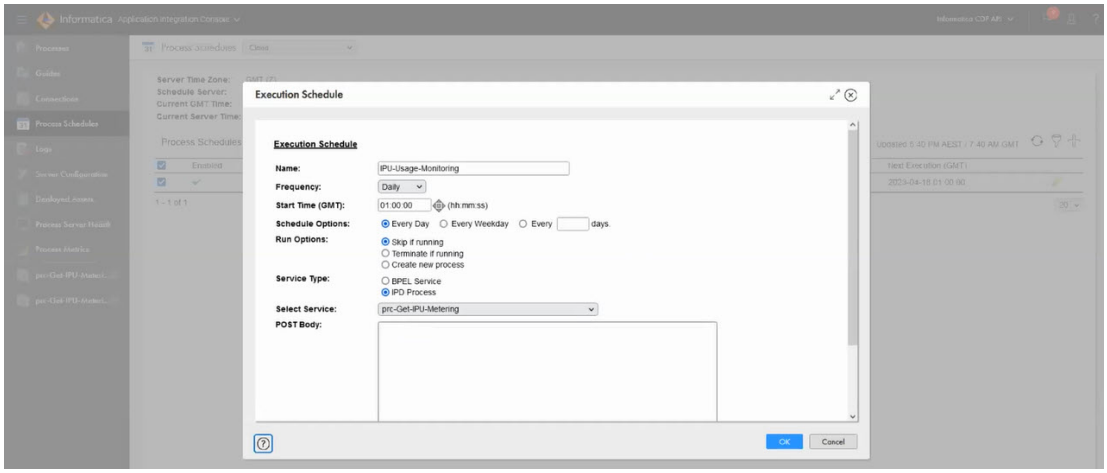

The schedule runs and when it reaches the appropriate time of the day, the prc-Get-IPU-Metering process runs to verify the IPU consumption.

For more information about process schedules, see Process Schedules.

If the IPU consumption is higher than expected, an email notification about the over consumption of IPUs is sent as shown in the following image:

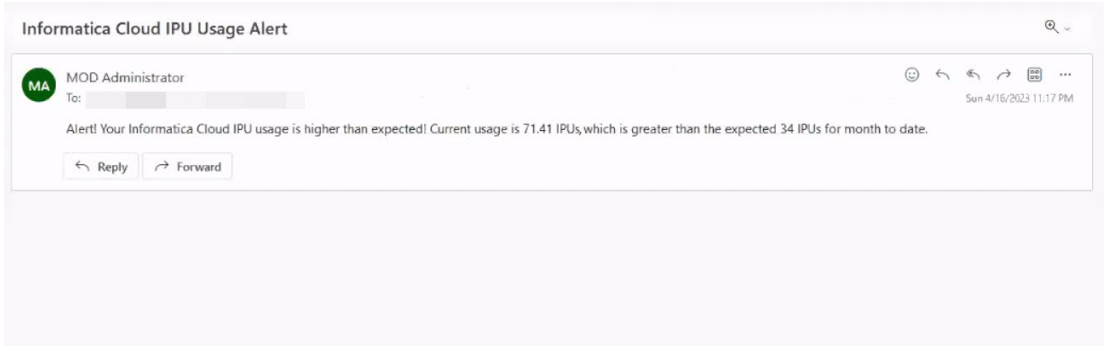

Author

Sonali Kumbhalkar