Informatica® Cloud Application Integration
April 2025

Omni Channel Order Management

Informatica Cloud Application Integration Omni Channel Order Management
April 2025

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Omni Channel Order Management recipe 6

Prerequisites for creating custom field in Salesforce opportunity and product entities 6

Chapter 2: Omni Channel Order Management recipe contents 9

Omni Channel Order Management recipe assets 9

Chapter 3: Using the Omni Channel Order Management recipe 11

Step 1. Copy and access the recipe 11

Step 2. Configure and publish the Salesforce connection 12

Step 3. Configure and publish the Email connection 12

Step 4. Configure and publish the processes 14

Step 5. Invoke the process 14

Salesforce Opportunity and Sales Order Object field mappings 16

Preface

Use *Omni Channel Order Management* to learn how to create general sales order objects from different channels. This guide assumes that you have an understanding of the Salesforce Connector and Email Connector concepts.

CHAPTER 1

Introduction to Omni Channel Order Management recipe

The Omni Channel Order Management recipe is based on REST and SOAP APIs. You can use the recipe to create general sales order objects from different channels.

The process is triggered by an API call with a sales order object that supports three types of orders, web sales orders, API sales orders, and B2B sales orders. Based on the resource field as the incoming object, the process generates a generic object that contains fields from the Sales Order.

If the contact ID does not exist, the process creates a contact in Salesforce. Otherwise, the process updates the contact information in Salesforce.


The process then searches for a product by ID if specified. If the ID does not exist, a new product is created in Salesforce. The SKU is generated using the Salesforce ID, quantity, and product price. The process creates an opportunity in Salesforce, and the ID is returned to the user.

The process then checks the discount level in the Sales Order. If the discount exceeds a specified threshold, a case is created in Salesforce, and an email notification is sent to the buyer about the discount rejection. If the discount is approved, the final amount is set in the opportunity, and an email with order details is sent to the buyer.

Prerequisites for creating custom field in Salesforce opportunity and product entities


To create a custom field in the Salesforce opportunity and product entities, perform the following steps:

1. Log in to the Salesforce organization.
2. Go to **Setup** > **Build** > **Customize** > **Opportunities** > **Fields**, and then click **New**.
   The following image shows the **New** button on the **Opportunity Fields** page:

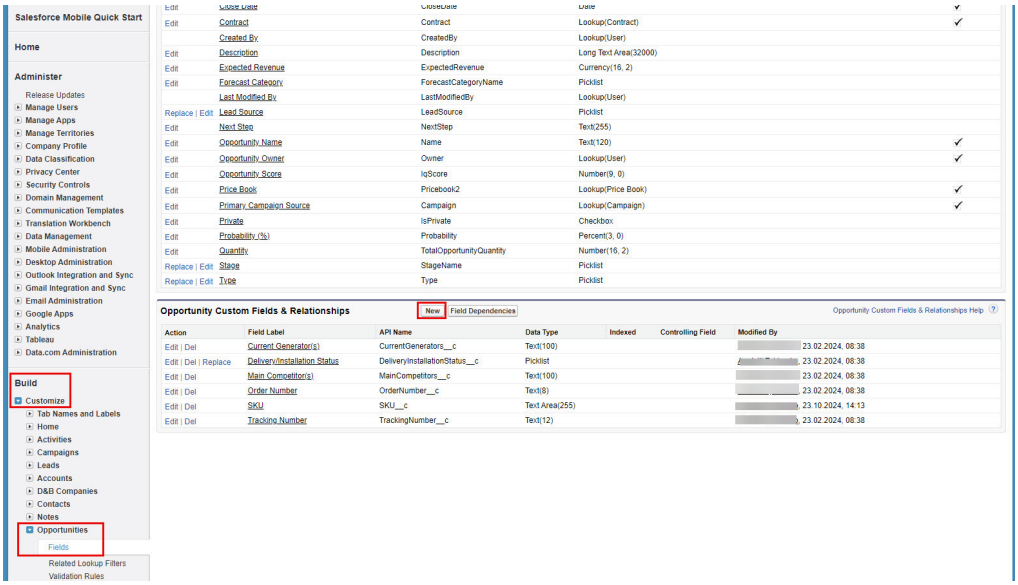


3. In the **Field Label** and **Field Name** fields, enter the value as **SKU** and save the custom field. You must create a custom field with the **Text** data type.

   The following image shows the **New Custom Field** page:

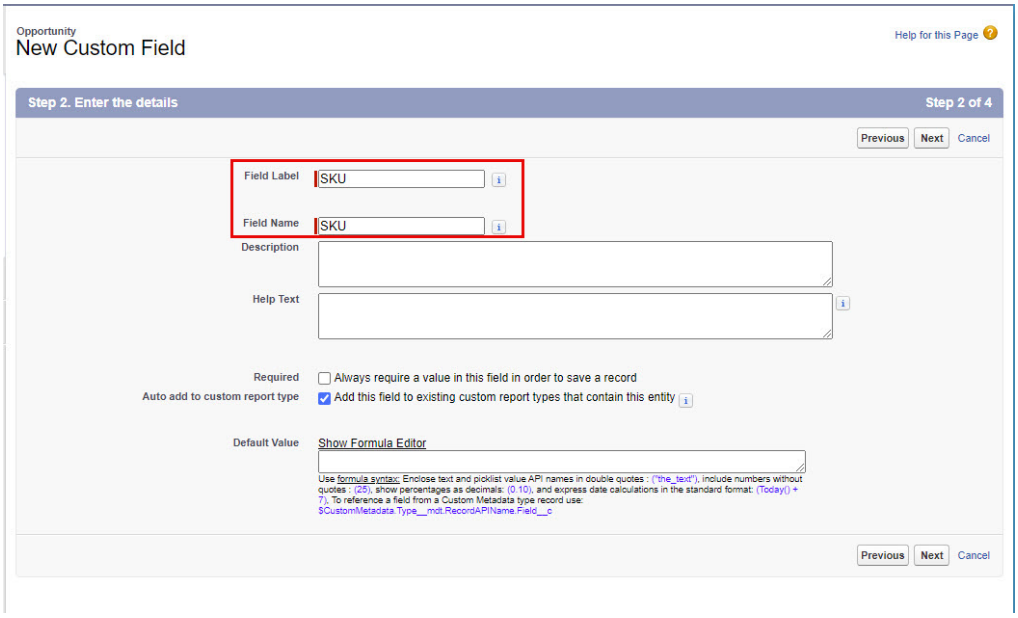

4. Go to **Setup** > **Build** > **Customize** > **Products** > **Fields**, and then click **New**.
   The following image shows the **New** button on the **Product Fields** page:

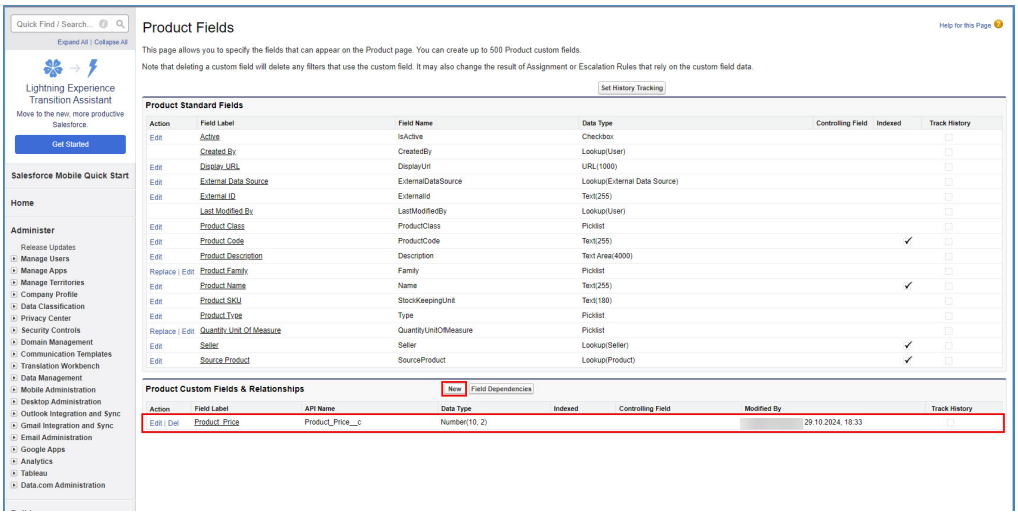


5. In the **Field Label** and **Field Name** fields, enter the value as **Product_Price**, select the type as **Number** data type, enter the **Decimal Places** field value as 2, and then save the custom field.

CHAPTER 2

Omni Channel Order Management recipe contents

The Omni Channel Order Management recipe contains a process objects, app connections, and processes.

The following image shows the assets that the Omni Channel Order Management recipe package contains:

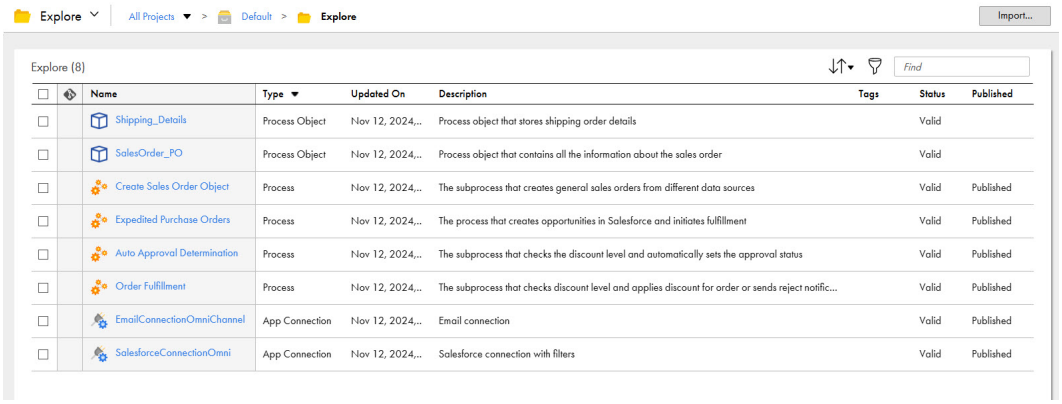

Omni Channel Order Management recipe assets

The following table lists the assets that the Omni Channel Order Management recipe package contains:

Asset Name	Asset Type	Description
Shipping_Details	Process object	Stores shipping order details.
SalesOrder_PO	Process object	Contains all the information about the sales order.
SalesforceConnectionOmni	App connection	Salesforce connection with filters.
EmailConnectionOmniChannel	App connection	Email connection.
Auto Approval Determination	Process	Subprocess that checks the discount level and automatically sets the approval status.

Asset Name	Asset Type	Description
Order Fulfillment	Process	Subprocess that checks discount level and applies discount for order or sends reject notification and creates a case in Salesforce. If a discount is applied, the process sends a notification with shipping details.
Create Sales Order Object	Process	Subprocess that creates general sales orders from different data sources.
Expedited Purchase Orders	Process	Process that creates opportunities in Salesforce and initiates fulfillment.

CHAPTER 3

Using the Omni Channel Order Management recipe

To use the Omni Channel Order Management recipe, you must perform the following steps manually:

1. Copy and access the recipe
2. Configure and publish the Salesforce connection
3. Configure and publish the Email connection
4. Configure and publish the processes
5. Invoke the process


Step 1. Copy and access the recipe

Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Omni Channel Order Management** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.
5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

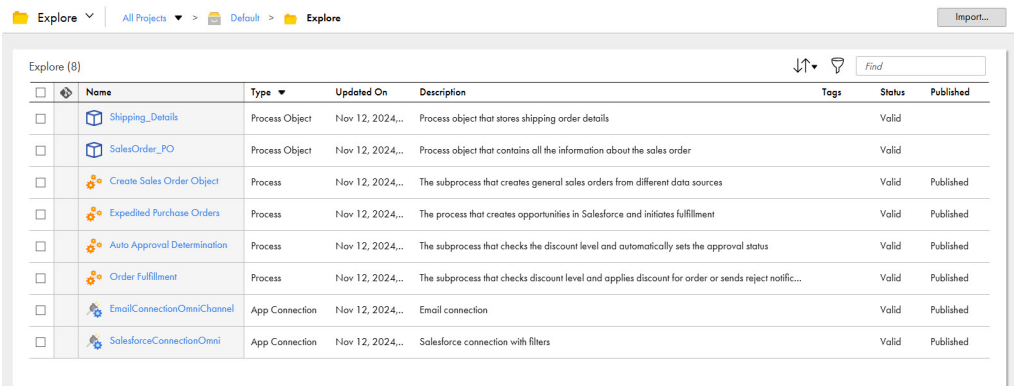

Step 2. Configure and publish the Salesforce connection

Configure the user credentials and runtime environment in the SalesforceConnectionOmni connection, and then publish the connection.

1. Open the **SalesforceConnectionOmni** connection.
2. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	Salesforce developer account user name.
Password	Salesforce developer account password.
Consumer_Key	The consumer key associated with the Salesforce user account for API access.
Consumer_Secret	The consumer secret associated with the Salesforce user account for API access.

4. Save and publish the connection.

Step 3. Configure and publish the Email connection

Configure the authentication type and authentication details in the EmailConnectionOmniChannel connection, and then publish the connection.

1. Open the **EmailConnectionOmniChannel** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`

Property	Description
Password	Password for the email address.
Security	Select **SSL** for the Email connection to use the SSL protocol.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

- For **OAuth** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authorization URL	Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Specify the identifier value from the OAuth provider.
Client Secret	Enter the client secret to connect to the email application.
Scope	Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

5. Save and publish the connection.

Step 4. Configure and publish the processes

Configure the mappings for the web sales order, API sales order, or B2B sales oder as required and publish the processes.

1. To publish the **Auto Approval Determination** process, click **Actions** in the row that contains the process and select **Publish**.
2. To publish the **Order Fulfillment** process, click **Actions** in the row that contains the process and select **Publish**.
3. Open the **Create Sales Order Object** process.
4. Optionally, on the **Assignments** tab of the **Prepare Web Sales Order** step, you can modify the mappings in the **Sales_Order_PO** field using the Expression Editor in one of the following steps as required:
   - Prepare Web Sales Order
   - Prepare API Sales Order
   - Prepare B2B Sales Order
5. Optionally, on the **Assignments** tab of the **Check Resource** step, in the **Sales_Resource** field, change the resource.
6. Save and publish the process.
7. To publish the **Expedited Purchase Orders** process, click **Actions** in the row that contains the process and select **Publish**.


Step 5. Invoke the process

When you invoke the Expedited Purchase Orders process, the process creates opportunities in Salesforce and initiates fulfillment. The process returns opportunity ID as process output.

You can run the process using one of the following options:

- REST or SOAP API endpoints in any API client such as cURL, Postman, SOAP UI, or any programming language
- Web browser by passing the input parameters

For example, you can pass the input parameters in Postman as shown in the following image:

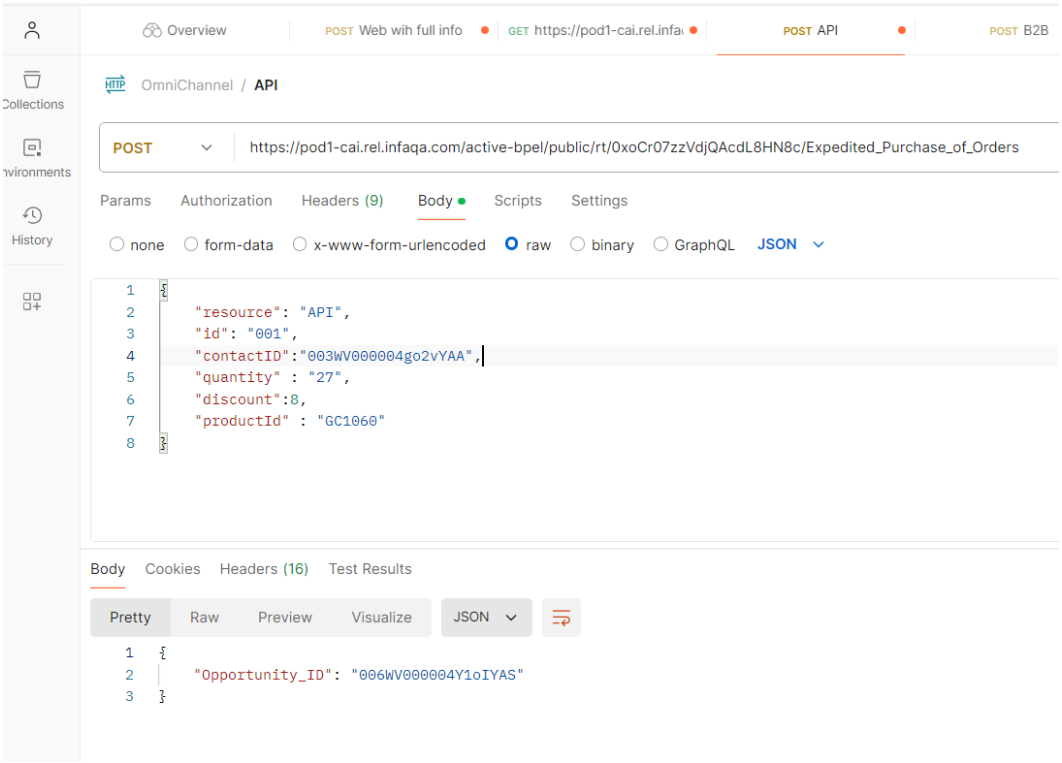

The process is designed to process any payload from the third-party service. You can modify the mapping as required.

For example, the following sample requests are processed with the default mappings:

- For Web Sales Order:

```
{
    "resource": "Web",
    "id": null,
    "name": "",
    "qnt": "",
    "rate": null,
    "discount": null,
    "comment": "",
    "firstName": "",
    "lastName": "",
    "phone": "",
    "emailAddress": "",
    "line": "",
    "city": "",
    "state": "",
    "zipcode": "",
    "billingLine": "",
    "billingCity": "",
    "billingState": "",
    "billingZipcode": "",
    "country": ""
}
```

- For API Sales Order:

```
{
    "resource": "API",
    "id": null,
    "contactID":"{Salesforce Contact ID}",
    "quantity" : null,
    "discount":null,
```

```
    "productId" : ""
}
```

- For B2B Sales Order:

```
{
    "resource": "B2B",
    "id": null,
    "productName": "",
    "qnt": null,
    "productPrice": null,
    "description": "",
    "comment": "",
    "firstName": "",
    "lastName": "",
    "mobilePhone": "",
    "email": "",
    "street": "",
    "city": "",
    "state": "",
    "zip": "",
    "discount": null,
    "country": "",
    "accountID": "{Salesforce Account ID}"
}
```

Salesforce Opportunity and Sales Order Object field mappings

The Salesforce Opportunity fields and the Sales Order Object field are mapped based on the fields given in the following table:

Salesforce Opportunity	Sales Order Object
Opportunity Name	Sales_Order_Number (field)
Stage	Prospecting (available in the recipe)
Amount	Order_Amount (field)
Close Date	30 (set after today in the recipe)
Contact Role	Salesforce Contact ID (created or existing)
SKU(custom)	Created in recipe next format (ID: {Salesforce Item ID} | Qnt: {Quantity(field)} | Price: {Salesforce Product Product_Price})
Account ID	Salesforce Account ID