Informatica® Cloud Application Integration
August 2024

Verify Email

Informatica Cloud Application Integration Verify Email
August 2024

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Verify Email recipe 6

Verify Email recipe contents 6

Verify Email recipe assets 7

Chapter 2: Using the Verify Email recipe 8

Copying and accessing the recipe 8

Configuring and publishing the Email connection 8

Configuring and publishing the process 11

Invoking the process 13

Preface

Use *Verify Email* to learn how to support correlation and a long-running transaction by using email. The recipe is based on REST and SOAP APIs and you use an HTTP request to call the process.

CHAPTER 1

Introduction to Verify Email recipe


The Verify Email recipe is based on REST and SOAP APIs.

The process supports correlation and a long-running transaction using an email ID. The process modifies its behavior based on an external event that occurs when the process is still in transit. The process is called by an HTTP request with the email ID as an incoming parameter. The process sends an email to the user for email verification. The transaction remains in its current state until the user approves or rejects the email verification. After the user approves the email verification, the process continues. Otherwise, the email is rejected and further process steps are terminated.

Verify Email recipe contents

The Verify Email recipe contains an app connection and process.

The following image shows the assets that the Verify Email recipe package contains:

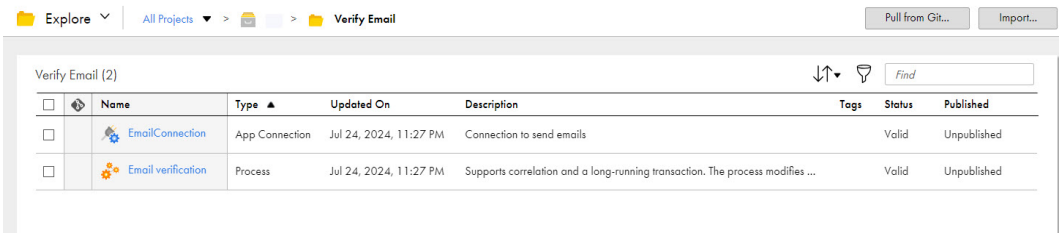

Verify Email recipe assets

The following table lists the assets that the Verify Email recipe package contains:

Asset Name	Asset Type	Description
EmailConnection	App connection	Email connection that is used to send emails.
Email verification	Process	Supports correlation and a long-running transaction using an email ID. The process modifies its behavior based on an external event that occurs when the process is still in transit. The process is called by an HTTP request with the email ID as an incoming parameter. The process sends an email to the user for email verification. The transaction remains in its current state until the user approves or rejects the email verification. After the user approves the email verification, the process continues. Otherwise, the email is rejected and further process steps are terminated.

CHAPTER 2

Using the Verify Email recipe

To use the Verify Email recipe, you must perform the following steps manually:

Step 1: Copy and access the recipe

Step 2: Configure and publish the Email connection

Step 3: Configure and publish the process

Step 4: Invoke the process


Copying and accessing the recipe

To copy and access the recipe content, perform the following steps:

1. Open the **Verify Email** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.
5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

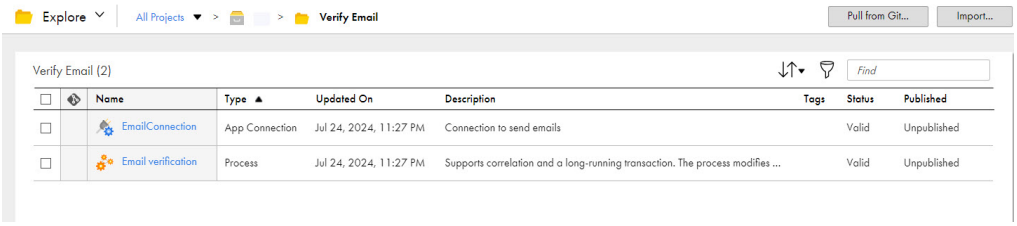

Configuring and publishing the Email connection

To configure and publish the Email connection, perform the following steps:

1. Open the **EmailConnection** connection.


2. In the **Type** field, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. In the **Runtime Environment** field, select **Cloud Server or any Secure Agent**.
4. In the **Authentication Type** field, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties:
     In the **Connection Properties** section, enter values for the following properties:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`
Password	Password for the email address. Set an API key for your email account. For information about creating an API key, see Create API credentials.
Security	Select **SSL** for the Email connection to use the SSL protocol.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

The following image shows the **EmailConnection** connection detail page with the authentication type set to **Password**:

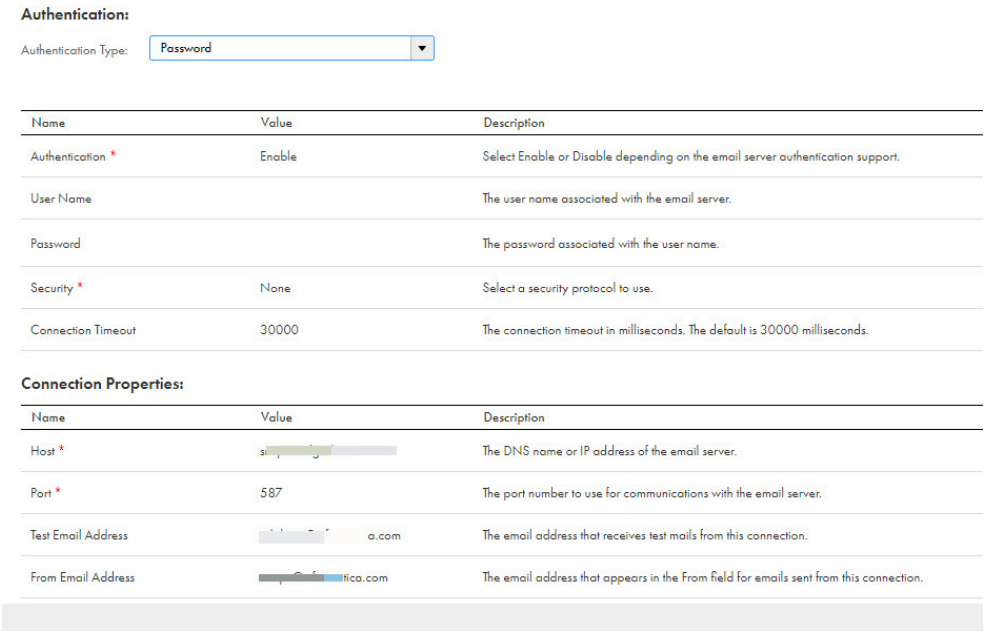

- For **OAuth** authentication, enter values for the following properties:


  In the **Connection Properties** section, enter values for the following properties:

Property	Description
Authorization URL	Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Specify the identifier value from the OAuth provider.
Client Secret	Enter the client secret to connect to the email application.
Scope	Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

The following image shows the **EmailConnection** connection detail page with the authentication type set to **OAuth**:

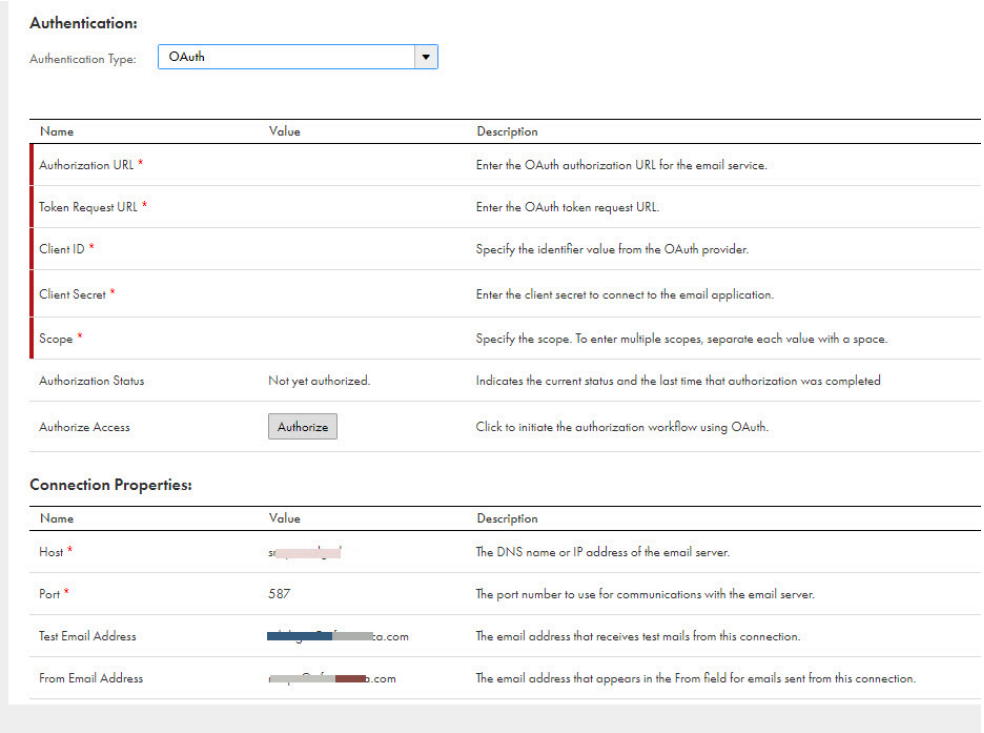

5. Save, test, and publish the connection.

Configuring and publishing the process

1. Open the **Email verification** process.
2. On the **Start** tab of the Start step, select **Cloud Server** from the **Run On** list.
3. Optionally, you can change the tracing level from **Verbose** to **None** on the **Advanced** tab.

4. In the **Send Email Set Up** step, in the **emailInput > Body** field, update the Point of Deployment (POD) name and the organization ID in both the accept and reject sections as shown in the following sample code:

```
<!doctype html>
<html>
   <head>
      <meta name="viewport" content="width=device-width, initial-scale=1.0">
      <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
      <title>Welcome to Informatica Cloud!</title>

   </head>
   <body class="">
      <table role="presentation" class="body" style="line-height:1.5; border-
collapse: collapse;">
         <tr>
            <td> </td>
            <td class="container">
               <p> </p>
               <table role="presentation" class="main" style="border-top: 8px solid
#ff7d00;">
                  <tr>
                     <td class="wrapper">
                        <table role="presentation" style="border-collapse:
collapse;">
                           <tr>
                              <td align="center">
                                 <div style="margin: 0 auto; text-align: center;">
                                    <img src="https://www.informatica.com/
content/dam/informatica-com/en/images/gl01/informatica-logo.png" alt="Informatica
logo" width="250" height="90" style="border:0; outline:none; text-decoration:none;
display:block;margin:0 auto;">
                                 </div>
                              </td>
                           </tr>
                           <tr>
                              <td>
                                 <p style="margin-top:20px; text-align:center">
                                    <b>You are almost done! Please verify your
account.</b>
                                 </p>
                                 <div style="margin-bottom:20px; display:flex;
justify-content: center; gap:10px;">
                                    <a clicktracking=off href="<Cloud Application
Integration POD URL>/active-bpel/public/rt/<Organization ID>/Email_verification/
event/CheckStatus?EmailID={$input.Email_ID}&VerifyStatusResp=Accept" style='font-
size: 14px;font-family: "helvetica" , "arial" , sans-serif;font-weight:
normal;color: #ffffff;text-decoration: none;background-color: #001aff;border-top:
6px solid #001aff;border-bottom: 6px solid #001aff;border-left: 25px solid
#001aff;border-right: 25px solid #001aff;border-radius: 3px;-webkit-border-radius:
3px;-moz-border-radius: 3px;display: inline-block;'>Verify</a>
                                        
                                    <a clicktracking=off href="<Cloud Application
Integration POD URL>/active-bpel/public/rt/<Organization ID>/Email_verification/
event/CheckStatus?EmailID={$input.Email_ID}&VerifyStatusResp=Reject" style='font-
size: 14px;font-family: "helvetica" , "arial" , sans-serif;font-weight:
normal;color: #ffffff;text-decoration: none;background-color: #001aff;border-top:
6px solid #001aff;border-bottom: 6px solid #001aff;border-left: 25px solid
#001aff;border-right: 25px solid #001aff;border-radius: 3px;-webkit-border-radius:
3px;-moz-border-radius: 3px;display: inline-block;'>Reject</a>
                                 </div>
                                 <p>Sincerely,<br>The Informatica Cloud Team</p>
                              </td>
                           </tr>
                        </table>
                     </td>
                  </tr>
               </table>
               <table role="presentation" style="border-collapse: collapse;">
```

```
                  <tr>
                     <td class="content-block" style="font-size: 10px;text-align:
center;">
                        <a href="https://www.informatica.com/"><strong style="color:
#ff4d00; font-weight: normal;word-break: break-all;">Informatica</strong></a> | 2100
Seaport Boulevard, Redwood City, CA 94063
                        <br><a href="https://www.informatica.com/terms-of-
use.html"><strong style="color: #ff4d00; font-weight: normal;word-break: break-
all;">Terms of use</strong></a> | <a href="https://www.informatica.com/privacy-
policy.html"><strong style="color: #ff4d00; font-weight: normal;word-break: break-
all;">Privacy Policy</strong></a>
                     </td>
                  </tr>
               </table>
            </td>
            <td> </td>
         </tr>
      </table>
   </body>
</html>
```


5. Save and publish the process.

Invoking the process

When you invoke the Email verification process, the user receives an email to verify or reject the email. The status of the process remains in the running state until the process receives an email response. After the user clicks the **Verify** or **Reject** link in the email, the event gets correlated and the process continues.

To invoke a process, you can use one of the following options:

- Running a process with process inputs
  1. Open the **Email verification** process and click **Actions** > **Run Using**.
  2. Select the input from the **Select the input to run the process with** list and enter the input field and value in the **Process Input** section as shown in the following image:

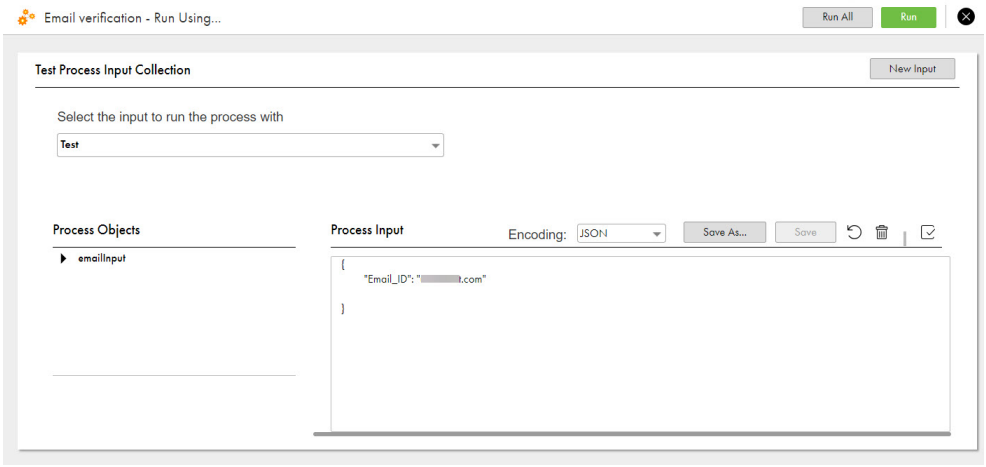

  3. Click **Run**.
- Passing input through a browser
  1. Open the **Email verification** process and click **Actions** > **Properties Detail** > **Copy Service URL**.

2. Open a text editor and add the input field and value to the service URL as shown in the following format:
   `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?Email_ID=<Email_ID>`
3. Open a browser and paste the service URL.

- Passing input through a REST client
  You can use a REST client such as Postman.
  1. Open Postman.
  2. Select the HTTP verb as GET and specify the generated REST service URL followed by the input field and value `?Email_ID=<Email_ID>`.
  3. Enter the user account details on the **Authorization** tab.
  4. Click **Send**.

After invoking the process, you receive an email with the **Verify** or **Reject** links.

In Application Integration Console, you can verify the status of the process execution.

The following image shows the status of the process execution:

