Informatica® Cloud Application Integration
August 2025

IDMC System Audit Log and Security Log Capture

Informatica Cloud Application Integration IDMC System Audit Log and Security Log Capture
August 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to IDMC System Audit Log and Security Log Capture recipe 6

Prerequisites 6

Configure a new staging directory 8

Chapter 2: IDMC System Audit Log and Security Log Capture recipe contents 10

IDMC System Audit Log and Security Log Capture recipe assets 11

Chapter 3: Using the IDMC System Audit Log and Security Log Capture recipe 12

Step 1. Copy and access the recipe 12

Step 2. Publish the IDMC Log Connector service connector 13

Step 3. Configure and publish the app connections 13

Security Log Capture 13

Audit Log Capture 16

Preface

Use *IDMC System Audit Log and Security Log Capture* to learn how to simplify access to system audit and security log entries in Informatica Intelligent Data Management Cloud (IDMC).

CHAPTER 1

Introduction to IDMC System Audit Log and Security Log Capture recipe

The IDMC System Audit Log and Security Log Capture recipe is based on REST APIs. The recipe simplifies access to system audit and security log entries in Informatica Intelligent Data Management Cloud (IDMC).

The recipe enhances the IDMC system visibility to enable effective monitoring, troubleshooting, and overall management of users' IDMC environments. It facilitates custom analytics and log retention requirements by enabling processes to systematically store internal IDMC log data to a user's cloud storage.

The IDMC System Audit Log and Security Log Capture recipe includes two taskflows designed to periodically extract system logging information from an IDMC organization and write it to a cloud storage location. The taskflows cover security logs and audit logs information.

These taskflows are designed to run periodically, with the default schedule assuming that the taskflows will run once a day and extract log information from the previous day. For example, if the taskflows run at 1 AM on April 11, they will extract log data from midnight April 9 to midnight April 10. With proper configuration, they can retrieve data from any IDMC organization or sub-organization, not necessarily residing in the same organization from which the log information is extracted.

The target location and type, such as AWS, Azure, Google, or Oracle, are determined by the connection object assigned to the taskflow's mapping task, along with the target load path provided in the in_tgtPath input parameter.


This recipe is designed to run on Linux because it employs shell scripts to manage staging files. It utilizes both Data Integration and Application Integration, and it is not compatible with a serverless Application Integration server.

Prerequisites


To use the IDMC System Audit Log and Security Log Capture recipe, the following prerequisites must be met:

- Configure the required Secure Agent and enable the Shell Service. Ensure that the Secure Agent's group has the Application Integration service enabled. You must use the same Secure Agent to configure all the assets, such as the service connector, app connections, processes, mapping tasks, and taskflows that are packaged in the recipe.
  To configure the Secure Agent, go to **Application Integration Console** > **Server Configuration** > **Choose Secure Agent** > **System Services** > **Shell Service** and select the **Enable Shell Service** option.

- Configure a staging directory on the Secure Agent machine with permissions for the Secure Agent user to read and write. Default is `/tmp`. Informatica recommends that you use the default staging directory for easy installation. In case you can't use the default staging directory, you can configure a different directory. For more information, see "Configure a new staging directory" on page 8.
- Configure a flat file connection object referencing the staging directory and the Secure Agent configured in the previous steps.
  The following image shows a sample flat file connection that contains the staging directory and the Secure Agent configured:

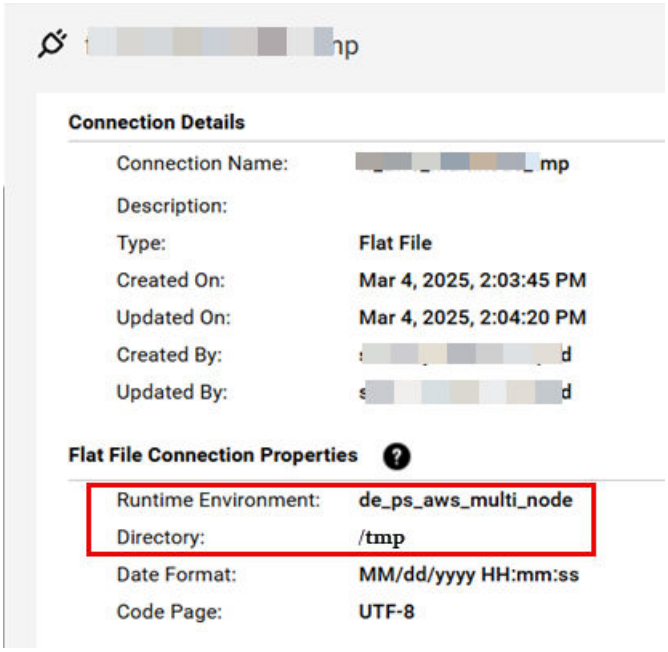

- Configure a cloud storage connection object referencing a location where the final log data will be written to the Secure Agent. This can be any cloud storage provider that IDMC supports. For example, AWS S3, Microsoft AWS, Google Cloud Storage, and Oracle Cloud Storage.
  The following image shows a sample cloud storage connection that contains the Secure Agent:

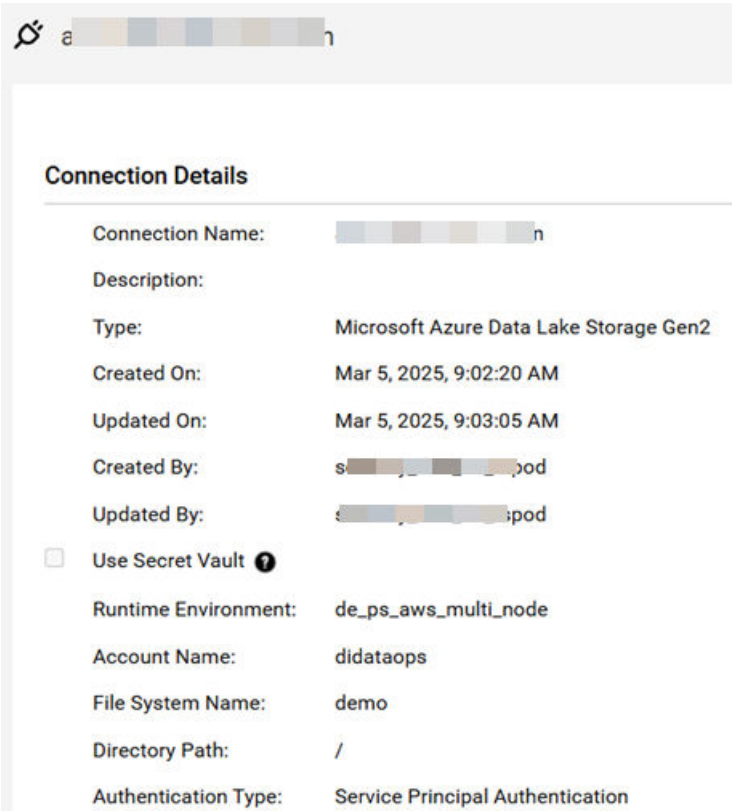

Configure a new staging directory

To use a staging directory other than the default `/tmp` directory, you can change the default settings in the following assets, and publish them as required.

1. Open the **Delimited-File-Connection** connection in Application Integration.
   a. On the **Event Targets** tab, update the directory in the **Directory** field.
   b. Save and publish the App connection.
2. Open the **Get Security Log** process in Application Integration.
   a. On the **Temp Fields** tab of the Start step, update the directory in the **baseStageDirectory** field.
   b. Save and publish the process.
3. Open the **Get Audit Log** process in Application Integration.
   a. On the **Temp Fields** tab of the Start step, update the directory in the **baseStageDirectory** field.
   b. Save and publish the process.


4. Open the **Load Security Logs Mapping Task** mapping task in Data Integration.
    a. Click **Edit** > **Runtime Options** > **Advanced Options**.
    b. In the **Post-Processing Commands** field, update the commands to run after the task completes.
    c. Save and run the mapping task.
5. Open the **Load Audit Logs Mapping Task** mapping task in Data Integration.
    a. Click **Edit** > **Runtime Options** > **Advanced Options**.
    b. In the **Post-Processing Commands** field, update the commands to run after the task completes.
    c. Save and run the mapping task.

CHAPTER 2

IDMC System Audit Log and Security Log Capture recipe contents

The IDMC System Audit Log and Security Log Capture recipe contains a service connector, app connections, processes, mappings, mapping tasks, and taskflows.

The following image shows the assets that the IDMC System Audit Log and Security Log Capture recipe package contains:

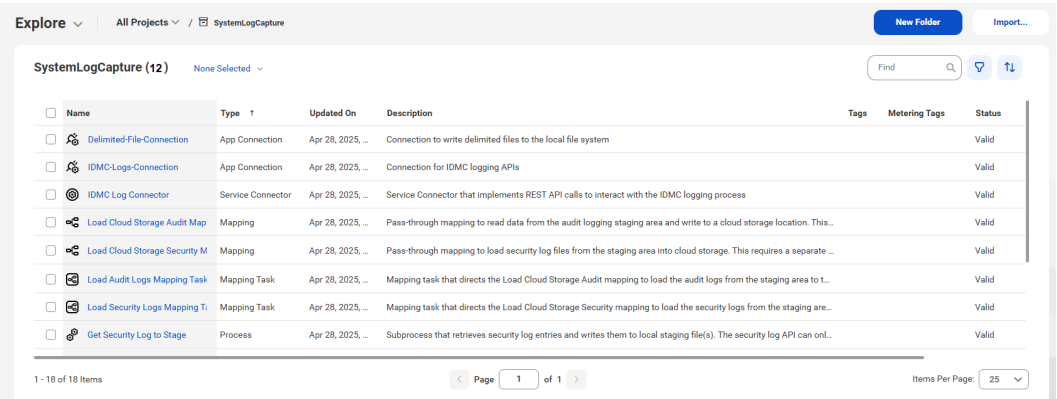

IDMC System Audit Log and Security Log Capture recipe assets

The following table lists the assets that the IDMC System Audit Log and Security Log Capture recipe package contains:

Asset Name	Asset Type	Description
Delimited-File-Connection	App connection	Connection to write delimited files to the local file system.
IDMC-Logs-Connection	App connection	Connection for IDMC logging APIs.
IDMC Log Connector	Service connector	Service Connector that implements REST API calls to interact with the IDMC logging process.
Load Cloud Storage Audit Mapping	Mapping	Pass-through mapping to read data from the audit logging staging area and write to a cloud storage location. This requires a separate mapping because you cannot pass in a parameter from a mapping task to override a filelist input file.
Load Cloud Storage Security Mapping	Mapping	Pass-through mapping to load security log files from the staging area into cloud storage. This requires a separate mapping because you cannot pass in a parameter from a mapping task to override a filelist input file.
Load Audit Logs Mapping Task	Mapping task	Mapping task that directs the Load Cloud Storage Audit mapping to load the audit logs from the staging area to the specified cloud storage location. It then calls a post-session command to clean up the staging area.
Load Security Logs Mapping Task	Mapping task	Mapping task that directs the Load Cloud Storage Security mapping to load the security logs from the staging area to the specified cloud storage location. It then calls a post-session command to clean up the staging area.
Get Security Log to Stage	Process	Subprocess that retrieves security log entries and writes them to a local staging file(s). The security log API can only return 1000 rows and lacks pagination support. If a full date range contains 1000 rows, it assumes that there are more entries. Consequently, it switches to fallback mode, where instead of retrieving logs for the entire date and time range at once, it repeatedly fetches smaller, segmented time intervals between the specified start and end dates. These files are then written to the staging area.
Get Security Log	Process	Process that retrieves the log entries from IDMC and writes them to the staging location.
Get Audit Log	Process	Process that interacts with IDMC REST APIs to retrieve audit logs and write them to the staging area. It extracts a specified number of rows defined by batchSize, filters these rows to match the specified start and end date criteria, and saves the relevant entries to a local file. The process continues to extract subsequent sets of rows, each of the batchSize, until it encounters rows that are dated earlier than the start date.
Audit Logs Taskflow	Taskflow	Taskflow that retrieves the previous day's audit log files from the user's organization and writes them to the specified location in cloud storage.
Security Logs Taskflow	Taskflow	Taskflow that retrieves the previous day's security log files from the user's organization and writes them to the specified location in cloud storage.

CHAPTER 3

Using the IDMC System Audit Log and Security Log Capture recipe

To use the IDMC System Audit Log and Security Log Capture recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish IDMC Log Connector service connector.
3. Configure and publish the app connections.

Based on the requirements, you can perform the following tasks:

- “Security Log Capture” on page 13
- “Audit Log Capture ” on page 16

In case you can't use the default `/tmp` as a staging directory, you can change the settings to use a different staging directory. For more information, see “Configure a new staging directory” on page 8.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **IDMC System Audit Log and Security Log Capture** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

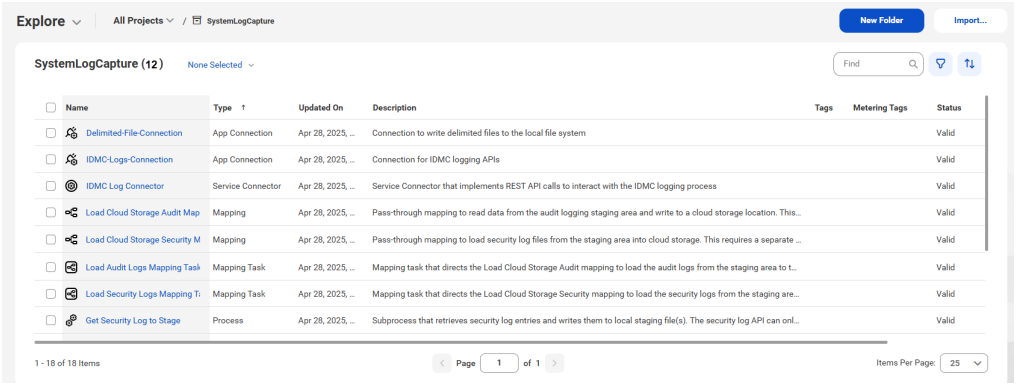

Step 2. Publish the IDMC Log Connector service connector

To publish the **IDMC Log Connector** service connector, open the **IDMC Log Connector** service connector and click **Publish**.

Step 3. Configure and publish the app connections

Configure the Secure Agent and publish the app connections.

This topic covers the steps to configure and publish the following app connections:

- Delimited-File-Connection
- IDMC-Logs-Connection


1. Open the app connection.
2. From the **Runtime Environment** list, select the Secure Agent.
3. Save and publish the connection.

Security Log Capture


The Security Log Taskflow calls an Application Integration process that extracts security log information from a specified organization and writes it to a staging file location. By default, this staging location is set to /tmp on the machine where the Secure Agent is running. If log records are extracted, a mapping task subsequently runs to transfer the data from the staging location to the target cloud storage. The taskflow is

designed to either run once per day to retrieve the previous day's data or once per hour to retrieve data from the previous hour.

1. Open the **Get Security Log to Stage** process in Application Integration.
   a. On the **Start** tab of the Start step, select the Secure Agent from the **Run On** list.
   b. Save and publish the process.
2. Open the **Get Security Log** process in Application Integration.
   a. On the **Start** tab of the Start step, select the Secure Agent from the **Run On** list.
   b. On the **Temp Fields** tab of the Start step, enter the target organization's base URL in the **baseOrgUrl** field. For example, if you have logged in using `https://dm-us.informaticacloud.com/identity-service/home`, set this field value to `https://dm-us.informatica.cloud.com/saas`.
   c. Save and publish the process.
3. Open the **Load Cloud Storage Security Mapping** mapping in Data Integration.
   a. On the **Source** tab of the **srcReadSecurityLogStage** step, select the flat file connection that points to your staging directory and the object as shown in the following image:

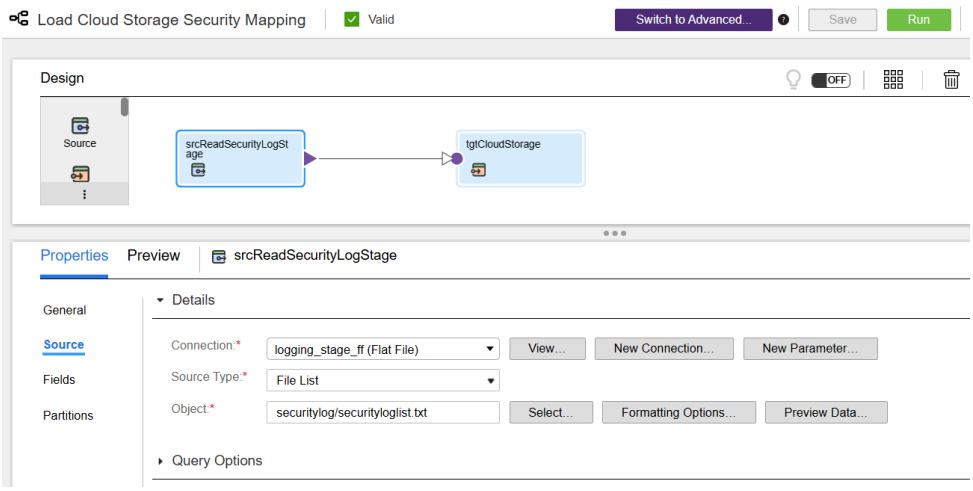


   b. On the **Target** tab of the **tgtCloudStorage** step, select the cloud storage connection that points to your cloud storage location as shown in the following image:

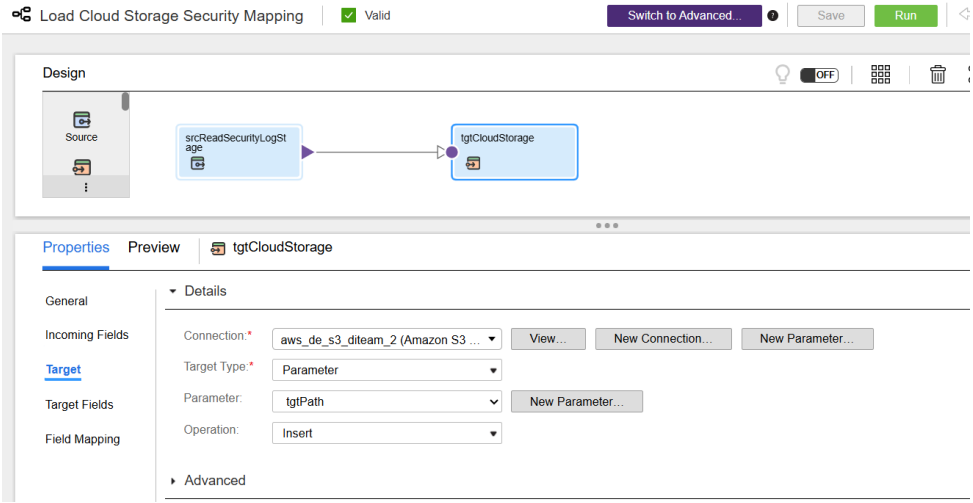

   c. Save and run the mapping.

4. Open the **Load Security Logs Mapping Task** mapping task in Data Integration.
   a. Click **Edit**.
   b. From the **Runtime Environment** list, select the Secure Agent.
   c. Save and run the mapping task.
5. Open the **Security Logs Taskflow** taskflow in Data Integration.
   a. On the **Start** tab of the Start step, enter a valid user ID and/or group for the organization in the **Allowed Users** and/or **Allowed Groups** fields.
   b. On the **IntegrationOps Task** tab of the **Get Security Logs** step, reselect the **Get Security Log** process and click **Save**.
   c. On the **Input Fields** tab of the **Get Security Logs** step, add all the input fields and assign field values as shown in the following image:

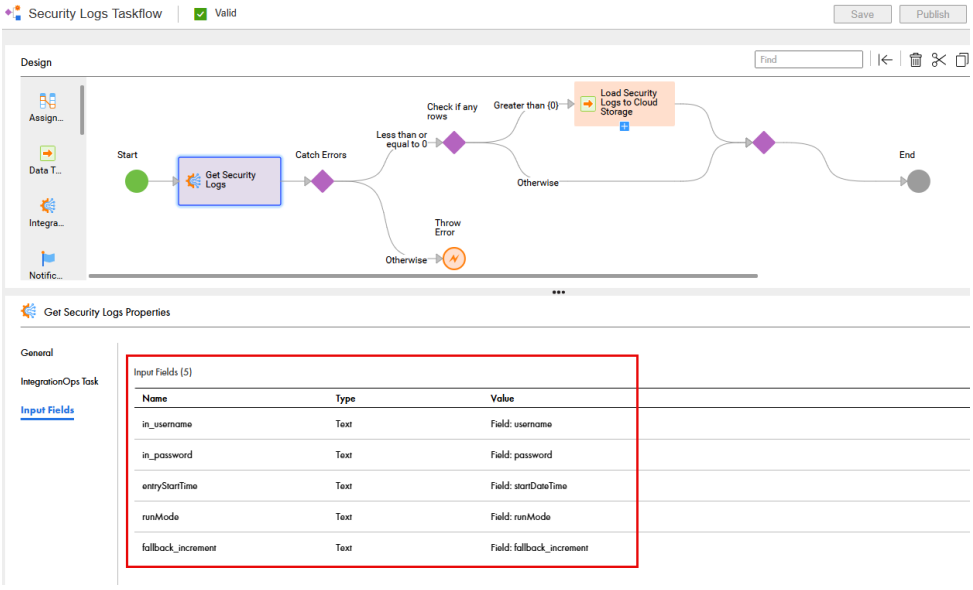

   d. Save and publish the taskflow.
   e. Test the security log using the **Run Using** option in Data Integration or with Postman.
   To test with the **Run Using** option, perform the following steps:
      1. On the **Actions** menu, click **Run Using**.
      2. Provide inputs using the following JSON format:

```
{
"username": "<user name for org to get log files>",
"password": "<password for org to get log files>",
"startDateTime": "",
"in_tgtPath": "<full path to cloud storage, including file name>",
"fallback_increment": "8",
"runMode":"D"
}
```

      Note: You might get the log files from a different organization than where you installed the package.

      3. Save and run the taskflow.

   To test using Postman, perform the following steps:

      1. On the **Actions** menu, click **Properties Details** > **Copy Service URL**.

2. Open Postman.
3. Select the HTTP verb as POST and specify the generated REST service URL.
4. On the **Authorization** tab, select **Basic Auth** and enter the user account details same as provided in the taskflow.
5. On the **Body** tab, select the body type as raw and provide the following JSON snippet for the HTTPS request:

```
{
"username": "<user name for org to get log files>",
"password": "<password for org to get log files>",
"startDateTime": "",
"in_tgtPath": "<full path to cloud storage, including file name>",
"fallback_increment": "8",
"runMode":"D"
}
```


6. Send the POST request.
   You will receive the taskflow run ID as a response.

Audit Log Capture


The Audit Logs Taskflow calls an Application Integration process that extracts audit log information from a specified organization and writes it to a staging file location. By default, this staging location is set to /tmp on the machine where the Secure Agent is running. If log records are extracted, a mapping task subsequently runs to transfer the data from the staging location to the target cloud storage. The taskflow is designed to run once per day to retrieve the previous day's data.

1. Open the **Get Audit Log** process in Application Integration.
   a. On the **Start** tab of the Start step, select the Secure Agent from the **Run On** list.
   b. On the **Temp Fields** tab of the Start step, enter the target organization's base URL in the **baseOrgUrl** field. For example, if you have logged in using `https://dm-us.informaticacloud.com/identity-service/home`, set this field value to `https://dm-us.informatica.cloud.com/saas`.
   c. Save and publish the process.

2. Open the **Load Cloud Storage Audit Mapping** mapping in Data Integration.
    a. On the **Source** tab of the **srcReadAuditLogStage** step, select the flat file connection that points to your staging directory and the object as shown in the following image:

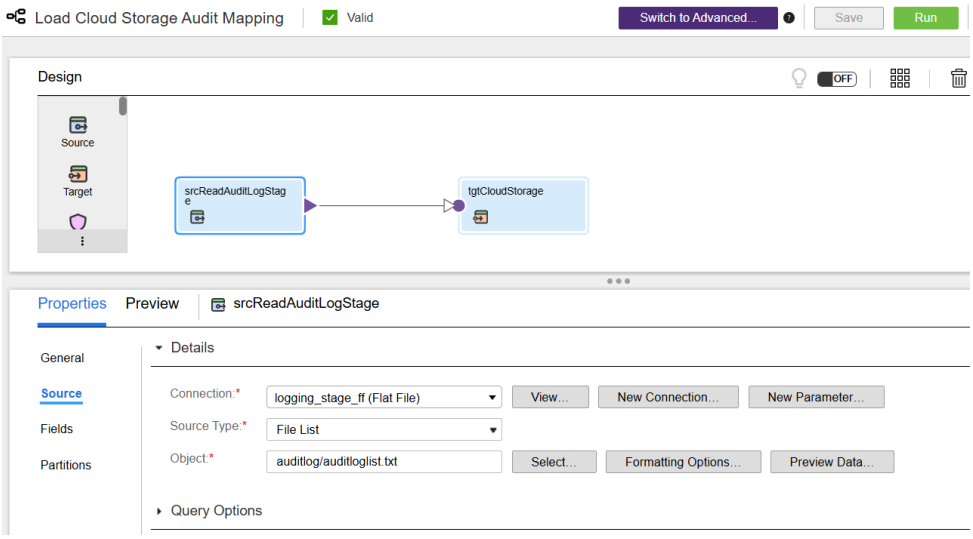


    b. On the **Target** tab of the **tgtCloudStorage** step, select the cloud storage connection that points to your cloud storage location as shown in the following image:

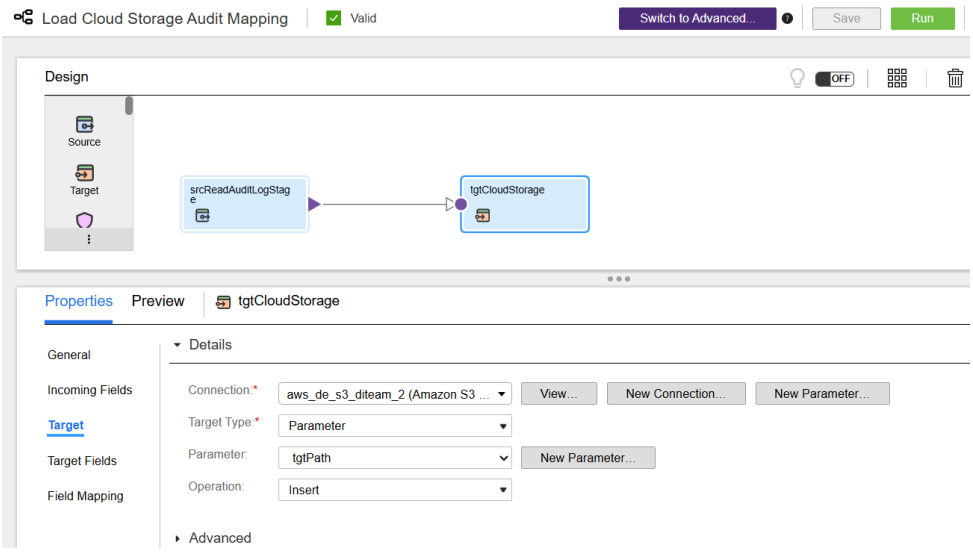

    c. Save and run the mapping.
3. Open the **Load Audit Logs Mapping Task** mapping task in Data Integration.
    a. Click **Edit**.
    b. From the **Runtime Environment** list, select the Secure Agent.
    c. Save and run the mapping task.
4. Open the **Audit Logs Taskflow** taskflow in Data Integration.
    a. On the **Start** tab of the Start step, enter a valid user ID and/or group for the organization in the **Allowed Users** and/or **Allowed Groups** fields.

b. On the **IntegrationOps Task** tab of the **Get Audit Logs** step, reselect the **Get Audit Log** process and click **Save**.

c. On the **Input Fields** tab of the **Get Audit Logs** step, add all the input fields and assign field values as shown in the following image:

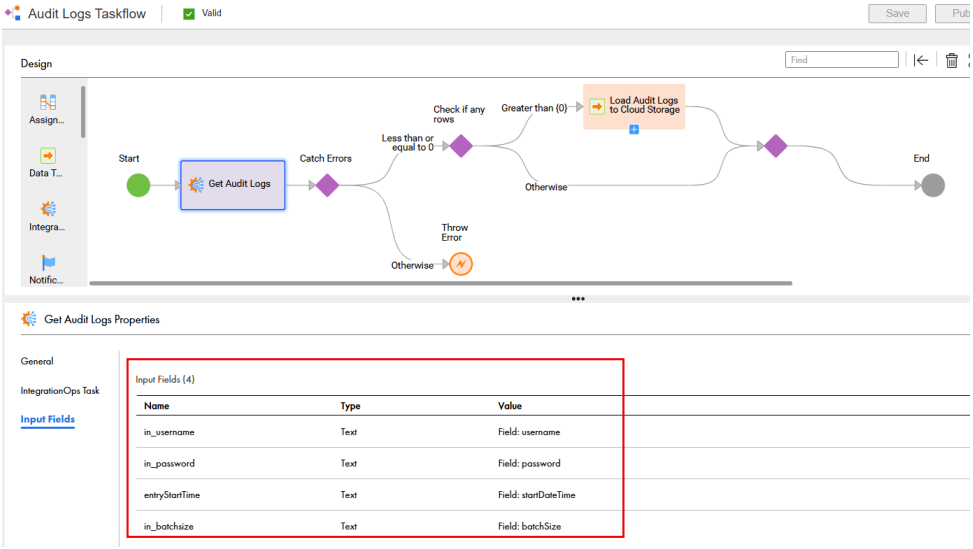

d. Save and publish the taskflow.

e. Test the audit log using the **Run Using** option in Data Integration or with Postman.
To test with the **Run Using** option, perform the following steps:

1. On the **Actions** menu, click **Run Using**.
2. Provide inputs using the following JSON format:

```
{
"username": "<user name for org to get log files>",
"password": "<password for org to get log files>",
"startDateTime": "",
"in_tgtPath": "<full path to cloud storage, including file name>",
"batchSize":"500"
}
```

Note: You might get the log files from a different organization than where you installed the package.

3. Save and run the taskflow.

To test using Postman, perform the following steps:

1. On the **Actions** menu, click **Properties Details** > **Copy Service URL**.
2. Open Postman.
3. Select the HTTP verb as POST and specify the generated REST service URL.
4. On the **Authorization** tab, select **Basic Auth** and enter the user account details same as provided in the taskflow.
5. On the **Body** tab, select the body type as raw and provide the following JSON snippet for the HTTPS request:

```
{
"username": "<user name for org to get log files>",
"password": "<password for org to get log files>",
```

```
"startDateTime": "",
"in_tgtPath": "<full path to cloud storage, including file name>",
"batchSize":"500"
}
```

6. Send the POST request.
   You will receive the taskflow run ID as a response.