Informatica® Cloud Application Integration
August 2025

Multifunction Calling using Microsoft Teams AI Agent

Informatica Cloud Application Integration Multifunction Calling using Microsoft Teams AI Agent
August 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-09-18

Table of Contents

Preface 5

Chapter 1: Introduction to Multifunction Calling using Microsoft Teams AI Agent recipe 6

Prerequisites 6

Create an Azure application to use Microsoft Teams connector 7

Generate JWT token to configure Snowflake Cortex AI connector 7

Chapter 2: Multifunction Calling using Microsoft Teams AI Agent recipe contents 9

Multifunction Calling using Microsoft Teams AI Agent recipe assets 10

Chapter 3: Using the Multifunction Calling using Microsoft Teams AI Agent recipe 12

Step 1. Copy and access the recipe 12

Step 2. Publish the Generic Connector service connector 13

Step 3. Publish the Salesforce Query Connector service connector 13

Step 4. Configure and publish the GenericConnection connection 14

Step 5. Configure and publish the Azure OpenAI connection 14

Step 6. Configure and publish the Microsoft Teams connection 15

Step 7. Configure and publish the Snowflake Cortex AI connection 16

Step 8. Configure and publish the Salesforce connection 16

Step 9. Configure and publish the Dynamics 365 connection 18

Step 10. Configure and publish the Google Vertex AI connection 18

Step 11. Configure and publish the processes 19

Step 12. Create webhook in Microsoft Teams 21

Test Multifunction Calling using Microsoft Teams AI Agent recipe 23

Preface

Use *Multifunction Calling using Microsoft Teams AI Agent* to learn how to receive user queries from Microsoft Teams, send them to Google Vertex for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Microsoft Teams channel. This guide assumes that you have an understanding of the Azure OpenAI Connector, Dynamics 365 Connector, Google Vertex AI Connector, Microsoft Teams Connector, Salesforce Connector, and Snowflake Cortex AI Connector concepts.

CHAPTER 1

Introduction to Multifunction Calling using Microsoft Teams AI Agent recipe

The Multifunction Calling using Microsoft Teams AI Agent recipe is based on REST API. Use the recipe to receive user queries from Microsoft Teams, which are then sent to Google Vertex for function calling. This function calling directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Microsoft Teams channel.

The process begins with receiving user input from Microsoft Teams and returns a pre-configured answer in the same channel.

The process sends a request to Google Vertex AI containing the specified function declaration and user prompt. Google Vertex AI interprets the query, extracts key variables and values, and returns them in the appropriate format. Based on the function calling response, a request is made to the Large Language Model (LLM) to summarize and explain the extracted parameters, with the result sent back to the Microsoft Teams channel.

The process also sends a request to the Application Integration process with parameters obtained from the function calling response, and calls the appropriate AI agent.

The Agent uses an LLM to generate the initial API request based on the user's query. After executing the service API call, the Agent evaluates the response received. If additional information is required, the Agent formulates and executes a subsequent service API request, leveraging the previous response as context. This process repeats until the Agent determines that sufficient data has been gathered to address the original query.

Finally, the Agent compiles the accumulated context and uses the LLM to generate a comprehensive final response to the user's query. This LLM generated response is returned to the user in the same Microsoft Teams channel.

Prerequisites


To use the Multifunction Calling using Microsoft Teams AI Agent recipe, the following prerequisites must be met:

- Create an Azure application to use Microsoft Teams connector.
- Generate JWT token to configure Snowflake Cortex AI connector.

Create an Azure application to use Microsoft Teams connector

To use Microsoft Teams connector, you must create an Azure application for a Microsoft Teams connector.

1. Open the Azure portal.
2. Navigate to Microsoft Entra ID.
3. Go to **Manage** > **App registration** > **New registration** and enter a name for your application.
4. For supported account types, choose the appropriate option based on your application needs. For redirect URI, select **Web** and enter your redirect URL.
5. Click **Register**.
6. Go to the newly registered application's overview page.
7. Go to **Manage** > **Authentication** and add the redirect URIs if you haven't already.
8. In the **Implicit grant** section, enable **Access tokens** and **ID tokens**.
9. Go to **Manage** > **API permissions** > **Add a permission** and select **Microsoft Graph**.
10. Choose **Delegated permissions** and select necessary permissions, such as User.Read, email, offline _access, openid, and profile and click **Add permissions**.
11. On the application's overview page, copy the **Application (client) ID**.
12. Go to **Manage** > **Certificates & secrets** > **Client secrets** and click **New client secret** as shown in the following image:

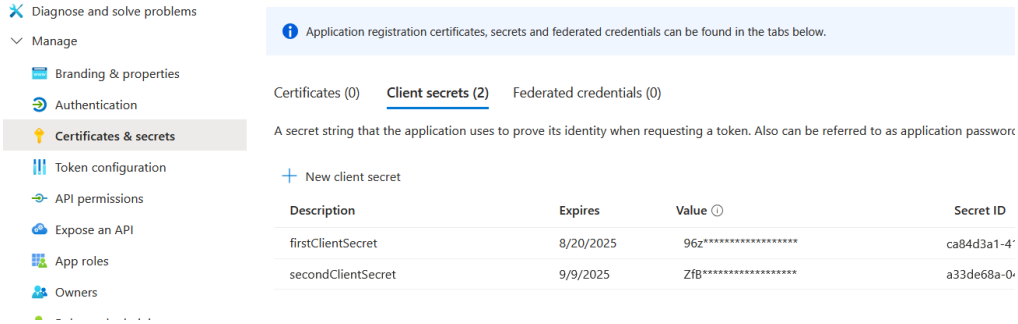

13. Enter a description and select an expiration date and click **Add**.
14. Copy the value of the new client secret. It will not be displayed again.
15. Use the client ID and secret to connect your Microsoft Teams connector application to Azure.

Generate JWT token to configure Snowflake Cortex AI connector

To generate the JWT token for configuring the Snowflake Cortex AI connector, the following prerequisites must be met:

- **Generate the private key and the public key**
  - To generate a private key, run the following command in your terminal window:
    ```
    openssl genrsa 2048 | openssl pkcs8 -topk8 -inform PEM -out rsa_key.p8 -nocrypt
    ```
  - To generate a public key, run the following command in your terminal window:
    ```
    openssl rsa -in rsa_key.p8 -pubout -out rsa_key.pub
    ```
- **Find the user name in Snowflake**
  To get the user name, run the following query in the Snowflake Web UI:
  ```
  SELECT CURRENT_USER();
  ```
- **Alter the user and set the generated public key**

To alter the user, run the following query in the Snowflake Web UI:

```
ALTER USER [USER_NAME] SET RSA_PUBLIC_KEY='[Public_KEY_Value]';
```

For example, `ALTER USER example_user SET RSA_PUBLIC_KEY='MIIBIjANBgkqh...';`


- **Find the account identifier in Snowflake**
  To get the account identifier, run the following query in the Snowflake Web UI:

  ```
  SELECT CURRENT_ORGANIZATION_NAME() || '-' || CURRENT_ACCOUNT_NAME();
  ```

- **Get the public key fingerprint**
  To get the public key fingerprint, run the following query in the Snowflake Web UI:

  ```
  DESC USER [USER_NAME]
  ```

  The following image shows the RSA public key fingerprint:

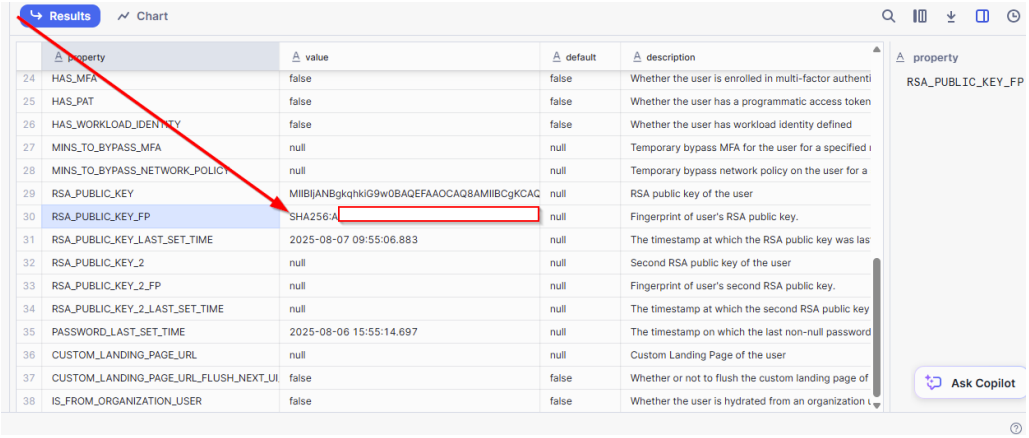

- **Use the cross-region inference parameter**
  By default, the cross-region inference parameter is set to `DISABLED`, which means the inference requests are only processed in the default region.

  The following examples show how to set the cross-region parameter for various use cases:

  Any region

  To allow any of the Snowflake regions that support cross-region inference requests to process your requests, set the parameter to `'ANY_REGION'`.

  ```
  ALTER ACCOUNT SET CORTEX_ENABLED_CROSS_REGION = 'ANY_REGION';
  ```

  Default region only

  To process inference requests only in the default region, set this parameter to `'DISABLED'`.

  ```
  ALTER ACCOUNT SET CORTEX_ENABLED_CROSS_REGION = 'DISABLED';
  ```

  Specify regions

  To allow only specified regions to process your requests, set this parameter to the regions separated by commas. For a full list of regions, see CORTEX_ENABLED_CROSS_REGION.

  The following example specifies `AWS_US` and `AWS_EU` regions to process your inference requests:


  ```
  ALTER ACCOUNT SET CORTEX_ENABLED_CROSS_REGION = 'AWS_US,AWS_EU';
  ```

CHAPTER 2

Multifunction Calling using Microsoft Teams AI Agent recipe contents

The Multifunction Calling using Microsoft Teams AI Agent recipe contains a process object, service connectors, app connections, and processes.

The following image shows the assets that the Multifunction Calling using Microsoft Teams AI Agent recipe package contains:

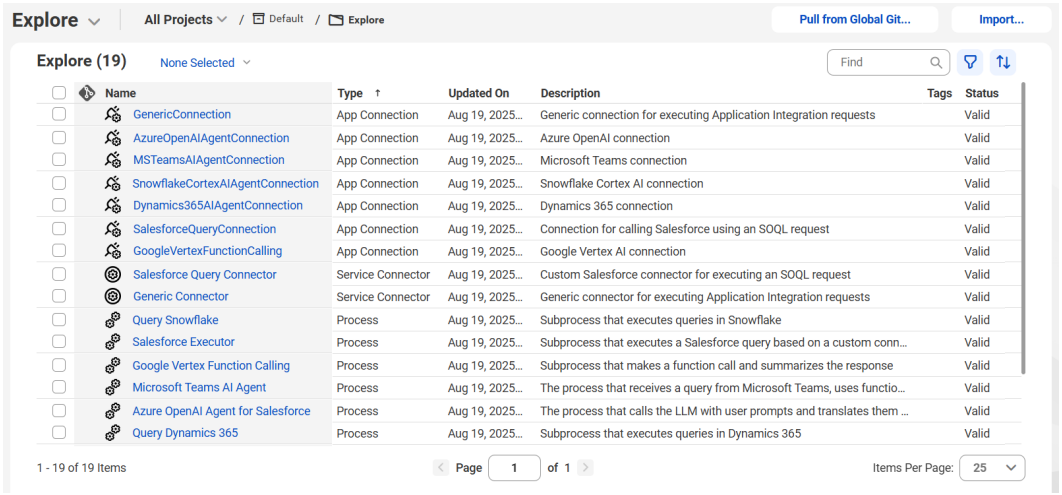

Multifunction Calling using Microsoft Teams AI Agent recipe assets

The following table lists the assets that the Multifunction Calling using Microsoft Teams AI Agent recipe package contains:

Asset Name	Asset Type	Description
GenerationConfig_PO	Process object	Settings for the prompt request.
Salesforce Query Connector	Service connector	Custom Salesforce connector for executing an SOQL request.
Generic Connector	Service connector	Generic connector for executing Application Integration requests.
GenericConnection	App connection	Generic connection for executing Application Integration requests.
AzureOpenAIAgentConnection	App connection	Azure OpenAI connection.
MSTeamsAIAgentConnection	App connection	Microsoft Teams connection.
SnowflakeCortexAIAgentConnection	App connection	Snowflake Cortex AI connection.
SalesforceQueryConnection	App connection	Connection for calling Salesforce using an SOQL request.
Dynamics365AIAgentConnection	App connection	Dynamics 365 connection.
GoogleVertexFunctionCalling	App connection	Google Vertex AI connection.
Generic Executor	Process	Subprocess that calls Application Integration processes.
Google Vertex Function Calling	Process	Subprocess that makes a function call and summarizes the response.
Salesforce Executor	Process	Subprocess that executes a Salesforce query based on a custom connector using SOQL.
Prompt Azure OpenAI LLM	Process	Subprocess that calls the Azure OpenAI LLM and returns the answer.
Azure OpenAI Agent for Salesforce	Process	The process that calls the LLM with user prompts and translates them into a list of queries. The queries are executed in a sequence. As each query runs, the LLM creates a new Salesforce query.
Query Snowflake	Process	Subprocess that executes queries in Snowflake.

Asset Name	Asset Type	Description
Azure OpenAI Agent for Dynamics 365 and Snowflake	Process	Subprocess that uses an AI Agent to iteratively generate and refine API payloads based on user input and previous responses. It handles queries, updates, lookups, and dependencies step-by-step, producing structured JSON requests and user-friendly outputs.
Query Dynamics 365	Process	Subprocess that executes queries in Dynamics 365.
Microsoft Teams AI Agent	Process	The process that receives a query from Microsoft Teams, uses function calling to dynamically generate, orchestrate, and run the necessary AI agents, and then returns the generated response to the Microsoft Teams channel.

CHAPTER 3

Using the Multifunction Calling using Microsoft Teams AI Agent recipe

To use the Multifunction Calling using Microsoft Teams AI Agent recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish the Generic Connector service connector.
3. Publish the Salesforce Query Connector service connector.
4. Configure and publish the GenericConnection connection.
5. Configure and publish the Azure OpenAI connection.
6. Configure and publish the Microsoft Teams connection.
7. Configure and publish the Snowflake Cortex AI connection.
8. Configure and publish the SalesforceQueryConnection connection.
9. Configure and publish the Dynamics 365 connection.
10. Configure and publish the Google Vertex AI connection.
11. Configure and publish the processes.
12. Create webhook in Microsoft Teams.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Multifunction Calling using Microsoft Teams AI Agent** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

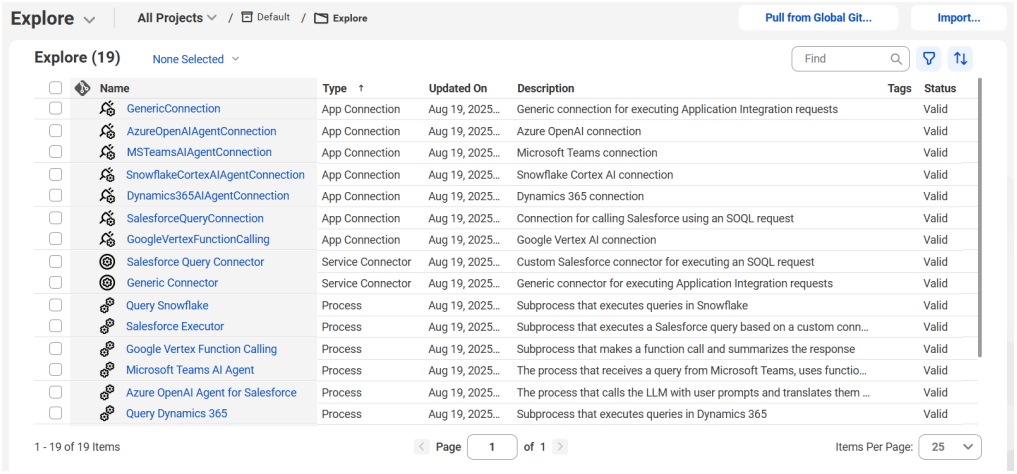

Step 2. Publish the Generic Connector service connector

To publish the **Generic Connector** service connector, open the **Generic Connector** service connector and click **Publish**.

You can also publish the **Generic Connector** from the assets page, by clicking **Actions** in the row that contains the service connector and selecting **Publish**.

Step 3. Publish the Salesforce Query Connector service connector

To publish the **Salesforce Query Connector** service connector, open the **Salesforce Query Connector** service connector and click **Publish**.

You can also publish the **Salesforce Query Connector** from the assets page, by clicking **Actions** in the row that contains the service connector and selecting **Publish**.

Step 4. Configure and publish the GenericConnection connection

Configure the user account credentials to authorize requests, and then publish the GenericConnection connection.

1. Open the **GenericConnection** connection.
2. From the **Type** list, select **Generic Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	User name of the user account to authorize requests.
Password	Password for the user account to authorize requests.

5. Save and publish the connection.

Step 5. Configure and publish the Azure OpenAI connection

Configure the endpoint URL and API key in the AzureOpenAIAgentConnection connection, and then publish the connection.

1. Open the **AzureOpenAIAgentConnection** connection.
2. From the **Type** list, select **AzureOpenAI**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Endpoint_URL	The REST API endpoint for Azure OpenAI. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.
API_Key	The API key to authenticate Azure OpenAI connection requests. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.

5. Save and publish the connection.

Step 6. Configure and publish the Microsoft Teams connection

Configure the OAuth authentication details and the Microsoft graph API version to connect to the Microsoft Teams instance, and then publish the MSTeamsAIAgentConnection connection.

1. Open the **MSTeamsAIAgentConnection** connection.
2. From the **Type** list, select **Microsoft Teams**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **OAuth2** and enter values for the following properties:

Property	Description
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the email application.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For example, Channel.Create Channel.Delete.All Channel.ReadBasic.All ChannelMember.Read.All email offline_access Group.Read.All Group.ReadWrite.All.
Authorization Status	Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

Important: The following properties are standard OAuth 2.0 and OpenID Connect (OIDC) scopes commonly used in Microsoft Teams for correct authentication:

- **openid**: A required scope for OpenID Connect. It indicates that you want to authenticate the user.
- **profile**: Adds basic profile information to the id_token, such as first name, last name, display name, and preferred_username.
- **email**: Grants access to the user's email address. This can be included in the id_token.
- **offline_access**: Allows the app to receive a refresh token. This enables continued access to resources even after the access token expires, so the user does not need to log in again.

5. In the **Connection Properties** section, enter the Microsoft graph API version in the **API_Version** property. The API version is used to create a Microsoft Teams connection. For example, `v1.0`.
6. Save and publish the connection.

Step 7. Configure and publish the Snowflake Cortex AI connection

Configure the account identifier, user name, private key, and public key fingerprint to access the Snowflake instance, and then publish the SnowflakeCortexAIAgentConnection connection.

1. Open the **SnowflakeCortexAIAgentConnection** connection.
2. From the **Type** list, select **Snowflake Cortex AI**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Account_Identifier	The identifier used to access the Snowflake account.The account identifier must not contain underscores (_). If underscores (_) are present, you must replace them with hyphens (-).
User_Name	The identifier representing a specific user account for authentication.
Private_Key	A secret cryptographic key used to digitally sign authentication requests and prove identity.
Public_Key_Finger_Print	A short, unique representation of the user's public key used to verify the authenticity of the corresponding private key.



5. Save and publish the connection.

Step 8. Configure and publish the Salesforce connection

Configure the user credentials, consumer key, and consumer secret to access the Salesforce instance, and then publish the SalesforceQueryConnection connection.

1. Open the **SalesforceQueryConnection** connection.
2. From the **Type** list, select **Salesforce Query Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
User_Name	Salesforce user name with API access for password authentication.
Password	Password associated with the user account.

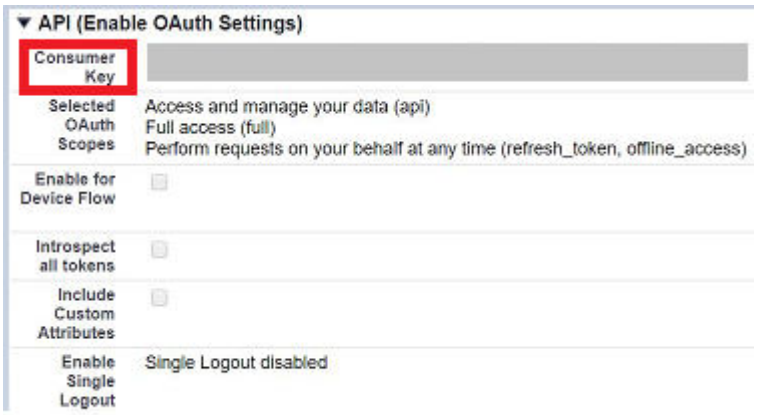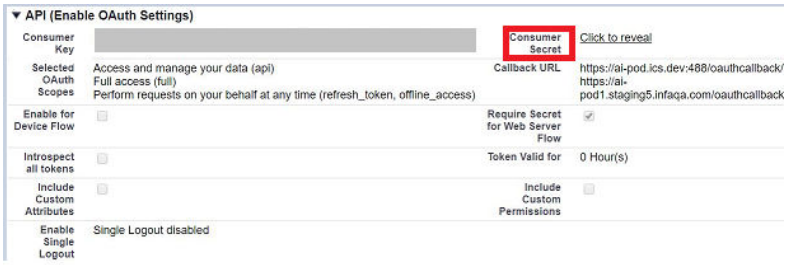Property	Description
Consumer_Key	The consumer key associated with the Salesforce user account for API access. This field is required to subscribe to Salesforce custom platform events, PushTopic queries, and change events, or publish messages to Salesforce custom platform events. To know the consumer key, perform the following steps: - Log in to Salesforce. - Click **Create** > **Apps**. The connected apps are displayed. - Click the connected app. The **API** section displays the consumer key as shown in the following image: 
Consumer_Secret	The consumer secret associated with the Salesforce user account for API access. This field is required to subscribe to Salesforce custom platform events, PushTopic queries, and change events, or publish messages to Salesforce custom platform events. To find the consumer secret, perform the following steps: - Log in to Salesforce. - Click **Create** > **Apps**. The connected apps are displayed. - Click the connected app. The **API** section displays the consumer secret as shown in the following image: 

5. Save and publish the connection.

Step 9. Configure and publish the Dynamics 365 connection

Configure the tenant and client details to access the Dynamics 365 instance, and then publish the Dynamics365AIAgentConnection connection.

1. Open the **Dynamics365AIAgentConnection** connection.
2. From the **Type** list, select **Dynamics365**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Tenant_ID	Dynamics 365 tenant ID to get the access token. Enter the tenant ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365 after creating the client credentials.
Client_ID	Dynamics 365 client ID to generate a valid access token. Enter the client ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Client_Secret	Dynamics 365 client secret that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Grant_type	Grant type that the Dynamics 365 instance uses to get an access token for third-party client authorization. Enter the value as **client_credentials**.
Resource_URL	URL to access the Dynamics 365 instance.

5. Save and publish the connection.

Step 10. Configure and publish the Google Vertex AI connection

Configure the project ID, private key ID, private key, client email, and location to connect to Google Vertex AI, and then publish the GoogleVertexFunctionCalling connection.

1. Open the **GoogleVertexFunctionCalling** connection.
2. From the **Type** list, select **Google Vertex AI**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Project_ID	The project ID to generate a valid access token.
Location	The region to process the request.

Property	Description
Private_Key_ID	The private key ID associated with the Google Vertex AI service account.
Client_Email	The email address associated with the Google Vertex AI service account.
Private_Key	The Google Vertex AI private key associated with the service account. Enter the PKCS1 certificate as a Base64-encoded string in the following format: `-----BEGIN PRIVATE KEY----- ..... n-----END PRIVATE KEY-----`


5. Save and publish the connection.

Step 11. Configure and publish the processes


Configure the LLM model, API URLs, and team ID, and then publish the processes.

1. To publish the following processes, click **Actions** in the row that contains the processes and select **Publish**.
   - Generic Executor
   - Google Vertex Function Calling
   - Salesforce Executor
   - Azure OpenAI Agent for Salesforce
   - Query Dynamics 365
2. Open the **Prompt Azure OpenAI LLM** process.
3. On the **Input Fields** tab of the **Send Prompt** step, enter the deployment ID and the API version of the Azure OpenAI LLM model in the **deployment_id** and **api_version** fields.
4. Save and publish the process.
5. Open the **Query Snowflake** process.
6. On the **Assignments** tab of the **Set Default Database and Schema Values** step, enter the database and schema values for Snowflake database in the **database** and **schema** fields.
7. Save and publish the process.
8. Open the **Azure OpenAI Agent for Dynamics 365 and Snowflake** process.
9. On the **Assignments** tab of the **Snowflake LLM System Instructions** step, enter the following field values:
   - Update information about Snowflake tables in the **Table_Metadata** field.
   - Update LLM system instruction in the **System_Instruction** field, if required.
   - Enter the service URL that you get after publishing the **Query Snowflake** process in the **API_URL** field.
10. On the **Assignments** tab of the **Dynamics 365 LLM System Instructions** step, enter the following field values:
    - Update LLM system instruction in the **System_Instruction** field, if required.
    - Enter the service URL that you get after publishing the **Query Dynamics 365** process in the **API_URL** field.
11. Save and publish the process.
12. Open the **Microsoft Teams AI Agent** process.

13. On the **Start** tab of the Start step, select **Allow anonymous access**.
14. On the **Assignments** tab of the **Set Flow Configurations** step, update the function declaration and the LLM model in the **Function_Declaration** and **LLM_Model** fields.
15. On the **Assignments** tab of the **Get Data from Message** step, you can optionally update the team ID value in the **Team_ID** field.
    To find the team ID, perform the following steps:
    1. Go to your team listed on the left side of the Teams app.
    2. Select **More options** > **Get link to team** as shown in the following image:

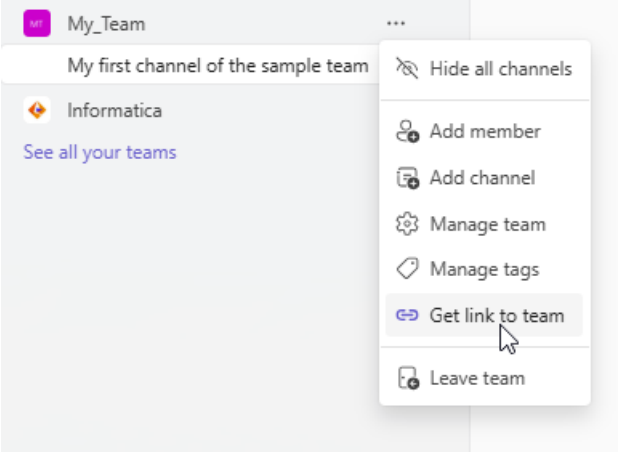

    3. Copy the group ID value as shown in the following image:

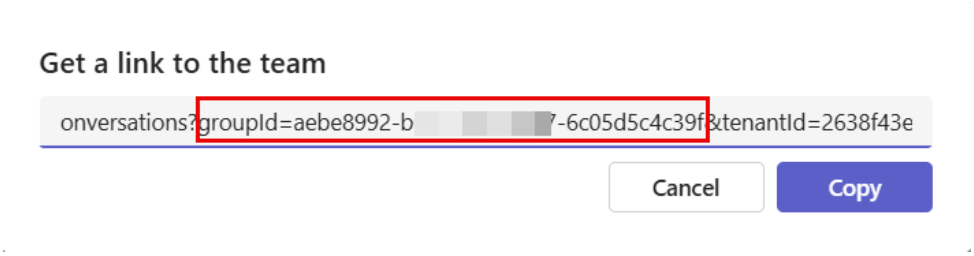


16. Save and publish the process.
17. On the **Actions** menu of the **Microsoft Teams AI Agent** process, click **Properties Detail** and copy the service URL.
    You must copy the service URL to set up the webhook configuration in Microsoft Teams. For more information, see "Step 12. Create webhook in Microsoft Teams" on page 21.

Step 12. Create webhook in Microsoft Teams


You can configure webhook to communicate between systems when an event occurs.

To create a webhook in Microsoft Teams, perform the following steps:


1. Go to **Team** > **Manage team** > **Apps** > **Create an outgoing webhook**.
   The following image shows the steps to create an outgoing webhook in the Microsoft Teams app:

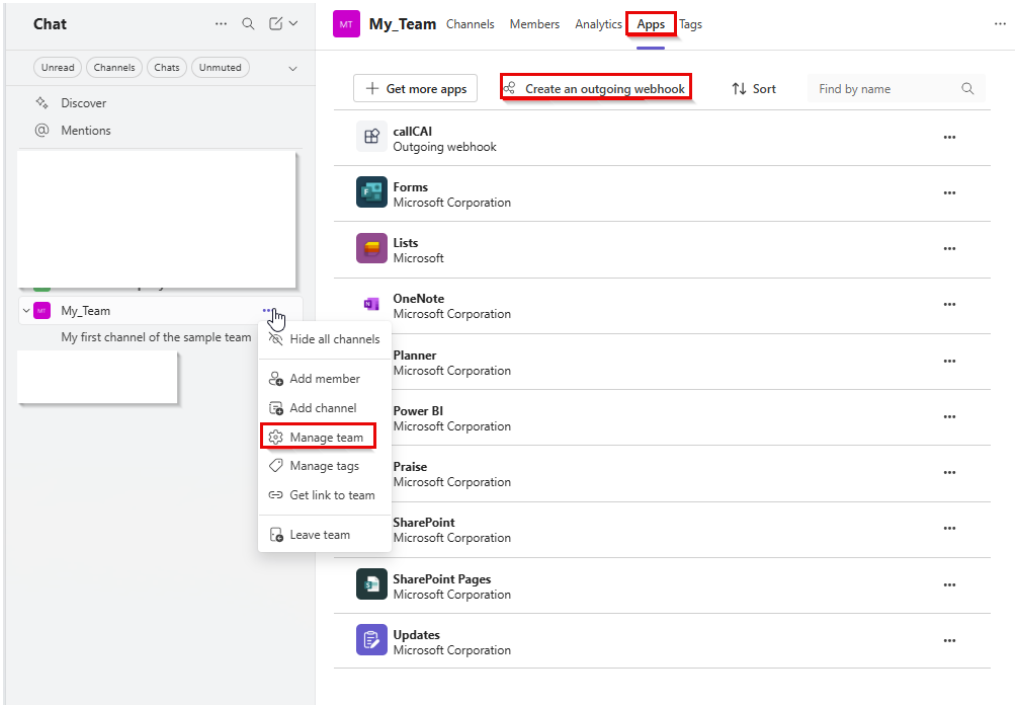

2. Enter the webhook name, the service URL that you get after publishing the process, and the description, and then click **Create** as shown in the following image:

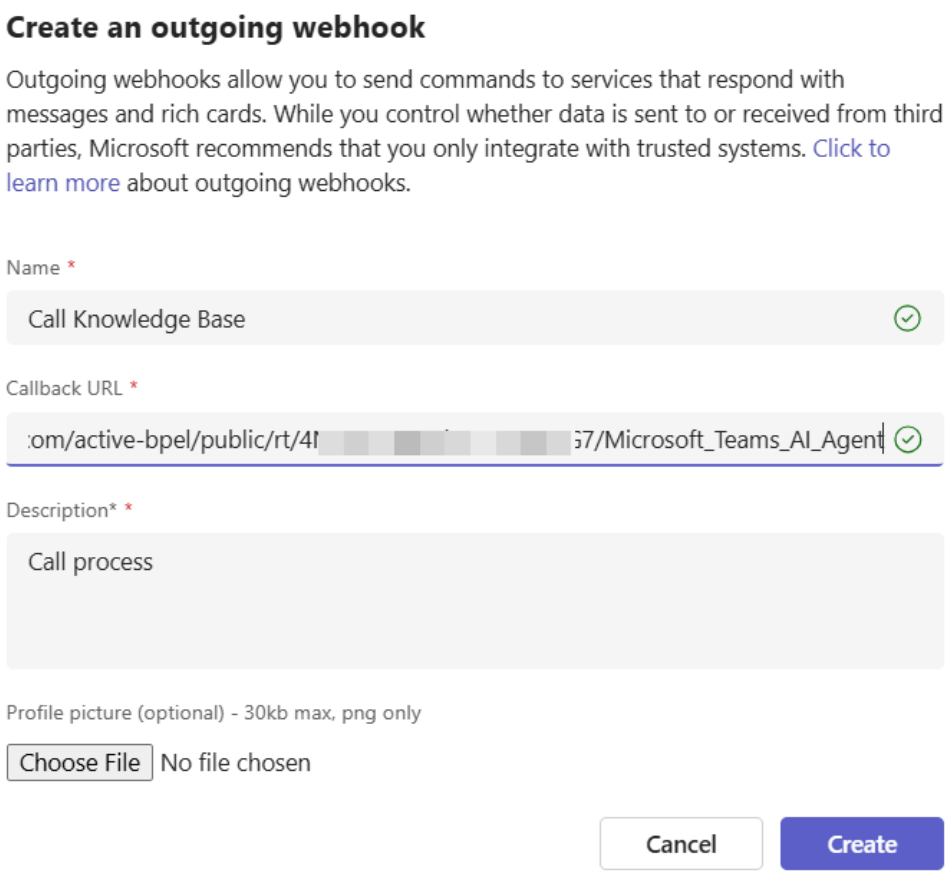

The process is triggered by a message containing the @<Webhook_Name> in the Teams channel where the webhook is deployed as shown in the following image:

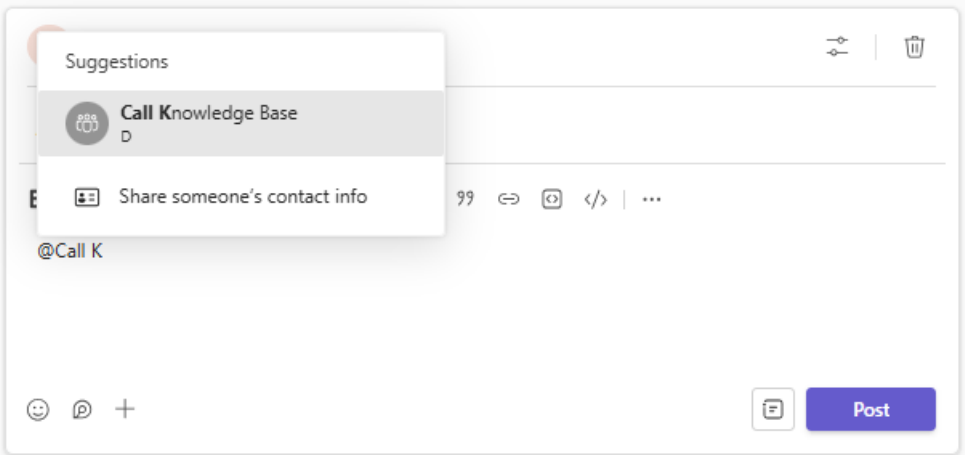

Test Multifunction Calling using Microsoft Teams AI Agent recipe

You can test the Multifunction Calling using Microsoft Teams AI Agent recipe with the function declaration value that is set as default in the **Set Flow Configurations** step of the **Microsoft Teams AI Agent** process.

The default value applies to and can execute the **Azure OpenAI Agent for Dynamics 365 and Snowflake** and **Azure OpenAI Agent for Salesforce** recipes that are imported from the **Recipes** tab.

Ensure that all the following processes in this recipe contains the user that has access to the process service URL at run time in the **Allowed Users** field:

- Query Dynamics 365
- Query Snowflake
- Azure OpenAI Agent for Dynamics 365 and Snowflake
- Azure OpenAI Agent for Salesforce

The function name must start with a letter or an underscore, and can contain alphanumeric characters, underscores (_), periods (.), and hyphens (-). For more information, see Google Vertex AI documentation.

The structure of the **Function_Declaration** is important for further execution of the request to the Application Integration process. If the process involves an AI agent handling Microsoft Teams webhooks, this must be indicated in the **name** field within the function name. To configure your **Function_Declaration** in the process, you must specify it in the JSON format as shown in the following example:

```
<tools>
    <functionDeclarations>
        <name>Work_With_Snowflake_Agent</name>
        <description>The function recognizes user input for interract with Snowflake
service create, update and find information about employees.</description>
        <parameters>
            <type>object</type>
            <properties>
                <Process_URL>
                    <type>string</type>
                    <description>Fixed URL to execute process</description>
                    <enum><Service_URL_of_the_Application_Integration_Process></enum>
                </Process_URL>
                <Payload>
                    <type>array</type>
                    <description>Structured payload for processes</description>
                        <items>
                        <description>Fields in payload for processes</description>
                        <type>object</type>
                        <properties>
                                    <User_Prompt>
                                        <type>string</type>
                                        <description>The message text from the event</
description>
                                    </User_Prompt>
                                    <Agent_Name>
                                        <type>string</type>
                                        <description>The AI Agent name</description>
                                        <enum>Snowflake</enum>
                                    </Agent_Name>
                                </properties>
                                <required>User_Prompt</required>
                                <required>Agent_Name</required>
                                </items>
                </Payload>
            </properties>
            <required>Process_URL</required>
            <required>Payload</required>
        </parameters>
```

```
    </functionDeclarations>
    <functionDeclarations>
        <name>Work_With_Dynamics_Agent</name>
        <description>The function processes user input to interact with the Dynamics 365
service, enabling the creation, update, and retrieval of information about the company's
clients.</description>
        <parameters>
            <type>object</type>
            <properties>
                <Process_URL>
                    <type>string</type>
                    <description>Fixed URL to execute process</description>
                    <enum><Service_URL_of_the_Application_Integration_Process></enum>
                </Process_URL>
                <Payload>
                    <type>array</type>
                    <description>Structured payload for processes</description>
                        <items>
                        <description>Fields in payload for processes</description>
                        <type>object</type>
                        <properties>
                                    <User_Prompt>
                                        <type>string</type>
                                        <description>The message text from the event</
description>
                                    </User_Prompt>
                                    <Agent_Name>
                                        <type>string</type>
                                        <description>The AI Agent name</description>
                                        <enum>Dynamics</enum>
                                    </Agent_Name>
                                </properties>
                                <required>User_Prompt</required>
                                <required>Agent_Name</required>
                                </items>
                </Payload>
            </properties>
            <required>Process_URL</required>
            <required>Payload</required>
        </parameters>
    </functionDeclarations>
        <functionDeclarations>
        <name>Work_With_Salesforce_Agent</name>
        <description>The function processes user input to interact with the Salesforce
service, enabling the creation, update, and retrieval of information about the company's
products.</description>
        <parameters>
            <type>object</type>
            <properties>
                <Process_URL>
                    <type>string</type>
                    <description>Fixed URL to execute process</description>
                    <enum><Service_URL_of_the_Application_Integration_Process></enum>
                </Process_URL>
                <Payload>
                    <type>array</type>
                    <description>Structured payload for processes</description>
                        <items>
                        <description>Fields in payload for processes</description>
                        <type>object</type>
                        <properties>
                                    <User_Prompt>
                                        <type>string</type>
                                        <description>The message text from the event</
description>
                                    </User_Prompt>
                                    <Agent_Name>
                                        <type>string</type>
                                        <description>The AI Agent name</description>
                                        <enum>Salesforce</enum>
                                    </Agent_Name>
```

```
                                </properties>
                                <required>User_Prompt</required>
                                <required>Agent_Name</required>
                                </items>
                    </Payload>
                </properties>
                <required>Process_URL</required>
                <required>Payload</required>
            </parameters>
        </functionDeclarations>
</tools>
```