Informatica® Cloud Application Integration
August 2025

Multifunction Calling using Slack AI Agent

Informatica Cloud Application Integration Multifunction Calling using Slack AI Agent
August 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Multifunction Calling using Slack AI Agent recipe 6

Multifunction Calling using Slack AI Agent recipe contents 6

Multifunction Calling using Slack AI Agent recipe assets 7

Chapter 2: Using the Multifunction Calling using Slack AI Agent recipe 8

Step 1. Copy and access the recipe 8

Step 2. Publish the Generic Connector service connector 9

Step 3. Configure and publish the GenericConnection connection 9

Step 4. Configure and publish the Slack connection 10

Step 5. Configure and publish the Google Vertex AI connection 11

Step 6. Configure and publish the processes 11

Step 7. Create webhook in Slack 12

Test the Multifunction Calling using Slack AI Agent recipe 16

Preface

Use *Multifunction Calling using Slack AI Agent* to learn how to receive user queries from Slack, send them to Google Vertex for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Slack channel. This guide assumes that you have an understanding of the Google Vertex AI Connector and Slack Connector concepts.

CHAPTER 1

Introduction to Multifunction Calling using Slack AI Agent recipe

The Multifunction Calling using Slack AI Agent recipe is based on REST API. Use the recipe to receive user queries from Slack. These queries are then sent to Google Vertex for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Slack channel.

The process begins by receiving user input from Slack and skipping messages if they are bot responses.


The process sends a request to Google Vertex AI with the specified function declaration and user prompt. Google Vertex AI interprets the query, extracts key variables and values, and returns them in the appropriate format. Using the response received from the function calling, a request is then made to the Large Language Model (LLM) to summarize and explain the extracted parameters, and sends the result in the Slack channel.

The process sends a request to the Application Integration process with parameters obtained from the function calling response. The LLM generated response is returned to the user in the same channel, where it appears as a bot or app response.

Multifunction Calling using Slack AI Agent recipe contents

The Multifunction Calling using Slack AI Agent recipe contains a service connector, app connections, and processes.

The following image shows the assets that the Multifunction Calling using Slack AI Agent recipe package contains:

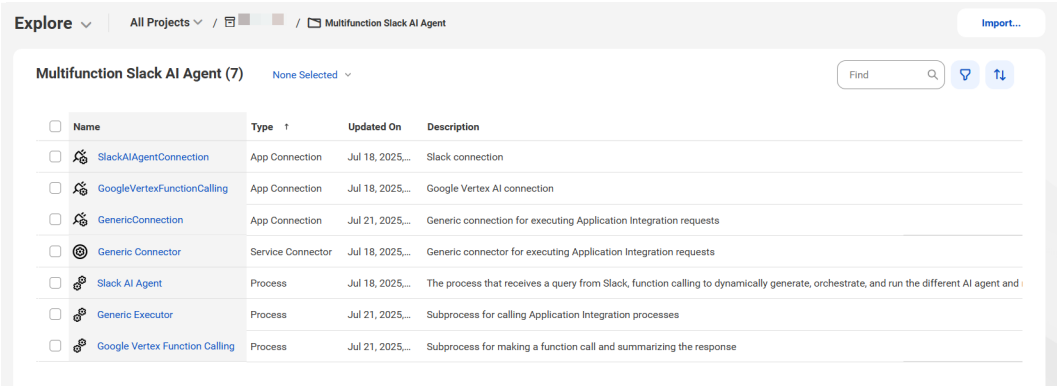

Multifunction Calling using Slack AI Agent recipe assets

The following table lists the assets that the Multifunction Calling using Slack AI Agent recipe package contains:

Asset Name	Asset Type	Description
Generic Connector	Service Connector	Generic connector for executing Application Integration requests.
GenericConnection	App Connection	Generic connection for executing Application Integration requests.
SlackAIAgentConnection	App Connection	Slack connection.
GoogleVertexFunctionCalling	App Connection	Google Vertex AI connection.
Generic Executor	Process	Subprocess for calling Application Integration processes.
Google Vertex Function Calling	Process	Subprocess for making a function call and summarizing the response.
Slack AI Agent	Process	Process that receives a query from Slack, uses function calling to dynamically generate, orchestrate, and run the necessary AI agents, and then returns the generated response to the Slack channel.

CHAPTER 2

Using the Multifunction Calling using Slack AI Agent recipe

To use the Multifunction Calling using Slack AI Agent recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish the Generic Connector service connector.
3. Configure and publish the GenericConnection connection.
4. Configure and publish the Slack connection.
5. Configure and publish the Google Vertex AI connection.
6. Configure and publish the processes.
7. Create webhook in Slack.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Multifunction Calling using Slack AI Agent** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

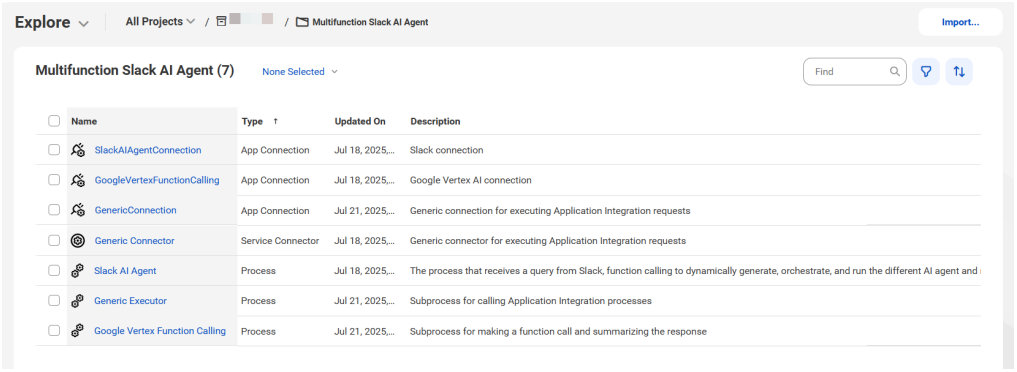

Step 2. Publish the Generic Connector service connector

To publish the **Generic Connector** service connector, open the **Generic Connector** service connector and click **Publish**.

You can also publish the **Generic Connector** from the assets page, by clicking **Actions** in the row that contains the service connector and selecting **Publish**.

Step 3. Configure and publish the GenericConnection connection

Configure the user account credentials to authorize requests, and then publish the GenericConnection connection.

1. Open the **GenericConnection** connection.
2. From the **Type** list, select **Generic Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	User name of the user account to authorize requests.
Password	Password for the user account to authorize requests.

5. Save and publish the connection.

Step 4. Configure and publish the Slack connection

Configure the base URL to access the Slack instance, and then publish the SlackAIAgentConnection connection.

1. Open the **SlackAIAgentConnection** connection.
2. From the **Type** list, select **Slack**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **OAuth2** and enter values for the following properties:

Property	Description
Grant Type	Required. Select the required grant type based on your use case.
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://slack.com/oauth/v2/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://slack.com/api/oauth.v2.access` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the OAuth provider.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space.
Session Duration	Optional. Enter the number of minutes to wait before refreshing the session. This is used if you cannot obtain the token expiration from the OAuth provider. Default is 60 minutes.
Other Parameters	Optional. Enter parameters to customize the authorization request, separated with semicolons. You can provide extra information or specify requirements of the OAuth provider.
Authorization Status	Optional. Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

5. In the **Connection Properties** section, enter the base URL in the **Base_URL** property. The base URL connects to the Slack API and sets the primary endpoint for all Slack requests.
6. Save and publish the connection.

Step 5. Configure and publish the Google Vertex AI connection

Configure the project ID, private key ID, private key, client email, and location to connect to Google Vertex AI, and then publish the GoogleVertexFunctionCalling connection.

1. Open the **GoogleVertexFunctionCalling** connection.
2. From the **Type** list, select **Google Vertex AI**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Project_ID	The project ID to generate a valid access token.
Location	The region to process the request.
Private_Key_ID	The private key ID associated with the Google Vertex AI service account.
Client_Email	The email address associated with the Google Vertex AI service account.
Private_Key	The Google Vertex AI private key associated with the service account. Enter the PKCS1 certificate as a Base64-encoded string in the following format: `-----BEGIN PRIVATE KEY----- ..... n-----END PRIVATE KEY-----`

5. Save and publish the connection.

Step 6. Configure and publish the processes

Configure the function declaration and the LLM model and publish the processes.

1. To publish the **Generic Executor** process, click **Actions** in the row that contains the process and select **Publish**.
2. To publish the **Google Vertex Function Calling** process, click **Actions** in the row that contains the process and select **Publish**.
3. Open the **Slack AI Agent** process.
4. On the **Start** tab of the Start step, select **Allow anonymous access**.
5. Optionally, on the **Assignments** tab of the **Set Flow Configurations** step, update the function declaration and the LLM model in the **Function_Declaration** and **LLM_Model** fields.
6. Save and publish the process.
7. On the **Actions** menu, click **Properties Detail** and copy the service URL.
   You will need this process URL to set up the Slack webhook.

Step 7. Create webhook in Slack


Configure a Slack app that calls an API when a new message arrives.

To create a webhook in Slack, perform the following steps:

1. “Create a Slack App” on page 12
2. “Enable the events API” on page 12
3. “Subscribe to the event” on page 13
4. “Set the required OAuth scopes” on page 14
5. “Enable token rotation” on page 15
6. “Add bot to a channel” on page 16

Create a Slack App


1. Go to `https://api.slack.com/apps` and log in to your account.
2. Click **Create New App** > **From scratch**.
3. Enter the app name and select your workspace, and then click **Create App** as shown in the following image:

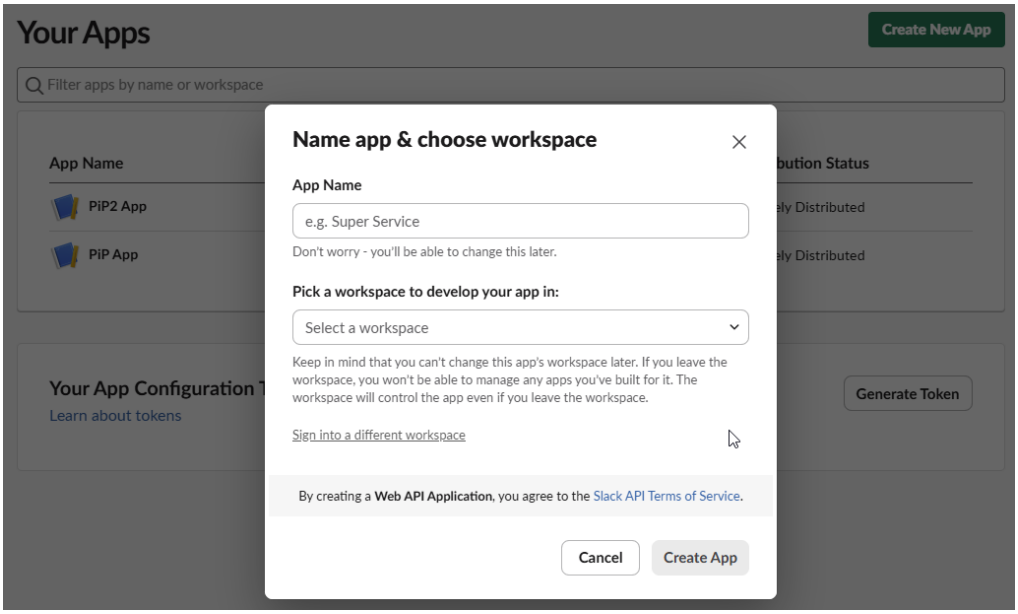

Enable the events API

1. From the left navigation bar, go to **Event Subscriptions**.
2. Turn on the toggle switch to enable events.


3. In the **Request URL** field, enter the service URL that you get after publishing the process. Slack sends a `challenge` request to verify the URL as shown in the following image:

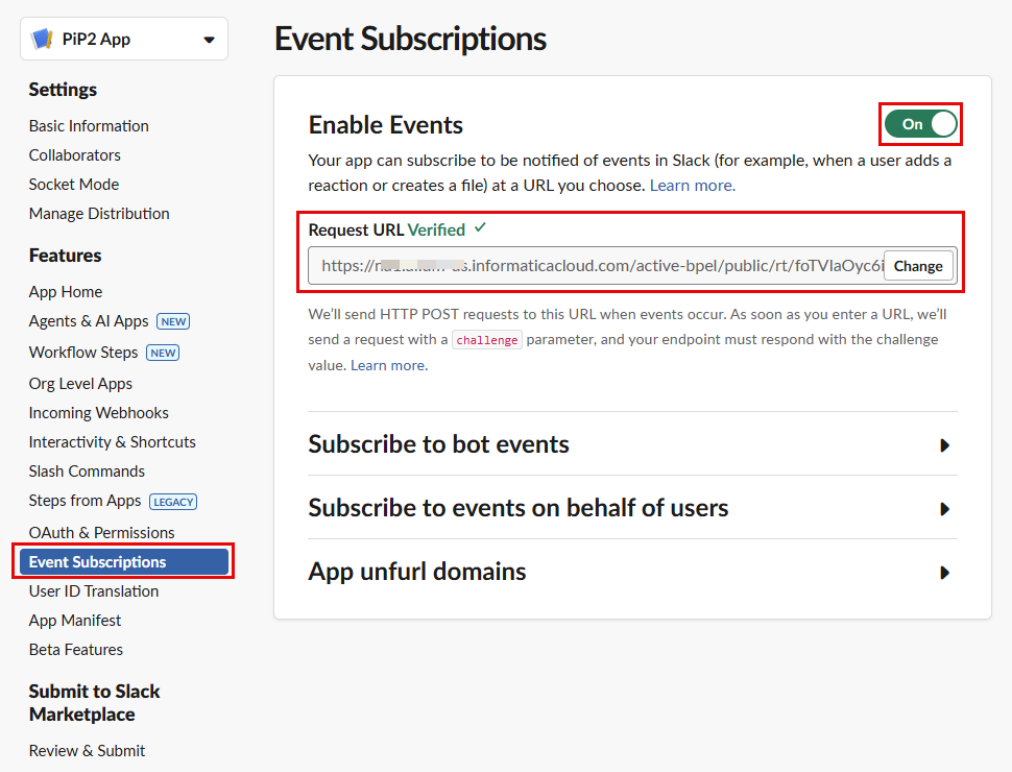

Subscribe to the event


1. In the **Subscribe to bot events** section, click **Add Bot User Event** and add one of the following events as required:
   - `message.channels` — to receive messages from public channels.
   - `message.groups` — for private channels.

   The event allows your app to receive messages from channels it belongs to as shown in the following image:

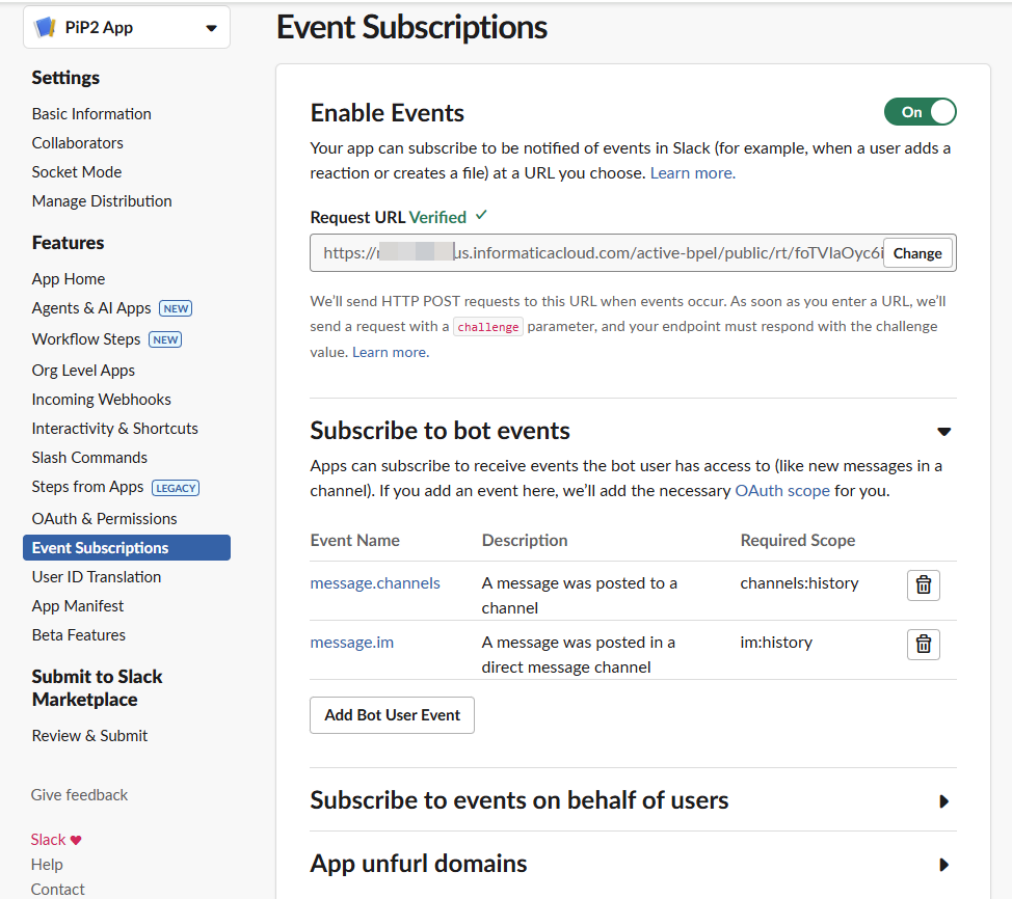

Set the required OAuth scopes

1. Go to **OAuth & Permissions**.
2. In the **Bot Token Scopes** section, click **Add an OAuth Scope** and add one of the following OAuth scopes:
   - `channels:history` — to read public channel messages.
   - `groups:history` — to read messages from private channels, if needed.
   - `chat:write` — if your bot needs to send messages.
3. In the **Redirect URLs** section, click **Add New Redirect URL** and add the redirect URLs in `<Cloud Application Integration POD URL>/oauthcallback` format and save the URLs. For example, `https://na1.dm-us.informaticacloud.com/oauthcallback` as shown in the following image:

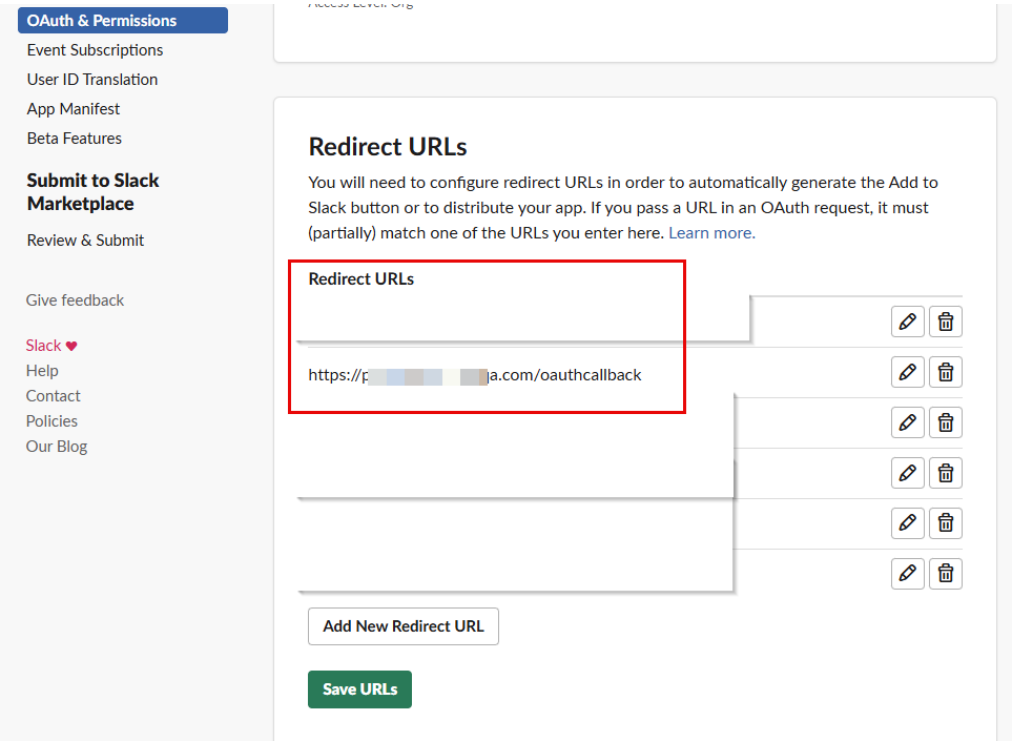


4. Install the app using the **Install App** section.

Enable token rotation

1. Go to **OAuth & Permissions**.

2. In the **Advanced token security via token rotation** section, click **Opt In**.

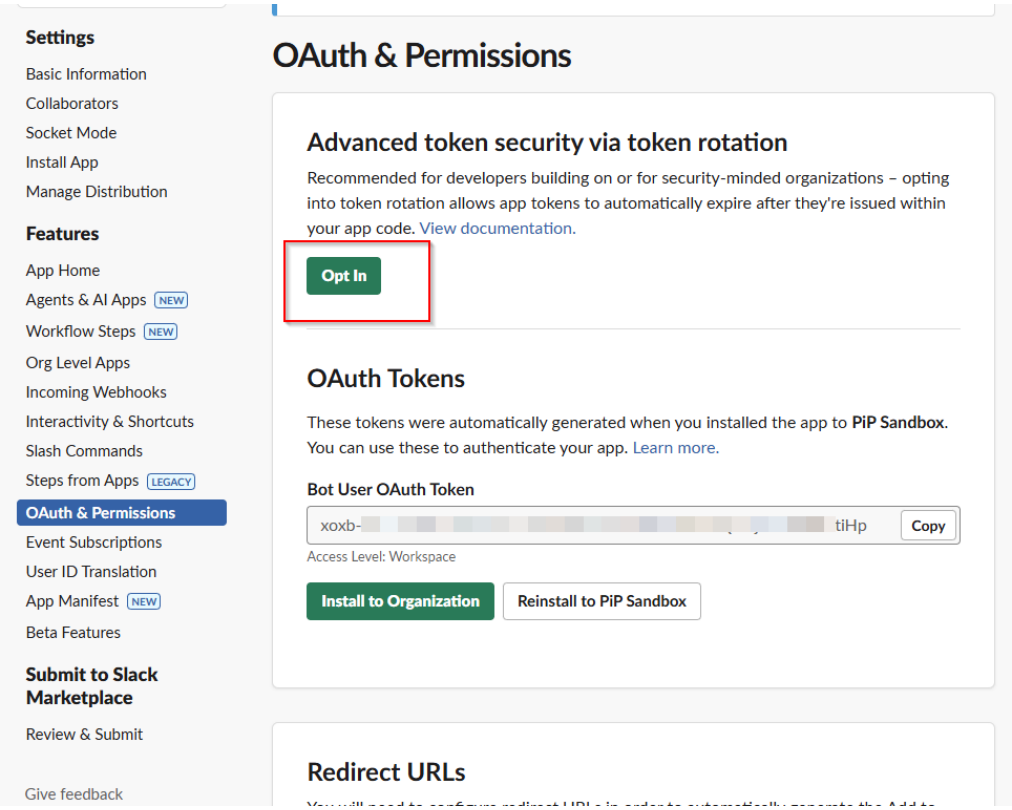

Add bot to a channel

1. In Slack, go to the required channel.
2. Invite the bot using `/invite @<your-bot-name>`.

Test the Multifunction Calling using Slack AI Agent recipe

You can test the Multifunction Calling using Slack AI Agent recipe with the function declaration value that is set as default in the **Set Flow Configurations** step of the **Slack AI Agent** process.

The default value applies to and can execute the **Generate Image with NVIDIA NIM** and **Simple RAG Consumption with NVIDIA NIM** recipes that are imported from the **Recipes** tab. Ensure that the parent processes in these recipes contain the user that has access to the process service URL at run time in the **Allowed Users** field.

For example, in the **Slack AI Agent** process, you can enter one of the following prompts for the correct function call for these recipes:

- `Create an image (image description)`
- `Find a document with printer instruction`

The function name must start with a letter or an underscore, and can contain alphanumeric characters, underscores (_), periods (.), and hyphens (-). For more information, see Google Vertex AI documentation.

The structure of the **Function_Declaration** is important for further execution of the request to the Application Integration process. If the process involves an AI agent handling Slack webhooks, this must be indicated in the **name** field within the function name. To configure your **Function_Declaration** in the process, you must specify it in the JSON format as shown in the following examples:

Example 1:

```
<tools>
    <functionDeclarations>
        <name>Create_Image_with_Slack</name>
        <description>The function recognizes user input for generate image from text.</
description>
        <parameters>
            <type>object</type>
            <properties>
                <Process_URL>
                    <type>string</type>
                    <description>Fixed URL to execute process</description>
                    <enum><Service_URL_of_the_Application_Integration_Process></enum>
                </Process_URL>
                <Payload>
                    <type>array</type>
                    <description>Structured payload for processes</description>
                    <items>
                        <description>Fields in payload for processes</description>
                        <type>object</type>
                        <properties>
                                    <event>
                                        <type>object</type>
                                        <properties>
                                            <text>
                                                <type>string</type>
                                                <description>The message text from the
event</description>
                                                <enum>{$temp.Message}</enum>
                                            </text>
                                            <channel>
                                                <type>string</type>
                                                <description>The Slack channel ID</
description>
                                                <enum>{$temp.Channel_ID}</enum>
                                            </channel>
                                        </properties>
                                        <required>text</required>
                                        <required>channel</required>
                                    </event>
                                </properties>
                                <required>event</required>
                    </items>
                </Payload>
            </properties>
            <required>Process_URL</required>
            <required>Payload</required>
        </parameters>
    </functionDeclarations>
</tools>
```

Example 2:

```
<tools>
    <functionDeclarations>
        <name>Find_documents_in_vector_database_with_Slack</name>
        <description>The function recognizes user input for generate image from text.</
description>
        <parameters>
            <type>object</type>
            <properties>
                <Process_URL>
                    <type>string</type>
                    <description>Fixed URL to execute process</description>
                    <enum><Service_URL_of_the_Application_Integration_Process></enum>
```

```
                </Process_URL>
                <Payload>
                    <type>array</type>
                    <description>Structured payload for processes</description>
                    <items>
                        <description>Fields in payload for processes</description>
                        <type>object</type>
                        <properties>
                                    <event>
                                        <type>object</type>
                                        <properties>
                                            <text>
                                                <type>string</type>
                                                <description>The message text from the
event</description>
                                                <enum>{$temp.Message}</enum>
                                            </text>
                                            <channel>
                                                <type>string</type>
                                                <description>The Slack channel ID</
description>
                                                <enum>{$temp.Channel_ID}</enum>
                                            </channel>
                                        </properties>
                                        <required>text</required>
                                        <required>channel</required>
                                    </event>
                                </properties>
                                <required>event</required>
                    </items>
                </Payload>
            </properties>
            <required>Process_URL</required>
            <required>Payload</required>
        </parameters>
    </functionDeclarations>
</tools>
```