Informatica® Application Integration
February 2026

Email Handler

Informatica Application Integration Email Handler
February 2026

© Copyright Informatica LLC 2026

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2026-02-19

Table of Contents

Preface 5

Chapter 1: Introduction to Email Handler recipe 6

Prerequisite 6

Chapter 2: Email Handler recipe contents 7

Email Handler recipe assets 7

Chapter 3: Using the Email Handler recipe 8

Step 1. Copy and access the recipe 8

Step 2. Publish the A2E Agent service connector 9

Step 3. Configure and publish the A2E Agent connection 9

Step 4. Configure and publish the Email connection 10

Step 5. Configure and publish the Email Handler process 11

Step 6. Configure and deploy the AI agent 11

Step 7. Configure and publish the Call A2E Agent process 11

Preface

Use *Email Handler* to learn how to send emails using a preconfigured mailbox and trigger an agent flow in AI Agent Engineering with the message details. This guide assumes that you have an understanding of the Email Connector and AI Agent Engineering service concepts.

CHAPTER 1

Introduction to Email Handler recipe

The Email Handler recipe allows AI agents to send emails using a preconfigured mailbox. The recipe captures data from incoming emails and triggers an agent flow in AI Agent Engineering. It processes the email's message details so that your AI agent can respond appropriately to the content received.

While the Email Handler focuses on receiving emails, it works in tandem with the Email Tool, which enables AI agents to send emails from a preconfigured mailbox. The Email Tool automatically authenticates using credentials set in the tool settings and sends messages to one or multiple recipients. You can compose simple text messages using the Body field, create rich-formatted emails with HTML, and include optional fields like CC, BCC, and ReplyTo.

The Email Handler recipe and the Email Tool together help you integrate email communication directly into your agentic workflows.

Prerequisite

Configure the Email tool recipe before you start configuring the agent flow to send emails from a fixed sender mailbox to one or more recipients.


For detailed, step-by-step instructions, see the Email Tool recipe guide in AI Agent Engineering.

CHAPTER 2

Email Handler recipe contents

The Email Handler recipe contains a service connector, app connections, and processes.

The following image shows the assets that the Email Handler recipe package contains:

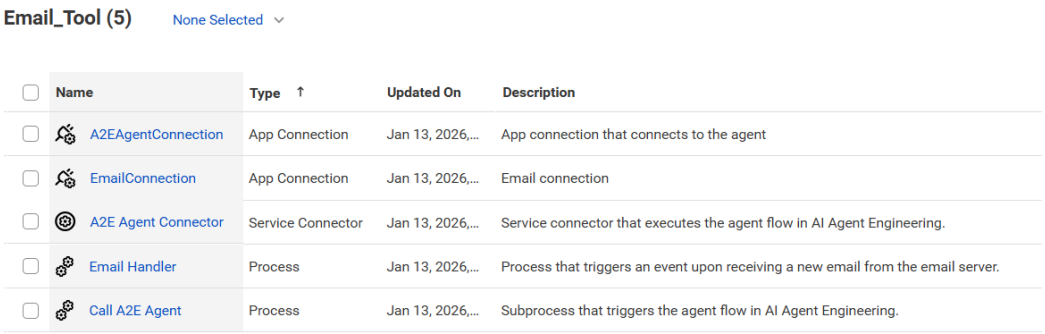

Email Handler recipe assets

The following table lists the assets that the Email Handler recipe package contains:

Asset Name	Asset Type	Description
A2E Agent Connector	Service connector	Service connector that executes the agent flow in AI Agent Engineering.
A2EAgentConnection	App connection	App connection that connects to the agent.
EmailConnection	App connection	Email connection.
Call A2E Agent	Process	Subprocess that triggers the agent flow in AI Agent Engineering.
Email Handler	Process	Process that triggers an event upon receiving a new email from the email server.

CHAPTER 3

Using the Email Handler recipe

To use the Email Handler recipe, perform the following steps:

1. Copy and access the recipe.
2. Configure and publish the A2E Agent Connector connector.
3. Configure and publish the A2EAgentConnection connection.
4. Configure and publish the EmailConnection connection.
5. Configure and publish the Email Handler process.
6. Configure and deploy the AI agent.
7. Configure and publish the Call A2E Agent process.

Step 1. Copy and access the recipe

Copy the pre-configured assets in the recipe to a separate project or folder.


1. Open the **Email Handler** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.

   Tip: Since the recipe contains multiple assets, copy the recipe into a dedicated folder to easily identify the assets and prevent overwriting any existing assets with the same names.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You'll receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

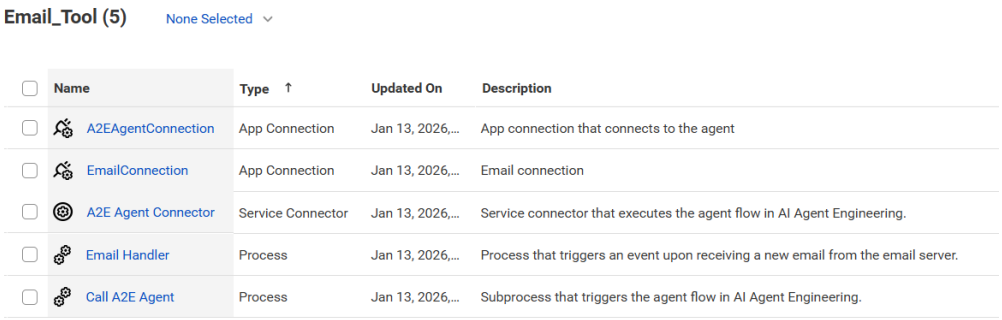

Step 2. Publish the A2E Agent service connector

You can publish the **A2E Agent Connector** service connector from the assets page.

To publish the service connector, click **Actions** in the row that contains the service connector and select **Publish**.

Step 3. Configure and publish the A2E Agent connection

Configure the user credentials and runtime environment in the **A2EAgentConnection** connection, and then publish the connection.

1. Open the **A2EAgentConnection** connection.
2. From the **Type** list, select **A2E Agent Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select the Secure Agent.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
User name	IDMC user name to authorize requests.
Password	IDMC password to authorize requests.

5. Save and publish the connection.

Step 4. Configure and publish the Email connection

Configure the authentication details and the host name and port number of the email server in the **EmailConnection**. Then publish the connection.

1. Open the **EmailConnection** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password**.
5. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the Gmail or Microsoft Outlook email server. The user name is either the account name or the email address that is used to send the email with the synchronization results.
Password	App password generated from the Gmail or Microsoft Outlook server.
Security	Select the appropriate security type: - **SSL** for Gmail server. - **TLS** for Outlook server.
Connection Timeout	Connection timeout in milliseconds. Default is **30000** milliseconds.

Configure the following common properties on the connection creation page:

Property	Description
Host	Host name of the server. Example for the Gmail server: `smtp.gmail.com`
Port	Port for communication between the Process Server and the email server. Example for the Gmail server: `465`
Test Email Address	Email address that receives test mails from this connection.
From Email Address	Email address that appears in the From field for emails sent from this connection.

6. On the **Event Sources** tab, enter the event source name, and the IMAP host and port values of your email server in the **Host** and **IMAP port** fields.
   Example for Gmail server:
   - Host: `imap.gmail.com`
   - Port: `993`
7. Save and publish the connection.

Step 5. Configure and publish the Email Handler process

Configure the event details, and then publish the **Email Handler** process.

1. Open the **Email Handler** process.
2. On the **Start** tab of the **Start** step, select **Event** in the **Binding** field.
3. In the **Event Source Name** field, select the event source that you created in the **EmailConnection** connection.
4. Save and publish the process.

Step 6. Configure and deploy the AI agent

To configure the AI agent, perform the following steps in AI Agent Engineering:

1. From the navigation menu, select **New**.
2. In the **New Asset** dialog box, select **Flow** > **Agent Flow**, and then click **Create**.
3. Enter a name and click **Create**.
4. Add an agent block, select the appropriate LLM, and enter the planning prompt.
5. Optionally, to send emails from a fixed sender mailbox to one or more recipients, configure the Email tool recipe and select it from the **Agents and Tools** list. For detailed, step-by-step instructions, see the Email Tool recipe guide in AI Agent Engineering.
6. Save and deploy the agent flow.
   The **Deploy** dialog box is displayed.
7. From the **Runtime Environment** list, select the Secure Agent.
8. Enter the URL suffix.
9. Copy the REST endpoint URL from the **URL Preview** field.
   You'll need the endpoint URL to configure the **Call A2E Agent** process.
10. Select **Anonymous** as the authentication type.
11. Click **Deploy**.

Step 7. Configure and publish the Call A2E Agent process

Configure the Secure Agent and the AI agent parameters from the agent flow you created, and then publish the **Call A2E Agent** process.

1. In Application Integration, open the **Call A2E Agent** process.
2. On the **Start** tab of the **Start** step, select the Secure Agent from the **Run On** list. This should be the same Secure Agent you selected when you deployed the AI agent.

3. On the **Input Fields** tab of the **Call A2E Agent** step, enter the following values extracted from the URL you copied from the agent flow you created in AI Agent Engineering:
   - HostName_Port
   - FRS_ID
   - Flow_Name

   For example, in the following URL:

   ```
   https://localhost:19448/a2e/7BoWuUfqJsvdg6Fa7dtVi7/Teams
   ```

   The syntax is:

   ```
   https://<HostName_Port>/a2e/<FRS_ID>/<Flow_Name>
   ```
4. Save and publish the process.