Informatica® Application Integration
February 2026

Slack Message Handler

Informatica Application Integration Slack Message Handler
February 2026

© Copyright Informatica LLC 2026

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2026-02-19

Table of Contents

Preface 5

Chapter 1: Introduction to Slack Message Handler recipe 6

Prerequisite 6

Chapter 2: Slack Message Handler recipe contents 7

Slack Message Handler recipe assets 7

Chapter 3: Using the Slack Message Handler recipe 8

Step 1. Copy and access the recipe 8

Step 2. Publish the A2E Agent Connector service connector 9

Step 3. Configure and publish the A2EAgentConnection connection 9

Step 4. Configure and publish the Slack Message Handler process 10

Step 5. Create a webhook in Slack 10

Step 6. Configure and deploy the AI agent 14

Step 7. Configure and publish the Call A2E Agent process 15

Preface

Use *Slack Message Handler* to learn how to securely receive messages from Slack and trigger an agent flow in AI Agent Engineering with the channel and message details. This guide assumes that you have an understanding of the Slack Connector and AI Agent Engineering service concepts.

CHAPTER 1

Introduction to Slack Message Handler recipe

The Slack Message Handler recipe enables you to securely receive messages from Slack and trigger an agent flow within AI Agent Engineering. It processes user queries sent in Slack channels by extracting essential details, such as Channel ID, Team ID, and File ID (if a file is shared). The recipe intelligently skips messages sent by bots to avoid unnecessary processing.

Upon receiving a valid user input, it triggers the AI Agent service, passing along the relevant channel and message information. The AI Agent then processes the query and returns a conversation ID, facilitating seamless interaction and tracking within the Slack environment.

This recipe streamlines the integration between Slack and AI Agent Engineering, enabling efficient handling of user inputs and automated agent responses.

Prerequisite

Configure the Slack tool recipe before you start configuring the agent flow to receive the agent's response in the same Slack channel.


For detailed, step-by-step instructions, see the Slack Tool recipe guide in AI Agent Engineering.

CHAPTER 2

Slack Message Handler recipe contents

The Slack Message Handler recipe contains a service connector, an app connection, and processes.

The following image shows the assets that the Slack Message Handler recipe package contains:

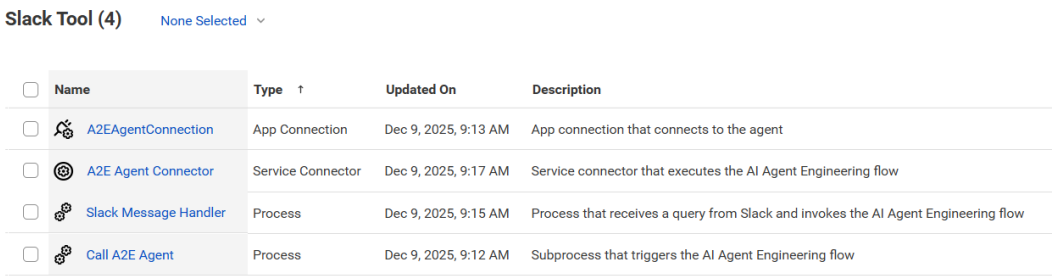

Slack Message Handler recipe assets

The following table lists the assets that the Slack Message Handler recipe package contains:

Asset Name	Asset Type	Description
A2E Agent Connector	Service connector	Service connector that executes the agent flow in AI Agent Engineering.
A2EAgentConnection	App connection	App connection that connects to the agent.
Call A2E Agent	Process	Subprocess that triggers the agent flow in AI Agent Engineering.
Slack Message Handler	Process	Process that receives a query from Slack and invokes the agent flow in AI Agent Engineering.

CHAPTER 3

Using the Slack Message Handler recipe

To use the Slack Message Handler recipe, perform the following steps:

1. Copy and access the recipe.
2. Configure and publish the A2E Agent Connector connector.
3. Configure and publish the A2EAgentConnection connection.
4. Configure and publish the Slack Message Handler process.
5. Create a webhook in Slack.
6. Configure and deploy the Slack agent.
7. Configure and publish the Call A2E Agent process.

Step 1. Copy and access the recipe

Copy the pre-configured assets in the recipe to a separate project or folder.


1. Open the **Slack Message Handler** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.

   Tip: Tip: Since the recipe contains multiple assets, copy the recipe into a dedicated folder to easily identify the assets and prevent overwriting any existing assets with the same names.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You'll receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

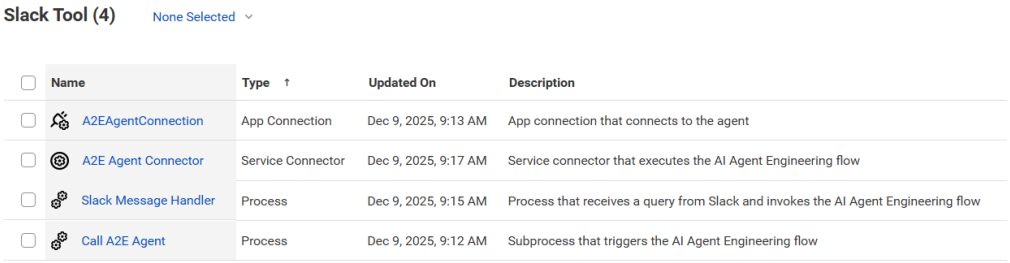

Step 2. Publish the A2E Agent Connector service connector

You can publish the **A2E Agent Connector** service connector from the assets page.

To publish the service connector, click **Actions** in the row that contains the service connector and select **Publish**.

Step 3. Configure and publish the A2EAgentConnection connection

Configure the user credentials and runtime environment in the **A2EAgentConnection** connection, and then publish the connection.

1. Open the **A2EAgentConnection** connection.
2. From the **Type** list, select **A2E Agent Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select the Secure Agent.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
User name	IDMC user name to authorize requests.
Password	IDMC password to authorize requests.

5. Save and publish the connection.

Step 4. Configure and publish the Slack Message Handler process

Configure the authorization access, and then publish the **Slack Message Handler** process.

1. Open the **Slack Message Handler** process.
2. On the **Start** tab of the **Start** step, select **Allow anonymous access**.
3. Save and publish the process.
4. On the **Actions** menu, click **Properties Detail** and copy the service URL.
   You'll need the process URL to set up the Slack webhook.

Step 5. Create a webhook in Slack


Configure a Slack app to call an API whenever a new message arrives.

To configure a Slack app, perform the following steps:

1. Create a Slack app.
2. Enable the events API.
3. Subscribe to the event.
4. Set the required OAuth scopes.
5. Enable token rotation.
6. Add the bot to a channel.

Step 1. Create a Slack app


1. Go to `https://api.slack.com/apps` and log in to your account.
2. Click **Create New App** > **From scratch**.
3. Enter the app name, select your workspace, and then click **Create App** as shown in the following image:

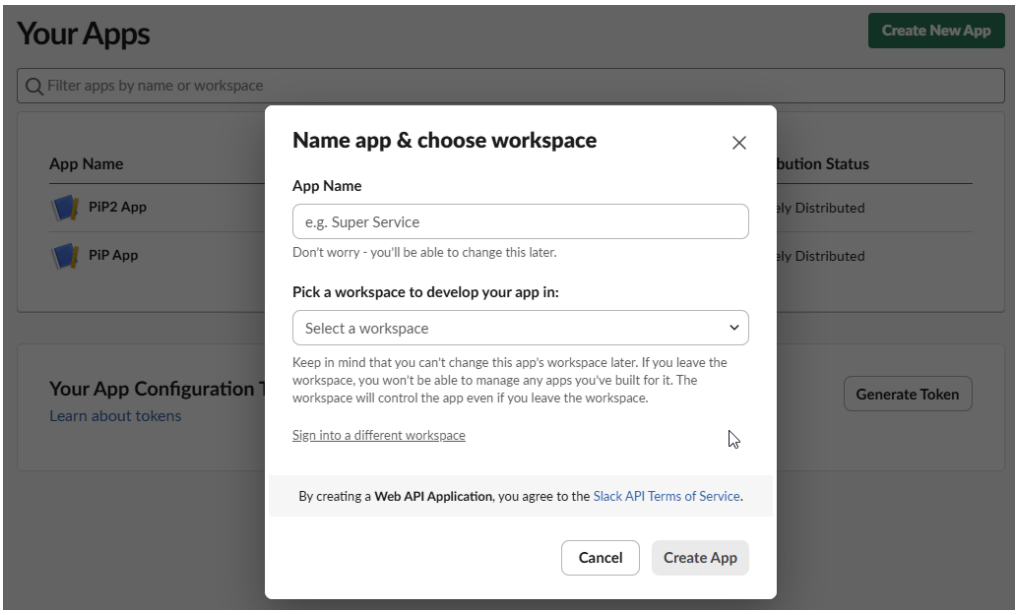

4. Select your app, go to **Basic Information** > **App Credentials**, and copy the client ID and client secret.

Step 2. Enable the events API


1. From the left navigation bar, go to **Event Subscriptions**.
2. Turn on the toggle switch to enable events.
3. In the **Request URL** field, enter the service URL that you get after publishing the process. Slack sends a `challenge` request to verify the URL as shown in the following image:

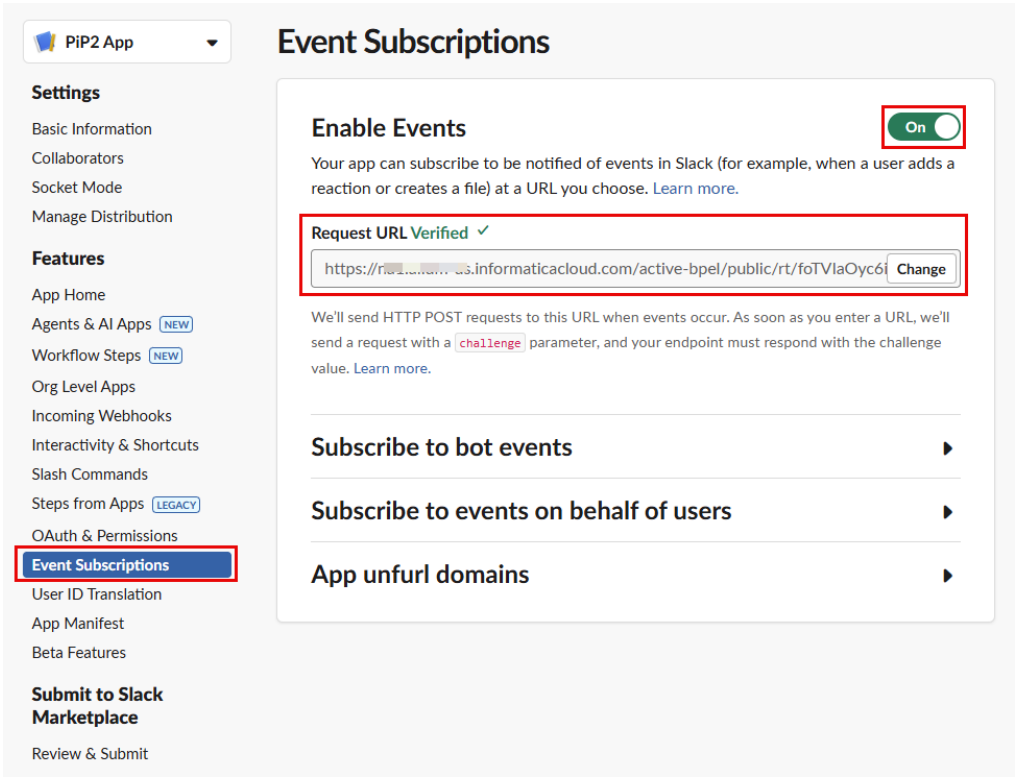

Step 3. Subscribe to the event


1. In the **Subscribe to bot events** section, click **Add Bot User Event** and add one of the following events:
   - `message.channels` — to receive messages from public channels.
   - `message.groups` — for private channels.

   The event allows your app to receive messages from channels it belongs to as shown in the following image:

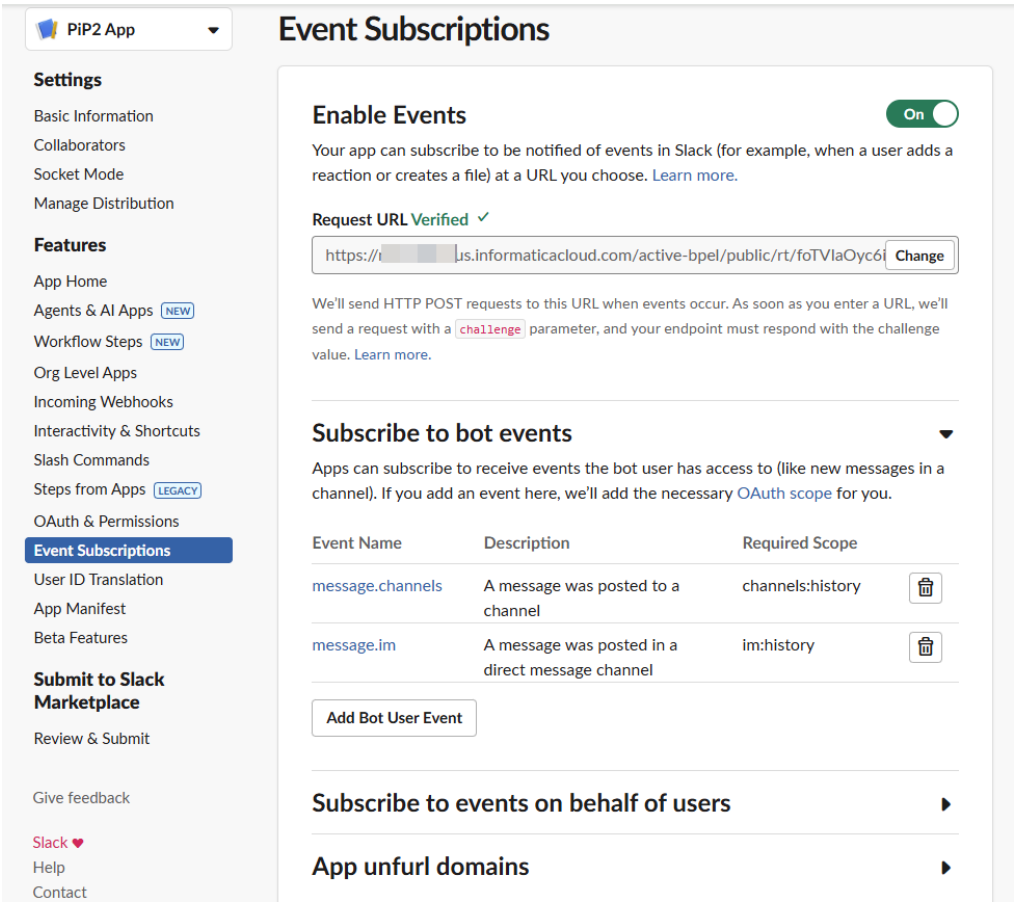

Step 4. Set the required OAuth scopes


1. Go to **OAuth & Permissions**.
2. In the **Bot Token Scopes** section, click **Add an OAuth Scope** and add one of the following OAuth scopes:
   - `channels:history` — to read public channel messages.
   - `groups:history` — to read messages from private channels, if needed.
   - `chat:write` — if your bot needs to send messages.
3. In the **Redirect URLs** section, click **Add New Redirect URL** and add the redirect URLs in `<POD URL>/oauthcallback` format and save the URLs.
   For example, `https://na1.dm-us.informaticacloud.com/oauthcallback`. The following image shows the redirect URLs:

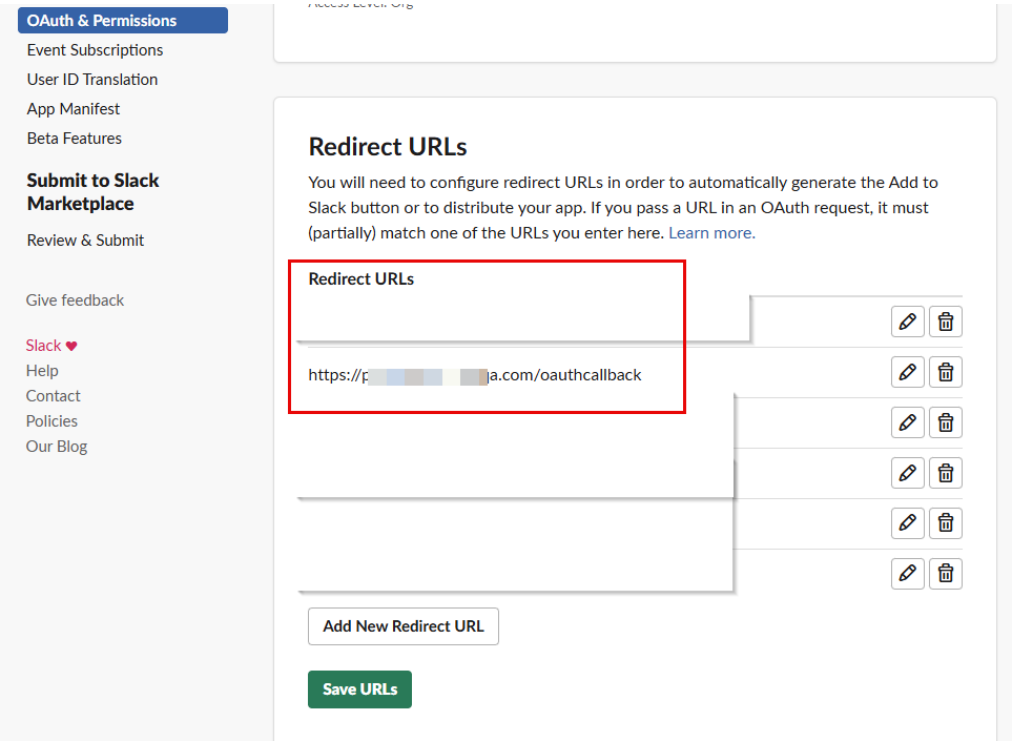

4. Install the app using the **Install App** section.

Step 5. Enable token rotation

1. Go to **OAuth & Permissions**.
2. In the **Advanced token security via token rotation** section, click **Opt In** as shown in the following image:

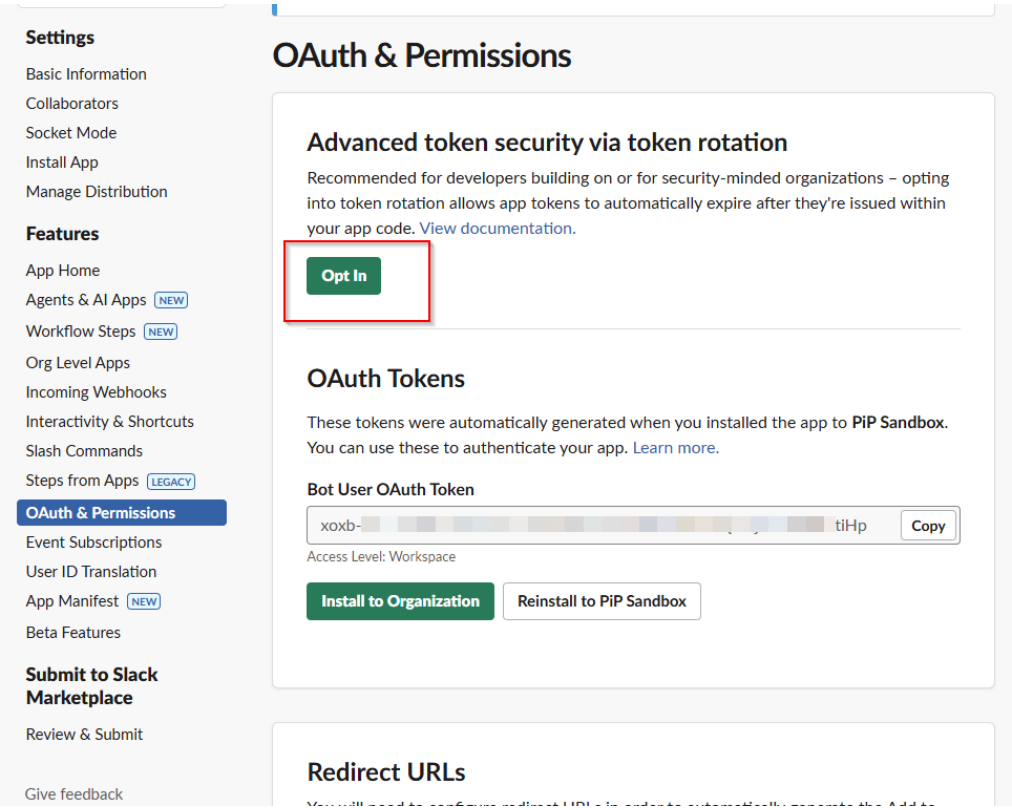

3. Save the bot OAuth token.

Step 6. Add the bot to a channel

1. In Slack, go to the required channel.
2. Invite the bot using `/invite @<your-bot-name>`.

Step 6. Configure and deploy the AI agent

To configure the AI agent, perform the following steps in AI Agent Engineering:

1. From the navigation menu, select **New**.
2. In the **New Asset** dialog box, select **Flow** > **Agent Flow**, and then click **Create**.
3. Enter a name and click **Create**.
4. Add an agent block, select the appropriate LLM, and enter the planning prompt.
5. Optionally, to receive the agent's response in the same Slack channel, configure the Slack tool recipe and select it from the **Agents and Tools** list. For detailed, step-by-step instructions, see the Slack Tool recipe guide in AI Agent Engineering.
6. Save and deploy the agent flow.
   The **Deploy** dialog box is displayed.
7. From the **Runtime Environment** list, select the Secure Agent.
8. Enter the URL suffix.

9. Copy the REST endpoint URL from the **URL Preview** field.
   You'll need the endpoint URL to configure the **Call A2E Agent** process.
10. Select **Anonymous** as the authentication type.
11. Click **Deploy**.

Step 7. Configure and publish the Call A2E Agent process

Configure the Secure Agent and the AI agent parameters from the agent flow you created, and then publish the **Call A2E Agent** process.

1. In Application Integration, open the **Call A2E Agent** process.
2. On the **Start** tab of the **Start** step, select the Secure Agent from the **Run On** list. This should be the same Secure Agent you selected when you deployed the AI agent.
3. On the **Input Fields** tab of the **Call A2E Agent** step, enter the following values extracted from the URL you copied from the agent flow you created in AI Agent Engineering:
   - HostName_Port
   - FRS_ID
   - Flow_Name

   For example, in the following URL:

   ```
   https://localhost:19448/a2e/7BoWuUfqJsvdg6Fa7dtVi7/Slack
   ```

   The syntax is:

   ```
   https://<HostName_Port>/a2e/<FRS_ID>/<Flow_Name>
   ```
4. Save and publish the process.