Informatica

Informatica® Cloud Application Integration
January 2025

Synchronize ServiceNow Incidents with Jira Issues

Informatica Cloud Application Integration Synchronize ServiceNow Incidents with Jira Issues
January 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Synchronize ServiceNow Incidents with Jira Issues recipe 6

Prerequisites for creating a custom field in Jira. 7

Chapter 2: Synchronize ServiceNow Incidents with Jira Issues recipe contents 10

Synchronize ServiceNow Incidents with Jira Issues recipe assets. 10

Chapter 3: Using the Synchronize ServiceNow Incidents with Jira Issues recipe 12

Step 1. Copy and access the recipe. 12

Step 2. Configure and publish the ServiceNow connection 13

Step 3. Configure and publish the Jira connection 14

Step 4. Configure and publish the Email connection. 14

Step 5. Configure and publish the processes. 16

Step 6. Invoke the process. 16

ServiceNow Incidents and Jira Issues field mappings. 17

Preface

Use *Synchronize ServiceNow Incidents with Jira Issues* to learn how to synchronize incidents that were created or updated in ServiceNow with Jira issues. This guide assumes that you have an understanding of the Jira Connector, ServiceNow Connector, and Email Connector concepts.

CHAPTER 1

Introduction to Synchronize ServiceNow Incidents with Jira Issues recipe

The Synchronize ServiceNow Incidents with Jira Issues recipe is based on REST and SOAP APIs.

You can run the process to synchronize new or updated ServiceNow incidents with Jira issues. The process is called by an HTTP request with the following fields as incoming parameters:

- Date_For_Search
- Filter
- Email
- Jira_Issue_Type_ID
- Jira_Project_ID
- Sync_Assignee

The process searches for all the incidents created or updated on the specified search date in ServiceNow. If the Date_For_Search field value is not specified, the process returns the results from the previous day in ServiceNow. The search is also filtered by category. The Filter field contains the default value as **Software**. You can change the default values in the process input fields or set them as input parameters while invoking the process.

The process contains pagination of search results for incidents, with a limit of 100 results per page. During validation, the process skips the incidents if the short description is not specified.

After receiving the results page, the process starts searching for the user based on the email field. If the user exists in the Jira database, the process sets the user in the Assignee field. If the Sync_Assignee input field is set to false, the process skips this step.

The process then searches for an issue based on the External ID or ServiceNow ID custom field. The value is taken from the incident number. If the incident exists in ServiceNow, the summary and description is updated in the Jira issue. Otherwise, a new Jira issue is created.

After the process is initiated, the user receives a notification indicating that the process is running in the background and the number of incidents sent for synchronization. After the process runs, the user receives an email notification with the number of successful synchronizations and a list of incident numbers that failed to synchronize. To achieve this, you must configure an email connection and pass the input parameter with the email address where the result must be sent.


Prerequisites for creating a custom field in Jira

Create a custom field ID in Jira for process configuration.


1. Log in to the Jira organization.
2. Access the following URL and create a custom field:

   ```
   https://{organization}.atlassian.net/secure/admin/ViewCustomFields.jspa
   ```

   The following image shows the **Custom fields** page:

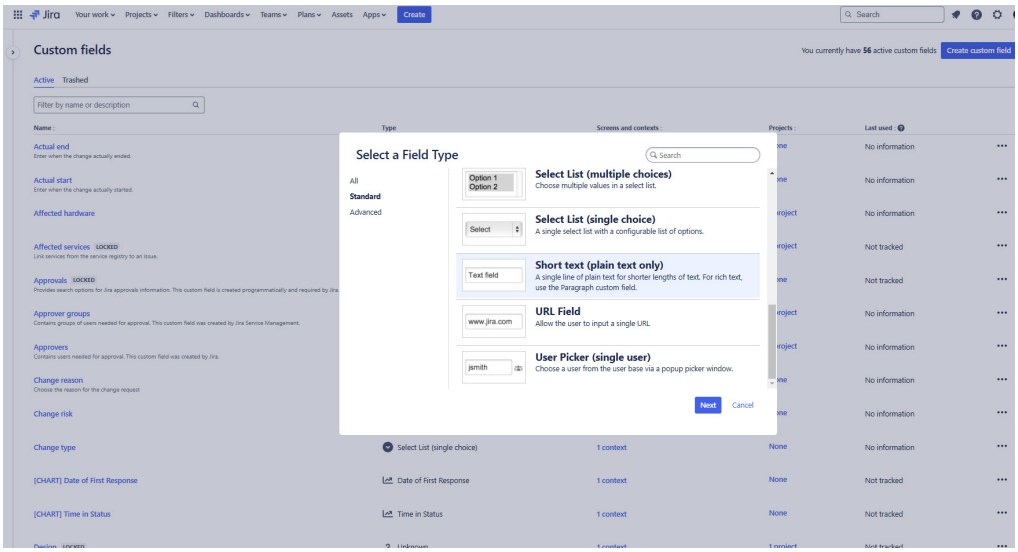


3. Select the field type, enter the name and description, and then click **Create**.
   The following image shows the **Configure 'Short text (plain text only)' Field** dialog box:

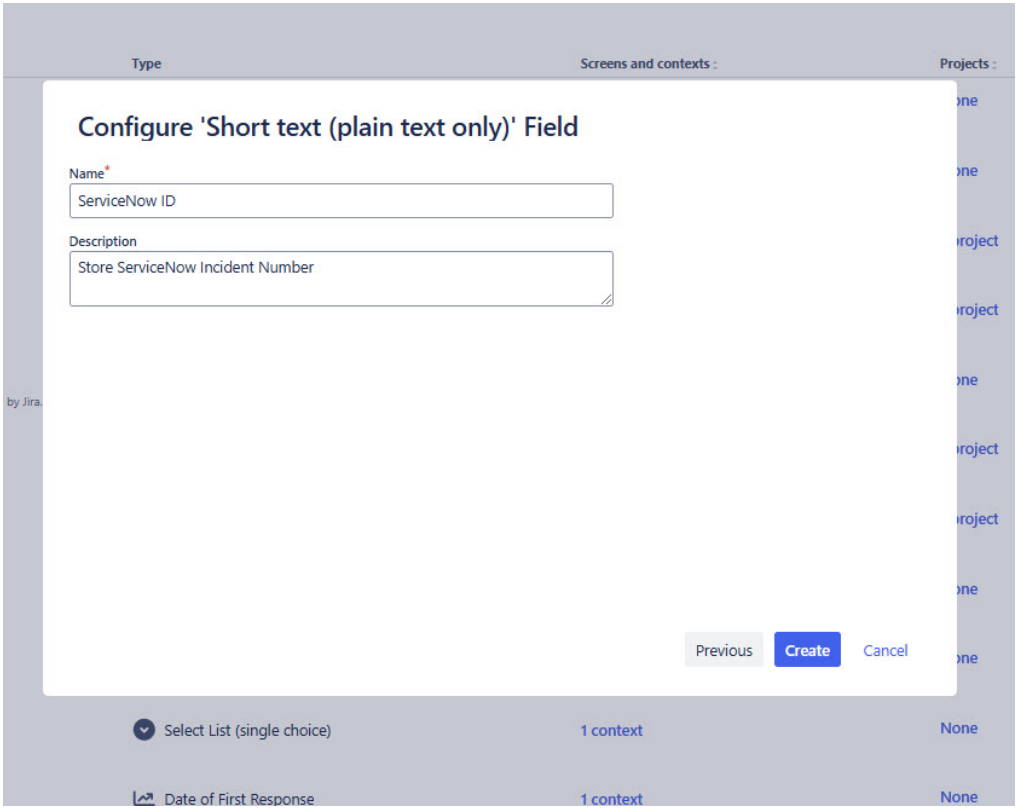

4. Select Associate field ServiceNow ID to screens and click **Create**.

5. Find the custom field that you want to edit, click **Edit details** and save the custom field ID for future use. The image shows the custom field ID on the **Edit Custom Field Details** page.

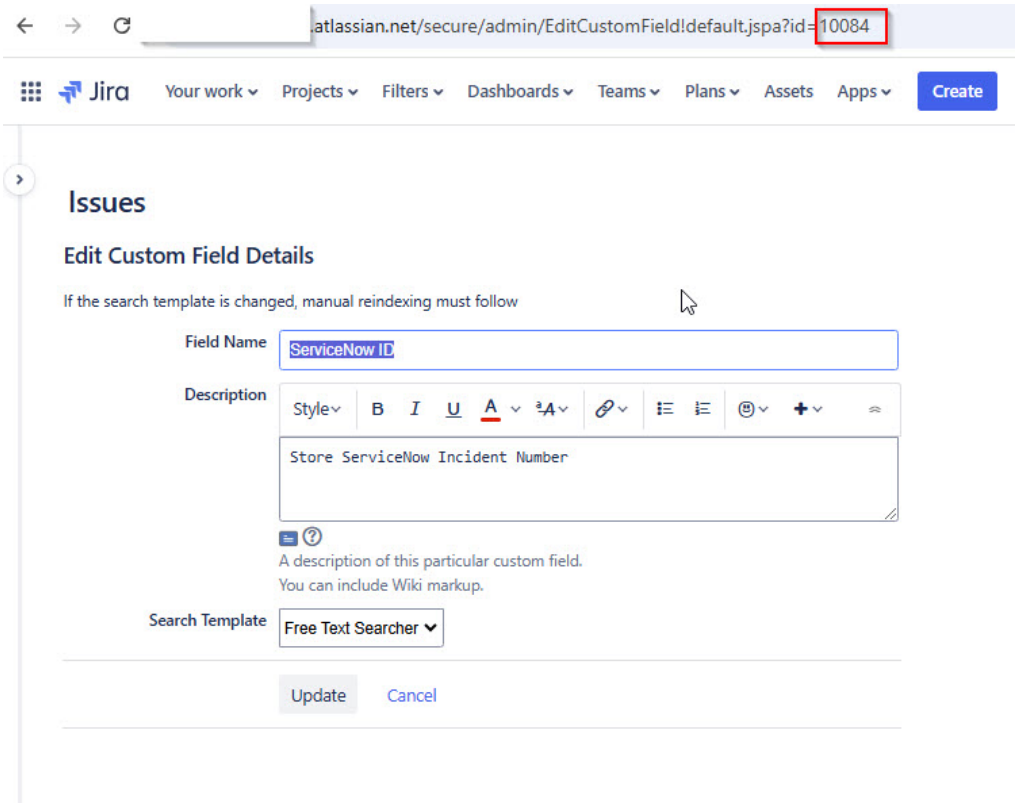


Note: You must set this custom field ID in the **Custom_Field_ID** field while configuring the process.

CHAPTER 2

Synchronize ServiceNow Incidents with Jira Issues recipe contents

The Synchronize ServiceNow Incidents with Jira Issues recipe contains process objects, app connections, and processes.

The following image shows the assets that the Synchronize ServiceNow Incidents with Jira Issues recipe package contains:

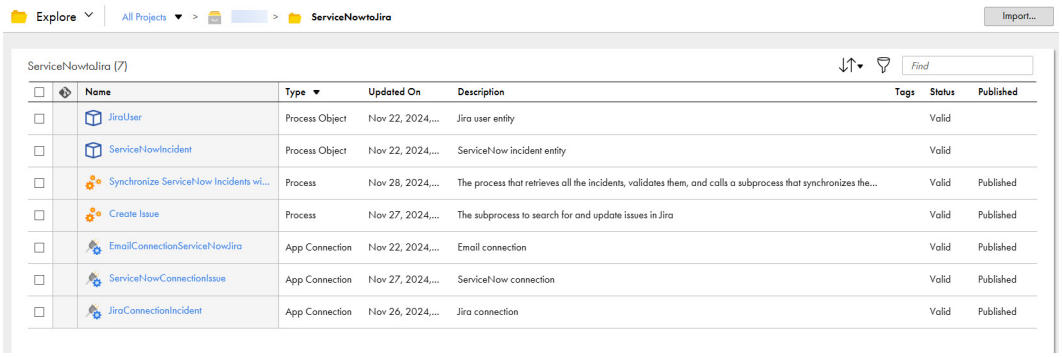

Synchronize ServiceNow Incidents with Jira Issues recipe assets

The following table lists the assets that the Synchronize ServiceNow Incidents with Jira Issues recipe package contains:

Asset Name	Asset Type	Description
JiraUser	Process object	Jira user entity.
ServiceNowIncident	Process object	ServiceNow incident entity.
EmailConnectionServiceNowJira	App connection	Email connection.

Asset Name	Asset Type	Description
ServiceNowConnectionIssue	App connection	ServiceNow connection.
JiraConnectionIncident	App connection	Jira connection.
Create Issue	Process	Subprocess to search for and update issues in Jira.
Synchronize ServiceNow Incidents with Jira Issues	Process	Process that retrieves all the incidents, validates them, and calls a subprocess that synchronizes the data.

CHAPTER 3

Using the Synchronize ServiceNow Incidents with Jira Issues recipe

To use the Synchronize ServiceNow Incidents with Jira Issues recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the ServiceNow connection.
3. Configure and publish the Jira connection.
4. Configure and publish the Email connection.
5. Configure and publish the processes.
6. Invoke the process.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Synchronize ServiceNow Incidents with Jira Issues** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

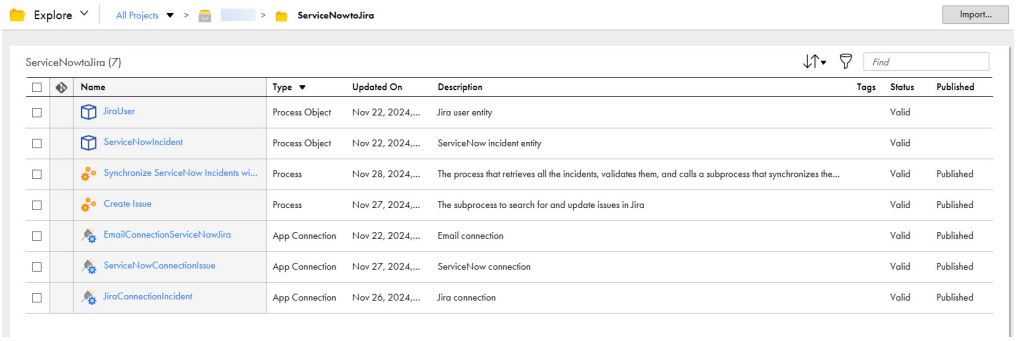

Step 2. Configure and publish the ServiceNow connection

Configure the client details, service URL, and grant type to connect to the ServiceNow instance, and then publish the ServiceNowConnectionIssue connection.

1. Open the **ServiceNowConnectionIssue** connection.
2. From the **Type** list, select **ServiceNow**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client ID	The ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client Secret	The ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User Name	The ServiceNow user name that can generate client credentials in the ServiceNow instance.
Password	The password associated with the ServiceNow user account.
Service URL	The URL to access the ServiceNow instance.
Grant type	The grant type that the ServiceNow instance uses to get an access token for third-party clients authorization. Enter the value as **password**.

5. Save and publish the connection.

Step 3. Configure and publish the Jira connection

Configure the instance domain, user name, and authentication token to connect to the Jira instance, and then publish the JiraConnectionIncident connection.

1. Open the **JiraConnectionIncident** connection.
2. From the **Type** list, select **Jira**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
InstanceDomain	The URL to access the Jira instance. For example, `https://<<name>>.atlassian.net`
UserName	The user name of the Jira account.
AuthToken	The Jira API token that you generated from **Manage Account** > **Security** > **Create and manage API tokens**.

5. Save and publish the connection.

Step 4. Configure and publish the Email connection

Configure the authentication details in the EmailConnectionServiceNowJira connection, and then publish the connection.

1. Open the **EmailConnectionServiceNowJira** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`

Property	Description
Password	Password for the email address. Set an API key for your email account. For information about creating an API key, see Create API credentials.
Security	Select **SSL** for the Email connection to use the SSL protocol.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

- For **OAuth** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authorization URL	Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Specify the identifier value from the OAuth provider.
Client Secret	Enter the client secret to connect to the email application.
Scope	Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

5. Save and publish the connection.

Step 5. Configure and publish the processes

Configure the custom field ID and publish the process.

1. To publish the **Create Issue** process, click **Actions** in the row that contains the process and select publish.
2. Open the **Synchronize ServiceNow Incidents with Jira Issues** process.
3. On the **Start** tab of the Start step, in the **Allowed Users** or **Allowed Groups** field, enter the user or group that must have access to the process service URL at run time. By default, **Allow anonymous access** is selected.
4. On the **Assignments** tab of the Set Filters step, enter the custom field ID in the **Custom_Field_ID** field. Optionally, in the **Query** field, you can change the default values for filter incidents and search criteria.
5. Save and publish the process.

Step 6. Invoke the process

The Synchronize ServiceNow Incidents with Jira Issues process is called by an HTTP request. When you invoke the process, it synchronizes new or updated ServiceNow incidents with Jira issues.

1. Open the **Synchronize ServiceNow Incidents with Jira Issues** process and click **Actions** > **Properties Detail** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL as shown in the following format:
   ```
   <Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?Email=<Email for notification>&Jira_Issue_Type_ID=<Jira_Issue_Type_ID>&Jira_Project_ID=<Jira_Project_ID>
   ```
   The Jira_Issue_Type_ID and the Jira_Project_ID field values correspond to the project and issue type in Jira that the ServiceNow incidents will be converted to in Jira. You must define the IDs of the targeted issue type and project.

   Optionally, you can add the following input parameters to override the default values:

   - Date_For_Search - Search date in the YYYY-MM-DD format. Sets the previous day's date, by default.
   - Filter - Category value to filter the incidents. Default is Software.
   - Sync_Assignee - Synchronizes the assignee. Default is True.
3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in any API client, such as cURL, Postman, SOAP UI, or through any programming language.

ServiceNow Incidents and Jira Issues field mappings

The ServiceNow Incidents and Jira Issues fields are mapped based on the fields given in the following table:

ServiceNow Incident	Jira Issue
Short description	Summary
Description	Description
Assigned to	Assignee
Number	ServiceNow ID (custom field)
Additional comments	Comment
-	Reporter. Reporter is automatically set as a user with the email configured in the Jira connection properties.
-	Issue type. The issue type ID is an incoming parameter. Some issue types don't support custom fields if they are created from the template. For example, Idea.

All the above fields are synchronized with Jira issues when ServiceNow incidents are created. Updating ServiceNow Incidents and Jira Issues refer only to the Summary and Description fields.