Informatica® Cloud Application Integration
July 2024

Synchronize ServiceNow Incidents with Dynamics 365 Cases

Informatica Cloud Application Integration Synchronize ServiceNow Incidents with Dynamics 365 Cases
July 2024

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe 6

Chapter 2: Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe contents 7

Recipe assets 7

ServiceNow to Dynamics 365 (Incident to Case) process 8

Create Case process 9

Pagination process 10

Chapter 3: Using the Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe 12

Copying and accessing the recipe 12

Configuring and publishing the Dynamics 365 connection 13

Configuring and publishing the ServiceNow connection 14

Configuring and publishing the Email connection 14

Configuring and publishing the processes 15

Invoking the process 16

Test data synchronization from ServiceNow incidents to Dynamics 365 cases 17

Rules and guidelines for using the Synchronize ServiceNow Incidents to Dynamics 365 Cases recipe 18

Preface

Use *Synchronize ServiceNow Incidents with Dynamics 365 Cases* to learn how to synchronize ServiceNow incidents with Dynamics 365 cases. The recipe is based on REST and SOAP APIs and you use an HTTP request to call the process. This guide assumes that you have an understanding of the ServiceNow connector and Dynamics 365 connector concepts.

CHAPTER 1

Introduction to Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe

The Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe is based on REST and SOAP APIs.

You can run the process to synchronize ServiceNow incidents with Dynamics 365 cases. The process is called by an HTTP request with email as the incoming parameter and searches for all the incidents created or updated during the previous day in ServiceNow. The process searches for a matching case in Dynamics 365 based on the short description and case title. If the case does not exist, the process searches for the incident contact by email in ServiceNow with the email in Dynamics 365 and creates the case based on the contact details from ServiceNow without manual intervention.

After the process is initiated, the user receives a notification that the process is running in the background. After the process runs, the user receives an email notification with the number of successful synchronizations and a list of case numbers that failed to synchronize.

Example

Consider that the sales team in your organization uses ServiceNow to create or update incidents for new customer accounts. The support team uses Microsoft Dynamics 365 to manage and maintain cases reported by customers, partners, and employees. Every time the sales team creates or updates a customer incident and the customer account is eligible for support, they communicate the relevant incident details manually to the customer support team. The support team then verifies whether the incident exists as a case in their database. If the case does not exist, the team creates a case manually.

To improve the incident and case management and team collaboration, both teams need access to critical customer data about product issues and priorities.


With this recipe, when the support team invokes the process, all the incidents that were created or updated during the previous day in ServiceNow get synchronized with Dynamics 365 cases.

CHAPTER 2

Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe contents

The recipe contains multiple assets such as process objects, app connections, and processes.

The following image shows the assets that the Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe package contains:

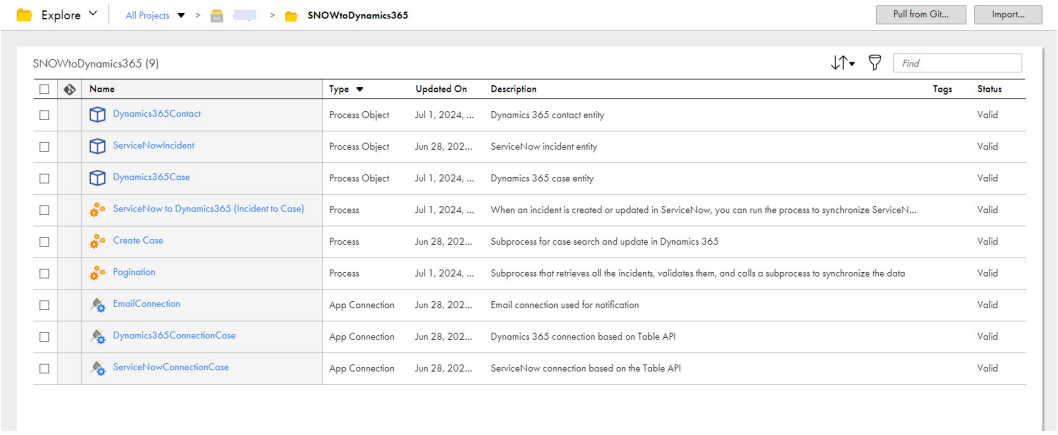

Recipe assets

The following table lists the assets that the Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe package contains:

Asset Name	Asset Type	Description
Dynamics365Contact	Process object	Dynamics 365 contact entity.
ServiceNowIncident	Process object	ServiceNow incident entity.
Dynamics365Case	Process object	Dynamics 365 case entity.


Asset Name	Asset Type	Description
EmailConnection	App connection	Email connection that is used to send email notifications.
Dynamics365ConnectionCase	App connection	Connects to Dynamics 365 based on the Table API. The Dynamics 365 connector works only with the Dynamics 365 API 9.2 version.
ServiceNowConnectionCase	App connection	Connects to ServiceNow based on the Table API.
Create Case	Process	Subprocess to search for cases and update them in Dynamics 365.
Pagination	Process	Subprocess to retrieve all the incidents, validate them, and call a subprocess to synchronize the data.
ServiceNow to Dynamics365 (Incident to Case)	Process	The REST and SOAP based API process that synchronizes data from the incidents that were created or updated during the previous day in ServiceNow with the Dynamics 365 cases.

ServiceNow to Dynamics 365 (Incident to Case) process

When an incident is created or updated in ServiceNow, you can run the process to synchronize ServiceNow incidents with Dynamics 365 cases.

The process is called by an HTTP request and searches for all the incidents created or updated during the previous day in ServiceNow. The process searches for a matching case in Dynamics 365 based on the short description and case title. If the case does not exist, the process searches for the incident contact by email in ServiceNow with the email in Dynamics 365 and creates a case based on the caller details from ServiceNow without manual intervention.

The following image shows the steps that the ServiceNow to Dynamics365 (Incident to Case) process contains:

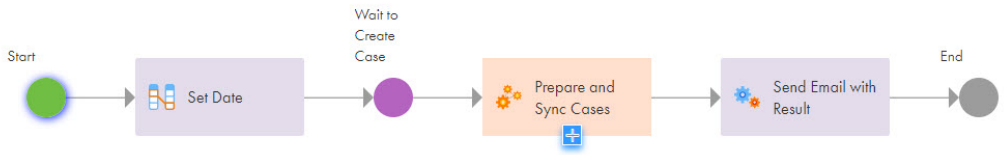

The following table lists the steps that the ServiceNow to Dynamics365 (Incident to Case) process contains:


Step Name	Description
Start	The process searches for the case object in Dynamics 365.
Set Date	Gets all the incidents that were created or updated from the previous day. You can also modify the day from when you want to synchronize the data. For example, if you want to synchronize the incidents created or updated before 2 days in ServiceNow, you can update the **Before_Day** field value from `-1` to `-2` on the **Input Fields** tab.
Wait to Create Case	When you invoke the process, a message appears to notify the user that the background job has started.
Prepare and Sync Cases	The process performs the steps configured in the Pagination process and synchronizes the matching ServiceNow incidents with Dynamics cases.
Send Email with Result	Sends an email with the results.
End	Ends the process.

Create Case process

The Create Case process searches for the cases in Dynamics 365 and creates or updates the cases based on the search result in Dynamics 365.

The Create Case process is used as a subprocess in the Pagination process.

The following image shows the steps that the Create Case process contains:

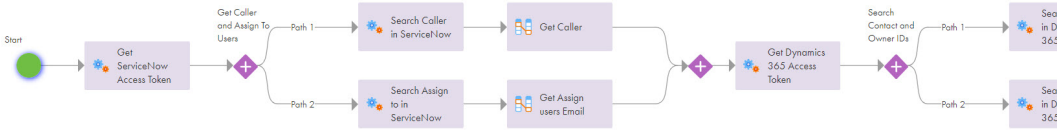

The following table lists the steps that the Create Case process contains:

Step Name	Description
Start	The process searches for the incident object in ServiceNow.
Get ServiceNow Access Token	Gets an access token to authorize all the connection requests in ServiceNow.
Get Caller and Assign To Users	Searches users by the Caller and Assign To user fields simultaneously in ServiceNow. The process searches and gets the caller in ServiceNow and continues to the next step. The process simultaneously searches and gets the assigned user email ID in ServiceNow and continues to the next step.


Step Name	Description
Get Dynamics 365 Access Token	Gets an access token to authorize all the connection requests in Dynamics 365.
Search Contact and Owner IDs	Searches users by the Contact and Owner IDs fields simultaneously in Dynamics 365. The process searches for the contact by email in Dynamics 365 and gets the contact ID. The process simultaneously searches for the owner in Dynamics 365 and gets the Owner ID, and continues to the next step.
Is User missing in Dynamics 365	Verifies whether the user is missing in Dynamics 365. If the incident ID exists, the process continues to the next step. Otherwise, the process creates a new contact and gets a contact ID. If the contact is successfully created, the process continues to the next step. Otherwise, an error occurs.
Search Case by Title	Searches for the case by title in Dynamics 365.
Get Case ID	Gets the case ID.
Is Case missing in Dynamics 365	Verifies whether the case ID is missing in Dynamics 365. If the case ID exists, updates the case. Otherwise, creates a new case.
End	Ends the process.

Pagination process

The Pagination process retrieves the incidents in ServiceNow, validates them, and calls a subprocess to synchronize the data in Dynamics 365.

The Pagination process is used as a subprocess in the ServiceNow to Dynamics365 (Incident to Case) process.

The following image shows the steps that the Pagination process contains:

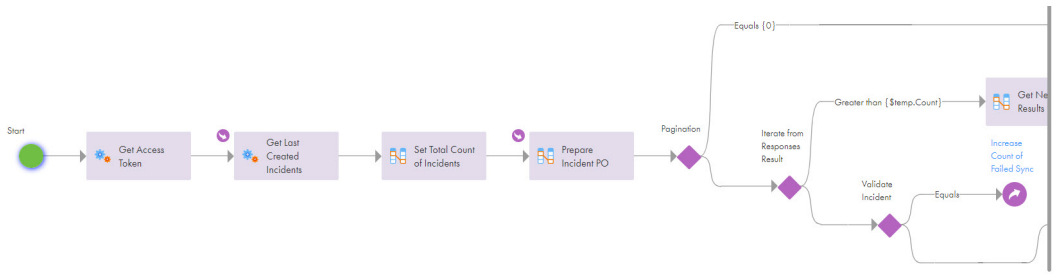

The following table lists the steps that the Pagination process contains:

Step Name	Description
Start	The process searches for the date you want to retrieve the data and the email address to which the process execution result needs to be sent.
Get Access Token	Get an access token to authorize all the connection requests. After you generate the access token the first time, you can use it for multiple requests for the duration specified in the client credentials.
Get Last Created Incidents	Gets all the incidents that were created or updated from the previous day. You can also modify the date from when you want to synchronize the data.
Set Total Count of Incidents	Gets the total count of the incidents.
Prepare Incident PO	Parses the incidents and assigns values.
Pagination	The process iterates the response results for all incidents. The process contains a pagination of search results for incidents with a limit of 100 results per page. If the number of records is greater than the temporary count value, that is, 100 records per page, the process links the results to the next page. If the number of records does not cross the temporary count value, the process starts validating the incidents. The process performs the steps configured in the Create Case process and increases the count of successful and failed synchronizations based on the synchronization results. Otherwise, the process increases the count of failed synchronizations. If the case doesn't have a caller, the number of failed records increases.
Prepare Email with Result	Collects the result that contains the number of successful and failed synchronization incidents in the email.
End	Ends the process.

CHAPTER 3

Using the Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe

To use the Synchronize ServiceNow incidents with Dynamics 365 cases recipe, you must perform the following steps manually:

Step 1: Copy and access the recipe

Step 2: Configure and publish the Dynamic365ConnectionCase connection

Step 3: Configure and publish the EmailConnection connection

Step 4: Configure and publish the ServiceNowConnectionCase connection

Step 5: Configure and publish the processes

Step 6: Invoke the process


Step 7: Test data synchronization from ServiceNow incidents to Dynamics 365 cases

Copying and accessing the recipe

To copy and access the recipe content, perform the following steps:

1. Open the **Synchronize ServiceNow Incidents with Dynamics 365 Cases** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.
   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box. All the assets in the recipe are displayed as shown in the following image:

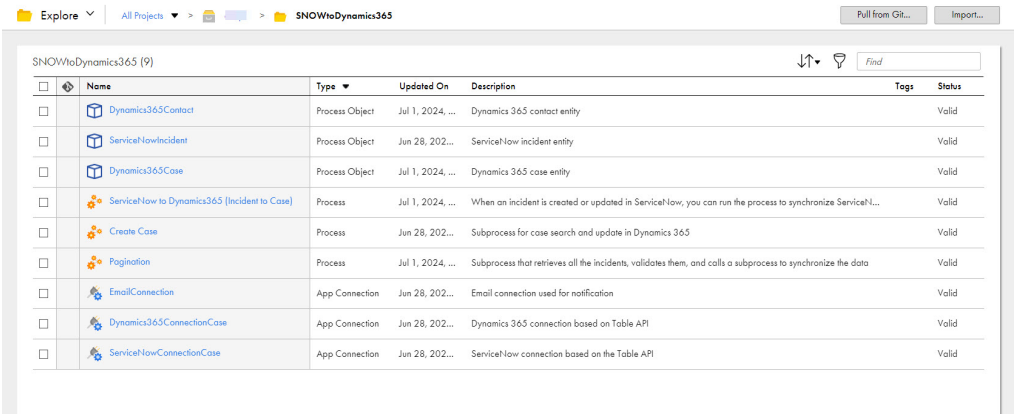

Configuring and publishing the Dynamics 365 connection

To configure and publish the Dynamics 365 connection case, perform the following steps:

1. Open the **Dynamic365ConnectionCase** connection.
2. In the **Type** field, select **Dynamics365**.
3. In the **Runtime Environment** field, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Tenant_ID	Dynamics 365 tenant ID to get the access token. Enter the tenant ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365 after creating the client credentials.
Client_ID	Dynamics 365 client ID to generate a valid access token. Enter the client ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Client_Secret	Dynamics 365 client secret that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Grant_type	Grant type that the Dynamics 365 case uses to get an access token for third-party client authorization. Enter the value as **client_credentials**.
Resource_URL	URL to access the Dynamics 365 case.

5. Save and publish the connection.

Configuring and publishing the ServiceNow connection

To configure and publish the ServiceNow connection case, perform the following steps:

1. Open the **ServiceNowConnectionCase** connection.
2. In the **Type** field, select **ServiceNow**.
3. In the **Runtime Environment** field, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client ID	ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client Secret	ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User Name	ServiceNow user name with the security_admin role to generate client credentials in the ServiceNow case.
Password	Password associated with the ServiceNow user account.
Service URL	URL to access the ServiceNow case.
Grant type	Grant type that the ServiceNow case uses to get an access token for third-party clients authorization. Enter the value as **password**.

5. Save and publish the connection.

Configuring and publishing the Email connection

To configure and publish the Email connection, perform the following steps:

1. Open the **EmailConnection** connection.
2. In the **Type** field, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. In the **Runtime Environment** field, select **Cloud Server or any Secure Agent**.

4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`
Password	Password for the email address. Set an API key for your email account. For information about creating an API key, see Create API credentials.
Security	Select **SSL** for the Email connection to use the SSL protocol.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

5. Save and publish the connection.

Configuring and publishing the processes

To configure and publish the processes, perform the following steps:


1. Open the **Create Case** process.
2. On the **Start** tab of the Start step, select **Cloud Server** in the **Run On** field.
3. Optionally, you can change the tracing level from **Verbose** to **None** on the **Advanced** tab.
4. Save and publish the process.
5. Open the **Pagination** process.
6. On the **Start** tab of the Start step, select **Cloud Server** in the **Run On** field.
7. Optionally, you can change the tracing level from **Verbose** to **None** on the **Advanced** tab.
8. Save and publish the process.
9. Open the **ServiceNow to Dynamics365 (Incident to Case)** process.
10. On the **Start** tab of the Start step, select **Cloud Server** in the **Run On** field.
11. Optionally, you can change the tracing level from **Verbose** to **None** on the **Advanced** tab.
12. Save and publish the process.

Invoking the process


When you invoke the ServiceNow to Dynamics365 (Incident to Case) process, the user receives a notification stating that the process is running in the background. After the process runs, the user receives an email with the number of successful synchronizations and a list of case numbers that failed to synchronize.

To invoke a process, you can use one of the following options:

- Passing input through a browser
  1. Open the ServiceNow to Dynamics365 (Incident to Case) process and click **Actions** > **Properties Detail** > **Copy Service URL**.
  2. Open a text editor and add the input field and value to the service URL as shown in the following format:
     `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?email=<Email_ID>`
  3. Open a browser and paste the service URL as shown in the following sample image:


     A message appears stating that the background job has started.
- Passing input through a REST client
  You can use a REST client such as Postman.
  1. Open Postman.
  2. Select the HTTP verb as GET and specify the generated REST service URL followed by the input field and value `?email=<Email_ID>` as shown in the following sample image:

  3. Enter the user account details on the **Authorization** tab.
  4. Click **Send**.

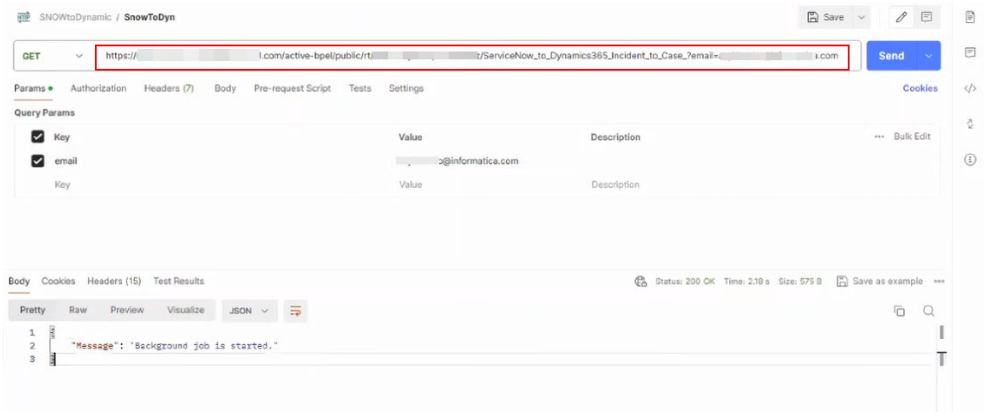In Application Integration Console, you can verify whether the process execution was successful or faulted.

The following image shows a successful process execution:

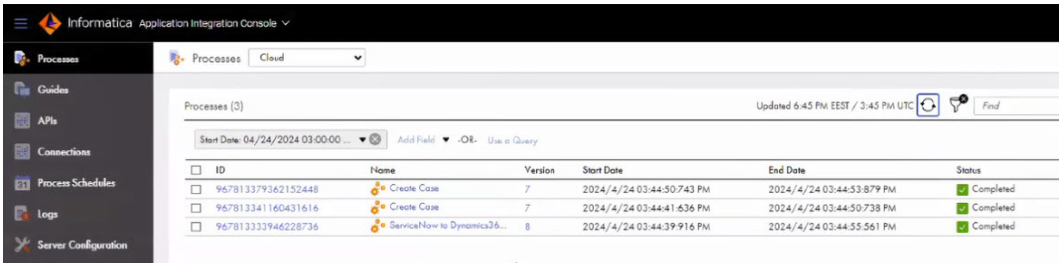

Test data synchronization from ServiceNow incidents to Dynamics 365 cases

When you invoke the process, the HTTP request searches for all the incidents that were created or updated during the previous day in ServiceNow, and the details are synchronized with the Dynamics 365 cases without manual intervention.

The following table shows the fields that are synchronized between the ServiceNow incident and the Dynamics 365 case:

ServiceNow - Incident	**Dynamics 365 - Case**
Caller	Customer
Assign to	Owner
Short Description	Case Title
Description	Description
Channel	Origin - Chat, Self-Service, Virtual Agent, and Walk-in - Web - Email - Email - Phone - Phone
State	Status - New - In progress - In progress - In progress - On hold - On hold
Urgency	Priority
Create Date/Last Modify Date	Last Modify Date

Rules and guidelines for using the Synchronize ServiceNow Incidents to Dynamics 365 Cases recipe

Consider the following rules and guidelines when working with the Synchronize ServiceNow Incidents with Dynamics 365 Cases recipe:

- You must first configure the connections in the recipe and publish them before opening or updating the process. Otherwise, the process will contain empty fields from the connections and will become invalid.
- Informatica recommends that you use the same names configured for the assets in the recipe. If you use the same asset names, you can publish all the assets and synchronize the data from ServiceNow incidents with Dynamics 365 cases without any issue. However, if you change the names, you must ensure that you update the names in the related fields in other assets.
- If the tenant already contains connections with the same name as the connections added from the package, the process in the recipe becomes invalid. This is because the newly added connection name contains the suffix `-2`. For example, `<connection_name>-2`.
  In this case, you must manually reselect the connections with the new name and the event values in the next steps of the process wherever applicable.
- The caller from ServiceNow searches for contacts in Dynamics 365. If the contact is not found, a contact is created even though an account with the same name exists.
- The owner is searched by email ID. If the email ID is not found, the process assigns the default API owner. For example, `MSDynamicsAPI`.
- The owner in Dynamics 365 can only be a system user. Otherwise, the process assigns the default owner.
- To handle Integer and Double data types correctly and ensure proper behavior in the Dynamics 365 connection, you must specify annotation attributes or additional parameters in the request as shown in the following sample:

```
<account xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<name>test name</name>
<telephone>000-111-22-33</telephone>
<emailaddress>account@test.com</emailaddress>
<fax>123-456</fax>
<revenue m:type="xs:double">1000.50
</revenue>
</account>

<account xmlns:m="urn:informatica:ae:xquery:json2xml:meta-data">
<name>test name</name>
<telephone1>000-257-35-89</telephone1>
<fax>547-890</fax>
<versionnumber m:type="xs:int">1</versionnumber>
</account>
```