Informatica® Cloud Application Integration
March 2025

Synchronize Zendesk Tickets with Salesforce Cases

Informatica Cloud Application Integration Synchronize Zendesk Tickets with Salesforce Cases
March 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Synchronize Zendesk Tickets with Salesforce Cases recipe 6

Prerequisites for creating a custom field in Salesforce 6

Chapter 2: Synchronize Zendesk Tickets with Salesforce Cases recipe contents 8

Synchronize Zendesk Tickets with Salesforce Cases recipe assets 8

Chapter 3: Using the Synchronize Zendesk Tickets with Salesforce Cases recipe 10

Step 1. Copy and access the recipe 10

Step 2. Configure and publish the Salesforce connection 11

Step 3. Configure and publish the Zendesk connection 12

Step 4. Configure and publish the processes 12

Step 5. Create webhooks in Zendesk 13

Invoke the process 16

Data synchronization from Zendesk tickets to Salesforce cases 17

Preface

Use *Synchronize Zendesk Tickets with Salesforce Cases* to learn how to synchronize Zendesk tickets with Salesforce cases based on a webhook request from Zendesk. This guide assumes that you have an understanding of the Salesforce Connector and Zendesk Connector concepts.

CHAPTER 1

Introduction to Synchronize Zendesk Tickets with Salesforce Cases recipe

The Synchronize Zendesk Tickets with Salesforce Cases recipe is based on REST and SOAP APIs. Use the recipe to synchronize a Zendesk ticket with a Salesforce case based on a webhook request from Zendesk without manual intervention.

When a ticket is created or updated in Zendesk, Zendesk sends a webhook and triggers the process. The process uses the ticket ID from the request and calls Zendesk to retrieve data from the Ticket entity. The process uses the Zendesk ID and Organization ID to search for an account in Salesforce. If the account exists, the process updates the data for the Salesforce account. Otherwise, the process creates a new account in Salesforce. The process skips the step if the organization is not specified in the ticket.


The process for contact entities uses the same steps as the account entities. The process uses the Zendesk ID and ticket ID to search for a case in Salesforce. If the case exists, the process updates the data for the Salesforce case. Otherwise, the process creates a new case in Salesforce.

The process requires webhook configuration in Zendesk.

Prerequisites for creating a custom field in Salesforce


Create a Zendesk ID custom field in the Salesforce account, contact, and case entities.

1. Log in to the Salesforce organization.
2. Go to **Setup** > **Build** > **Customize** > **Accounts** > **Fields**, and then click **New**.
   The following image shows the **New** button on the **Accounts Fields** page:

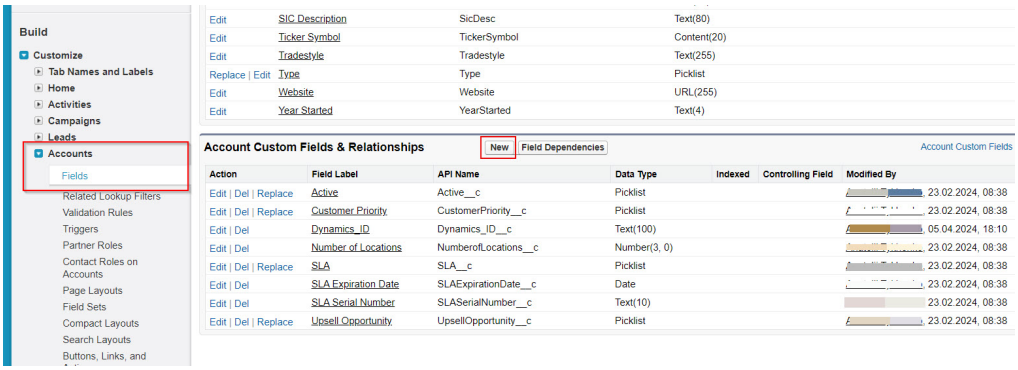

3. In the **Field Label** field, enter **Zendesk ID**, enter the **Field Name** field value as **Zendesk_ID**, and then save the custom field.
   You must create a custom field with the **Text** data type.

   The following image shows the **New Custom Field** page:

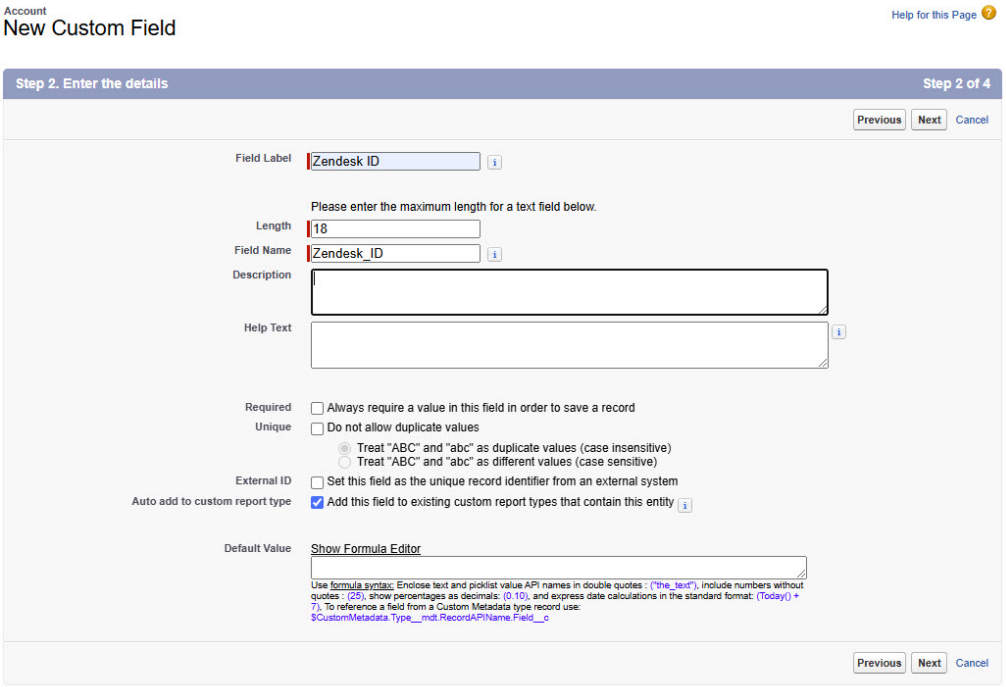


4. Save the custom field.
5. Follow the same steps for the **Contact** and **Case** entities.

CHAPTER 2

Synchronize Zendesk Tickets with Salesforce Cases recipe contents

The recipe contains multiple assets, such as a process object, app connections, and processes.

The following image shows the assets that the Synchronize Zendesk Tickets with Salesforce Cases recipe package contains:

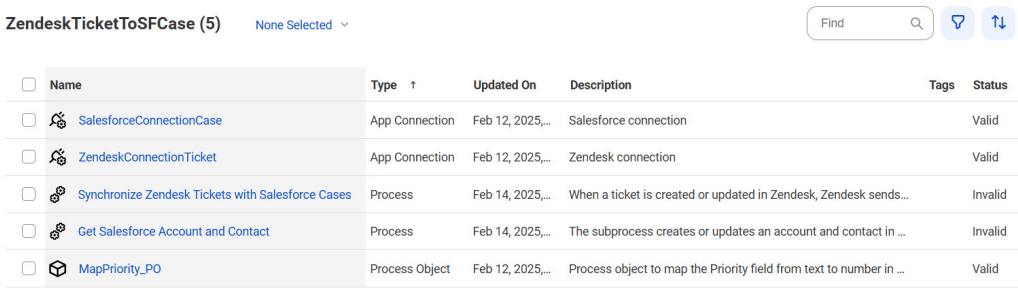

Synchronize Zendesk Tickets with Salesforce Cases recipe assets

The following table lists the assets that the Synchronize Zendesk Tickets with Salesforce Cases recipe package contains:

Asset Name	Asset Type	Description
MapPriority_PO	Process object	Process object to map the Priority field.
SalesforceConnectionCase	App connection	Salesforce connection.
ZendeskConnectionTicket	App connection	Zendesk connection.

Asset Name	Asset Type	Description
Get Salesforce Account and Contact	Process	Subprocess that creates or updates an account and contact in Salesforce.
Synchronize Zendesk Tickets with Salesforce Cases	Process	When a ticket is created or updated in Zendesk, Zendesk sends a webhook and triggers the process. The process checks whether the case owner account exists in Salesforce. If the case owner account does not exist, the process creates an account and a dependent contact in Salesforce. The process then searches for a matching case in Salesforce by the Zendesk ID and creates or updates the case based on the search results. The process requires webhook configuration in Zendesk.

CHAPTER 3

Using the Synchronize Zendesk Tickets with Salesforce Cases recipe

To use the Synchronize Zendesk Tickets with Salesforce Cases recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the Salesforce connection.
3. Configure and publish the Zendesk connection.
4. Publish the processes.
5. Create webhooks in Zendesk.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Synchronize Zendesk Tickets with Salesforce Cases** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

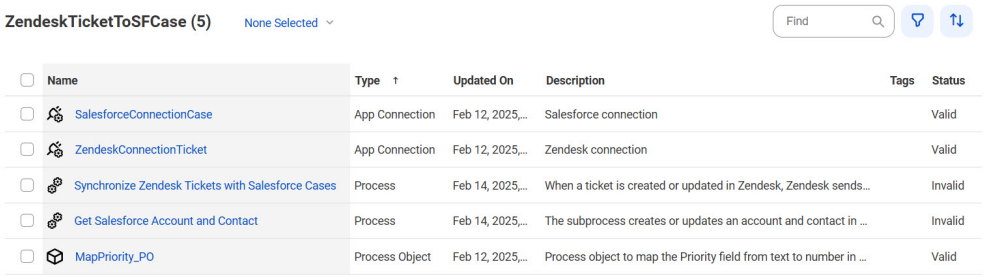

Step 2. Configure and publish the Salesforce connection

Configure the user credentials, object filter, and event consumer details in the SalesforceConnectionCase connection, and then publish the connection.

1. Open the **SalesforceConnectionCase** connection.
2. From the **Type** list, select **Salesforce**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **OAuth** or **Password** as required.

   Based on the authentication type selected, perform one of the following steps:

   - For **OAuth** authentication, enter values for the following properties:
     - **Authentication URL**. Endpoint used to make OAuth authorization requests to Salesforce.
     - **Token Request URL**. Endpoint used to make OAuth token requests to Salesforce.
     - **Session Duration**. Number of minutes after which the OAuth token expires.
     - **Authorize Access**. Click **Authorize** > enter the Salesforce developer account credentials > click **Allow**.

     The OAuth authentication process starts. You can check the current authorization status in the **Authorization Status** property.
   - For **Password** authentication, enter values for the following properties:
     - **User Name**. Salesforce developer account user name.
     - **Password**. Salesforce developer account password.
     - **Security Token**. Salesforce security token.
5. In the **Connection Properties** section, enter the **Object Filter** field value as `Case`.
6. Save and publish the connection.

Step 3. Configure and publish the Zendesk connection

Configure the email address, API token, and instance domain in the ZendeskConnectionTicket connection, and then publish the connection.

1. Open the **ZendeskConnectionTicket** connection.
2. From the **Type** list, select **Zendesk**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Email	Zendesk user's email address to authenticate requests.
Api_Token	Zendesk API token to authenticate requests. You can generate this value on the Zendesk Admin page.
Instance_Domain	The instance domain of Zendesk. Enter the instance domain in the following format: `https://{domain}.zendesk.com`

5. Save and publish the connection.

Step 4. Configure and publish the processes

Configure the authorization details and publish the processes.

1. To publish the **Get Salesforce Account and Contact** process, click **Actions** in the row that contains the process and select **Publish**.
2. Open the **Synchronize Zendesk Tickets with Salesforce Cases** process.
3. On the **Start** tab of the **Start** step, configure the authorization details according to the Zendesk webhooks setting.
4. Save and publish the process.


You must copy the service URL to the webhook configuration in Zendesk. For more information, see "Step 5. Create webhooks in Zendesk" on page 13. The process will be triggered automatically when a ticket is created or updated in Zendesk.

Step 5. Create webhooks in Zendesk


You can configure webhooks to communicate between systems when an event occurs.

To create a webhook in Zendesk, perform the following steps:


1. Log in to the Zendesk Admin Center.
   The following image shows an option to go to the Admin Center in Zendesk:

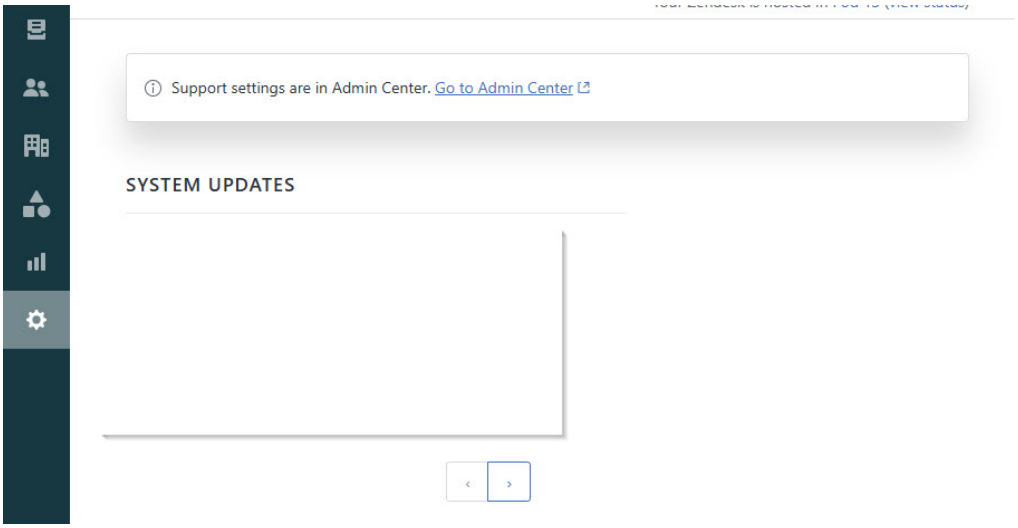

2. Click **Apps and integrations** > **Actions and webhooks** > **Webhooks** > **Create webhook**.
   The following image shows the **Create webhook** button on the **Webhooks** page:

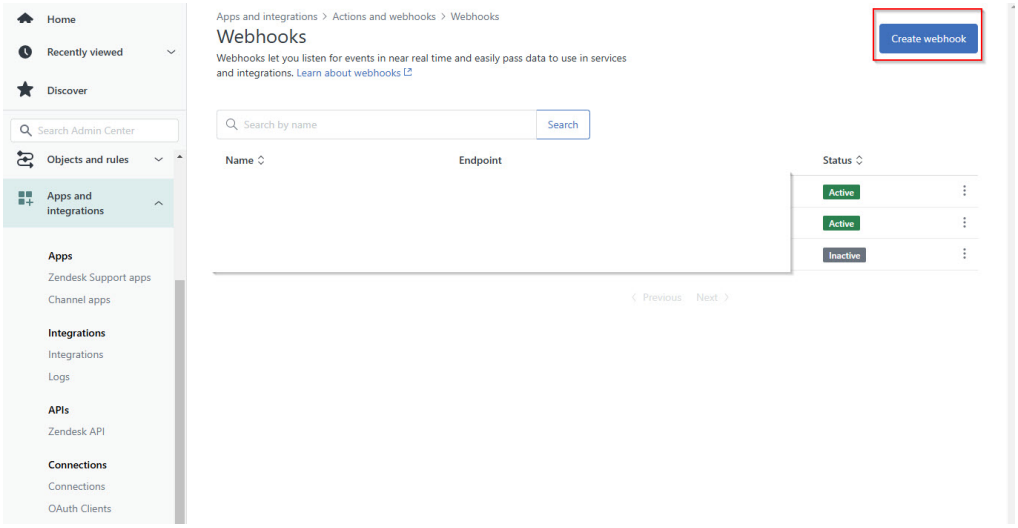


3. Select **Trigger or automation** and click **Next**.
   The following image shows the **Trigger or automation** option on the **Create webhook** page:

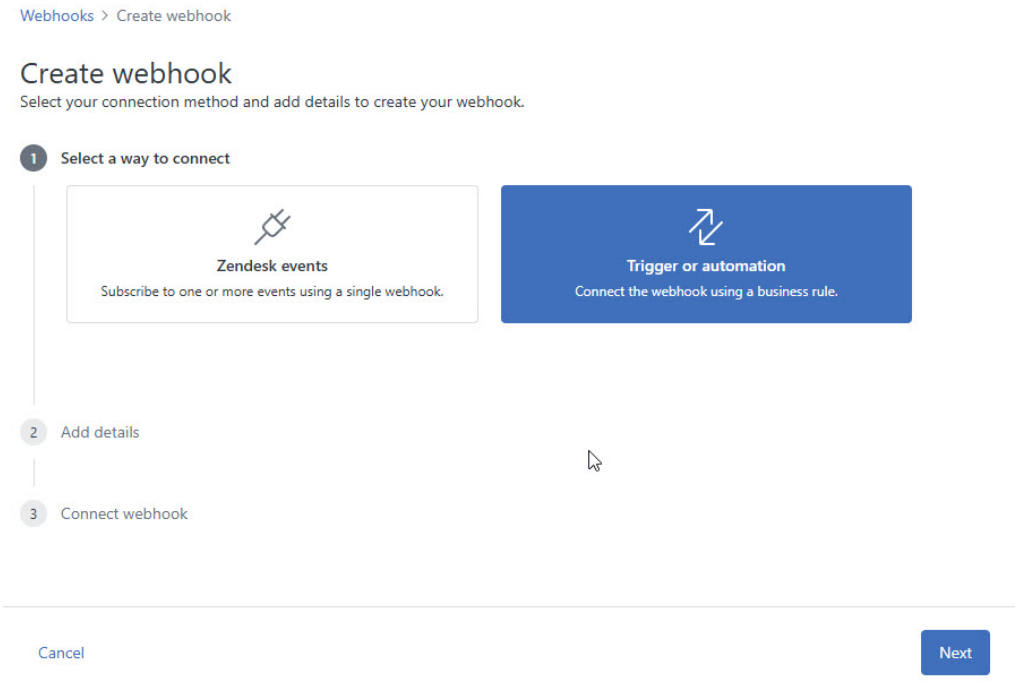


4. Enter the webhook name, the service URL that you get after publishing the process, and the authentication method, and then click **Create webhook** > **Finish setup**.
   In the **Authentication** field, select **None** if the process is is authorized for anonymous access, or user or group access.

   The following image shows the details section on the **Create webhook** page:

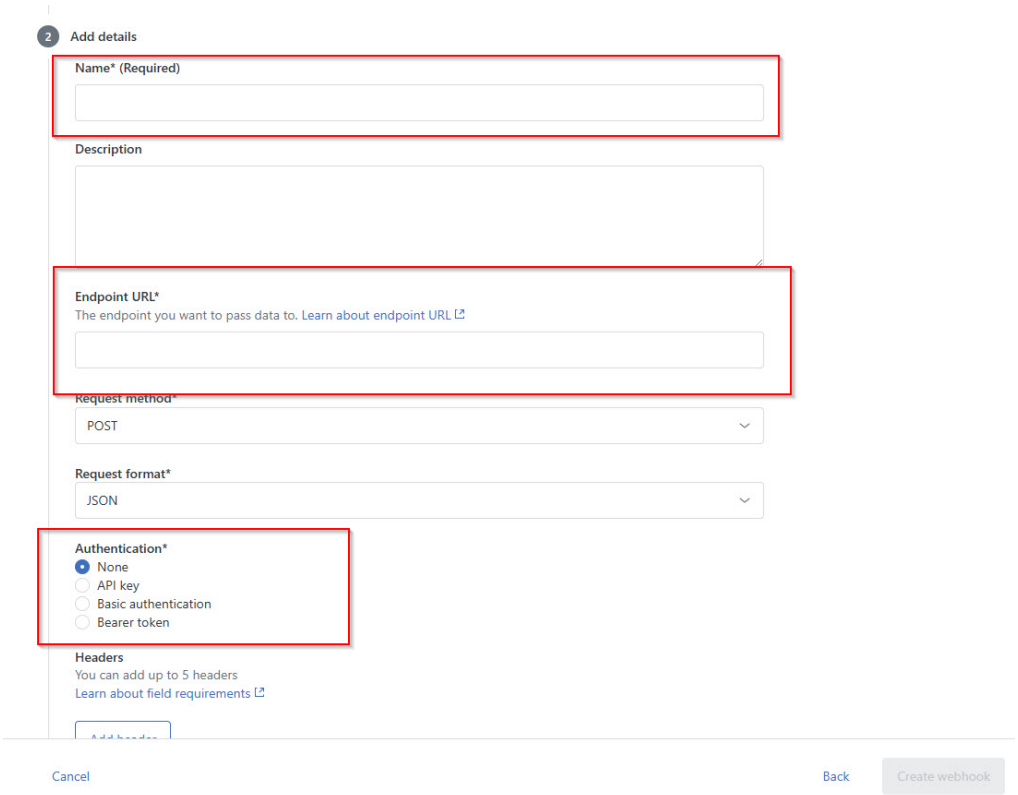


5. Go to **Admin Center** > **Add trigger** using the following URL:
   `https://<cloud or tenant name>.zendesk.com/agent/admin/triggers`

   The following image shows the **Add trigger** option on the **Triggers** page:

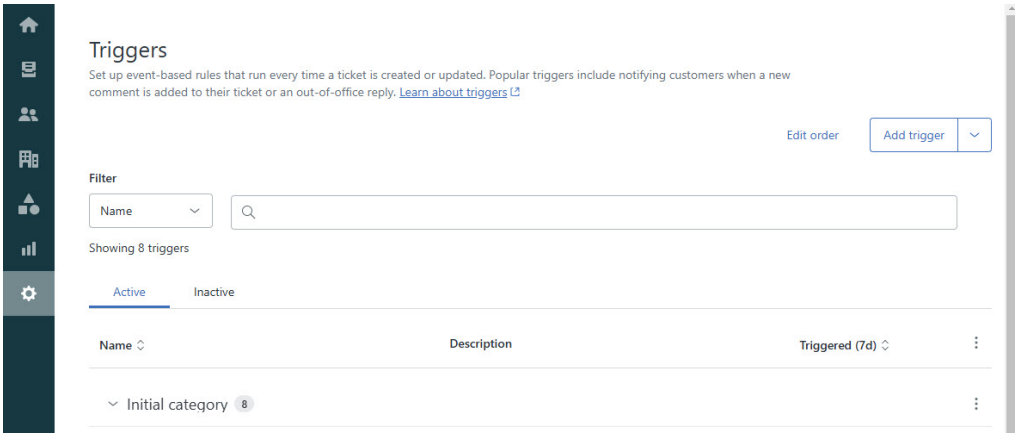


6. Enter the trigger name and add conditions.
   The following image shows the **Create or Update Ticket** section:

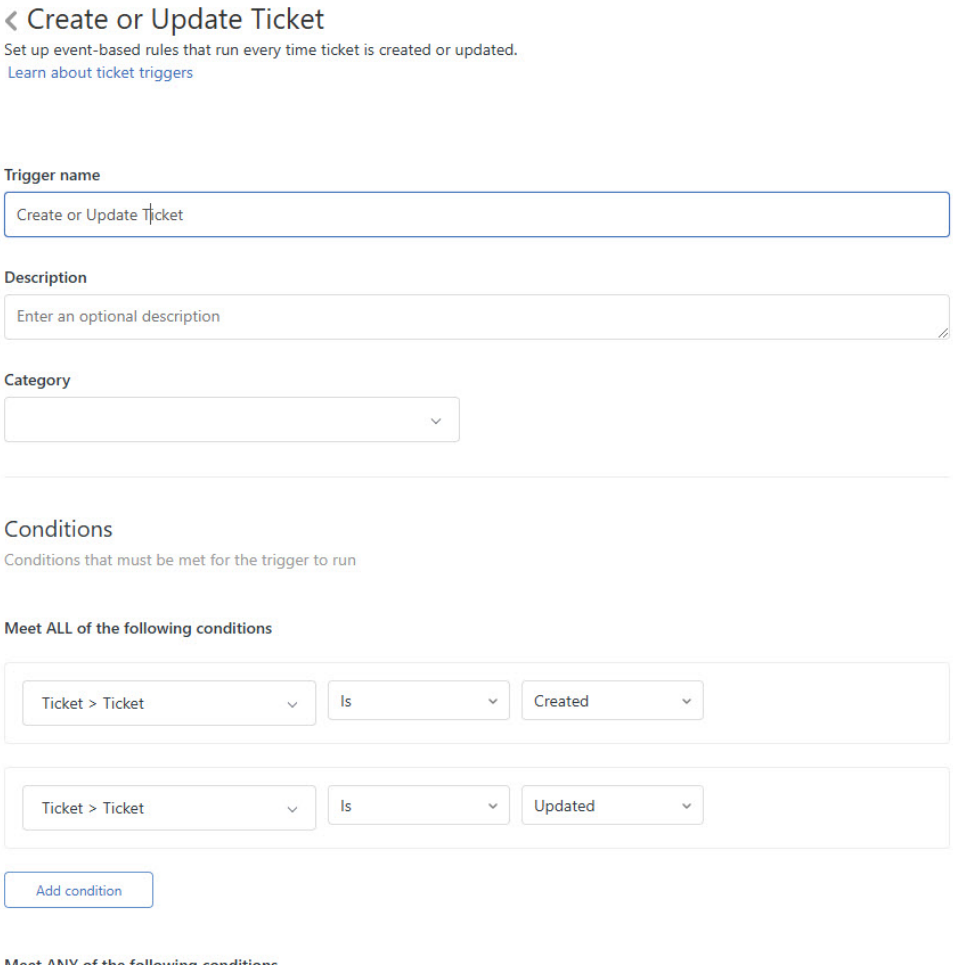

7. Select **Actions** > **Notify by** > > **Active webhook**, select your webhook, and enter the following snippet in the **JSON body** field:

```
{
"ticketID" : "{{ticket.id}}"
}
```

The following image shows the **Actions** section:

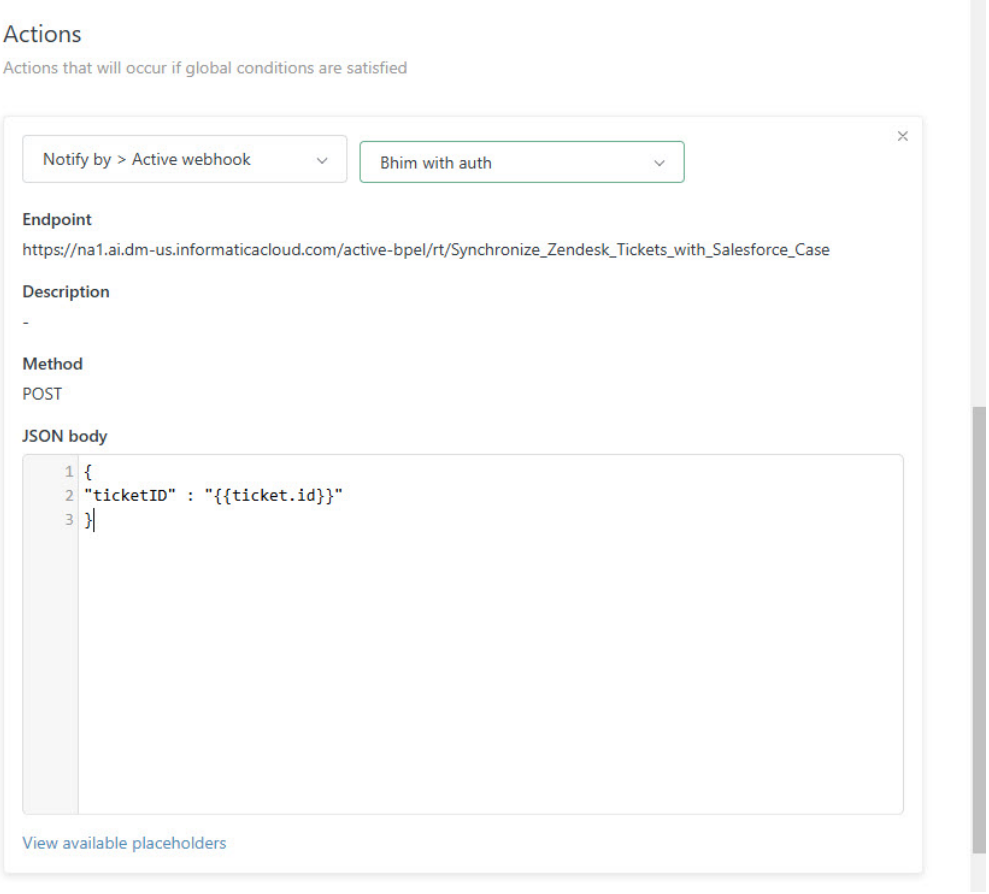

8. Click **Save**.

The webhook request is triggered automatically when a ticket is created or updated in Zendesk.

Invoke the process

You can also invoke the Synchronize Zendesk Tickets with Salesforce Cases process manually for testing purpose.

1. Open the **Synchronize Zendesk Tickets with Salesforce Cases** process and click **Actions** > **Properties Details** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL as shown in the following format:

```
<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?
webhookRequest=<Webhook request name from Zendesk>
```

3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in any API client, such as cURL, Postman, SOAP UI, or through any programming language.

Data synchronization from Zendesk tickets to Salesforce cases

After you publish the processes, whenever a Zendesk ticket is created or updated, Zendesk sends a webhook and triggers the process, and the ticket details are synchronized with the Salesforce case without manual intervention.

The following table shows the fields that are synchronized between the Zendesk ticket and the Salesforce case:

Zendesk Ticket	Salesforce Case
ID	Zendesk ID
Status	Status
Priority	Priority
Subject	Subject
Description	Description
Organization ID	Account Zendesk ID
Organization Name	Account Name
Requester	Contact Last Name + First Name
Requester Email	Contact Email
Requester Role	Contact Title This field synchronizes the value from the API, but the value can be different in the UI. For example, agent and Staff member, end-user and End user.