Informatica

Informatica® Cloud Application Integration
May 2025

AI Agent for Multiple Business Services Interaction

Informatica Cloud Application Integration AI Agent for Multiple Business Services Interaction
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to AI Agent for Multiple Business Services Interaction recipe 6

AI Agent for Multiple Business Services Interaction recipe contents 7

AI Agent for Multiple Business Services Interaction recipe assets 7

Chapter 2: Using the AI Agent for Multiple Business Services Interaction recipe 9

Copy and access the recipe 10

Publish the Generic Connector service connector 11

Configure and publish the GenericConnection connection 11

Publish the SalesforceQueryConnector service connector 12

Configure and publish the OpenAIAgentConnection connection 12

Configure and publish the GeminiAIAgentConnection connection 12

Configure and publish the AzureOpenAIAgentConnection connection 12

Configure and publish the ServiceNowAgentConnection connection 13

Configure and publish the Dynamics365AIAgentConnection connection 14

Configure and publish the SalesforceQueryConnection connection 14

Configure and publish the prompt LLM processes 15

Configure and publish the service specific processes 15

Configure and publish the AI Agent processes 16

Configure and publish the AI Agent Configurator process 16

Configure and publish the Generic AI Agent guide 16

Add service to the AI Agent 18

Preface

Use *AI Agent for Multiple Business Services Interaction* to learn how to interact with top external platforms, such as Dynamics 365, Salesforce, and ServiceNow. The customizable and extensible AI Agent can autonomously interact with other services through APIs using any Large Language Model (LLM). This guide assumes that you have an understanding of the Azure OpenAI Connector, Dynamics 365 Connector, Gemini Connector, OpenAI Connector, ServiceNow Connector, and Salesforce Connector concepts.

CHAPTER 1

Introduction to AI Agent for Multiple Business Services Interaction recipe

The AI Agent for Multiple Business Services Interaction recipe is based on REST and SOAP APIs. Use the recipe for interacting with top external platforms, such as Dynamics 365, Salesforce, and ServiceNow. This customizable and extensible AI Agent can autonomously interact with other services through APIs using any Large Language Model (LLM).

The recipe shows you how to use the AI Agent framework to autonomously interact with external systems using APIs and address user queries. The agent operates in a loop. It generates an API request based on the user's input, analyzes the response, and determines whether additional requests are needed to completely resolve the query. This iterative process continues until sufficient context is gathered for the Large Language Model (LLM) to produce an accurate and complete response.

Based on the user's query, the AI Agent analyzes the request and attempts to identify which target system among Salesforce, Dynamics, or ServiceNow is most appropriate for handling the query. The identified service name is presented to the user. The user can either confirm the suggested service or manually select one from the list provided in the recipe.

After the service is confirmed, the process proceeds with initializing the AI Agent using pre-configured system instructions and connectors specific to the selected platform.


The Agent uses a Large Language Model (LLM) to generate the first API request based on the user’s query. After executing the API call, the Agent evaluates the response. If additional information is needed, the Agent formulates and executes a new API request, using the previous response as a context. This process continues until the Agent determines that enough data has been gathered to answer the original query.

The Agent then compiles the accumulated context and uses the LLM to generate a final, comprehensive response to the user's query.

AI Agent for Multiple Business Services Interaction recipe contents

The AI Agent for Multiple Business Services Interaction recipe contains service connectors, app connections, processes, and a guide.

The following image shows the assets that the AI Agent for Multiple Business Services Interaction recipe package contains:

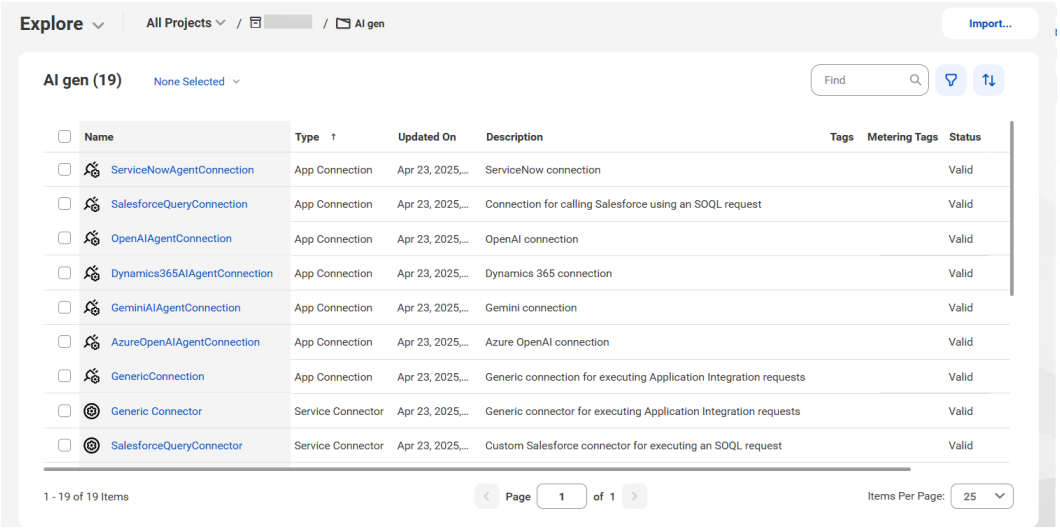

AI Agent for Multiple Business Services Interaction recipe assets

The following table lists the assets that the AI Agent for Multiple Business Services Interaction recipe package contains:

Asset Name	Asset Type	Description
Generic Connector	Service connector	Generic connector for executing Application Integration requests.
SalesforceQueryConnector	Service connector	Custom Salesforce connector for executing an SOQL request.
GenericConnection	App connection	Generic connection for executing Application Integration requests.
AzureOpenAIAgentConnection	App connection	Azure OpenAI connection.
OpenAIAgentConnection	App connection	OpenAI connection.
Dynamics365AIAgentConnection	App connection	Dynamics 365 connection.
GeminiAIAgentConnection	App connection	Gemini connection for executing Application Integration requests.
ServiceNowAgentConnection	App connection	ServiceNow connection.

Asset Name	Asset Type	Description
SalesforceQueryConnection	App connection	Connection for calling Salesforce using an SOQL request.
Prompt OpenAI LLM	Process	Process that calls the OpenAI LLM and returns the answer.
Prompt Azure OpenAI LLM	Process	Process that calls the Azure OpenAI LLM and returns the answer.
Prompt Gemini LLM	Process	Process that calls the LLM and returns the answer.
Query Dynamics 365	Process	Process that executes queries in Dynamics 365.
Query ServiceNow	Process	Process that executes queries in ServiceNow.
Salesforce Executor	Process	Subprocess that executes a Salesforce query based on a custom connector using Salesforce Object Query Language (SOQL).
AI Agent for Salesforce	Process	Process that calls the LLM using user prompts to convert them into a list of queries. Each query is executed in a sequence, prompting the LLM to generate a new Salesforce query after each one is completed.
AI Agent to API	Process	Process that uses an AI Agent to iteratively generate and refine API payloads based on user input and previous responses. It handles queries, updates, lookups, and dependencies step by step, producing structured JSON requests and user-friendly outputs.
AI Agent Configurator	Process	Process that defines agent settings, assigns system instructions, and selects the appropriate AI agent for a specific API integration.
Generic AI Agent	Guide	Guide that calls the AI Agent.

CHAPTER 2

Using the AI Agent for Multiple Business Services Interaction recipe

After you copy and access the recipe, based on the LLM you want to use and the service you want to call, you can configure and publish only the specific assets given in the following table:

1. Use one of the LLM and publish the corresponding app connection and process:

LLM	App connection	Process to execute the LLM request
Gemini	"Configure and publish the GeminiAIAgentConnection connection" on page 12	"Configure and publish the prompt LLM processes" on page 15
Open AI	"Configure and publish the OpenAIAgentConnection connection" on page 12	"Configure and publish the prompt LLM processes" on page 15
Azure Open AI	"Configure and publish the AzureOpenAIAgentConnection connection" on page 12	"Configure and publish the prompt LLM processes" on page 15

2. Configure and publish the subsequent assets associated with the service. The preconfigured recipe can call only one service for one user prompt.

Service	Service connector	App connection	Process to execute the API request	AI Agent process
ServiceNow	"Publish the Generic Connector service connector" on page 11	- "Configure and publish the ServiceNowAgentConnection connection" on page 13 - "Configure and publish the GenericConnection connection" on page 11	"Configure and publish the service specific processes" on page 15	"Configure and publish the AI Agent processes" on page 16
Dynamics 365	"Publish the Generic Connector service connector" on page 11	- "Configure and publish the Dynamics365AIAgentConnection connection" on page 14 - "Configure and publish the GenericConnection connection" on page 11	"Configure and publish the service specific processes" on page 15	"Configure and publish the AI Agent processes" on page 16
Salesforce	- "Publish the SalesforceQueryConnector service connector" on page 12 - "Publish the Generic Connector service connector" on page 11	- "Configure and publish the SalesforceQueryConnection connection" on page 14 - "Configure and publish the GenericConnection connection" on page 11		"Configure and publish the AI Agent processes" on page 16

After publishing the assets based on the LLM and service call, publish the following assets:

1. "Configure and publish the AI Agent Configurator process" on page 16.
2. "Configure and publish the Generic AI Agent guide" on page 16.

You can also add a new service to the AI Agent in this recipe. For more information, see "Add service to the AI Agent" on page 18.

Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **AI Agent for Multiple Business Services Interaction** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

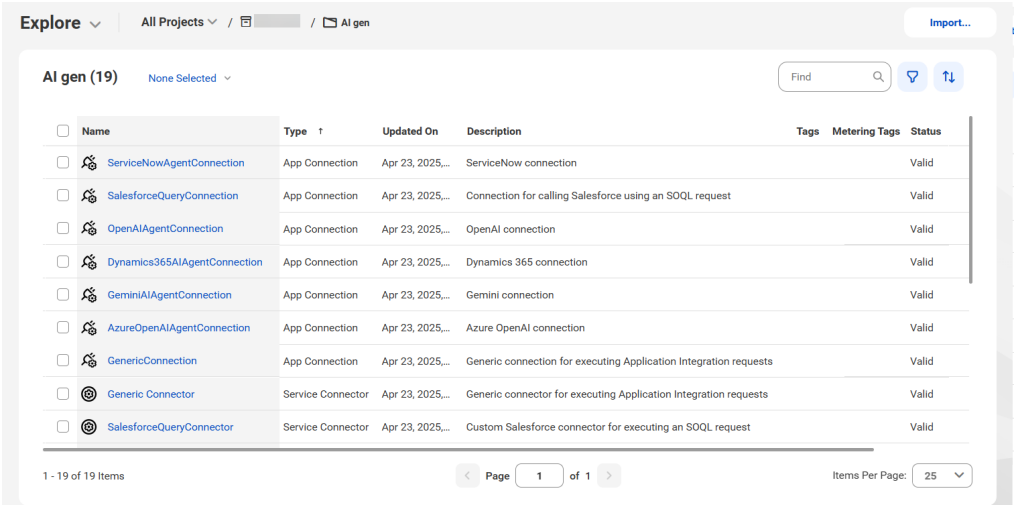

Publish the Generic Connector service connector

To publish the **Generic Connector** service connector, open the **Generic Connector** service connector and click **Publish**.

Configure and publish the GenericConnection connection

Configure the user credentials to authorize the request, and then publish the **GenericConnection** connection.

1. Open the **GenericConnection** connection.
2. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	User name of the user account to authorize requests.
Password	Password for the user account to authorize requests.

4. Save and publish the connection.

Publish the SalesforceQueryConnector service connector

You can publish the **SalesforceQueryConnector** service connector from the assets page.

To publish the service connector, click **Actions** in the row that contains the service connector and select **Publish**.

Configure and publish the OpenAIAgentConnection connection

Configure the API key in the OpenAIAgentConnection connection, and then publish the connection.

- Open the **OpenAIAgentConnection** connection.
- In the **Connection Properties** section, enter the API key in the **API_Key** property. The OpenAI API uses the API key to authenticate OpenAI connection requests.
- Save and publish the connection.

For information about creating an API key, see the OpenAI API documentation.

Configure and publish the GeminiAIAgentConnection connection

Configure the API key in the GeminiAIAgentConnection connection, and then publish the connection.

1. Open the **GeminiAIAgentConnection** connection.
2. In the **Connection Properties** section, enter the API key in the **API_Key** property. The **API_Key** property authenticates Gemini connection requests.
3. Save and publish the connection.

Configure and publish the AzureOpenAIAgentConnection connection

Configure the endpoint URL and API key in the AzureOpenAIAgentConnection connection, and then publish the connection.

1. Open the **AzureOpenAIAgentConnection** connection.
2. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.

3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Endpoint_URL	The REST API endpoint for Azure OpenAI. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.
API_Key	The API key to authenticate Azure OpenAI connection requests. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.

4. Save and publish the connection.

Configure and publish the ServiceNowAgentConnection connection

Configure the client ID, client secret, user credentials, service URL, grant type to connect to the ServiceNow instance, and then publish the ServiceNowAgentConnection connection.

1. Open the **ServiceNowAgentConnection** connection.
2. From the **Type** list, select **ServiceNow**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client ID	ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client Secret	ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User Name	ServiceNow user name with the security_admin role to generate client credentials in the ServiceNow instance.
Password	Password associated with the ServiceNow user account.
Service URL	URL to access the ServiceNow instance.
Grant type	Grant type that the ServiceNow instance uses to get an access token for third-party clients authorization. Enter the value as **password**.

5. Save and publish the connection.

Configure and publish the Dynamics365AIAgentConnection connection

Configure the tenant and client details in the Dynamics365AIAgentConnection connection, and then publish the connection.

1. Open the **Dynamics365AIAgentConnection** connection.
2. From the **Type** list, select **Dynamics365**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Tenant_ID	Dynamics 365 tenant ID to get the access token. Enter the tenant ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365 after creating the client credentials.
Client_ID	Dynamics 365 client ID to generate a valid access token. Enter the client ID that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Client_Secret	Dynamics 365 client secret that you generated under **Microsoft Entra ID** > **App registrations** in Dynamics 365.
Grant_type	Grant type that the Dynamics 365 instance uses to get an access token for third-party client authorization. Enter the value as **client_credentials**.
Resource_URL	URL to access the Dynamics 365 instance.

5. Save and publish the connection.

Configure and publish the SalesforceQueryConnection connection

Configure the user credentials, consumer key, and consumer secret in the SalesforceQueryConnection connection, and then publish the connection.

1. Open the **SalesforceQueryConnection** connection.
2. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	Salesforce developer account user name.
Password	Salesforce developer account password.

Property	Description
Consumer_Key	The consumer key associated with the Salesforce user account for API access.
Consumer_Secret	The consumer secret associated with the Salesforce user account for API access.

4. Save and publish the connection.

Configure and publish the prompt LLM processes

Configure the authorization details and LLM model, and then publish the prompt LLM processes.

This topic covers the steps to configure and publish the following processes:

- Prompt OpenAI LLM
- Prompt Azure OpenAI LLM
- Prompt Gemini LLM

1. Open the required process.
2. On the **Start** tab of the **Start** step, enter the user in the **Allowed Users** field or select **Allow anonymous access**.
3. On the **Assignments** tab of the **Setting and Preparing Prompt** step, in the **Model** field, enter the LLM model.
4. Save and publish the process.
5. On the **Actions** menu, click **Properties Detail** and copy the service URL.
   You will need this LLM URL in the Generic AI Agent guide.

Configure and publish the service specific processes

Configure the authorization details and publish the service specific process.

This topic covers the steps to configure and publish the following processes:

- Query ServiceNow
- Query Dynamics 365

1. Open the required process.
2. On the **Start** tab of the **Start** step, enter the user in the **Allowed Users** field or select **Allow anonymous access**.
3. Save and publish the process.
4. On the **Actions** menu, click **Properties Detail** and copy the service URL.
   You will need this executor URL in the AI Agent Configurator process.

Configure and publish the AI Agent processes

Configure the authorization details and publish the service specific processes.

This topic covers the steps to configure and publish the following processes:

- AI Agent to API
- AI Agent for Salesforce

1. Open the required process.
2. On the **Start** tab of the **Start** step, enter the user in the **Allowed Users** field or select **Allow anonymous access**.
3. Save and publish the process.
4. On the **Actions** menu, click **Properties Detail** and copy the service URL.
   You will need this Agent URL in the AI Agent Configurator process.

Configure and publish the AI Agent Configurator process

In the AI Agent Configurator process, the AI Agent is configured. You must configure the Agent URL of the AI Agent process and the executor URL to call the API service, and then publish the process.

1. Open the **AI Agent Configurator** process.
2. On the **Assignment** tab of the following steps, enter the Agent URL in the **Agent_URL** field and the executor URL in the **Executor_URL** field.
   - Set Processes URL for Salesforce
   - Set Processes URL for Dynamics 365
   - Set Processes URL for ServiceNow

   For Salesforce, you only need to enter the Agent URL.
3. Optionally, on the **Assignments** tab of the **Prepare System Instruction** step for the specific service, you can edit the system instructions for the LLM.
4. Save and publish the process.

Configure and publish the Generic AI Agent guide

The recipe uses custom connectors to perform SOQL queries and trigger other processes. This allows you to configure only the necessary services specific to the user from the list of available services, such as a particular LLM or API service, by leveraging system-level connectors.

For triggering other processes, authentication details, such as username and password are used. For enhanced security, ensure to configure all the target processes accordingly. For example, add the user to the list of allowed users or use public processes for testing purposes.

To publish and run the guide, perform the following steps:

1. Open the **Generic AI Agent** guide.
2. On the **Assignments** tab of the **Flow Settings** step, enter the LLM URL from the prompt LLM process in the **LLM_URL** field.
3. Save and publish the guide.
4. On the **Actions** menu, click **Run**. Alternatively, you can copy the execution URL from the **Properties Details** dialog box to run the guide.
5. On the **Instructions** page, enter the user prompt.
6. The recipe suggests the service name based on the configuration and user prompt. You can also select a different service from the list of available services.
7. Click **Continue**.
   You will receive a response from the LLM.
8. To ask the next question, click **Next Question**.
9. Enter new questions and click **Continue**.


You can also use the embed code to embed the guide into an HTML document of a third-party application.

Add service to the AI Agent

You can add a new service to the AI agent and use it in this recipe.


For example, you want to add the NetSuite service to the AI Agent.

1. Create a NetSuite connection and publish it as shown in the following image:

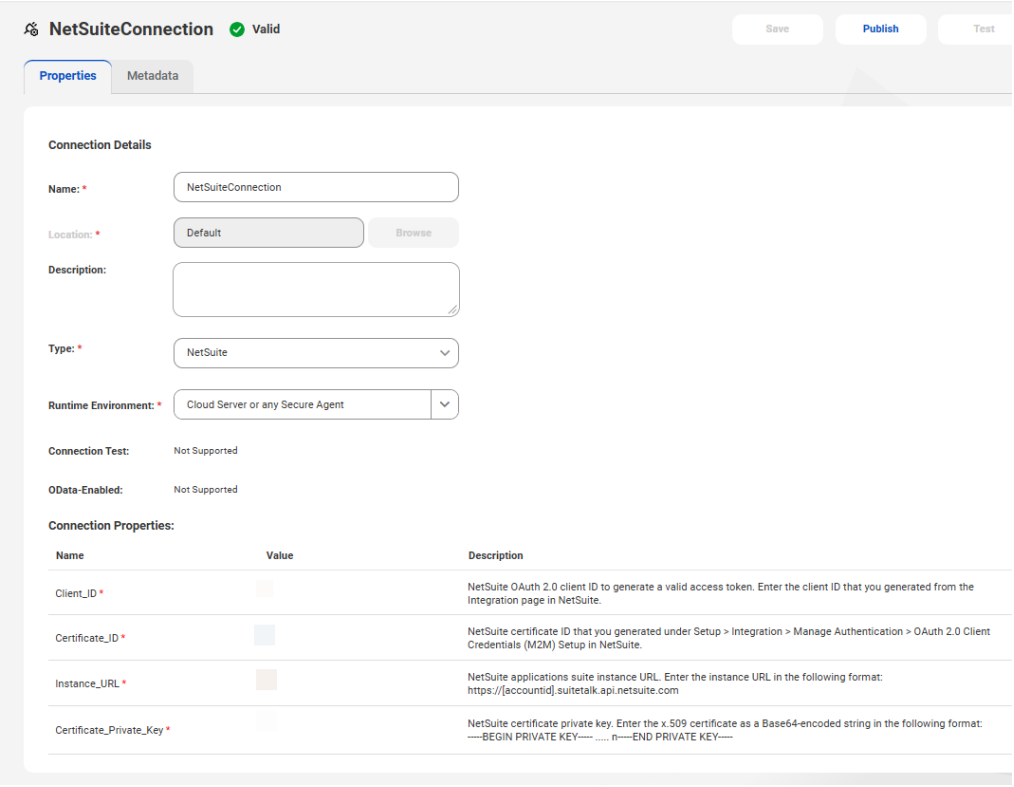


2. Similar to the Query ServiceNow process or Query Dynamics 365 process, create a process based on the NetSuite connection with the required actions. You can also copy the existing process, and change the connection in service call actions and check if the input fields have the correct mapping.

   The following image shows the NetSuite service specific process:

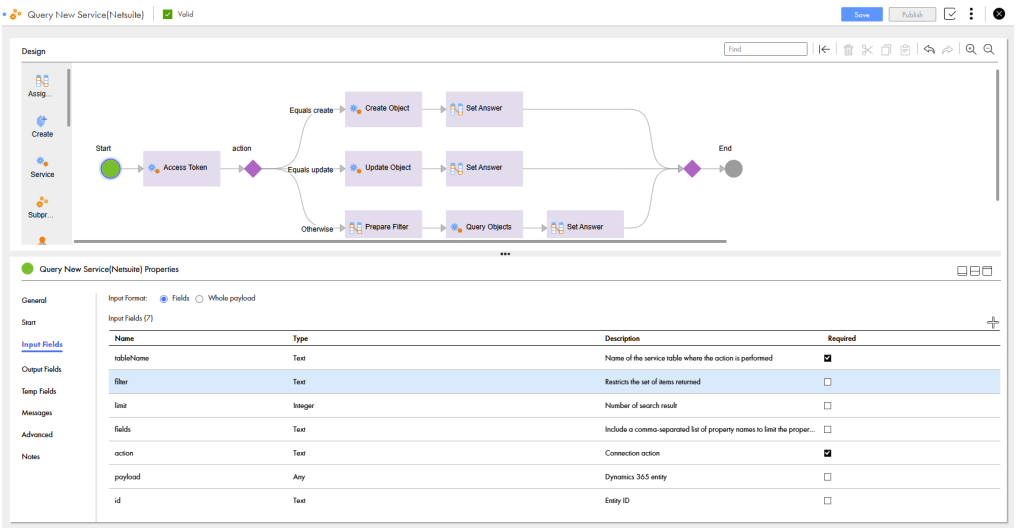

3. Open the AI Agent Configuration process. Add the NetSuite service to the **Agent_Name** step. Add the **Set Processes URL for NetSuite** step, and enter the specific Agent URL and executor URL for NetSuite. Add the **Prepare System Instruction** step, complete with system instruction for the LLM with details how the service will function with the AI Agent and provide several accurate payload examples.

   The following image shows the configuartion of the NetSuite service in the **AI Agent Configurator** process:

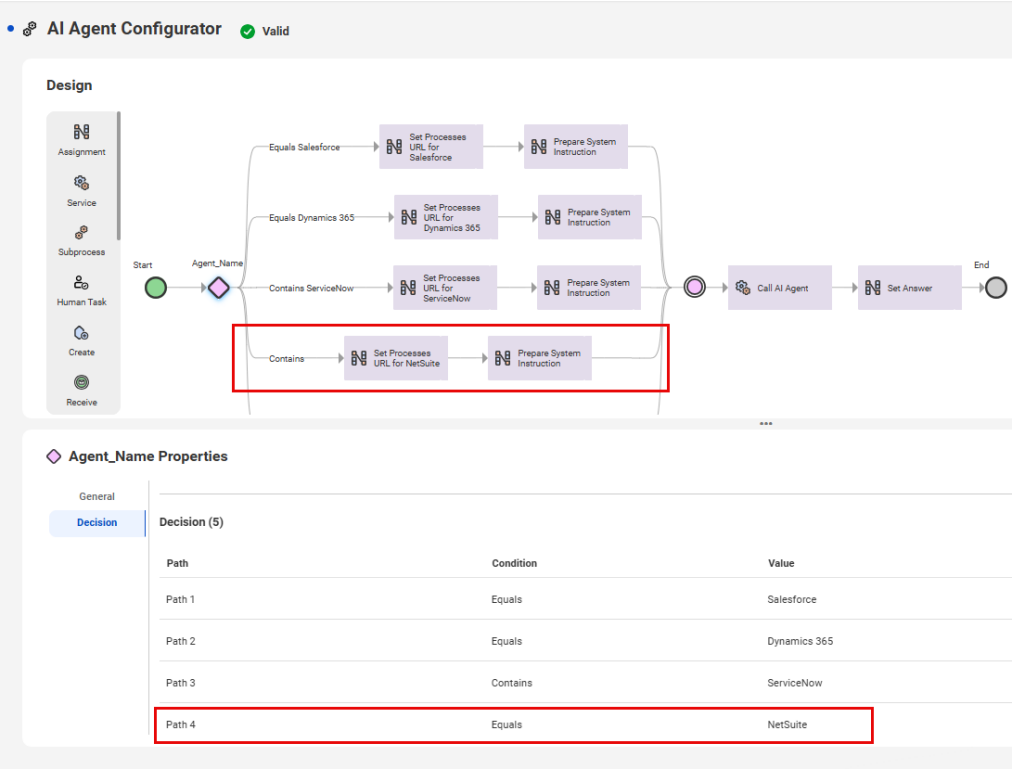

4. Open the **Generic AI Agent** guide. In the **Confirm selected AI Agent** screen, add **NetSuite** to the available agents list as shown in the following image:

