Informatica® Cloud Application Integration
May 2025

Evaluate Agent Responses for GenAI Applications

Informatica Cloud Application Integration Evaluate Agent Responses for GenAI Applications
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-30

Table of Contents

Preface 5

Chapter 1: Introduction to Evaluate Agent Responses for GenAI Applications recipe 6

Evaluate Agent Responses for GenAI Applications recipe contents 6

Evaluate Agent Responses for GenAI Applications recipe assets 7

Chapter 2: Using the Evaluate Agent Responses for GenAI Applications recipe 8

Step 1. Copy and access the recipe 8

Step 2. Configure and publish the Google Vertex AI connection 9

Step 3. Configure and publish the Azure OpenAI connection 10

Step 4. Configure and publish the processes 10

Step 5. Publish and run the guide 12

Preface

Use *Evaluate Agent Responses for GenAI Applications* to learn how to evaluate the quality of responses from the LLM based on the specified evaluation criteria, ensuring a structured and objective assessment. This guide assumes that you have an understanding of the Azure OpenAI Connector and Google Vertex AI Connector concepts.

CHAPTER 1

Introduction to Evaluate Agent Responses for GenAI Applications recipe

The Evaluate Agent Responses for GenAI Applications recipe is based on REST and SOAP APIs. Use the recipe to evaluate the quality of responses from the Large Language Model (LLM) based on the specified evaluation criteria, ensuring a structured and objective assessment.

You can complete the required fields in the Evaluate Agent guide and upload a file containing grounded data, with a maximum size of 5 MB, in any of the following formats:

`.txt, .xml, .json, .html, .csv, .md`


The process extracts data from the uploaded file to create payloads for the first LLM based on the user prompt, response instruction, and the grounded data.

The process then creates a payload for the second LLM based on the user prompt, evaluation instructions, grounded data, and the response from the first LLM. The process then parses the JSON response from the second LLM and creates output in a specific format.

Evaluate Agent Responses for GenAI Applications recipe contents

The Evaluate Agent Responses for GenAI Applications recipe contains app connections, processes, and a guide.

The following image shows the assets that the Evaluate Agent Responses for GenAI Applications recipe package contains:

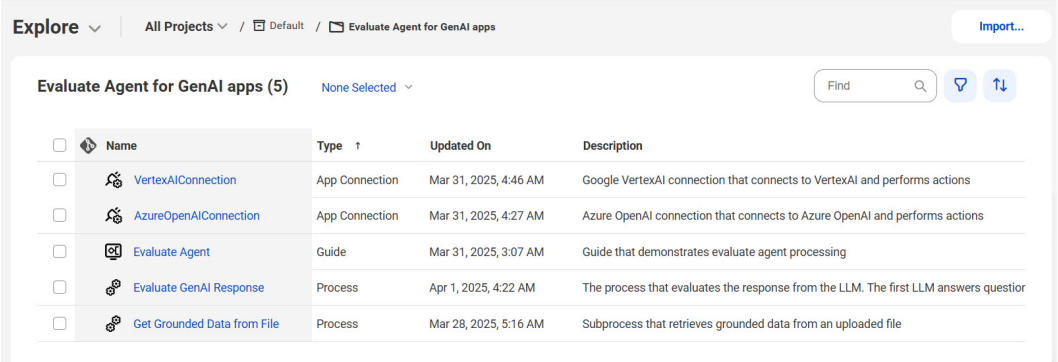

Evaluate Agent Responses for GenAI Applications recipe assets

The following table lists the assets that the Evaluate Agent Responses for GenAI Applications recipe package contains:

Asset Name	Asset Type	Description
VertexAIConnection	App connection	Google VertexAI connection that connects to VertexAI and performs actions.
AzureOpenAIConnection	App connection	Azure OpenAI connection that connects to Azure OpenAI and performs actions.
Get Grounded Data from File	Process	Subprocess that retrieves grounded data from an uploaded file.
Evaluate GenAI Response	Process	The process that evaluates the response from the LLM. The first LLM answers questions based on grounded data. The second LLM evaluates answers according to the specified criteria. If the tracing level is specified as Score, the LLM returns only scores in the form of numbers. If the tracing level is set to Verbose, the LLM returns a detailed answer with scores and an explanation.
Evaluate Agent	Guide	Guide that demonstrates and evaluates agent processing.

CHAPTER 2

Using the Evaluate Agent Responses for GenAI Applications recipe

To use the Evaluate Agent Responses for GenAI Applications recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the Google Vertex AI connection.
3. Configure and publish the Azure OpenAI connection.
4. Configure and publish the processes.
5. Publish and run the guide.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Evaluate Agent Responses for GenAI Applications** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

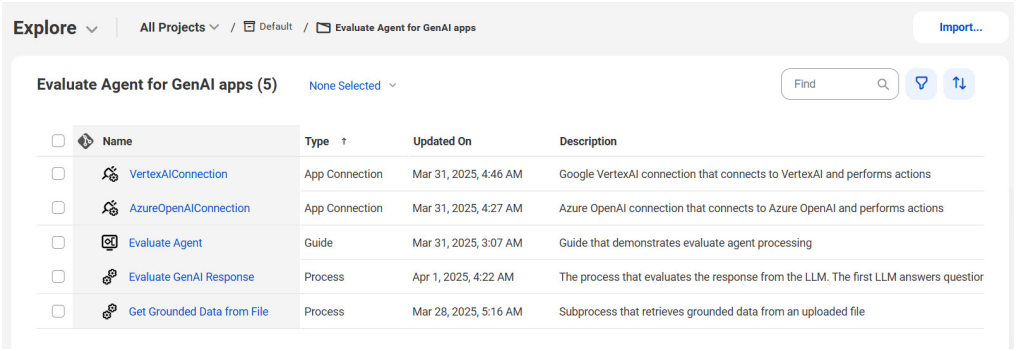

Step 2. Configure and publish the Google Vertex AI connection

Configure the project ID, private key ID, private key, client email, and location to connect to Google Vertex AI, and then publish the VertexAIConnection connection.

1. Open the **VertexAIConnection** connection.
2. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Project_ID	The project ID to generate a valid access token.
Location	The region to process the request.
Private_Key_ID	The private key ID associated with the Google Vertex AI service account.
Client_Email	The email address associated with the Google Vertex AI service account.
Private_Key	The Google Vertex AI private key associated with the service account. Enter the PKCS1 certificate as a Base64-encoded string in the following format: `-----BEGIN PRIVATE KEY----- ..... n-----END PRIVATE KEY-----`

3. Save and publish the connection.

Step 3. Configure and publish the Azure OpenAI connection

Configure the endpoint URL and API key in the AzureOpenAIConnection connection, and then publish the connection.

1. Open the **AzureOpenAIConnection** connection.
2. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Endpoint_URL	The REST API endpoint for Azure OpenAI. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.
API_Key	The API key to authenticate Azure OpenAI connection requests. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.

4. Save and publish the connection.

Step 4. Configure and publish the processes

Configure the system instructions and publish the processes.

1. Open the **Get Grounded Data from File** process.
2. On the **Start** tab of the Start step, select **Allow anonymous access**.
3. Save and publish the process.
4. Open the **Evaluate GenAI Response** process.
5. On the **Assignments** tab of the Set Flow Configuration step, enter values for the following fields:
   - In the **Response_Instruction** field, update the response instructions for the first LLM, if required.
   - In the **GenerationConfig_ResponseLLM** field, enter the prompt instructions using the Expression Editor, as shown in the following sample code:

```
<GenerationConfig>
    <temperature>0.3</temperature>
    <top_p>0.8</top_p>
    <max_tokens>800</max_tokens>
</GenerationConfig>
```

For the **GenerationConfig_ResponseLLM** field, enter values for the following properties:

Property	Description
temperature	Controls the randomness of the model's output. A lower value close to 0 makes the output more deterministic, while a higher value close to 1 increases randomness and creativity. For example, if `temperature` is set to 0.5, the model balances between deterministic and creative outputs.
topP	Determines the cumulative probability threshold for token selection. The model considers the smallest set of tokens whose cumulative probability meets or exceeds `topP`. For example, if `topP` is set to 0.1, the model considers only the top 10% most probable tokens at each step.
max_tokens	Defines the token count of your prompt. The value can't exceed the model's context length. Most of the models have a context length of 2048 tokens.

- In the **Deployment_ID** field, enter the name of the model deployment. You must first deploy a model before you can make calls.
- In the **API_Version** field, enter the API version to use for this operation. The API version must use the `YYYY-MM-DD` or `YYYY-MM-DD-preview` format. For example, `2024-02-15-preview`.
- In the **Evaluation_Instruction** field, update the instruction for the second LLM. By default it contains an example behavior for the second LLM which evaluates the response from the first LLM. You can customize the criteria and descriptions, if required. The response from the LLM must be in a valid JSON format for further processing and output.
- In the **GenerationConfig_EvaluationLLM** field, enter the prompt instructions using the Expression Editor, as shown in the following sample code:

```
<generationConfig>
    <temperature>0.3</temperature>
    <topP>0.8</topP>
    <maxOutputTokens>800</maxOutputTokens>
</generationConfig>
```

For the **GenerationConfig_EvaluationLLM** field, enter values for the following properties:

Property	Description
temperature	Controls the randomness of the model's output. A lower value close to 0 makes the output more deterministic, while a higher value close to 1 increases randomness and creativity. For example, if `temperature` is set to 0.5, the model balances between deterministic and creative outputs.
topP	Determines the cumulative probability threshold for token selection. The model considers the smallest set of tokens whose cumulative probability meets or exceeds `topP`. For example, if `topP` is set to 0.1, the model considers only the top 10% most probable tokens at each step.
maxOutputTokens	Defines the maximum number of tokens the model can generate in its response. Setting a limit ensures that the response is concise and fits within the desired length constraints.

- In the **ModelID_EvaluationLLM** field, enter the model ID for evaluating the response from LLM. For example, gemini-1.5-pro.

- In the **Retry** field, you can change the retry value to increase the number of attempts to call the LLM model if an error occurs.

6. Save and publish the process.

Step 5. Publish and run the guide

You can ask questions to the LLM based on the uploaded file.

1. Open the **Evaluate Agent** guide.
2. On the **Start** tab of the Start step, ensure that the **Run As** field is set to **Current User**.
3. Save and publish the guide.
4. On the **Actions** menu, click **Run**. Alternatively, you can copy the execution URL from the **Properties Details** dialog box to run the guide.
5. On the **Instructions** page, enter the user prompt, select the tracing level, and upload a file with grounded data.
6. Click **Continue**.
   The first LLM generates responses based on the data in the file. If the file does not contain enough information or if the questions fall outside the file's scope, the LLM will not provide an answer. Consequently, the assessment might not be objective.

You can also use the embed code to embed the guide into an HTML document of a third-party application.

You can evaluate the response using a score or a verbose. The score ranges from 0 to 5, indicating the level of correctness. If you choose Verbose, the LLM will provide a score along with an explanation.

Example of a verbose evaluation result:

- **Relevance**: Score: 0. This indicates that the response is not relevant. Instead of providing information or acknowledging the limitations of the provided data and attempting a partial answer, it simply states that it cannot answer.
- **Completeness**: Score: 0. This indicates that the response is entirely incomplete and offers no information about the query.
- **Style and Tone**: Score: 5. This reflects that the tone is neutral and appropriate.
- **Correctness**: Score: 0. This shows that the response incorrectly claims it cannot answer the question despite available data about the query. Although limited details on population, life expectancy, fertility rates, and age demographics are accessible, they could be used to fulfill the request for more information.
- **Clarity**: Score: 5. This indicates that the response is clear and concise in its statement, even though the content inaccurately represents its capabilities.