Informatica® Cloud Application Integration
May 2025

# Exporting Profiles from IDMC Data Profiling

Informatica Cloud Application Integration Exporting Profiles from IDMC Data Profiling
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

# Table of Contents

**Preface** . . . . . 5

**Chapter 1: Introduction to Exporting Profiles from IDMC Data Profiling recipe** . . . . . 6

Prerequisites . . . . . 6

**Chapter 2: Exporting Profiles from IDMC Data Profiling recipe contents** . . . . . 8

Exporting Profiles from IDMC Data Profiling recipe assets . . . . . 8

**Chapter 3: Using the Exporting Profiles from IDMC Data Profiling recipe** . . . . . 10

Step 1. Copy and access the recipe . . . . . 10

Step 2. Publish the CDP REST API service connector . . . . . 11

Step 3. Configure and publish the CDP-REST-API-Connection connection . . . . . 11

Step 4. Configure and publish the Email-Connection connection . . . . . 11

Step 5. Publish the process . . . . . 13

Step 6. Invoke the process . . . . . 13

# Preface

Use *Exporting Profiles from IDMC Data Profiling* to learn how to export the most recently run profile data to specified recipients. This recipe leverages the REST APIs of Informatica's IDMC Data Profiling to ensure seamless integration and efficient data handling. This guide assumes that you have an understanding of the Email Connector and IDMC Data Profiling concepts.

CHAPTER 1

# Introduction to Exporting Profiles from IDMC Data Profiling recipe

The Exporting Profiles from IDMC Data Profiling recipe is based on REST and SOAP APIs. With this recipe, you can efficiently gather, filter, select, and export the most recently run profile data to specified recipients. This recipe leverages the REST APIs of Informatica's IDMC Data Profiling to ensure seamless integration and efficient data handling.

The Exporting Profiles from IDMC Data Profiling recipe provides significant business value by streamlining the data export process from Informatica Intelligent Cloud Services. This recipe addresses key operational needs and improves efficiency in data profiling and communication.

- **Automated Data Flow**: Automates the extraction and distribution of profile results, reducing manual intervention, minimizing errors, and saving time.
- **Enhanced Data Visibility and Communication**: Automatically sends profile results to designated recipients, ensuring that the stakeholders receive timely insights for better-informed decisions at both strategic and operational levels.
- **Security and Compliance**: Implements secure authentication and manages encrypted user credentials, adhering to industry standards for data security and compliance, boosting confidence in data operations.
- **Operational Efficiency**: Uses REST APIs to automate data profiling workflows, enabling IT teams to prioritize strategic initiatives over routine data handling tasks.
- **Scalability and Integration**: Integrates seamlessly with existing cloud data infrastructure using Informatica's REST APIs, enabling scalability and future expansion to meet increasing data demands.

This recipe ensures consistent, accurate profile exports, strengthens data governance, and supports agile business operations.

For more information about the implementation and usage of REST APIs, see Getting Started with Cloud Data Profiling REST API.

## Prerequisites

To use the Exporting Profiles from IDMC Data Profiling recipe, the following prerequisites must be met:

- **Successful profile execution**
  The profile on the source system must be executed successfully before starting the export process.
- **SMTP server configuration**
  The SMTP server must be configured in the app connection in Application Integration. This configuration is required for sending the exported data to the intended recipients.


- **Secure user credentials**
  The user ID and password must be configured in the CDP-REST-API-Connection app connection. These credentials must be encrypted to maintain security and integrity during API interactions.

CHAPTER 2

# Exporting Profiles from IDMC Data Profiling recipe contents

The Exporting Profiles from IDMC Data Profiling recipe contains a service connector, app connections, and a process.

The following image shows the assets that the Exporting Profiles from IDMC Data Profiling recipe package contains:

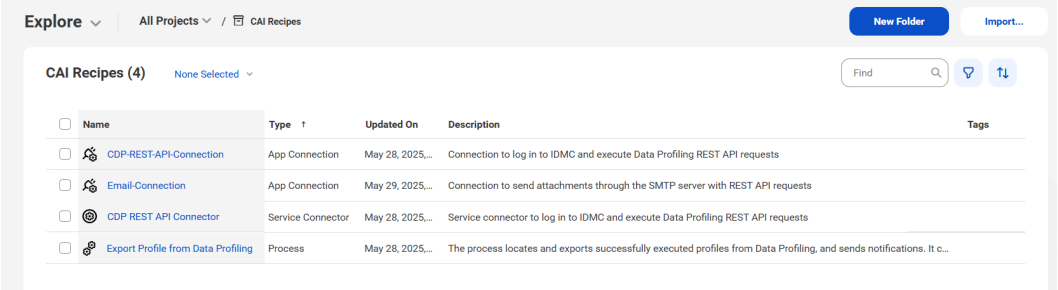


## Exporting Profiles from IDMC Data Profiling recipe assets

The following table lists the assets that the Exporting Profiles from IDMC Data Profiling recipe package contains:

| Asset Name | Asset Type | Description |
|---|---|---|
| CDP REST API Connector | Service connector | Service connector to log in to IDMC and execute Data Profiling REST API requests. |
| CDP-REST-API-Connection | App Connection | Connection to log in to IDMC and execute Data Profiling REST API requests. |

| Asset Name | Asset Type | Description |
|---|---|---|
| Email-Connection | App Connection | Connection to send attachments through the SMTP server with REST API requests. |
| Export Profile from Data Profiling | Process | Process that locates and exports successfully executed profiles from Data Profiling, and sends notifications. It carefully identifies profiles that have been completed without errors, creates exportable data insights, and informs relevant stakeholders to enhance the visibility and management of data profiling activities. |

CHAPTER 3

# Using the Exporting Profiles from IDMC Data Profiling recipe

To use the Exporting Profiles from IDMC Data Profiling recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish the CDP REST API Connector service connector.
3. Configure and publish the CDP-REST-API-Connection connection.
4. Configure and publish the Email-Connection connection.
5. Publish the process.
6. Invoke the process.


## Step 1. Copy and access the recipe

Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Exporting Profiles from IDMC Data Profiling** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.
5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

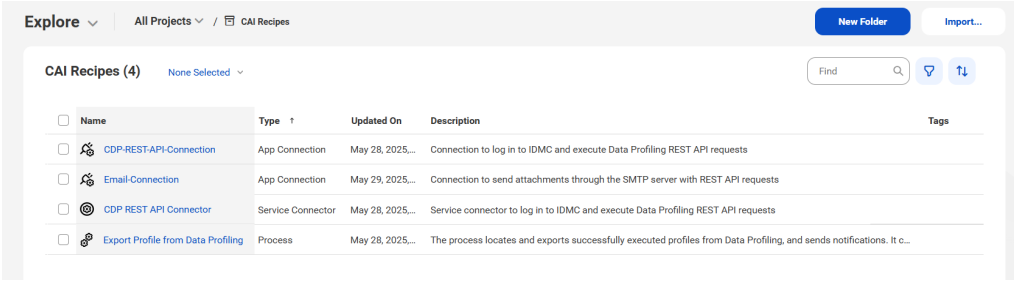

# Step 2. Publish the CDP REST API service connector

To publish the **CDP REST API Connector** service connector, open the **CDP REST API Connector** service connector and click **Publish**.

# Step 3. Configure and publish the CDP-REST-API-Connection connection

Configure the user name and password associated with the IDMC account, and then publish the CDP-REST-API-Connection connection.

1. Open the **CDP-REST-API-Connection** connection.
2. From the **Type** list, select **CDP REST API Connector**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter the user name and password associated with the IDMC account.
5. Save and publish the connection.

# Step 4. Configure and publish the Email-Connection connection

Configure the authentication details in the Email-Connection connection, and then publish the connection.

1. Open the **Email-Connection** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties in the **Connection Properties** section:

| Property | Description |
|---|---|
| Authentication | Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties. |
| User Name | User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com` |

| Property | Description |
|---|---|
| Password | Password for the email address. Set an API key for your email account. For information about creating an API key, see Create API credentials. |
| Security | Select **SSL** for the Email connection to use the SSL protocol. |
| Connection Timeout | The connection timeout in milliseconds. The default is 30000 milliseconds. |

Configure the following common properties on the connection creation page:

| Property | Description |
|---|---|
| Host | Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`. |
| Port | Port for communication between the Process Server and the email server.<br>Default is **25**. |
| Test Email Address | The email address that receives test mails from this connection. |
| From Email Address | The email address that appears in the From field for emails sent from this connection. |

- For **OAuth** authentication, enter values for the following properties in the **Connection Properties** section:

| Property | Description |
|---|---|
| Authorization URL | Enter the OAuth authorization URL for the email service that is used to authorize the user request.<br>For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize` |
| Token Request URL | Enter the OAuth token request URL that handles token requests.<br>For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token`<br>The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires. |
| Client ID | Specify the identifier value from the OAuth provider. |
| Client Secret | Enter the client secret to connect to the email application. |
| Scope | Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space.<br>For a Microsoft Outlook email account, enter the following scope:<br>`https://outlook.office.com/SMTP.Send offline_access` |

| Property | Description |
|---|---|
| Authorization Status | Indicates the current status and the last time that authorization was completed. |
| Authorize Access | Click **Authorize** to initiate the authorization workflow using OAuth. |

Configure the following common properties on the connection creation page:

| Property | Description |
|---|---|
| Host | Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`. |
| Port | Port for communication between the Process Server and the email server.<br>Default is **25**. |
| Test Email Address | The email address that receives test mails from this connection. |
| From Email Address | The email address that appears in the From field for emails sent from this connection. |

5. Save and publish the connection.

# Step 5. Publish the process

The process uses the project name, profile name, and email recipient as inputs and logs into Informatica Intelligent Cloud Services using the platform's REST API to obtain the baseURL and sessionId needed for subsequent API calls.

Using the baseURL, sessionId, project name, and profile name, it calls the Data Profiling REST API to locate the specific profile.

The Data Profiling REST API then retrieves the most recent profile run using the profile ID and obtains the latest run key. This run key is used to export the profile results into Application Integration through the REST API.

Finally, the profile report is combined with the email recipients from the input, and an SMTP service sends the results to the specified email addresses.

For more information about Data Profiling REST APIs, see Getting Started with Cloud Data Profiling REST API.

To publish the **Export Profile from Data Profiling** process, click **Actions** in the row that contains the process and select **Publish**.

# Step 6. Invoke the process

When you invoke the Export Profile from Data Profiling process, the process identifies and exports successfully executed profiles from Data Profiling, and sends notifications. It carefully identifies profiles that

have been completed without errors, creates exportable data insights, and informs relevant stakeholders to enhance the visibility and management of data profiling activities.

You can also schedule the process to run at regular intervals using Application Integration Console. This helps you streamline automation and ensure consistent operation according to your specified timeline.

1. Open the **Export Profile from Data Profiling** process and click **Actions** > **Properties Details** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL as shown in the following format:
   ```
   <Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?
   in_CDP_ProjectName=<Project name containing the profile>&in_CDP_profileName=<Cloud Data
   Profile name>&in_CDP_Email_Recipients=<Email of recipients to share the profile report>
   ```
3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in API clients, such as cURL, Postman, SOAP UI, or through any programming language.