Informatica®

Informatica® Cloud Application Integration
May 2025

Patient Food Vendor Recommendation using Databricks Mosaic AI

Informatica Cloud Application Integration Patient Food Vendor Recommendation using Databricks Mosaic AI
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-09-10

Table of Contents

Preface 5

Chapter 1: Introduction to Patient Food Vendor Recommendation using Databricks Mosaic AI recipe 6

Prerequisites 6

Chapter 2: Patient Food Vendor Recommendation using Databricks Mosaic AI recipe contents 7

Patient Food Vendor Recommendation using Databricks Mosaic AI recipe assets 8

Chapter 3: Using the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe 9

Step 1. Copy and access the recipe 9

Step 2. Publish the FHIR service connector 10

Step 3. Configure and publish the FHIR connection 10

Step 4. Configure and publish Databricks Mosaic AI connection 11

Step 5. Configure and publish the Email connection 11

Step 6. Configure and publish the processes 13

Step 7. Invoke the process 13

Preface

Use *Patient Food Vendor Recommendation using Databricks Mosaic AI* to learn how to extract food allergy data from FHIR and find vendors with suitable food for the patient using Databricks vector index. This guide assumes that you have an understanding of the Databricks Mosaic AI Connector, Email Connector, FHIR Connector, and FHIR concepts.

CHAPTER 1

Introduction to Patient Food Vendor Recommendation using Databricks Mosaic AI recipe

The Patient Food Vendor Recommendation using Databricks Mosaic AI recipe is based on REST and SOAP APIs. Use the recipe to extract food allergy data from FHIR and find vendors with suitable food for the patient using Databricks vector index.

The process retrieves a patient's allergies from the FHIR server using the patient's resource ID and compiles them into an allergy resource bundle. It then filters the allergies to isolate those related to food from the FHIR Allergy Intolerance resource.

Next, the process queries the vector index to identify the patient's food allergies and finds the top five vendors offering suitable food options for the allergic patient. The database must include a list of food vendors that cater to patients with allergies.

Finally, the process summarizes the food allergies and recommends vendors. Once completed, an email is sent to the provided email address containing the list of the top five vendors supplying allergy-appropriate food for the patient.

Prerequisites

To use the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe, the following prerequisites on Databricks must be met:

- The vector search endpoint must be created.
- The source table must have Change Data Feed enabled.
- The vector index on the source table must be created within the vector search endpoint.


For information about how to create a vector search endpoint, see the Databricks documentation.

CHAPTER 2

Patient Food Vendor Recommendation using Databricks Mosaic AI recipe contents

The recipe contains multiple assets, such as service connector, app connection, and processes.

The following image shows the assets that the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe package contains:

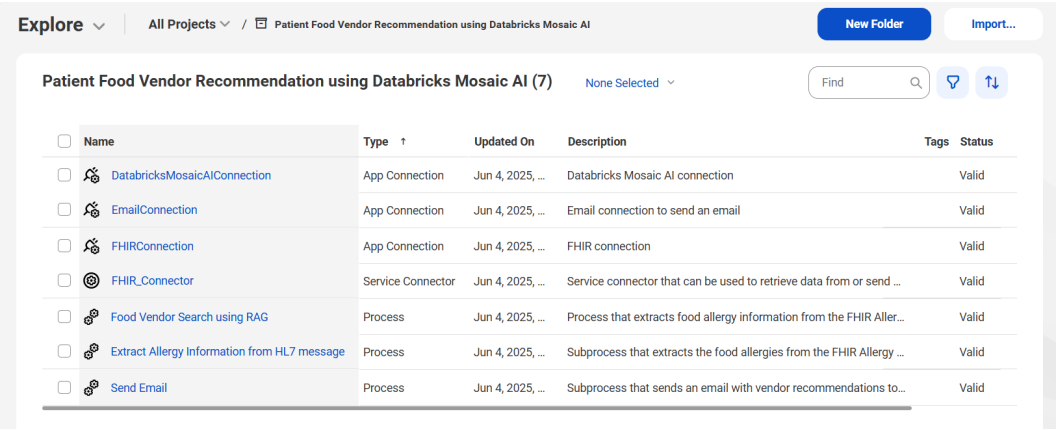

Patient Food Vendor Recommendation using Databricks Mosaic AI recipe assets

The following table lists the assets that the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe package contains:

Asset Name	Asset Type	Description
FHIR_Connector	Service connector	Service connector that can be used to retrieve data from or send data to the FHIR server.
DatabricksMosaicAIConnection	App connection	Databricks Mosaic AI connection.
EmailConnection	App connection	Email connection to send an email.
FHIRConnection	App connection	FHIR connection.
Send Email	Process	Subprocess that sends an email with vendor recommendations to the recipient.
Extract Allergy Information from HL7 message	Process	Subprocess that extracts the food allergies from the FHIR Allergy Intolerance resource.
Food Vendor Search using RAG	Process	Process that extracts food allergy information from the FHIR Allergy Intolerance resource and searches for the allergies in the Databricks vector index to identify vendors offering suitable food for the patient.

CHAPTER 3

Using the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe

To use the Patient Food Vendor Recommendation using Databricks Mosaic AI recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish the FHIR service connector.
3. Configure and publish the FHIR connection.
4. Configure and publish the Databricks Mosaic AI connection.
5. Configure and publish the Email connection.
6. Configure and publish the processes.
7. Invoke the process.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Patient Food Vendor Recommendation using Databricks Mosaic AI** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

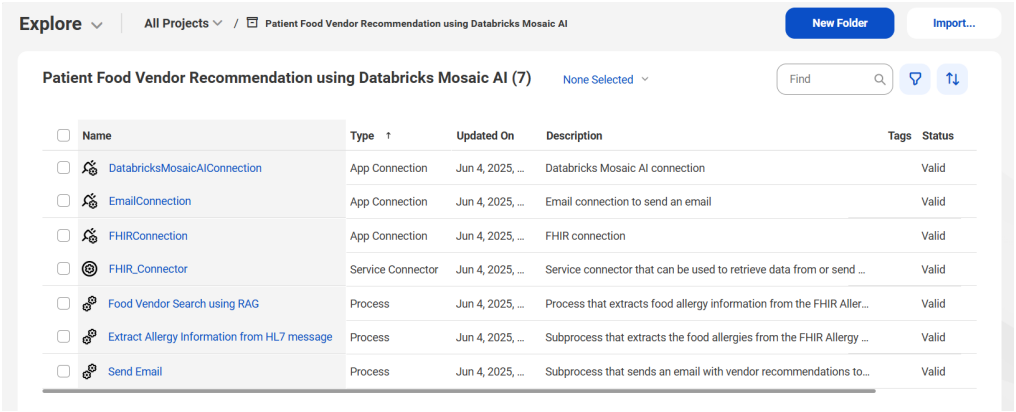

Step 2. Publish the FHIR service connector

To publish the **FHIR_Connector** service connector, open the **FHIR_Connector** service connector and click **Publish**.

Step 3. Configure and publish the FHIR connection

Configure the host name and base path for the FHIR server, and then publish the FHIRConnection connection.

1. Open the **FHIRConnection** connection.
2. From the **Type** list, select **FHIR_Connector** from the recipe assets folder.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties**, enter values for the following properties:

Property	Description
Host Name	Host name of the FHIR server.
BasePath	Base path for the FHIR server.

5. Save and publish the connection.

Step 4. Configure and publish Databricks Mosaic AI connection

Configure the host URL and access token to access the Databricks Mosaic AI instance, and then publish the DatabricksMosaicAIConnection connection.

1. Open the **DatabricksMosaicAIConnection** connection.
2. From the **Type** list, select **Databricks Mosaic AI**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Host	Host URL for Databricks Mosaic AI.
Bearer_Token	Access token for Databricks Mosaic AI.

5. Save and publish the connection.

Step 5. Configure and publish the Email connection

Configure the authentication details in the EmailConnection connection, and then publish the connection.

1. Open the **EmailConnection** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`
Password	Password for the email address. Set an API key for your email account. For information about creating an API key, see Create API credentials.

Property	Description
Security	Select **SSL** for the Email connection to use the SSL protocol.
Connection Timeout	The connection timeout in milliseconds. The default is 30000 milliseconds.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.
Test Email Address	The email address that receives test mails from this connection.
From Email Address	The email address that appears in the From field for emails sent from this connection.

- For **OAuth** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authorization URL	Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Specify the identifier value from the OAuth provider.
Client Secret	Enter the client secret to connect to the email application.
Scope	Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`

Property	Description
Authorization Status	Indicates the current status and the last time that authorization was completed.
Authorize Access	Click **Authorize** to initiate the authorization workflow using OAuth.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.
Test Email Address	The email address that receives test mails from this connection.
From Email Address	The email address that appears in the From field for emails sent from this connection.

5. Save and publish the connection.

Step 6. Configure and publish the processes

Configure the serving endpoint if required and publish the processes.

1. To publish the **Send Email** process, click **Actions** in the row that contains the process and select **Publish**.
2. To publish the **Extract Allergy Information from HL7 message** process, click **Actions** in the row that contains the process and select **Publish**.
3. Open the **Food Vendor Search using RAG** process.
4. On the **Input Fields** tab of the Chat Completions step, in the **Serving Endpoint Name** field, enter the name of the serving endpoint in Databricks Mosaic AI. The default serving endpoint is **databricks-meta-llama-3-3-70b-instruct**. You can optionally edit the serving endpoint.
5. Save and publish the process.

Step 7. Invoke the process

When you invoke the Food Vendor Search using RAG process, it extracts a patient's food allergy data from the FHIR Allergy Intolerance resource, searches the Databricks vector index for allergies, identifies suitable food vendors, and emails the user a list of those vendors.

1. Open the **Food Vendor Search using RAG** process and click **Actions** > **Properties Details** > **Copy Service URL**.

2. Open a text editor and add the input fields and values to the service URL as shown in the following format:

```
<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?
Email_Address=<Email address to which the report must be
sent>&Patient_Resource_ID=<FHIR Patient Resource ID>
```

3. Open a browser and paste the service URL.

You can pass input through REST or SOAP API endpoints in any API client such as cURL, Postman, SOAP UI, or through any programming language, or by invoking the process using the Run Using option.