Informatica® Cloud Application Integration
May 2025

Simple RAG Consumption with Microsoft Teams AI Agent

Informatica Cloud Application Integration Simple RAG Consumption with Microsoft Teams AI Agent
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Simple RAG Consumption with Microsoft Teams AI Agent recipe 6

Prerequisites for creating an index in Pinecone 6

Chapter 2: Simple RAG Consumption with Microsoft Teams AI Agent recipe contents 9

Simple RAG Consumption with Microsoft Teams AI Agent recipe assets 10

Chapter 3: Using the Simple RAG Consumption with Microsoft Teams AI Agent recipe 11

Step 1. Copy and access the recipe 11

Step 2. Configure and publish the Gemini connection 12

Step 3. Configure and publish the Pinecone connection 12

Step 4. Configure and publish the Microsoft Teams connection 13

Step 5. Configure and publish the processes 14

Step 6. Create webhooks in Microsoft Teams 15

Preface

Use *Simple RAG Consumption with Microsoft Teams AI Agent* to learn how to receive a user query from Microsoft Teams, search for relevant context in a vector database, send the query and context to a Large Language Model (LLM), and return the generated response back to the Microsoft Teams channel. This guide assumes that you have an understanding of the Gemini Connector, Pinecone Connector, and Microsoft Teams Connector concepts.

CHAPTER 1

Introduction to Simple RAG Consumption with Microsoft Teams AI Agent recipe

The Simple Retrieval Augmented Generation (RAG) Consumption with Microsoft Teams AI Agent recipe is based on REST and SOAP APIs. Use the recipe to receive a user query from Microsoft Teams, search for relevant context in a vector database, send the query and context to a Large Language Model (LLM), and return the generated response back to the Microsoft Teams channel.

The process begins by receiving user input from Microsoft Teams. It then converts the query into a vector representation using a pre-trained embedding model, translating the text into a numerical format that captures the semantic meaning.

The process then uses a vectorized query to search for similar vectors within a vector database that contains representations of various contexts. The process retrieves the top K closest matches from the vector database based on similarity scores, representing contexts similar to the user's query.

The process then filters the retrieved contexts to include only those with a similarity score exceeding a specified cutoff parameter, ensuring that only relevant contexts are considered. The process combines these filtered contexts to formulate the final context, which provides additional information to the model.


Subsequently, the process invokes a Large Language Model (LLM) using the original user query and the processed context. The LLM leverages this information to generate a comprehensive response. This response is returned to the user in the same channel.

This approach ensures the LLM's response is relevant and enriched by the most contextually appropriate information from the vector database.

Prerequisites for creating an index in Pinecone


To ensure that the process works correctly, you must create an index in Pinecone and add text for the context. The context is then converted into vectors using the Get Embeddings process.

1. Open the **Create a new index** page in Pinecone.
2. In the **Default** field, enter an index name and in the **Dimensions** field, enter the value **768** as shown in the following image:

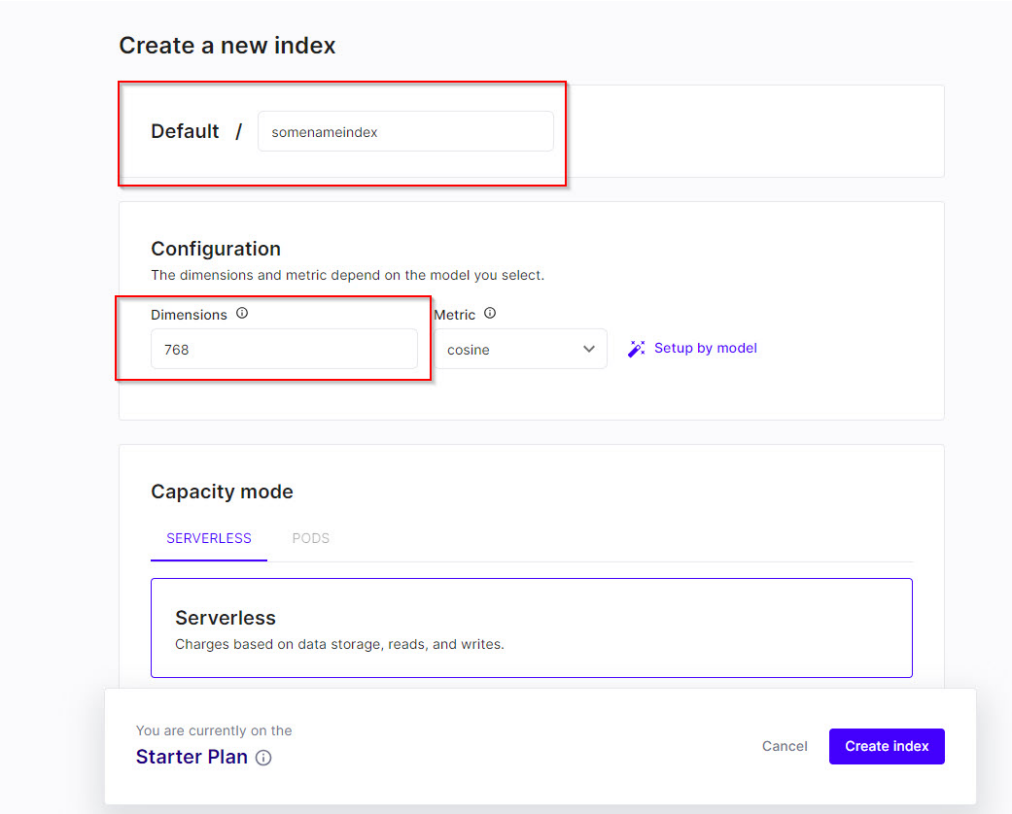

3. Click **Create index**.

After creating the index, you can use the **HOST** value without `https://` in the **Index_Host** input parameter as shown in the following image:

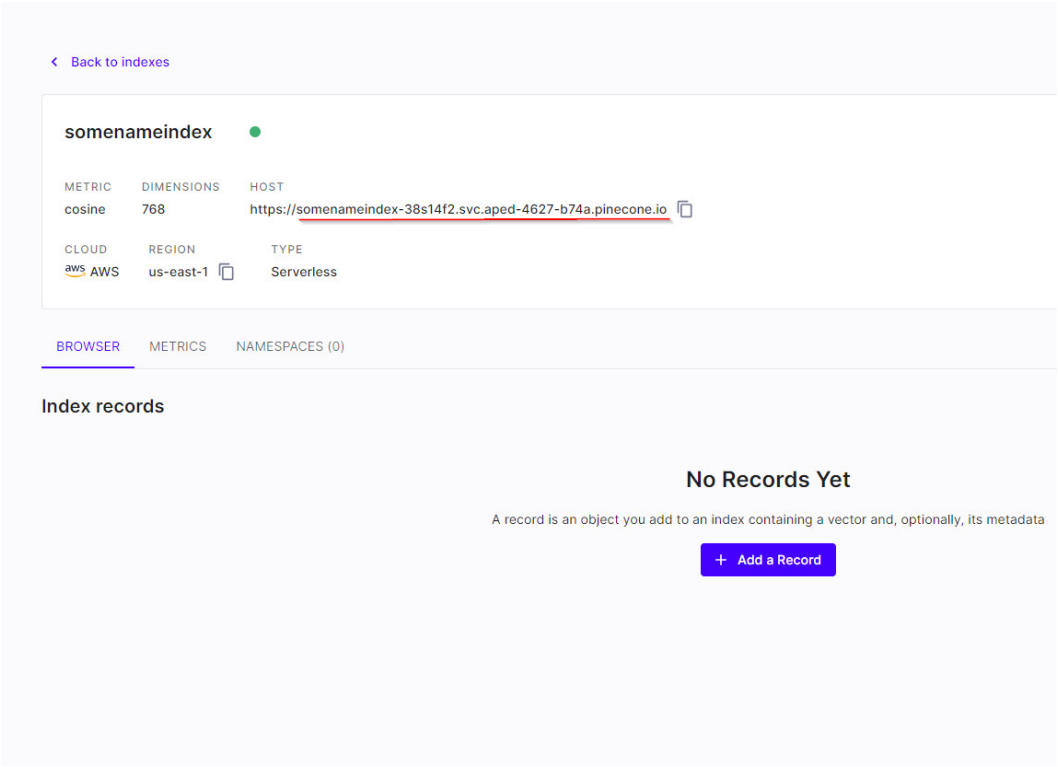

Back to indexes
somenameindex
METRIC
cosine
DIMENSIONS
768
HOST
https://somenameindex-38s14f2.svc.aped-4627-b74a.pinecone.io
CLOUD
AWS
REGION
us-east-1
TYPE
Serverless
BROWSER
METRICS
NAMESPACES (0)
Index records
No Records Yet
A record is an object you add to an index containing a vector and, optionally, its metadata
Add a Record

CHAPTER 2

Simple RAG Consumption with Microsoft Teams AI Agent recipe contents

The Simple RAG Consumption with Microsoft Teams AI Agent recipe contains app connections and processes.

The following image shows the assets that the Simple RAG Consumption with Microsoft Teams AI Agent recipe package contains:

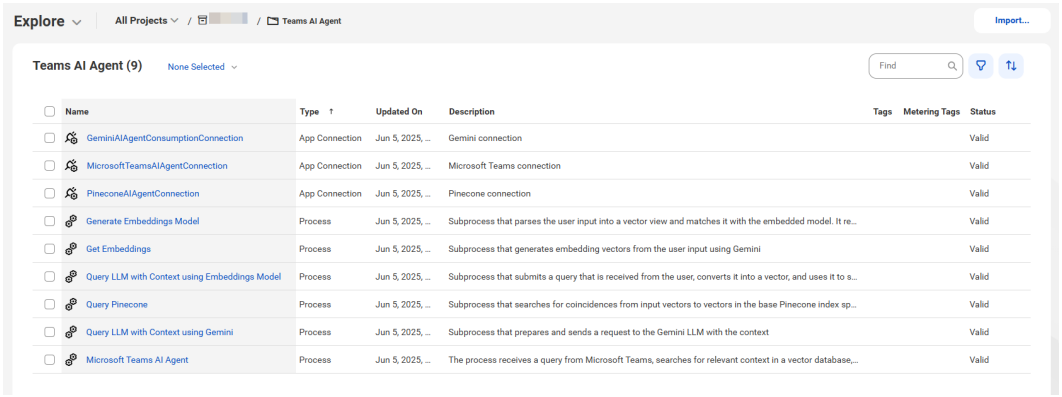

Name	Type	Updated On	Description	Tags	Metering Tags	Status
GeminiAIAgentConsumptionConnection	App Connection	Jun 5, 2025, ...	Gemini connection			Valid
MicrosoftTeamsAIAgentConnection	App Connection	Jun 5, 2025, ...	Microsoft Teams connection			Valid
PineconeAIAgentConnection	App Connection	Jun 5, 2025, ...	Pinecone connection			Valid
Generate Embeddings Model	Process	Jun 5, 2025, ...	Subprocess that parses the user input into a vector view and matches it with the embedded model. It re...			Valid
Get Embeddings	Process	Jun 5, 2025, ...	Subprocess that generates embedding vectors from the user input using Gemini			Valid
Query LLM with Context using Embeddings Model	Process	Jun 5, 2025, ...	Subprocess that submits a query that is received from the user, converts it into a vector, and uses it to s...			Valid
Query Pinecone	Process	Jun 5, 2025, ...	Subprocess that searches for coincidences from input vectors to vectors in the base Pinecone index sp...			Valid
Query LLM with Context using Gemini	Process	Jun 5, 2025, ...	Subprocess that prepares and sends a request to the Gemini LLM with the context			Valid
Microsoft Teams AI Agent	Process	Jun 5, 2025, ...	The process receives a query from Microsoft Teams, searches for relevant context in a vector database,...			Valid

Simple RAG Consumption with Microsoft Teams AI Agent recipe assets

The following table lists the assets that the Simple RAG Consumption with Microsoft Teams AI Agent recipe package contains:

Asset Name	Asset Type	Description
GeminiAIAgentConsumptionConnection	App Connection	Gemini connection.
MicrosoftTeamsAIAgentConnection	App Connection	Microsoft Teams connection.
PineconeAIAgentConnection	App Connection	Pinecone connection.
Generate Embeddings Model	Process	Subprocess that parses the user input into a vector view and matches it with the embedded model. It returns the matching context score and metadata.
Get Embeddings	Process	Subprocess that generates embedding vectors from the user input using Gemini.
Query LLM with Context using Embeddings Model	Process	Subprocess that submits a query that is received from the user, converts it into a vector, and uses it to search for similar vectors in a database. The top K matches are retrieved, filtered by a cutoff score, and used to form a context. This context including the original query is passed to a Large Language Model (LLM) to generate and return a comprehensive response.
Query Pinecone	Process	Subprocess that searches for coincidences from input vectors to vectors in the base Pinecone index specified as input parameter Index_Host_Pinecone and returns a result with metadata.
Query LLM with Context using Gemini	Process	Subprocess that prepares and sends a request to the Gemini LLM with the context.
Microsoft Teams AI Agent	Process	Process that receives a query from Microsoft Teams, searches for relevant context in a vector database, sends both the query and the context to an LLM, and returns the generated response to the Microsoft Teams channel.

CHAPTER 3

Using the Simple RAG Consumption with Microsoft Teams AI Agent recipe

To use the Simple RAG Consumption with Microsoft Teams AI Agent recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the Gemini connection.
3. Configure and publish the Pinecone connection.
4. Configure and publish the Microsoft Teams connection.
5. Configure and publish the processes.
6. Create webhooks in Microsoft Teams.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Simple RAG Consumption with Microsoft Teams AI Agent** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

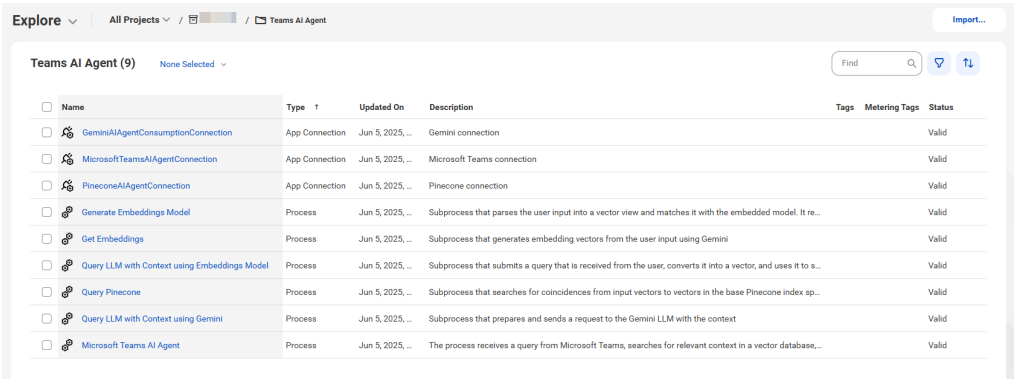

Step 2. Configure and publish the Gemini connection

Configure the API key to authenticate the Gemini connection, and then publish the GeminiAIAgentConsumptionConnection connection.

1. Open the **GeminiAIAgentConsumptionConnection** connection.
2. From the **Type** list, select **Gemini**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter the API key in the **API_Key** property. The **API_Key** property authenticates Gemini connection requests.
5. Save and publish the connection.

Step 3. Configure and publish the Pinecone connection

Configure the API key to authenticate the Pinecone connection, and then publish the PineconeAIAgentConnection connection.

1. Open the **PineconeAIAgentConnection** connection.
2. From the **Type** list, select **Pinecone**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter the API key in the **API_Key** property. The **API_Key** property authenticates Pinecone connection requests.
5. Save and publish the connection.

Step 4. Configure and publish the Microsoft Teams connection

Configure the OAuth authentication details and the Microsoft graph API version to connect to the Microsoft Teams instance, and then publish the MicrosoftTeamsAIAgentConnection connection.

1. Open the **MicrosoftTeamsAIAgentConnection** connection.
2. From the **Type** list, select **Microsoft Teams**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **OAuth2** and enter values for the following properties:


Property	Description
Authorization URL	Required. Enter the OAuth authorization URL for the OAuth provider to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Required. Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The expiration of the refresh token depends on the OAuth provider. You must re-authenticate and publish the connection before the token expires. **Note:** The refresh token doesn't apply to agents and agent groups.
Client ID	Required. Specify the identifier value from the OAuth provider.
Client Secret	Required. Enter the client secret to connect to the email application.
Scope	Required. Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For example, Channel.Create Channel.Delete.All Channel.ReadBasic.All ChannelMember.Read.All email offline_access Group.Read.All Group.ReadWrite.All.
Authorization Status	Indicates the current status, the name of the user who authorized, and the last time when the authorization was completed.
Authorize Access	Click to initiate the authorization workflow using OAuth.

5. In the **Connection Properties** section, enter the Microsoft graph API version in the **API_Version** property. The API version is used to create a Microsoft Teams connection. For example, `v1.0`.
6. Save and publish the connection.


Step 5. Configure and publish the processes

Configure the LLM model and authorization access, and then publish the processes.

1. To publish the following processes, click **Actions** in the row that contains the process and select **Publish**.
   - Get Embeddings
   - Query Pinecone
   - Generate Embeddings Model
   - Query LLM with Context using Gemini
2. Open the **Query LLM with Context using Embeddings Model** process.
3. On the **Assignments** tab of the **Set LLM Models** step, you can optionally update the LLM model values in the **Set_Content_Model** and **Set_Embedding_Model** fields.
4. Save and publish the process.
5. Open the **Microsoft Teams AI Agent** process.
6. On the **Start** tab of the Start step, select **Allow anonymous access**.
7. On the **Assignments** tab of the **Get Data from Message** step, you can optionally update the team ID value in the **Team_ID** field.
   To find the team ID, perform the following steps:
   1. Go to your team listed on the left side of the Teams app.
   2. Select **More options** > **Get link to team** as shown in the following image:

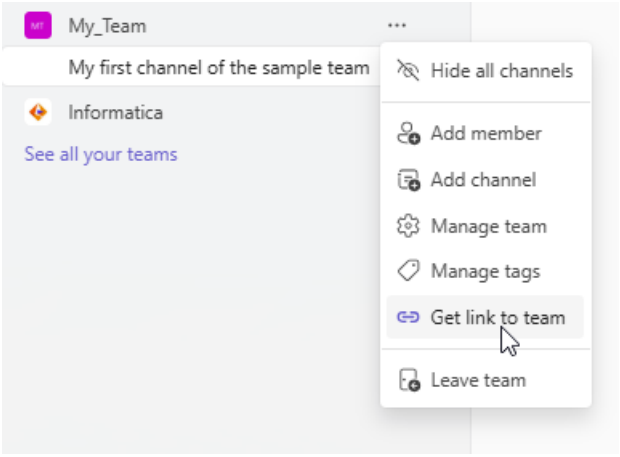

   3. Copy the group ID value as shown in the following image:

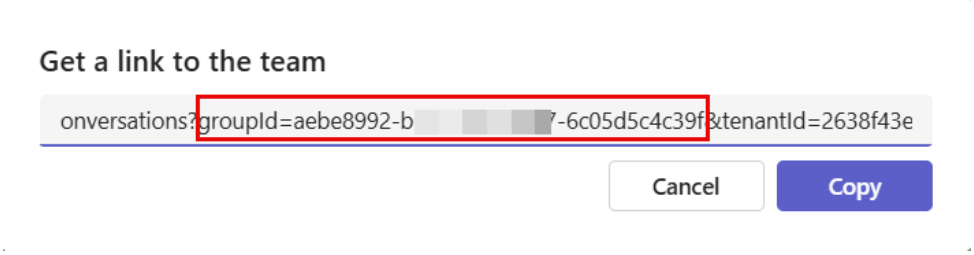

8. Save and publish the process.
9. Click **Actions** > **Properties Details** > **Copy Service URL**.


You must copy the service URL to the webhook configuration in Microsoft Teams. For more information, see "Step 6. Create webhooks in Microsoft Teams" on page 15.

Step 6. Create webhooks in Microsoft Teams


You can configure webhooks to communicate between systems when an event occurs.

To create a webhook in Microsoft Teams, perform the following steps:


1. Go to **Team** > **Manage team** > **Apps** > **Create an outgoing webhook**.
   The following image shows the steps to create an outgoing webhook in the Teams app:

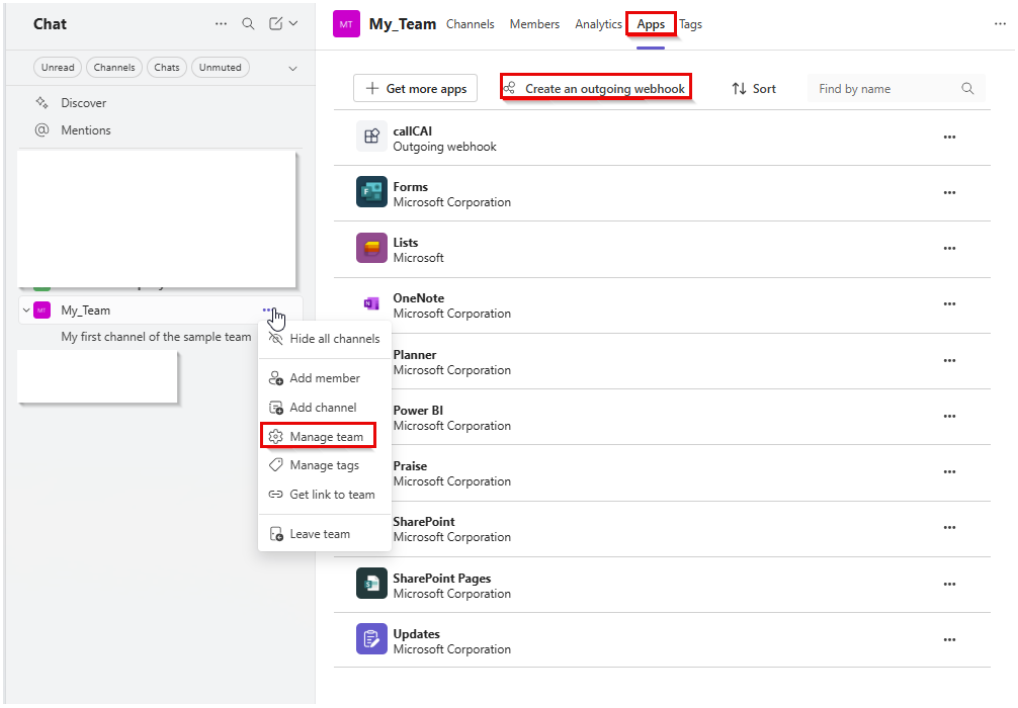

2. Enter the webhook name, the service URL that you get after publishing the process, and the description, and then click **Create** as shown in the following image:

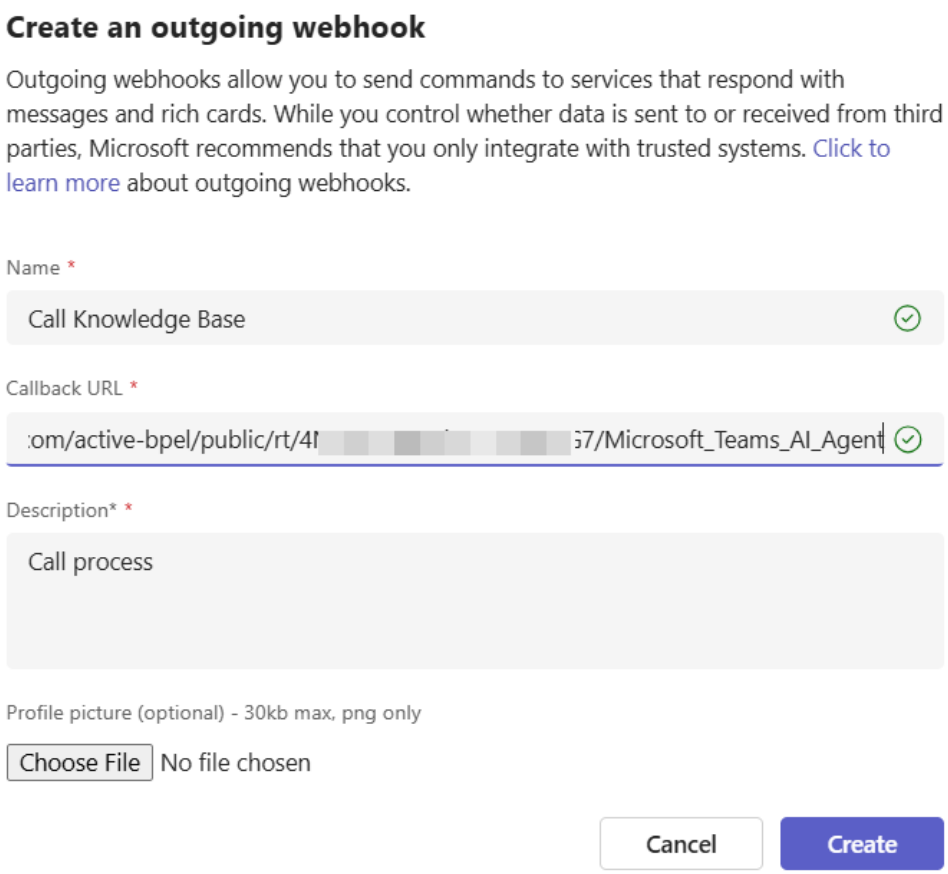

The process is triggered by a message containing the @<Webhook_Name> in the Teams channel where the webhook is deployed as shown in the following image:

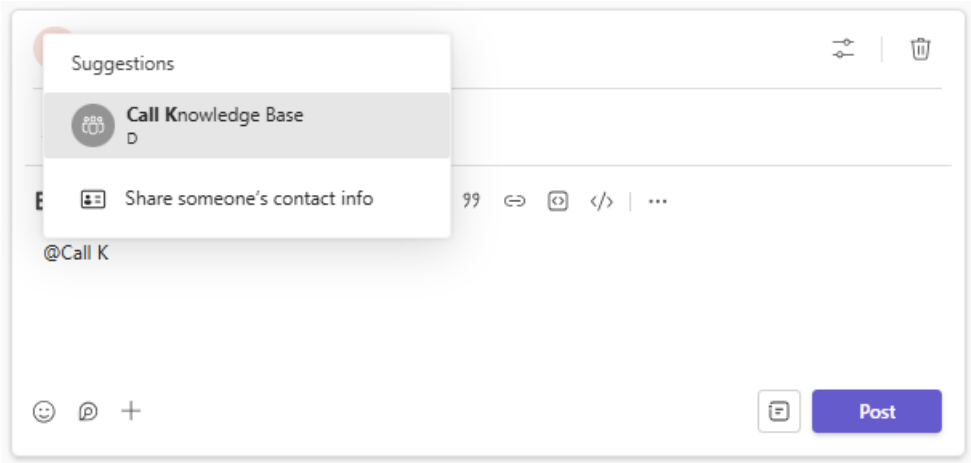

It converts the user input into a vector using the Gemini Embeddings action. This vector is then sent to Pinecone, which finds the best matches in the index vector collection based on the TopK value. The process returns an object with vectors, scores, and metadata. It filters the results using cutoff values and prepares a

request to the Gemini LLM, providing context from the Pinecone database. The response is parsed, and the answer is posted back to the same Teams channel.