Informatica® Cloud Application Integration
May 2025

Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events

Informatica Cloud Application Integration Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events
May 2025

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Synchronize Salesforce Cases with ServiceNow Incidents recipe 6

Prerequisites for configuring a Salesforce platform event 6

Configuring a Salesforce platform event to subscribe to Case object change 7

Chapter 2: Recipe contents 16

Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events recipe assets 16

Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events) 17

Chapter 3: Using the Synchronize Salesforce Cases with ServiceNow Incidents recipe 19

Copying and accessing the recipe 19

Configuring and publishing the Salesforce connection 20

Configuring and publishing the ServiceNow connection 22

Configuring and publishing the process 23

Test data synchronization from Salesforce cases to ServiceNow incidents 23

Rules and guidelines for using the Synchronize Salesforce Cases with ServiceNow Incidents recipe 24

Preface

Use *Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events* to learn how to synchronize Salesforce cases with ServiceNow incidents. This guide assumes that you have an understanding of the Salesforce connector and ServiceNow connector concepts.

CHAPTER 1

Introduction to Synchronize Salesforce Cases with ServiceNow Incidents recipe

The Synchronize Salesforce Cases with ServiceNow Incidents recipe is a platform event-based recipe.

When a case is created or updated in Salesforce, a Salesforce platform event triggers the process. The process checks whether the case contact or case owner matches with the email of the user in ServiceNow. If the user does not exist, the process creates a user in ServiceNow and assigns it as a caller to the ServiceNow incident. The process then searches for a matching incident in ServiceNow by description and creates or updates the incident based on the search results without manual intervention.

With this recipe, you can synchronize Salesforce cases with ServiceNow incidents without any manual intervention.

Watch an interactive demo to know more about how to use this recipe.

Example

Consider that the customer support team in your organization uses Salesforce to manage and maintain customer service cases. The IT team uses ServiceNow to manage and maintain incidents reported by customers, partners, and employees. Every time the customer support team creates or updates a customer case, they communicate the relevant case details manually to the IT team. The IT team then verifies whether the case exists as an incident in their database. If the incident does not exist, the team creates an incident manually.

To improve the case and incident management and team collaboration, both teams need immediate access to critical customer data about product issues.

Prerequisites for configuring a Salesforce platform event

The Synchronize Salesforce Cases with ServiceNow Incidents recipe uses Salesforce platform events. To configure a Salesforce platform event, the following prerequisites must be met:

- Create a Salesforce platform event in the Salesforce organization before setting up a Salesforce connection and real-time process in Application Integration to consume the Salesforce event. For more information about configuring a Salesforce platform event for the first time, see “Configuring a Salesforce platform event to subscribe to Case object change” on page 7.

- Install a Secure Agent on which you want to deploy the connections. For more information, see Secure Agent installation in a local environment.

Configuring a Salesforce platform event to subscribe to Case object change

Salesforce connections in Application Integration support the Salesforce Streaming API. You can configure an event source in a Salesforce connection to subscribe to Salesforce platform events and PushTopic queries. You can use the event source in a process to consume changes in real-time.

For more information about setting up Salesforce platform events, see the Informatica Knowledge Base article 000181147.

To set up the Salesforce platform event, perform the following steps:

Step 1: Create a platform event

Step 2: Create a new connected app

Step 3: Set object permissions


Step 4: Create a trigger to generate an event

Create a platform event


To create a platform event in Salesforce, perform the following steps:

1. Log in to the Salesforce organization.
2. Go to **Setup** > **Develop** > **Platform Events**, and then click **New Platform Event**.

   The following image shows the **New Platform Event** button and the platform event name on the **Platform Events** page:

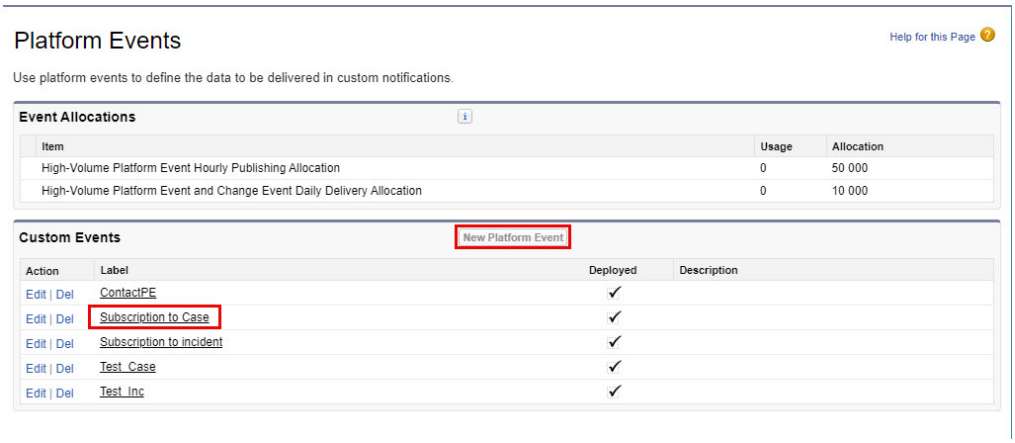

3. In the **Platform Event Information** section, enter the details in the **Label**, **Plural Label**, and **Object Name** fields, and select **Publish Immediately** in the **Publish Behavior** field as shown in the following image:

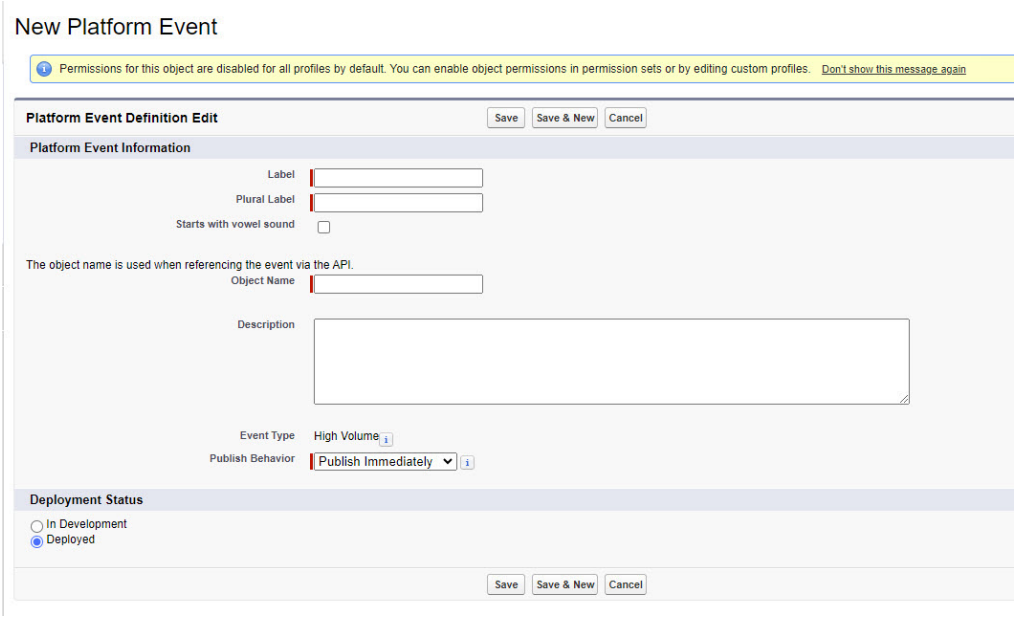

4. Click **Save**.


   The Salesforce platform event is created successfully. Note the **API Name** field value. You will need to enter it in the **Event Consumer** field while configuring the Salesforce connection.

5. Open the Salesforce platform event that you just created.

6. In the **Custom Field & Relationships** section, add custom fields named **Case ID** and **Description** with the **Text** data type.

   Note: You must create a custom field in Salesforce with the **Text** data type.

   The following image shows the API name and the fields that you created in the Salesforce platform event:

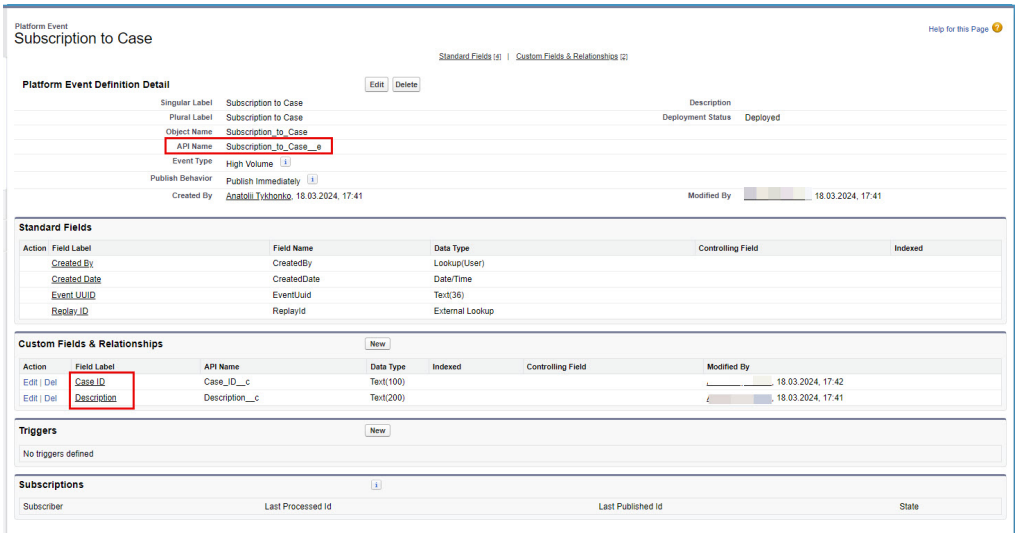


Create a new connected app

In the connected app, you provide the necessary permissions and consume the platform event. From this connected app, you will get the consumer key and consumer secret that you will need while configuring the Salesforce connection.

1. Go to **Setup** > **Build** > **Create** > **Apps** > **Connected Apps**, and then click **New**.

   The following image shows the **New** button in the **Connected Apps** section on the **Apps** page:

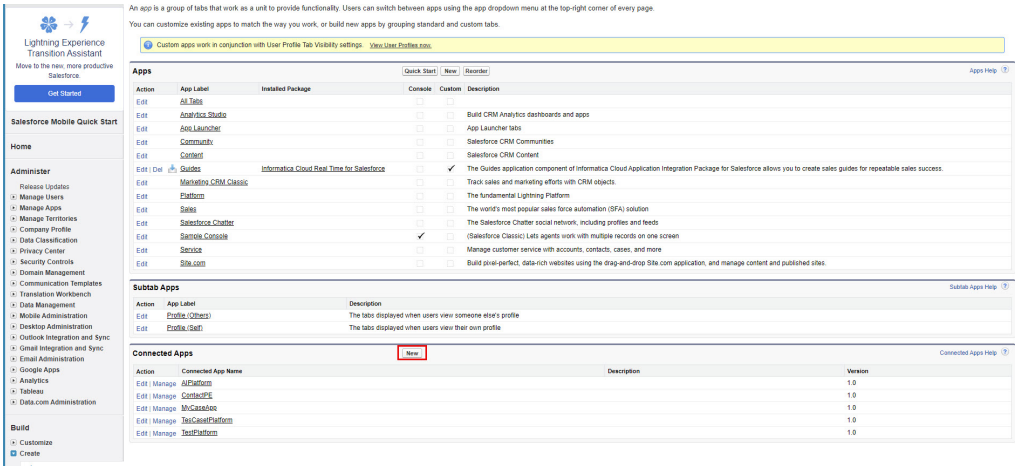


2. Enter the details in the **Connected App Name**, **API Name**, and **Contact Email** fields.
3. Select the **Enable OAuth Settings** option.
4. In the **Callback URL** field, enter the callback URL as shown in the following format:

   `https://<pod name>.informaticacloud.com/login/callback`

5. Provide the necessary access in the **Selected OAuth Scopes** field. If you are not sure about the access, select all the options from the **Available OAuth Scopes** section, and click **Add**.


   The selected options are displayed in the **Selected OAuth Scopes** section.

   The following image shows the **Connected App Name** page:

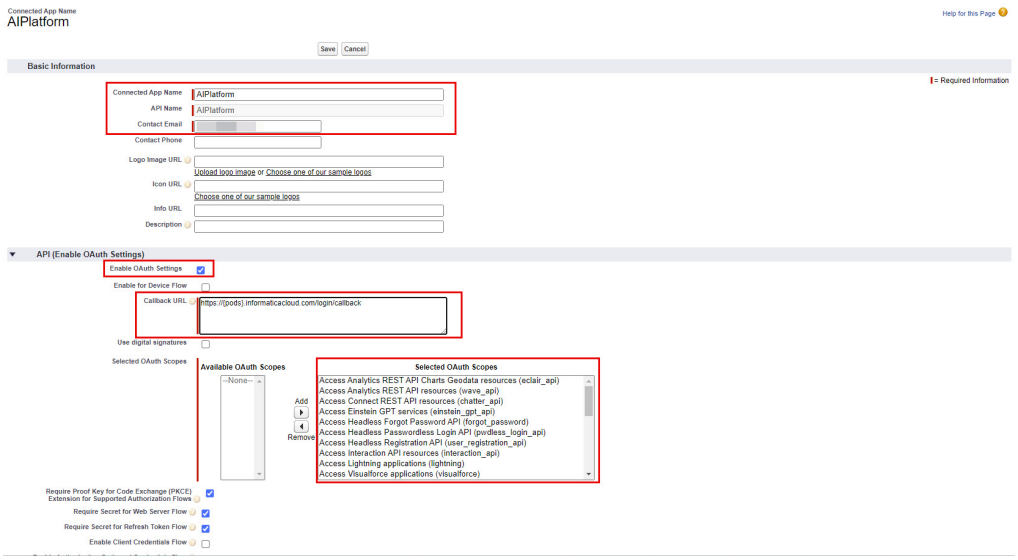

6. Click **Save**.


7. Go to the **API (Enable OAuth Settings)** section and click **Manage Consumer Details** as shown in the following image:

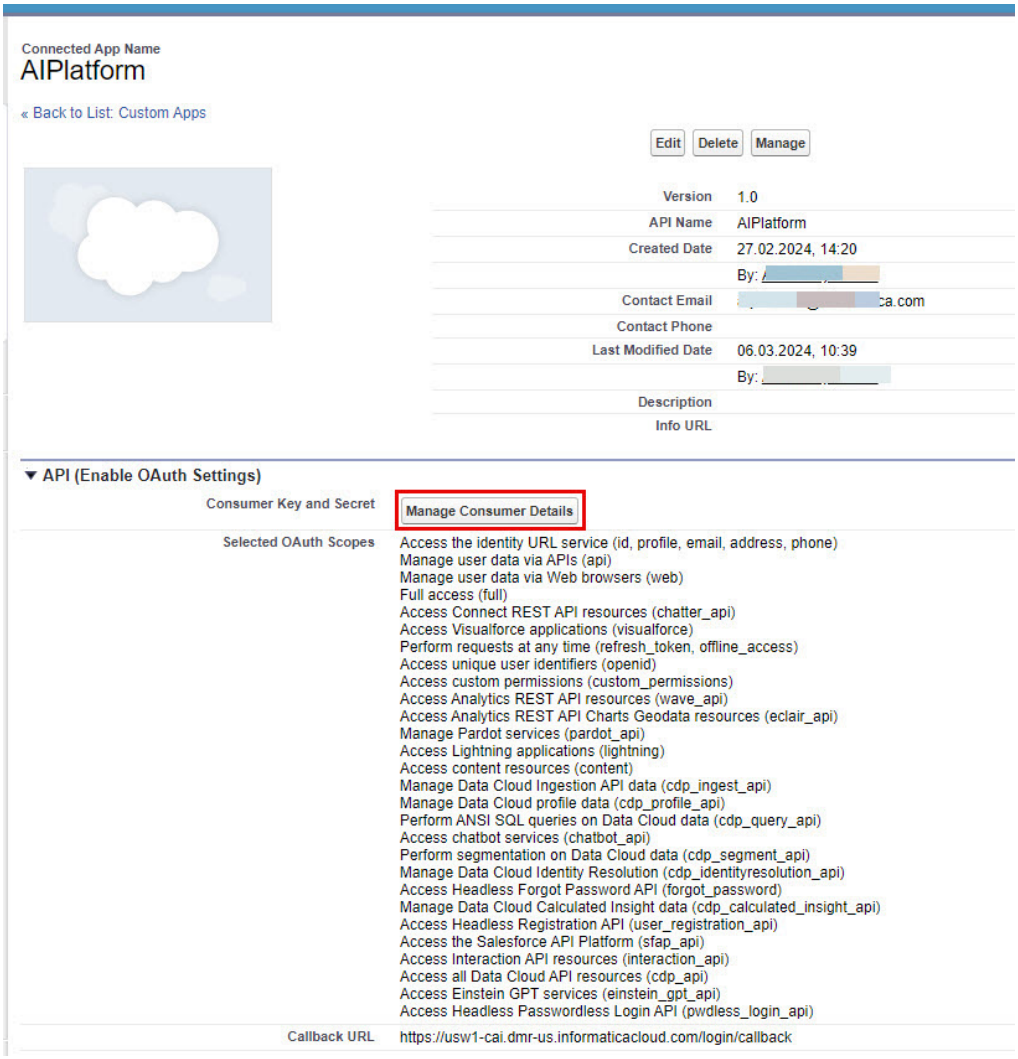

The **Consumer Key** and **Consumer Secret** fields are displayed.

8. Save the consumer key and consumer secret values for your future use.
9. Click **Manage** > **Edit policies** > **IP Relaxation**.

   The following image shows the **IP Relaxation** field in the **Connected App Edit** page:

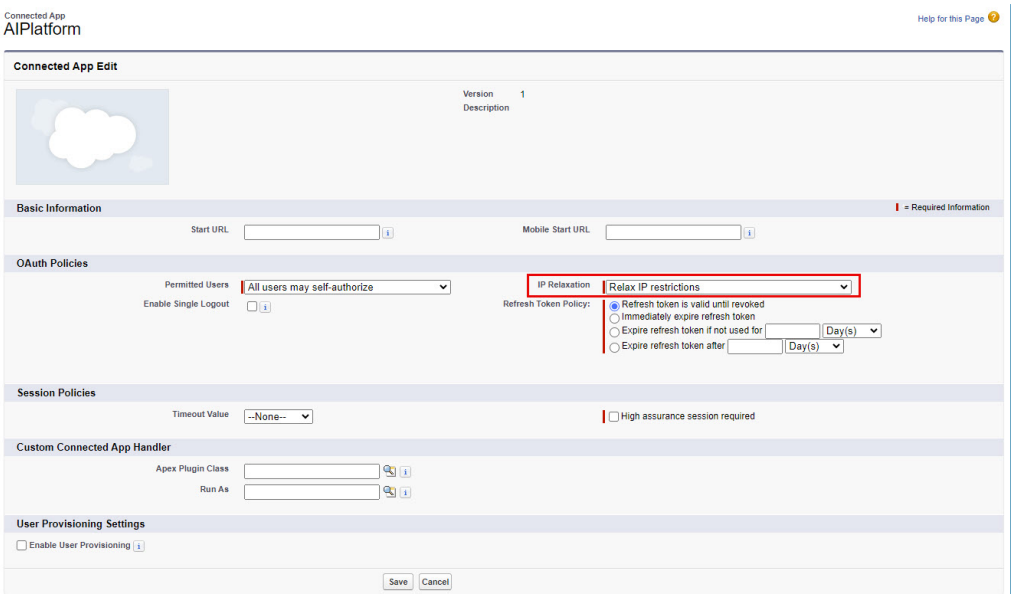


10. Select **Relax IP restrictions** in the **IP Relaxation** field.
11. Click **Save**.

Set object permissions

To set up the platform event with the necessary permissions, perform the following steps:


1. Go to **Setup** > **Manage Users** > **Profiles**, and then click **Edit** next to the profile name, or if you are not sure, click **Edit** next to **All Profiles**.

   The following image shows the list of profiles on the **Profiles** page:

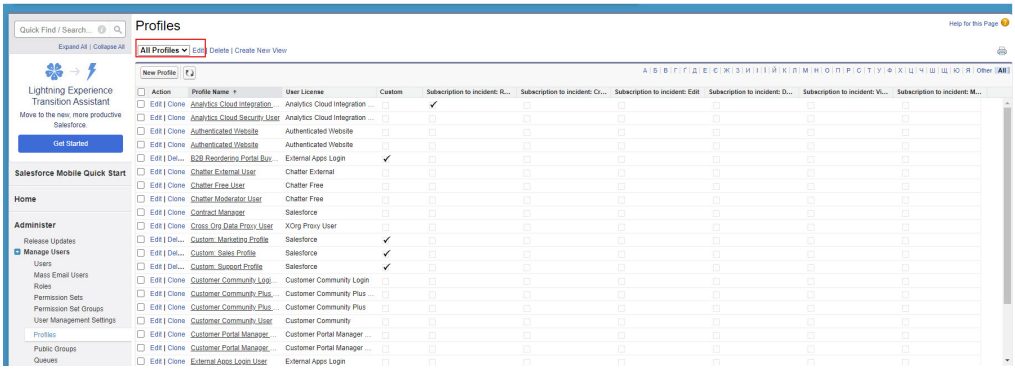

2. In the **Select Columns to Display** section, select **Object Permissions** in the **Search** field.
3. In the **Available Settings** section, select the platform event that you just created.
4. Add all the required permissions.

   The following image shows the settings in the **Select Columns to Display** section:

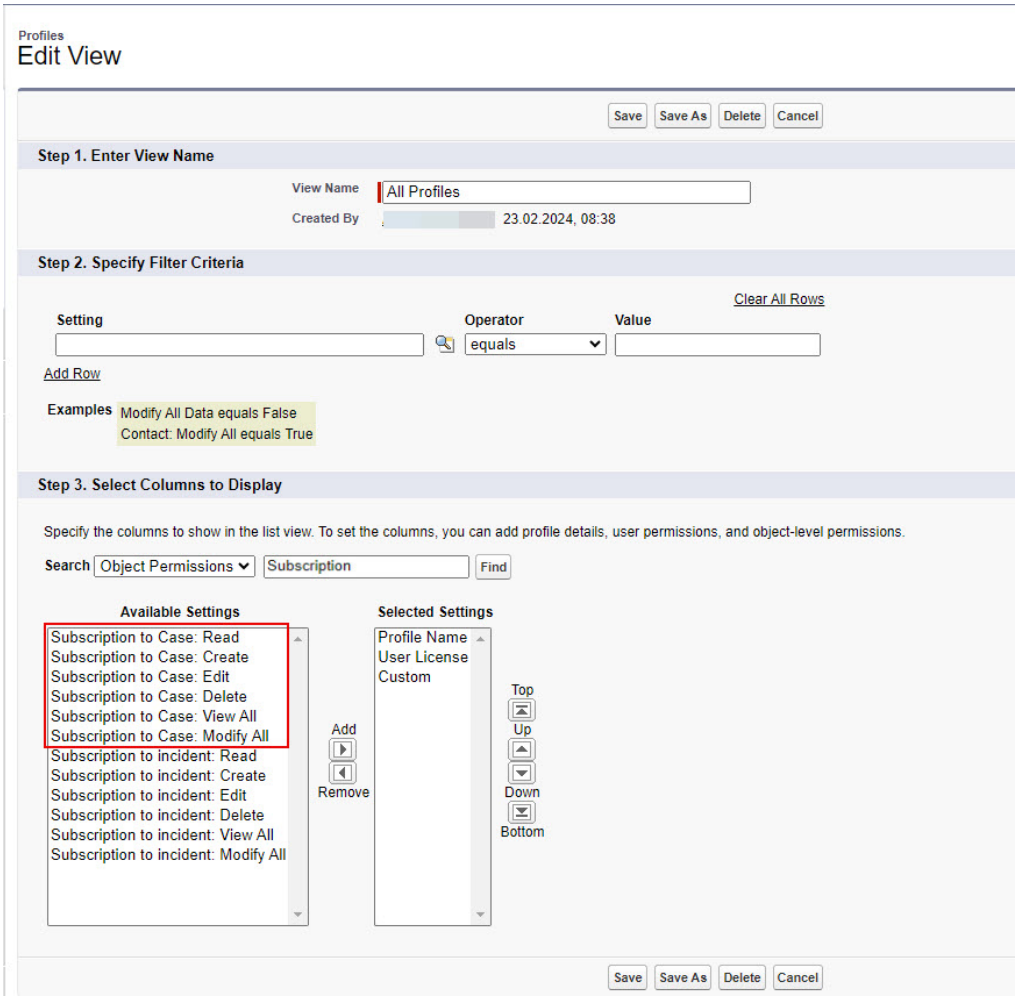

5. Click **Save**.

   You can use this platform event in the Salesforce connection in Application Integration, and the Salesforce connection can be used in a real-time process to consume Salesforce events.


Create a trigger to generate an event

To create a trigger to generate an event, perform the following steps:

Note: Informatica recommends that you use the Salesforce Lightning Experience as Salesforce plans to retire Process Builder and recommends building automation in Flow Builder.


1. Go to **Setup** > **Process Automation** > **Flows**, and then click **New Flow**.

   The following image shows the list of flows on the **Flows** page:

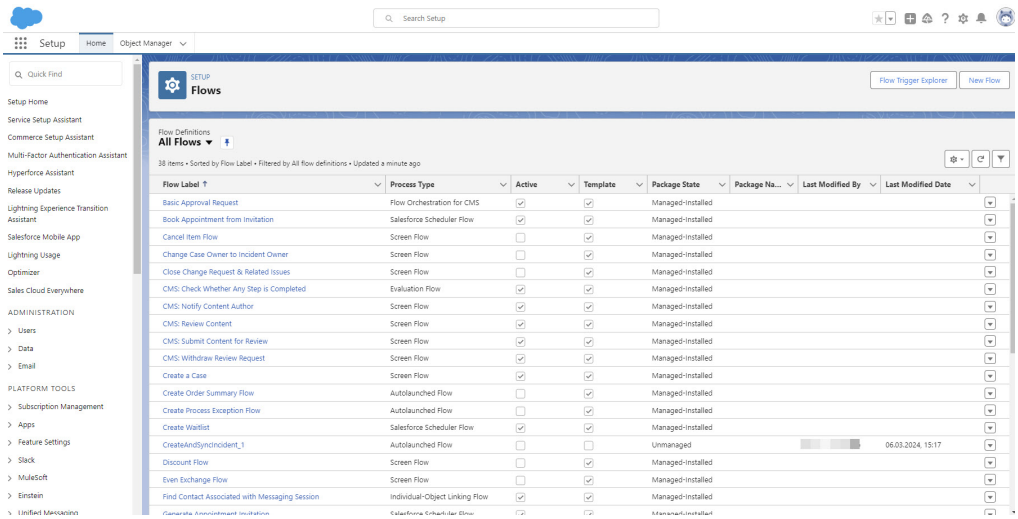


2. Select **Record-Triggered Flow**.

   The following image shows the **Record-Triggered Flow** on the **New Flow** dialog box:

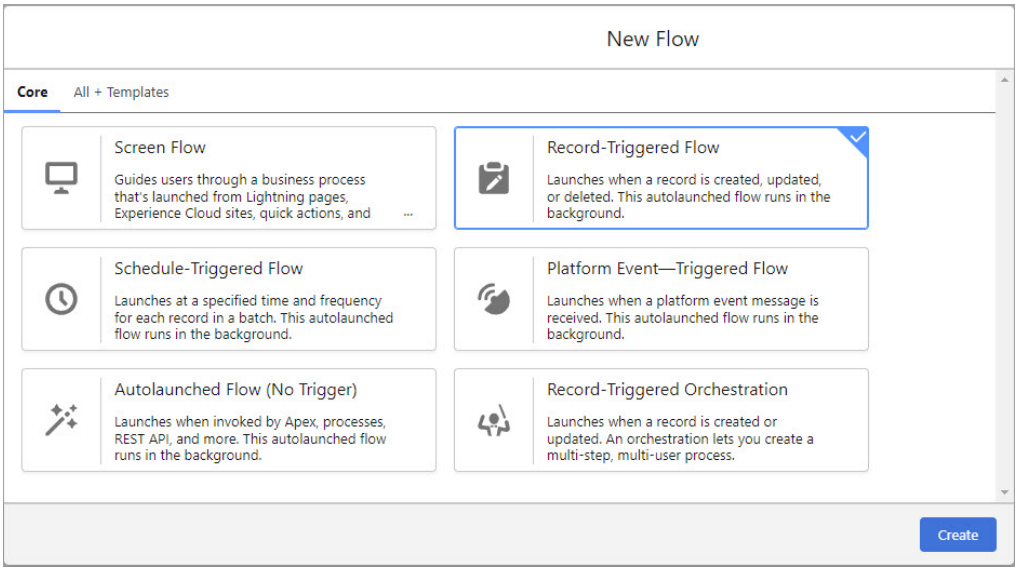


3. Click **Create**.
4. In the **Object** field, select the object as **Case**.
5. In the **Configure Trigger** section, select the **A record is created or updated** option.

   The following image shows the **Flow Builder** page:

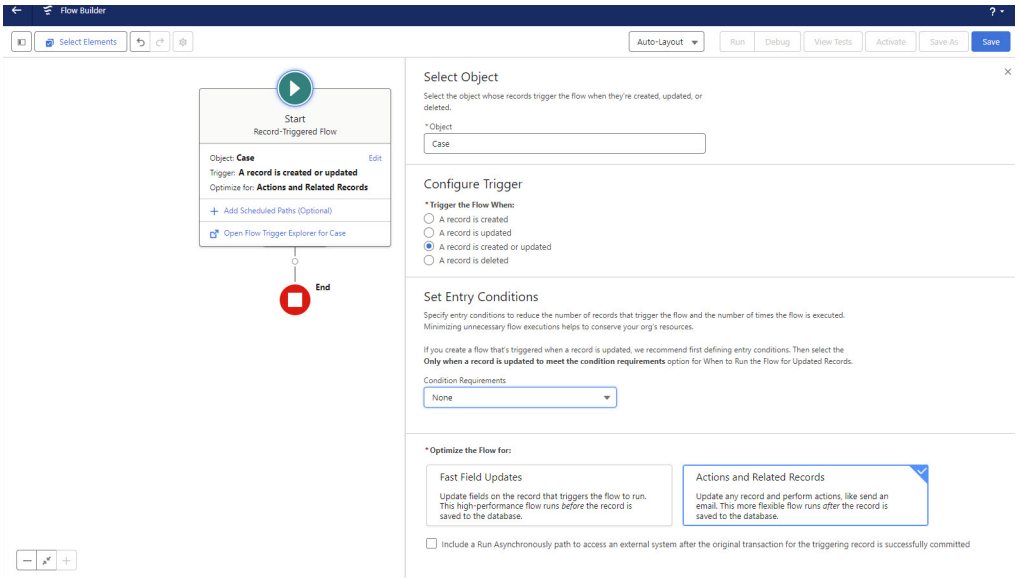

6. Add a new element in the flow builder space, **Data** > **Create Records**.
7. Enter values in the **Label** and **API Name** fields.
8. In the **How Many Records to Create** field, select **One**.
9. In the **How to Set the Record Fields** field, select **Use separate resources, and literal values**.
10. In the **Create a Record of This Object** section, enter the name of the Salesforce platform event you created in the **Object** field.
11. In the **Set Field Values for the Subscription to Case** field, map the fields in the Salesforce platform event using the **{!$Record}** in the **Value** field.

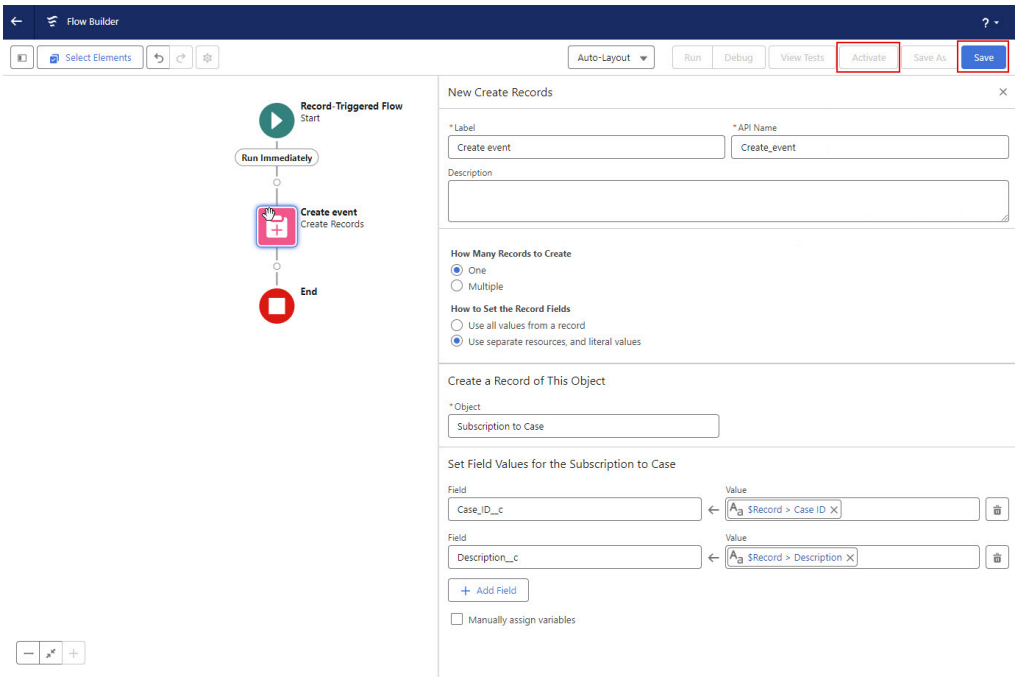

12. Click **Save** and **Activate**.


    After completing these steps, you have the event consumer, consumer key, and consumer secret values for setting up the Salesforce connection in Application Integration.

CHAPTER 2

Recipe contents

The recipe contains multiple assets such as process objects, app connections, and a process.

The following image shows the assets that the Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events recipe package contains:

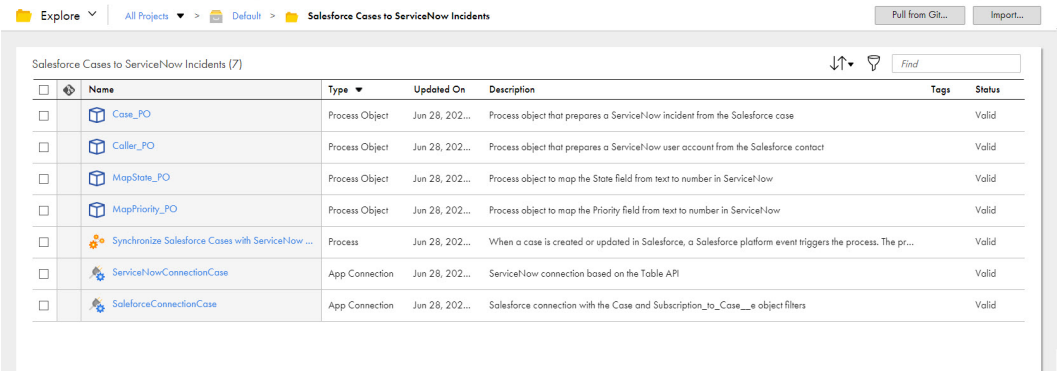

Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events recipe assets

The following table lists the assets that the Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events recipe package contains:

Asset Name	Asset Type	Description
Caller_PO	Process object	Prepares a ServiceNow user account from the Salesforce contact.
Case_PO	Process object	Prepares a ServiceNow incident from the Salesforce case.
MapPriority_PO	Process object	Maps the **Priority** field from the text data type to the number data type in ServiceNow.
MapState_PO	Process object	Maps the **State** field from the text data type to the number data type in ServiceNow.


Asset Name	Asset Type	Description
SalesforceConnectionCase	App connection	Connects to the Salesforce platform event with the **Case** and **Subscription_to_Case__e** object filters.
ServiceNowConnectionCase	App connection	Connects to ServiceNow based on the Table API.
Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events)	Process	When a case is created or updated in Salesforce, perform steps to synchronize data from Salesforce cases to ServiceNow incidents.

Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events)

When a case is created or updated in Salesforce, a Salesforce platform event triggers the process.

The process checks whether the case contact or case owner matches with the email of the user in ServiceNow. If the user does not exist, the process creates a user in ServiceNow and assigns it as a caller to the ServiceNow incident. The process then searches for a matching incident in ServiceNow by description and creates or updates the incident based on the search results. If the description is modified in the Salesforce case, a new incident is created in ServiceNow with the modified description.

The following image shows the steps that the Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events) process contains:

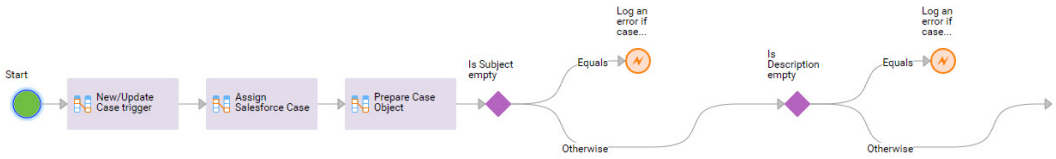

The following table lists the steps that the Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events) process contains:

Step Name	Description
Start	The event searches for the Salesforce platform event name, that is, the Salesforce connection case.
New/Update Case trigger	Assigns the event details to the case ID and description and triggers the event to verify whether the case was created or updated.
Assign Salesforce Case	Assigns the Salesforce case to a temporary case ID.
Prepare Case Object	Parses the event and assigns values.
Is Subject empty	Verifies whether the case subject is empty. If it is empty, an error occurs, and the process ends. Otherwise, the process continues to the next step.

Step Name	Description
Is Description empty	Verifies whether the case description is empty. If it is empty, an error occurs, and the process ends. Otherwise, the process continues to the next step.
Get Access Token	Gets an access token to authorize all the connection requests.
Search User in ServiceNow by Email	Searches for the user by email if it is specified in the Salesforce case.
Save User ID	Saves the user ID.
Is User ID missing in ServiceNow	If the user ID is missing in ServiceNow, creates a user in ServiceNow and gets the user ID. Otherwise, the process continues to the next step.
Is Contact in Case set	Searches for the user by email in ServiceNow and saves the owner ID. The process then searches for the owner ID in ServiceNow. If the owner ID is missing in ServiceNow, creates a user as an owner in ServiceNow and gets the owner ID. Otherwise, saves the owner ID.
Search Incident in ServiceNow by Description	Searches for the incident by description in ServiceNow.
Get Incident ID	Gets the incident ID.
Is Incident ID missing in ServiceNow	Verifies whether the incident ID is missing in ServiceNow. If the incident ID exists, updates the incident. Otherwise, creates a new incident.
End	Ends the process.

CHAPTER 3

Using the Synchronize Salesforce Cases with ServiceNow Incidents recipe

To use the Synchronize Salesforce Cases with ServiceNow Incidents recipe, you must perform the following steps manually:

Step 1: Copy and access the recipe

Step 2: Configure and publish the Salesforce connection

Step 3: Configure and publish the ServiceNow connection

Step 4: Configure and publish the process

Step 5: Test data synchronization from Salesforce cases to ServiceNow incidents

Copying and accessing the recipe


To copy and access the recipe content, perform the following steps:

1. Open the **Synchronize Salesforce Cases with ServiceNow Incidents based on Platform Events** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

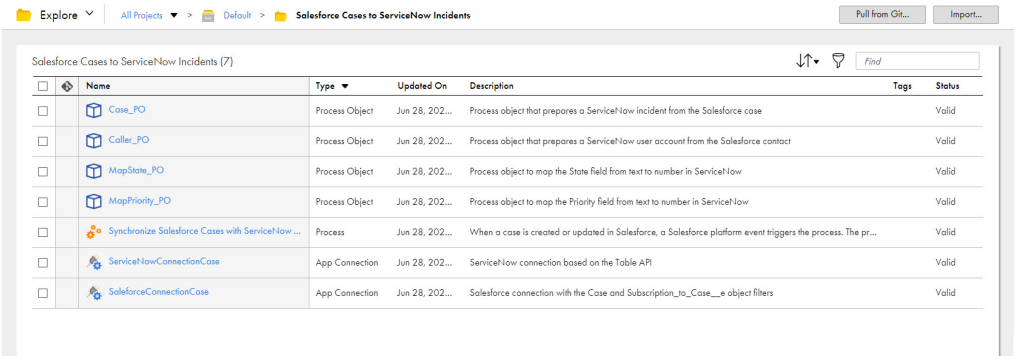

Configuring and publishing the Salesforce connection


To create a Salesforce connection that supports a Salesforce platform event, perform the following steps:

1. Open the **SalesforceConnectionCase** connection.
2. From the **Runtime Environment** list, select the Secure Agent.
3. From the **Authentication Type** list, select **Password** or **OAuth** as required.


   Based on the authentication type selected, perform one of the following steps:

   - For **Password** authentication:
     1. Enter values for the following properties:
        - User Name: Salesforce developer account user name.
        - Password: Salesforce developer account password.
        - Security Token: Salesforce security token.
     2. In the **Event API Settings** section, enter values in the **Consumer Key** and **Customer Secret** fields. For information about generating the **Consumer Key** and **Customer Secret** values, see "Create a new connected app" on page 9.

3. In the **Connection Properties** section, in the **Object Filter** field, enter the API name of the Salesforce platform event prefixed with **Case**. For example, **Case,Subscription_to_Case__e**. The following image shows the API name of the Salesforce platform event:

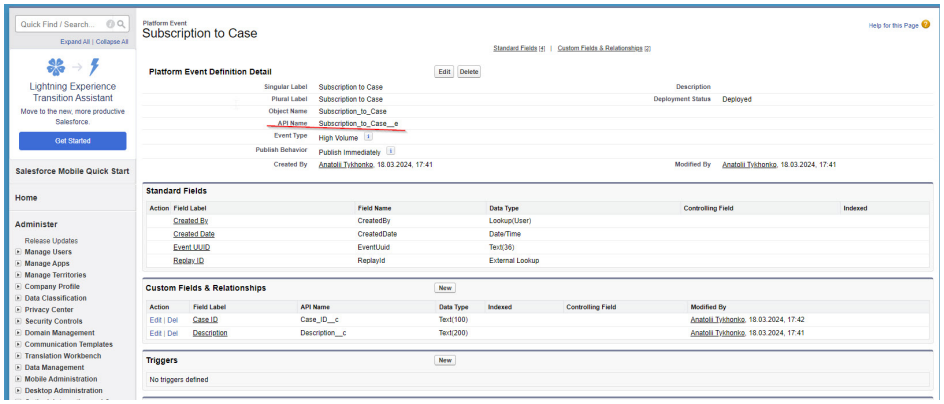

The following image shows the **SalesforceConnectionCase** connection detail page with the authentication type set to **Password**:

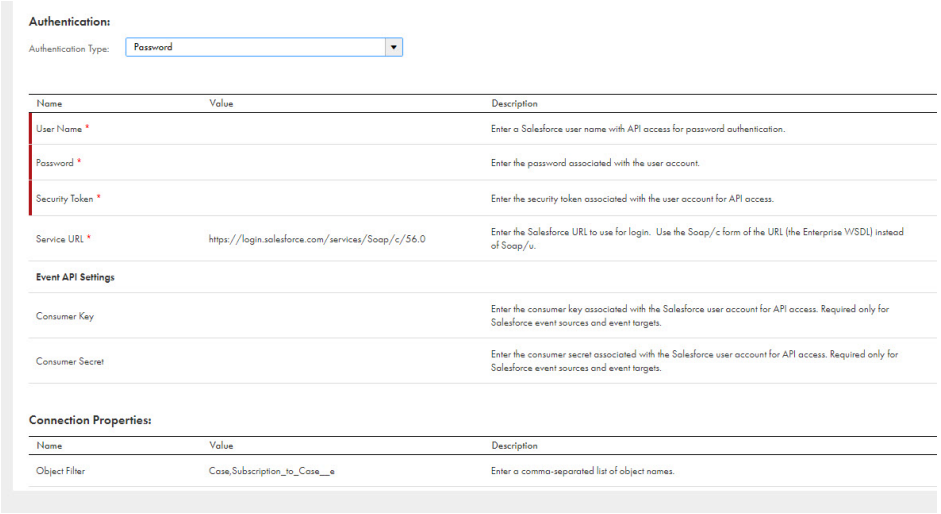

- For **OAuth** authentication, enter values for the following properties:

  - Authentication URL: Endpoint used to make OAuth authorization requests to Salesforce.


  - Token Request URL: Endpoint used to make OAuth token requests to Salesforce.

  - Session Duration: Number of minutes after which the OAuth token expires.

  - Authorize access: Click **Authorize** > enter Salesforce developer account credentials > click **Allow**.

  The OAuth authentication process starts. You can check the current authorization status in the **Authorization Status** property.

  The following image shows the **SalesforceConnectionCase** connection detail page with the authentication type set to **OAuth**:

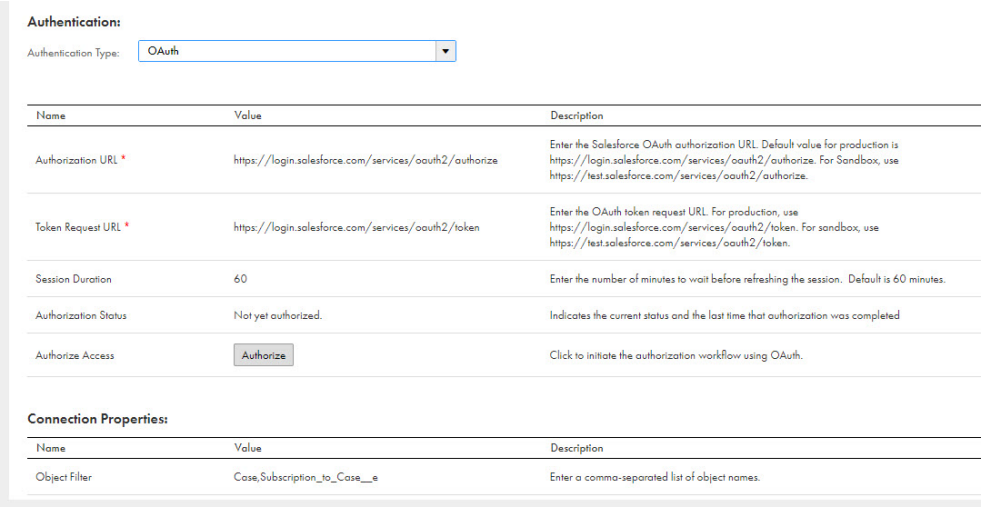

4. On the **Event Sources** tab, enter the API name of the Salesforce platform event prefixed with **/event/** in the **Event Consumer** field. For example, **/event/Subscription_to_Case__e**.

   When the Salesforce platform event is called, the event refers to the value specified in this field.

   Note: Ensure that the value in the **Event Consumer** field is the same as the event consumer you created for the platform event in the Salesforce organization.
5. Save and publish the connection.

Configuring and publishing the ServiceNow connection

To configure and publish a ServiceNow connection, perform the following steps:

1. Open the **ServiceNowConnectionCase** connection.
2. From the **Type** list, select **ServiceNow**.
3. From the **Runtime Environment** list, select the Secure Agent.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client ID	ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client Secret	ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User Name	ServiceNow user name with the security_admin role to generate client credentials in the ServiceNow instance.
Password	Password associated with the ServiceNow user account.

Property	Description
Service URL	URL to access the ServiceNow instance.
Grant type	Grant type that the ServiceNow instance uses to get an access token for third-party clients authorization. Enter the value as **password**.

5. Save and publish the connection.

Configuring and publishing the process

1. Open the **Synchronize Salesforce Cases with ServiceNow Incidents (using Platform Events)** process.
2. On the **Start** tab of the Start step, select the Secure Agent in the **Run On** field.
3. Optionally, you can change the tracing level from **Verbose** to **None** on the **Advanced** tab.
4. Save and publish the process.

Test data synchronization from Salesforce cases to ServiceNow incidents

After you publish the process, whenever a Salesforce case is created or updated, the Salesforce platform event triggers the process, and the details are synchronized with the ServiceNow incident without manual intervention.

The following table shows the fields that are synchronized between the Salesforce case and the ServiceNow incident:

Salesforce - Case	ServiceNow - Incident
Number	Number
Contact or Case Owner if the contact is empty	Caller
Subject	Short description
Description	Description
Case Origin (Phone, Email)	Channel
Urgency, Impact (Priority set automatically)	Priority
Create Date	Create Date
Last modify Date	Last modify Date
Owner	Assigned To

Rules and guidelines for using the Synchronize Salesforce Cases with ServiceNow Incidents recipe

Consider the following rules and guidelines when working with the Synchronize Salesforce Cases with ServiceNow Incidents recipe:

- You must use the same Secure Agent to configure the service connector, app connections, and process that are packaged in the recipe.
- You must first configure the connections in the recipe and publish them before opening or updating the process. Otherwise, the process will contain empty fields from the connections and will become invalid.
- Informatica recommends that you use the same names configured for the assets in the recipe. If you use the same asset names, you can publish all the assets and synchronize the data from Salesforce cases with ServiceNow incidents without any issue. However, if you change the names, you must ensure that you update the names in the related fields in other assets.
  For example, if you change the platform event name in Salesforce from **Subscription_to_Case** to a different name, you must use the same name in the **Event Consumer** field in the SalesforceConnectionCase connection, and in the event source name in the Start step of the process.
- If the tenant already contains connections with the same name as the connections added from the package, the process in the recipe becomes invalid. This is because the newly added connection name contains the suffix `-2`. For example, `<connection_name>-2`.
  In this case, you must manually reselect the connections with the new name and the event values in the next steps of the process wherever applicable.