Informatica® Cloud Application Integration
May 2025

# Synchronize Shopify Orders with NetSuite Sales Orders

Informatica Cloud Application Integration Synchronize Shopify Orders with NetSuite Sales Orders
May 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

# Table of Contents


**Preface** . . . . . 5

**Chapter 1: Introduction to Synchronize Shopify Orders with NetSuite Sales Orders recipe** . . . . . 6

Prerequisites for creating a custom field in NetSuite . . . . . 6

**Chapter 2: Synchronize Shopify Orders with NetSuite Sales Orders recipe contents** . . . . . 8

Synchronize Shopify Orders with NetSuite Sales Orders recipe assets . . . . . 8

**Chapter 3: Using the Synchronize Shopify Orders with NetSuite Sales Orders recipe** . . . . . 10

Step 1. Copy and access the recipe . . . . . 10

Step 2. Configure and publish the Shopify connection . . . . . 11

Step 3. Configure and publish the NetSuite connection . . . . . 12

Step 4. Configure and publish the processes . . . . . 12

Step 5. Create webhooks in Shopify . . . . . 13

Data synchronization from Shopify orders to NetSuite sales orders . . . . . 15

Rules and guidelines for using the recipe . . . . . 15

# Preface

Use *Synchronize Shopify Orders with NetSuite Sales Orders* to learn how to synchronize Shopify orders with NetSuite sales orders based on a webhook request from Shopify. This guide assumes that you have an understanding of the Shopify Connector and NetSuite Connector concepts.

CHAPTER 1

# Introduction to Synchronize Shopify Orders with NetSuite Sales Orders recipe

The Synchronize Shopify Orders with NetSuite Sales Orders recipe is based on REST and SOAP APIs. Use the recipe to synchronize a Shopify order with a NetSuite sales order based on a webhook request from Shopify without manual intervention.

When an order is created or updated in Shopify, Shopify sends a webhook and triggers the process. The process uses Shopify ID to search for a sales order in NetSuite. If the sales order exists, the process is terminated.

The process then creates all products from the order in NetSuite. If a product with the same name already exists, it retrieves the product's ID instead of creating a new product. The process either creates or updates the customer record in NetSuite based on the order vendor, that is, shop information.


The process then creates a sales order using the data from the Shopify order. The process does not update existing sales orders.

The process requires webhook configuration in Shopify.


## Prerequisites for creating a custom field in NetSuite

Create a `Shopify ID` custom field in the NetSuite sales order entity.

1. Log in to the NetSuite organization.
2. Go to **Customization** > **Lists, Records, & Fields** > **Entity Fields** > **New**.
   The following image shows the **Custom Entity Field** page:

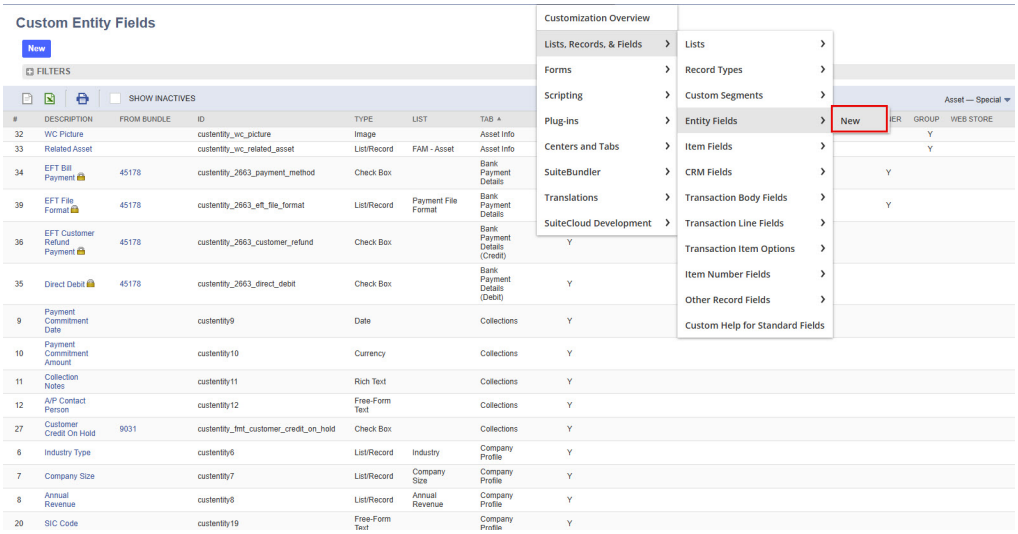


3. Go to **Customization** > **Lists, Records, & Fields** > **Transaction Body Fields** > **New**.
The following image shows the **Transaction Body Field** page:

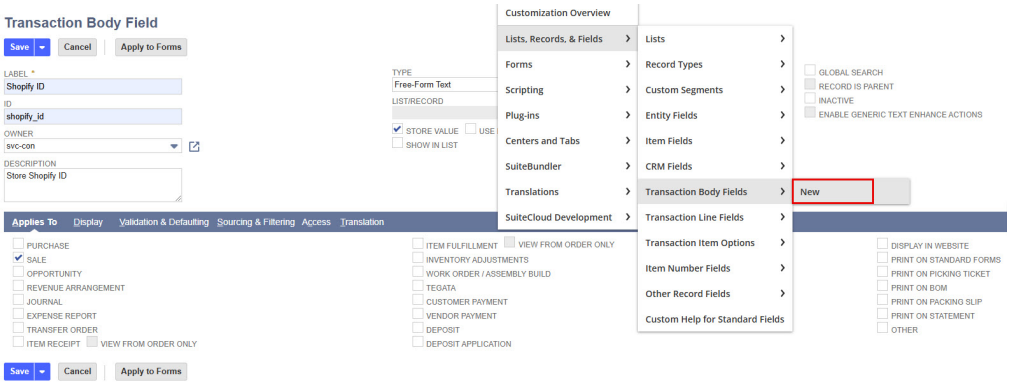



4. On the **Transaction Body Field** page, enter the value as `Shopify ID` in the **LABEL** field, `shopify_id` in the **ID** field, and select **SALE** on the **Applies To** tab.
These values are used to search for a matching sales order.
5. Click **Save**.

CHAPTER 2

# Synchronize Shopify Orders with NetSuite Sales Orders recipe contents

The recipe contains multiple assets, such as process objects, app connections, and processes.

The following image shows the assets that the Synchronize Shopify Orders with NetSuite Sales Orders recipe package contains:

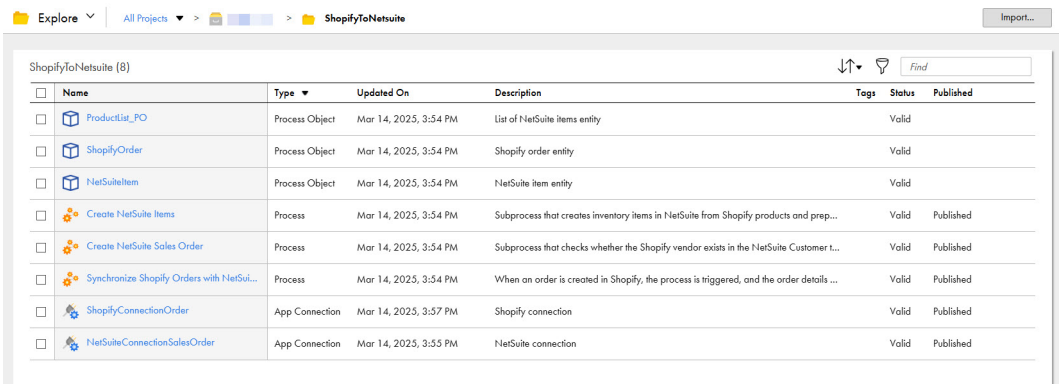


## Synchronize Shopify Orders with NetSuite Sales Orders recipe assets

The following table lists the assets that the Synchronize Shopify Orders with NetSuite Sales Orders recipe package contains:

| Asset Name | Asset Type | Description |
|---|---|---|
| ProductList_PO | Process object | List of NetSuite items entity. |
| ShopifyOrder | Process object | Shopify order entity. |

| Asset Name | Asset Type | Description |
|---|---|---|
| NetSuiteItem | Process object | NetSuite item entity. |
| ShopifyConnectionOrder | App connection | Shopify connection. |
| NetSuiteConnectionSalesOrder | App connection | NetSuite connection. |
| Create NetSuite Items | Process | Subprocess that creates inventory items in NetSuite from Shopify products and prepares process objects for creating sales orders. |
| Create NetSuite Sales Order | Process | Subprocess that checks whether the Shopify vendor exists in the NetSuite Customer table. If the vendor does not exist, the process creates a customer based on the vendor data. The process then creates a sales order based on the Shopify order. |
| Synchronize Shopify Orders with NetSuite Sales Orders | Process | When an order is created in Shopify, the process is triggered, and the order details are synchronized with a NetSuite sales order.<br>The process requires webhook configuration in Shopify. |

CHAPTER 3

# Using the Synchronize Shopify Orders with NetSuite Sales Orders recipe

To use the Synchronize Shopify Orders with NetSuite Sales Orders recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the Shopify connection.
3. Configure and publish the NetSuite connection.
4. Publish the processes.
5. Create webhooks in Shopify.

## Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Synchronize Shopify Orders with NetSuite Sales Orders** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

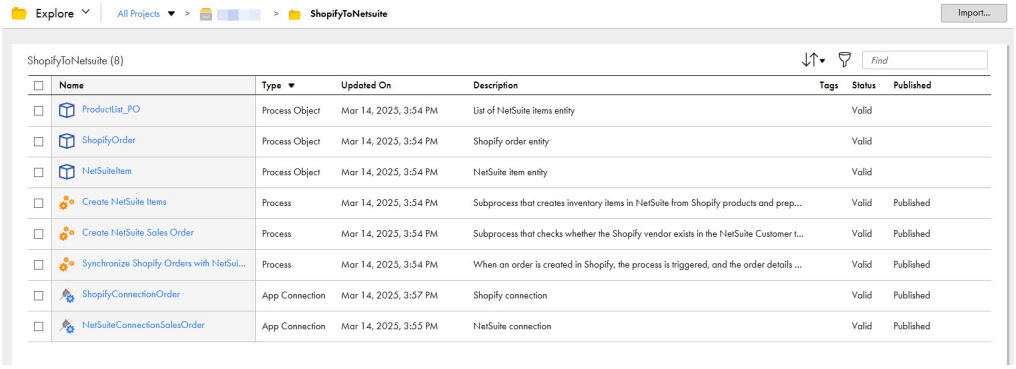


# Step 2. Configure and publish the Shopify connection

Configure the store name, version, and access token in the ShopifyConnectionOrder connection, and then publish the connection.

1. Open the **ShopifyConnectionOrder** connection.
2. From the **Type** list, select **Shopify**.
3. From the **Run On** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

| Property | Description |
|---|---|
| store_name | The unique identifier for a Shopify store. It is a subdomain of the store's `.myshopify.com` domain. For example, if the store's domain is `example-store.myshopify.com`, `example-store` is the store name. |
| version | The Shopify GraphQL Admin API version. For example, 2025-01. |
| access_token | The secure credential that is used to authenticate API requests to a Shopify store. You can obtain the access token during the OAuth authentication process when installing an app on a Shopify store. |

5. Save and publish the connection.

# Step 3. Configure and publish the NetSuite connection

Configure the client ID, instance URL, certificate ID, and private key in the NetSuiteConnectionSalesOrder connection, and then publish the connection.

1. Open the **NetSuiteConnectionSalesOrder** connection.
2. From the **Type** list, select **NetSuite**.
3. From the **Run On** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

| Property | Description |
|---|---|
| Client ID | NetSuite OAuth 2.0 client ID to generate a valid access token. Enter the client ID that you generated from the **Integration** page in NetSuite. |
| Certificate ID | NetSuite certificate ID that you generated using **OAuth 2.0 Client Credentials**. NetSuite certificate ID that you generated under **Setup** > **Integration** > **Manage Authentication** > **OAuth 2.0 Client Credentials** (M2M) Setup in NetSuite. |
| Instance URL | NetSuite applications suite instance URL.<br>Enter the instance URL in the following format:<br>`https://[accountid].suitetalk.api.netsuite.com` |
| Certificate Private Key | NetSuite certificate private key. Enter the PKCS8 certificate as a Base64-encoded string in the following format:<br>`-----BEGIN PRIVATE KEY----- ..... -----END PRIVATE KEY-----` |

5. Save and publish the connection.

# Step 4. Configure and publish the processes

Configure the subsidiary ID and publish the processes.

1. To publish the **Create NetSuite Items** process, click **Actions** in the row that contains the process and select **Publish**.
2. To publish the **Create NetSuite Sales Order** process, click **Actions** in the row that contains the process and select **Publish**.
3. On the **Start** tab of the **Start** step, set authorization to **Allow anonymous access**.
4. Open the **Synchronize Shopify Orders with NetSuite Sales Orders** process.
5. On the **Assignment** tab of the **Flow Settings** step, enter the subsidiary ID in the **NetSuite_Subsidiary_ID** field if you want to create item in NetSuite.
6. Save and publish the process.


You must copy the service URL to the webhook configuration in Shopify. For more information, see "Step 5. Create webhooks in Shopify" on page 13. The process will be triggered automatically when an order is created or updated in Shopify.

# Step 5. Create webhooks in Shopify


You can configure webhooks to communicate between systems when an event occurs.

To create a webhook in Shopify, perform the following steps:


1. Log in to the Shopify Admin page.
2. Go to **Settings**.
   The following image shows the **Settings** option on the Shopify Admin page:

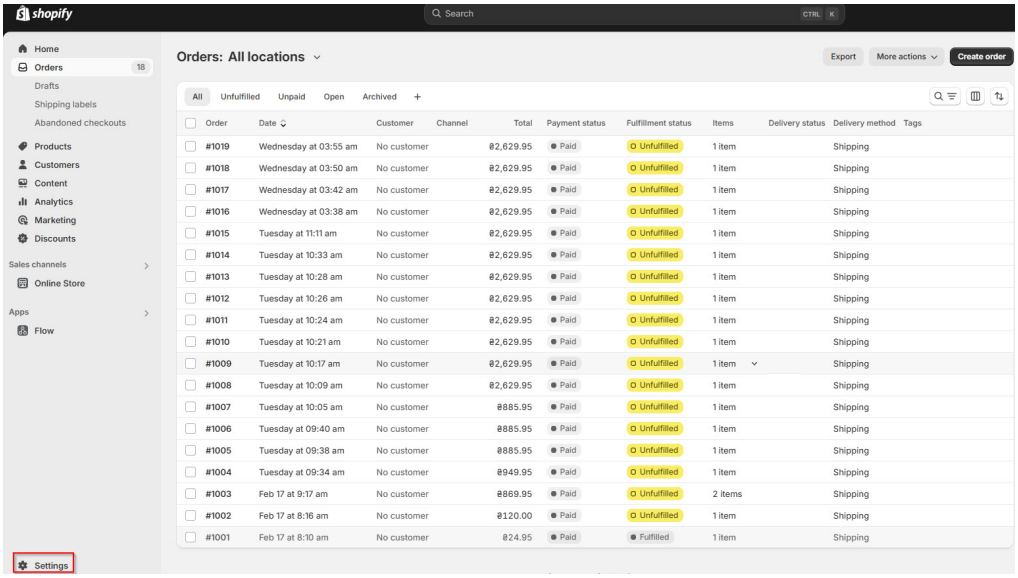


3. Go to **Notifications** > **Webhooks**.
   The following image shows the **Webhooks** option on the **Notifications** page:

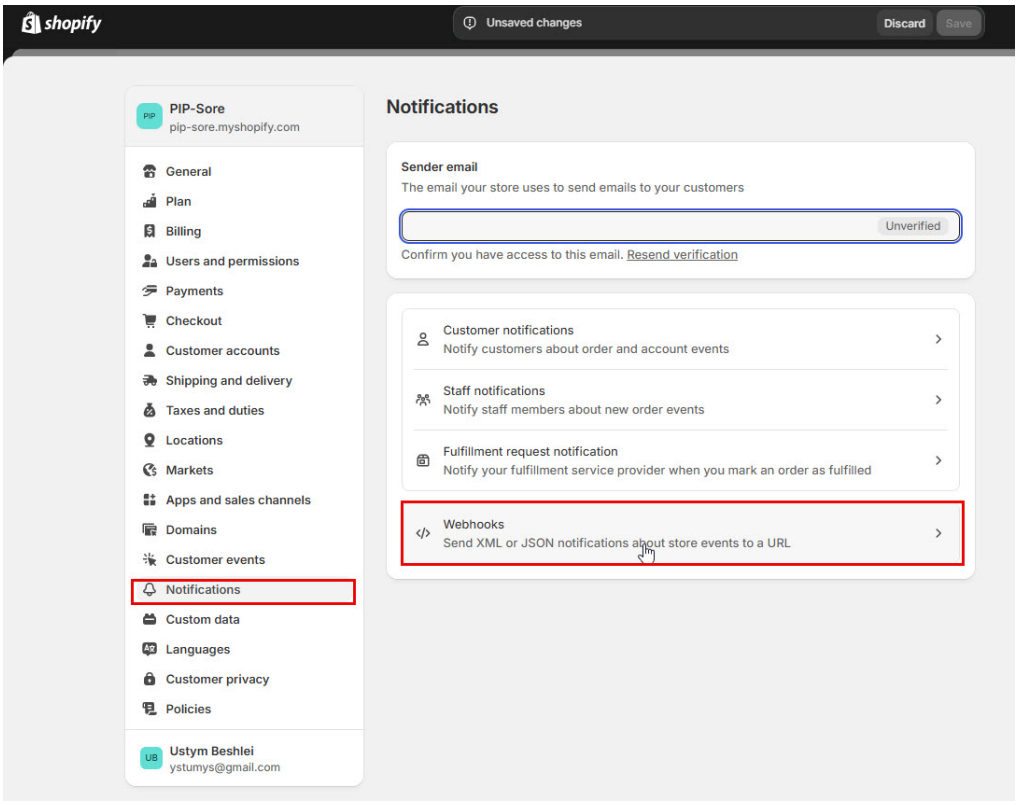


4. Click **Create webhook**.
5. On the **Add webhook** page, select the event as `Order creation`, format as `JSON`, enter the service URL that you get after publishing the process, and select the webhook API version.
   The following image shows the **Add webhook** page:

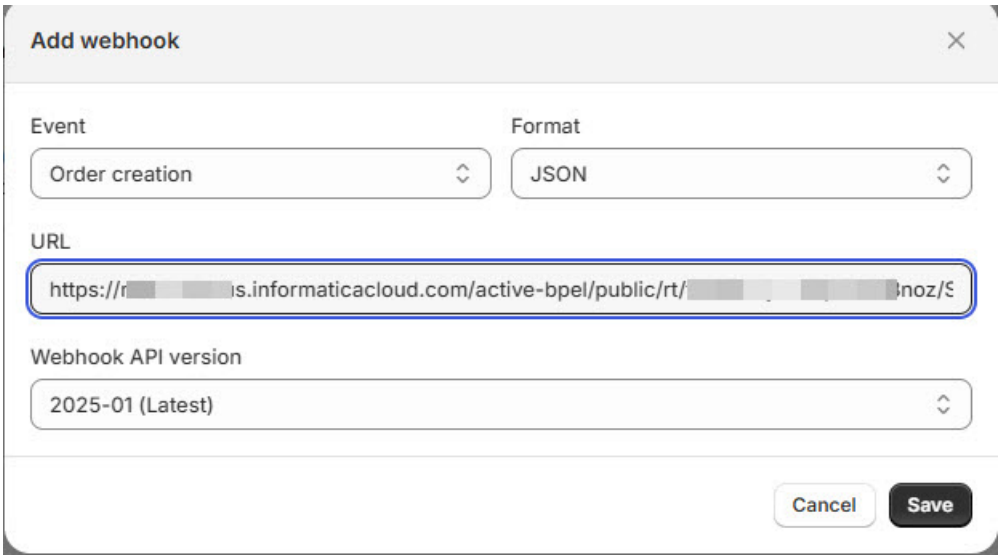


6. Click **Save**.

The webhook request is triggered automatically when an order is created or updated in Shopify.

# Data synchronization from Shopify orders to NetSuite sales orders

After you publish the processes, whenever a Shopify order is created or updated, Shopify sends a webhook and triggers the process, and the order details are synchronized with the NetSuite sales order without manual intervention.

The following table shows the fields that are synchronized between the Shopify order and the NetSuite sales order:

| Shopify Order | NetSuite Sales Order |
|---|---|
| Order Name | Order # |
| Order ID | Shopify ID |
| Customer | Customer |
| Address | Address |
| Phone | Phone |
| Product | Inventory Item |
| Name | Name |
| Price | Price |
| Quantity | Quantity |
| Amount | Amount |

# Rules and guidelines for using the recipe

Consider the following rules and guidelines when working with the Synchronize Shopify Orders with NetSuite Sales Orders recipe:

- Discounts and taxes are not synchronized from Shopify because these fields are configured separately for the company and are applied based on the settings within NetSuite.
- When creating a sales order, the process passes the exchange rate. However, you must check if the NetSuite settings allow you to modify this value.