Informatica® Cloud Application Integration
November 2024

Simple React AI Agent with Azure OpenAI

Informatica Cloud Application Integration Simple React AI Agent with Azure OpenAI
November 2024

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-10-09

Table of Contents

Preface 5

Chapter 1: Introduction to Simple React AI Agent with Azure OpenAI recipe . . 6

Simple React AI Agent with Azure OpenAI contents 6

Simple React AI Agent with Azure OpenAI recipe assets 7

Chapter 2: Simple React AI Agent with Azure OpenAI contents 8

Simple React AI Agent with Azure OpenAI recipe assets 8

Chapter 3: Using the Simple React AI Agent with Azure OpenAI recipe 10

Step 1. Copy and access the recipe 10

Step 2. Publish the GoogleAPI service connector 11

Step 3. Configure and publish the AzureOpenAIConnection connection 11

Step 4. Configure and publish the GoogleSearchAPIConnection connection 11

Step 5. Configure and publish the processes 12

Step 6. Invoke the process 13

Preface

Use *Simple React AI Agent with Azure OpenAI* to learn how to use Google Search to gather information, perform tasks, and answer user queries. This guide assumes you have an understanding of the Google API connectors and Azure OpenAI concepts

CHAPTER 1

Introduction to Simple React AI Agent with Azure OpenAI recipe

The Simple React AI Agent with Azure OpenAI recipe is based on REST and SOAP APIs. The recipe shows you how to build a simple React Agent with a search tool, Google Search, using the Serp API. The Azure OpenAI logic alternates between generating thoughts and performing task-specific actions dynamically.

The Azure OpenAI large language model (LLM) follows a step-by-step problem-solving approach, utilizing the search tool to gather information and perform tasks to answer user queries. The process orchestrates the workflow based on the LLM response.

The process accepts a user query. It passes the query to the LLM with additional system instructions to respond in a format that includes a question, thought, action, action input, observation, final thought, and final answer.


After receiving the response from the LLM, the process checks for the presence of the action and action input fields. If these fields are present, the process formulates a request for the SearchTool service. Otherwise, it creates the final answer.

If the final answer isn't set, a request is sent to the SearchTool service. The process calls the parent process with new parameters, such as user query and Agent_Scratchpad.

The process repeats until all the actions from the initial LLM response are processed or the number of repetitions meets the specified limit. When the process run time approaches 60 seconds, the process provides a final response.

Simple React AI Agent with Azure OpenAI contents

The Simple React AI Agent with Azure OpenAI recipe contains a service connector, app connections, and processes.

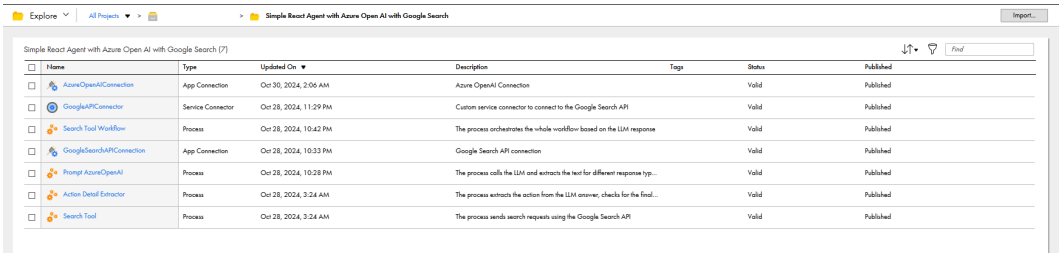

Simple React AI Agent with Azure OpenAI recipe assets


The following table describes the assets that the Simple React AI Agent with Azure OpenAI recipe package contains:

Asset Name	Asset Type	Description
AzureOpenAIConnection	App connection	Azure OpenAI connection.
GoogleSearchAPIConnection	App connection	Google Search API connection.
GoogleAPIConnector	Service connector	Custom service connector to connect to the Google Search API.
Search Tool	Process	Sends search requests using the Google Search API.
Action Detail Extractor	Process	Extracts the action from the LLM answer, checks for the final answer, verifies that the run time doesn't exceed 50 seconds, and monitors the number of times the process is called.
Search Tool Workflow	Process	Orchestrates the workflow based on the LLM response.
Prompt AzureOpenAI	Process	Calls the LLM and extracts the text for different response types, such as Python, JSON, SQL, and SOQL.

CHAPTER 2

Simple React AI Agent with Azure OpenAI contents

The Simple React AI Agent with Azure OpenAI recipe contains a service connector, app connections, and processes.

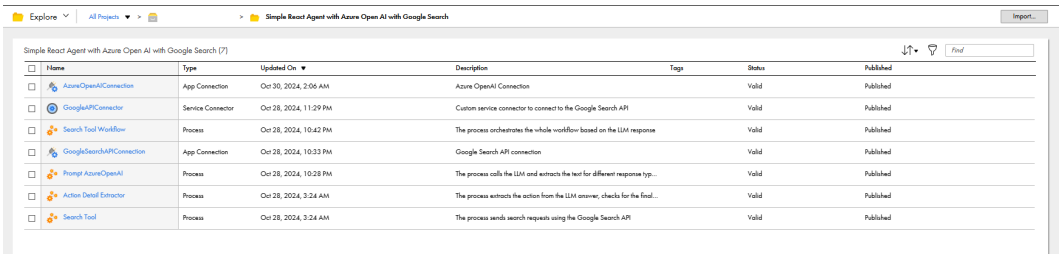

Simple React AI Agent with Azure OpenAI recipe assets

The following table describes the assets that the Simple React AI Agent with Azure OpenAI recipe package contains:

Asset Name	Asset Type	Description
AzureOpenAIConnection	App connection	Azure OpenAI connection.
GoogleSearchAPIConnection	App connection	Google Search API connection.
GoogleAPIConnector	Service connector	Custom service connector to connect to the Google Search API.
Search Tool	Process	Sends search requests using the Google Search API.
Action Detail Extractor	Process	Extracts the action from the LLM answer, checks for the final answer, verifies that the run time doesn't exceed 50 seconds, and monitors the number of times the process is called.

Asset Name	Asset Type	Description
Search Tool Workflow	Process	Orchestrates the workflow based on the LLM response.
Prompt AzureOpenAI	Process	Calls the LLM and extracts the text for different response types, such as Python, JSON, SQL, and SOQL.

CHAPTER 3

Using the Simple React AI Agent with Azure OpenAI recipe

To use the Simple React AI Agent with Azure OpenAI recipe, perform the following steps:

1. Copy and access the recipe.
2. Publish the GoogleAPIConnector service connector.
3. Configure and publish the AzureOpenAIConnection connection.
4. Configure and publish the GoogleSearchAPIConnection connection.
5. Configure and publish the processes.
6. Invoke the process.


Step 1. Copy and access the recipe

Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Simple React AI Agent with Azure OpenAI** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.
5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

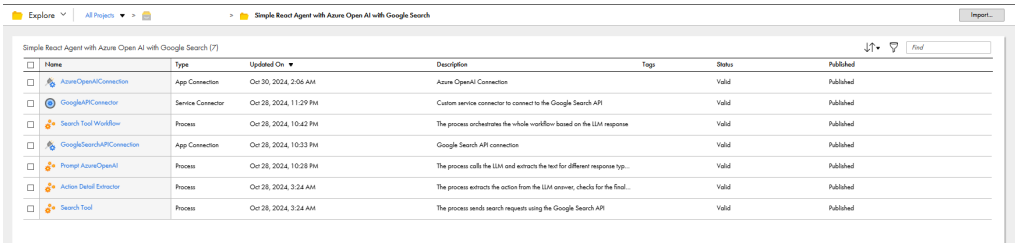

Step 2. Publish the GoogleAPI service connector

You can publish the GoogleAPIConnector service connector from the asset details page.

To publish the **GoogleAPIConnector** service connector, open the **GoogleAPIConnector** service connector and click **Publish**.

Step 3. Configure and publish the AzureOpenAIConnection connection

Configure the endpoint URL and API key in the AzureOpenAIConnection connection, and then publish the connection.

1. Open the **AzureOpenAIConnection** connection.
2. From the **Type** list, select **AzureOpenAI**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Endpoint_URL	The REST API endpoint for Azure OpenAI. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.
API_Key	The API key to authenticate Azure OpenAI connection requests. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.

4. Save and publish the connection.

Step 4. Configure and publish the GoogleSearchAPIConnection connection

Configure the API key in the GoogleSearchAPIConnection connection, and then publish the connection.

1. Open the **GoogleSearchAPIConnection** connection.
2. From the **Type** list, select **GoogleSearchAPIConnection**.
3. In the **Connection Properties** section, enter the API Key in the **API_Key** property. The **API_Key** property authenticates Google Search API Connection requests.
4. Save and publish the connection.

Note: You can get the API key for the Google Search tools from https://serpapi.com/

Step 5. Configure and publish the processes

Configure and publish the Search Tool, Search Tool Workflow, and Prompt Request processes.

1. To publish the **Search Tool** process, click **Actions** in the row that contains the process and select publish.
2. To publish the **Action Detail Extractor** process, click **Actions** in the row that contains the process and select **Publish**.
3. Open the **Prompt AzureOpenAI** process.
4. On the **Temp Fields** tab of the Start step, the **Model_LLM** field is set to **cai-qa-gpt4turbo-sweden** by default. You can optionally edit the model version. For more information about changing the model version, see the Azure documentation.
5. Save and publish the process.
6. Open the **Search Tool Workflow** process.
7. On the **Temp Fields** tab of the Start step, the **Loop_Limit** field is set to 5 by default. You can optionally edit the limit. This field defines the number of times the Search Tool subprocess can be called. You can adjust the number of repeat queries in the Search Tool to get new information and better results. However, this increases the number of tokens used.
8. On the **Assignment** tab of the **Create Prompt to LLM** step, the **Prompt** field is configured to contain the request template. Optionally, you can configure the LLM behavior using the Expression Editor, as shown in the following sample code:

```
<CreateChatCompletionRequest>
    <temperature>0.7</temperature>
    <top_p>0.9</top_p>
    <max_tokens>150</max_tokens>
<messages>
    <role>user</role>
    <content>You are a helpful assistant.</content>
</messages>
<messages>
    <role>user</role>
    <content>{$temp.Prompt}</content>
</messages>
</CreateChatCompletionRequest>
```

For the **Prompt Request** field, enter values for the following properties:

Property	Description
maxOutputTokens	Defines the maximum number of tokens that the model can generate in its response. Setting a limit ensures that the response is concise and fits within the desired length constraints.

Property	Description
temperature	Controls the randomness of the model's output. A lower value close to 0 makes the output more deterministic, while a higher value close to 1 increases randomness and creativity. For example, if you set `temperature` to 0.5, the model balances between deterministic and creative outputs.
topP	Determines the cumulative probability threshold for token selection. The model considers the smallest set of tokens whose cumulative probability meets or exceeds `topP`. For example, if you set `topP` to 0.1, the model considers only the top 10% most probable tokens at each step.

9. Save and publish the process.

Alternatively, you can publish the **Search Tool Workflow** process from the asset details page. To publish the process, click **Actions** in the row that contains the process and select **Publish**. The subprocesses are published automatically. You can modify the process as mentioned in steps 7 and 8 before publishing if needed.

Step 6. Invoke the process

When you invoke the Simple React AI Agent with Azure OpenAI process, the process orchestrates the workflow based on the LLM response.

1. Open the **Search Tool Workflow** process and click **Actions** > **Properties Details** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL in the following format: `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?Query=<User_Query>`
3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in any API client, such as cURL, Postman, SOAP UI, or through any programming language.

In Application Integration Console, you can verify whether the process ran successfully.

The following image shows a process that ran successfully:

