Informatica® Cloud Application Integration
October 2024

Procure to Pay with Coupa and Netsuite

Informatica Cloud Application Integration Procure to Pay with Coupa and Netsuite
October 2024

© Copyright Informatica LLC 2024, 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-08-31

Table of Contents

Preface 5

Chapter 1: Introduction to Procure to Pay with Coupa and Netsuite recipe 6

Prerequisites 6

Creating a custom field in NetSuite purchase order and vendor entities 7

Creating a webhook in Coupa 8

Chapter 2: Procure to Pay with Coupa and Netsuite recipe contents 12

Procure to Pay with Coupa and Netsuite recipe assets 13

Chapter 3: Using the Procure to Pay with Coupa and Netsuite recipe 14

Step 1. Copy and access the recipe content 14

Step 2. Configure and publish the Email connection 15

Step 3. Configure and publish the Coupa connection 17

Step 4. Configure and publish the NetSuite connection 17

Step 5. Configure and publish the processes 18

Step 6. Invoke the process 18

Rules and guidelines for using the recipe 19

Preface

Use *Procure to Pay with Coupa and Netsuite* to learn how to generate invoice data for the approved Coupa purchase order based on a webhook request from Coupa. This guide assumes that you have an understanding of the NetSuite Connector, Coupa Connector, and Email Connector concepts.

CHAPTER 1

Introduction to Procure to Pay with Coupa and Netsuite recipe

The Procure to Pay with Coupa and Netsuite recipe is based on REST and SOAP APIs. Use the recipe to create a NetSuite purchase order and generate invoice from a Coupa purchase order based on a webhook request from Coupa as an incoming parameter.

The process is triggered by a webhook received from Coupa. The process retrieves all the information about the purchase order from the webhook body, such as, product, currency, shipping address, and supplier.

The process searches for vendors using the custom field custentity_coupa_id with the value from the Coupa supplier ID. The process then creates or updates a vendor record in NetSuite based on the supplier information.

The process then creates all the products in NetSuite. If a product with the same name already exists, it retrieves the product's ID instead of creating a new product. The process calculates the product price according to the exchange rate defined in NetSuite and saves the basic price value set in NetSuite.

The process then searches for an existing location in NetSuite based on the Coupa ID shipping address. If the location does not exist, it creates a specific location named Coupa ID <coupa shipping address ID>. The process then creates a purchase order based on the information from Coupa.

The process prepares an invoice process object and sends an email with the generated invoice data to the email specified for the requester in the Coupa purchase order.

The process then sends an email notification to confirm the successful process flow execution or to report any error encountered during the process.

The process does not update the existing purchase orders.

Prerequisites


To create a NetSuite purchase order from a Coupa purchase order, the following prerequisites must be met:

- Create a custom field in the NetSuite purchase order and vendor entities.
- Create a webhook in Coupa.


Creating a custom field in NetSuite purchase order and vendor entities

Create a `Coupa ID` custom field in the NetSuite purchase order and vendor entities.

1. Log in to the NetSuite organization.
2. Go to **Customization** > **Lists, Records, & Fields** > **Transaction Body Fields** > **New**.
   The following image shows the **Transaction Body Field** page:

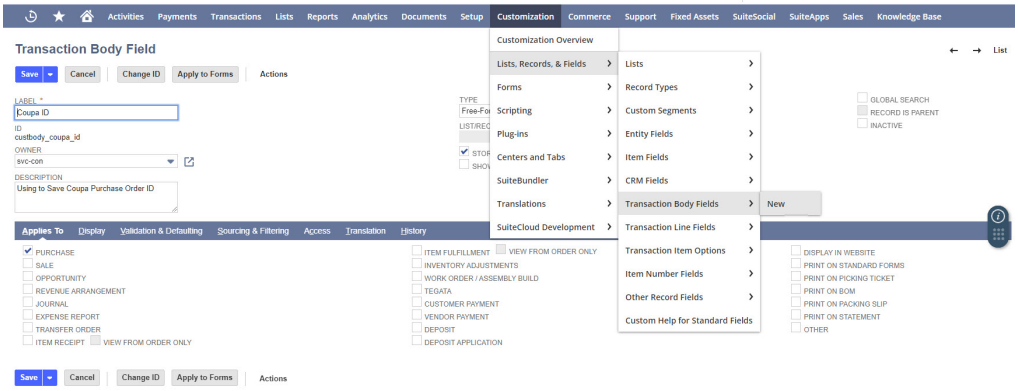

3. On the **Transaction Body Field** page, enter the value as `Coupa ID` in the **LABEL** field, `custbody_coupa_id` in the **ID** field, and select **PURCHASE** on the **Applies To** tab.
   These values are used to search for a matching purchase order.
4. Click **Save**.
5. Go to **Customization** > **Lists, Records, & Fields** > **Entity Fields** > **New**.
   The following image shows the **Custom Entity Field** page:

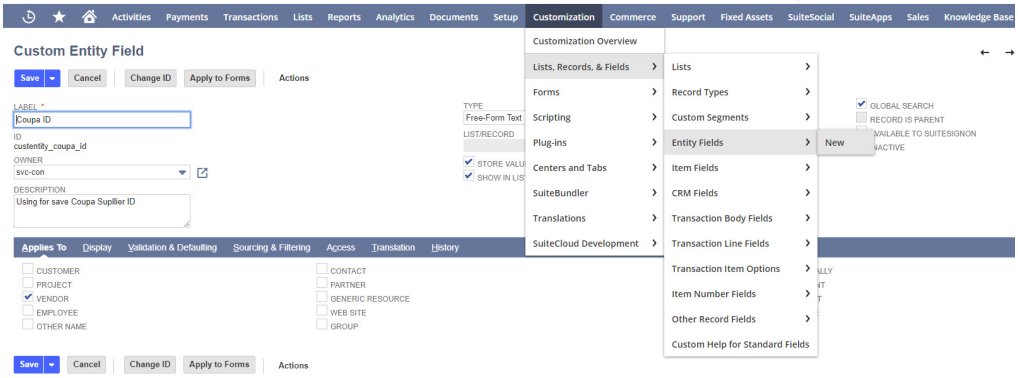


6. On the **Custom Entity Field** page, enter the value as `Coupa ID` in the **LABEL** field, `custentity_coupa_id` in the **ID** field, and select **VENDOR** on the **Applies To** tab.
   These values are used to search for a matching vendor.
7. Click **Save**.

Creating a webhook in Coupa

Webhooks send information from one system to another system when an event occurs.

To create a webhook in Coupa, perform the following steps:


1. Log in to the Coupa organization.
2. Go to **Setup** > **Integrations** > **Call Outs** > **Create**.
   The following image shows the **Setup** page:

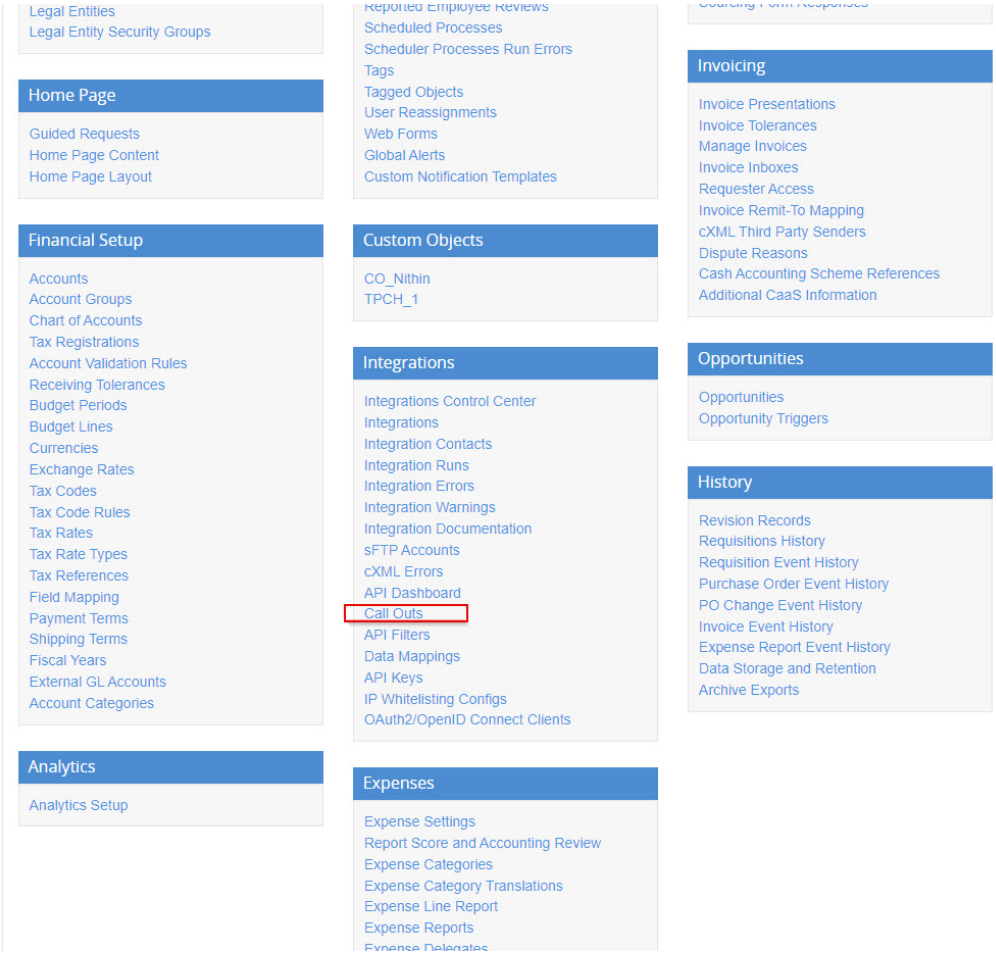


3. In the **Call Outs** page, enter values for the following fields:
   - In the **Name** field, enter the call out name.
   - From the **Call Out Type** list, select **Process Action**.
   - In the **Endpoint Detail** section, select **Create new** from the **Type** list, enter the service URL of the Purchase Order Flow process to be invoked in the **Host Name** field, select the authentication type as **Basic**, and enter the user name and password that is used to login to CAI organization.

     Note: The service URL will be generated after you publish the Purchase Order Flow process.
   - In the **Data Mapping / API Filter** section, from the **Filter** list, select the previously created purchase_orders custom field.

   The following image shows the **Call Outs** page:

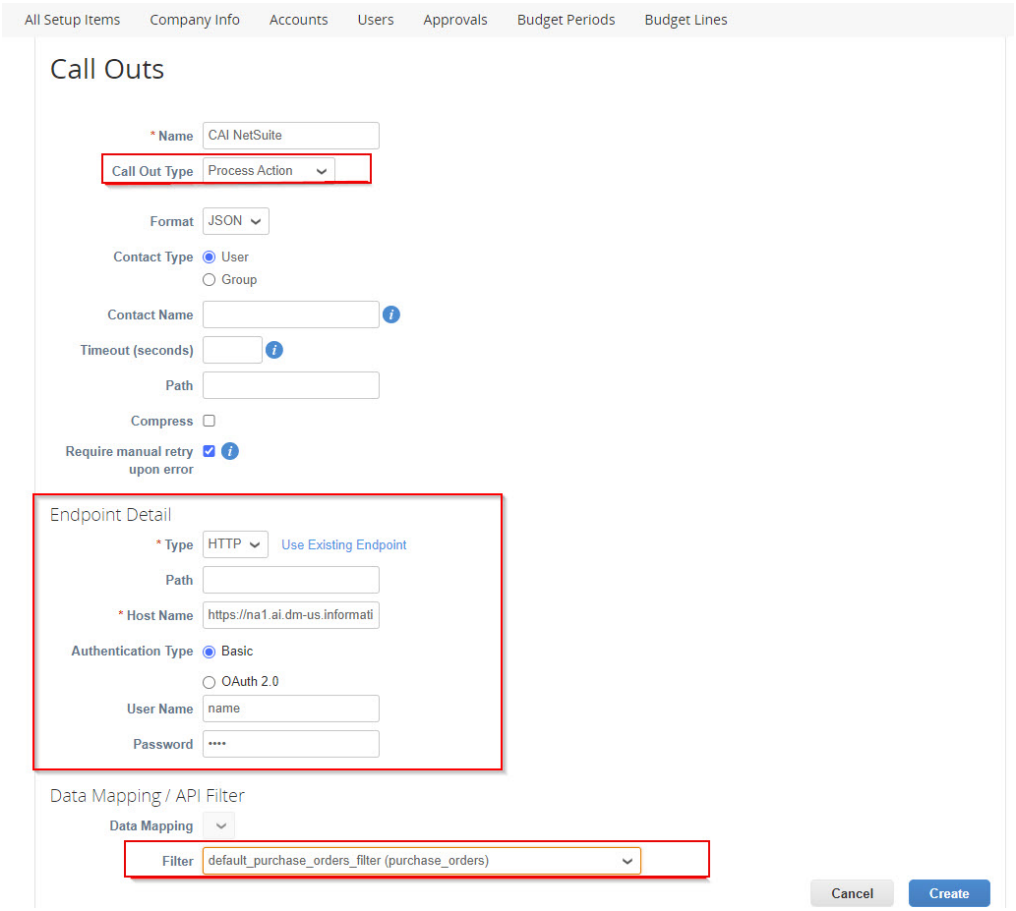


4. Click **Create**.
5. Go to **Setup** > **Platform** > **Process Automator** > **Create new process**.
   The following image shows the **Setup** page:

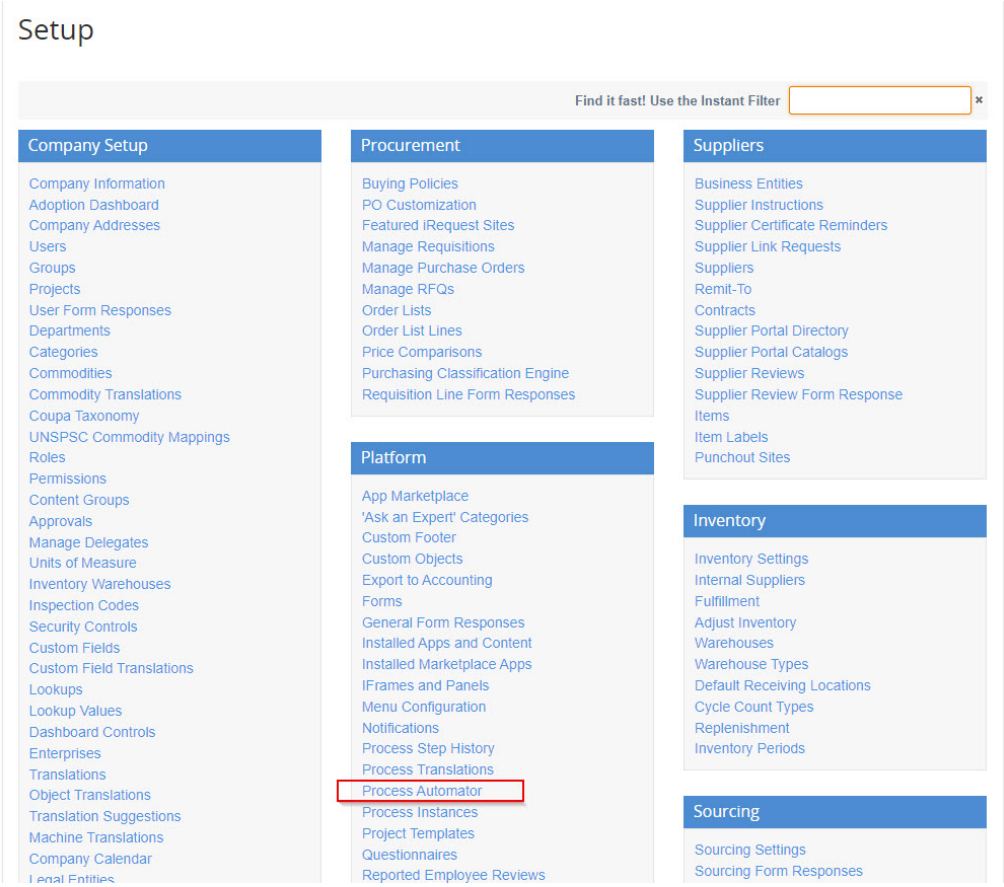

6. In the **New Process** page, enter values for the following fields:
   - In the **Name** field, enter the process name.
   - In the **Trigger** section, from the **Launch Process on** list, select **Document Event**, from the **Document** list, select **Purchase Order**, and from the **Trigger process on** list, select **Issued**.
   - In the **Perform Action** section, from the **Object** list, select **Trigger.Purchase Order**, from the **Action**, select **API Call Out**, and from the **Call Out** field, select the previously created call out.

   The following image shows the **New Process** page:

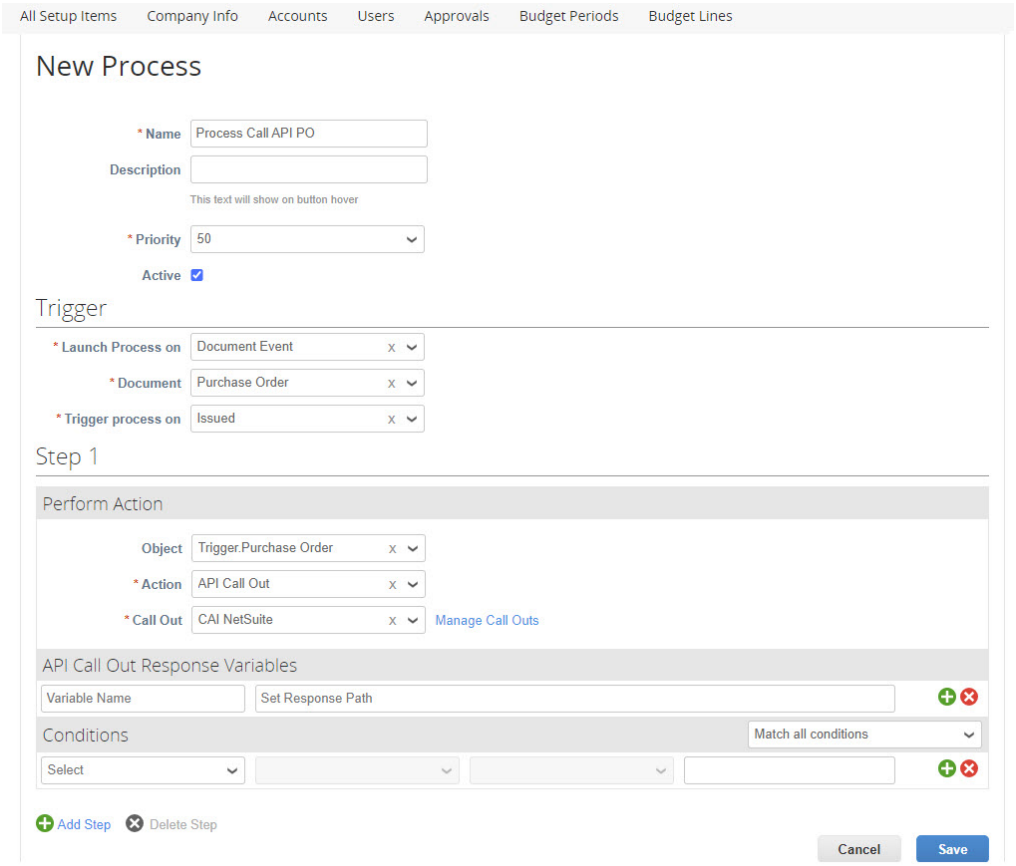
All Setup Items
Company Info
Accounts
Users
Approvals
Budget Periods
Budget Lines
New Process
* Name
Process Call API PO
Description
This text will show on button hover
* Priority
50
Active
Trigger
* Launch Process on
Document Event
* Document
Purchase Order
* Trigger process on
Issued
Step 1
Perform Action
Object
Trigger.Purchase Order
* Action
API Call Out
* Call Out
CAI NetSuite
Manage Call Outs
API Call Out Response Variables
Variable Name
Set Response Path
Conditions
Match all conditions
Select
Add Step
Delete Step
Cancel
Save


7. Click **Save**.

CHAPTER 2

Procure to Pay with Coupa and Netsuite recipe contents

The recipe contains multiple assets, such as process objects, app connections, and processes.

The following image shows the assets that the Procure to Pay with Coupa and Netsuite recipe package contains:

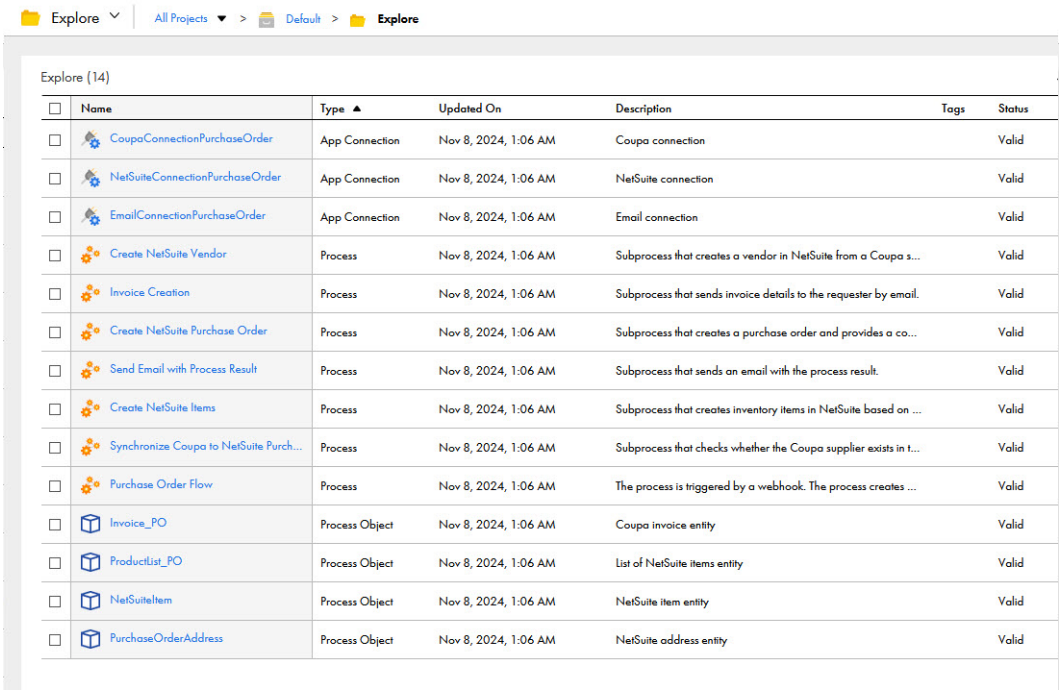

Name	Type	Updated On	Description	Tags	Status
CoupaConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	Coupa connection		Valid
NetSuiteConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	NetSuite connection		Valid
EmailConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	Email connection		Valid
Create NetSuite Vendor	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates a vendor in NetSuite from a Coupa s...		Valid
Invoice Creation	Process	Nov 8, 2024, 1:06 AM	Subprocess that sends invoice details to the requester by email.		Valid
Create NetSuite Purchase Order	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates a purchase order and provides a co...		Valid
Send Email with Process Result	Process	Nov 8, 2024, 1:06 AM	Subprocess that sends an email with the process result.		Valid
Create NetSuite Items	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates inventory items in NetSuite based on ...		Valid
Synchronize Coupa to NetSuite Purch...	Process	Nov 8, 2024, 1:06 AM	Subprocess that checks whether the Coupa supplier exists in t...		Valid
Purchase Order Flow	Process	Nov 8, 2024, 1:06 AM	The process is triggered by a webhook. The process creates ...		Valid
Invoice_PO	Process Object	Nov 8, 2024, 1:06 AM	Coupa invoice entity		Valid
ProductList_PO	Process Object	Nov 8, 2024, 1:06 AM	List of NetSuite items entity		Valid
NetSuiteItem	Process Object	Nov 8, 2024, 1:06 AM	NetSuite item entity		Valid
PurchaseOrderAddress	Process Object	Nov 8, 2024, 1:06 AM	NetSuite address entity		Valid

Procure to Pay with Coupa and Netsuite recipe assets

The following table lists the assets that the Procure to Pay with Coupa and Netsuite recipe package contains:

Asset Name	Asset Type	Description
ProductList_PO	Process object	List of NetSuite items entity.
Invoice_PO	Process object	Coupa invoice entity.
PurchaseOrderAddress	Process object	NetSuite address entity.
NetSuiteItem	Process object	NetSuite item entity.
NetSuiteConnectionPurchaseOrder	App connection	NetSuite connection.
EmailConnectionPurchaseOrder	App connection	Email connection.
CoupaConnectionPurchaseOrder	App connection	Coupa connection.
Create NetSuite Items	Process	Subprocess that creates inventory items in NetSuite based on Coupa products and prepares process objects to create purchase orders.
Create NetSuite Purchase Order	Process	Subprocess that creates a purchase order and provides a confirmation message.
Create NetSuite Vendor	Process	Subprocess that creates a vendor in NetSuite from a Coupa supplier or updates if it already exists.
Synchronize Coupa to NetSuite Purchase Order	Process	Subprocess that checks whether the Coupa supplier exists in the NetSuite vendor table. If the vendor does not exist, the process creates a vendor based on the supplier data. The process creates all the items and a purchase order.
Invoice Creation	Process	Subprocess that sends invoice details to the requester by email.
Send Email with Process Result	Process	Subprocess that sends an email with the process result.
Purchase Order Flow	Process	The process is triggered by a webhook. The process creates a purchase order in NetSuite based on the Coupa purchase order. When the purchase order is created, the process sends an email with the results.

CHAPTER 3

Using the Procure to Pay with Coupa and Netsuite recipe

To use the Procure to Pay with Coupa and Netsuite recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the Email connection.
3. Configure and publish the Coupa connection.
4. Configure and publish the NetSuite connection.
5. Configure and publish the processes.
6. Invoke the process.

Step 1. Copy and access the recipe content


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Procure to Pay with Coupa and Netsuite** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

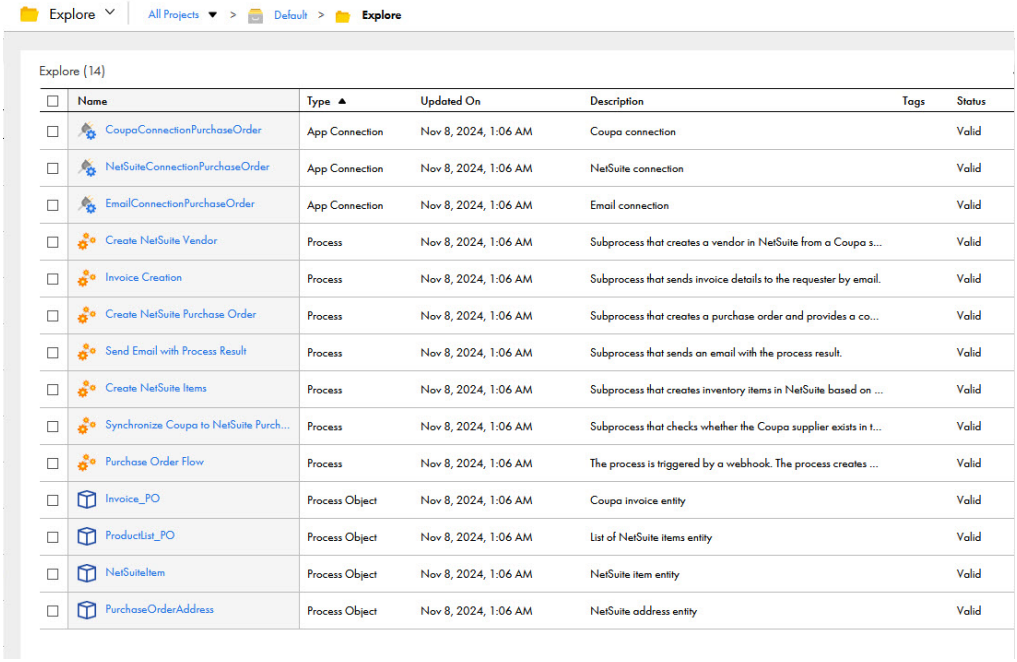

Name	Type	Updated On	Description	Tags	Status
CoupaConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	Coupa connection		Valid
NetSuiteConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	NetSuite connection		Valid
EmailConnectionPurchaseOrder	App Connection	Nov 8, 2024, 1:06 AM	Email connection		Valid
Create NetSuite Vendor	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates a vendor in NetSuite from a Coupa s...		Valid
Invoice Creation	Process	Nov 8, 2024, 1:06 AM	Subprocess that sends invoice details to the requester by email.		Valid
Create NetSuite Purchase Order	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates a purchase order and provides a co...		Valid
Send Email with Process Result	Process	Nov 8, 2024, 1:06 AM	Subprocess that sends an email with the process result.		Valid
Create NetSuite Items	Process	Nov 8, 2024, 1:06 AM	Subprocess that creates inventory items in NetSuite based on ...		Valid
Synchronize Coupa to NetSuite Purch...	Process	Nov 8, 2024, 1:06 AM	Subprocess that checks whether the Coupa supplier exists in t...		Valid
Purchase Order Flow	Process	Nov 8, 2024, 1:06 AM	The process is triggered by a webhook. The process creates ...		Valid
Invoice_PO	Process Object	Nov 8, 2024, 1:06 AM	Coupa invoice entity		Valid
ProductList_PO	Process Object	Nov 8, 2024, 1:06 AM	List of NetSuite items entity		Valid
NetSuiteItem	Process Object	Nov 8, 2024, 1:06 AM	NetSuite item entity		Valid
PurchaseOrderAddress	Process Object	Nov 8, 2024, 1:06 AM	NetSuite address entity		Valid

Step 2. Configure and publish the Email connection

Configure the authentication type and details in the EmailConnectionPurchaseOrder connection, and then publish the connection.

1. Open the **EmailConnectionPurchaseOrder** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password** or **OAuth** as needed. Based on the authentication type selected, perform one of the following steps:
   - For **Password** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the email server. The user name is either the account name or the email address that is used to send the email with the synchronization results. For example: `notifyme@mydomain.com`

Property	Description
Password	Password for the email address.
Security	Select **SSL** for the Email connection to use the SSL protocol.

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

- For **OAuth** authentication, enter values for the following properties in the **Connection Properties** section:

Property	Description
Authorization URL	Enter the OAuth authorization URL for the email service that is used to authorize the user request. For example: `https://login.microsoftonline.com/xxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx/oauth2/v2.0/authorize`
Token Request URL	Enter the OAuth token request URL that handles token requests. For example: `https://login.microsoftonline.com/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx/oauth2/v2.0/token` The refresh token expires in 90 days. The user must authenticate again and publish the connection before the token expires.
Client ID	Specify the identifier value from the OAuth provider.
Client Secret	Enter the client secret to connect to the email application.
Scope	Specify the scope. The scope in OAuth authentication limits an application's access to a user's account. You can select multiple scopes for a single client. To enter multiple scopes, separate each value with a space. For a Microsoft Outlook email account, enter the following scope: `https://outlook.office.com/SMTP.Send offline_access`

Configure the following common properties on the connection creation page:

Property	Description
Host	Email server's DNS name, such as `mail.mydomain.com`, or an IP address, such as `192.168.1.1`.
Port	Port for communication between the Process Server and the email server. Default is **25**.

5. Save and publish the connection.

Step 3. Configure and publish the Coupa connection

Configure the Coupa instance and client details in the CoupaConnectionPurchaseOrder connection, and then publish the connection.

1. Open the **CoupaConnectionPurchaseOrder** connection.
2. From the **Type** list, select **Coupa**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Instance_Domain	The URL to access the Coupa instance.
Client_ID	The Coupa client ID to generate a valid access token.
Client_Secret	The Coupa client secret to generate a valid access token.
Scope	The Coupa security scope to access the resources.

5. Save and publish the connection.

Step 4. Configure and publish the NetSuite connection

Configure the client ID, instance URL, certificate ID, and private key in the NetSuiteConnectionPurchaseOrder connection, and then publish the connection.

1. Open the **NetSuiteConnectionPurchaseOrder** connection.
2. From the **Type** list, select **NetSuite**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client ID	NetSuite OAuth 2.0 client ID to generate a valid access token. Enter the client ID that you generated from the **Integration** page in NetSuite.
Certificate ID	NetSuite certificate ID that you generated using **OAuth 2.0 Client Credentials** under **Setup** > **Integration** > **Manage Authentication** > **OAuth 2.0 Client Credentials** (M2M) Setup in NetSuite.

Property	Description
Instance URL	NetSuite applications suite instance URL. Enter the instance URL in the following format: `https://[accountid].suitetalk.api.netsuite.com`
Certificate Private Key	NetSuite certificate private key. Enter the PKCS8 certificate as a Base64-encoded string in the following format: `-----BEGIN PRIVATE KEY----- ..... -----END PRIVATE KEY-----`

5. Save and publish the connection.

Step 5. Configure and publish the processes

Configure the allowed user or group for authorization, email ID for sending the notification, and subsidiary ID to create a vendor in NetSuite, and publish the process.

1. To publish the following processes, click **Actions** in the row that contains the processes in the order specified and select **Publish**.
    1. Create NetSuite Items
    2. Create NetSuite Purchase Order
    3. Create NetSuite Vendor
    4. Synchronize Coupa to NetSuite Purchase Order
    5. Invoice Creation
    6. Send Email with Process Result
2. Open the **Purchase Order Flow** process.
3. On the **Start** tab of the Start step, in the **Allowed Users** or **Allowed Groups** field, enter the user or group that has access to the process service URL at run time.
4. On the **Assignment** tab of the **Flow Settings** step, enter values for the following fields:
    - In the **User_Email** field, enter the email ID to send the email notifications.
    - If your NetSuite environment uses a Subsidiary, in the **NetSuite_Subsidiary_ID** field, enter the subsidiary ID to create a vendor in NetSuite.
5. Save and publish the process.

Step 6. Invoke the process

When you invoke the Purchase Order Flow process, the process creates a NetSuite purchase order from a Coupa purchase order based on the webhook request from Coupa.

1. Open the **Purchase Order Flow** process and click **Actions** > **Properties Details** > **Copy Service URL**.

2. Open a text editor and add the input fields and values to the service URL as shown in the following format:
   `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?webhook=<Webhook request from Coupa>`
3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in API clients, such as cURL, Postman, SOAP UI, or through any programming language.

Rules and guidelines for using the recipe

You must update the process according to your Coupa and Netsuite service configurations as there are many possible limitations based on different service business rules. You can find some limitations in this topic that have been defined for the objects synchronized in the recipe process.

Consider the following rules and guidelines when working with the Procure to Pay with Coupa and Netsuite recipe:

- The **Subsidiary** field for both the vendor and items must be identical. This enforces a restriction on the currency used. The currency must be the same as the currency specified in the Subsidiary settings.
- Discounts and taxes are not synchronized from Coupa because these fields are configured separately for the instance and are applied based on the settings within NetSuite.
- When creating a purchase order, the process passes the exchange rate. However, you must check if the NetSuite settings allow you to modify this value.
- The process creates one purchase order for each vendor but the purchase order can contain many items.
- Coupa sends different webhooks for different suppliers. If the Coupa purchase order contains products from different suppliers, the process creates a different purchase order in NetSuite but the custom field Coupa ID remains the same.
- If several processes are triggered simultaneously for synchronization, for example, several opportunities for different suppliers, the process might fail because of the concurrency limitation in Netsuite.