Informatica® Cloud Application Integration
October 2025

AI Agent for Database Access Review and Permission Auditing

Informatica Cloud Application Integration AI Agent for Database Access Review and Permission Auditing
October 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-10-27

Table of Contents

Preface 5

Chapter 1: Introduction to AI Agent for Database Access Review and Permission Auditing recipe 6

Prerequisites 6

Setting up the ServiceNow Developer Instance 7

Creating Client Credentials for the ServiceNow connector 7

Generating an App Password for Email Server 8

Chapter 2: AI Agent for Database Access Review and Permission Auditing recipe contents 9

AI Agent for Database Access Review and Permission Auditing recipe assets 10

Chapter 3: Using the AI Agent for Database Access Review and Permission Auditing recipe 11

Step 1. Copy and access the recipe 11

Step 2. Configure and publish the DAS service connector 12

Step 3. Configure and publish the DAS connection 13

Step 4. Configure and publish the Azure OpenAI connection 13

Step 5. Configure and publish the ServiceNow connection 14

Step 6. Configure and publish the Email connection 15

Step 7. Configure and publish the Workday connection 16

Step 8. Publish the processes 16

Step 9. Invoke the process 17

Preface

Use *AI Agent for Database Access Review and Permission Auditing* to learn how to automate database access reviews and permission audits for enhanced security and compliance. This guide assumes that you have an understanding of the Azure OpenAI Connector, DAS Connector, Email Connector, ServiceNow Connector, and Workday Connector concepts.

CHAPTER 1

Introduction to AI Agent for Database Access Review and Permission Auditing recipe

The AI Agent for Database Access Review and Permission Auditing recipe is based on REST APIs. Use this recipe to leverage the AI-powered agent that is designed to automate the database access reviews and permission audits, enhancing security controls and ensuring regulatory compliance.

This recipe helps organizations efficiently identify and manage access risks by continuously monitoring permissions and generating actionable insights.

The process begins by providing the employee's email ID, which is used to run an SQL query to retrieve the corresponding employee ID. Once the employee ID is obtained, it is passed to the Workday system to extract detailed information about the employee's manager, including the manager's email address.

With the manager's details retrieved, the system automatically sends an email notification to the manager regarding the request or action related to the employee. Simultaneously, a ServiceNow ticket is created and assigned to the manager to facilitate tracking and management of the case through the ServiceNow platform.

When the manager responds to the email or ticket, a subsequent process is triggered that uses an intelligent agent to generate the necessary SQL Server statements required to fulfill the database request. These generated SQL statements are then securely stored in the database for further use.

The output of this process includes key data, such as the employee's email, the manager's email, the access status indicating whether database permissions have been granted, and the specific SQL queries generated by the agent. Together, these elements form the foundational structure of the output database, ensuring clear documentation and traceability throughout the entire workflow.

Prerequisites

To use the AI Agent for Database Access Review and Permission Auditing recipe, the following prerequisites must be met:


- ServiceNow developer instance is set up.
- Client credentials are created for the ServiceNow connector.
- An app password is generated for the email server.

- Download the Secure Agent from Administrator and enable the Workday and JDBC Connectors during runtime environment configuration. For more information, see *Runtime Environments* in Administrator.

Setting up the ServiceNow Developer Instance

To set up a ServiceNow developer instance, perform the following steps:

1. Go to the ServiceNow Developer Site.
2. Sign in with your existing account or create a new one.
3. Click **Request Instance** or **Start building**.
4. Select the desired release version for your instance and click **Request**. The latest release is recommended.
   You will be notified when your instance is ready. You will receive the instance URL and admin login details as shown in the following image:

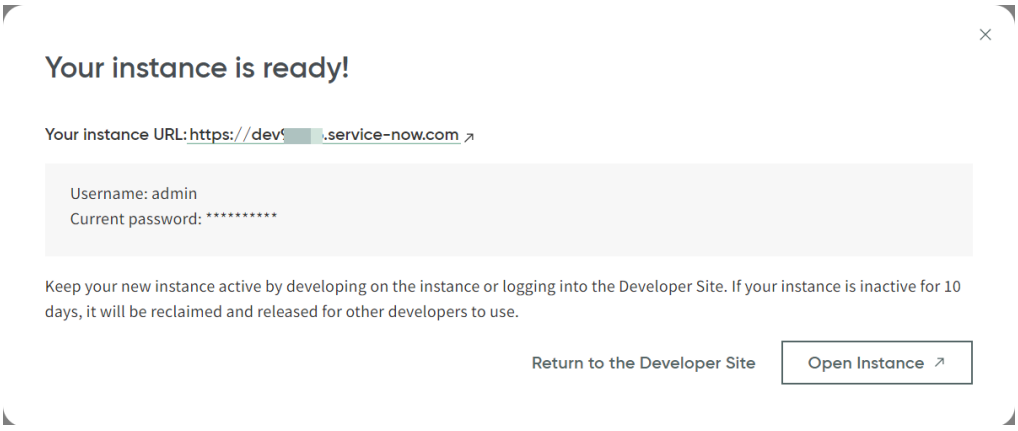


5. Click the provided URL or **Open Instance** to access your instance.
6. Log in using the admin credentials you received.

Creating Client Credentials for the ServiceNow connector

To authorize REST requests from the ServiceNow connector, you need to create client credentials:

1. Log in to your ServiceNow developer instance using admin credentials.
2. From the admin profile menu, select **Evaluate role** > **security_admin**.
3. To register the client application, go to **System OAuth** > **Application Registry** > **New** > **Create an OAuth API endpoint for external clients**.
4. Enter a name and other required details as shown in the following image:

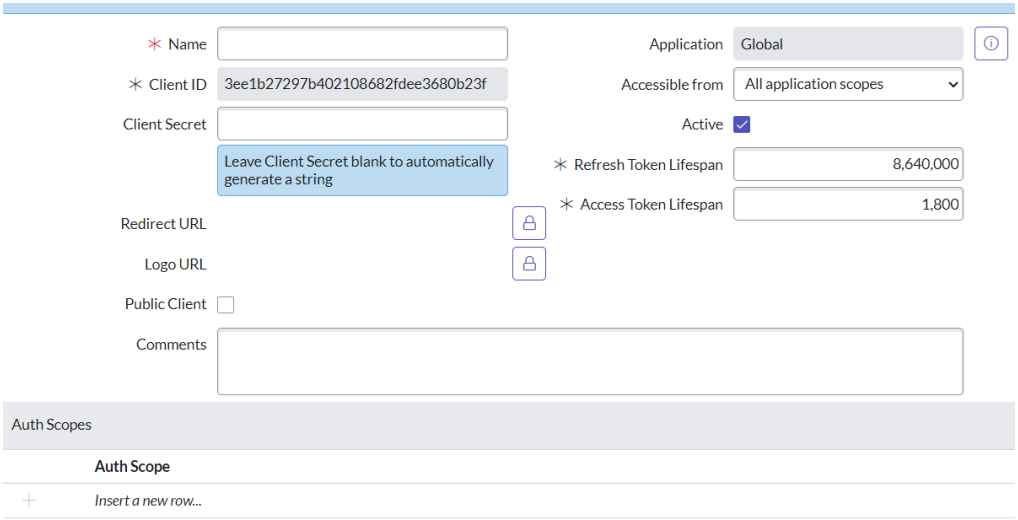

5. Save the generated client_id and client_secret values. You will need these values to configure the ServiceNow connection.

For more information, see the ServiceNow documentation.

Generating an App Password for Email Server

To configure the email server password for Gmail and Microsoft Outlook, perform the following steps:

- Enable two-step verification on your email account.
- Locate the **App Password** option and generate a new password.
- Copy the 16-digit app password and store it securely. This will be required to configure the Email connection.

Gmail App Password Generation

1. Ensure 2-Step Verification is enabled on your Google Account.
2. Go to the Google Account security page.
3. Sign in if prompted.
4. In the **Select app** and **Select device** fields, select or enter the appropriate app name or device for which you want to generate the app password.
5. Click **Generate**.
   A 16-character app password will be displayed. Use this password in place of your regular Google account password in your email client or application.

Microsoft Outlook App Password Generation


1. Ensure Two-factor authentication (2FA) is enabled on your Microsoft account.
2. Go to the Microsoft Security page.
3. Sign in if prompted.
4. Navigate to **Advanced security options**.
5. Under **App passwords**, click **Create a new app password**.
6. Copy the generated app password.
   Use this app password instead of your standard Microsoft account password in your email client or application.

CHAPTER 2

AI Agent for Database Access Review and Permission Auditing recipe contents

The AI Agent for Database Access Review and Permission Auditing recipe contains a service connector, app connections, and processes.

The following image shows the assets that the AI Agent for Database Access Review and Permission Auditing recipe package contains:

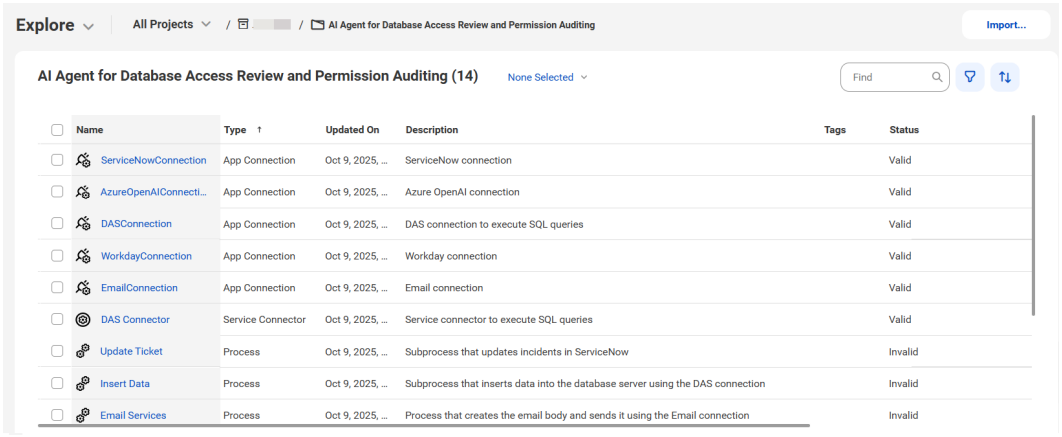

AI Agent for Database Access Review and Permission Auditing recipe assets

The following table lists the assets that the AI Agent for Database Access Review and Permission Auditing recipe package contains:

Asset Name	Asset Type	Description
DAS Connector	Service connector	Service connector to execute SQL queries.
ServiceNowConnection	App connection	ServiceNow connection.
AzureOpenAIConnection	App connection	Azure OpenAI connection.
DASConnection	App connection	DAS connection to execute SQL queries.
WorkdayConnection	App connection	Workday connection.
EmailConnection	App connection	Email connection.
Update Ticket	Process	Subprocess that updates incidents in ServiceNow.
Insert Data	Process	Subprocess that inserts data into the database server using the DAS connection.
Email Services	Process	Process that creates the email body and sends it using the Email connection.
Get Worker by Workday ID	Process	Subprocess that extracts the email address using the Workday ID.
Email Reply Listener	Process	Process that triggers an event upon receiving a reply from the email server.
Retrieve by Employee Email	Process	Subprocess that retrieves employee details from the database by the employee email using the DAS connection.
Get Worker by Employee ID	Process	Subprocess that extracts the managers email using the Workday connection.
Create ServiceNow Ticket	Process	Subprocess that creates incidents in ServiceNow.

CHAPTER 3

Using the AI Agent for Database Access Review and Permission Auditing recipe

To use the AI Agent for Database Access Review and Permission Auditing recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the DAS service connector.
3. Configure and publish the DAS connection.
4. Configure and publish the Azure OpenAI connection.
5. Configure and publish the ServiceNow connection.
6. Configure and publish the Email connection.
7. Configure and publish the Workday connection.
8. Publish the processes.
9. Invoke the process.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **AI Agent for Database Access Review and Permission Auditing** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

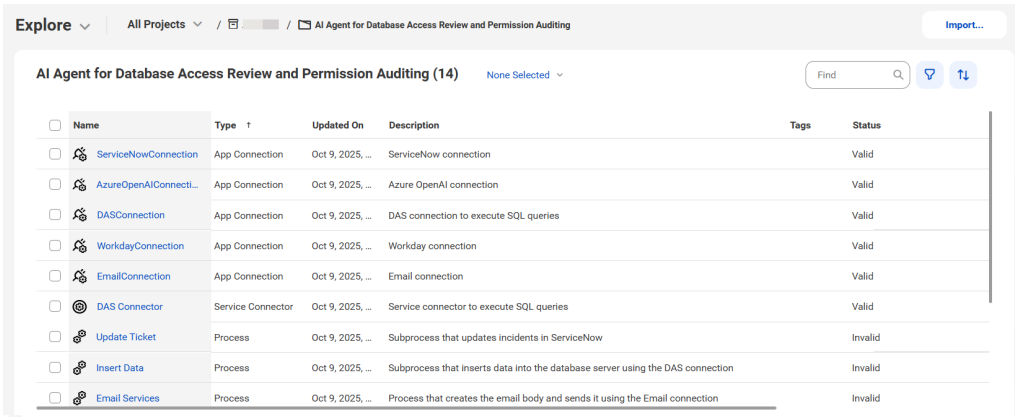

Step 2. Configure and publish the DAS service connector

Configure the JDBC driver and JDBC connection URL according to your database, and then publish the DAS Connector service connector.

The Data Access Service (DAS) connector requires an Informatica Secure Agent to run. You must download the Secure Agent from Administrator and enable the JDBC connector while configure the runtime environment. For more information, see *Runtime Environments* in Administrator.

Before configuring the DAS Connector, you must copy the JDBC Driver JAR file, for example `mssql-jdbc-12.4.2.jre8.jar` for SQL Server 2019 to the following directory and restart the Secure Agent:

```
<Secure Agent installation directory>\apps\process-engine\ext
```

This step is necessary to enable SQL server statement generation.

To configure the DAS service connector, perform the following steps:

1. Open the **DAS Connector** connector.
2. Select **Agent Only**.
3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
JDBC Driver	The fully qualified Java class name of the JDBC driver.
JDBC Connection URL	The JDBC connection URL to connect to the database.
User Name	The user name to log in to the database.
Password	The password to log in to the database.

Example configurations

For MySQL database:

- JDBC Driver Class Name: `com.mysql.jdbc.Driver`
- JDBC Connection URL: `jdbc:mysql://localhost:3306/DatabaseName`

  Note: If you encounter errors, try adding the following parameters to the URL:`?useSSL=false&allowPublicKeyRetrieval=true`

  For example:`jdbc:mysql://localhost:3306/ip1?useSSL=false&allowPublicKeyRetrieval=true`

Download the MySQL Connector JAR file from MySQL Connector/J and place it in the Secure Agent folder.

For SQL Server database

- JDBC Driver Class Name: `com.microsoft.sqlserver.jdbc.SQLServerDriver`
- JDBC Connection URL: `jdbc:sqlserver://localhost:1433;databaseName=mssqlupgradeto9244;`

Download the Microsoft SQL Server JDBC driver from Microsoft JDBC Driver and place it in the Secure Agent folder.

4. Depending on the MySQL or SQL Server database, the metadata of the target database might differ. Accordingly, you must update the connector actions based on your database. On the **Actions** tab, select the required action and perform the following steps:
   a. On the **Binding** tab, update the SQL query to match the syntax of your database.
   b. On the **Output** tab, for each field, update the **Get From** column value to reflect the actual column names in your database.
5. Test the connector using the installed Secure Agent.
6. Save and publish the connector.

Step 3. Configure and publish the DAS connection

Configure the connection type and Secure Agent, and then publish the DASConnection connection.

1. Open the **DASConnection** connection.
2. From the **Type** list, select **DAS Connector** from the recipe folder.
3. From the **Runtime Environment** list, select the same Secure Agent used for the service connector.
4. Save and publish the connection.

Step 4. Configure and publish the Azure OpenAI connection

Configure the endpoint URL and API key to connect to the Azure OpenAI insatnce, and then publish the AzureOpenAIConnection connection.

1. Open the **AzureOpenAIConnection** connection.
2. From the **Type** list, select **AzureOpenAI**.

3. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Endpoint_URL	The REST API endpoint for Azure OpenAI. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.
API_Key	The API key to authenticate Azure OpenAI connection requests. You can find this value in the **Keys & Endpoint** section when examining your resource from the Azure portal. Alternatively, you can find the value in **Azure OpenAI Studio** > **Playground** > **Code View**.

4. Save and publish the connection.

Step 5. Configure and publish the ServiceNow connection

Configure the client details, user credentials, service URL, and grand type to connect to the ServiceNow instance, and then publish the ServiceNowConnection connection.

1. Open the **ServiceNowConnection** connection.
2. From the **Type** list, select **ServiceNow**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Client_ID	ServiceNow client ID to generate a valid access and refresh token. Enter the client ID that you generated under **System OAuth** > **Application Registry** in ServiceNow.
Client_Secret	ServiceNow client secret that you generated under **System OAuth** > **Application Registry** in ServiceNow.
User_Name	ServiceNow user name with the security_admin role to generate client credentials in the ServiceNow instance.
Password	Password associated with the ServiceNow user account.
Service_URL	URL to access the ServiceNow instance.
Grant_Type	Grant type that the ServiceNow instance uses to get an access token for third-party clients authorization. Enter the value as **password**.

5. Save and publish the connection.

Step 6. Configure and publish the Email connection

Configure the authentication details, host and port of the email server in the EmailConnection connection, and then publish the connection.

1. Open the **EmailConnection** connection.
2. From the **Type** list, select **IICS Cloud Application Integration Email Service (Licensed for use)**.
3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. From the **Authentication Type** list, select **Password**.
5. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Authentication	Select **Enable**. Email Connector authenticates the user name and password that you enter in the email connection properties.
User Name	User name to log in to the Gmail or Microsoft Outlook email server. The user name is either the account name or the email address that is used to send the email with the synchronization results.
Password	The app password generated from Gmail or Microsoft Outlook server. For more information, see"Generating an App Password for Email Server" on page 8.
Security	Select the appropriate security type: - **SSL** for Gmail server. - **TLS** for Outlook server.
Connection Timeout	The connection timeout in milliseconds. The default is 30000 milliseconds.

Configure the following common properties on the connection creation page:

Property	Description
Host	Enter the hostname of the server. Example for the Gmail server: `smtp.gmail.com`
Port	Port for communication between the Process Server and the email server. Example for the Gmail server: `465`
Test Email Address	The email address that receives test mails from this connection.
From Email Address	The email address that appears in the From field for emails sent from this connection.

6. On the **Event Sources** tab, enter the IMAP host and port values of your email server in the **Host** and **IMAP port** fields.
   Example for Gmail server:
   - Host: `imap.gmail.com`
   - Port: `993`
7. Save and publish the connection.

Step 7. Configure and publish the Workday connection

Configure the user credentials, domain name, tenant name, module name, and version to the WorkdayConnection, and then publish the connection.

1. Open the **WorkdayConnection** connection.
2. From the **Type** list, select **Workday v2**.
3. From the **Runtime Environment** list, select the same Secure Agent as DASConnection.
4. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Username	User name for the Workday tenant to log in to the Workday service. You can enter the user name, or the user name and tenant in the following format: `<username>@<tenant name>`. For example, `jjoe@informatica_pt1`.
Password	Password associated with the user name.
Domain Name	Name of the Workday domain that contains the resources that you want to access.
Tenant Name	The Workday tenant ID that you want to access. For example, informatica_pt1.
Module Name	The Workday service that you want to access. For example, Human_Resources, Financial_Management, and Staffing.
Version	The Web Service Description Language (WSDL) version for a service that you want to fetch from Workday. The list of operations supported for a service depends on the WSDL version that you select. Default is v24.0

5. Save and publish the connection.

Step 8. Publish the processes

To publish the following processes, click **Actions** in the row that contains the process in the order specified and select **Publish**.

- Update Ticket
- Insert Data
- Get Worker by Workday ID
- Retrieve by Employee Email
- Get Worker by Employee ID
- Create ServiceNow Ticket
- Email Reply Listener
- Email Services

Step 9. Invoke the process

When you invoke the Email Services process using the employee's email address, the Employee ID is extracted to retrieve the manager's details from Workday. An email and a ServiceNow ticket are then sent to the manager. When the manager replies, an agent generates SQL Server statements, which are stored in the database.

1. Open the **Email Services** process and click **Actions** > **Properties Details** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL as shown in the following format:

   ```
   <Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?
   Email_ID=<Employee's email address>
   ```

3. Open a browser and paste the service URL.

You can also invoke the process using the Run Using option, REST or SOAP API endpoints in API clients, such as cURL, Postman, SOAP UI, or through any programming language.