Informatica® Cloud Application Integration
October 2025

MDM Data Tools for AI Agents

Informatica Cloud Application Integration MDM Data Tools for AI Agents
October 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-11-28

Table of Contents

Preface 5

Chapter 1: Introduction to MDM Data Tools for AI Agents recipe 6

Prerequisites 6

Deploying the BPR file 7

Chapter 2: MDM Data Tools for AI Agents recipe contents 9

MDM Data Tools for AI Agents recipe assets 9

Chapter 3: Using the MDM Data Tools for AI Agents recipe 11

Step 1. Copy and access the recipe 11

Step 2. Configure and publish the MDM Connector service connector 12

Step 3. Configure and publish the MDMConnection connection 12

Step 4. Configure and publish the processes 13

Step 5. Create and publish an API 14

Step 6. Create a managed API 17

Preface

Use *MDM Data Tools for AI Agents* to learn how to seamlessly connect AI Agents with Informatica Master Data Management (MDM) SaaS, enabling them to instantly access and utilize master data to respond to user queries. This guide assumes that you have a working knowledge of Informatica API Center.

CHAPTER 1

Introduction to MDM Data Tools for AI Agents recipe

The MDM Data Tools for AI Agents recipe leverages REST APIs to seamlessly connect AI Agents with Informatica Master Data Management (MDM) SaaS. This enables AI Agents to instantly access and utilize master data in order to respond effectively to user queries.

The recipe supports multiple operations, including:

- Searching for product and customer records using various input parameters
- Retrieving detailed profiles based on the business ID and entity
- Retrieving relationship data for products and customers using the business ID

For example, the following processes demonstrate how to retrieve and manage customer data using different parameters and identifiers.

Identify Customers

Searches for customers using one or more input parameters, such as name, phone number, email, identifier, or address, and returns a list of potential matches from Informatica Customer 360 SaaS.

Get Customer Record Details

Retrieves detailed information about a selected customer using the provided business ID and business entity.

Get Customer Relationships

Retrieves relationship data associated with a customer using the given business ID as a parameter.

You can use this recipe with MDM Extension for Agentforce to seamlessly connect Agentforce AI Agents in Salesforce with master records in MDM SaaS. For more information about MDM Extension for Agentforce, see *MDM Extension for Agentforce* in the Business 360 Console help.

Prerequisites

To use the MDM Data Tools for AI Agents recipe, the following prerequisites must be met:

- Ensure that you have configured a match model in Business 360 Console because the Identify Customers process in the recipe uses the match model to retrieve customer records.
- Create a user account in Administrator with **Native** authentication and assign the following roles:

  - API Policy Manager

- Customer 360 Manager
- Deployer
- Designer
- MDM Designer
- Product 360 Manager
- Service Consumer

For more information about the user roles, see *User Administration* in the Administrator help.

- Deploy the Business Process Archive (.bpr) file to dynamically configure code.

Deploying the BPR file


The `.bpr` file contains all the necessary configuration files required to deploy your project resources.

Each configuration file specifies the default map names and exclusions essential for the corresponding processes in the recipe, which you can update as needed.


Before you begin the deployment, download the `Infa_MDM_DataTools_Config.bpr` file on your local machine using the following link:

MDM Data Tools for AI Agents Configuration file


1. Log in to Informatica Intelligent Data Management Cloud (IDMC) using an account with administrative privileges.
2. Navigate to **Application Integration Console** > **Deployed Assets** > **Deploy**.
3. In the **BPR File** field, select the `.bpr` file from your local machine. Set the deployment target to **Cloud Server**, and then click **OK**.
   The deployed `.bpr` file name appears under the **Contributions** tab as shown in the following image:

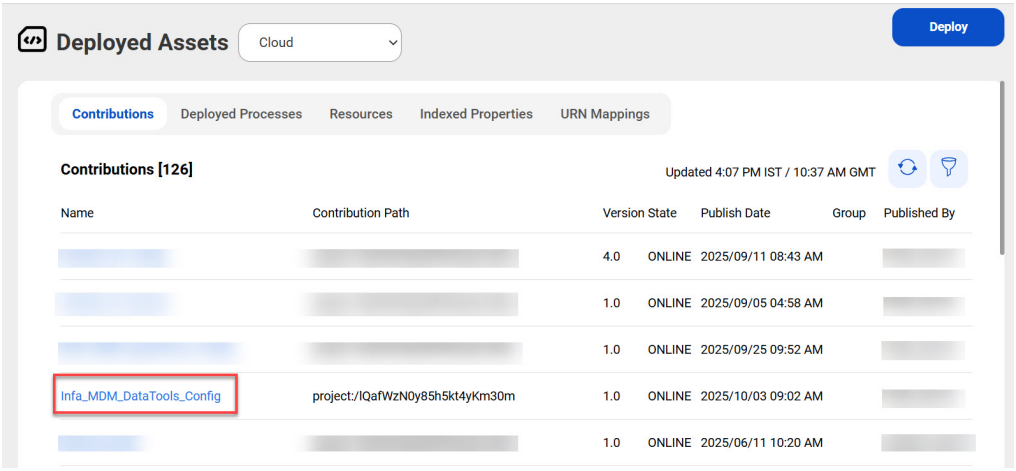

4. Open the `Infa_MDM_DataTools_Config.bpr` contribution that you just deployed.
   The contribution location and configuration files for all the Application Integration processes are listed under the **Contributed Resources** section as shown in the following image:

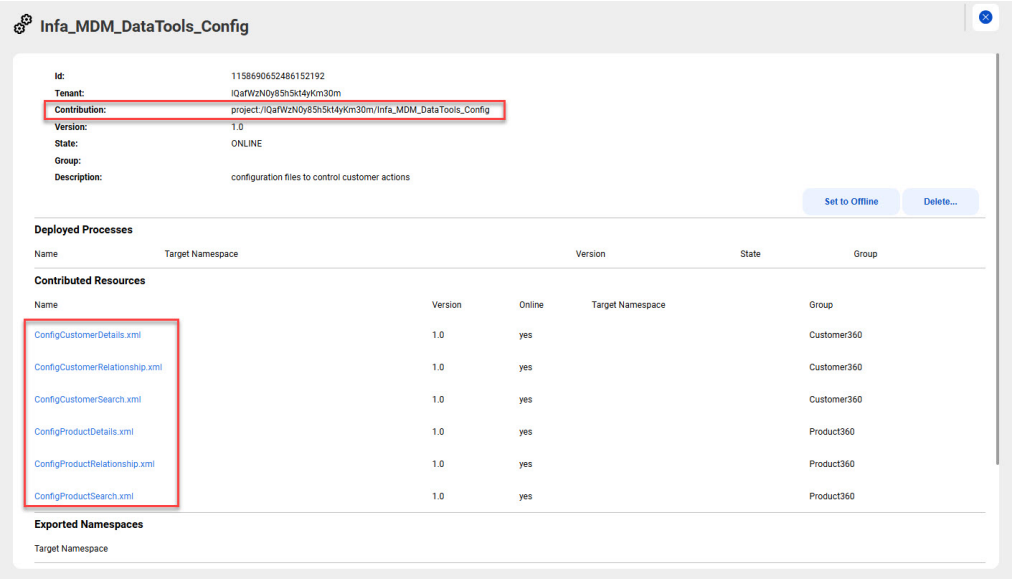

5. Open the configuration file and copy the location. You will need these paths to configure the processes. The following image shows the configuration file location:

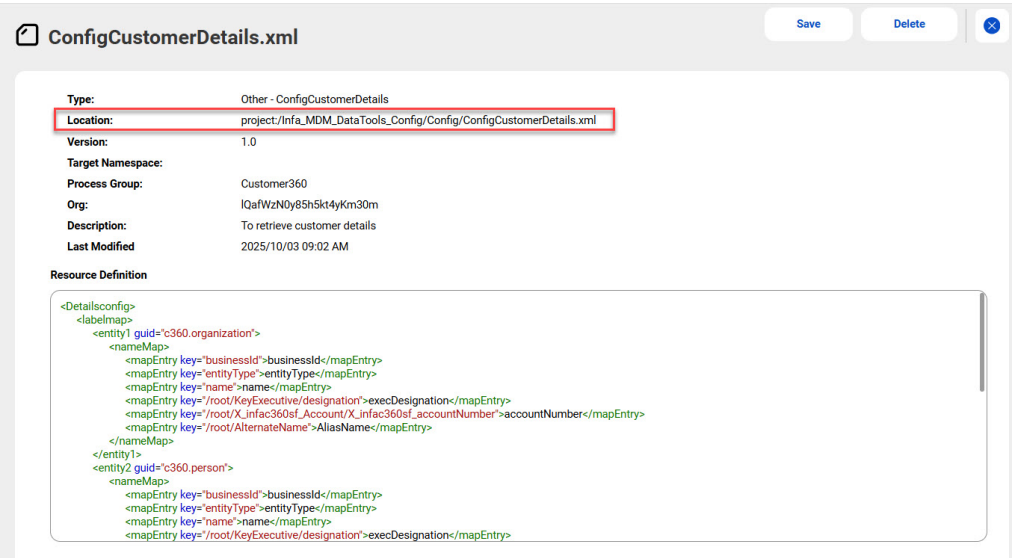

For more information about configuring the processes, see "Step 4. Configure and publish the processes" on page 13.

6. Modify the resource definitions for each configuration file, if required.

   The resource definitions include two main sections, labelmap and Exclusions.

   In the labelmap section, you can specify the elements whose values you want to change. For parent element, enter the names directly. For example, `<mapEntry key="businessId">businessId</mapEntry>`. For child elements, provide the full path of the element. For example, `<mapEntry key="/root/KeyExecutive/designation">execDesignation</mapEntry>`.


   In the Exclusions section, you can list elements that you want to exclude from the response. For example, `<item>/root/Status/Code</item>`.

CHAPTER 2

MDM Data Tools for AI Agents recipe contents

The MDM Data Tools for AI Agents recipe contains a service connector, an app connection, and processes.

The following image shows the assets that the MDM Data Tools for AI Agents recipe package contains:

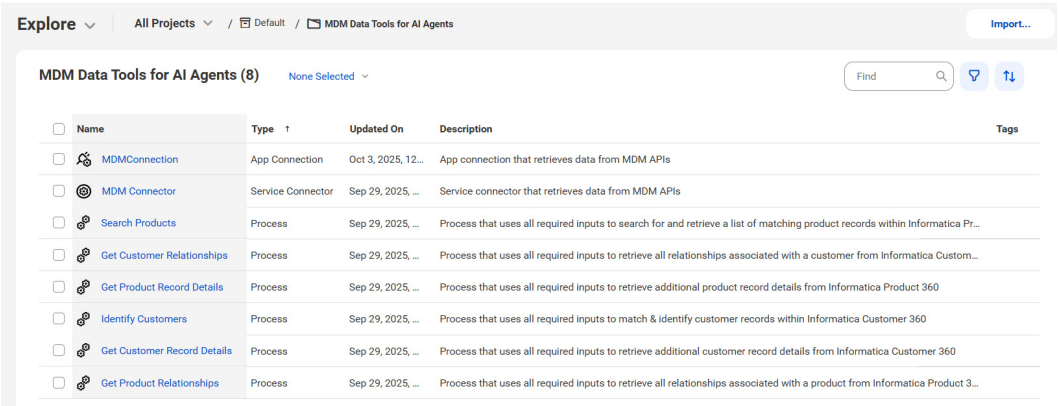

MDM Data Tools for AI Agents recipe assets

The following table lists the assets that the MDM Data Tools for AI Agents recipe package contains:

Asset Name	Asset Type	Description
MDM Connector	Service connector	Service connector that retrieves data from MDM APIs.
MDMConnection	App connection	App connection that retrieves data from MDM APIs.
Identify Customers	Process	Process that uses all required inputs to match and identify customer records within Informatica Customer 360.
Search Products	Process	Process that uses all required inputs to search for and retrieve a list of matching product records within Informatica Product 360.

Asset Name	Asset Type	Description
Get Customer Record Details	Process	Process that uses all required inputs to retrieve additional customer record details from Informatica Customer 360.
Get Product Record Details	Process	Process that uses all required inputs to retrieve additional product record details from Informatica Product 360.
Get Customer Relationships	Process	Process that uses all required inputs to retrieve all relationships associated with a customer from Informatica Customer 360.
Get Product Relationships	Process	Process that uses all required inputs to retrieve all relationships associated with a product from Informatica Product 360.

CHAPTER 3

Using the MDM Data Tools for AI Agents recipe

To use the MDM Data Tools for AI Agents recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Configure and publish the MDM Connector service connector.
3. Configure and publish the MDMConnection connection.
4. Configure and publish the processes.
5. Create and publish an API.
6. Create a managed API.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **MDM Data Tools for AI Agents** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

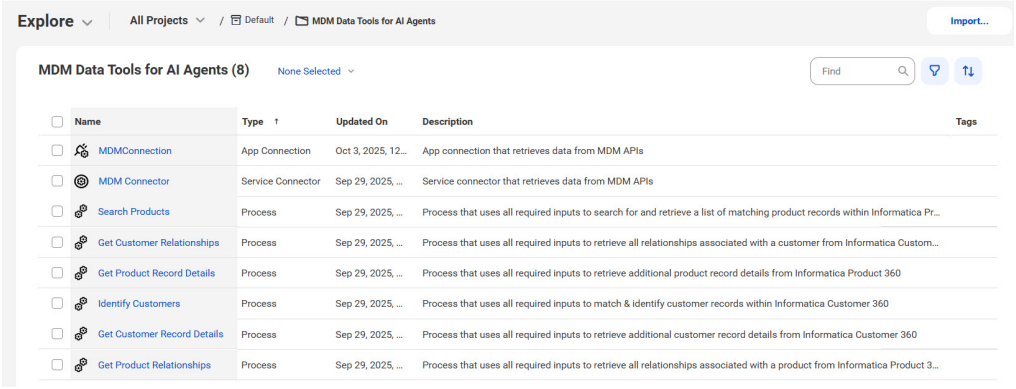

Step 2. Configure and publish the MDM Connector service connector

Configure the MDM POD URL to connect to the Informatica MDM SaaS business applications, and then publish the MDM Connector service connector.

1. Open the **MDM Connector** service connector.
2. In the **Connection Properties** section, enter the MDM POD URL in the **MDM_360_URL** property.
3. On the **Actions** tab, select the following actions and update the **URL** field on the **Binding** tab as follows:
   - **Login**. `<IDMC_POD_URL>/saas/public/core/v3/login`
   - **Get_MDM_Record_Details**. `<$MDM_360_URL>/business-entity/public/api/v1/entity/<$EntityType>/<$ID>`
   - **Search_API**. `<$MDM_360_URL>/search/public/api/v1/search`
   - **Related_Entites_API**. `<$MDM_360_URL>/business-entity/public/api/v1/related-entities/<$MDM_ID>`
   - **Search_Match_API**. `<$MDM_360_URL>/match-ng-pair-gen/public/api/v1/searchmatch/<$EntityType>`
4. Save and publish the connector.

Step 3. Configure and publish the MDMConnection connection

Configure the MDM POD URL to connect to the Informatica MDM SaaS business applications, and then publish the MDMConnection connection.

1. Open the **MDMConnection** connection.
2. From the **Type** list, select **MDM Connector** from the recipe assets folder.

3. From the **Runtime Environment** list, select **Cloud Server or any Secure Agent**.
4. In the **Connection Properties** section, enter the MDM POD URL in the **MDM_360_URL** property.
5. Save and publish the connection.

Step 4. Configure and publish the processes

Configure the allowed users and the configuration file locations of the deployed BPR file, and then publish the processes.

1. Open the processes in the following order:
   a. Search Products
   b. Get Product Record Details
   c. Get Product Relationships
   d. Identify Customers
   e. Get Customer Record Details
   f. Get Customer Relationships
2. For each process, on the **Start** tab of the Start step, enter the user name or service account with access to the service URL in the **Allowed Users** field.
3. On the **Assignments** tab of the **Initialize Variables** step, configure the following fields:
   - In the **tmp_Config_Info** field, enter the location of the configuration file corresponding to each process listed in the following table:

Process name	Configuration file name
Search Products	ConfigProductSearch.xml
Get Product Record Details	ConfigProductDetails.xml
Get Product Relationships	ConfigProductRelationship.xml
Identify Customers	ConfigCustomerSearch.xml
Get Customer Record Details	ConfigCustomerDetails.xml
Get Customer Relationships	ConfigCustomerRelationship.xml

   - Optionally, update the input search criteria fields for the processes as needed.
4. Save and publish the processes.

For more information about the configuration files and their locations, see "Deploying the BPR file" on page 7.

Step 5. Create and publish an API

In API Center, create a REST API with the Application Integration processes as operations, and then publish the API.

1. Log in to API Center.
2. Click **New** > **REST API** > **Create**.
3. Enter an API name.
   The API name must be unique across the location that you specify. You can't change the API name later.
4. Select a location to save the API.
5. Optionally, enter a description.
6. Click **Policies** > **Security**. On the right pane, select **Create new** > **OAuth 2.0** to enable OAuth 2.0 authentication for the API.
7. Next, add an operation for each Application Integration process that the recipe contains.
8. Perform the following steps to create an operation for the **Get Product Relationships** process:
   a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.
   b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Get Product Relationships** process.
   c. On the right pane, click the **Parameters** tab and add two parameters with values as described in the following table:

Key	Type	Data Type	Description	Required
MDM_ID	Query	String	Business ID of the product	False
Page	Query	Integer	Page number for paginated results. For the first call, the value must be set to 0. If the customer requests more relationships data, increment the value by 1 for each subsequent call to retrieve the next set of results.	False

   d. Enter the operation name as **GetProductRelationships**.
   e. Enter the operation endpoint URL as **/GetProductRelationships?MDM_ID&Page**.
   f. Select the request method as **GET**.
   g. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.
   h. Save the operation.

9. Perform the following steps to create an operation for the **Get Product Record Details** process:
   a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.
   b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Get Product Record Details** process.

c. On the right pane, click the **Parameters** tab and add the MDM_ID parameter with values as described in the following table:

Key	Type	Data Type	Description	Required
MDM_ID	Query	String	Business ID of the product	False

d. Enter the operation name as **GetProductRecordDetails**.

e. Enter the operation endpoint URL as **/GetProductRecordDetails?MDM_ID**.

f. Select the request method as **GET**.

g. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.

h. Save the operation.

10. Perform the following steps to create an operation for the **Search Products** process:

a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.

b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Search Products** process.

c. Enter the operation name as **SearchProducts**.

d. Enter the operation endpoint URL as **/SearchProducts**.

e. Select the request method as **POST**.

f. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.

g. Save the operation.

11. Perform the following steps to create an operation for the **Get Customer Relationships** process:

a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.

b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Get Customer Relationships** process.

c. On the right pane, click the **Parameters** tab and add two parameters with values as described in the following table:

Key	Type	Data Type	Description	Required
MDM_ID	Query	String	Unique business ID of the customer used to retrieve the customer relationships	False
Page	Query	Integer	Page number for paginated results. For the first call, the value should be set to 0. If the customer requests more relationships data, increment the value by 1 for each subsequent call to retrieve the next set of results.	False

d. Enter the operation name as **GetCustomerRelationships**.

e. Enter the operation endpoint URL as **/GetCustomerRelationships?MDM_ID&Page**.

f. Select the request method as **GET**.

g. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.

h. Save the operation.

12. Perform the following steps to create an operation for the **Get Customer Record Details** process:

    a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.

    b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Get Customer Record Details** process.

    c. On the right pane, click the **Parameters** tab and add two parameters with values as described in the following table:

Key	Type	Data Type	Description	Required
EntityType	Query	String	Detailed information of the customer	False
MDM_ID	Query	String	Unique business ID of the customer	False

    d. Enter the operation name as **GetCustomerRecordDetails**.

    e. Enter the operation endpoint URL as **/GetCustomerRecordDetails?EntityType&MDM_ID**.

    f. Select the request method as **GET**.

    g. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.

    h. Save the operation.

13. Perform the following steps to create an operation for the **Identify Customers** process:

    a. In the **Operations** area of the REST API page, click **+**, or on the right pane of the REST API page, click **Create a New Operation**.

    b. On the right pane, click **Implementation** > **Map existing** > **Browse**. Select the **Identify Customers** process.

    c. Enter the operation name as **IdentifyCustomers**.

    d. Enter the operation endpoint URL as **/IdentifyCustomers**.

    e. Select the request method as **POST**.

    f. On the right pane, click the **Configuration** tab and enter the response timeout value as **100** seconds.

    g. Save the operation.

14. Validate and save the API.

15. Click the **Publish** icon, enter a name for the published API if needed, and then click **Publish**.
    The API is published. You can now create a managed API from the published API.

Step 6. Create a managed API

In API Center, create a managed API from the published API, activate it, and enable OAuth 2.0 authentication. Then, share the operation endpoint URLs and OAuth access details with API consumers so that they can access the API operations.

1. To create a managed API, perform the following steps:
   a. On the **API Console** page, click the **Published APIs** tab.
   b. Click the **Actions** menu on the selected published API row and select **Create a Managed API**.
   c. Optionally, enter a name for the managed API.
   d. Enter the URL context as **InfaMdmActions**.
   The context name must be unique across the organization. API Center appends the context to the API URL.
   e. Click **Save** to save the managed API.
2. To activate the managed API, perform the following steps:
   a. On the **API Console** page, click the **Managed APIs** tab.
   b. Click the **Actions** menu on the managed API row with a **Created** status and select **Activate Managed API**.
   API Center activates the managed API and creates endpoint URLs for each operation.
   c. On the **Managed APIs** tab, expand the activated managed API, and then click **Copy** under each operation's **API Endpoint URL** column. You'll need to share these URLs with API consumers.
3. To create an OAuth 2.0 client and attach it to the managed API, perform the following steps:
   a. Click **Configuration** > **Authorization** > **Add OAuth 2.0 Client**.
   b. On the **Authentication** tab, enter the name and password of the user, and then click **Next**.

      Note: The user name that you enter here must match with the allowed user name configured in the processes.
   c. On the **Details** tab, enter the client name and access token timeout, and then click **Next**.
   The timeout value can range between 5 and 1440 minutes.
   d. Click **Selected Resources**, select the managed API that you created, and then click **Next** > **Finish**.
   The OAuth 2.0 client ID, client secret, and authorization header values are generated. Copy these details to share with API consumers. You can't copy these details after you exit the wizard.
4. Share the operation endpoint URLs and OAuth access details with API consumers so that they can access the API operations.