Informatica® Cloud Application Integration
September 2025

Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog

Informatica Cloud Application Integration Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog
September 2025

© Copyright Informatica LLC 2025

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Informatica, Informatica Platform, Informatica Data Services, PowerCenter, PowerCenterRT, PowerCenter Connect, PowerCenter Data Analyzer, PowerExchange, PowerMart, Metadata Manager, Informatica Data Quality, Informatica Data Explorer, Informatica B2B Data Transformation, Informatica B2B Data Exchange Informatica On Demand, Informatica Identity Resolution, Informatica Application Information Lifecycle Management, Informatica Complex Event Processing, Ultra Messaging, Informatica Master Data Management, and Live Data Map are trademarks or registered trademarks of Informatica LLC in the United States and in jurisdictions throughout the world. All other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2025-09-22

Table of Contents

Preface 5

Chapter 1: Introduction to Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe 6

Prerequisites 6

Chapter 2: Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe contents 7

Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe assets . . . 8

Chapter 3: Using the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe 10

Step 1. Copy and access the recipe 10

Step 2. Publish the CDGC service connector 11

Step 3. Configure and publish the CDGC connection 11

Step 4. Configure and publish the processes 12

Step 5. Invoke the process 12

- Publish and run the guide 12
- Run the process by passing inputs from the Process Designer 13
- Run the process by passing inputs from a web browser 14

Rules and guidelines 14

Preface

Use *Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog* to learn how to automate the creation or update of uniqueness data quality rule occurrences for the selected data elements in Informatica Data Governance and Catalog (CDGC).

CHAPTER 1

Introduction to Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe

The Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe is based on REST APIs. Use the recipe to create or update a rule occurrence with a score for the selected data elements based on profiling results from Informatica Data Governance and Catalog (CDGC). This recipe generates scores based on profiling results, effectively streamlining the typically time-consuming process of managing uniqueness rules within CDGC.

Since CDGC does not have a built-in feature to easily generate scorecards showing the number of unique values for data elements, creating uniqueness rules can be time-consuming. This recipe streamlines and automates that process.

When updating a rule occurrence, the new score will be published even if the data has not been re-profiled. The score might be identical to the previous one when the rule occurrence was created. In addition to publishing the score, updating a rule occurrence also changes the Threshold, Target, and Criticality values.

Prerequisites

To use the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe, the following prerequisites must be met:


- The Data Element for which you want to create the rule occurrence must be profiled.
- You must have permissions to perform the following tasks:
  - Run the process
  - Read profiling statistics
  - Create and update rule occurrences

CHAPTER 2

Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe contents

The Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe contains a process object, a service connector, an app connection, processes, and a guide.

The following image shows the assets that the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe package contains:

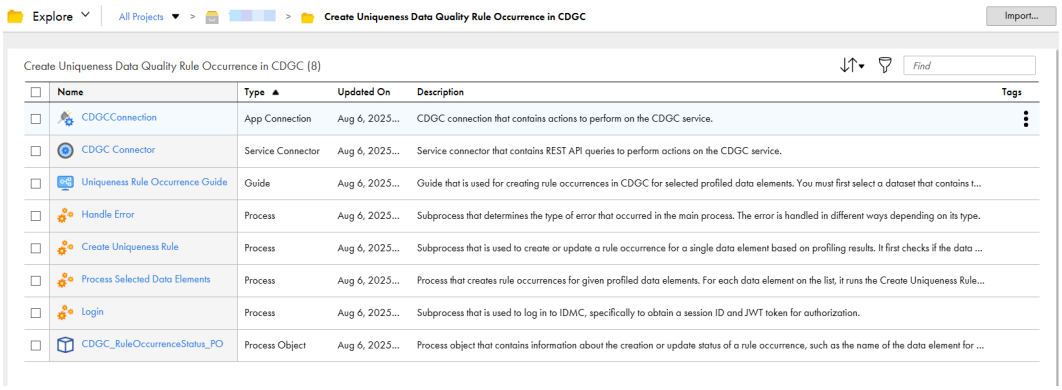

Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe assets

The following table lists the assets that the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe package contains:

Asset Name	Asset Type	Description
CDGC_RuleOccurrenceStatus_PO	Process object	Contains information about the creation or update status of a rule occurrence, such as, the name of the data element for which the Rule Occurrence (RO) is being created or updated, the RO name, and the link to the RO. It serves as the output of the Create Uniqueness Rule process and is also used in the final table of the guide.
CDGC Connector	Service connector	Service connector that contains REST API queries to perform actions on the CDGC service.
CDGCConnection	App connection	CDGC connection that contains actions to perform on the CDGC service.
Login	Process	Subprocess that is used to log in to IDMC, specifically to get a session ID and JWT token for authorization.
Create Uniqueness Rule	Process	Subprocess that is used to create or update an RO for a single data element based on the profiling results. It first checks if the data element is profiled. Then, it verifies if a rule occurrence with the appropriate name and uniqueness dimension for the given data element already exists. If not, it creates an RO and score, and publishes them. If the RO exists, it updates the Target, Threshold, and Criticality values and publishes a new score. This subprocess is used within the Process Selected Data Elements process. Note that the new score will be published even if the data has not been re-profiled, so it might be identical to the previous score.
Handle Error	Process	Subprocess that determines the type of error that occurs in the main process. The error is handled in different ways depending on its type.

Asset Name	Asset Type	Description
Process Selected Data Elements	Process	Process that creates rule occurrences for the given profiled data elements. For each data element in the list, it runs the Create Uniqueness Rule process. You must provide the catalog source name, dataset name, list of data elements, threshold, target, and criticality as input. The process then validates the provided target and threshold values.
Uniqueness Rule Occurrence Guide	Guide	Guide that is used to create the rule occurrences in CDGC for selected profiled data elements. You must first select a dataset that contains the data elements for which you want to create rule occurrences. Only datasets with profiled data elements are available for selection. After selecting a dataset, the guide displays all the profiled data elements within that dataset. You can select multiple data elements simultaneously to proceed. Next, specify the values required to create rule occurrences, such as Threshold, Target, and Criticality. These values can be selected from predefined lists. The guide validates all input values to ensure correctness and compliance with the rules. After you select the values and provide inputs, the guide displays a summary list of newly created or updated rule occurrences, along with any errors encountered so that you can address them as needed. The guide streamlines rule occurrence creation by guiding you step-by-step through dataset and data elements selection and their respective configuration values.

CHAPTER 3

Using the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe

To use the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe, you must perform the following steps manually:

1. Copy and access the recipe.
2. Publish the CDGC service connector.
3. Configure and publish the CDGC connection.
4. Configure and publish the processes.
5. Invoke the process.

Step 1. Copy and access the recipe


Copy the pre-configured assets in the recipe to a separate project or folder.

1. Open the **Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog** recipe and click **Use**.
2. Select the location where you want to copy the recipe, and then click **Continue**.
3. In the **Copying the recipe** dialog box, click **OK**.

   It might take some time for the recipe to get copied. You will receive a notification when the recipe is ready for use.
4. After the recipe is copied, click **Explore** to access the recipe content.

5. Navigate to the project or folder where you copied the recipe or enter the recipe name in the **Find** box.

   All the assets in the recipe are displayed as shown in the following image:

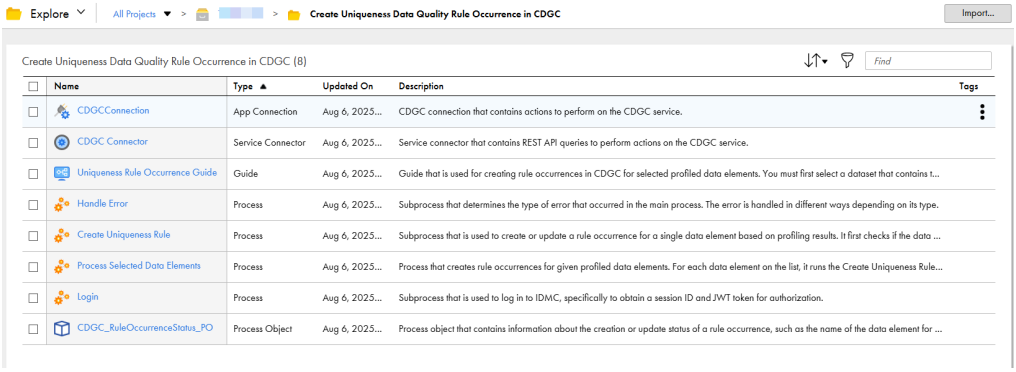

Step 2. Publish the CDGC service connector

To publish the **CDGC Connector** service connector, open the **CDGC Connector** service connector and click **Publish**.

You can also publish the **CDGC Connector** from the assets page, by clicking **Actions** in the row that contains the service connector and selecting **Publish.**

Step 3. Configure and publish the CDGC connection

Configure the user credentials and URL details in the CDGCConnection connection, and then publish the connection.

1. Open the **CDGCConnection** connection.
2. In the **Connection Properties** section, enter values for the following properties:

Property	Description
Hostname_Login	Base URL of the POD to log in to the IDMC organization. For example, `https://<cloud provider>-<region>.informaticacloud.com.`
User_Name	User name of the IDMC organization.
Password	Password for IDMC organization.
API_URL	URL of the IDMC API gateway. For example, `https://idmc-api.<cloud provider>-<region>.informaticacloud.com.`
API_CDGC	URL of the CDGC API gateway. For example, `https://cdgc-api.<cloud provider>-<region>.informaticacloud.com.`

3. Save and publish the connection.

Step 4. Configure and publish the processes

To publish the following processes, click **Actions** in the row that contains the processes in the order specified below and select **Publish**.

1. Login
2. Handle Error
3. Create Uniqueness Rule
4. Process Selected Data Elements

Note: In the **Process Selected Data Elements** process, set the tracing level to **Verbose** on the **Advanced** tab of the **Start** step to view the process details in Application Integration Console.

Step 5. Invoke the process

You can invoke the process to create or update a Rule Occurrence (RO) with a score for the selected data elements based on profiling results from CDGC.

To invoke the Process Selected Data Elements process, you can use one of the following options:

- "Publish and run the guide" on page 12
- "Run the process by passing inputs from the Process Designer" on page 13
- "Run the process by passing inputs from a web browser" on page 14

You must pass the following input parameters while invoking the process using the web browser and the Run Using option:

- In_Catalog_Source: The name of the catalog source that the data element for which the RO is being created or updated belongs to.
- In_Dataset: The name of the dataset that the data element for which the RO is being created belongs to.
- In_Target: This value defines the ideal level of quality that should be achieved. If the score is greater than or equal to the Target, the Score status is set to Good.
- In_Threshold: The minimum threshold of acceptability below which the data is considered as incorrect. If the score is greater than or equal to the Threshold and lesser than the Target, the Score status is set to Acceptable. If the score is lesser than the Threshold, the Score status is set to Not Acceptable.
- In_Criticality: Parameter that defines the criticality level, which can be Low, Medium, or High, used to prioritize and classify the RO.
- In_Data_Elements: A list of Data Element names for which you want to create or update the RO. To ensure a smooth operation, avoid creating an RO for more than eight data elements at a time.

Publish and run the guide

A guide provides step-by-step prompts that help users review, enter, or confirm data visually, reducing manual entry errors. This guide simplifies rule occurrence creation by leading users through dataset and data element selection and configuration.

1. Open the **Uniqueness Rule Occurrence Guide** guide.
2. On the **Start** tab of the Start step, ensure that the **Run As** field is set to **Current User**.
3. Save and publish the guide.

4. On the **Actions** menu, click **Run**. Alternatively, you can copy the execution URL from the **Properties Detail** dialog box to run the guide.
5. On the **Select Dataset** page, select the dataset that contains the data elements for which you want to create rule occurrences, and click **Next**.
6. On the next screen, select one or more profiled Data Elements and click **Next**.

   Note: To ensure a smooth operation, avoid creating rule occurrences for more than eight data elements at a time.
7. Enter values for the Threshold, Target, and Criticality fields.

   Note: For Threshold and Target, you can enter only numeric values, limited to two decimal places. If you enter an invalid value, such as a negative number, an error occurs.
8. Click **Run**.
   The process will create or update rule occurrences for the selected data elements. The process might take some time depending on the number of data elements selected.

   The next screen displays a summary list of the newly created or updated rule occurrences. Any errors that occurred during creation or update will also be shown in the table. For each rule occurrence, the table provides details, such as the linked Data Element and its ID, the rule occurrence name and ID, the link to it in CDGC, and other relevant information.
9. Click **Done**.

If you encounter an error stating that this guide session is no longer available and cannot be used, click **OK**, and then click **Run** at the bottom. A new screen will appear displaying the results, which are accurate despite the session error.

You can also use the embed code to embed the guide into an HTML document of a third-party application.

Run the process by passing inputs from the Process Designer

Pass input in the JSON or XML format through the **Run Using** option of the process.

1. Open the **Process Selected Data Elements** process and click **Actions** > **Run Using**.
2. Click **New Input**, enter a name for the process input, and click **Save**.
   The payload is populated in the **Process Input** section.
3. From the **Encoding** list, select **JSON**.
4. Enter the input field values for the process as shown in the following snippet:

```
{
 "In_Catalog_Source": "<Catalog Source Name>",
 "In_Dataset": "<Dataset Name>",
 "In_Target": "<Target value>",
 "In_Threshold": "<Threshold value>",
 "In_Criticality": "<Criticality value>",
 "In_Data_Elements": "<First Data Element Name>,<Second Data Element Name>"
}
```

   You can enter multiple data elements separated by commas. To ensure a smooth operation, avoid creating rule occurrences for more than eight data elements at a time.
5. Validate, save, and run the process.

Run the process by passing inputs from a web browser

When you pass input values in the service URL and run the process in a web browser, you will receive information about the created or updated rule occurrences.

1. Open the **Process Selected Data Elements** process and click **Actions** > **Properties Detail** > **Copy Service URL**.
2. Open a text editor and add the input fields and values to the service URL as shown in the following format:
   `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>?In_Catalog_Source=<Catalog Source Name>&In_Dataset=<Dataset Name>&In_Target=<Target value>&In_Threshold=<Threshold value>&In_Criticality=<Criticality level>&In_Data_Elements=<Data Elements separated by %2C>`

   Here, `<Cloud Application Integration POD URL>/active-bpel/public/rt/<API_name>` is the service URL that you copied in step one.

   Note: The data elements must be separated by `%2C`, which represents a comma. For example, to pass BusinessID and Country as Data Elements, set the value of In_Data_Elements to `BusinessID%2CCountry`. To ensure a smooth operation, avoid creating rule occurrences for more than eight data elements at a time.
3. Open a browser and paste the service URL.
   The process runs and returns the information about the created or updated rule occurrences.

Note: When you run the process by sending a request through the web browser, the response includes a rule occurrence link that might contain "\" characters. You must remove the "\" characters before using the link.

Rules and guidelines

Consider the following rules and guidelines when working with the Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog recipe:

- The score is calculated using profiling results retrieved through an API from CDGC.
  NULL values are never counted as unique. However, if all the values are identical, for example, all the values are ABCD, exactly one of them is considered as unique.

  Examples:

  - If all the profiled values are NULL, the total number of rows equals the number of NULLs, resulting in a score of 0%.
  - If all the profiled values are non-NULL, for example, if the total number of rows is 10 and all the values are ABC, then one ABC value is treated as unique, and the remaining nine are treated as non-unique, giving a score of 10%.

  NULL values are always treated as non-distinct.
- When you invoke the process using a web browser or the Run Using option, you must enter the input field values correctly. For example, if you provide an incorrect catalog source name or specify a data element that is not profiled or does not exist, the process will complete without any errors, but it will not create or update the rule occurrence.
  However, if you enter an incorrect Target or Threshold value, the process will return an appropriate error.

  Consider the following guidelines when entering the Target or Threshold values:

  - Neither value can be negative or greater than 100.

- The Threshold value cannot exceed the Target value.
- Both values can have up to two decimal places.

If you provide a data element that does not exist, the recipe ignores the value and does not create a rule occurrence for it. It does not return an error.

If you enter an invalid value for Criticality, the system value defaults to `Medium`.

It is possible for a catalog source to contain a dataset with the same name as the catalog source, and both might include a data element with the same name. If both the data elements are profiled, the process creates a rule occurrence for each data element. This does not occur when using the guide, as the user selects a specific dataset from the list.

- The process runs on the Cloud Server. If it takes longer than 95 seconds, the session will time out and display an error message.
  The default timeout value for Application Integration Cloud Server is set to 95 seconds. This value is standardized across all organizations hosted in the cloud and cannot be modified by user. For more information, see the Knowledge Base article 552590.

  Even if a timeout occurs, rule occurrences will still be created or updated. Although the results won't be displayed immediately, the process will complete the creation or update of rule occurrences in CDGC.

  If you change the tracing level in the process from None to Verbose and run the process using a web browser or the Run Using option, you can view the result in Application Integration Console.

  To view the result in Application Integration Console, perform the following steps:

  1. In Application Integration Console, on the **Processes** tab, search for the most recent run of the **Process Selected Data Elements** process.
  2. Click the process run ID to open it.
  3. Click **Advanced View** in the top-right corner to access the **Active Process Detail** page.
  4. From the left panel, select **variables** > **output**.
     You can view the result in the **Variable Instance Data** section on the right panel.