How-To Library

Informatica

Connect to Oracle Using Oracle Connection Manager from PowerCenter

© Copyright Informatica LLC 2020, 2021. Informatica, the Informatica logo, PowerCenter, and PowerExchange are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https:// www.informatica.com/ trademarks.html.

Abstract

You can use Oracle Connection Manager to connect to an Oracle database from PowerCenter®. This article discusses the tasks that you must perform to configure connectivity to Oracle using Oracle Connection Manager from the PowerCenter Client.

Supported Versions

- PowerCenter 10.4.1

Table of Contents

Overview. 2
Step 1. Create the tnsnames.ora File on the PowerCenter Client Machine. 2
Step 2. Configure the ODBC Data Source. 3
Step 3: Configure the tnsnames.ora File on the PowerCenter Server Machine. 5
Step 4. Configure an Oracle Connection. 5

Overview

You can use Oracle Connection Manager to connect to an Oracle database from PowerCenter.

Oracle Connection Manager is a network solution that serves as an intermediate server or proxy server that forwards connection requests to the Oracle database servers or to other proxy servers. Oracle Connection Manager offers multiple network solutions, including increased scalability, simplified access control, and improved availability.

This article describes the following tasks that you must perform to configure connectivity to Oracle using Oracle Connection Manager from the PowerCenter Client:

1. Create a `tnsnames.ora` file on the machine that hosts the PowerCenter Client.
2. Configure the ODBC data source and add the TNS name entries for Oracle Connection Manager to import metadata.
3. Configure the `tnsnames.ora` file on the machine that hosts the PowerCenter Integration Service.
4. Configure an Oracle connection in Workflow Manager with the TNS details.

Step 1. Create the tnsnames.ora File on the PowerCenter Client Machine

To connect to Oracle using Oracle Connection Manager, you must create a `tnsnames.ora` file with the Oracle Connection Manager details on the PowerCenter Client machine.

▶ Define the net service name entry for the Oracle Connection Manager service. The definition must contain the keyword-value pair SOURCE_ROUTE=YES.

See the following sample `tnsnames.ora` file with the Oracle Connection Manager service entry:

```
ORCL19C_CMAN =
(description=
   (address_list=
     (source_route=yes)
     (address=(protocol=tcp)(host=inrh74ocm.mycompany.com)(port=1521))
     (address=(protocol=tcp)(host=inrh74oradb.mycompany.com)(port=1521))
```

```
    )
  (connect_data=
     (service_name=ORCL19C.mycompany.com)
    )
)
```

Step 2. Configure the ODBC Data Source

You must create the ODBC data source for Oracle and add the TNS details for Oracle Connection Manager so that you can import the metadata and preview the data from the PowerCenter Client. Create the data source on the machine where you installed the PowerCenter Client.


Configure the data source in the ODBC Data Source Administrator. You must create the 32-bit data source for the PowerCenter Client.

1. To start the ODBC Data Source Administrator wizard, perform one of the following tasks:
   a. To create a 32-bit data source for the PowerCenter Client, open the Control Panel and click **Administrative Tools**. Then, double-click ODBC Data Sources (32-bit).
   b. Alternatively, enter the following command at the command prompt:

      ```
      %windir%\SysWOW64\odbcad32.exe
      ```

      The ODBC Data Source Administrator wizard appears.
2. On the **System DSN** tab, click **Add**.
3. In the **Create a New Data Source** dialog box, select **DataDirect 8.0 Oracle Wire Protocol** from the list of available drivers, and click Finish.
4. On the **General** tab of the **ODBC Oracle Wire Protocol Driver Setup** dialog box, enter the data source name and the following details:
   - Specify the absolute path of the `tnsnames.ora` file in **TNSNames File** property.
   - Specify the server name value in the **Server Name** field to which you want to connect. For example, ORCL19C_CMAN.

The following image shows the ODBC Oracle Wire Protocol Driver Setup dialog box with the configured details:

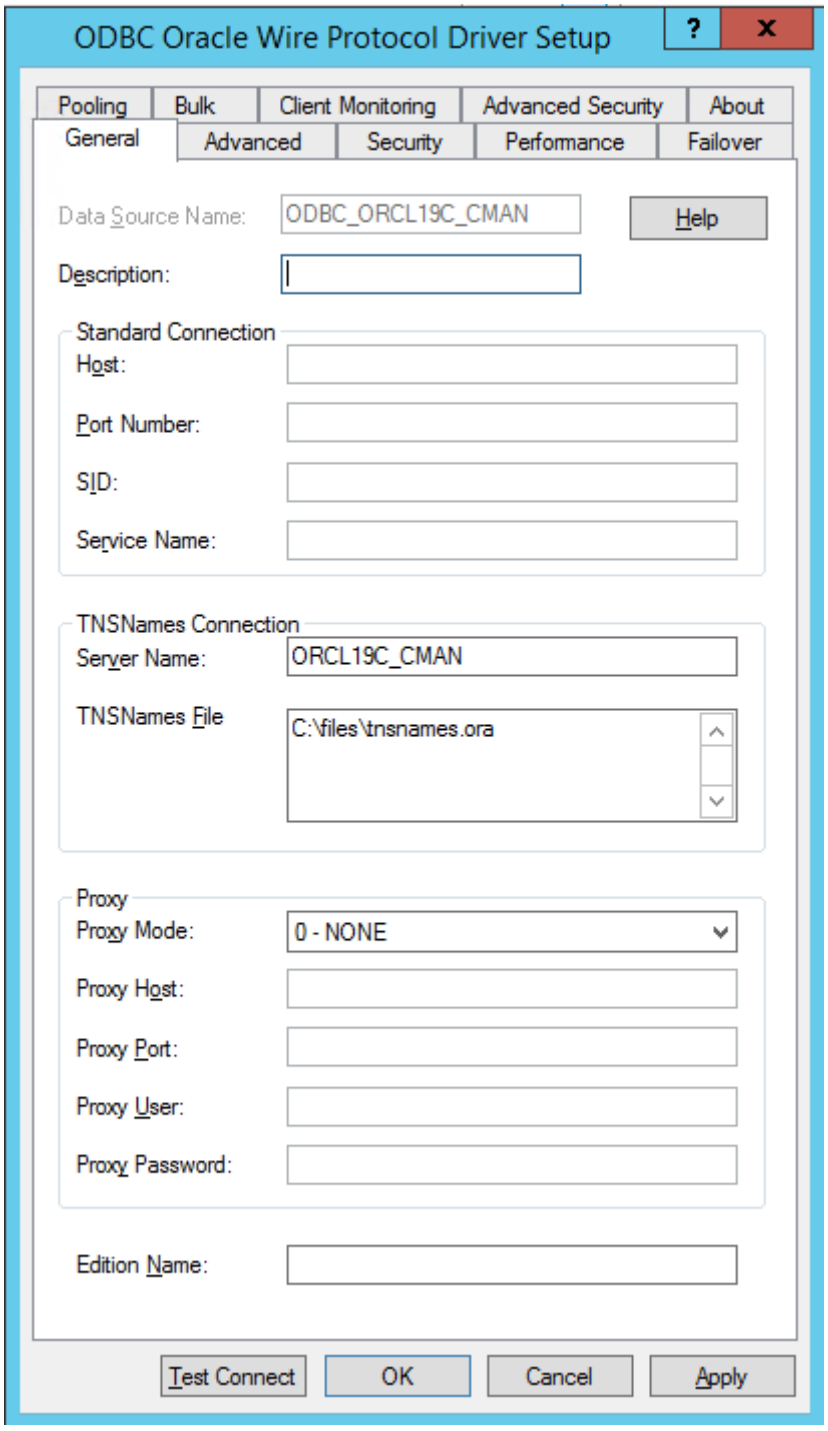

5. Click **OK** to create the ODBC data source for Oracle.

Step 3: Configure the tnsnames.ora File on the PowerCenter Server Machine

Configure the `tnsnames.ora` file on the machine where the PowerCenter Integration Service runs.

1. Navigate to the following Oracle Client directory: `<Oracle Installation Directory>\Network\admin`
2. Open the `tnsnames.ora` file and edit to enter the values similar to the following sample syntax:

```
ORCL19C_CMAN =
(description=
   (address_list=
     (source_route=yes)
     (address=(protocol=tcp)(host=inrh74ocm.mycompany.com)(port=1521))
     (address=(protocol=tcp)(host=inrh74oradb.mycompany.com)(port=1521))
   )
 (connect_data=
    (service_name=ORCL19C.mycompany.com)
   )
)
```


3. Save and close the `tnsnames.ora` file.
4. Set the *TNS_ADMIN* environment variable to the directory path of the `tnsnames.ora` file.

Step 4. Configure an Oracle Connection

Configure an Oracle connection in Workflow Manager and add the TNS details. You can use this connection in a session to read data from or write data to Oracle from PowerCenter.

1. Click **Connections** > **Relational**.
2. Click **New** to create new connection.
3. Select **Oracle** subtype, and click **OK**.
4. Specify the username and password for the Oracle connection.

5. In the **Connection String** field, enter the TNS name created for Oracle Connection Manager service in the `tnsnames.ora` file:

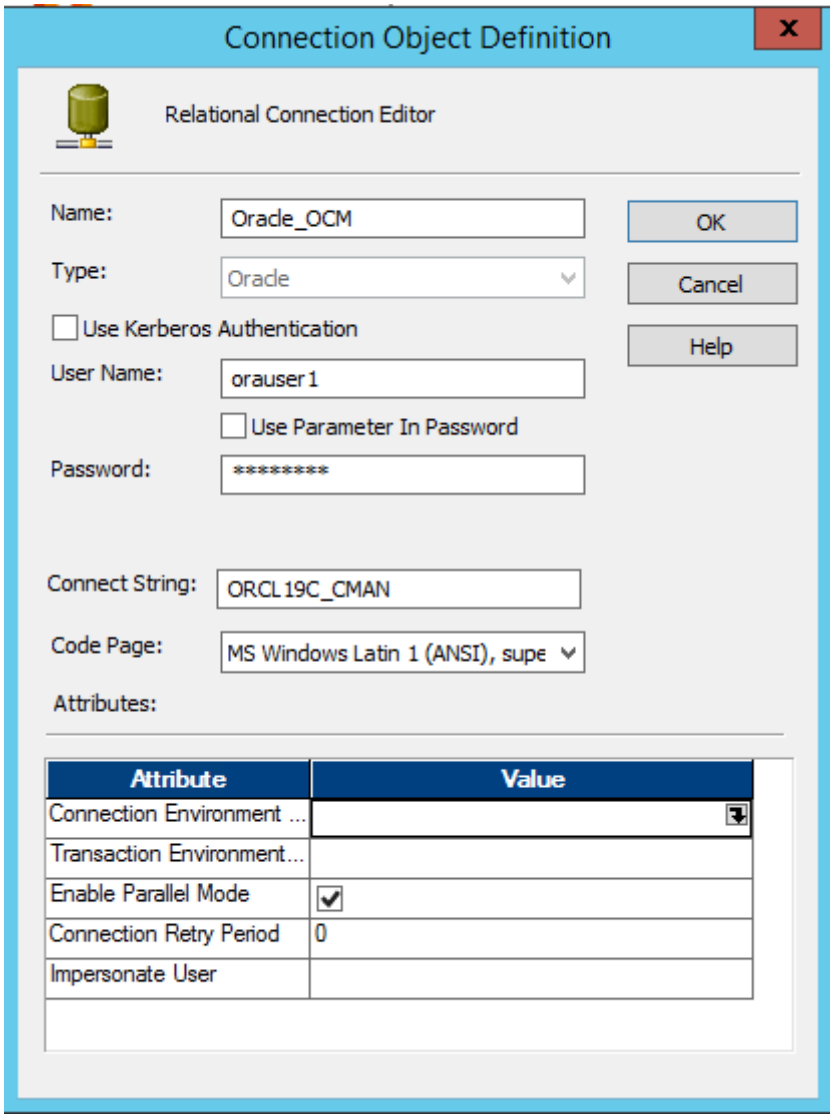

6. Click **OK**.

Authors

Dimple Rai

Gurumoorthy N