Informatica® Cloud Data Marketplace
July 2026

API Reference

Informatica Cloud Data Marketplace API Reference
July 2026

© Copyright Informatica LLC 2021, 2026

Publication Date: 2026-08-03

Table of Contents

Preface 9

Part I: Introduction 10

Chapter 1: Introduction 11

Chapter 2: How to call a Data Marketplace API 12

Authenticate using JWT 12

- Authentication 12
- Send Requests 13

Authenticate using Application Integration 15

- Create a system service action 16
- Invoke a system service action 19
- Download templates to design a system service action 19

Response body and response codes 20

Part II: Authenticate using JWT 21

Chapter 3: Define settings for data collections 22

Categories 22

- Create categories 23
- Retrieve a category 28
- Retrieve all categories 31
- Modify categories 36
- Delete categories 42

Chapter 4: Manage data collections 43

Create data collections 44

Retrieve a data collection 49

Retrieve all data collections 51

Modify data collections 55

Delete data collections 60

Add or remove data assets from data collections 61

Retrieve the data assets of a data collection 63

Retrieve the consumer accesses of a data collection 66

Manage the delivery targets of a data collection 68

- Create delivery targets 69
- Retrieve a delivery target 74
- Retrieve all delivery targets 77
- Modify delivery targets 80
- Delete delivery targets 84

Chapter 5: Manage orders and consumer accesses. 85

Orders. 85

Create orders. 86

Retrieve an order. 92

Retrieve all orders. 94

Approve orders. 98

Fulfill orders. 99

Cancel orders. 102

Reject orders. 103

Delete orders. 104

Consumer accesses. 104

Create consumer accesses. 105

Retrieve a consumer access. 109

Retrieve all consumer accesses. 111

Modify custom attributes of consumer accesses. 115

Submit consumer access withdrawals. 117

Withdraw consumer accesses. 118

Cancel consumer access withdrawals. 119

Delete consumer accesses. 120

Part III: Authenticate using Application Integration. 121

Chapter 6: Define settings for data collections. 122

Categories. 122

Create categories. 122

Retrieve categories. 124

Modify categories. 130

Delete categories. 133

Delivery formats. 134

Create delivery formats. 134

Retrieve delivery formats. 136

Modify delivery formats. 139

Delivery methods. 141

Create delivery methods 141

Retrieve delivery methods. 143

Modify delivery methods. 146

Delivery templates. 148

Create delivery templates. 148

Retrieve delivery templates. 152

Modify delivery templates. 158

Terms of use. 162

Create terms of use. 162

Retrieve terms of use. . . . 165
Modify terms of use. . . . 168
Update the status of a terms of use. . . . 171
Usage types. . . . 172
Create usage type. . . . 172
Retrieve usage type. . . . 174
Modify usage type. . . . 177
Update the status of an usage type. . . . 180
Cost centers. . . . 181
Create cost centers. . . . 181
Retrieve cost centers. . . . 183
Modify cost centers. . . . 186

Chapter 7: Manage Data Marketplace content. . . . 189

Data elements. . . . 189
Create data elements. . . . 189
Retrieve data elements. . . . 191
Modify data elements. . . . 194
Delete data elements. . . . 196
Manage the data quality information of a data element. . . . 197
Data assets. . . . 200
Create data assets. . . . 200
Retrieve data assets. . . . 203
Modify data assets. . . . 207
Delete data assets. . . . 210

Chapter 8: Manage data collections. . . . 212

Create data collections. . . . 212
Endpoint and method. . . . 212
Request. . . . 212
Example request. . . . 215
Response. . . . 216
Retrieve data collections. . . . 217
Endpoint and method. . . . 217
Request. . . . 218
Example request. . . . 221
Response. . . . 221
Modify data collections. . . . 226
Endpoint and method. . . . 227
Request. . . . 227
Example request. . . . 229
Response. . . . 230
Delete data collections. . . . 231

Endpoint and method. . . . 231
Request. . . . 232
Example request. . . . 232
Response. . . . 232
Add or remove data assets from data collections. . . . 232
Endpoint and method. . . . 232
Request. . . . 234
Example request. . . . 235
Response. . . . 235
Retrieve the data assets of a data collection. . . . 235
Endpoint and method. . . . 235
Request. . . . 236
Example request. . . . 236
Response. . . . 236
Manage the delivery targets of a data collection. . . . 238
Create delivery targets. . . . 238
Retrieve delivery targets. . . . 241
Modify delivery targets. . . . 249
Add or remove terms of use from data collections. . . . 251
Endpoint and method. . . . 252
Request. . . . 253
Example request. . . . 253
Response. . . . 253
Retrieve the terms of use of a data collection. . . . 254
Endpoint and method. . . . 254
Request. . . . 254
Example request. . . . 254
Response. . . . 254
Retrieve data collection rating. . . . 256
Endpoint and method. . . . 256
Request. . . . 256
Example request. . . . 256
Response. . . . 257

Chapter 9: Manage requests, orders and consumer accesses. . . . 258

Data collection requests. . . . 258
Retrieve data collection requests. . . . 258
Reject data collection requests. . . . 264
Fulfill data collection requests. . . . 265
Cancel data collection requests. . . . 266
Delete data collection requests. . . . 267
Orders. . . . 268
Retrieve orders. . . . 268

Approve orders. . . . 280
Reject orders. . . . 285
Fulfill orders. . . . 288
Cancel orders. . . . 299
Delete orders. . . . 301
Consumer accesses. . . . 302
Create consumer accesses. . . . 302
Modify custom attributes of consumer accesses. . . . 306
Retrieve consumer accesses. . . . 315
Make consumer accesses available. . . . 326
Submit consumer access withdrawals. . . . 334
Withdraw consumer accesses. . . . 343
Delete consumer accesses. . . . 351

Chapter 10: Custom attributes. . . . 353

Retrieve custom attributes. . . . 353
Endpoint and method. . . . 353
Request. . . . 354
Example request. . . . 354
Response. . . . 354

Chapter 11: Collaboration on objects. . . . 359

Comment on an object. . . . 359
Endpoint and method. . . . 359
Request. . . . 360
Example request. . . . 360
Response. . . . 360
Retrieve comments on an object. . . . 360
Endpoint and method. . . . 361
Request. . . . 361
Example request. . . . 361
Response. . . . 361

Chapter 12: Data Marketplace customizations. . . . 363

Retrieve customizations. . . . 363
Endpoint and method. . . . 363
Request. . . . 363
Example request. . . . 363
Response. . . . 363
Update customizations. . . . 364
Endpoint and method. . . . 364
Request. . . . 365
Example request. . . . 365

Response. . . . 365
Reset customizations. . . . 366
Endpoint and method. . . . 366
Request. . . . 366
Example request. . . . 366
Response. . . . 366

Chapter 13: Technical content. . . . 368

Retrieve the technical content of an object. . . . 368
Endpoint and method. . . . 368
Request. . . . 368
Example request. . . . 369
Response. . . . 369
Update the technical content of an object. . . . 369
Endpoint and method. . . . 369
Request. . . . 370
Example request. . . . 370
Response. . . . 370

Part IV: Frequently Asked Questions. . . . 371

Chapter 14: Frequently Asked Questions. . . . 372

When to authenticate with JWT and when with Application Integration?. . . . 372
Can I use data360 endpoints to design an Application Integration process?. . . . 372
How do I retrieve the system-generated unique identifier of a Data Marketplace item?. . . . 373
How do I retrieve the system-generated unique identifier of a user account or user group?. . . . 376
How do I retrieve the system-generated unique identifier of an asset group or user role?. . . . 376

Preface

Read *API Reference* to create and manage assets in Data Marketplace using the APIs that Informatica provides.

This help is written for developers and administrators who are responsible for implementing Data Marketplace. This help assumes that you have a basic knowledge of how to use Data Marketplace and Informatica® Intelligent Data Management Cloud™ (IDMC) Application Integration. It also assumes that you understand JSON and API programming techniques.

Note: If some of the terms that are used on this help differ from what is displayed on the Data Marketplace interface, contact your Data Marketplace Administrator to understand the terminology defined for your organization. For more information, see the *Label Customizations* topic in the *Set Up Data Marketplace* help.

Part I: Introduction

This part contains the following chapters:

- Introduction, 11
- How to call a Data Marketplace API, 12

CHAPTER 1

Introduction

Data Marketplace APIs enable you to customize Data Marketplace, and also create, manage, and retrieve Data Marketplace items.

CHAPTER 2

How to call a Data Marketplace API

Use a REST client, the cURL tool, or a suitable programming interface to call Data Marketplace APIs. You can also use Application Integration to make API calls to Data Marketplace.

Authenticate using JWT

Authenticate yourself with JSON Web token authentication to call an API.

Note: When you use JWT authentication to call an API, consider the following:

- The number of items that you can create or modify per API call depends on the cloud provider where the IDMC POD is hosted. The following table shows the number of items that you can create or modify per API call on each cloud provider:

Cloud provider	Number of items
Amazon Web Services	30
Microsoft Azure	10

- You can call a maximum of 120 APIs per minute and 10,000 APIs per day.

Authentication

Before you make REST API calls, you must authenticate yourself with JWT authentication. First, use the Login API with your organization user name and password to receive the session ID and org ID. Then, use the session ID and org ID to generate a JSON Web (JW) token. Subsequently, you use the JW token to secure your API calls without having to authenticate yourself for each call.

Obtain the session ID

To get a session ID, use the Login API V1. The Login API is also available with SAML. For more information about logging in using SAML, see the *REST API Reference* in the Administrator help. Ensure that you have your IDMC user name and password.

Send the POST request with the following URI, header, and request body.

The following table describes the components of the POST request:

Component	Description
URI	**<LoginURL>/identity-service/api/v1/Login** Note that `<LoginURL>` is the IDMC login URL based on your region, such as https://dm-**us**.informaticacloud.com, https://dm-**em**.informaticacloud.com, https://dm-**ap**.informaticacloud.com, https://dm-**uk**.informaticacloud.com.
Header	`Content-Type: application/json`

Request Body	`{`
	`"username": "<your_IICS_user>",`
	`"password": "<your_IICS_password>",`
	`}`

The response generates the session ID and the org ID. Note the value of the `sessionId` field to include in the subsequent API call.

In Administrator, session ID is specified as the default authentication method. This authentication involves generating a session ID and then using the session ID value to generate the JW token. The organization administrator can switch from session ID-based authentication to JW token-based authentication.

Generate a JW Access Token

Use the value from the `sessionId` field that you obtained from the previous Login API response, and send the POST request with the following URL and headers to generate a JW access token.

The following table describes the components of the POST request:

Component	Description
URI	**<LoginURL>/identity-service/api/v1/jwt/Token?client_id=idmc_api&nonce=1234** Note that `<LoginURL>` is the IDMC login URL based on the region, such as https://dm-**us**.informaticacloud.com, https://dm-**em**.informaticacloud.com, https://dm-**ap**.informaticacloud.com, https://dm-**uk**.informaticacloud.com, and so on.
Headers	`IDS-SESSION-ID: <sessionId value>`

The response generates the JW access token that you include in the authorization header for all subsequent API calls. The access token expires after 30 minutes from the initial grant of the token. You must regenerate the access token after every 30 minutes to authenticate your API calls.

Note: If the administrator configures JW token-based authentication in Administrator, the login API response includes the JW token value in the `session ID` field.

Send Requests

When you make an API call in the REST client, the request is sent in JSON format. Depending on the request, the REST client receives a response in JSON format that contains the information for the request that was sent.

To make an API call, enter the URL to access the API, header requests, methods, and request parameters.

URL

To call a Data Marketplace API, use the following format:

```
<CDMP_URL><endpoint>
```

For example, consider the following URL:

```
https://{{CDMP_URL}}/api/v2/delivery-targets
```

Here, `https://{{CDMP_URL}}/` is the base URL and `/api/v2/delivery-targets` is the API endpoint.

The base URL varies based on your region. The following table shows the regions and their corresponding base URLs:

Region	Base URL
United States of America	https://idmc-api.dm-us.informaticacloud.com/data360/marketplace/
United Kingdom	https://idmc-api.dm-uk.informaticacloud.com/data360/marketplace/
Canada	https://idmc-api.dm-na.informaticacloud.com/data360/marketplace/
Europe, Middle East, Africa (EMEA)	https://idmc-api.dm-em.informaticacloud.com/data360/marketplace/
Asia, Pacific	https://idmc-api.dm-ap.informaticacloud.com/data360/marketplace/
Japan	https://idmc-api.dm-apne.informaticacloud.com/data360/marketplace/

If you want to use Application Integration to call a Data Marketplace API, you must use a different base URL. For more information, see "Authenticate using Application Integration" on page 15.

Headers

The following table describes the header request that you use to send the Data Marketplace API requests:

Header	Description
`Content-Type:application/json`	This header is required for the POST and PATCH methods. It indicates that the client is sending a JSON request.
`Authorization:Bearer <jwt_token>`	This header is required to secure all your API requests.
`X-INFA-ORG-ID:<Org ID>`	Indicates the user's organization to which the API requests is sent. The org ID is obtained from the Login API.
`IDS-SESSION-ID`	Optionally, you can use this header for the GET method.

Authenticate using Application Integration


Use an Application Integration system service action to call a Data Marketplace API.

What is Application Integration?

Application Integration is an event-driven and service-oriented IDMC offering that encompasses event processing, service orchestration, and process management.

How to use Application Integration to call a Data Marketplace API

The following image shows the overall process of using Application Integration to call a Data Marketplace API:

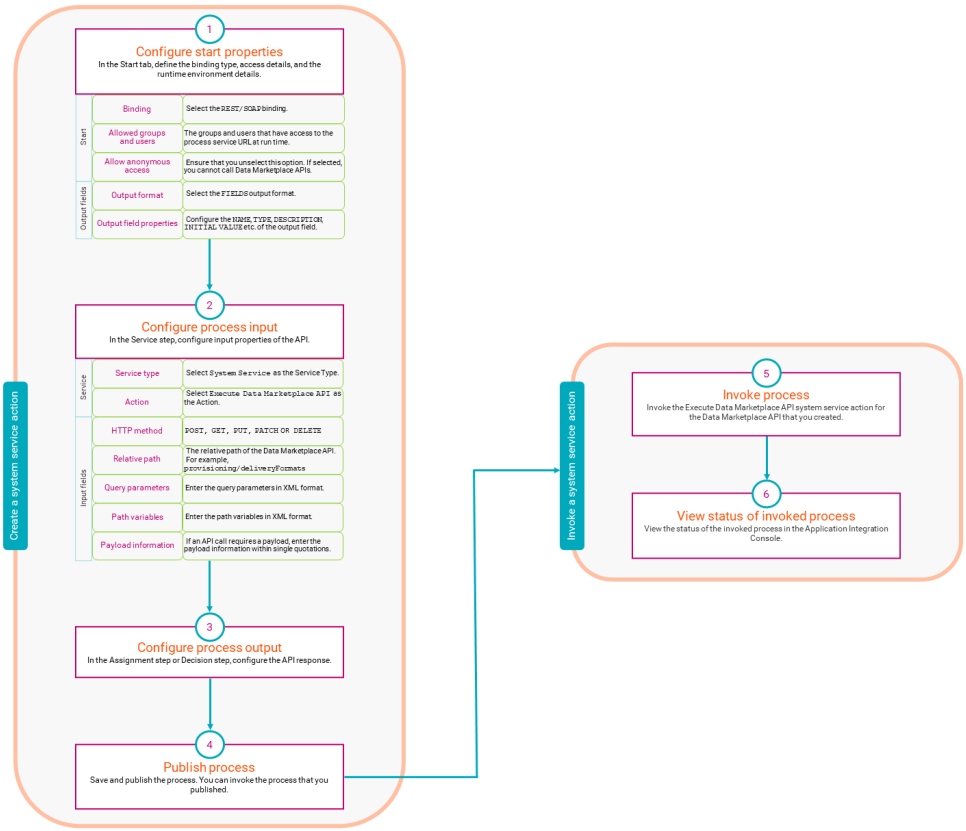

To call a Data Marketplace API via Application Integration, perform the following steps:

1. In Application Integration, create an `Execute Data Marketplace API` type system service action.
2. Invoke the system service action that you created to call the Data Marketplace API.

Note: You require Informatica Processing Units (IPUs) to use Application Integration. For more information about how to calculate your IPU usage, see https://network.informatica.com/docs/DOC-19140.

How can I retrieve the base URL?

Consider following sample URL:

```
https://{{CDMP_URL}}/api/v1/integration/provisioning/deliveryTemplates?status=ACTIVE
```

Here, `https://{{CDMP_URL}}/` is the base URL and `/api/v1/integration/provisioning/deliveryTemplates` is the API endpoint.

The base URL varies based on your region. The following table shows the regions and their corresponding base URLs:

Region	Base URL
United States of America	https://cdgc-api.dm-us.informaticacloud.com/cdmp-marketplace/
United Kingdom	https://cdgc-api.dm-uk.informaticacloud.com/cdmp-marketplace/
Canada	https://cdgc-api.dm-na.informaticacloud.com/cdmp-marketplace/
Europe, Middle East, Africa (EMEA)	https://cdgc-api.dm-em.informaticacloud.com/cdmp-marketplace/
Asia, Pacific	https://cdgc-api.dm-ap.informaticacloud.com/cdmp-marketplace/
Japan	https://cdgc-api.dm-apne.informaticacloud.com/cdmp-marketplace/

If you want to use JWT authentication to call a Data Marketplace API, you must use a different base URL. For more information, see "Send Requests" on page 13.

Note: When you use an Application Integration process to invoke an API, consider the following:

- The number of items that you can create or modify per API call depends on the cloud provider where the IDMC POD is hosted. The following table shows the number of items that you can create or modify per API call on each cloud provider:

Cloud provider	Number of items
Amazon Web Services	30
Microsoft Azure	10

- You can call a maximum of 100 APIs per minute.

Create a system service action

Before you can call a Data Marketplace API, you must design an `Execute Data Marketplace API` type system service action in Application Integration.

Start properties

In Application Integration, define the binding type and access details for the system service action that you want to create.

The following table describes how to configure the **Start** properties for a system service action to call a Data Marketplace API:

Property	Description
Binding	If you want to run the process by using a service URL, select `REST/SOAP` as the binding type
Allowed Groups	Specify which user groups can access the process service URL at run time.
Allowed Users	Specify which users can access the process service URL at run time.
Allow anonymous access	Ensure that you do not select the **Allow anonymous access** property. If you select **Allow anonymous access**, you cannot call Data Marketplace APIs.

For more information about the **Start** properties, see the *Start Properties* topic in the *Design* help in Application Integration.

Input Field properties

Define the service properties and input properties for the system service action that you want to create.

The following table describes how to configure the **Service** properties for a system service action to call a Data Marketplace API:

Property	Description
Service Type	Select `System Service` as the service type.
Action	Select `Execute Data Marketplace API` as the action.

The following table describes how to configure the **Input Field** properties for a system service action to call a Data Marketplace API:

Property	Description
HTTP Method	Enter one of the following methods to invoke the Data Marketplace API: - `GET` - `PUT` - `PATCH` - `POST`
Relative Path	Enter the relative path of the API that you want to invoke. You can use an API endpoint to discover the relative path. Consider the following examples: - For the API endpoint `/api/v1/integration/categories`, the relative path is `categories`. - For the API endpoint `/api/v1/integration/provisioning/deliveryFormats`, the relative path is `provisioning/deliveryFormats`. - For the API endpoint `/api/v1/integration/orders/<orderId>/fulfill`, the relative path is `orders/<orderId>/fulfill`.

Query parameter

If the Data Marketplace API that you want to invoke requires you to specify query parameters, you can enter the query parameters in XML format.

The following example shows how you must enter the query parameters:

```
<DataMarketplaceQueryParameters>
<queryParams>
<name>deliveryTargetId</name>
<value>6ddc722a-a4e3-4738-8880-913af86204b2</value>
</queryParams>
<queryParams>
<name>comment</name>
<value><p>Fulfilled</p></value>
</queryParams>
</DataMarketplaceQueryParameters>
```

Path variables

If the Data Marketplace API that you want to invoke requires you to specify path variables, you can enter the path variables in XML format.

The following example shows how you must enter the path variables:

```
<DataMarketplacePathVariables>
<pathVariables>
<name>orderId</name>
<value>6ddc722a-a4e3-4738-8880-913af86204b2</value>
</pathVariables>
</DataMarketplacePathVariables>
```

Payload

If an API call requires a payload, enter the payload information within single quotation marks.

The following example shows how you must enter the payload information for an API call:

```
'{
  "items": [
    {
      "refId": "3d0af52d-4ed1-44e2-9e09-ea9e3a77baaa",
      "name": "CreateUsageContext1",
      "description": "desc",
      "status": "ACTIVE"
    },
 {
      "refId": "3d0-jsnbj-52d-4ed1-44e2-9e09-ea9e3a77a",
      "name": "CreateUsageContext2",
      "description": "desc",
      "status": "INACTIVE"
    }
]
}'
```

For more information about the **Input Field** properties, see the *Input Field Properties* topic in the *Design* help in Application Integration.

Output Field properties

In the **Start** step of a new process in Application Integration, you can define the properties of the output fields.

The following table describes how to configure the **Output Field** properties for a system service action to call a Data Marketplace API:

Property	Description
Output Format	Specify whether you want the output field to represent one or more fields of the response, or the entire contents of the response. Select on of the following output formats: - If you want the output field to represent one or more fields of the response, select the `Fields` output format. - If you want the output field to represent the entire contents of the response, select the `Whole Payload` output format. To call a Data Marketplace, Informatica recommends that you select the `Fields` output format.
Name	Enter the name of the output field.
Type	Specify the type of the output field. Select on of the following field types: - `Date` - `Date Time` - `Time` - `Integer` - `Text` If the preceding types don't meet your requirements, select the `More types` option to reveal additional field types. In the **Edit Type** dialog box, you can select a field type that is listed under one of the following category: - `Simple Types` - `Custom Types` - `Connection defined Types`
Description	Enter the description for the output field.
Initial Value	Enter the initial value for the output field.

For more information about the **Output Field** properties, see the *Output Field Properties* topic in the *Design* help in Application Integration.

Before you can configure the API response in an **Assignment** step or a **Decision** step, ensure that you have defined the output field properties of the process in the **Start** step. For more information about an **Assignment** step or a **Decision** step, see *Adding Process Steps* topic in the *Design* help in Application Integration.

For more information about how you can design system service action, see the *Execute Data Marketplace API* topic in the *Design* help in Application Integration.

Invoke a system service action

To make a REST API call, invoke the `Execute Data Marketplace API` system service action that you designed for the Data Marketplace API.

For more information, see the *Invoke* help in Application Integration.

Download templates to design a system service action

Informatica provides templates that you can use to design a system service action.

For more information, see the Knowledge Base article 000198575.

Response body and response codes

When you invoke an API, the response returns one of the standard HTTP response codes with information about the success or failure of the API call.

Response body

The REST API sends a response header and response body in JSON format with information about the success or failure of the REST API call.

Response codes

The following table describes the standard response codes:

Response Code	Description
200 OK	The request is completed successfully.
201 Created	The request is completed and the new resource is created successfully.
202 Accepted	The request is accepted for processing, but is incomplete.
204	No content to send back.
400 Bad Request	The request is unprocessed because it contains missing or invalid information.
401 Unauthorized	The request is unauthorized. The authentication might be missing or invalid.
403 Forbidden	The user is unauthorized to perform this request.
404 Not Found	The request includes a resource URL that doesn't exist.
405 Method Not Allowed	The HTTP method specified in the request is unsupported for this request.
429 Too Many Requests	The user sent too many requests in a given amount of time and reached the API rate limit.
500 Internal Server Error	The server encountered an error because of which the request is unfulfilled.

Part II: Authenticate using JWT

Use a REST client, the cURL tool, or a suitable programming interface to call Data Marketplace APIs.

CHAPTER 3

Define settings for data collections

Use REST APIs to create and manage various items that are used with data collections in Data Marketplace. This includes categories that contain the data collections, terms of use for data collections, usage types to certify the data collections, and so on.

The following table lists the items that you can create and manage:

Items	Topic	Authentication Method
Category	See "Categories" on page 22.	JWT
Delivery format	See "Delivery formats" on page 134.	Application Integration
Delivery method	See "Delivery methods" on page 141.	Application Integration
Delivery template	See "Delivery templates" on page 148.	Application Integration
Usage type	See "Usage types" on page 172.	Application Integration
Terms of use	See "Terms of use" on page 162.	Application Integration
Cost center	See "Cost centers" on page 181.	Application Integration

Categories

A category is a grouping of related data collections. It is a predefined classification where stakeholders can publish the data collections for which they are responsible.

Create categories

Use a REST API to create categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/categories**
Method	POST

For more information about how you can call an API, see “Authenticate using JWT” on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`parentCategoryId`	Optional. Enter the system-generated unique identifier of the parent category for the category that you want to create. If the category that you want to create isn't a subcategory to another category, you can leave this parameter empty.	For more information about how you can use an API to get the system-generated unique identifier of a category, see "Retrieve all categories" on page 31. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`externalId`	Optional. Enter a reference identifier for the category.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the category.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.

Parameter	Description	Additional Information
`description`	Required. Enter a description for the category.	-
`status`	Required. Specify the status of the category. The status determines whether the category is discoverable and usable in Data Marketplace. Enter one of the following values: - To make the category discoverable and usable in Data Marketplace, enter `ACTIVE`. - To make the category not discoverable and unusable in Data Marketplace, enter `INACTIVE`.	-
`assetGroups`	Optional. Enter the system-generated unique identifier of the asset group for the category.	Asset groups enable you to control access to the category, the subcategories and data collections within it. For more information about asset groups, see the *Implement access controls on metadata* topic in the *Set Up Data Marketplace* help. To get the system-generated unique identifier of an asset group, click **My Services > Metadata Command Center > Customize**. On the **Customize** page, select the **Asset Groups** tab. On the **Asset Groups** tab, click an asset group. The user role page's URL contains the unique identifier. For example, in the URL `/assetGroup/07a3ef9c-9410-421f-9b21-64ec9ac9778f`, the unique identifier is `07a3ef9c-9410-421f-9b21-64ec9ac9778f`.

Parameter	Description	Additional Information
`stakeholdership > stakeholderId`	Optional. Enter the system-generated unique identifier of the user account or user group that you want to assign as a stakeholder on the category.	- To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system-generated unique identifier of a user group, click **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`stakeholdership > roleId`	Optional. Enter the system-generated unique identifier of the user role that is assigned to the stakeholder that you specified in the `stakeholderId` parameter.	If you specify a value for the `stakeholderId` parameter, ensure that you also specify a value for the `roleId` parameter. To get the system-generated unique identifier of a user role, click **My Services > Administrator > User Roles**. On the **User Roles** page, click a user role. The user role page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userRolesAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Example request

The following example shows how you can use an API to create a category:

```
{
  "parentCategoryId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "externalId": "CAT-1",
  "name": "Sales",
```

```
  "description": "Data collections related to sales made by the organization.",
  "status": "INACTIVE",
  "assetGroups": [
    "b93c4539-a93e-440d-a4b4-95d69b8911e6"
  ],
  "stakeholdership": [
    {
      "stakeholderId": "jqPFaKmJRGhdfJ35eWUzoW",
      "roleId": "5Qvy6Uiiq9IjoocWeJhccW"
    }
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a category:

```
{
  "externalId": "CAT-123",
  "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
  "name": "Sales",
  "description": "Data collections related to sales made by the organization.",
  "status": "INACTIVE",
  "effectiveStatus": "INACTIVE",
  "assetGroups": [
    {
      "name": "ASIA",
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "isInherited": false
    }
  ]
}
```

The following table describes the parameters of each category that is created:

Parameter	Description
`externalId`	Reference identifier of the category.
`id`	System-generated unique identifier of the category.
`name`	Name of the category.
`description`	Description of the category.
`status`	Status of the category. A category can have one of the following statuses: - `ACTIVE` - `INACTIVE`
`effectiveStatus`	Indicates whether the category is available in Data Marketplace. A category can have one of the following statuses: - `ACTIVE`. The category is available. - `INACTIVE`. The category is unavailable.
`assetGroups`	Details of the asset group that is assigned to the category.
`assetGroups > id`	System-generated identifier of the asset group.

Parameter	Description
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Retrieve a category

Use a REST API to retrieve the details of an individual category in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/categories/<categoryId>** `<categoryID>`: Required. Enter the system-generated unique identifier of the category for which you want to retrieve the details. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
segments	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about the category. - `parentCategory`. Returns the details about the parent category that contains the category. - `systemAttributes`. Returns the details about the category's creation and modification, such as the details of the user that created the category, the latest user that modified the category, and so on. - `stakeholdership`. Returns the type of user and role that are assigned as stakeholder on the category.	By default, the parameter is assigned no value and the API response includes only the basic information about the category such as name, description and so on.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a category:

```
https://{{CDMP_URL}}/api/v2/categories/2593524d-82f7-4dfd-bc6b-17088c046f9d?segments=all
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a category:


```
{
  "externalId": "CAT-123",
  "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
  "parentId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "name": "Sales",
  "description": "Data collections related to sales made by the organization.",
  "status": "INACTIVE",
  "effectiveStatus": "INACTIVE",
  "parentCategory": {
    "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
    "externalId": "CAT-001",
    "name": "Financials",
    "description": "Data collections related to financial operations.",
    "status": "ACTIVE",
    "effectiveStatus": "ACTIVE",
    "systemAttributes": {
      "createdBy": "analyst@company.com",
      "createdOn": "2025-08-11T10:30:00Z",
      "modifiedBy": "dataowner@company.com",
      "modifiedOn": "2025-08-11T15:45:00Z"
    },
    "href": "/categories/b93c4539-a93e-440d-a4b4-95d69b8911e6"
  },
  "stakeholdership": [
    {
      "stakeholderId": "jqPFaKmJRGhdfJ35eWUzoW",
      "userType": "USER",
```

```
        "roleId": "5Qvy6Uiiq9IjoocWeJhccW",
        "isInherited": false
      }
    ],
    "assetGroups": [
      {
        "id": "4795b4ac-94a6-413b-9349-64cf455d5abb",
        "name": "USA",
        "isInherited": false
      }
    ],
    "systemAttributes": {
      "createdBy": "jaXM6NrqsKXffdwg2NkTMR",
      "createdOn": "2025-08-11T10:30:00Z",
      "modifiedBy": "jaXM6NrqsKXffdwg2NkTMR",
      "modifiedOn": "2025-08-11T15:45:00Z"
    }
  }
```

The following table describes the parameters of the category that is retrieved:

Parameter	Description
`externalId`	Reference identifier of the category.
`id`	System-generated unique identifier of the category.
`parentId`	System-generated unique identifier of the parent category.
`name`	Name of the category.
`description`	Description of the category.
`status`	Status of the category as configured by a stakeholder of the category. A category can have one of the following statuses: - `ACTIVE` - `INACTIVE`
`effectiveStatus`	The effective status of the category indicates whether a category is discoverable and usable in Data Marketplace. The effective status of a category is influenced by the effective status of its parent category. For example, if the value of the `status` parameter of a category is `Active` but the category is added to an effectively inactive parent category, the category becomes inactive. A category can have one of the following statuses: - `ACTIVE`. The category is discoverable and usable in Data Marketplace. - `INACTIVE`. The category isn't discoverable and usable in Data Marketplace.
`parentCategory`	Details of the parent category.
`stakeholdership`	Details of the stakeholders of the category.
`stakeholdership > stakeholderId`	System-generated identifier of the user account or user group that is assigned as a stakeholder of the category.
`stakeholdership > userType`	Indicates whether the stakeholder is an individual user account or user group. This parameter can have one of the following values: - `USER`. The stakeholder is an individual user account. - `USER-GROUP`. The stakeholder is a user group.

Parameter	Description
`stakeholdership > roleId`	System-generated identifier of the user role that is assigned to the stakeholder of the category.
`stakeholdership > isInherited`	Indicates whether the stakeholder is directly assigned to the category or if the stakeholder is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The stakeholder is inherited from the category hierarchy. - `false`. The stakeholder is directly assigned to the category.
`assetGroups`	Details of the asset group that is assigned to the category.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.
`systemAttributes > createdBy`	System-generated identifier of the user account that created the category.
`systemAttributes > createdOn`	Date when the category was created.
`systemAttributes > modifiedBy`	System-generated identifier of the latest user account that modified the category.
`systemAttributes > modifiedOn`	Latest date when the category was modified.

Retrieve all categories

Use a REST API to retrieve the details of all categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/categories**
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
segments	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - all. Returns all the details of each category that is retrieved. - parentCategory. Returns the details of the parent category that contains a category. - systemAttributes. Returns the details about a category's creation and modification, such as the details of the user that created the category, the latest user that modified the category, and so on. - stakeholdership. Returns the type of user and role that are assigned as stakeholder on a category.	By default, the parameter is assigned no value and the API response includes only the basic information about the category such as name, description and so on.
search	Optional. Enter the search term to find a category by name or description.	Default is an asterisk (*) which retrieves all categories. To search by name, enter a term that doesn't contain an asterisk.
offset	Optional. Specify the starting index for the paginated results.	Default is 0.
limit	Optional. Specify the maximum number of results that are displayed on a page.	Default is 20. Maximum value is 200.
sortby	Optional. Specify the parameters to sort the search results. Enter one of the following values: - id - name - status - createdBy - createdOn - modifiedBy - modifiedOn	Default is modifiedOn.
sortOrder	Optional. Set the sorting order of the search results. Enter one of the following values: - To sort the search results by ascending order, enter asc. - To sort the search results by descending order, enter desc.	Default is desc.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of all categories:

```
https://{{CDMP_URL}}/api/v2/categories?segments=all
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of all categories:


```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
    "totalCount": 120
  },
  "links": {
    "self": {
      "href": "/categories?segments=all&offset=40&limit=20"
    },
    "first": {
      "href": "/categories?segments=all&offset=0&limit=20"
    },
    "next": {
      "href": "/categories?segments=all&offset=60&limit=20"
    },
    "previous": {
      "href": "/categories?segments=all&offset=20&limit=20"
    },
    "last": {
      "href": "/categories?segments=all&offset=100&limit=20"
    }
  },
  "items": [
    {
      "externalId": "CAT-123",
      "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
      "parentId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "name": "Sales",
      "description": "Data collections related to sales made by the organization.",
      "status": "INACTIVE",
      "effectiveStatus": "INACTIVE",
      "parentCategory": {
        "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
        "externalId": "CAT-001",
        "name": "Financials",
        "description": "Data collections related to financial operations.",
        "status": "ACTIVE",
        "effectiveStatus": "ACTIVE",
        "systemAttributes": {
          "createdBy": "analyst@company.com",
          "createdOn": "2025-08-11T10:30:00Z",
          "modifiedBy": "dataowner@company.com",
          "modifiedOn": "2025-08-11T15:45:00Z"
        },
        "href": "/categories/b93c4539-a93e-440d-a4b4-95d69b8911e6"
      },
      "stakeholdership": [
        {
          "stakeholderId": "jqPFaKmJRGhdfJ35eWUzoW",
          "userType": "USER",
          "roleId": "5Qvy6Uiiq9IjoocWeJhccW",
          "isInherited": false
        }
      ],
      "assetGroups": [
        {
          "id": "4795b4ac-94a6-413b-9349-64cf455d5abb",
          "name": "USA",
          "isInherited": false
        }
      ],
      "systemAttributes": {
```

```
          "createdBy": "jaXM6NrqsKXffdwg2NkTMR",
          "createdOn": "2025-08-11T10:30:00Z",
          "modifiedBy": "jaXM6NrqsKXffdwg2NkTMR",
          "modifiedOn": "2025-08-11T15:45:00Z"
        }
      }
    ]
  }
```


The following table describes the parameters of each category that is retrieved:

Parameter	Description
`pageInfo > offset`	Starting index of the paginated results.
`pageInfo > limit`	The maximum number of results that are displayed on a page.
`pageInfo > totalCount`	Number of categories retrieved.
`links > self > href`	The API that was invoked to generate this response.
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`externalId`	Reference identifier of the category.
`id`	System-generated unique identifier of the category.
`parentId`	System-generated unique identifier of the parent category.
`name`	Name of the category.
`description`	Description of the category.
`status`	Status of the category as configured by a stakeholder of the category. A category can have one of the following statuses: - `ACTIVE` - `INACTIVE`
`effectiveStatus`	The effective status of the category indicates whether a category is discoverable and usable in Data Marketplace. The effective status of a category is influenced by the effective status of its parent category. For example, if the value of the `status` parameter of a category is `Active` but the category is added to an effectively inactive parent category, the category becomes inactive. A category can have one of the following statuses: - `ACTIVE`. The category is discoverable and usable in Data Marketplace. - `INACTIVE`. The category isn't discoverable and usable in Data Marketplace.

Parameter	Description
parentCategory	Details of the parent category.
stakeholdership	Details of the stakeholders of the category.
stakeholdership > stakeholderId	System-generated identifier of the user account or user group that is assigned as a stakeholder on the category.
stakeholdership > userType	Indicates whether the stakeholder is an individual user account or user group. This parameter can have one of the following values: - USER. The stakeholder is an individual user account. - USER-GROUP. The stakeholder is a user group.
stakeholdership > roleId	System-generated identifier of the user role that is assigned to the stakeholder of the category.
stakeholdership > isInherited	Indicates whether the stakeholder is directly assigned to the category or if the stakeholder is inherited from the category hierarchy. This parameter can have one of the following values: - true. The stakeholder is inherited from the category hierarchy. - false. The stakeholder is directly assigned to the category.
assetGroups	Details of the asset group that is assigned to the category.
assetGroups > id	System-generated identifier of the asset group.
assetGroups > name	Name of the asset group.
assetGroups > isInherited	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - true. The asset group is inherited from the category hierarchy. - false. The asset group is directly assigned to the category.
systemAttributes > createdBy	System-generated identifier of the user account that created the category.
systemAttributes > createdOn	Date when the category was created.
systemAttributes > modifiedBy	System-generated identifier of the latest user account that modified the category.
systemAttributes > modifiedOn	Latest date when the category was modified.

Modify categories

Use a REST API to modify categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/categories/<categoryId>** <categoryID>: Required. Enter the system-generated unique identifier of the category that you want to modify. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`operation`	Required. Specify the type of change you want to make to the category. Enter one of the following values: - `add`. To add a value to a parameter, enter . - `replace`. To replace an existing value of a parameter. - `remove`. To remove a value from a parameter.	A `replace` operation modifies a `parentCategory`, `category`, `summary`, or a `customAtrributes` segment. You cannot use a `replace` operation to modify stakeholders of a data collection or a category. Modify stakeholders of a data collection or category from its page in Data Marketplace. For more information about modifying data collections and categories, see the following: - To modify data collections, see *Modifying data collections* from the *Working with data collections* help. - To modify categories, see *Modifying categories* in the *Set Up Data Marketplace* help.
`segment`	Required. Specify the type of details that you want the API request to modify. Enter one of the following values: - `parentCategory`. To modify the value specified in the `parentCategoryId` parameter. - `stakeholdership`. To add or remove the values specified in the `stakeholderId` and `roleID` parameters. - `summary`. To modify the values specified in the `name`, `description`, `externalId` and `status` parameters.	
`name`	Optional. Enter a name for the category.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.

Parameter	Description	Additional Information
parentCategoryId	Optional. Enter the system-generated unique identifier of the parent category for the category that you want to create.	If you don't want to add this category as a subcategory to another category, you can leave this parameter empty. For more information about how you can use an API to get the system-generated unique identifier of a category, see "Retrieve all categories" on page 31. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
description	Optional. Enter a description for the category.	-
externalId	Optional. Enter a reference identifier for the category.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.

Parameter	Description	Additional Information
`assetGroups`	Optional. Specify an asset group for the category.	Asset groups enable you to control access to the category, the subcategories and data collections within it. For more information about asset groups, see the *Implement access controls on metadata* topic in the *Set Up Data Marketplace* help.
`status`	Optional. Specify the status of the category. The status determines whether the category is discoverable and usable in Data Marketplace. Enter one of the following values: - To make the category discoverable and usable in Data Marketplace, enter `ACTIVE`. - To make the category not discoverable and unusable in Data Marketplace, enter `INACTIVE`.	

Parameter	Description	Additional Information
`stakeholdership > stakeholderId`	Optional. Enter the system-generated unique identifier of the user account or user group that you want to assign as a stakeholder on the category.	- To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system-generated unique identifier of a user group, click **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`stakeholdership > roleId`	Optional. Enter the system-generated unique identifier of the user role that is assigned to the stakeholder that you specified in the `stakeholderId` parameter.	If you specify a value for the `stakeholderId` parameter, ensure that you also specify a value for the `roleId` parameter. To get the system-generated unique identifier of a user role, click **My Services > Administrator > User Roles**. On the **User Roles** page, click a user role. The user role page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userRolesAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Example request

The following example shows how you can use an API to modify a category:

```
{
  "operation": "replace",
  "segment": "summary",
  "value": {
```

```
    "name": "Sales",
    "description": "Data collections related to sales made by the organization. ",
    "externalId": "CAT-001",
    "status": "ACTIVE"
  }
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the category is successfully modified:

```
204 OK code
```

If you modify the asset group, parent or stakeholder of a category, the REST client displays the following response code to indicate that a job was created in Metadata Command Center to apply your changes:

```
202 Accepted code
```

The following example shows the response of an API call to modify a category for which a job was created in Metadata Command Center to apply the changes:

```
{
  "trackerJobId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "propagationJobId": "b93c4539-a93e-440d-a4b4-95d69b8911e6"
}
```

Note: When you modify the stakeholders, asset groups, or parent category of a category, the system checks for the number of items related to the category. If the category is related to more than 10 items, the API triggers a job to modify the category and returns a job ID. Items that are related to a category include the following:

- Sub-categories of the category
- Data collection requests that are linked to the category
- Data collections and their related objects under the category and its sub-categories

The following table describes the parameters of each job that is created in Metadata Command Center:

Parameter	Description
`trackerJobId`	System-generated identifier of the job that enables you to track the progress of the job in Metadata Command Center. For more information about jobs in Metadata Command Center, see the *Administration* help in Metadata Command Center.
`propagationJobId`	System-generated identifier of the internal job that applies your changes to Data Marketplace .

Delete categories

Use a REST API to delete categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/categories/<categoryId>** <categoryID>: Required. Enter the system-generated unique identifier of the category that you want to delete. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
Method	DELETE

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

Note: The API has no payload.

Example request

The following example shows how you can use an API to delete a category:

```
https://{{CDMP_URL}}/api/v2/categories/67417f72-e5ab-44f0-add9-a1e412c1ce13
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the category is successfully deleted:

```
204 OK code
```

CHAPTER 4

Manage data collections

A data collection is a grouping of one or more data assets. Use REST APIs to create, retrieve, modify, or delete a data collection. You can also use APIs to perform other tasks, such as modify data assets and delivery targets of a data collection, retrieve the consumer accesses that are associated with a data collection, and so on.

The following table lists the tasks you can perform related to a data collection:

Tasks	Topic	Authentication Method
Create a data collection	See "Create data collections" on page 44.	JWT
Retrieve a data collection	See "Retrieve a data collection" on page 49.	JWT
Retrieve all data collections	See "Retrieve all data collections" on page 51.	JWT
Modify a data collection	See "Modify data collections" on page 55.	JWT
Delete a data collection	See "Delete data collections" on page 60.	JWT
Add or remove data assets from data collections	See "Add or remove data assets from data collections" on page 61.	JWT
Retrieve the data assets of a data collection	See "Retrieve the data assets of a data collection" on page 63.	JWT
Retrieve the consumer accesses of a data collection	See "Retrieve the consumer accesses of a data collection" on page 66.	JWT
Add or remove terms of use from data collections	See "Add or remove terms of use from data collections" on page 251.	Application Integration
Retrieve the terms of use of a data collection	See "Retrieve the terms of use of a data collection" on page 254.	Application Integration
Retrieve data collection rating	See "Retrieve data collection rating" on page 256.	Application Integration
Manage the delivery targets of a data collection	See "Manage the delivery targets of a data collection" on page 68.	JWT

Create data collections

Use a REST API to create data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections**
Method	POST

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`externalId`	Optional. Enter a reference identifier for the data collection that you want to create.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the data collection.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.
`description`	Required. Enter a description for the data collection.	-

Parameter	Description	Additional Information
`categoryId`	Required. The system-generated unique identifier of the category to which you want to add the data collection.	For more information about how you can use an API to get the system-generated unique identifier of a category, see "Retrieve all categories" on page 31. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`status`	Required. Specify a status for the data collection. The status determines whether the data collection is discoverable to Data Users. Enter one of the following values: - To make the data collection discoverable to Data Users, enter `PUBLISHED`. - To make the data collection undiscoverable to Data Users, enter `UNPUBLISHED`.	-
`usageContextId`	Optional. Enter the system-generated unique identifier of the usage type that you want to use to specify the context in which you intend to use the data after you receive access to the collection.	For more information about how you can use an API to get the system-generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`customAttributes`	Specify the custom attribute values for the data collection.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.

Parameter	Description	Additional Information
`customAttributes > value`	Enter a value in the custom attribute.	-
`customAttributes > id`	Enter the system-generated unique identifier of the custom attribute.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
`stakeholdership > stakeholderId`	Optional. Enter the system-generated unique identifier of the user account or user group that you want to assign as a stakeholder for the data collection.	- To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system-generated unique identifier of a user group, click **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Parameter	Description	Additional Information
`stakeholdership > roleId`	Optional. Enter the system-generated unique identifier of the user role that is assigned to the stakeholder that you specified in the `stakeholderId` parameter.	If you specify a value for the `stakeholderId` parameter, ensure that you also specify a value for the `roleId` parameter. To get the system-generated unique identifier of a user role, click **My Services > Administrator > User Roles**. On the **User Roles** page, click a user role. The user role page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userRolesAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`termsOfUse`	Optional. Enter the system-generated unique identifier of the terms of use that you want to associate with the data collection.	For more information about how you can use an API to get the system-generated unique identifier of a terms of use, see "Retrieve terms of use" on page 165.

Example request

The following example shows how you can use an API to create a data collection:

```
{
  "externalId": "DCL-1",
  "name": "Aggregated Sales Data",
  "description": "Sales data from all sources (physical online subscription) in one
place for easy analysis.",
  "categoryId": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
  "status": "PUBLISHED",
  "usageContexts": [
    "2593524d-82f7-4dfd-bc6b-17088c046f9d"
  ],
  "customAttributes": [
    {
      "value": "PROJ-2024-CUSTOMER-INSIGHTS",
      "id": "com.infa.odin.models.custom.ca_2491832487117218775"
    }
  ],
  "stakeholdership": [
    {
      "stakeholderId": "jqPFaKmJRGhdfJ35eWUzoW",
      "roleId": "5Qvy6Uiiq9IjoocWeJhccW"
    }
  ],
  "termsOfUse": [
    "2593524d-82f7-4dfd-bc6b-17088c046f9d"
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a data collection:

```
{
  "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
  "externalId": "DCL-1",
  "name": "Aggregated Sales Data",
  "description": "All sales data from around the world aggregated and standardized.",
  "status": "UNPUBLISHED",
  "assetGroups": [
    {
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "name": "ASIA",
      "isInherited": true
    }
  ]
}
```

The following table describes the parameters of each data collection that is created:

Parameter	Description
`externalId`	Reference identifier of the data collection.
`name`	Name of the data collection.
`description`	Description of the data collection.
`status`	Status of the data collection. The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Retrieve a data collection

Use a REST API to retrieve the details of an individual data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>** <dataCollectionId>: Required. Enter the system-generated unique identifier of the data collection for which you want to retrieve the details. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
segments	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - all. Returns all the details about the data collection. - category. Returns the details about the category that contains the data collection. - customAttributes. Returns the details about the custom attributes that are configured for the data collection. - deliveryTargets. Returns the details about the delivery targets that are associated with the data collection. - stakeholdership. Returns the type of user and role that are assigned as stakeholder on the data collection. - systemAttributes. Returns the details about the data collection's creation and modification, such as the date when the data collection was created, the latest date when it was modified, and so on. - termsOfUse. Returns the details about the terms of use that are associated with the data collection. - usageContexts. Returns the details about the usage types that are associated with the data collection.	By default, the parameter is assigned no value and the API response includes only the basic information about the data collection such as the name, description and so on.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a data collection:

```
https://{{CDMP_URL}}/api/v2/data-collections/2593524d-82f7-4dfd-bc6b-17088c046f9d
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a data collection:

```
{
  "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
  "externalId": "DCL-1",
  "name": "Aggregated Sales Data",
  "description": "All sales data from around the world aggregated and standardized.",
  "status": "UNPUBLISHED",
  "assetGroups": [
    {
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "name": "ASIA",
      "isInherited": true
    }
  ]
}
```

The following table describes the parameters of the data collection that is retrieved:

Parameter	Description
`externalId`	Reference identifier of the data collection.
`name`	Name of the data collection.
`description`	Description of the data collection.
`status`	Status of the data collection. The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Retrieve all data collections

Use a REST API to retrieve the details of all data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections**
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`search`	Optional. Enter the search term to find a data collection by name or description.	Default is an asterisk (*) which retrieves all categories. To search by name, enter a term that doesn't contain an asterisk
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum value is `200`.
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about each data collection that is retrieved. - `category`. Returns the details about the category that contains a data collection. - `customAttributes`. Returns the details about the custom attributes that are configured for a data collection. - `deliveryTargets`. Returns the details about the delivery targets that are associated with a data collection. - `stakeholdership`. Returns the type of user and role that are assigned as stakeholder on a data collection. - `systemAttributes`. Returns the details about a data collection's creation and modification, such as the date when a data collection was created, the latest date when it was modified, and so on. - `termsOfUse`. Returns the details about the terms of use that are associated with a data collection. - `usageContexts`. Returns the details about the usage types that are associated with a data collection.	By default, the parameter is assigned no value and the API response includes only the basic information about the data collection such as the name, description and so on.

Parameter	Description	Additional Information
sortby	Optional. Specify the parameters to sort the search results. Enter one of the following values: - id - name - status - createdBy - createdOn - modifiedBy - modifiedOn	Default is modifiedOn.
sortOrder	Optional. Set the sorting order of the search results. Enter one of the following values: - To sort the search results by ascending order, enter asc. - To sort the search results by descending order, enter desc.	Default is desc.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of all data collections:

```
https://{{CDMP_URL}}/api/v2/data-collections
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of all data collections:


```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
    "totalCount": 120
  },
  "links": {
    "self": {
      "href": "/data-collections?offset=40&limit=20"
    },
    "first": {
      "href": "/data-collections?offset=0&limit=20"
    },
    "next": {
      "href": "/data-collections?offset=60&limit=20"
    },
    "previous": {
      "href": "/data-collections?offset=20&limit=20"
    },
    "last": {
      "href": "/data-collections?offset=100&limit=20"
    }
  },
  "items": [
    {
      "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
      "externalId": "DCL-1",
      "name": "Aggregated Sales Data",
```

```
        "description": "All sales data from around the world aggregated and standardized.",
        "status": "UNPUBLISHED",
        "assetGroups": [
          {
            "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
            "name": "ASIA",
            "isInherited": true
          }
        ]
      }
    ]
  }
```


The following table describes the parameters of each data collection that is retrieved:

Parameter	Description
`pageInfo > offset`	Starting index of the paginated results.
`pageInfo > limit`	The maximum number of results that are displayed on a page.
`pageInfo > totalCount`	Number of data collections retrieved.
`links > self > href`	The API that was invoked to generate this response.
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`externalId`	Reference identifier of the data collection.
`name`	Name of the data collection.
`description`	Description of the data collection.
`status`	Status of the data collection. The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection.
`assetGroups > id`	System-generated identifier of the asset group.

Parameter	Description
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Modify data collections

Use a REST API to modify a data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>** `<dataCollectionId>`: Required. Enter the system-generated unique identifier of the data collection that you want to modify. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`operation`	Required. Specify the type of change you want to make to the data collection. Enter one of the following values: - `add`. To add a value to a parameter, enter . - `replace`. To replace an existing value of a parameter. - `remove`. To remove a value from a parameter.	A `replace` operation modifies a `parentCategory`, `category`, `summary`, or a `customAtrributes` segment. You cannot use a `replace` operation to modify stakeholders of a data collection or a category. Modify stakeholders of a data collection or category from its page in Data Marketplace. For more information about modifying data collections and categories, see the following: - To modify data collections, see *Modifying data collections* from the *Working with data collections* help. - To modify categories, see *Modifying categories* in the *Set Up Data Marketplace* help.
`segment`	Required. Specify the type of details that you want the API request to modify. Enter one of the following values: - `category`. To modify the value specified in the `categoryId` parameter. - `customAttributes`. To modify the value specified in the `customAttributes` parameter. - `summary`. To modify the values specified in the `name`, `description`, `externalId` and `status` parameters. - `stakeholdership`. To add or remove the values specified in the `stakeholderId` and `roleID` parameters. - `termsOfUse`. To modify the value specified in the `termsOfUse` parameter. - `usageContexts`. To modify the value specified in the `usageContexts` parameter.	
`name`	Optional. Enter a name for the data collection.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.

Parameter	Description	Additional Information
`description`	Optional. Enter a description for the data collection.	-
`externalId`	Optional. Enter a reference identifier for the data collection.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`status`	Optional. Specify a status for the data collection. The status determines whether the data collection is discoverable to Data Users. Enter one of the following values: - To make the data collection discoverable to Data Users, enter `PUBLISHED`. - To make the data collection undiscoverable to Data Users, enter `UNPUBLISHED`.	
`customAttributes`	Specify the custom attribute values for the data collection or modify the values that are already specified for the custom attribute.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customAttributes > value`	Enter the updated value for the custom attribute.	-
`customAttributes > id`	Enter the system-generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Parameter	Description	Additional Information
`stakeholdership > stakeholderId`	Optional. Enter the system-generated unique identifier of the user account or user group that you want to assign as a stakeholder for the data collection.	- To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system-generated unique identifier of a user group, click **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`stakeholdership > roleId`	Optional. Enter the system-generated unique identifier of the user role that is assigned to the stakeholder that you specified in the `stakeholderId` parameter.	If you specify a value for the `stakeholderId` parameter, ensure that you also specify a value for the `roleId` parameter. To get the system-generated unique identifier of a user role, click **My Services > Administrator > User Roles**. On the **User Roles** page, click a user role. The user role page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/userRolesAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`usageContexts`	Optional. Enter the system-generated unique identifier of the usage type that you want to use to specify the context in which you intend to use the data after you receive access to the collection.	For more information about how you can use an API to get the system-generated unique identifier of a usage type, see "Retrieve usage type" on page 174.

Parameter	Description	Additional Information
termsOfUse	Optional. Enter the system-generated unique identifier of the terms of use that you want to associate with the data collection.	For more information about how you can use an API to get the system-generated unique identifier of a terms of use, see "Retrieve terms of use" on page 165.
categoryId	Optional. The system-generated unique identifier of the category to which you want to move the data collection.	For more information about how you can use an API to get the system-generated unique identifier of a category, see "Retrieve all categories" on page 31. To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.

Example request

The following example shows how you can use an API to modify a data collection:

```
{
  "operation": "replace",
  "segment": "summary",
  "value": {
    "name": "Aggregated Sales Data",
    "description": "Sales data from all sources (physical online subscription) in one
place for easy analysis.",
    "externalId": "DCL-1",
    "status": "PUBLISHED"
  }
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection is successfully modified:

```
204 OK code
```

If you modify the category or stakeholder of a data collection, the REST client displays the following response code to indicate that a job was created in Metadata Command Center to apply your changes:

```
202 Accepted code
```

The following example shows the response of an API call to modify a category for which a job was created in Metadata Command Center to apply the changes:

```
{
  "trackerJobId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "propagationJobId": "b93c4539-a93e-440d-a4b4-95d69b8911e6"
}
```

Note: When you modify the stakeholders or category of a data collection, the system checks for the number of items related to the data collection. If the data collection is related to more than 10 items, the API triggers a job to modify the data collection and returns a job ID. Items that are related to a data collection include the following:

- Orders for the data collection
- Consumer accesses for the data collection
- Delivery targets that are available for the data collection
- Data collection requests that are linked to the data collection

The following table describes the parameters of each job that is created in Metadata Command Center:

Parameter	Description
`trackerJobId`	System-generated identifier of the job that enables you to track the progress of the job in Metadata Command Center. For more information about jobs in Metadata Command Center, see the *Administration* help in Metadata Command Center.
`propagationJobId`	System-generated identifier of the internal job that applies your changes to Data Marketplace .

Delete data collections

Use a REST API to delete a data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>** `<dataCollectionId>`: Required. Enter the system-generated unique identifier of the data collection that you want to delete. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	DELETE

Note: If the data collection that you want to delete is linked to another collection, this link is removed when you delete the data collection. In this scenario, the other collection that is linked does not get deleted.

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

Note: The API has no payload.

Example request

The following example shows how you can use an API to delete a data collection:

```
https://{{CDMP_URL}}/api/v2/data-collections/2593524d-82f7-4dfd-bc6b-17088c046f9d
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection is successfully deleted:

```
204 OK code
```

Add or remove data assets from data collections

Use a REST API to add a data asset to a data collection or to remove a data asset from a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>/data-assets** <dataCollectionId>: Required. Enter the system-generated unique identifier of the data collection to which you want to add the data assets. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	PATCH

Note: You can add a maximum of 40 data assets to a data collection per API call.

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`operation`	Required. Specify whether you want to add or remove the data asset. Enter one of the following values: - To add a data asset to the data collection, enter `add`. - To remove a data asset from the data collection, enter `remove`.	-
`dataAssetIds`	Required. Enter the system-generated unique identifier of the data asset that you want to add to the data collection.	For more information about how you can use an API to get the system-generated unique identifier of a data asset, see "Retrieve data assets" on page 203. To get the system-generated unique identifier of a data asset from the Data Marketplace user interface, open the data asset. The data asset page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`.

Example request

The following example shows how you can use an API to add data assets to a data collection:

```
{
  "operation": "add",
  "dataAssetIds": [
    "b93c4539-a93e-440d-a4b4-95d69b8911e6",
    "2593524d-82f7-4dfd-bc6b-17088c046f9d"
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data asset is successfully added to the data collection:

```
204 OK code
```

Retrieve the data assets of a data collection

Use a REST API to retrieve the data assets of a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>/data-assets** <dataCollectionId>: Required. Enter the system-generated unique identifier of the data collection for which you want to retrieve the data assets. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum is `200`.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of the data assets that are associated with a data collection:

```
https://{{CDMP_URL}}/api/v2/data-collections/2593524d-82f7-4dfd-bc6b-17088c046f9d/data-assets
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of the data assets that are associated with a data collection:

```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
```

```
    "totalCount": 150
  },
  "links": {
    "self": {
      "href": "/data-collections/{dataCollectionId}/data-assets?offset=40&limit=20"
    },
    "first": {
      "href": "/data-collections/{dataCollectionId}/data-assets?offset=0&limit=20"
    },
    "next": {
      "href": "/data-collections/{dataCollectionId}/data-assets?offset=60&limit=20"
    },
    "previous": {
      "href": "/data-collections/{dataCollectionId}/data-assets?offset=20&limit=20"
    },
    "last": {
      "href": "/data-collections/{dataCollectionId}/data-assets?offset=140&limit=20"
    }
  },
  "items": [
    {
      "id": "2593524d-82f7-4dfd-bc6b-17088c046f9d",
      "externalId": "DAS-1",
      "name": "NA Sales Data",
      "description": "Data related to sales made in the 'North America' region.",
      "status": "ENABLED",
      "type": "Table",
      "source": "Snowflake",
      "descriptiveSource": "CDGC",
      "refLink": "www.snowflake.provisioning/datashare56",
      "assetLocation": "Snowflake",
      "assetLocationDescription": "Sales data for NA region stored in Snowflake DB of
respective Data Center",
      "technicalAssetName": "NA Sales Data",
      "averageRating": 4.5
    }
  ]
}
```


The following table describes the parameters of each data asset that is retrieved:

Parameter	Description
`pageInfo > offset`	Starting index of the paginated results.
`pageInfo > limit`	The maximum number of results that are displayed on a page.
`pageInfo > totalCount`	Number of data assets retrieved.
`links > self > href`	The API that was invoked to generate this response.
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`id`	System-generated unique identifier of the data asset.

Parameter	Description
externalId	Reference identifier of the data asset.
name	Name of the data asset.
description	Description of the data asset.
status	Status of the data asset. The status indicates whether the data asset is available to be added to data collections. A data asset can have one of the following statuses: - ENABLED. The data asset is available. - DISABLED. The data asset isn't available.
type	Type of the data asset.
source	Source system from which the data is supplied to Data Marketplace.
descriptiveSource	Source application from which the description of the data asset is taken.
refLink	Uniform resource identifier of the location in the data source where the data asset is stored.
assetLocation	Location of the data asset in the data source.
assetLocationDescription	Description of the location in the data source where the data asset is stored.
technicalAssetName	Name of the data asset as it appears in the data source.
averageRating	If the asset is imported from Data Governance and Catalog into Data Marketplace, the system also retrieves its rating. A rating in Data Governance and Catalog represents a user's assessment of an asset. Data Governance and Catalog users rate assets between one to five stars. The value that you see is the average of the ratings provided by all the Data Governance and Catalog users. You can refer to the rating of a Data Governance and Catalog asset to gauge its reliability.

Retrieve the consumer accesses of a data collection

Use a REST API to retrieve the consumer accesses that are associated with a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/data-collections/<dataCollectionId>/consumer-accesses** <dataCollectionId>: Required. Enter the system-generated unique identifier of the data collection for which you want to retrieve the consumer access details. For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum is `200`.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of the consumer accesses that are associated with a data collection:

```
https://{{CDMP_URL}}/api/v2/data-collections/2593524d-82f7-4dfd-bc6b-17088c046f9d/
consumer-accesses
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of the consumer accesses that are associated with a data collection:

```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
```

```
    "totalCount": 150
  },
  "links": {
    "self": {
      "href": "/data-collections/{dataCollectionId}/consumer-accesses?offset=40&limit=20"
    },
    "first": {
      "href": "/data-collections/{dataCollectionId}/consumer-accesses?offset=0&limit=20"
    },
    "next": {
      "href": "/data-collections/{dataCollectionId}/consumer-accesses?offset=60&limit=20"
    },
    "previous": {
      "href": "/data-collections/{dataCollectionId}/consumer-accesses?offset=20&limit=20"
    },
    "last": {
      "href": "/data-collections/{dataCollectionId}/consumer-accesses?
offset=140&limit=20"
    }
  },
  "items": [
    {
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "externalId": "CAS-123",
      "costCenter": "IT-DEPT-001",
      "status": "AVAILABLE",
      "accessGrantedOn": "2025-08-01",
      "consumer":
         {
            "stakeholderId": "jaXM6NrqsKXffdwg2NkTMR",
            "userType": "USER",
            "roleId": "Stakeholder_Role_Marketplace_Editor",
            "isInherited": false
         },
      "assetGroups": [
          {
            "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
            "name": "ASIA",
            "isInherited": true
          }
       ]
     }
  ]
}
```


The following table describes the parameters of each consumer access that is retrieved:

Parameter	Description
`pageInfo > offset`	Starting index of the paginated results.
`pageInfo > limit`	The maximum number of results that are displayed on a page.
`pageInfo > totalCount`	Number of consumer accesses retrieved.
`links > self > href`	The API that was invoked to generate this response.
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.

Parameter	Description
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`id`	System-generated unique identifier of the consumer access.
`externalId`	Reference identifier of the consumer access.
`costCenter`	Cost center of the Data User that was granted access to the data collection.
`status`	Status of the consumer access. A consumer access can have the following statuses: - `AVAILABLE`. The Data User has access to the data collection. - `PENDING_WITHDRAW`. A request is submitted to withdraw the Data User's access to the data collection. - `WITHDRAWN`. The Data User's access to the data collection is withdrawn.
`accessGrantedOn`	Date on which the Data User was granted access to the data collection.
`consumer`	Details about the Data User that was granted access to the data collection.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection that is associated with the consumer access.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Manage the delivery targets of a data collection

A delivery target is a delivery option that you as a stakeholder of a data collection can use to deliver data to a Data User. Stakeholders use delivery templates to create new delivery targets for their data collections.

Create delivery targets

Use a REST API to create delivery targets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/delivery-targets**
Method	POST

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`externalId`	Optional. Enter a reference identifier for the delivery target.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery target.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery target as "Excel over ipfs" while a delivery target called "Excel over IPFS" already exists, the API call fails.
`description`	Required. Enter a description for the delivery target.	-

Parameter	Description	Additional Information
`status`	Required. Specify a status for the delivery target. The status determines whether the delivery target is available for use to the Data Users that order the data collection. Enter one of the following values: - To make the delivery targets available for use to the Data Users that order the data collection, enter `ACTIVE`. - To make the delivery targets unavailable for use to the Data Users that order the data collection, enter `INACTIVE`.	-
`isDefault`	Optional. Configure the delivery target as the default delivery option for a data collection. Enter one of the following values: - To configure the delivery target as the default delivery option for a data collection, enter `true`. - To not configure the delivery target as the default delivery option for a data collection, enter `false`.	-
`targetSystemReference`	Optional. Enter the target system or resource reference from where the data is obtained.	-
`physicalLocation`	Optional. Enter the location where the data is delivered to a Data User.	If the value of the `managedAccess` parameter is `ENABLED` for the delivery template that you specified in the `deliveryTemplateId` parameter, the data won't be delivered to the location that you specify in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help. For more information about how you can use APIs to manage delivery templates, see "Delivery templates" on page 148.
`deliveryTemplateId`	Required. Enter the system-generated unique identifier of the delivery template that you want to use to create the delivery target.	For more information about how you can use an API to get the system-generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.

Parameter	Description	Additional Information
`deliveryMethodId`	Optional. Enter the system-generated unique identifier of a delivery method that is used in the delivery template that you specified in the `deliveryTemplateId` parameter.	For more information about how you can use an API to get the system-generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143. By default, the API uses the first delivery method that is configured for the delivery template that you specified in the `deliveryTemplateId` parameter.

Parameter	Description	Additional Information
deliveryFormatId	Optional. Enter the system-generated unique identifier of a delivery format that is used in the delivery template that you specified in the deliveryTemplateId parameter.	For more information about how you can use an API to get the system-generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136. By default, the API uses the first delivery format that is configured for the delivery template that you specified in the deliveryTemplateId parameter.
dataCollectionId	Required. Enter the system-generated unique identifier of the data collection for which you want to create the delivery target.	For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary, the unique identifier is 25158afc-3dfb-44ef-8f3e-cec1e171d0f1. **Note:** If the **Managed Access** option is enabled for the delivery template that you specified in the deliveryTemplateId parameter, ensure that the data collection that you specify in the dataCollectionId parameter is comprised only of data assets that belong to the same data source. For more information about how you can add data assets to a data collection, see "Add or remove data assets from data collections" on page 61.

Example request

The following example shows how you can use an API to create a delivery target:

```
{
  "externalId": "DTG-123",
  "name": "Snowflake Data Exchange - US Sales",
  "description": "Snowflake Data Exchange Portal for NA Analytics references and
enrichment data sources.",
```

```
  "status": "ACTIVE",
  "isDefault": false,
  "targetSystemReference": "Snowflake",
  "physicalLocation": "https://provision.snowflakecomputing.com",
  "deliveryTemplateId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "deliveryMethodId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "deliveryFormatId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "dataCollectionId": "b93c4539-a93e-440d-a4b4-95d69b8911e6"
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a delivery target:

```
{
  "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "externalId": "DTG-123",
  "name": "Snowflake Data Exchange - US Sales",
  "description": "Snowflake Data Exchange Portal for NA Analytics references and
enrichment data sources.",
  "isDefault": true,
  "status": "ACTIVE",
  "assetGroups": [
    {
      "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
      "name": "ASIA",
      "isInherited": true
    }
  ],
  "physicalLocation": "https://provision.snowflakecomputing.com",
  "targetSystemReference": "Snowflake"
}
```

The following table describes the parameters of each delivery target that is created:

Parameter	Description
id	System-generated unique identifier of the delivery target.
externalId	Reference identifier of the delivery target.
name	Name of the delivery target.
description	Description of the delivery target.
isDefault	Indicates whether the delivery target is the default delivery option for a data collection. This parameter can have one of the following values: - true. The delivery target is the default delivery option for a data collection. - false. The delivery target isn't the default delivery option for a data collection.
status	Status of the delivery target. Indicates whether the delivery target is available for use to the Data Users that order the data collection. A delivery target can have one of the following statuses: - ACTIVE. The delivery target is available for use. - INACTIVE. The delivery target is unavailable for use.
assetGroups	Details of the asset group that is assigned to the category that contains the data collection for the delivery target.
assetGroups > id	System-generated identifier of the asset group.

Parameter	Description
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.
`physicalLocation`	The location where the data is delivered. **Note:** If the value of the `managedAccess` parameter is `ENABLED`, the data is not delivered to the location that is specified in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
`targetSystemReference`	System where the data was delivered.

Retrieve a delivery target

Use a REST API to retrieve the details of an individual delivery target in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/delivery-targets/<deliveryTargetId>** `<deliveryTargetId>`: Required. Enter the system-generated unique identifier of the delivery target that you want to modify. For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
segments	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - all. Returns all the details about the delivery target. - deliveryTemplate. Returns the properties about the delivery template that is used to create the delivery target. - deliveryFormat. Returns the properties about the delivery format that is associated with the delivery template used to create the delivery target. - deliveryMethod. Returns the properties about the delivery method that is associated with the delivery template used to create the delivery target. - systemAttributes. Returns the details about the delivery target's creation and modification, such as the details of the user that created the delivery target, the latest user that modified the delivery target, and so on.	By default, the parameter is assigned no value and the API response includes only the basic information about the delivery target such as name, description and so on.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a delivery target:

```
https://{{CDMP_URL}}/api/v2/delivery-targets/b93c4539-a93e-440d-a4b4-95d69b8911e6
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a delivery target:

```
{
  "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "externalId": "DTG-123",
  "name": "Snowflake Data Exchange - US Sales",
  "description": "Snowflake Data Exchange Portal for NA Analytics references and
enrichment data sources.",
  "isDefault": true,
  "status": "ACTIVE",
  "assetGroups": [
    {
      "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
      "name": "ASIA",
      "isInherited": true
    }
  ],
  "physicalLocation": "https://provision.snowflakecomputing.com",
  "targetSystemReference": "Snowflake"
}
```

The following table describes the parameters of the delivery target that is retrieved:

Parameter	Description
`id`	System-generated unique identifier of the delivery target.
`externalId`	Reference identifier of the delivery target.
`name`	Name of the delivery target.
`description`	Description of the delivery target.
`isDefault`	Indicates whether the delivery target is the default delivery option for a data collection. This parameter can have one of the following values: - `true`. The delivery target is the default delivery option for a data collection. - `false`. The delivery target isn't the default delivery option for a data collection.
`status`	Status of the delivery target. Indicates whether the delivery target is available for use to the Data Users that order the data collection. A delivery target can have one of the following statuses: - `ACTIVE`. The delivery target is available for use. - `INACTIVE`. The delivery target is unavailable for use.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection for the delivery target.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.
`physicalLocation`	The location where the data is delivered. **Note:** If the value of the `managedAccess` parameter is `ENABLED`, the data is not delivered to the location that is specified in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
`targetSystemReference`	System where the data was delivered.

Retrieve all delivery targets

Use a REST API to retrieve the details of all delivery targets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/delivery-targets**
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about each delivery target that is retrieved. - `deliveryTemplate`. Returns the properties about the delivery template that is used to create a delivery target. - `deliveryFormat`. Returns the properties about the delivery format that is associated with the delivery template used to create a delivery target. - `deliveryMethod`. Returns the properties about the delivery method that is associated with the delivery template used to create a delivery target. - `systemAttributes`. Returns the details about a delivery target's creation and modification, such as the details of the user that created the delivery target, the latest user that modified the delivery target, and so on.	By default, the parameter is assigned no value and the API response includes only the basic information about the delivery target such as name, description and so on.
`search`	Optional. Enter the search term to find a delivery target by name.	-
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum is `200`.

Parameter	Description	Additional Information
sortby	Optional. Specify the parameters to sort the search results. Enter one of the following values: - id - name - status - createdOn - modifiedOn	Default is modifiedOn.
sortOrder	Optional. Set the sorting order of the search results. Enter one of the following values: - To sort the search results by ascending order, enter asc. - To sort the search results by descending order, enter desc.	Default is desc.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of all delivery targets:

```
https://{{CDMP_URL}}/api/v2/delivery-targets
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of all delivery targets:

```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
    "totalCount": 120
  },
  "links": {
    "self": {
      "href": "/delivery-targets?offset=40&limit=20"
    },
    "first": {
      "href": "/delivery-targets?offset=0&limit=20"
    },
    "next": {
      "href": "/delivery-targets?offset=60&limit=20"
    },
    "previous": {
      "href": "/delivery-targets?offset=20&limit=20"
    },
    "last": {
      "href": "/delivery-targets?offset=100&limit=20"
    }
  },
  "items": [
    {
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "externalId": "DTG-123",
      "name": "Snowflake Data Exchange - US Sales",
      "description": "Snowflake Data Exchange Portal for NA Analytics references and
enrichment data sources.",
      "isDefault": true,
```

```
        "status": "ACTIVE",
        "assetGroups": [
          {
            "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
            "name": "ASIA",
            "isInherited": true
          }
        ],
        "physicalLocation": "https://provision.snowflakecomputing.com",
        "targetSystemReference": "Snowflake"
      }
    ]
  }
```


The following table describes the parameters of each delivery target that is retrieved:

Parameter	Description
pageInfo > offset	Starting index of the paginated results.
pageInfo > limit	The maximum number of results that are displayed on a page.
pageInfo > totalCount	Number of delivery targets retrieved.
links > self > href	The API that was invoked to generate this response.
links > first > href	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
links > next > href	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
links > previous > href	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
links > last > href	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
id	System-generated unique identifier of the delivery target.
externalId	Reference identifier of the delivery target.
name	Name of the delivery target.
description	Description of the delivery target.
isDefault	Indicates whether the delivery target is the default delivery option for a data collection. This parameter can have one of the following values: - true. The delivery target is the default delivery option for a data collection. - false. The delivery target isn't the default delivery option for a data collection.
status	Status of the delivery target. Indicates whether the delivery target is available for use to the Data Users that order the data collection. A delivery target can have one of the following statuses: - ACTIVE. The delivery target is available for use. - INACTIVE. The delivery target is unavailable for use.
assetGroups	Details of the asset group that is assigned to the category that contains the data collection for the delivery target.

Parameter	Description
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.
`physicalLocation`	The location where the data is delivered. **Note:** If the value of the `managedAccess` parameter is `ENABLED`, the data is not delivered to the location that is specified in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
`targetSystemReference`	System where the data was delivered.

Modify delivery targets

Use a REST API to modify a delivery target in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/delivery-targets/<deliveryTargetId>** `<deliveryTargetId>`: Required. Enter the system generated unique identifier of the delivery target that you want to modify. For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`operation`	Required. Specify the type of change you want to make to the delivery target. Enter one of the following values: - `add`. To add a value to a parameter, enter . - `replace`. To replace an existing value of a parameter. - `remove`. To remove a value from a parameter.	-
`segment`	Required. Specify the type of details that you want the API request to modify. Enter one of the following values: - To modify the values specified in the `name` and `description` parameters, enter `summary`. - To modify the value specified in the `deliveryTemplateId` parameter, enter `deliveryTemplate`. - To modify the value specified in the `deliveryFormatId` parameter, enter `deliveryFormat`. - To modify the value specified in the `deliveryMethodId` parameter, enter `deliveryMethod`. - To modify the values specified in the `externalId`, `status`, `isDefault`, `targetSystemReference`, and `physicalLocation` parameters, enter `selfAttributes`.	-
`name`	Optional. Enter a name for the delivery target.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery target as "Excel over ipfs" while a delivery target called "Excel over IPFS" already exists, the API call fails.
`description`	Optional. Enter a description for the delivery target.	-

Parameter	Description	Additional Information
`externalId`	Optional. Enter a reference identifier for the delivery target.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`status`	Optional. Specify a status for the delivery target. The status determines whether the delivery target is available for use to the Data Users that order the data collection. Enter one of the following values: - To make the delivery targets available for use to the Data Users that order the data collection, enter `ACTIVE`. - To make the delivery targets unavailable for use to the Data Users that order the data collection, enter `INACTIVE`.	=
`isDefault`	Optional. Configure the delivery target as the default delivery option for a data collection. Enter one of the following values: - To configure the delivery target as the default delivery option for a data collection, enter `true`. - To not configure the delivery target as the default delivery option for a data collection, enter `false`.	-
`targetSystemReference`	Optional. Enter the target system or resource reference from where the data is obtained.	-

Parameter	Description	Additional Information
`physicalLocation`	Optional. Enter the location where the data is delivered to a Data User.	If the value of the `managedAccess` parameter is `ENABLED` for the delivery template that you specified in the `deliveryTemplateId` parameter, the data won't be delivered to the location that you specify in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help. For more information about how you can use APIs to manage delivery templates, see "Delivery templates" on page 148.
`deliveryTemplateId`	Optional. Enter the system generated unique identifier of the delivery template that you want to use to for the delivery target.	For more information about how you can use an API to get the system-generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.
`deliveryMethodId`	Optional. Enter the system generated unique identifier of the delivery method that is used in the delivery template that you specified in the `deliveryTemplateId` parameter.	For more information about how you can use an API to get the system-generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
`deliveryFormatId`	Optional. Enter the system generated unique identifier of the delivery format that is used in the delivery template that you specified in the `deliveryTemplateId` parameter.	For more information about how you can use an API to get the system-generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.

Example request

The following example shows how you can use an API to modify a delivery target:

```
{
  "operation": "replace",
  "segment": "summary",
  "value": {
    "name": "Snowflake Data Exchange - US Sales",
    "description": "Snowflake Data Exchange Portal for NA Analytics references and
enrichment data sources."
  }
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the delivery target is successfully modified:

```
204 OK code
```

Delete delivery targets

Use a REST API to delete a delivery target of a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/delivery-targets/<deliveryTargetId>** <deliveryTargetId>: Required. Enter the system-generated unique identifier of the delivery target that you want to delete. For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.
Method	DELETE

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

Note: The API has no payload.

Example request

The following example shows how you can use an API to delete a delivery target:

```
https://{{CDMP_URL}}/api/v2/delivery-targets/67417f72-e5ab-44f0-add9-a1e412c1ce13
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the delivery target is successfully deleted:

```
204 OK code
```

CHAPTER 5

Manage orders and consumer accesses

Use REST APIs to manage the orders and consumer accesses that are associated with a data collection. You can also use APIs to manage data collection requests.

The following table lists the tasks you can perform related to orders, consumer accesses and data collection requests:

Tasks	Topic	Authentication Method
Manage orders	See "Orders" on page 85.	JWT
Manage consumer accesses	See "Consumer accesses" on page 104.	JWT
Make a consumer access available	See "Make consumer accesses available" on page 326.	Application Integration
Manage data collection requests	See "Data collection requests" on page 258.	Application Integration

Orders

An order is a request made by a Data User to gain access to a data collection. A Data User's order is reviewed by the stakeholders of the data collection who are responsible for the approval and fulfillment of the order.

Create orders

Use a REST API to create an order in Data Marketplace. You can use this API to create orders only for yourself, not on behalf of other users.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders**
Method	POST

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`externalId`	Optional. Enter a reference identifier for the order that you want to create.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`dataCollectionId`	Required. Enter the system-generated unique identifier of the data collection for which you want to create the order.	For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`usageContextId`	Optional. Enter the system-generated unique identifier of the usage type that you want to use to specify the context in which you intend to use the data after you receive access to the collection.	For more information about how you can use an API to get the system-generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`justification`	Required. Enter a brief description of how you intend to use the data after you receive access to the collection.	-

Parameter	Description	Additional Information
`deliveryRequests`	Optional. Enter any additional information that pertains to your order. For example, you can specify the urgency or the preferred delivery method in this field.	-
`requestedProvisionedTargetRef`	Optional. Enter the system-generated unique identifier of the delivery target that you want a stakeholder to use to deliver the data.	For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77. If you don't specify a value for the `requestedProvisionedTargetRef` parameter, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can use an API to get the system-generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.
`costCenter`	Optional. Enter your cost center.	-
`customAttributes`	Specify the custom attribute values for the order.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customAttributes > value`	Enter a value for the custom attribute.	-
`customAttributes > id`	Enter the system-generated unique identifier of the custom attribute.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Example request

The following example shows how you can use an API to create an order:

```
{
  "externalId": "ORD-1",
  "dataCollectionId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "usageContextId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "justification": "Need customer analytics data for Q4 planning and market analysis to
improve product recommendations",
  "deliveryRequests": "Data should be delivered in Parquet format to S3 bucket s3://
analytics-bucket/orders/ on a weekly basis",
  "requestedProvisionedTargetRef": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "US-IT-2025",
  "customAttributes": [
    {
      "value": "PROJ-2024-CUSTOMER-INSIGHTS",
      "id": "com.infa.odin.models.custom.ca_2491832487117218775"
    }
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create an order that requires manual approval and fulfillment by a stakeholder:

```
{
  "id": "d93c4539-a93e-440d-a4b4-95d69b8911e7",
  "externalId": "ORD-1",
  "justification": "Need customer analytics data for Q4 planning and market analysis to
improve product recommendations",
  "deliveryRequest": "Data should be delivered in Parquet format to S3 bucket s3://
analytics-bucket/orders/ on a weekly basis",
  "requestedProvisionedTargetRef": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "US-IT-2025",
  "status": "PENDING",
  "assetGroups": [
    {
      "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
      "name": "ASIA",
      "isInherited": true
    }
  ]
}
```

The following table describes the parameters of each order that is created that requires manual approval and fulfillment by a stakeholder:

Parameter	Description
id	System-generated unique identifier of the order.
externalId	Reference identifier of the order.
justification	The reason provided at the time of order for requesting access to the data.
deliveryRequests	Additional information that pertains to the order.
requestedProvisionedTargetRef	The delivery target requested by the Data User.

Parameter	Description
costCenter	Cost center of the Data User that ordered the data collection.
status	Status of the order. An order can have one of the following statuses: - PENDING. The order is submitted. - APPROVED. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - REJECTED. The order is rejected by a stakeholder of the ordered data collection. - COMPLETE. The ordered data is delivered to the Data User. - CANCELLED. The order is cancelled. An order that requires manual approval and fulfillment by a stakeholder is created with PENDING status.
assetGroups	Details of the asset group that is assigned to the category that contains the ordered data collection.
assetGroups > id	System-generated identifier of the asset group.
assetGroups > name	Name of the asset group.
assetGroups > isInherited	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - true. The asset group is inherited from the category hierarchy. - false. The asset group is directly assigned to the category.

The following example shows the response of an API call to create an order for which the approval and fulfillment is automated:


```
{
  "id": "d93c4539-a93e-440d-a4b4-95d69b8911e7",
  "externalId": "ORD-1",
  "justification": "Need customer analytics data for Q4 planning and market analysis to
improve product recommendations",
  "deliveryRequest": "Data should be delivered in Parquet format to S3 bucket s3://
analytics-bucket/orders/ on a weekly basis",
  "requestedProvisionedTargetRef": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "US-IT-2025",
  "status": "COMPLETE",
  "assetGroups": [
    {
      "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
      "name": "ASIA",
      "isInherited": true
    }
  ],
  "consumerAccess": {
    "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
    "externalId": "CAS-123",
    "costCenter": "IT-DEPT-001",
    "status": "AVAILABLE",
    "accessGrantedOn": "2025-08-01",
    "assetGroups": [
      {
        "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
        "name": "ASIA",
        "isInherited": true
      }
    ],
    "_links": {
```

```
        "self": {
          "href": "/consumer-accesses/b93c4539-a93e-440d-a4b4-95d69b8911e6"
        }
      }
    }
  }
```

The following table describes the parameters of each order that is created for which the approval and fulfillment is automated:

Parameter	Description
`id`	System-generated unique identifier of the order.
`externalId`	Reference identifier of the order.
`justification`	The reason provided at the time of order for requesting access to the data.
`deliveryRequests`	Additional information that pertains to the order.
`requestedProvisionedTargetRef`	The delivery target requested by the Data User.
`costCenter`	Cost center of the Data User that ordered the data collection.
`status`	Status of the order. An order can have one of the following statuses: - `PENDING`. The order is submitted. - `APPROVED`. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - `REJECTED`. The order is rejected by a stakeholder of the ordered data collection. - `COMPLETE`. The ordered data is delivered to the Data User. - `CANCELLED`. The order is cancelled. An order for which the approval and fulfillment is automated is created with `COMPLETE` status.
`assetGroups`	Details of the asset group that is assigned to the category that contains the ordered data collection.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.
`consumerAccess`	Details of the consumer access that is created after the order is fulfilled.

Retrieve an order

Use a REST API to retrieve the details of an individual order in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>** <orderId>: Required. Enter the system-generated identifier of the order for which you want to retrieve the details. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about the order. - `dataCollection`. Returns the details about the ordered data collection. - `customAttributes`. Returns the details about the custom attributes that are configured for the order. - `stakeholdership`. Returns the type of user and role that are assigned as stakeholder on the ordered data collection. - `systemAttributes`. Returns the details about the order's creation and modification, such as the date when the order was placed, the latest date when it was modified, and so on. - `terms`. Returns the details about the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed. - `usageContext`. Returns the details about the usage type that the Data User selected at the time of order.	By default, the parameter is assigned no value and the API response includes only the basic information about the order such as the ordered data collection, business justification and so on.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of an order:

```
https://{{CDMP_URL}}/api/v2/orders/2593524d-82f7-4dfd-bc6b-17088c046f9d
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of an order:

```
{
  "externalId": "ORD-1",
  "dataCollectionId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "justification": "Need customer analytics data for Q4 planning and market analysis to
improve product recommendations",
  "deliveryRequests": "Data should be delivered in Parquet format to S3 bucket s3://
analytics-bucket/orders/ on a weekly basis",
  "requestedProvisionedTargetRef": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "US-IT-2025",
  "assetGroups": [
    {
      "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
      "name": "ASIA",
      "isInherited": true
    }
  ]
}
```

The following table describes the parameters of the order that is retrieved:

Parameter	Description
`externalId`	Reference identifier of the order.
`dataCollectionId`	System-generated unique identifier of the ordered data collection.
`justification`	The reason provided at the time of order for requesting access to the data.
`deliveryRequests`	Additional information that pertains to the order.
`requestedProvisionedTargetRef`	The delivery target requested by the Data User.
`costCenter`	Cost center of the Data User that ordered the data collection.
`status`	Status of the order. An order can have one of the following statuses: - `PENDING`. The order is submitted. - `APPROVED`. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - `REJECTED`. The order is rejected by a stakeholder of the ordered data collection. - `COMPLETE`. The ordered data is delivered to the Data User. - `CANCELLED`. The order is cancelled.
`assetGroups`	Details of the asset group that is assigned to the category that contains the ordered data collection.
`assetGroups > id`	System-generated identifier of the asset group.

Parameter	Description
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Retrieve all orders

Use a REST API to retrieve the details of all orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/**
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about each order that is retrieved. - `dataCollection`. Returns the details about the ordered data collection. - `customAttributes`. Returns the details about the custom attributes that are configured for an order. - `stakeholdership`. Returns the type of user and role that are assigned as stakeholder on the ordered data collection. - `systemAttributes`. Returns the details about an order's creation and modification, such as the date when the order was placed, the latest date when it was modified, and so on. - `terms`. Returns the details about the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed. - `usageContext`. Returns the details about the usage type that the Data User selected at the time of order.	By default, the parameter is assigned no value and the API response includes only the basic information about the order such as the ordered data collection, business justification and so on.
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum is `200`.
`sortby`	Optional. Specify the parameters to sort the search results. Enter one of the following values: - `id` - `justification` - `status` - `createdBy` - `createdOn` - `modifiedBy` - `modifiedOn`	Default is `modifiedOn`.
`sortOrder`	Optional. Set the sorting order of the search results. Enter one of the following values: - To sort the search results by ascending order, enter `asc`. - To sort the search results by descending order, enter `desc`.	Default is `desc`.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of all orders:

```
https://{{CDMP_URL}}/api/v2/orders
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of all orders:


```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
    "totalCount": 120
  },
  "links": {
    "self": {
      "href": "/orders?offset=40&limit=20"
    },
    "first": {
      "href": "/orders?offset=0&limit=20"
    },
    "next": {
      "href": "/orders?offset=60&limit=20"
    },
    "previous": {
      "href": "/orders?offset=20&limit=20"
    },
    "last": {
      "href": "/orders?offset=100&limit=20"
    }
  },
  "items": {
    "externalId": "ORD-1",
    "dataCollectionId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
    "justification": "Need customer analytics data for Q4 planning and market analysis
to improve product recommendations",
    "deliveryRequests": "Data should be delivered in Parquet format to S3 bucket s3://
analytics-bucket/orders/ on a weekly basis",
    "requestedProvisionedTargetRef": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
    "costCenter": "US-IT-2025",
    "assetGroups": [
      {
        "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
        "name": "ASIA",
        "isInherited": true
      }
    ]
  }
}
```


The following table describes the parameters of each order that is retrieved:

Parameter	Description
pageInfo > offset	Starting index of the paginated results.
pageInfo > limit	The maximum number of results that are displayed on a page.
pageInfo > totalCount	Number of orders retrieved.
links > self > href	The API that was invoked to generate this response.

Parameter	Description
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`externalId`	Reference identifier of the order.
`dataCollectionId`	System-generated unique identifier of the ordered data collection.
`justification`	The reason provided at the time of order for requesting access to the data.
`deliveryRequests`	Additional information that pertains to the order.
`requestedProvisionedTargetRef`	The delivery target requested by the Data User.
`costCenter`	Cost center of the Data User that ordered the data collection.
`status`	Status of the order. An order can have one of the following statuses: - `PENDING`. The order is submitted. - `APPROVED`. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - `REJECTED`. The order is rejected by a stakeholder of the ordered data collection. - `COMPLETE`. The ordered data is delivered to the Data User. - `CANCELLED`. The order is cancelled.
`assetGroups`	Details of the asset group that is assigned to the category that contains the ordered data collection.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Approve orders

Use REST APIs to approve orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>/approve** <orderId>: Required. Enter the system-generated identifier of the order that you want to approve. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`comment`	Optional. Enter a comment about the action taken.	-
`costCenter`	Optional. Specify the cost center of the Data User that placed the order or modify the cost center value specified by the Data User.	-
`customAttributes`	Specify the custom attribute values for the order or modify the custom attribute values specified by the Data User at the time of order.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.

Parameter	Description	Additional Information
`customAttributes > value`	Enter the updated value for the custom attribute.	-
`customFields > id`	Enter the system-generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Example request

The following example shows how you can use an API to approve an order:

```
https://{{CDMP_URL}}/api/v2/orders/2593524d-82f7-4dfd-bc6b-17088c046f9d/approve
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the order is successfully approved:

```
204 OK code
```

Fulfill orders

Use REST APIs to mark orders as fulfilled in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>/fulfill** `<orderId>`: Required. Enter the system-generated identifier of the order that you want to mark as fulfilled. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`comment`	Optional. Enter a comment about the action taken.	-
`deliveryTargetId`	Required. Enter the system generated unique identifier of the delivery target that you want to use to deliver the data.	For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.
`costCenter`	Optional. Specify the cost center of the Data User that placed the order or modify the cost center value specified by the Data User.	-
`customAttributes`	Specify the custom attribute values for the order or modify the custom attribute values specified by the Data User at the time of order.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customAttributes > value`	Enter the updated value for the custom attribute.	-
`customFields > id`	Enter the system-generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Example request

The following example shows how you can use an API to mark an order as fulfilled:

```
{
  "comment": "Order fulfilled.",
  "deliveryTargetId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "MARKETING-2025",
  "customAttributes": [
    {
      "value": "PROJ-2024-CUSTOMER-INSIGHTS",
      "id": "com.infa.odin.models.custom.ca_2491832487117218775"
    }
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following table describes the parameters of each order that is marked as fulfilled:

```
{
  "id": "d93c4539-a93e-440d-a4b4-95d69b8933e6",
  "externalId": "CAS-123",
  "costCenter": "IT-DEPT-001",
  "status": "AVAILABLE",
  "accessGrantedOn": "2025-08-01",
  "consumer":
    {
       "stakeholderId": "jaXM6NrqsKXffdwg2NkTMR",
       "userType": "USER",
       "roleId": "Stakeholder_Role_Marketplace_Editor",
       "isInherited": false
     },
  "assetGroups": [
    {
       "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
       "name": "ASIA",
       "isInherited": true
    }
  ]
}
```

Parameter	Description
`id`	System-generated unique identifier of the consumer access that is created upon order fulfillment.
`externalId`	Reference identifier of the consumer access.
`costCenter`	Cost center of the Data User that was granted access to the data collection.
`status`	Status of the consumer access. A consumer access can have the following statuses: - `AVAILABLE`. The Data User has access to the data collection. - `PENDING_WITHDRAW`. A request is submitted to withdraw the Data User's access to the data collection. - `WITHDRAWN`. The Data User's access to the data collection is withdrawn.
`accessGrantedOn`	Date on which the Data User was granted access to the data collection.
`consumer`	Details about the Data User that was granted access to the data collection.
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection that is associated with consumer access.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Cancel orders

Use REST APIs to cancel orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>/cancel** <orderId>: Required. Enter the system-generated identifier of the order that you want to cancel. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Example request

The following example shows how you can use an API to cancel an order:

```
https://{{CDMP_URL}}/api/v2/orders/2593524d-82f7-4dfd-bc6b-17088c046f9d/cancel
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the order is successfully cancelled:

```
204 OK code
```

Reject orders

Use REST APIs to reject orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>/reject** <orderId>: Required. Enter the system-generated identifier of the order that you want to reject. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Example request

The following example shows how you can use an API to reject an order:

```
https://{{CDMP_URL}}/api/v2/orders/2593524d-82f7-4dfd-bc6b-17088c046f9d/reject
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the order is successfully rejected:

```
204 OK code
```

Delete orders

If you placed an order accidentally or if an order is obsolete, you can use a REST API to delete the order.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/orders/<orderId>** <orderId>: Required. Enter the system-generated identifier of the order that you want to delete. For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94. To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	DELETE

Note: To delete a fulfilled order, ensure that you have already deleted its associated consumer access. For more information about how you can delete a consumer access, see "Delete consumer accesses" on page 120.

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

Note: The API has no payload.

Example request

The following example shows how you can use an API to delete an order:

```
https://{{CDMP_URL}}/api/v2/orders/2593524d-82f7-4dfd-bc6b-17088c046f9d
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the order is successfully deleted:

```
204 OK code
```

Consumer accesses

A consumer access is a record that indicates a Data User's access to a data collection, along with other details such as the date of delivery, details of the stakeholder that delivered the data, and the delivery option that was used for the delivery.

Create consumer accesses

Use a REST API to create a consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses**
Method	POST

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`externalId`	Optional. Enter a reference identifier for the consumer access that you want to create.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the item. The reference identifier that Data Marketplace automatically generates contains a prefix. The administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`status`	Optional. Specify a status for the consumer access. Enter one of the following values: - For a consumer access where the Data User has access to the data collection, enter `AVAILABLE`. - For a consumer access that is awaiting withdrawal, enter `PENDING_WITHDRAW`. - For a consumer access that is withdrawn, enter `WITHDRAWN`. Default is `AVAILABLE`.	-

Parameter	Description	Additional Information
`dataCollectionId`	Required. Enter the system-generated unique identifier of the data collection to which the Data User was granted access.	For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51. To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`deliveryTargetId`	Required. Enter the system-generated unique identifier of the delivery target that was used to deliver the data.	For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.
`accessGrantedOn`	Optional. Enter the date on which the Data User was granted access to the data collection.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard.
`consumerUserId`	Required. Enter the system-generated unique identifier of the user account that was granted access to the data collection.	To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`usageContextId`	Optional. Enter the system-generated unique identifier of the usage type used to specify the context in which the data is to be used as provided by the Data User that was granted access to the collection.	For more information about how you can use an API to get the system-generated unique identifier of a usage type, see "Retrieve usage type" on page 174.

Parameter	Description	Additional Information
costCenter	Optional. Enter the cost center of the Data User that was granted access to the data collection.	-
customAttributes	Specify the custom attribute values for the consumer access.	Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customAttributes > value	Enter a value in the custom attribute.	-
customFields > id	Enter the system-generated unique identifier of the custom attribute.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Example request

The following example shows how you can use an API to create a consumer access:

```
{
  "externalId": "CAS-123",
  "status": "AVAILABLE",
  "dataCollectionId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "deliveryTargetId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "accessGrantedOn": "2025-08-01",
  "consumerUserId": "jqPFaKmJRGhdfJ35eWUzoW",
  "usageContextId": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "costCenter": "string",
  "customAttributes": [
    {
      "value": "PROJ-2024-CUSTOMER-INSIGHTS",
      "id": "com.infa.odin.models.custom.ca_2491832487117218775"
    }
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a consumer access:

```
{
  "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "externalId": "CAS-123",
  "costCenter": "IT-DEPT-001",
  "status": "AVAILABLE",
```

```
    "accessGrantedOn": "2025-08-01",
    "consumer":
      {
        "stakeholderId": "jaXM6NrqsKXffdwg2NkTMR",
        "userType": "USER",
        "roleId": "Stakeholder_Role_Marketplace_Editor",
        "isInherited": false
      },
    "assetGroups": [
      {
        "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
        "name": "ASIA",
        "isInherited": true
      }
    ]
  }
```

The following table describes the parameters of each consumer access that is created:

Parameter	Description
id	System-generated unique identifier of the consumer access.
externalId	Reference identifier of the consumer access.
costCenter	Cost center of the Data User that was granted access to the data collection.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
consumer	Details about the Data User that was granted access to the data collection.
assetGroups	Details of the asset group that is assigned to the category that contains the data collection that is associated with the consumer access.
assetGroups > id	System-generated identifier of the asset group.
assetGroups > name	Name of the asset group.
assetGroups > isInherited	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - true. The asset group is inherited from the category hierarchy. - false. The asset group is directly assigned to the category.

Retrieve a consumer access

Use a REST API to retrieve the details of an individual consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>** `<consumerAccessId>`: Required. Enter the system-generated identifier of the consumer access for which you want to retrieve the details. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about the consumer access. - `customAttributes`. Returns the details about the custom attributes that are configured for the consumer access. - `dataCollection`. Returns the details about the data collection that is associated with the consumer access. - `deliveryTarget`. Returns the details about the delivery target that was used to deliver the data. - `order`. Returns the details about the order for which the consumer access is created. - `systemAttributes`. Returns the details about the consumer access's creation and modification, such as the date when the consumer access was granted, the latest date when it was modified, and so on. - `terms`. Returns the details about the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed. - `usageContext`. Returns the details about the usage type that the Data User selected at the time of order.	By default, the parameter is assigned no value and the API response includes only the basic information about the consumer access such as status, cost center and so on.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a consumer access:

```
https://{{CDMP_URL}}/api/v2/consumer-accesses/2593524d-82f7-4dfd-bc6b-17088c046f9d
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a consumer access:

```
{
  "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
  "externalId": "CAS-123",
  "costCenter": "IT-DEPT-001",
  "status": "AVAILABLE",
  "accessGrantedOn": "2025-08-01",
  "consumer":
    {
      "stakeholderId": "jaXM6NrqsKXffdwg2NkTMR",
      "userType": "USER",
      "roleId": "Stakeholder_Role_Marketplace_Editor",
      "isInherited": false
    },
  "assetGroups": [
```

```
        {
          "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
          "name": "ASIA",
          "isInherited": true
        }
      ]
    }
```

The following table describes the parameters of the consumer access that is retrieved:

Parameter	Description
id	System-generated unique identifier of the consumer access.
externalId	Reference identifier of the consumer access.
costCenter	Cost center of the Data User that was granted access to the data collection.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
consumer	Details about the Data User that was granted access to the data collection.
assetGroups	Details of the asset group that is assigned to the category that contains the data collection that is associated with consumer access.
assetGroups > id	System-generated identifier of the asset group.
assetGroups > name	Name of the asset group.
assetGroups > isInherited	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - true. The asset group is inherited from the category hierarchy. - false. The asset group is directly assigned to the category.

Retrieve all consumer accesses

Use a REST API to retrieve the details of all consumer accesses in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses**
Method	GET

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Specify the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Specify the maximum number of results that are displayed on a page.	Default is `20`. Maximum is `200`.
`segments`	Optional. Specify the type of details that you want the API request to return. Enter one or more of the following values: - `all`. Returns all the details about each consumer access that is retrieved. - `customAttributes`. Returns the details about the custom attributes that are configured for a consumer access. - `dataCollection`. Returns the details about the data collection that is associated with a consumer access. - `deliveryTarget`. Returns the details about the delivery target that was used to deliver the data. - `order`. Returns the details about the order for which the consumer access is created. - `usageContext`. Returns the details about the usage type that the Data User selected at the time of order. - `terms`. Returns the details about the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed. - `systemAttributes`. Returns the details about a consumer access's creation and modification, such as the date when the consumer access was granted, the latest date when it was modified, and so on.	By default, the parameter is assigned no value and the API response includes only the basic information about the consumer access such as status, cost center and so on.
`sortBy`	Optional. Specify the parameters to sort the search results. Enter one of the following values: - `accessGrantedOn` - `createdOn` - `modifiedOn`	Default is `modifiedOn`.

Parameter	Description	Additional Information
sortOrder	Optional. Set the sorting order of the search results. Enter one of the following values: - To sort the search results by ascending order, enter asc. - To sort the search results by descending order, enter desc.	Default is desc.
status	Optional. Specify the status of the consumer access. Enter one of the following values: - To find consumer accesses where the Data User has access to the data collection, enter AVAILABLE. - To find consumer accesses that are pending withdrawal, enter PENDING_WITHDRAW. - To find consumer accesses that are withdrawn, WITHDRAWN.	-

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of all consumer accesses:

```
https://{{CDMP_URL}}/api/v2/consumer-accesses
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of all consumer accesses:


```
{
  "pageInfo": {
    "offset": 40,
    "limit": 20,
    "totalCount": 120
  },
  "links": {
    "self": {
      "href": "/consumer-accesses?offset=40&limit=20"
    },
    "first": {
      "href": "/consumer-accesses?offset=0&limit=20"
    },
    "next": {
      "href": "/consumer-accesses?offset=60&limit=20"
    },
    "previous": {
      "href": "/consumer-accesses?offset=20&limit=20"
    },
    "last": {
      "href": "/consumer-accesses?offset=100&limit=20"
    }
  },
  "items": [
    {
      "id": "b93c4539-a93e-440d-a4b4-95d69b8911e6",
      "externalId": "CAS-123",
      "costCenter": "IT-DEPT-001",
```

```
        "status": "AVAILABLE",
        "accessGrantedOn": "2025-08-01",
        "consumer":
           {
             "stakeholderId": "jaXM6NrqsKXffdwg2NkTMR",
             "userType": "USER",
             "roleId": "Stakeholder_Role_Marketplace_Editor",
             "isInherited": false
           },
        "assetGroups": [
           {
             "id": "c1a86a0e-7690-4577-99ab-be4b193e7d90",
             "name": "ASIA",
             "isInherited": true
          }
        ]
      }
    ]
  }
```


The following table describes the parameters of each consumer access that is retrieved:

Parameter	Description
`pageInfo > offset`	Starting index of the paginated results.
`pageInfo > limit`	The maximum number of results that are displayed on a page.
`pageInfo > totalCount`	Number of consumer accesses retrieved.
`links > self > href`	The API that was invoked to generate this response.
`links > first > href`	The API endpoint that you can use to retrieve the search results that are displayed on the first page.
`links > next > href`	The API endpoint that you can use to retrieve the search results from the page following the one you currently have open.
`links > previous > href`	The API endpoint that you can use to retrieve the search results from the page prior to the one you currently have open.
`links > last > href`	The API endpoint that you can use to retrieve the search results that are displayed on the last page.
`id`	System-generated unique identifier of the consumer access.
`externalId`	Reference identifier of the consumer access.
`costCenter`	Cost center of the Data User that was granted access to the data collection.
`status`	Status of the consumer access. A consumer access can have the following statuses: - `AVAILABLE`. The Data User has access to the data collection. - `PENDING_WITHDRAW`. A request is submitted to withdraw the Data User's access to the data collection. - `WITHDRAWN`. The Data User's access to the data collection is withdrawn.
`accessGrantedOn`	Date on which the Data User was granted access to the data collection.
`consumer`	Details about the Data User that was granted access to the data collection.

Parameter	Description
`assetGroups`	Details of the asset group that is assigned to the category that contains the data collection that is associated with consumer access.
`assetGroups > id`	System-generated identifier of the asset group.
`assetGroups > name`	Name of the asset group.
`assetGroups > isInherited`	Indicates whether the asset group is directly assigned to the category or if the asset group is inherited from the category hierarchy. This parameter can have one of the following values: - `true`. The asset group is inherited from the category hierarchy. - `false`. The asset group is directly assigned to the category.

Modify custom attributes of consumer accesses

Use a REST API to modify the custom attributes of a consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>** `<consumerAccessId>`: Required. Enter the system-generated identifier of the consumer access for which you want to modify custom attributes. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`customAttributes`	Modify the custom attributes of the consumer access.	Whether you must enter a value in a custom attribute or not is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customAttributes > value`	Enter the updated value for the custom attribute.	-
`customFields > id`	Enter the system-generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.

Example request

The following example shows how you can use an API to modify the custom attributes of a consumer access:

```
{
  "customAttributes": [
    {
      "value": "PROJ-2024-CUSTOMER-INSIGHTS",
      "id": "com.infa.odin.models.custom.ca_2491832487117218775"
    }
  ]
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the custom attributes of the consumer access are successfully modified successfully:

```
204 OK code
```

Submit consumer access withdrawals

Use a REST API to submit a request to withdraw a Data User's access to a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>/request-withdrawal** <consumerAccessId>: Required. Enter the system-generated identifier of the consumer access for which you want to request a withdrawal. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`. Ensure that the consumer access that you specify is in the `AVAILABLE` state.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Example request

The following example shows how you can use an API to submit a withdrawal request for a consumer access:

Request query

```
https://{{CDMP_URL}}/api/v2/consumer-accesses/794a215f-5479-4b55-8e1b-a4866ec9fe82/request-withdrawal
```

Request body

```
{
  "comment": "Requesting withdrawal as user has completed project and no longer requires access"
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that a request to withdraw the consumer access is successfully submitted:

```
204 OK code
```

Withdraw consumer accesses

Use a REST API to withdraw a Data User's access to a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>/withdraw** <consumerAccessId>: Required. Enter the system-generated identifier of the consumer access that you want to withdraw. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`. Ensure that the consumer access that you specify is in the `AVAILABLE` or `PENDING_WITHDRAW` state.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Example request

The following example shows how you can use an API to withdraw a consumer access:

Request query

```
https://{{CDMP_URL}}/api/v2/consumer-accesses/794a215f-5479-4b55-8e1b-a4866ec9fe82/withdraw
```

Request body

```
{
  "comment": "Revoking the access as user has completed project and no longer requires access"
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the consumer access is successfully withdrawn:

```
204 OK code
```

Cancel consumer access withdrawals

Use a REST API to cancel a withdrawal request that is submitted for a consumer access.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>/cancel-withdrawal** <consumerAccessId>: Required. Enter the system-generated identifier of the consumer access for which you want to cancel the withdrawal request. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`. Ensure that the consumer access that you specify is in the `PENDING_WITHDRAW` state.
Method	PATCH

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Example request

The following example shows how you can use an API to cancel a withdrawal request that is submitted for a consumer access:

Request query

```
https://{{CDMP_URL}}/api/v2/consumer-accesses/794a215f-5479-4b55-8e1b-a4866ec9fe82/cancel-withdrawal
```

Request body

```
{
  "comment": "Withdrawal cancelled - access still needed for ongoing project deliverables"
}
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the consumer access withdrawal request is successfully cancelled:

```
204 OK code
```

Delete consumer accesses

Use a REST API to delete a withdrawn consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v2/consumer-accesses/<consumerAccessId>** <consumerAccessId>: Required. Enter the system-generated identifier of the consumer access that you want to delete. For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111. To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Method	DELETE

To invoke this API, ensure that your user profile is assigned the Data Marketplace Administrator role.

Alternatively, ensure that your user profile is assigned a role for which the following privileges and permissions are enabled:

- **Delete** and **Read** permissions for consumer accesses are enabled in Metadata Command Center.
- **Access Data Marketplace** privilege is enabled in Administrator.

For more information about how you can call an API, see "Authenticate using JWT" on page 12.

Request

Note: The API has no payload.

Example request

The following example shows how you can use an API to delete a consumer access:

```
https://{{CDMP_URL}}/api/v2/consumer-accesses/67417f72-e5ab-44f0-add9-a1e412c1ce13
```

Response

When you invoke the API using a REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the consumer access is successfully deleted:

```
204 OK code
```

Part III: Authenticate using Application Integration

This part contains the following chapters:

- Define settings for data collections, 122
- Manage Data Marketplace content, 189
- Manage data collections, 212
- Manage requests, orders and consumer accesses, 258
- Custom attributes, 353
- Collaboration on objects, 359
- Data Marketplace customizations, 363
- Technical content, 368

CHAPTER 6

Define settings for data collections

This chapter includes the following topics:

- Categories, 122
- Delivery formats, 134
- Delivery methods, 141
- Delivery templates, 148
- Terms of use, 162
- Usage types, 172
- Cost centers, 181

Categories

A category is a grouping of related data collections. It is a predefined classification where stakeholders can publish the data collections for which they are responsible.

Create categories

Use a REST API to create categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/categories**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`name`	Required. Enter a name for the category.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.
`description`	Required. Enter a description for the category.	-
`dataOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the category with the Category Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Example request

The following example shows how you can use an API to create a category:

```
{
  "items": [
    {
      "name": "Retail Department",
      "description": "This category represents the retail department.",
      "dataOwners": [
        "e9paNlaKR8MdFJnETEs2k4"
      ]
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a category:

```
{
  "processingTime": 10105,
  "objects": [
    {
      "index": 1,
      "id": "2fa40528-410d-4cf6-8ee3-9f3ef328285c",
      "refId": "CAT-414",
      "name": "Retail Department"
    }
  ]
}
```

The following table describes the parameters of each category that is created:

Parameter	Description
index	The position of the category in the objects JSON array. This value does not impact how the category is used by a Data Marketplace user.
id	System generated unique identifier of the category.
refId	Reference identifier of the category.
name	Name of the category.

Retrieve categories

Use a REST API to retrieve the details of categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/categories**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`search`	Optional. Enter the search term that you want to use to find a category.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`ids`	Optional. Enter the system generated unique identifier of a category.	To get the system generated unique identifier of a category, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`. To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`

Parameter	Description	Additional Information
dataOwners	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the category with the Category Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
status	Optional. Specify the status of the category. The status determines whether the category is available in Data Marketplace.	Enter one of the following values: - To find categories that are available, enter `ACTIVE`. - To find categories that are unavailable, enter `INACTIVE`.
createdDateFrom	Optional. To find categories created between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.

Parameter	Description	Additional Information
createdDateTo	Optional. To find categories created between a date range, enter the ending date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
modifiedDateFrom	Optional. To find categories modified between a date range, enter the starting date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find categories modified between a date range, enter the ending date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.

Parameter	Description	Additional Information
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.
rootOnly	Optional. Specify whether to retrieve only the root category of a hierarchy.	Enter one of the following values: - If you want to retrieve only the root category of a hierarchy and don't want the search results to contain subcategories, enter true. - If you don't want to retrieve only the root category of a hierarchy and want the search results to contain subcategories, enter false. Default is false.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a category:

```
https://{{CDMP_URL}}/api/v1/integration/categories?status=ACTIVE
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a category:


```
{
  "processingTime": 369,
  "offset": 0,
  "limit": 50,
  "totalCount": 186,
  "objects": [
    {
      "id": "2fa40528-410d-4cf6-8ee3-9f3ef328285c",
      "refId": "CAT-414",
      "parentId": "g92b4h1e-3rc4-4444-318v-383135d296y6",
      "name": "Retail Department",
      "description": "This category represents the retail department.",
      "status": "ACTIVE",
      "effectiveStatus": "ACTIVE",
      "hasChildCategory": false,
      "dataOwners": [
        {
          "displayName": "cdmp_cat_owner_qa1607",
          "id": "e9paNlaKR8MdFJnETEs2k4",
          "name": "John Doe",
          "email": "johndoe@informatica.com",
          "phone": "8758939746",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        }
      ],
      "createdBy": "f400dUqjPuaiJ9KBrzOhiB",
      "createdOn": "2022-07-20T10:49:53.505Z",
```

```
        "modifiedBy": "f400dUqjPuaiJ9KBrzOhiB",
        "modifiedOn": "2022-07-20T10:49:53.505Z"
      }
    ]
  }
```

The following table describes the parameters of each category that is retrieved:

Parameter	Description
offset	Starting index for paginated results.
limit	Maximum number of results.
totalCount	Number of categories retrieved.
id	System generated unique identifier of the category.
refId	Reference identifier of the category.
parentId	System generated unique identifier of the parent category.
name	Name of the category.
description	Description of the category.
status	Status of the category. A category can have one of the following statuses: - ACTIVE - INACTIVE
effectiveStatus	The effective status indicates whether the category is available in Data Marketplace. A category can have one of the following statuses: - ACTIVE. The category is available. - INACTIVE. The category is unavailable.
hasChildCategory	Parameter that indicates whether a category has subcategories. This parameter can have one of the following values: - true. The category contains subcategories. - false. The category doesn't contain subcategories.
dataOwners	Details of the stakeholder that is assigned the Category Owner stakeholder role on the category.
dataOwners > displayName	Name of the stakeholder that is assigned the Category Owner stakeholder role on the category.
dataOwners > id	System generated unique identifier of the user account or user group that is assigned as a stakeholder on the category with the Category Owner stakeholder role.
dataOwners > name	Username of the stakeholder that is assigned the Category Owner stakeholder role on the category.
dataOwners > email	Email address of the stakeholder that is assigned the Category Owner stakeholder role on the category.
dataOwners > phone	Contact number of the stakeholder that is assigned the Category Owner stakeholder role on the category.

Parameter	Description
`dataOwners > status`	The status indicates whether or not the Category Owner stakeholder user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The Category Owner user account or user group is active. - `INACTIVE`. The Category Owner user account or user group is not active.
`dataOwners > userInfo`	Details retrieved from the **My Data** page of the stakeholder that is assigned the Category Owner stakeholder role on the category.
`dataOwners > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`createdBy`	System generated identifier of the user account that created the category.
`createdOn`	Date when the category was created.
`modifiedBy`	System generated identifier of the latest user account that modified the category.
`modifiedOn`	Latest date when the category was modified.

Modify categories

Use a REST API to modify categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/categories**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. The system generated unique identifier of the category that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`name`	Required. Enter a name for the category.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a category as "Retail Department" while a category called "Retail department" already exists, the API call fails.

Parameter	Description	Additional Information
`description`	Required. Enter a description for the category.	-
`dataOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the category with the Category Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Example request

The following example shows how you can use an API to modify a category:

```
{
  "items": [
    {
      "id": "2fa40528-410d-4cf6-8ee3-9f3ef328285c",
      "name": "Retail Department",
      "description": "This category represents the retail department.",
      "dataOwners": [
        "e9paNlaKR8MdFJnETEs2k4"
      ]
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a category:

```
{
  "processingTime": 10105,
  "objects": [
    {
      "index": 1,
      "id": "2fa40528-410d-4cf6-8ee3-9f3ef328285c",
      "refId": "CAT-414",
      "name": "Retail Department"
    }
  ]
}
```

The following table describes the parameters of each category that is modified:

Parameter	Description
index	The position of the category in the objects JSON array. This value does not impact how the category is used by a Data Marketplace user.
id	System generated unique identifier of the category.
refId	Reference identifier of the category.
name	Name of the category.

Delete categories

Use a REST API to delete categories in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/categories/<id>** <id>: Required. Enter the system generated unique identifier of the category that you want to delete. To get the system generated unique identifier of a category, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20, the system generated unique identifier is 67417f72-e5ab-44f0-add9-a1e412c1ce13. For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124.
Method	DELETE

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a category:

```
https://{{CDMP_URL}}/api/v1/integration/categories/67417f72-e5ab-44f0-add9-a1e412c1ce13
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the category is deleted successfully:

```
204 OK code
```

Delivery formats

A delivery format object represents the format in which the data is delivered.

Create delivery formats

Use a REST API to create delivery formats in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryFormats**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the delivery format.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery format.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery format as "Excel" while a delivery format called "excel" already exists, the API call fails.
`status`	Required. Specify a status for the delivery format. The status determines whether a delivery format is available to be added to delivery templates.	Enter one of the following values: - To make the delivery format available, enter `ACTIVE`. - To make the delivery format unavailable, enter `INACTIVE`.

Example request

The following example shows how you can use an API to create a delivery format:

```
{
  "items": [
    {
      "refId": "FMT9",
      "name": "XLSX_Workbook",
      "status": "ACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a delivery format:

```
{
  "processingTime": 17626,
  "objects": [
    {
      "index": 1,
```

```
        "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
        "refId": "FMT9",
        "name": "XLSX_Workbook"
      }
    ]
  }
```

The following table describes the parameters of each delivery format that is created:

Parameter	Description
index	The position of the delivery format in the objects JSON array. This value does not impact how the delivery format is used by a Data Marketplace user.
id	System generated unique identifier of the delivery format.
refId	Reference identifier of the delivery format.
name	Name of the delivery format.

Retrieve delivery formats

Use a REST API to retrieve the details of delivery formats in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryFormats**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
ids	Optional. Enter the system generated unique identifier of a delivery format.	To enter more than one value, use the following format: ids=<value1>&ids=<value2>
search	Optional. Enter the search term that you want to use to find a delivery format.	Ensure that the search term that you enter don't contain an asterisk (*).

Parameter	Description	Additional Information
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`createdDateFrom`	Optional. To find delivery format created between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find delivery format created between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.
`modifiedDateFrom`	Optional. To find delivery format modified between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateFrom` parameter, ensure that you also enter a value for the `modifiedDateTo` parameter.
`modifiedDateTo`	Optional. To find delivery format modified between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateTo` parameter, ensure that you also enter a value for the `modifiedDateFrom` parameter.
`status`	Optional. Specify the status of the delivery format. The status indicates whether a delivery format is available to be added to delivery templates.	Enter one of the following values: - To find the delivery formats that are available, enter `ACTIVE`. - To find the delivery formats that aren't available, enter `INACTIVE`.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - NAME - STATUS - ID - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of delivery format:

```
https://{{CDMP_URL}}/api/v1/integration/provisioning/deliveryFormats
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a delivery format:

```
{
  "processingTime": 0,
  "offset": 0,
  "limit": 0,
  "totalCount": 0,
  "objects": [
    {
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "refId": "FMT9",
      "name": "XLSX_Workbook",
      "status": "ACTIVE"
    }
  ]
}
```

The following table describes the parameters of each delivery format that is retrieved:

Parameter	Description
`Offset`	Starting index for paginated results.
`limit`	Maximum number of results.
`totalCount`	Number of delivery formats retrieved.
`id`	System generated unique identifier of the delivery format.
`refId`	Reference identifier of the delivery format.
`name`	Name of the delivery format.
`status`	The status indicates whether a delivery format is available to be added to delivery templates. A delivery format can have one of the following statuses: - `ACTIVE`. The delivery format is available. - `INACTIVE`. The delivery format is not available.

Modify delivery formats

Use a REST API to modify delivery formats in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryFormats**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the delivery format that you want to modify.	For more information about how you can use an API to get the unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.
`refId`	Optional. Enter a reference identifier for the delivery format.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery format.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery format as "Excel" while a delivery format called "excel" already exists, the API call fails.
`status`	Required. Specify a status for the delivery format. The status determines whether a delivery format is available to be added to delivery templates.	Enter one of the following values: - To make the delivery format available, enter `ACTIVE`. - To make the delivery format unavailable, enter `INACTIVE`.

Example request

The following example shows how you can use an API to modify a delivery format:

```
{
  "items": [
    {
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "refId": "FMT9",
      "name": "XLSX Workbook",
      "status": "ACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a delivery format:

```
{
  "processingTime": 16702,
  "objects": [
    {
      "index": 1,
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "refId": "FMT9",
      "name": "XLSX_Workbook"
    }
  ]
}
```

The following table describes the parameters of each delivery format that is modified:

Parameter	Description
`index`	The position of the delivery format in the `objects` JSON array. This value does not impact how the delivery format is used by a Data Marketplace user.
`id`	System generated unique identifier of the delivery format.
`refId`	Reference identifier of the delivery format.
`name`	Name of the delivery format.

Delivery methods

A delivery method represents the medium used to deliver the data to the Data User that ordered the collection.

Create delivery methods

Use a REST API to create delivery methods in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryMethods**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	
`refId`	Optional. Enter a reference identifier for the delivery method.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery method.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery method as "SFTP" while a delivery method called "sftp" already exists, the API call fails.
`status`	Required. Specify a status for the delivery method. The status indicates whether a delivery method is available to be added to delivery templates.	Enter one of the following values: - To make the delivery method available, enter `ACTIVE`. - To make the delivery method unavailable, enter `INACTIVE`.

Example request

The following example shows how you can use an API to create a delivery method:

```
{
  "items": [
    {
      "refId": "DMTD71",
      "name": "Hypercore Protocol",
      "status": "INACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a delivery method:

```
{
  "processingTime": 17626,
  "objects": [
    {
      "index": 1,
      "id": "770dfbc0-v5t6-4e24-ba47-4477bb9bf33e",
      "refId": "DMTD71",
```

```
        "name": "Hypercore Protocol"
      }
    ]
  }
```

The following table describes the parameters of each delivery method that is created:

Parameter	Description
index	The position of the delivery method in the objects JSON array. This value does not impact how the delivery method is used by a Data Marketplace user.
id	System generated unique identifier of the delivery method.
refId	Reference identifier of the delivery method.
name	Name of the delivery method.

Retrieve delivery methods

Use a REST API to retrieve the details of delivery methods in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryMethods**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
search	Optional. Enter the search term that you want to use to find a delivery method.	Ensure that the search term that you enter don't contain an asterisk (*).
ids	Optional. Enter the system generated unique identifier of the delivery method.	To enter more than one value, use the following format: ids=<value1>&ids=<value2>

Parameter	Description	Additional Information
`status`	Optional. Specify the status of the delivery method. The status indicates whether a delivery method is available to be added to delivery templates.	Enter one of the following values: - To find the delivery methods that are available, enter `ACTIVE`. - To find the delivery methods that aren't available, enter `INACTIVE`.
`createdDateFrom`	Optional. To find the delivery method created between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is converted automatically to the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find the delivery method created between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is converted automatically to the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you enter a value for the `createdDateFrom` parameter.
`modifiedDateFrom`	Optional. To find the delivery method modified between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is converted automatically to the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateFrom` parameter, ensure that you enter a value for the `modifiedDateTo` parameter.
`modifiedDateTo`	Optional. To find the delivery method modified between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is converted automatically to the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateTo` parameter, ensure that you enter a value for the `modifiedDateFrom` parameter.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of delivery method:

```
https://{{CDMP_URL}}/api/v1/integration/provisioning/deliveryMethods?
search=SK&ids=909668e3-f91d-4cde-a7d5-
e3dca316ce97&status=ACTIVE&createdDateFrom=2022-01-12&createdDateTo=2022-12-12&modifiedDa
teFrom=2022-01-12&modifiedDateTo=2022-12-12&sortByField=NAME&sort=DESC&offset=0&limit=2
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of delivery method:

```
{
  "processingTime": 2988,
  "offset": 0,
  "limit": 2,
  "totalCount": 1,
  "objects": [
    {
      "id": "770dfbc0-v5t6-4e24-ba47-4477bb9bf33e",
      "refId": "DMTD71",
      "name": "Hypercore Protocol"
      "status": "ACTIVE",
      "createdBy": "9Wqbp1IRIqfltN12yjs3qt",
      "createdOn": "2022-06-03T06:27:07.853Z",
      "modifiedBy": "9Wqbp1IRIqfltN12yjs3qt",
      "modifiedOn": "2022-06-03T06:30:34.676Z"
    }
```

```
    ]
}
```

The following table describes the parameters of each delivery method that is retrieved:

Parameter	Description
Offset	Starting index for paginated results.
limit	Maximum number of results.
totalCount	Number of delivery methods retrieved.
id	System generated unique identifier of the delivery method.
refId	Reference identifier of the delivery method.
name	Name of the delivery method.
status	The status indicates whether the delivery method is available to be added to delivery templates. A delivery method can have one of the following statuses: - ACTIVE. The delivery method is available. - INACTIVE. The delivery method is not available.
CREATED_BY	System generated unique identifier of the user account that created the delivery method.
CREATED_ON	Date when the delivery method was created.
MODIFIED_BY	System generated unique identifier of the user account that last modified the delivery method.
MODIFIED_ON	Latest date when the delivery method was modified.

Modify delivery methods

Use a REST API to modify delivery methods in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliverymethods**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the delivery method that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
`refId`	Optional. Enter a reference identifier for the delivery method.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery method.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery method as "SFTP" while a delivery method called "sftp" already exists, the API call fails.
`status`	Required. Specify a status for the delivery method. The status indicates whether a delivery method is available to be added to delivery templates.	Enter one of the following values: - To make the delivery method available, enter `ACTIVE`. - To make the delivery method unavailable, enter `INACTIVE`.

Example request

The following example shows how you can use an API to modify a delivery method:

```
{
  "items": [
    {
      "id": "770dfbc0-v5t6-4e24-ba47-4477bb9bf33e",
      "refId": "DMTD71",
      "name": "Hypercore Protocol",
      "status": "INACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a delivery method:

```
{
  "processingTime": 16702,
  "objects": [
    {
      "index": 1,
      "id": "770dfbc0-v5t6-4e24-ba47-4477bb9bf33e",
      "refId": "DMTD71",
      "name": "Hypercore Protocol"
    }
  ]
}
```

The following table describes the parameters of each delivery method that is modified:

Parameter	Description
`index`	The position of the delivery method in the `objects` JSON array. This value does not impact how the delivery method is used by a Data Marketplace user.
`id`	System generated unique identifier of the delivery method.
`refId`	Reference identifier of the delivery method.
`name`	Name of the delivery method.

Delivery templates

A delivery template contains the delivery format, the delivery method, and the location where the data is delivered to the Data User.

Create delivery templates

Use a REST API to create delivery templates in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTemplates**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the delivery template.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery template.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery template as "Excel over ipfs" while a delivery template called "Excel over IPFS" already exists, the API call fails.
`description`	Required. Enter a description for the delivery template.	-
`color`	Optional. Specify a color indicator for the delivery template. Assigning a unique color indicator allows Data Marketplace users to identify a delivery template easily.	Enter the hexadecimal value that represents the color that you want to use.
`status`	Required. Specify a status for the delivery template. The status determines whether the delivery template is available to be used to create a delivery target of a data collection.	Enter one of the following values: - To make the delivery template available, enter `ACTIVE`. - To make the delivery template unavailable, enter `INACTIVE`.

Parameter	Description	Additional Information
managedAccess	Optional. This parameter determines whether the data is customized and is made available in a data location that is unique to each order fulfilled using a target that uses this template.	Enter one of the following values: - If you set the parameter value to ENABLED, a unique data location is created for each order that is fulfilled using a target that is based on this template. Furthermore, an access management application such as Data Access Management might customize the data that it delivers based on the characteristics of the data, the Data User and the usage context that they specified in the order. - If you set the parameter value to DISABLED, the same data is made available in a data location that is common to all Data Users. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryType	Optional. Specify the type of delivery.	Enter one of the following values: - If the delivery type is set to AUTOMATIC, the order approval and fulfillment is automated. - If the delivery type is set to MANUAL, a stakeholder of the data collection must approve and fulfill the order manually.
templateOwners	Optional. Enter the system generated unique identifier of the user account to which you want to assign the Delivery Owner role. The Delivery Owner is responsible for the delivery template that you create.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
targetSystemReference	Required. Specify the default system where the data is delivered.	-

Parameter	Description	Additional Information
defaultPhysicalLocation	Required. Specify the default location where the data is delivered.	If you set the managedAccess parameter value to ENABLED, ensure that you use the following structure to specify the data location: hostname:port In the preceding location structure, you can configure the following properties: - hostname. Enter the hostname of the data plane in Data Access Management. - port. Enter the port number of the data plane in Data Access Management.
deliveryMethodIds	Required. Enter the system generated unique identifier of the delivery method.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
deliveryFormatIds	Required. Enter the system generated unique identifier of the delivery format.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.

Example request

The following example shows how you can use an API to create a delivery template:

```
{
  "items":[
    {
      "refId": "Template719",
      "name":"XLSX via Hypercore",
      "description":"Template to deliver an XLSX file via Hypercore.",
      "color": "#10Be21",
      "status":"ACTIVE",
      "managedAccess": "DISABLED",
      "deliveryType": "AUTOMATIC",
      "templateOwners":[
        "26sEOH2bGStfMSZtlK2UC0"
      ],
      "targetSystemReference":"hyper://{public_key}{version}",
      "defaultPhysicalLocation":"Hypercore",
      "deliveryMethodIds":[
        "fd24d20f-b97d-435f-b703-dc03c3e0280a"
      ],
      "deliveryFormatIds":[
        "b86a8588-3ec2-4eab-9504-8ff98a41187f"
      ]
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a delivery template:

```
{
  "processingTime": 16702,
  "objects": [
    {
      "index": 1,
      "id": "72ab9726-359d-4c07-987e-febdcfb86906",
      "refId": "Template719",
      "name": "XLSX via Hypercore"
    }
  ]
}
```

The following table describes the parameters of each delivery template that is created:

Parameter	Description
index	The position of the delivery template in the objects JSON array. This value does not impact how the delivery template is used by a Data Marketplace user.
id	System generated unique identifier of the delivery template.
refId	Reference identifier of the delivery template.
name	Name of the delivery template.

Retrieve delivery templates

Use a REST API to retrieve the details of delivery templates in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTemplates**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`search`	Optional. Enter the search term that you want to use to find a delivery template.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`ids`	Optional. Enter the system generated unique identifier of a delivery template.	To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`status`	Optional. Specify the status of the delivery template. The status indicates whether the delivery template is available to be used to create a delivery target of a data collection.	Enter one of the following values: - To find the delivery templates that are available, enter `ACTIVE`. - To find the delivery templates that aren't available, enter `INACTIVE`.
`deliveryType`	Optional. Specify the type of delivery.	Enter one of the following values: - To find a delivery template of automatic type, enter `AUTOMATIC`. For orders where the delivery option is of automatic type, the approval and fulfillment is automated. - To find a delivery template of manual type, enter `MANUAL`. For orders where the delivery option is of manual type, a stakeholder of the data collection must approve and fulfill the order manually.
`isDefault`	Optional. Specify whether to retrieve the default delivery template for Data Marketplace.	Enter one of the following values: - To find a delivery template that is configured as the default delivery option for Data Marketplace, enter `true`. - To find a delivery template that isn't configured as the default delivery option for Data Marketplace, enter `false`.
`deliveryMethodIds`	Optional. Enter the system generated unique identifier of the delivery method that is part of the delivery template.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
`deliveryFormatIds`	Optional. Enter the system generated unique identifier of the delivery format that is part of the delivery template.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.

Parameter	Description	Additional Information
templateOwnerUserIds	Optional. Enter the system generated unique identifier of the Delivery Owner that manages the delivery template.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
createdDateFrom	Optional. To find delivery templates created between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
createdDateTo	Optional. To find delivery templates created between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.
modifiedDateFrom	Optional. To find delivery templates modified between a date range, enter the starting date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateFrom` parameter, ensure that you also enter a value for the `modifiedDateTo` parameter.
modifiedDateTo	Optional. To find delivery templates modified between a date range, enter the ending date.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateTo` parameter, ensure that you also enter a value for the `modifiedDateFrom` parameter.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - TARGET_SYSTEM_REFERENCE - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of delivery template:

```
https://{{CDMP_URL}}/api/v1/integration/provisioning/deliveryTemplates?status=ACTIVE
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of delivery template:


```
{

     "processingTime":959,
     "offset":0,
     "limit":50,
     "totalCount":153,
     "objects"[
        {
           "id":"72ab9726-359d-4c07-987e-febdcfb86906",
           "refId": "Template719",
           "name":"XLSX via Hypercore",
           "description":"Template to deliver an XLSX file via Hypercore.",
           "color": "#10Be21",
           "isDefault":false,
           "status":"ACTIVE",
           "managedAccess": "DISABLED",
           "deliveryType": "MANUAL",
           "templateOwners":[],
           "targetSystemReference":"S3",
```

```
                "defaultPhysicalLocation":"file",
                "deliveryMethods":[
                  {
                     "id":"3c308736-5d9d-4a35-92a6-86dc213f4c5a",
                     "refId": "DMTD72",
                     "name":"Hypercore Protocol",
                     "status":"ACTIVE",
                     "createdBy":"f400dUqjPuaiJ9KBrzOhiB",
                     "createdOn":"2022-07-21T18:20:27.529Z",
                     "modifiedBy":"f400dUqjPuaiJ9KBrzOhiB",
                     "modifiedOn":"2022-07-21T18:20:27.529Z"
                  }
                   ],
               "deliveryFormats":[
                  {
                    "id":"8738df74-1413-4123-b370-b637249b5bfc",
                    "refId": "FMT8",
                    "name":"XLSX Workbook",
                    "status":"ACTIVE",
                    "createdBy":"f400dUqjPuaiJ9KBrzOhiB",
                    "createdOn":"2022-07-21T18:20:24.395Z",
                    "modifiedBy":"f400dUqjPuaiJ9KBrzOhiB",
                    "modifiedOn":"2022-07-21T18:20:24.395Z"
                  }
                  ],
                   "createdBy":"f400dUqjPuaiJ9KBrzOhiB",
                   "createdOn":"2022-07-21T18:20:30.491Z",
                   "modifiedBy":"f400dUqjPuaiJ9KBrzOhiB",
                   "modifiedOn":"2022-07-21T18:20:30.491Z"
    }
```


The following table describes the parameters of each delivery template that is retrieved:

Parameter	Description
offset	Starting index for paginated results.
limit	Maximum number of results.
totalCount	Number of delivery templates retrieved.
id	System generated unique identifier of the delivery template.
refId	Reference identifier of the delivery template.
name	Name of the delivery template.
description	Description of the delivery template.
color	A hexadecimal value that represents the color indicator of the delivery template.
isDefault	Parameter that indicates whether or not the delivery template is set as the default delivery option for your Data Marketplace instance. The parameter can have one of the following values: - true. The delivery template is the default delivery option. - false. The delivery target isn't the default delivery option.
status	The status indicates whether the delivery template is available to be used to create a delivery target of a data collection. A delivery template can have one of the following statuses: - ACTIVE. The delivery template is available. - INACTIVE. The delivery template is unavailable.

Parameter	Description
managedAccess	Parameter that indicates whether a unique data location is created for each order that is fulfilled using a target that is based on this template. This parameter can have one of the following values: - ENABLED. A unique data location is created for each order that is fulfilled using a target that is based on this template. Furthermore, an access management application such as Data Access Management might customize the delivered data based on the characteristics of the data, the Data User and the usage context that they specified in the order. - DISABLED. The same data is made available in a data location that is common to all Data Users. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
deliveryType	The type of delivery. A delivery template can have one of the following types: - AUTOMATIC. The order approval and fulfillment is automated. - MANUAL, a stakeholder of the data collection must approve and fulfill the order manually.
templateowners	Details of the Delivery Owner that is responsible for the delivery template.
targetSystemReference	Default system where the data is delivered.
defaultPhysicalLocation	Default location where the data is delivered.
deliveryMethods > id	System generated unique identifier of the delivery method of the delivery template.
deliveryMethods > refId	Reference identifier of the delivery method.
deliveryMethods > name	Name of the delivery method.
deliveryMethods > status	The status indicates whether the delivery method is available to be added to delivery templates. A delivery method can have one of the following statuses: - ACTIVE. The delivery method is available. - INACTIVE. The delivery method is not available.
deliveryMethods > createdBy	System generated unique identifier of the user account that created the delivery method.
deliveryMethods > createdOn	Date when the delivery method was created.
deliveryMethods > modifiedBy	System generated unique identifier of the latest user account that modified the delivery method.
deliveryMethods > modifiedOn	Latest date when the delivery method was modified.
deliveryFormats > id	System generated unique identifier of the delivery format of the delivery template.
deliveryFormats > refId	Reference identifier of the delivery format.
deliveryFormats > name	Name of the delivery format.

Parameter	Description
`deliveryFormats > status`	The status indicates whether the delivery format is available to be added to delivery templates. A delivery format can have one of the following statuses: - `ACTIVE`. The delivery format is available. - `INACTIVE`. The delivery format is not available.
`deliveryFormats > createdBy`	System generated unique identifier of the user account that created the delivery format.
`deliveryFormats > createdOn`	Date when the delivery format was created.
`deliveryFormats > modifiedBy`	System generated unique identifier of the latest user account that modified the delivery format.
`deliveryFormats > modifiedOn`	Latest date when the delivery format was modified.
`createdBy`	System generated unique identifier of the user account that created the delivery template.
`createdOn`	Date when the delivery template was created.
`modifiedBy`	System generated unique identifier of the latest user account that modified the delivery template.
`modifiedOn`	Latest date when the delivery template was modified.

Modify delivery templates

Use a REST API to modify delivery templates in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTemplates**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the delivery template that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.
`refId`	Optional. Enter a reference identifier for the delivery template.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery template.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery template as "Excel over ipfs" while a delivery template called "Excel over IPFS" already exists, the API call fails.
`description`	Required. Enter a description for the delivery template.	-
`color`	Optional. Specify a color indicator for the delivery template. Assigning a unique color indicator allows Data Marketplace users to identify a delivery template easily.	Enter the hexadecimal value that represents the color that you want to use.
`status`	Required. Specify a status for the delivery template. The status determines whether the delivery template is available to be used to create a delivery target of a data collection.	Enter one of the following values: - To make the delivery template available, enter `ACTIVE`. - To make the delivery template unavailable, enter `INACTIVE`.

Parameter	Description	Additional Information
managedAccess	Optional. This parameter determines whether the data is customized and is made available in a data location that is unique to each order fulfilled using a target that uses this template.	Enter one of the following values: - If you set the parameter value to ENABLED, a unique data location is created for each order that is fulfilled using a target that is based on this template. Furthermore, an access management application such as Data Access Management might customize the delivered data based on the characteristics of the data, the Data User and the usage context that they specified in the order. - If you set the parameter value to DISABLED, the same data is made available in a data location that is common to all Data Users. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryType	Optional. Specify the type of delivery.	Enter one of the following values: - If the delivery type is set to AUTOMATIC, the order approval and fulfillment is automated. - If the delivery type is set to MANUAL, a stakeholder of the data collection must approve and fulfill the order manually.
templateOwners	Optional. Enter the system generated unique identifier of the user account to which you want to assign the Delivery Owner role. The Delivery Owner is responsible for the delivery template that you create.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL /cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT, the system generated unique identifier is 0LH3xBJC9A6haZ26htGZyT.
targetSystemReference	Required. Specify the default system where the data is delivered.	-

Parameter	Description	Additional Information
defaultPhysicalLocation	Required. Specify the default location where the data is delivered.	If you set the managedAccess parameter value to ENABLED, ensure that you use the following structure to specify the data location: hostname:port In the location structure, you can configure the following properties: - hostname. Enter the hostname for the Data Access Management proxy. - port. Enter the port number of the Data Access Management proxy. For more information about how you can retrieve the hostname and port values, see the *Data Access Management Proxy service* topic in the *Secure Agent Services help* in the Administrator.
deliveryMethodIds	Required. Enter the system generated unique identifier of the delivery method.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
deliveryFormatIds	Required. Enter the system generated unique identifier of the delivery format.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.

Example request

The following example shows how you can use an API to modify a delivery template:

```
{
  "items":[
    {
        "id": "72ab9726-359d-4c07-987e-febdcfb86906",
      "refId": "Template719",
      "name":"XLSX via Hypercore",
      "description":"Template to deliver an XLSX file via Hypercore.",
      "color": "#10Be21",
      "status":"INACTIVE",
      "managedAccess": "DISABLED",
      "deliveryType": "MANUAL",
      "templateOwners":[
        "26sEOH2bGStfMSZtlK2UC0"
      ],
      "targetSystemReference":"hyper://{public_key}{version}",
      "defaultPhysicalLocation":"Hypercore",
      "deliveryMethodIds":[
        "fd24d20f-b97d-435f-b703-dc03c3e0280a"
      ],
      "deliveryFormatIds":[
        "b86a8588-3ec2-4eab-9504-8ff98a41187f"
      ]
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a delivery template:

```
{
  "processingTime": 16702,
  "objects": [
    {
      "index": 1,
      "id": "72ab9726-359d-4c07-987e-febdcfb86906",
      "refId": "Template719",
      "name": "XLSX via Hypercore"
    }
  ]
}
```

The following table describes the parameters of each delivery template that is modified:

Parameter	Description
index	The position of the delivery template in the objects JSON array. This value does not impact how the delivery template is used by a Data Marketplace user.
id	System generated unique identifier of the delivery template.
refId	Reference identifier of the delivery template.
name	Name of the delivery template.

Terms of use

The terms of use provide usage requirements and guidelines that a Data User must accept to use the data.

Create terms of use

Use REST APIs to create terms of use in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/termsOfUse**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the terms of use.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the terms of use.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name the terms of use as "Internal Use Only" while a terms of use called "Internal use only" already exists, the API call fails.
`description`	Required. Enter a description for the terms of use.	-
`type`	Required. Specify a type for the terms of use.	Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.
`status`	Required. Specify a status for the terms of use. The status determines whether the terms of use are available to be added to data collections.	Enter one of the following values: - To make the terms of use available, enter `ENABLED`. - To make the terms of use unavailable, enter `DISABLED`.
`acknowledgement`	Required. Configure whether you want the Data User to acknowledge the terms of use when they place an order.	Enter one of the following values: - If you want the Data User to acknowledge the terms of use when they place an order, enter `true`. - If you don't want the Data User to acknowledge the terms of use when they place an order, enter `false`.
`referenceLink`	Optional. Enter the uniform resource identifier of the resource or location where the data is stored or maintained.	-

Example request

The following example shows how you can use an API to create terms of use:

```
{
  "items": [
    {
      "refId": "Term23",
      "name": "Company use only",
      "description": "This data should not be accessed by non-company personnel.",
      "status": "ENABLED",
      "type": "NEUTRAL",
      "acknowledgement": true,
      "referenceLink": "sample link"
    },
    {
      "refId": "Term22",
      "name": "Client confidential",
      "description": "Use this for data to be shared with authorized third parties.",
      "status": "DISABLED",
      "type": "NEUTRAL",
      "acknowledgement": false,
      "referenceLink": "sample link"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a terms of use:

```
{
  "processingTime": 13051,
  "objects": [
    {
      "index": 1,
      "id": "5f674ca5-f2d1-4465-9576-dae6ff4cf7c0",
      "refId": "Term23",
      "name": "Company use only"
    },
    {
      "index": 2,
      "id": "3893741f-e9cf-4a7e-85de-0d200fe7ddf4",
      "refId": "Term22",
      "name": "Client confidential"
    }
  ]
}
```

The following table describes the parameters of each terms of use that is created:

Parameter	Description
index	The position of the terms of use in the objects JSON array. This value does not impact how the terms of use is used by a Data Marketplace user.
id	System generated unique identifier of the terms of use.
refId	Reference identifier of the terms of use.
name	Name of the terms of use.

Retrieve terms of use

Use REST APIs to retrieve the details of terms of use in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/termsOfUse**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`ids`	Optional. Enter the system generated unique identifier of a terms of use.	To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`search`	Optional. Enter the search term that you want to use to find a terms of use.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`createdDateFrom`	Optional. To find terms of use that were created between a date range, enter the initial date when the terms of use were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find terms of use that were created between a date range, enter the latest date when the terms of use were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.

Parameter	Description	Additional Information
modifiedDateFrom	Optional. To find terms of use that were modified between a date range, enter the initial date when the terms of use were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find terms of use that were modified between a date range, enter the latest date when the terms of use were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
status	Optional. Specify the status of the terms of use. The status indicates whether the terms of use are available to be added to data collections.	Enter one of the following values: - To find the terms of use are available to be added to data collections, enter ENABLED. - To find the terms of use aren't available to be added to data collections, enter DISABLED.
type	Optional. Specify the type of the terms of use.	Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - NAME - STATUS - TYPE - ID - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.

Parameter	Description	Additional Information
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve terms of use:

```
https://{{CDMP_URL}}/api/v1/integration/termsOfUse?
search=SK&fields=NAME&fields=DESCRIPTION&ids=7bb0bcc1-23a9-4ffc-9f39-50c7b4df91b0&status=
ENABLED&type=PERMISSIVE&createdDateFrom=2022-01-01&createdDateTo=2022-12-01&modifiedDateF
rom=2022-01-01&modifiedDateTo=2022-12-01&sortByField=MODIFIED_ON&sort=DESC&offset=0&limit
=100
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve terms of use:

```
{
  "processingTime": 4779,
  "offset": 0,
  "limit": 100,
  "totalCount": 2,
  "objects": [
    {
      "id": "5f674ca5-f2d1-4465-9576-dae6ff4cf7c0",
      "refId": "Term23",
      "name": "Company use only"
      "description": "This data should not be accessed by non-company personnel.",
      "type": "PERMISSIVE",
      "status": "ENABLED",
      "acknowledgement": true,
      "referenceLink": null,
      "createdBy": "5tSQ0vG66z9jS0KBQkY84r",
      "createdOn": "2022-05-17T10:05:21.453Z",
      "modifiedBy": "5tSQ0vG66z9jS0KBQkY84r",
      "modifiedOn": "2022-05-17T10:06:57.433Z"
    }
  ]
}
```

The following table describes the parameters of each terms of use that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of terms of use retrieved.

Parameter	Description
id	System generated unique identifier of the terms of use.
refId	Reference identifier of the terms of use.
name	Name of the terms of use.
description	Description of the terms of use.
type	Type of the terms of use. Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.
status	The status indicates whether the terms of use are available to be added to data collections. A terms of use can have one of the following statuses: - ENABLED. The terms of use are available to be added to data collections. - DISABLED. The terms of use isn't available to be added to data collections.
acknowledgement	Parameter that indicates whether the Data User is required to acknowledge the terms of use when they place an order. The parameter can be one of the following values: - true. The Data User must acknowledge the terms of use when they place an order. - false. The Data User doesn't need to acknowledge the terms of use when they place an order.
referenceLink	Uniform resource identifier of the terms of use.

Modify terms of use

Use REST APIs to modify terms of use in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/termsOfUse**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the terms of use that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a terms of use, see "Retrieve terms of use" on page 165.
`refId`	Optional. Enter a reference identifier for the terms of use.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the terms of use.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name the terms of use as "Internal Use Only" while a terms of use called "Internal use only" already exists, the API call fails.
`description`	Required. Enter a description for the terms of use.	-
`status`	Required. Specify a status for the terms of use. The status determines whether the terms of use are available to be added to data collections.	Enter one of the following values: - To make the terms of use available, enter `ENABLED`. - To make the terms of use unavailable, enter `DISABLED`.
`type`	Required. Specify a type for the terms of use.	Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.

Parameter	Description	Additional Information
acknowledgement	Required. Configure whether you want the Data User to acknowledge the terms of use when they place an order.	Enter one of the following values: - If you want the Data User to acknowledge the terms of use when they place an order, enter `true`. - If you don't want the Data User to acknowledge the terms of use when they place an order, enter `false`.
referenceLink	Optional. Enter the uniform resource identifier of the resource or location where the data is stored or maintained.	-

Example request

The following example shows how you can use an API to modify a terms of use:

```
{
  "items": [
    {
      "id": "5f674ca5-f2d1-4465-9576-dae6ff4cf7c0",
      "refId": "Term23",
      "name": "Company use only",
      "description": "This data should not be accessed by non-company personnel.",
      "status": "ENABLED",
      "type": "NEUTRAL",
      "acknowledgement": true,
      "referenceLink": "sample link"
    },
    {
      "id": "3893741f-e9cf-4a7e-85de-0d200fe7ddf4",
      "refId": "Term22",
      "name": "Client confidential",
      "description": "Use this for data to be shared with authorized third parties.",
      "status": "DISABLED",
      "type": "NEUTRAL",
      "acknowledgement": false,
      "referenceLink": "sample link"
    }
 ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a terms of use:

```
{
  "processingTime": 12351,
  "objects": [
    {
      "index": 1,
      "id": "5f674ca5-f2d1-4465-9576-dae6ff4cf7c0",
      "refId": "Term23",
      "name": "Company use only"
    },
    {
      "index": 2,
      "id": "3893741f-e9cf-4a7e-85de-0d200fe7ddf4",
      "refId": "Term22",
```

```
        "name": "Client confidential"
      }
    ]
  }
```

The following table describes the parameters of each terms of use that is modified:

Parameter	Description
index	The position of the terms of use in the objects JSON array. This value does not impact how the terms of use is used by a Data Marketplace user.
id	System generated unique identifier of the terms of use.
refId	Reference identifier of the terms of use.
name	Name of the terms of use.

Update the status of a terms of use

Use REST APIs to enable or disable terms of use in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/termsOfUse/status**
Method	PATCH

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
id	Required. Enter the system generated unique identifier of the terms of use.	For more information about how you can use an API to get the unique identifier of a terms of use, see "Retrieve terms of use" on page 165.
status	Required. Specify a status for the terms of use. The status determines whether the terms of use are available to be added to data collections.	Enter one of the following values: - To make the terms of use available, enter ENABLED . - To make the terms of use unavailable, enter DISABLED .

Example request

The following example shows how you can use an API to update the status of a terms of use:

```
{
  "items": [
    {
      "id": "7bb0bcc1-23a9-4ffc-9f39-50c7b4df91b0",
      "status": "ENABLED"
    },
    {
      "id": "f8504f82-3b26-41b8-ad1c-eea5d1a2a343",
      "status": "ENABLED"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the status of the terms of use is updated successfully:

```
204 OK
```

Usage types

A usage type defines the contexts within which an individual can use data. Stakeholders can utilize usage types to specify the intended use of their data collections. Data Users can utilize usage types to cite their intention when they order a collection.

Create usage type

Use REST APIs to create usage types in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/usageContext**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the usage type.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the usage type.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a usage type as "Sales Analytics" while a usage type called "Sales analytics" already exists, the API call fails.
`description`	Required. Enter a description for the usage type.	-
`color`	Required. Specify a color indicator for the usage type. Assigning a unique color indicator allows Data Marketplace users to identify a usage type easily.	Enter the hexadecimal value that represents the color that you want to use.
`status`	Required. Specify a status for the usage type. The status determines whether a usage type is available to be added to a data collection or to be selectable on an order.	Enter one of the following values: - To make the usage type available, enter `ACTIVE`. - To make the usage type unavailable, enter `INACTIVE`.

Example request

The following example shows how you can use an API to create an usage type:

```
{
  "items": [
    {
      "refId": "UType314",
      "name": "Retail-Use",
      "description": "This is for standard retail operations.",
      "color": "#aAbe2A",
      "status": "INACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create an usage type:

```
{
          "result":
              {
               "processingTime":2023,
               "objects":
                   [
                     {
                      "index": 1,
                      "id":"964dfd5f-0add-4749-9ed8-79016a8e9f69",
                      "refId":"UType314",
                      "name":"Retail-Use"
                     }
                   ]
               }
           }
```

The following table describes the parameters of each usage type that is created:

Parameter	Description
index	The position of the usage type in the objects JSON array. This value does not impact how the usage type is used by a Data Marketplace user.
id	System generated unique identifier of the usage type.
refId	Reference identifier of the usage type.
name	Name of the usage type.

Retrieve usage type

Use REST APIs to retrieve the details of usage types in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/usageContext**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`ids`	Optional. Enter the system generated unique identifier of a usage type.	To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`search`	Optional. Enter the search term that you want to use to find a usage type.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`createdDateFrom`	Optional. To find usage types that were created between a date range, enter the initial date when the usage types were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find usage types that were created between a date range, enter the latest date when the usage types were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.
`modifiedDateFrom`	Optional. To find usage types that were modified between a date range, enter the initial date when the usage types were modified.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateFrom` parameter, ensure that you also enter a value for the `modifiedDateTo` parameter.
`modifiedDateTo`	Optional. To find usage types that were modified between a date range, enter the latest date when the usage types were modified.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateTo` parameter, ensure that you also enter a value for the `modifiedDateFrom` parameter.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - NAME - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
status	Optional. Specify the status of the usage type. The status indicates whether a usage type is available to be added to a data collection or to be selectable on an order.	Enter one of the following values: - To find the usage types that are available, enter ACTIVE. - To find the usage types that aren't available, enter INACTIVE.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve an usage type:

```
https://{{CDMP_URL}}/api/v1/integration/usageContext?
ids=c20c8fb4-1cb4-477f-8ff9-52908a3c01d3&search=abcd&fields=NAME&createdDateFrom=2022%2F0
1%2F01&createdDateTo=2022%2F07%2F22&modifiedDateTo=2022%2F02%2F01&modifiedDateFrom=2022%2
F07%2F22&status=ACTIVE&sortByField=NAME&sort=ASC&offset=0&limit=20
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve an usage type:

```
{
         "result":
            {
              "offset":0,
              "limit":50,
              "totalCount":1,
              "objects":
                  [
                    {
```

```
                    "id":"964dfd5f-0add-4749-9ed8-79016a8e9f69",
                    "refId":"UType314",
                    "name": "Retail-Use",
                    "description": "This is for standard retail operations.",
                    "color": "#aAbe2A",
                    "status":"INACTIVE",
                    "createdBy":"f400dUqjPuaiJ9KBrzOhiB",
                    "createdOn":"2022-07-26T11:19:17.550Z",
                    "modifiedBy":"f400dUqjPuaiJ9KBrzOhiB",
                    "modifiedOn":"2022-07-26T11:19:17.550Z"
                  }
                ]
            }
        }
```


The following table describes the parameters of each usage type that is retrieved:

Parameter	Description
`offset`	Starting index for the paginated results.
`limit`	Maximum number of results.
`totalCount`	Number of usage types retrieved.
`id`	System generated unique identifier of the usage type.
`refId`	Reference identifier of the usage type.
`name`	Name of the usage type.
`description`	Description of the usage type.
`color`	A hexadecimal value that represents the color indicator of the usage type.
`status`	The status indicates whether a usage type is available to be added to a data collection or to be selectable on an order. A usage type can have one of the following values: - `ACTIVE`. The usage type is available. - `INACTIVE`. The usage type is available.
`createdBy`	System generated unique identifier of the user account that created the usage type.
`createdOn`	Date when the usage type was created.
`modifiedBy`	System generated unique identifier of the latest user account that modified the usage type.
`modifiedOn`	Latest date when the usage type was modified.

Modify usage type

Use REST APIs to modify usage types in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/usageContext**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the usage type that you want to modify.	For more information about how you can use an API to get the unique identifier of a usage type, see "Retrieve usage type" on page 174.
`refId`	Optional. Enter a reference identifier for the usage type.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the usage type.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a usage type as "Sales Analytics" while a usage type called "Sales analytics" already exists, the API call fails.
`description`	Required. Enter a description for the usage type.	-

Parameter	Description	Additional Information
`color`	Required. Specify a color indicator for the usage type. Assigning a unique color indicator allows Data Marketplace users to identify a usage type easily.	Enter the hexadecimal value that represents the color that you want to use.
`status`	Required. Specify a status for the usage type. The status determines whether a usage type is available to be added to a data collection or to be selectable on an order.	Enter one of the following values: - To make the usage type available, enter `ACTIVE` . - To make the usage type unavailable, enter `INACTIVE` .

Example request

The following example shows how you can use an API to modify an usage type:

```
{
  "items": [
    {
      "id": "964dfd5f-0add-4749-9ed8-79016a8e9f69",
      "refId": "UType314",
      "name": "Retail-Use",
      "description": "This is for standard retail operations.",
      "status": "ACTIVE"
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify an usage type:

```
{
 "result":
    {
     "processingTime":1286,
     "objects":
         [
           {
            "index": 1,
            "id":"964dfd5f-0add-4749-9ed8-79016a8e9f69",
            "refId":"UType314",
            "name":"Retail-Use"
           }
         ]
     }
 }
```

The following table describes the parameters of each usage type that is modified:

Parameter	Description
index	The position of the usage type in the objects JSON array. This value does not impact how the usage type is used by a Data Marketplace user.
id	System generated unique identifier of the usage type.
refId	Reference identifier of the usage type.
name	Name of the usage type.

Update the status of an usage type

Use REST APIs to enable or disable usage types in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/usageContext/status**
Method	PATCH

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
id	Required. Enter the system generated unique identifier of the usage type.	For more information about how you can use an API to get the system generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
status	Required. Specify a status for the usage type. The status determines whether a usage type is available to be added to a data collection or to be selectable on an order.	Enter one of the following values: - To make the usage type available, enter ACTIVE . - To make the usage type unavailable, enter INACTIVE .

Example request

The following example shows how you can use an API to update the status of an usage type:

```
{
  "items": [
```

```
        {
        "id": "bd1bcf0a-c05c-4a12-b5df-67215475cf25",
        "status": "INACTIVE"
      }
    ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the status of the usage type is updated successfully:

```
204 OK
```

Cost centers

A cost center is an area or department within an organization that is generally represented by a unique identifier to which business expenses are allocated. If there is a cost required to deliver the data to a Data User or if the there is a cost required to create the data collection that was requested by a Data User, the cost can be charged to the cost center of the Data User.

Create cost centers

Use a REST API to create cost centers in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/costCenters**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`name`	Required. Enter a name for the cost center.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a cost center as "MKT010" while a cost center called "mkt0101" already exists, the API call fails.
`description`	Optional. Enter a description for the cost center.	-

Note: You can create only 30 cost centers per API call.

Example request

The following example shows how you can use an API to create a cost center:

```
{
  "items": [
    {
      "name": "RTL-367APJ",
      "description": "The cost center for the APJ retail department."
    },
    {
      "name": "RTL-367EMEA",
      "description": "The cost center for the EMEA retail department."
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a cost center:

```
{
  "processingTime": 23297,
  "objects": [
    {
      "index": 1,
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "refId": "320dnbc0-e4r0-4r15-by42-3457bg7hf11x",
      "name": "RTL-367APJ"
    },
    {
      "index": 2,
      "id": "8039d329-46fa-4048-b8e0-9e52a6d73583",
      "refId": "783rebc4-c7v5-6e23-xz17-4937bb3nm13t",
      "name": "RTL-367EMEA"
    }
  ]
}
```

The following table describes the parameters of each cost center that is created:

Parameter	Description
index	The position of the cost center in the objects JSON array. This value does not impact how the cost center is used by a Data Marketplace user.
id	System generated unique identifier of the cost center.
refId	Reference identifier of the cost center.
name	Name of the cost center.

Retrieve cost centers

Use a REST API to retrieve the details of cost centers in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/costCenters**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
ids	Optional. Enter the system generated unique identifier of a cost center.	To enter more than one value, use the following format: ids=<value1>&ids=<value2>
search	Optional. Enter the search term that you want to use to find a cost center.	Ensure that the search term that you enter don't contain an asterisk (*).
fields	Optional. Enter the fields on which the search term applies. The terms that you entered in the search field parameter are used to search the fields that you specify here.	Enter the following values: - NAME - DESCRIPTION

Parameter	Description	Additional Information
createdDateFrom	Optional. To find cost centers that were created between a date range, enter the initial date when the cost center were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateFrom parameter, ensure that you also enter a value for the createdDateTo parameter.
createdDateTo	Optional. To find cost centers that were created between a date range, enter the latest date when the cost center were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
modifiedDateFrom	Optional. To find cost centers that were modified between a date range, enter the initial date when the cost center were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find cost centers that were modified between a date range, enter the latest date when the cost center were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - NAME - ID - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve cost centers:

```
https://{{CDMP_URL}}/api/v1/integration/costCenters?
search=SK&fields=NAME&ids=8039d329-46fa-4048-
b8e0-9e52a6d73583&createdDateFrom=2012-09-12&createdDateTo=2023-09-12&modifiedDateFrom=20
12-09-12&modifiedDateTo=2023-09-12&sortByField=MODIFIED_ON&sort=DESC&offset=0&limit=1
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve a cost center:

```
{
  "processingTime": 7986,
  "offset": 0,
  "limit": 1,
  "totalCount": 1,
  "objects": [
    {
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "name": "RTL-367APJ",
      "description": "The cost center for the APJ retail department."
      "createdBy": "3q961bWdAHqjfSS7orgR8N",
      "createdOn": "2022-07-26T11:18:20.029Z",
      "modifiedBy": "3q961bWdAHqjfSS7orgR8N",
      "modifiedOn": "2022-07-26T11:23:32.881Z"
```

```
        }
    ]
}
```

The following table describes the parameters of each cost center that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of cost centers retrieved.
id	System generated unique identifier of the cost center.
name	Name of the cost center.
description	Description of the cost center.
createdBy	System generated unique identifier of the user account that created the cost center.
createdOn	Date when the cost center was created.
modifiedBy	System generated unique identifier of the latest user account that modified the cost center.
modifiedOn	Latest date when the cost center was modified.

Modify cost centers

Use a REST API to modify cost centers in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/costCenters**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the cost center that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a cost center, see "Retrieve cost centers" on page 183.
`name`	Required. Enter a name for the cost center.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a cost center as "MKT010" while a cost center called "mkt010" already exists, the API call fails.
`description`	Optional. Enter a description for the cost center.	-

Example request

The following example shows how you can use an API to modify a cost center:

```
{
  "items": [
    {
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "name": "RTL-367APJ",
      "description": "The cost center for the APJ retail department."
    },
    {
      "id": "8039d329-46fa-4048-b8e0-9e52a6d73583",
      "name": "RTL-367EMEA",
      "description": "The cost center for the EMEA retail department."
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a cost center:

```
{
  "processingTime": 23913,
  "objects": [
    {
      "index": 1,
      "id": "980dfbc0-c7c0-4e24-ba47-4477bb9bf19c",
      "refId": "320dnbc0-e4r0-4r15-by42-3457bg7hf11x",
      "name": "RTL-367APJ"
    },
    {
      "index": 2,
      "id": "8039d329-46fa-4048-b8e0-9e52a6d73583",
      "refId": "783rebc4-c7v5-6e23-xz17-4937bb3nm13t",
      "name": "RTL-367EMEA"
    }
```

```
    ]
}
```

The following table describes the parameters of each cost center that is modified:

Parameter	Description
`index`	The position of the cost center in the `objects` JSON array. This value does not impact how the cost center is used by a Data Marketplace user.
`id`	System generated unique identifier of the cost center.
`refId`	Reference identifier of the cost center.
`name`	Name of the cost center.

CHAPTER 7

Manage Data Marketplace content

This chapter includes the following topics:

- Data elements, 189
- Data assets, 200

Data elements

A data element is the smallest unit of data that is present in Data Marketplace. A grouping of one or more related data elements forms a data asset.

Create data elements

Use a REST API to create data elements in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets/<id>/dataElements** <id>: Required. The system generated unique identifier of the enabled data asset to which you want to add the new data element. To get the system generated unique identifier of a data asset, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the system generated unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`. For more information about how you can use an API to get the system generated unique identifier of a data asset, see "Retrieve data assets" on page 203.
Method	POST

Note: You can use the API to add a data element only to a data asset that is native to Data Marketplace.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`name`	Required. Enter a name for the data element.	-
`refId`	Optional. Enter a reference identifier for the data element.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`description`	Required. Enter a description for the data element.	-
`referenceLink`	Optional. Enter the uniform resource identifier of the data element in the data source.	-
`technicalType`	Optional. Enter the type of the data element as defined in the data source.	-
`technicalName`	Optional. Enter the name of the data element as it appears in the data source.	-
`type`	Optional. Enter a type for the data element.	-
`status`	Required. Specify a status for the data element.	Enter one of the following values: - To make the data elements available, enter `ENABLED`. - To make the data elements unavailable, enter `DISABLED`.

Example request

The following example shows how you can use an API to create a data element:

```
{
    "items": [
        {
            "name": "Address",
```

```
            "refId": "DAET3401",
            "description": "Address of the customer",
            "referenceLink": "URL://DATA_ASSET",
            "technicalType": "string",
            "technicalName": "string",
            "type": "TEXT",
            "status": "ENABLED"
        }
    ]
}
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a data element:

```
{
    "processingTime": 2137,
    "objects": [
        {
            "index": 1,
            "id": "d917d035-d9a0-3894-a8cc-16b506c4decd",
            "refId": "DAET3401",
            "name": "Address"
        }
    ]
}
```

The following table describes the parameters of each data element that is created:

Parameter	Description
index	The position of the data element in the objects JSON array. This value does not impact how the data element is used by a Data Marketplace user.
id	System generated unique identifier of the data element.
refId	Reference identifier of the data element.
name	Name of the data element.

Retrieve data elements

Use a REST API to retrieve the details of data elements in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets/<id>/dataElements** <id>: Required. The system generated unique identifier of the data asset that contains the data element. To get the system generated unique identifier of a data asset, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the system generated unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`. For more information about how you can use an API to get the system generated unique identifier of a data asset, see "Retrieve data assets" on page 203.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`sortByField`	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - `ID` - `NAME` - `STATUS` - `TECHNICAL_TYPE` - `TECHNICAL_NAME` - `TYPE` Default is `MODIFIED_ON`.
`sort`	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter `ASC`. - To sort the search results by descending order, enter `DESC`. Default is `DESC`.
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum is `100`.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the data elements of a data asset:

```
https://{{CDMP_URL}}/api/v1/integration/dataAssets/r517d035-g1a0-6813-v4cd-23e506c4devr/
dataElements?limit=100&sortByField=NAME&sort=DESC
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the data elements of a data asset:


```
{
  "processingTime": 214,
  "offset": 0,
  "limit": 100,
  "totalCount": 8,
  "objects": [
    {
      "id": "c317d035-d9a0-3144-a8cc-18v506c4dece",
      "refId": "DLM-371",
      "name": "Retail outlet list",
      "description": "A list of all retail outlets.",
      "referenceLink": "URL://AXON",
      "technicalType": "string",
      "technicalName": "string",
      "type": "column",
      "status": "ENABLED",
      "businessName": "Global Retail Outlets",
      "businessDesc": "A list of all retail outlets around the global.",
      "createdBy": "7w2uGIARApUgxniNoHHWsJ",
      "createdOn": "2022-03-08T17:05:28.208Z",
      "modifiedBy": "7w2uGIARApUgxniNoHHWsJ",
      "modifiedOn": "2022-03-08T17:09:34.623Z"
    }
  ]
}
```


The following table describes the parameters of each data element that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of data elements retrieved.
id	System generated unique identifier of the data element.
refId	Reference identifier of the data element.
name	Name of the data element.
description	Description of the data element.
referenceLink	Uniform resource identifier of the location in the data source where the data element is stored.
technicalType	Type of the data element as defined in the data source.
technicalName	Name of the data element as it appears in the data source.

Parameter	Description
type	Type of the data element.
status	Status of the data element. - ENABLED. The data element is available. - DISABLED. The data element is unavailable.
businessName	Business name of the data element as defined in Data Governance and Catalog. In Data Governance and Catalog, technical assets might have user-friendly business names assigned to them. Users can assign the business names manually, or the system can automatically assign the names. For more information, see the *Enrich technical assets with governance context* topic in the *Working With Assets* help for Data Governance and Catalog.
businessDesc	Business description of the data element as defined in Data Governance and Catalog. In Data Governance and Catalog. For more information, see the *Enrich technical assets with governance context* topic in the *Working With Assets* help for Data Governance and Catalog.
createdBy	System generated unique identifier of the user account that created the data element.
createdOn	Date when the data element was created.
modifiedBy	System generated unique identifier of the latest user account that modified the data element.
modifiedOn	Latest date when the data element was modified.

Modify data elements

Use a REST API to modify data elements in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets/<id>/dataElements** <id>: Required. The system generated unique identifier of the data asset for which you want to modify its data element. To get the system generated unique identifier of a data asset, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the system generated unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`. For more information about how you can use an API to get the system generated unique identifier of a data asset, see "Retrieve data assets" on page 203.
Method	PUT

Note: You can use the API to modify only a data element that is native to Data Marketplace.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the data element that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a data element, see "Retrieve data elements" on page 191.
`name`	Required. Enter a name for the data element.	-
`refId`	Optional. Enter a reference identifier for the data element.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`description`	Required. Enter a description for the data element.	-
`referenceLink`	Optional. Enter the uniform resource identifier of the data element in the data source.	-
`technicalType`	Optional. Enter the type of the data element as defined in the data source.	-
`technicalName`	Optional. Enter the name of the data element as it appears in the data source.	-
`type`	Optional. Enter a type for the data element.	-
`status`	Required. Specify a status for the data element.	Enter one of the following values: - To make the data elements available, enter `ENABLED`. - To make the data elements unavailable, enter `DISABLED`.

Example request

The following example shows how you can use an API to modify a data element:

```
{
    "items": [
        {
            "id": "d917d035-d9a0-3894-a8cc-16b506c4decd",
            "name": "Updated Address",
            "refId": "DAET3401",
```

```
            "description": "Updated Address of the customer",
            "referenceLink": "URL://DATA_ASSET",
            "technicalType": "string",
            "technicalName": "string",
            "type": "TEXT",
            "status": "ENABLED"
        }
    ]
}
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a data element:

```
{
    "processingTime": 1986,
    "objects": [
        {
            "index": 1,
            "id": "d917d035-d9a0-3894-a8cc-16b506c4decd",
            "refId": "DAET3401",
            "name": "Updated Address"
        }
    ]
}
```

The following table describes the parameters of each data element that is modified:

Parameter	Description
index	The position of the data element in the objects JSON array. This value does not impact how the data element is used by a Data Marketplace user.
id	System generated unique identifier of the data element.
refId	Reference identifier of the data element.
name	Name of the data element.

Delete data elements

Use a REST API to delete data elements in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataElements/<id>** <id>: Required. Enter the system generated unique identifier of the data element that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a data element, see "Retrieve data elements" on page 191.
Method	DELETE

Note: You can use the API to delete only a data element that was created in Data Marketplace. If you use the API to delete an element that originates from an external system such as Data Governance and Catalog, the API call fails.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a data element:

```
https://{{CDMP_URL}}/api/v1/integration/dataElements/d2313aed-330e-44a0-bcfa-380ee4a95a62
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data element is deleted successfully:

```
204 OK code
```

Manage the data quality information of a data element

Use a REST API to specify a data quality score for a data element in Data Marketplace or to modify the data quality score of a data element.

For more information about data quality rules, see the *Data Quality Per Asset section* topic in the *Introduction and Getting Started* help.

Endpoint and method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/integration/dataElements/dq/records**
Method	PUT

Note: Before you call this API, consider the following:

- The number of data quality rules that you can assign to a data element per API call depends on the cloud provider the IDMC POD is hosted. The following table lists the number of data quality rules that you can assign to a data element per API call on each cloud provider:

Cloud provider	Number of data quality rules
Amazon Web Services	30
Microsoft Azure	10

- You can call a maximum of 100 APIs per minute.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`dataElementId`	Required. Enter the system generated unique identifier of the data element for which you want to specify a data quality score.	For more information about how you can use an API to get the system generated unique identifier of a data element, see "Retrieve data elements" on page 191.
`ruleRefId`	Required. Enter the reference identifier of the data quality rule that is run on the data element as defined in the external data quality system.	-
`ruleName`	Required. Enter the name of the data quality rule that is run on the data element.	-
`ruleDescription`	Optional. Enter the description of the data quality rule that is run on the data element.	-
`type`	Required. Specify the dimension for which the data quality rule is run.	Enter one of the following values: - `Accuracy` - `Validity` - `Completeness` - `Consistency` - `Uniqueness` - `Timeliness`
`score`	Required. Enter the data quality score.	Enter a value from 0 through 100.
`rowCount`	Required. Enter the number of rows on which the data quality rule is executed.	-
`exceptionCount`	Required. Enter the acceptable number of unresolved data quality issues in your data.	-

Parameter	Description	Additional Information
executionDate	Optional. Enter the date when the data quality rule is executed.	-
thresholds	Required. Enter a threshold.	Threshold is the minimum acceptable data quality score of a data element. The thresholds that you define help users to distinguish helpful data from the unhelpful data.
thresholds > name	Required. Enter the name of the color used by Data Marketplace to represent a threshold.	Enter one of the following values: - The GREEN value indicates that the data quality score is above the target value, represents a "Good" score. - The AMBER value indicates that the data quality score is between the threshold and target value, represents an "Acceptable" score.
thresholds > value	Required. Enter the minimum acceptable data quality score.	You must specify a value for both the GREEN and AMBER threshold.

Example request

The following example shows how you can use an API to specify a data quality score for a data element:

```
{
  "items": [
    {
      "dataElementId": "d917d035-d9a0-3894-a8cc-16b506c4decd",
      "ruleRefId": "CDMP-RO-01",
      "ruleName": "CDMP Rule Occurrence 1",
      "ruleDescription": "Rule Description",
      "type": "Accuracy",
      "score": 85,
      "rowCount": 100,
      "exceptionCount": 15,
      "executionDate": "2022-12-07T00:00:00.000Z",
      "thresholds": [
        {
          "name": "GREEN",
          "value": 88
        },
        {
          "name": "AMBER",
          "value": 70
        }
      ]
    }
  ]
}
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to specify a data quality score for a data element:

```
{
```

```
  "processingTime": 689,
  "objects": [
    {
      "index": 1,
      "id": "g377d066-f9e4-5674-f7cv-13g666c4dtyd",
      "refId": "CDMP-RO-01",
      "name": "CDMP Rule Occurrence 1"
    }
  ]
}
```

The following table contains the parameters in the response body:

Parameter	Description
id	System generated unique identifier of the data quality score information of the data element.
refId	Reference identifier of the data quality rule that is assigned to the data element.
name	Name of the data quality rule that is assigned to the data element.

Data assets

A representation of data in an organization. Data assets might contain relevant data elements and are contained in one or more data collections.

Create data assets

Use a REST API to create data assets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`name`	Required. Enter a name for the data asset.	-
`refId`	Optional. Enter a reference identifier for the data asset.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`description`	Required. Enter a description for the data asset.	-
`source`	Required. Specify the source system from which the data is supplied to Data Marketplace.	-
`descriptiveSource`	Optional. Specify the source application from which the description of the data asset is taken.	-
`type`	Required. Enter a type for the data asset.	-
`refLink`	Optional. Enter the uniform resource identifier of the location in the data source where the data asset is stored.	-
`assetLocation`	Optional. Enter the location of the data asset in the data source.	-
`assetLocationDescription`	Optional. Enter a description for the location in the data source where the data asset is stored.	-

Parameter	Description	Additional Information
technicalAssetName	Optional. Enter the name of the data asset as it appears in the data source.	-
status	Optional. Specify a status for the data asset. The status indicates whether the data asset is available to be added to data collections.	Enter one of the following values: - To make the data asset available, enter ENABLED. - To make the data asset unavailable, enter DISABLED. Default value is ENABLED.

Example request

The following example shows how you can use an API to create a data asset:

```
{
    "items": [
        {
            "name": "Accounts_Customers",
            "refId": "CMDS001",
            "description": "Customer Information",
            "source": "CDLG",
            "descriptiveSource": "AXON",
            "type": "Table",
            "refLink": "URL://AXON",
            "assetLocation": "string",
            "assetLocationDescription": "string",
            "technicalAssetName": "string",
            "status": "ENABLED"
            }
         }
     ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a data asset:

```
{
    "processingTime": 2130,
    "objects": [
        {
            "index": 1,
            "id": "49d4856a-90b3-3584-abd6-47db0fe9acb6",
            "refId": "CMDS001",
            "name": "Accounts_Customers"
        }
    ]
}
```

The following table describes the parameters of each data asset that is created:

Parameter	Description
index	The position of the data asset in the objects JSON array. This value does not impact how the data asset is used by a Data Marketplace user.
id	System generated unique identifier of the data asset.
refId	Reference identifier of the data asset.
name	Name of the data asset.

Retrieve data assets

Use REST APIs to retrieve the details of data assets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
search	Optional. Enter a search term to find the data assets.	Ensure that the search term that you enter don't contain an asterisk (*).
fields	Optional. Enter one or more fields that apply to the search. The terms you enter in the search fields parameter are searched in the fields that you enter here.	Enter the following values: - NAME - DESCRIPTION - SOURCE - TYPE - DESCRIPTIVE_SOURCE

Parameter	Description	Additional Information
createdDateFrom	Optional. To find data assets created between a date range, enter the starting date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateFrom parameter, ensure that you also enter a value for the createdDateTo parameter.
createdDateTo	Optional. To find data assets created between a date range, enter the ending date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
modifiedDateFrom	Optional. To find data assets modified between a date range, enter the starting date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find data assets modified between a date range, enter the ending date.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
status	Optional. Specify the status of the data asset. The status indicates whether the data asset is available to be added to data collections.	Enter one of the following values: - To find the data assets that are available, enter ENABLED. - To find the data assets that aren't available, enter DISABLED.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - SOURCE - DESCRIPTIVE_SOURCE - TYPE - ASSET_LOCATION - ASSET_LOCATION_DESCRIPTION - TECHNICAL_ASSET_NAME - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a data asset:

```
https://{{CDMP_URL}}/api/v1/integration/dataAssets?
search=Accounts_Customers2&status=ENABLED
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a data asset:

```
{
    "processingTime": 212,
    "offset": 0,
    "limit": 50,
    "totalCount": 1,
    "objects": [
        {
            "name": "Accounts_Customers2",
            "id": "35d4856a-90b3-3584-abd6-47db0fe9acb7",
            "refId": "DAS-891",
            "description": "Customer Information",
```

```
            "source": "CDLG",
            "descriptiveSource": "AXON",
            "type": "Table",
            "refLink": "URL://AXON",
            "assetLocation": "string",
            "assetLocationDescription": "string",
            "technicalAssetName": "string",
            "status": "DISABLED",
            "resourceReference": {
              "typeReference": "string",
              "sourceAssetId": "string"
            },
            "createdBy": "7w2uGIARApUgxniNoHHWsJ",
            "createdOn": "2022-03-08T17:05:28.208Z",
            "modifiedBy": "7w2uGIARApUgxniNoHHWsJ",
            "modifiedOn": "2022-03-08T17:09:34.623Z"
        }
    ]
}
```


The following table describes the parameters of each data asset that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of data assets retrieved.
name	Name of the data asset.
id	System generated unique identifier of the data asset.
refId	Reference identifier of the data asset.
description	Description of the data asset.
source	Source system from which the data is supplied to Data Marketplace.
descriptiveSource	Source application from which the description of the data asset is taken.
type	Type of the data asset.
refLink	Uniform resource identifier of the location in the data source where the data asset is stored.
assetLocation	Location of the data asset in the data source.
assetLocationDescription	Description of the location in the data source where the data asset is stored.
technicalAssetName	Name of the data asset as it appears in the data source.
status	The status indicates whether the data asset is available to be added to data collections. A data asset can have one of the following statuses: - ENABLED. The data asset is available. - DISABLED. The data asset isn't available.
resourceReference	Details of the data asset that was imported from Data Governance and Catalog

Parameter	Description
`resourceReference > typeReference`	Type of the asset as defined in Data Governance and Catalog.
`resourceReference > sourceAssetId`	System generated unique identifier of the associated Data Governance and Catalog asset.
`createdBy`	System generated unique identifier of the user that created the data asset.
`createdOn`	Date when the data asset was created.
`modifiedBy`	System generated unique identifier of the latest user account that modified the data asset.
`modifiedOn`	Latest date when the data asset was modified.

Modify data assets

Use a REST API to modify data assets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the data asset that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a data asset, see "Retrieve data assets" on page 203. To get the system generated unique identifier of a data asset from the Data Marketplace interface, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the system generated unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`. **Note:** You can use this API to modify only the data assets that are native to Data Marketplace. To modify a data asset that was imported from Data Governance and Catalog, see the Data Governance and Catalog help.
`name`	Required. Enter a name for the data asset.	-
`description`	Required. Enter a description for the data asset.	-
`source`	Required. Specify the source system from which the data is supplied to Data Marketplace.	-
`descriptiveSource`	Optional. Specify the source application from which the description of the data asset is taken.	-
`type`	Required. Enter a type for the data asset.	-
`refLink`	Optional. Enter the uniform resource identifier of the location in the data source where the data asset is stored.	-
`assetLocation`	Optional. Enter the location of the data asset in the data source.	-
`assetLocationDescription`	Optional. Enter a description for the location in the data source where the data asset is stored.	-

Parameter	Description	Additional Information
technicalAssetName	Optional. Enter the name of the data asset as it appears in the data source.	-
status	Optional. Specify a status for the data asset. The status indicates whether the data asset is available to be added to data collections.	Enter one of the following values: - To make the data asset available, enter ENABLED. - To make the data asset unavailable, enter DISABLED. Default value is ENABLED.

Example request

The following example shows how you can use an API to modify a data asset:

```
{
    "items": [
        {
            "id": "35d4856a-90b3-3584-abd6-47db0fe9acb7",
            "name": "Accounts_Customers2",
            "description": "Updated Customer Information",
            "source": "CDLG",
            "descriptiveSource": "AXON",
            "type": "Table",
            "refLink": "URL://AXON",
            "assetLocation": "string",
            "assetLocationDescription": "string",
            "technicalAssetName": "string",
            "status": "DISABLED"
        }
    ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a data asset:

```
{
    "processingTime": 2130,
    "objects": [
        {
            "index": 1,
            "id": "35d4856a-90b3-3584-abd6-47db0fe9acb7",
            "refId": "DAS-891",
            "name": "Accounts_Customers2"
        }
    ]
}
```

The following table describes the parameters of each data asset that is modified:

Parameter	Description
index	The position of the data asset in the objects JSON array. This value does not impact how the data asset is used by a Data Marketplace user.
id	System generated unique identifier of the data asset.
refId	Reference identifier of the data asset.
name	Name of the data asset.

Delete data assets

Use a REST API to delete data assets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataAssets/<id>** <id>: Required. Enter the system generated unique identifier of the data asset that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a data asset, see "Retrieve data assets" on page 203. To get the system generated unique identifier of a data asset from the Data Marketplace interface, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements, the system generated unique identifier is 8c4c2089-6c7e-4696-a8f6-44f87639d65c.
Method	DELETE

Note: You can use this API to delete only the data assets that are native to Data Marketplace. To delete a data asset that was imported from Data Governance and Catalog, see the Data Governance and Catalog help.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a data asset:

```
https://{{CDMP_URL}}/api/v1/integration/dataAssets/d2313aed-330e-44a0-bcfa-380ee4a95a62
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data asset is deleted successfully:

```
204 OK code
```

CHAPTER 8

Manage data collections

A data collection is a grouping of one or more data assets. If a Data User requires access to a data collection, the user can place an order for the data collection.

Create data collections

Use a REST API to create data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`name`	Required. Enter a name for the data collection.	-
`description`	Required. Enter a description for the data collection.	-

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the data collection.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`categoryId`	Required. Enter the system generated unique identifier of the category in which you want to create the data collection.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`usageContextIds`	Optional. Enter the system generated unique identifier of the usage type that you want to use to specify the certified use of the data collection.	For more information about how you can use an API to get the system generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`dataCollectionStatus`	Required. Specify a status for the data collection. The status determines whether or not the data collection is available to Data Users.	Enter one of the following values: - To make the data collection discoverable to Data Users, enter `PUBLISHED`. - To make the data collection undiscoverable to Data Users, enter `UNPUBLISHED`.

Parameter	Description	Additional Information
`dataOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Data Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`technicalOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Technical Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Parameter	Description	Additional Information
customFields	The header where you can modify the custom attributes of the data collection.	Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
customFields > value	Enter a value in the custom attribute.	This parameter can have only a single value.
customFields > values	Enter a value in the custom attribute.	This parameter can have multiple values.

Example request

The following examples show how you can use APIs to create data collections:

Example request 1

```
{
  "items": [
    {
      "name": "Retail Manager List",
      "description": "Details about the managers of all retail outlets globally.",
      "refId": "DC9912",
      "categoryId": "49d4856a-90b3-3584-abd6-47db0fe9acb6",
      "usageContextIds": [
        "54ab6f78-264a-4892-bff6-b999b2284200"
      ],
      "dataCollectionStatus": "PUBLISHED",
      "dataOwners": [
        "56y4856a-34t3-5678-abd6-47db0fe9er3c"
      ],
      "technicalOwners": [
        "42y4853e-16y1-9087-ert2-32ef0fe4gh7c"
      ],
      "customFields": [
         {
         "name":"com.infa.odin.models.custom.ca_3412802606475555040",
         "value":"false"
         }
       ]
     }
  ]
}
```

Example request 2

```
{
  "items": [
    {
```

```
        "name": "08/09 J-SOX Reports",
        "description": "The collection of J-SOX reports from 2008-09.",
        "refId": "78901",
        "categoryId": "5e056b9b-d2d1-4b33-a38b-3d8255cde7c0",
        "dataCollectionStatus": "PUBLISHED",
        "customFields": [
                  {
                      "name": "com.infa.odin.models.custom.ca_7821688086685433570",
                      "value": true
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_3184028726397751640",
                      "value": "2023-09-05"
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_6928840635020975219",
                      "value": 45.6
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_7907323524500803261",
                      "value": "Secure Data Transfer"
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_1535512762047882544",
                      "value": 10
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_8610145587620226269",
                      "value": "Reticulum"
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_5588843841075376340",
                      "value": "LXMF"
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_1007408542741800522",
                      "value": true
                  },
                  {
                      "name": "com.infa.odin.models.custom.ca_3068304325528979652",
                      "values": [
                          "Apache CloudStack",
                          "Microsoft Azure",
                          "Amazong Web Services"
                      ]
                  }
              ]
          }
      ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following examples show the response of API calls to create data collections:

Example response 1

```
{
  "processingTime": 10105,
  "objects": [
      {
         "index": 1,
         "id": "1a9e9fa2-f864-4821-b160-18006453b525",
         "refId": "DC9912",
```

```
            "name": "Retail Manager List"
        }
    ],
    "errors": null
}
```


Example response 2


```
{
    "processingTime": 12243,
    "objects": [
        {
            "index": 0,
            "id": "0537c392-a359-4cdc-8989-1d88eee1dddb",
            "refId": "78901",
            "name": "08/09 J-SOX Reports"
        }
    ],
    "errors": null
}
```


The following table describes the parameters of each data collection that is created:

Parameter	Description
`index`	The position of the data collection in the `objects` JSON array. This value does not impact how the data collection is used by a Data Marketplace user.
`id`	System generated unique identifier of the data collection.
`refId`	Reference identifier of the data collection.
`name`	Name of the data collection.

Retrieve data collections

Use REST APIs to retrieve the details of data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`search`	Optional. Enter the search term that you want to use to find a data collection.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`ids`	Optional. Enter the system generated unique identifier of a data collection.	To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`. To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`dataOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Data Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Parameter	Description	Additional Information
`technicalOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Technical Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`categoryIds`	Optional. Enter the system generated unique identifier of the category that contains the data collection.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`usageContextIds`	Optional. Enter the system generated unique identifier of the usage type that is used to specify the certified use of the data collection.	For more information about how you can use an API to get the system generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`deliveryTemplateIds`	Optional. Enter the system generated unique identifier of the delivery template that was used to create the delivery target of the data collection.	For more information about how you can use an API to get the system generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.

Parameter	Description	Additional Information
deliveryTargetLocations	Optional. Specify the delivery target location.	-
createdDateFrom	Optional. To find data collections that were created between a date range, enter the initial date when the data collections were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateFrom parameter, ensure that you also enter a value for the createdDateTo parameter.
createdDateTo	Optional. To find data collections that were created between a date range, enter the latest date when the data collections were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
modifiedDateFrom	Optional. To find data collections that were modified between a date range, enter the initial date when the data collections were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find data collections that were modified between a date range, enter the latest date when the data collections were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
status	Optional. Specify the status of the data collection. The status indicates whether or not the data collection is available to Data Users.	Enter one of the following values: - To find the data collections that are discoverable to Data Users, enter PUBLISHED. - To find the data collections that aren't discoverable to Data Users, enter UNPUBLISHED.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following examples show how you can use APIs to retrieve the details of data collections:

Example request 1

```
https://{{CDMP_URL}}/api/v1/integration/dataCollections?ids=675c2d4d-
f0a8-4526-9aeb-304c86488296&usageContextIds=IdString2&sortByField=MODIFIED_ON&sort=DE
SC&limit=100
```

Example request 2

```
https://{{CDMP_URL}}/api/v1/integration/dataCollections?ids=0537c392-
a359-4cdc-8989-1d88eee1dddb
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following examples show the response of API calls to retrieve the details of data collections:

Example response 1

```
{
  "processingTime": 1392,
  "offset": 0,
  "limit": 100,
  "totalCount": 856,
  "objects": [
```

```
    {
      "id": "b90626e0-c9ae-44ed-b9ed-67178e92e886",
      "refId": "DCL-945",
      "name": "Retail Outlet List",
      "description": "List of all retail outlets.",
      "category": {
        "id": "8a17c0c2-dc9b-4904-8d28-535c27f23489",
        "name": "Retail",
        "description": "The category for the Retail department.",
        "refId": "CAT-744",
        "status": "ACTIVE",
        "effectiveStatus": "ACTIVE"
      },
      "usageContexts": [
        {
          "id": "675c2d4d-f0a8-4526-9aeb-304c86488296",
          "name": "Retail Analytics",
          "description": "This is for analytics purposes by the retail department.",
          "color": "string",
          "status": "ACTIVE"
        }
      ],
      "status": "PUBLISHED",
      "dataOwners": [
        {
          "displayName": "Jane Doe",
          "id": " User1",
          "name": "username1",
          "email": "abc@xyz.com",
          "phone": "2020202020",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        }
      ],
      "technicalOwners": [
        {
          "displayName": "John Doe",
          "id": "User2",
          "name": "username2",
          "email": "xyz@abc.com",
          "phone": "2020202021",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        }
      ],
      "customFields": [
        {
         "name":"com.infa.odin.models.custom.ca_1007408542741800522",
         "value":"false",
         "values":null
        }
      ],
      "createdBy": "lWDKqZAREESgsDTtk9kVOy",
      "createdOn": "2022-06-21T10:43:03.374Z",
      "modifiedBy": "lWDKqZAREESgsDTtk9kVOy",
      "modifiedOn": "2022-07-07T13:26:23.180Z"
    }
  ]
}
```


Example response 2


```
{
  "processingTime": 7788,
  "offset": 0,
  "limit": 50,
  "totalCount": 1,
```

```
  "objects": [
       {
          "id": "0537c392-a359-4cdc-8989-1d88eee1dddb",
          "refId": "78901",
          "name": "08/09 J-SOX Reports",
          "description": "The collection of J-SOX reports from 2008-09.",
          "category":
               {
                  "id": "5e056b9b-d2d1-4b33-a38b-3d8255cde7c0",
                  "name": "cat05",
                  "description": "desc",
                  "refId": "16",
                  "status": "ACTIVE",
                  "effectiveStatus": "ACTIVE"
               },
          "usageContexts": null,
          "status": "PUBLISHED",
          "dataOwners": [],
          "technicalOwners": [],
          "customFields": [
               {
                  "name": com.infa.odin.models.custom.ca_3184028726397751640",
                  "value": "2023-09-05",
                  "values": null
               },
               {
                  "name": "com.infa.odin.models.custom.ca_3068304325528979652",
                  "value": null,
                  "values": [
                       {
                          "Apache CloduStack",
                          "Microsoft Azure"                                ]
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_8610145587620226269",
                          "value": "Reticulum",
                          "values": null
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_6928840635020975219",
                          "value": "45.6",
                          "values": null
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_5588843841075376340",
                          "value": "LXMF",
                          "values": null
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_7907323524500803261",
                          "value": "Secure Data Transfer",
                          "values": null
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_1535512762047882544",
                          "value": "10",
                          "values": null
                       },
                       {
                          "name":
"com.infa.odin.models.custom.ca_1007408542741800522",
                          "value": "false",
                          "values": null
                       },
                       {
```

```
                            "name":
"com.infa.odin.models.custom.ca_7821688086685433570",
                            "value": "false",
                            "values": null
                        }
                    ],
            "createdBy": "8lgIca73QzfdX7xzhZnOQa",
            "createdOn": "2023-09-11T05: 40: 34.460Z",
            "modifiedBy": "8lgIca73QzfdX7xzhZnOQa",
            "modifiedOn": "2023-09-11T05: 40: 34.460Z"
        }
    ]
}
```


The following table describes the parameters of each data collection that is retrieved:

Parameter	Description
processingTime	Time taken (in milliseconds) to complete the API call.
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of data collections retrieved.
objects	Details of the retrieved data collection.
id	System generated unique identifier of the data collection.
refId	Reference identifier of the data collection.
name	Name of the data collection.
description	Description of the data collection.
category	Details of the category that contains the data collection.
category > id	System generated unique identifier of the category that contains the category.
category > name	Name of the category that contains the category.
category > description	Description of the category that contains the category.
category > status	Status of the category. A category can have one of the following statuses: - ACTIVE - INACTIVE
category > effectiveStatus	The effective status indicates whether the category is available in Data Marketplace. A category can have one of the following statuses: - ACTIVE. The category is available. - INACTIVE. The category is unavailable.
usageContexts > id	System generated unique identifier of the usage type that is used to specify the certified use of the data collection.
usageContexts > name	Name of the usage type that is used to specify the certified use of the data collection.

Parameter	Description
`usageContexts > description`	Description of the usage type that is used to specify the certified use of the data collection.
`usageContexts > color`	A hexadecimal value that represents the color indicator of the usage type. Assigning a unique color indicator allows Data Marketplace users to identify a usage type easily.
`usageContexts > status`	The status indicates whether a usage type is available to be added to a data collection or to be selectable on an order. A usage type can have one of the following values: - `ACTIVE`. The usage type is available. - `INACTIVE`. The usage type is available.
`status`	The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`dataOwners`	Details of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > displayName`	Name of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > id`	System generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Data Owner stakeholder role.
`dataOwners > name`	Username of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > email`	Email address of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > phone`	Contact number of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > status`	The status indicates whether or not the Data Owner stakeholder user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The Data Owner user account or user group is active. - `INACTIVE`. The Data Owner user account or user group is not active.
`dataOwners > userInfo`	Details retrieved from the **My Data** page of the stakeholder that is assigned the Data Owner stakeholder role on the data collection.
`dataOwners > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`technicalOwners`	Details of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > displayName`	Name of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > id`	System generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Technical Owner stakeholder role.

Parameter	Description
`technicalOwners > name`	Username of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > email`	Email address of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > phone`	Contact number of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > status`	The status indicates whether or not the Technical Owner stakeholder user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The Technical Owner user account or user group is active. - `INACTIVE`. The Technical Owner user account or user group is not active.
`technicalOwners > userInfo`	Details retrieved from the **My Data** page of the stakeholder that is assigned the Technical Owner stakeholder role on the data collection.
`technicalOwners > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`customFields`	The custom fields of the data collection and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customFields > name`	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
`customFields > value`	The custom attribute value. This parameter can have only a single value.
`customFields > values`	The custom attribute value. This parameter can have multiple values.
`createdBy`	System generated unique identifier of the user account that created the data collection.
`createdOn`	Date when the data collection was created.
`modifiedBy`	System generated unique identifier of the latest user account that modified the data collection.
`modifiedOn`	Latest date when the data collection was modified.

Modify data collections

Use a REST API to modify data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the data collection that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`name`	Required. Enter a name for the data collection.	-
`description`	Required. Enter a description for the data collection.	-
`refId`	Optional. Enter a reference identifier for the data collection.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.

Parameter	Description	Additional Information
`categoryId`	Required. Enter the system generated unique identifier of the category to which you want to add the data collection.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`usageContextIds`	Optional. Enter the system generated unique identifier of the usage type that you want to use to specify the certified use of the data collection.	For more information about how you can use an API to get the system generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`dataCollectionStatus`	Required. Specify a status for the data collection. The status determines whether or not the data collection is available to Data Users.	Enter one of the following values: - To make the data collection discoverable to Data Users, enter `PUBLISHED`. - To make the data collection undiscoverable to Data Users, enter `UNPUBLISHED`.
`dataOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Data Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

Parameter	Description	Additional Information
`technicalOwners`	Optional. Enter the system generated unique identifier of the user account or user group that is assigned as a stakeholder on the data collection with the Technical Owner stakeholder role.	- To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`. - To get the system generated unique identifier of a user group, navigate to **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the system generated unique identifier is `90uizkSWg0ycuu7hSNXSW4`.
`customFields`	The header where you can modify the custom attributes of the data collection.	Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your Administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customFields > name`	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
`customFields > value`	Enter a value in the custom attribute.	This parameter can have only a single value.
`customFields > values`	Enter a value in the custom attribute.	This parameter can have multiple values.

Example request

The following example shows how you can use an API to modify a data collection:

```
{
  "items": [
    {
      "id": "15100e3a-0c89-42c7-afc1-9ed0f13766a4",
      "name":"07/08 J-SOX Reports",
```

```
    "description": "The collection of J-SOX reports from 2007-08.",
    "refId": "123467",
    "categoryId": "2d0a40a4-a511-4d64-915b-d700d6441efe",
    "usageContextIds": [
      "c607b766-1e04-4892-a105-3ef2826461c9"
    ],
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [
      "48WAxPi970Jkn9p2PCoJCb"
    ],
    "technicalOwners": [
      "6WExNvGf1Mpj9BITKmPMeg"
    ],
    "customFields": [
              {
                  "name": "com.infa.odin.models.custom.ca_7821688086685433570",
                  "value": true
              },
              {
                  "name": "com.infa.odin.models.custom.ca_3184028726397751640",
                  "value": "2023-09-05"
              },
              {
                  "name": "com.infa.odin.models.custom.ca_6928840635020975219",
                  "value": 45.6
              },
              {
                  "name": "com.infa.odin.models.custom.ca_7907323524500803261",
                  "value": "Secure Data Transfer"
              },
              {
                  "name": "com.infa.odin.models.custom.ca_1535512762047882544",
                  "value": 10
              },
              {
                  "name": "com.infa.odin.models.custom.ca_8610145587620226269",
                  "value": "Reticulum"
              },
              {
                  "name": "com.infa.odin.models.custom.ca_5588843841075376340",
                  "value": "LXMF"
              },
              {
                  "name": "com.infa.odin.models.custom.ca_1007408542741800522",
                  "value": true
              },
              {
                  "name": "com.infa.odin.models.custom.ca_3068304325528979652",
                  "values": [
                      "Apache CloduStack",
                      "Microsoft Azure",
                      "Amazong Web Services"
                  ]
              }
          ]
      }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a data collection:

```
{
  "processingTime": 30149,
  "objects":
        [
            {
              "index": 0,
              "id": "15100e3a-0c89-42c7-afc1-9ed0f13766a4",
              "refId": "123467",
              "name": "07/08 J-SOX Reports"
            }
         ],
  "errors": null
}
```

The following table describes the parameters of each data collection that is modified:

Parameter	Description
index	The position of the data collection in the objects JSON array. This value does not impact how the data collection is used by a Data Marketplace user.
id	System generated unique identifier of the data collection.
refId	Reference identifier of the data collection.
name	Name of the data collection.

Delete data collections

Use a REST API to delete data collections in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections/<id>** <id>: Required. Enter the system generated unique identifier of the data collection that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary, the system generated unique identifier is 25158afc-3dfb-44ef-8f3e-cec1e171d0f1.
Method	DELETE

Note: If the data collection that you want to delete is linked to another collection, this link is removed when you delete the data collection. In this scenario, the other collection that was linked does not get deleted.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/dataCollections/d2313aed-330e-44a0-
bcfa-380ee4a95a62
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection is deleted successfully:

```
204 OK code
```

Add or remove data assets from data collections

Use a REST API to add a data asset to a data collection or to remove a data asset from a data collection.

Before you make the API call, ensure that the data collection already exists in Data Marketplace, and the data asset already exist in either Data Marketplace or Data Governance and Catalog.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections/dataAssets**
Method	PUT

Note:

- The number of data assets that you can add per API call depends on the cloud provider the IDMC POD is hosted on. The following table shows the number of data assets that you can add per API call on each cloud provider:

Cloud provider	Number of data assets
Amazon Web Services	30
Microsoft Azure	10

- You can call a maximum of 100 APIs per minute.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`dataCollectionId`	Required. Enter the system generated unique identifier of the data collection to which you want to add a data asset or from which you want to remove a data asset.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`assetId`	Required. Enter the system generated unique identifier of the data asset that you want to add to a data collection or remove from a data collection.	For more information about how you can use an API to get the system generated unique identifier of a Data Marketplace data asset, see "Retrieve data assets" on page 203. To get the system generated unique identifier of a data asset from the Data Marketplace interface, open the data asset. The data asset page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the system generated unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`. For more information about how you can use an API to get the system generated unique identifier of a Data Governance and Catalog asset, see the Data Governance and Catalog help. When you add a Data Governance and Catalog asset to a data collection, the **Overview** page of the asset in Data Governance and Catalog indicates that the asset is published to Data Marketplace. Additionally, you can view in Data Governance and Catalog the details of the data collection to which the asset was added.
`operation`	Required. Specify the action that you want to perform.	Enter one of the following values: - To add a data asset to a data collection, enter `ADD`. - To remove a data asset from a data collection, enter `REMOVE`.

Example request

The following example shows how you can use an API to add a data asset to a data collection:.

```
[
  {
    "dataCollectionId": "3c4c3349-6aac-4235-95e0-11b62a9dabcd",
    "dataAssets": [
      {
        "assetId": "7f4227e2-93ad-4881-adb4-2be5842def09",
        "operation": "ADD"
      }
    ]
  }
]
```

Response

When you pass the API payload in the REST client, the client displays a response for the request query based on the parameters you had mapped with values.

If the data asset is successfully added or removed, the following response is displayed:

```
204 OK code
```

Retrieve the data assets of a data collection

Use a REST API to retrieve the data assets of a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections/<dataCollectionId>/dataAssets** <dataCollectionId>: Required. Enter the system generated unique identifier of the data collection for which you want to retrieve the data assets. For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary, the system generated unique identifier is 25158afc-3dfb-44ef-8f3e-cec1e171d0f1.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum is `100`.

Note: The API has no payload.

Example request

The following example shows how you can use an API call to retrieve the data assets of a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/dataCollections/794a215f-5479-4b55-8e1b-a4866ec9fe82/dataAssets?limit=100
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the request query based on the data collection that you specified.

The following example shows the response of an API call to retrieve the data assets of a data collection:


```
{
    "processingTime": 218,
    "offset": 0,
    "limit": 100,
    "totalCount": 231,
    "objects": [
        {
            "name": "Accounts_Customers",
            "id": "49d4856a-90b3-3584-abd6-47db0fe9acb6",
            "refId": "DAS-191",
            "description": "Customer Information",
            "source": "CDLG",
            "descriptiveSource": "AXON",
            "type": "Table",
            "refLink": "URL://AXON",
            "assetLocation": "string",
            "assetLocationDescription": "string",
            "technicalAssetName": "string",
            "status": "DISABLED",
            "resourceReference": {
               "typeReference": "string",
               "sourceAssetId": "9u2rTIHJHpUgvriNoUUYsE"
               },
            "createdBy": "7w2uGIARApUgxniNoHHWsJ",
            "createdOn": "2022-03-08T17:05:28.208Z",
            "modifiedBy": "7w2uGIARApUgxniNoHHWsJ",
            "modifiedOn": "2022-03-08T17:09:34.623Z"
        }
    ]
}
```

The following table describes the parameters of each data asset that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of data assets retrieved.
name	Name of the data asset.
id	System generated unique identifier of the data asset.
refId	Reference identifier of the data asset.
description	Description of the data asset.
source	Source system from which the data is supplied to Data Marketplace.
descriptiveSource	Source application from which the description of the data asset is taken.
type	Type of the data asset.
refLink	Uniform resource identifier of the location in the data source where the data asset is stored.
assetLocation	Location of the data asset in the data source.
assetLocationDescription	Description of the location in the data source where the data asset is stored.
technicalAssetName	Name of the data asset as it appears in the data source.
status	The status indicates whether the data asset is available to be added to data collections. A data asset can have one of the following statuses: - ENABLED. The data asset is available. - DISABLED. The data asset isn't available.
resourceReference	Details of the data asset that was imported from Data Governance and Catalog
resourceReference > typeReference	Type of the asset as defined in Data Governance and Catalog.
resourceReference > sourceAssetId	System generated unique identifier of the associated Data Governance and Catalog asset.
createdBy	System generated unique identifier of the user that created the data asset.
createdOn	Date when the data asset was created.
modifiedBy	System generated unique identifier of the latest user account that modified the data asset.
modifiedOn	Latest date when the data asset was modified.

Manage the delivery targets of a data collection

A delivery target is a delivery option that you as a stakeholder of a data collection can use to deliver data to a Data User. Stakeholders use delivery templates to create new delivery targets for their data collections.

Create delivery targets

Use a REST API to create delivery targets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTargets**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the delivery target.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery target.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery target as "Excel over ipfs" while a delivery target called "Excel over IPFS" already exists, the API call fails.
`description`	Required. Enter a description for the delivery target.	-

Parameter	Description	Additional Information
`status`	Required. Specify a status for the delivery target. The status determines whether the delivery target is available for use to the Data Users that order the data collection.	Enter one of the following values: - To make the delivery targets available, enter `ACTIVE`. - To make the delivery targets unavailable, enter `INACTIVE`.
`targetSystemReference`	Optional. Enter the target system or resource reference from where the data is obtained.	-
`physicalLocation`	Optional. Enter the URL of the delivery location.	If the **Managed Access** option is enabled for the deliver template that you specified in the `deliveryTemplateId` parameter, the data is not delivered to the location that you specify in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
`deliveryTemplateId`	Required. Enter the system generated unique identifier of the delivery template that you want to use to create the delivery target.	For more information about how you can use an API to get the system generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.
`deliveryMethodId`	Required. Enter the system generated unique identifier of the delivery method that constitutes the delivery target.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.

Parameter	Description	Additional Information
deliveryFormatId	Required. Enter the system generated unique identifier of the delivery format that constitutes the delivery target.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.
dataCollectionId	Required. Enter the system generated unique identifier of the data collection in which you want to create the delivery target.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`. **Note:** If the **Managed Access** option is enabled for the deliver template that you specified in the `deliveryTemplateId` parameter, ensure that the data collection that you specify in the `dataCollectionId` parameter is comprised only of data assets that belong to the same data source. For more information about how you can add data assets to a data collection, see " Add or remove data assets from data collections" on page 232.

Example request

The following example shows how you can use an API to create a delivery target:

```
{
    "items": [
        {
            "refId": "Target561",
            "name": "Customer DB",
            "description": "Customer DB Delivery",
            "status": "ACTIVE",
            "targetSystemReference": "AXON",
            "physicalLocation": "Oracle db",
            "deliveryTemplateId": "94df4d34-22f3-3f3e-9409-2b0354c87365",
            "deliveryMethodId": "c35181e7-7832-3b5c-b0d3-fc2360a82f05",
            "deliveryFormatId": "fe4e89ab-80e9-3e0d-8aba-71b79deab4b8",
            "dataCollectionId": "d2aef733-4886-38df-8eb3-6db8be9d0fb9"
        }
    ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create a delivery target:

```
{
    "processingTime": 4769,
    "objects": [
        {
            "index": 1,
            "id": "13c937c3-e6d8-3006-a530-f3cd6ecf2a8f",
            "refId": "Target561",
            "name": "Customer DB"
        }
    ]
}
```

The following table describes the parameters of each delivery target that is created:

Parameter	Description
index	The position of the delivery target in the objects JSON array. This value does not impact how the delivery target is used by a Data Marketplace user.
id	System generated unique identifier of the delivery target.
refId	Reference identifier of the delivery target.
name	Name of the delivery target.

Retrieve delivery targets

Use a REST API to retrieve the details of a delivery target in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTargets**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`search`	Optional. Enter the search term that you want to use to find a delivery target.	Ensure that the search term that you enter don't contain an asterisk (*).
`fields`	Optional. Enter the fields on which the search term applies. The terms that you entered in the `search` field parameter are used to search the fields that you specify here.	Enter the following values: - `NAME` - `DESCRIPTION`
`ids`	Optional. Enter the system generated unique identifier of a delivery target.	To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`dataCollectionIds`	Optional. Enter the system generated unique identifier of the data collection that is associated with the delivery target.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`deliveryTemplateIds`	Optional. Enter the system generated unique identifier of a delivery template.	For more information about how you can use an API to get the system generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.
`status`	Optional. Specify the status of the delivery target. The status indicates whether the delivery target is available for use to the Data Users that order the data collection.	Enter one of the following values: - To find the delivery targets that are available, enter `ACTIVE`. - To find the delivery targets that aren't available, enter `INACTIVE`.

Parameter	Description	Additional Information
`isDefault`	Optional. Specify whether to retrieve the default delivery target of a data collection.	Enter one of the following values: - To find a delivery target that is configured as the default delivery option for a data collection, enter `true`. - To find a delivery target that isn't configured as the default delivery option for a data collection, enter `false`.
`deliveryMethodIds`	Optional. Enter the system generated unique identifier of a delivery method.	For more information about how you can use an API to get the system generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
`deliveryFormatIds`	Optional. Enter the system generated unique identifier of a delivery format.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.
`createdDateFrom`	Optional. To find delivery targets that were created between a date range, enter the initial date when the delivery targets were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find delivery targets that were created between a date range, enter the latest date when the delivery targets were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.
`modifiedDateFrom`	Optional. To find delivery targets that were modified between a date range, enter the initial date when the delivery targets were modified.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `modifiedDateFrom` parameter, ensure that you also enter a value for the `modifiedDateTo` parameter.

Parameter	Description	Additional Information
modifiedDateTo	Optional. To find delivery targets that were modified between a date range, enter the latest date when the delivery targets were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - NAME - TARGET_SYSTEM_REFERENCE - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	Enter one of the following values: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a delivery target:

```
https://{{CDMP_URL}}/api/v1/integration/provisioning/deliveryTargets?
search=AWS&status=ACTIVE&sortByField=MODIFIED_BY&sort=ASC
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a delivery target:

```
{
  "processingTime": 4190,
  "offset": 0,
  "limit": 50,
  "totalCount": 1,
```

```
  "objects": [
    {
      "id": "16e32a13-6fba-4f1a-a337-e0aeecf9fab4",
      "refId": "Target345",
      "name": "AWS-1",
      "description": "Data to be made available in a CSV file hosted on AWS, this is to
be sent via FTP.",
      "isDefault": true,
      "status": "ACTIVE",
      "physicalLocation": "AWS",
      "targetSystemReference": "Axon",
      "deliveryTemplate": {
        "id": "7f280b8a-35fb-4325-ada0-2bf5654b4891",
        "refId": "Template345",
        "name": "AWS",
        "description": "Send an excel file via FTP",
        "isDefault": true,
        "status": "ACTIVE",
        "managedAccess": "DISABLED",
        "deliveryType": "MANUAL",
        "templateOwners": [
          {
            "displayName": "John Doe",
            "id": "9f280b8a-35fb-4325-ada0-2bf5654b4892",
            "name": "username1",
            "email": "abc@xyz.com",
            "phone": "2020202023",
            "status": "ACTIVE",
            "userInfo": {
              "initials": "string",
              "avatarColor": "string",
              "description": "string",
              "title": "string",
              "timeZoneId": "string"
            }
          }
        ],
        "targetSystemReference": "Axon",
        "defaultPhysicalLocation": "AWS",
        "deliveryMethods": [
          {
            "id": "5wd2a13-9fha-4f1a-b317-e0vvtcf9efe4",
            "refId": "Method345",
            "name": "FTP",
            "status": "ACTIVE",
            "createdBy": "User2",
            "createdOn": "2022-04-20T10:50:39.251Z",
            "modifiedBy": "User1",
            "modifiedOn": "2022-04-20T10:50:39.251Z"
          }
        ],
        "deliveryFormats": [
          {
            "id": "3h32a13-9cdf-4f1a-b317-e0ttecf9def4",
            "refId": "Format345",
            "name": "XSLX",
            "status": "ACTIVE",
            "createdBy": "User2",
            "createdOn": "2022-04-20T10:50:39.251Z",
            "modifiedBy": "User1",
            "modifiedOn": "2022-04-20T10:50:39.251Z"
          }
        ],
        "createdBy": "User2",
        "createdOn": "2022-04-20T10:50:39.251Z",
        "modifiedBy": "User1",
        "modifiedOn": "2022-04-20T10:50:39.251Z"
      },
      "deliveryMethod": {
        "id": "5wd2a13-9fha-4f1a-b317-e0vvtcf9efe4",
```

```
          "refId": "Method345",
          "name": "FTP",
          "status": "ACTIVE",
          "createdBy": "User2",
          "createdOn": "2022-04-20T10:50:39.251Z",
          "modifiedBy": "User1",
          "modifiedOn": "2022-04-20T10:50:39.251Z"
        },
        "deliveryFormat": {
          "id": "3h32a13-9cdf-4f1a-b317-e0ttecf9def4",
          "refId": "Format345",
          "name": "XSLX",
          "status": "ACTIVE",
          "createdBy": "User2",
          "createdOn": "2022-04-20T10:50:39.251Z",
          "modifiedBy": "User1",
          "modifiedOn": "2022-04-20T10:50:39.251Z"
        },
        "createdBy": "User2",
        "createdOn": "2022-04-20T10:50:39.251Z",
        "modifiedBy": "User1",
        "modifiedOn": "2022-04-20T10:50:39.251Z"
      }
    ]
  }
```


The following table describes the parameters of each delivery target that is retrieved:

Parameter	Description
processingTime	Time taken (in milliseconds) to complete the API call.
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of delivery targets retrieved.
objects	Details of the retrieved delivery target.
objects > id	System generated unique identifier of the delivery target.
objects > refId	Reference identifier of the delivery target.
objects > name	Name of the delivery target.
objects > description	Description of the delivery target.
objects > isDefault	Parameter that indicates whether the delivery target is the default delivery option for a data collection. This parameter can have one of the following values: - true. The delivery target is the default delivery option for a data collection. - false. The delivery target isn't the default delivery option for a data collection.
objects > status	The status indicates whether the delivery target is available for use to the Data Users that order the data collection. A delivery target can have one of the following statuses: - ACTIVE. The delivery target is available. - INACTIVE. The delivery target is unavailable.

Parameter	Description
objects > physicalLocation	The location where the data is delivered. **Note:** If the value of the managedAccess parameter is ENABLED, the data is not be delivered to the location that is specified in the physicalLocation parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
objects > targetSystemReference	System where the data was delivered.
objects > deliveryTemplate > id	System generated unique identifier of the delivery template that was used to create the delivery target.
objects > deliveryTemplate > refId	Reference identifier of the delivery template.
objects > deliveryTemplate > name	Name of the delivery template.
objects > deliveryTemplate > description	Description of the delivery template.
objects > deliveryTemplate > isDefault	Parameter that indicates whether or not the delivery template is set as the default delivery option for your Data Marketplace instance. The parameter can have one of the following values: - true. The delivery template is the default delivery option. - false. The delivery target isn't the default delivery option.
objects > deliveryTemplate > status	The status indicates whether the delivery template is available to be used to create a delivery target of a data collection. A delivery template can have one of the following statuses: - ACTIVE. The delivery template is available. - INACTIVE. The delivery template is unavailable.
objects > deliveryTemplate > managedAccess	This parameter determines whether a unique data location is created for each order that is fulfilled using a target that is based on this template. This parameter can have one of the following values: - ENABLED. A unique data location is created for each order that is fulfilled using a target that is based on this template. Furthermore, an access management application such as Data Access Management might customize the delivered data based on the characteristics of the data, the Data User and the usage context that they specified in the order. - DISABLED. The same data is made available in a data location that is common to all Data Users. For more information, see the *Manage access to data with Data Access Management* topic in the *Set Up Data Marketplace* help.
objects > deliveryTemplate > deliveryType	The type of delivery. A delivery template can have one of the following types: - AUTOMATIC. The order approval and fulfillment is automated. - MANUAL, a stakeholder of the data collection must approve and fulfill the order manually.
objects > deliveryTemplate > templateOwners	Details of the Delivery Owner that is responsible for the delivery template.

Parameter	Description
objects > deliveryTemplate > targetSystemReference	Target system or resource reference from where the data is obtained.
objects > deliveryTemplate > defaultPhysicalLocation	The default delivery location.
objects > deliveryTemplate > deliveryMethods	Details of the delivery method of the delivery template.
objects > deliveryTemplate > deliveryFormats	Details of the delivery format of the delivery template.
objects > deliveryTemplate > createdBy	System generated unique identifier of the user account that created the delivery template.
objects > deliveryTemplate > createdOn	Date when the delivery template was created.
objects > deliveryTemplate > modifiedBy	System generated unique identifier of the latest user account that modified the delivery template.
objects > deliveryTemplate > modifiedOn	Latest date when the delivery template was modified.
objects > deliveryMethod > id	System generated unique identifier of the delivery method.
objects > deliveryMethod > refId	Reference identifier of the delivery method.
objects > deliveryMethod > name	Name of the delivery method.
objects > deliveryMethod > status	The status indicates whether a delivery method is available to be added to delivery templates. A delivery method can have one of the following statuses: - ACTIVE. The delivery method is available. - INACTIVE. The delivery method is not available.
objects > deliveryMethod > createdBy	System generated unique identifier of the user account that created the delivery method.
objects > deliveryMethod > createdOn	Date when the delivery method was created.
objects > deliveryMethod > modifiedBy	System generated unique identifier of the latest user account that modified the delivery method.
objects > deliveryMethod > modifiedOn	Latest date when the delivery method was modified.
objects > deliveryFormat > id	System generated unique identifier of the delivery format.
objects > deliveryFormat > refId	Reference identifier of the delivery format.
objects > deliveryFormat > name	Name of the delivery format.

Parameter	Description
`objects > deliveryFormat > status`	The status indicates whether a delivery format is available to be added to delivery templates. A delivery format can have one of the following statuses: - `ACTIVE`. The delivery format is available. - `INACTIVE`. The delivery format is not available.
`objects > deliveryFormat > createdBy`	System generated unique identifier of the user account that created the delivery format.
`objects > deliveryFormat > createdOn`	Date when the delivery format was created.
`objects > deliveryFormat > modifiedBy`	System generated unique identifier of the latest user account that modified the delivery format.
`objects > deliveryFormat > modifiedOn`	Latest date when the delivery format was modified.
`objects > createdBy`	System generated unique identifier of the user account that created the delivery target.
`objects > createdOn`	Date when the delivery target was created.
`objects > modifiedBy`	System generated unique identifier of the latest user account that modified the delivery target.
`objects > modifiedOn`	Latest date when the delivery target was modified.

Modify delivery targets

Use a REST API to modify delivery targets in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/provisioning/deliveryTargets**
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`id`	Required. Enter the system generated unique identifier of the delivery target that you want to modify.	For more information about how you can use an API to get the system generated unique identifier of a delivery target, see "Retrieve delivery targets" on page 241.
`refId`	Optional. Enter a reference identifier for the delivery target.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`name`	Required. Enter a name for the delivery target.	Ensure that you enter a unique value. Data Marketplace doesn't consider the letter case when it verifies the uniqueness of the `name` parameter's value. For example, if you try to name a delivery target as "Excel over ipfs" while a delivery target called "Excel over IPFS" already exists, the API call fails.
`description`	Required. Enter a description for the delivery target.	-
`status`	Required. Specify a status for the delivery target. The status determines whether the delivery target is available for use to the Data Users that order the data collection.	Enter one of the following values: - To make the delivery targets available, enter `ACTIVE`. - To make the delivery targets unavailable, enter `INACTIVE`.
`targetSystemReference`	Optional. Enter the target system or resource reference from where the data is obtained..	-
`physicalLocation`	Optional. Enter the location where the data is delivered to a Data User.	-
`deliveryMethodId`	Required. Enter the system generated unique identifier of the delivery method.	For more information about how you can use an API to get the unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.
`deliveryFormatId`	Required. Enter the system generated unique identifier of the delivery format.	For more information about how you can use an API to get the system generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.

Example request

The following example shows how you can use an API to modify a delivery target:

```
{
    "items": [
        {
            "id": "13c937c3-e6d8-3006-a530-f3cd6ecf2a8f",
            "refId": "Target561",
            "name": "Customer DB",
            "description": "Customer DB Delivery updated",
            "status": "ACTIVE",
            "targetSystemReference": "AXON",
            "physicalLocation": "Oracle db ",
            "deliveryMethodId": "c35181e7-7832-3b5c-b0d3-fc2360a82f05",
            "deliveryFormatId": "fe4e89ab-80e9-3e0d-8aba-71b79deab4b8"
        }
    ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify a delivery target:

```
{
    "processingTime": 4483,
    "objects": [
        {
            "index": 1,
            "id": "13c937c3-e6d8-3006-a530-f3cd6ecf2a8f",
            "refId": "Target561",
            "name": "Customer DB"
        }
    ]
}
```

The following table describes the parameters of each delivery target that is modified:

Parameter	Description
index	The position of the delivery target in the objects JSON array. This value does not impact how the delivery target is used by a Data Marketplace user.
id	System generated unique identifier of the delivery target.
refId	Reference identifier of the delivery target.
name	Name of the delivery target.

Add or remove terms of use from data collections

Use a REST API to add terms of use to a data collection or to remove terms of use from a data collection.

Before you make the API call, ensure that the data collection and the terms of use already exist in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections/termsOfUse**
Method	PUT

Note:

- The number of terms of use that you can add per API call depends on the cloud provider the IDMC POD is hosted on. The following table shows the number of terms of use that you can add per API call on each cloud provider:

Cloud provider	Number of terms of use
Amazon Web Services	30
Microsoft Azure	10

- You can call a maximum of 100 APIs per minute.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`dataCollectionId`	Required. Enter the system generated unique identifier of the data collection to which you want to add the terms of use or from which you want to remove terms of use.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`termsOfUse > termsOfUseId`	Required. Enter the system generated unique identifier of the terms of use that you want to add to a data collection or remove from a data collection.	For more information about how you can use an API to get the system generated unique identifier of a terms of use, see "Retrieve terms of use" on page 165.
`termsOfUse > operation`	Required. Specify the action that you want to perform.	Enter one of the following values: - To add terms of use to a data collection, enter `ADD`. - To remove terms of use from a data collection, enter `REMOVE`.

Example request

The following example shows how you can use an API to add terms of use to a data collection:.

```
[
   {
      "dataCollectionId":"599fec17-915c-43ec-91fd-b0078fd4d31d",
      "termsOfUse":[
         {
            "termsOfUseId":"5f4d503b-0fd2-4127-bb66-5c48252d19af",
            "operation":"ADD"
         }
      ]
   }
]
```

Response

When you pass the API payload in the REST client, the client displays a response for the request query based on the parameters you had mapped with values.

If the terms of use is successfully added or removed, the following response is displayed:

```
204 OK code
```

Retrieve the terms of use of a data collection

Use a REST API to retrieve the terms of use of a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/dataCollections/<dataCollectionId>/termsOfUse** <dataCollectionId>: Required. Enter the system generated unique identifier of the data collection for which you want to retrieve the terms of use. For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum is `100`.

Note: The API has no payload.

Example request

The following example shows how you can use an API call to retrieve the terms of use of a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/dataCollections/794a215f-5479-4b55-8e1b-a4866ec9fe82/termsOfUse?limit=100
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the request query based on the data collection that you specified.

The following example shows the response of an API call to retrieve the terms of use of a data collection:


```
{
  "processingTime": 123,
  "offset": 0,
  "limit": 100,
  "totalCount": 230,
  "objects": [
    {
      "id": "7bb0bcc1-23a9-4ffc-9f39-50c7b4df91b0",
      "refId": "TOU-434",
      "name": "Retail only",
      "description": "This data is only for retail employees.",
      "type": "NEUTRAL",
      "status": "DISABLED",
      "acknowledgement": true,
      "referenceLink": null,
      "createdBy": "5tSQ0vG66z9jS0KBQkY84r",
      "createdOn": "2022-05-17T10:05:21.453Z",
      "modifiedBy": "5tSQ0vG66z9jS0KBQkY84r",
      "modifiedOn": "2022-05-17T10:06:57.433Z"
    }
  ]
}
```


The following table describes the parameters of each terms of use that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of terms of use retrieved.
id	System generated unique identifier of the terms of use.
refId	Reference identifier of the terms of use.
name	Name of the terms of use.
description	Description of the terms of use.
type	Type of the terms of use. Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.
status	The status indicates whether the terms of use are available to be added to data collections. A terms of use can have one of the following statuses: - ENABLED. The terms of use are available to be added to data collections. - DISABLED. The terms of use isn't available to be added to data collections.
acknowledgement	Parameter that indicates whether the Data User is required to acknowledge the terms of use when they place an order. The parameter can be one of the following values: - true. The Data User must acknowledge the terms of use when they place an order. - false. The Data User doesn't need to acknowledge the terms of use when they place an order.
referenceLink	Uniform resource identifier of the terms of use.
createdBy	System generated unique identifier of the user account that created the terms of use.

Parameter	Description
createdOn	Date when the terms of use was created.
modifiedBy	System generated unique identifier of the latest user account that modified the terms of use.
modifiedOn	Latest date when the terms of use was modified.

Retrieve data collection rating

Use REST APIs to retrieve the rating of a data collection. You can use this API to retrieve the average rating of the data collection and the rating for each usage context.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/integration/collaboration/<objectId>/interactions/ratings** <objectId>: Required. Enter the system generated unique identifier of the data collection for which you want to retrieve ratings. For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary, the system generated unique identifier is 25158afc-3dfb-44ef-8f3e-cec1e171d0f1.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to retrieve the rating of a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/collaboration/d2313aed-330e-44a0-
bcfa-380ee4a95a62/interactions/ratings
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of the API call:

```
{
  "processingTime": 0,
  "id": "d2313aed-330e-44a0-bcfa-380ee4a95a62",
  "globalRating": 4,
  "contextRatings": [
    {
      "id": "16a5e036-02d7-4c01-a5f7-c99ffca90cde",
      "averageRating": 2
    }
  ]
}
```

The following table contains the parameters in the response body:

Parameter	Description
id	System generated unique identifier of the data collection.
globalRating	Average rating of the data collection for all the usage contexts. This parameter can have a value between 0 and 5.
contextRatings > id	System generated unique identifier of the usage context for which a Data User has rated the data collection.
contextRatings > averageRating	Average rating of the data collection for a usage context. This parameter can have a value between 0 and 5.

CHAPTER 9

Manage requests, orders and consumer accesses

This chapter includes the following topics:

- Data collection requests, 258
- Orders, 268
- Consumer accesses, 302

Data collection requests

If a Data User cannot find a data collection that meets their requirement, they can request for the creation of a new data collection.

Retrieve data collection requests

Use a REST API to retrieve the details of data collection requests in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/requestNewDataCollections**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`requestIds`	Optional. Enter the system generated unique identifier of a data collection request.	To get the system generated unique identifier of a data collection request, open the data collection request. The data collection request page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d`, the system generated unique identifier is `6e5964ec-e0aa-4eac-963a-3dae0fa1d639`. To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`userIds`	Optional. Enter the system generated unique identifier of the user that requested the new data collection.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`status`	Optional. Specify the status of the data collection request.	Enter one of the following values: - To find data collection requests that aren't completed, enter `PENDING`. - To find the data collection requests where a new data collection was created in response to the request, enter `COMPLETED`. - To find rejected data collection requests, enter `REJECTED`. - To find cancelled data collection requests, enter `CANCELLED`.

Parameter	Description	Additional Information
createdDateFrom	Optional. To find data collection requests that were created between a date range, enter the initial date when the data collection requests were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateFrom parameter, ensure that you also enter a value for the createdDateTo parameter.
createdDateTo	Optional. To find data collection requests that were created between a date range, enter the latest date when the data collection requests were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
modifiedDateFrom	Optional. To find data collection requests that were modified between a date range, enter the initial date when the data collection requests were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find data collection requests that were modified between a date range, enter the latest date when the data collection requests were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.

Parameter	Description	Additional Information
`referencedDataCollectionIds`	Optional. Enter the system generated unique identifier of the data collection based on which the new data collection is to be created.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`referencedCategoryIds`	Optional. Enter the system generated unique identifier of the category in which the new data collection is to be created.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum value is `100`.

Parameter	Description	Additional Information
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - JUSTIFICATION - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is sortByField > MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a data collection request:

```
https://{{CDMP_URL}}/api/v1/integration/requestNewDataCollections?
requestIds=407225ad-7870-4678-8169-43829d80c4bc&sortByField=STATUS&sort=DESC&limit=50
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a data collection request:

```
{
  "processingTime": 486,
  "offset": 0,
  "limit": 50,
  "totalCount": 1,
  "objects": [
    {
      "id": "407225ad-7870-4678-8169-43829d80c4bc",
      "refId": "d90574a4-417d-4c34-b9f1-4f2da5fc997a",
      "justification": "None of the data collections contain retail information specific
to the EMEA region.",
      "costCenter": "Retail-2007IQ",
      "referencedCategory": {
        "id": "ad90417f-28bf-44ea-8204-127d70a4a7c9",
        "name": "Retail",
        "description": "This category contains information on the operational data of
retail outlets.",
        "refId": "d00be828-d47c-4e9f-a65f-502ba6b633f9",
        "status": "ACTIVE",
        "effectiveStatus": "ACTIVE"
      },
      "referencedDataCollection": {},
      "createdDataCollection": {},
      "usageContext": {},
```

```
        "status": "PENDING",
        "createdBy": {
          "displayName": "John Doe",
          "id": "8npzPxKim0XjHE4es2gkAc",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "2020202020",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        },
        "createdOn": "2022-09-15T17:04:29.382Z",
        "modifiedBy": {
          "displayName": "John Doe",
          "id": "8npzPxKim0XjHE4es2gkAc",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "2020202020",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        },
        "modifiedOn": "2022-09-15T17:04:29.382Z"
      }
    ]
  }
```


The following table describes the parameters of each data collection request that is retrieved:

Parameter	Description
offset	Start index for paginated results.
limit	Maximum number of results.
totalCount	Number of data collection requests retrieved.
id	System generated unique identifier of the data collection request.
refId	Reference identifier of the data collection request.
justification	Business justification entered by the requestor of the new data collection.
costCenter	Cost center of the requestor of the new data collection.
referencedCategory	Details of the category in which the new data collection is to be created.
referencedCategory > id	System generated unique identifier of the category in which the new data collection is to be created.
referencedCategory > name	Name of the category in which the new data collection is to be created.
referencedCategory > description	Description of the category in which the new data collection is to be created.
referencedCategory > refId	Reference identifier of the category in which the new data collection is to be created.
referencedCategory > status	Status of the category in which the new data collection is to be created.
referencedCategory > effectiveStatus	The effective status of the category in which the new data collection is to be created.

Parameter	Description
referencedDataCollection	Details of the data collection based on which the new data collection is to be created.
createdDataCollection	Details of the new data collection that is created in response to the data collection request.
usageContext	Details of the usage context entered by the requestor of the new data collection.
status	Status of the data collection request. A data collection request can have one of the following statuses: - PENDING. A request for a new data collection is submitted. - COMPLETED. A new data collection was created in response to the request. - REJECTED. The request was rejected by a stakeholder of the category or data collection. - CANCELLED. The data collection request was cancelled by the Data User.
createdBy	Details of the user account that requested a new data collection.
createdOn	Date when the data collection request was created.
modifiedBy	Details of the latest user account that modified the data collection request.
modifiedOn	Latest date when the data collection request was modified.

Reject data collection requests

Use a REST API to reject a request for a new data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/requestNewDataCollections/<Id>/reject** <Id>: Required. Enter the system generated unique identifier of the data collection request that you want to reject. For more information about how you can use an API to get the system generated unique identifier of a data collection request, see "Retrieve data collection requests" on page 258. To get the system generated unique identifier of a data collection request from the Data Marketplace interface, open the data collection request. The data collection request page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d, the system generated unique identifier is 6e5964ec-e0aa-4eac-963a-3dae0fa1d639.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
comment	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to reject a data collection request:

```
https://{{CDMP_URL}}/api/v1/integration/requestNewDataCollections/d2313aed-330e-44a0-bcfa-380ee4a95a62/reject?comment=Reject%20DCR
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection request is rejected successfully:

```
204 OK code
```

Fulfill data collection requests

Use a REST API to fulfill a request for a new data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/requestNewDataCollections/<Id>/fulfill** <Id>: Required. Enter the system generated unique identifier of the data collection request that you want to fulfill. For more information about how you can use an API to get the system generated unique identifier of a data collection request, see "Retrieve data collection requests" on page 258. To get the system generated unique identifier of a data collection request from the Data Marketplace interface, open the data collection request. The data collection request page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d, the system generated unique identifier is 6e5964ec-e0aa-4eac-963a-3dae0fa1d639.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`dataCollectionId`	Required. Enter the system generated unique identifier of the new data collection that is created in response to the data collection request.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`comment`	Optional. Enter a comment about the action taken.	-
`costCenter`	Optional. Enter the cost center of the user that requested the new data collection.	If the requestor entered an incorrect or an invalid cost center, you can enter the correct cost center.

Note: The API has no payload.

Example request

The following example shows how you can use an API to fulfill data collection requests:

```
https://{{CDMP_URL}}/api/v1/integration/requestNewDataCollections/b9992251-
e69d-4fdf-9bc1-f1e19f6c908a/fulfill?
dataCollectionId=7c0198bb-7577-4791-822a-6a5c62ceff4c&comment=Fulfill
%20DCR&costCenter=FulfillDCRCostCenter
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection request is fulfilled successfully:

```
204 OK code
```

Cancel data collection requests

Use a REST API to cancel a request for a new data collection in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/requestNewDataCollections/<Id>/cancel** <Id>: Required. Enter the system generated unique identifier of the data collection request that you want to cancel. For more information about how you can use an API to get the system generated unique identifier of a data collection request, see "Retrieve data collection requests" on page 258. To get the system generated unique identifier of a data collection request from the Data Marketplace interface, open the data collection request. The data collection request page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d`, the system generated unique identifier is `6e5964ec-e0aa-4eac-963a-3dae0fa1d639`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to cancel a data collection request:

```
https://{{CDMP_URL}}/api/v1/integration/requestNewDataCollections/d2313aed-330e-44a0-bcfa-380ee4a95a62/cancel?comment=Cancel%20DCR
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection request is cancelled successfully:

```
204 OK code
```

Delete data collection requests

If you submitted a data collection request accidentally or if a data collection request is obsolete, you can use a REST API to delete the request.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/requestNewDataCollections/<Id>** <Id>: Required. Enter the system generated unique identifier of the data collection request that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a data collection request, see "Retrieve data collection requests" on page 258. To get the system generated unique identifier of a data collection request from the Data Marketplace interface, open the data collection request. The data collection request page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d`, the system generated unique identifier is `6e5964ec-e0aa-4eac-963a-3dae0fa1d639`.
Method	DELETE

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a data collection request:

```
https://{{CDMP_URL}}/api/v1/integration/requestNewDataCollections/d2313aed-330e-44a0-bcfa-380ee4a95a62
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the data collection request is deleted successfully:

```
204 OK code
```

Orders

An order is a request made by a Data User to gain access to a data collection. A Data User's order is reviewed by the stakeholders of the data collection who are responsible for the approval and fulfillment of the order.

Retrieve orders

Use REST APIs to retrieve the details of orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`orderIds`	Optional. Enter the system generated unique identifier of an order.	To get the system generated unique identifier of a order, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`. To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`dataCollectionIds`	Optional. Enter the system generated unique identifier of the ordered data collection.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.

Parameter	Description	Additional Information
`ordersCreatedBy`	Optional. Enter the system generated unique identifier of the user accounts of the Data Users that placed the order.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`collectionDataOwners`	Optional. Enter the system generated unique identifier of the user accounts of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.	To get the system generated system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`collectionTechOwners`	Optional. Enter the system generated unique identifier of the user accounts of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`status`	Optional. Specify the status of the order.	Enter one of the following values: - To find the orders that are approved for fulfillment, enter `APPROVED`. - To find rejected orders, enter `REJECTED`. - To find fulfilled orders, enter `COMPLETE`. - To find cancelled orders, enter `CANCELLED`.

Parameter	Description	Additional Information
`categoryIds`	Optional. Enter the system generated unique identifier of the category that contains the ordered data collection.	For more information about how you can use an API to get the system generated unique identifier of a category, see "Retrieve categories" on page 124. To get the system generated unique identifier of a category from the Data Marketplace interface, open the category. The category page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
`categoryOwners`	Optional. System generated unique identifier of the owners of the category that contains the ordered data collection.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`createdDateFrom`	Optional. To find orders that were created between a date range, enter the initial date when the orders were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateFrom` parameter, ensure that you also enter a value for the `createdDateTo` parameter.
`createdDateTo`	Optional. To find orders that were created between a date range, enter the latest date when the orders were created.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the `createdDateTo` parameter, ensure that you also enter a value for the `createdDateFrom` parameter.

Parameter	Description	Additional Information
modifiedDateFrom	Optional. To find orders that were modified between a date range, enter the initial date when the orders were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateFrom parameter, ensure that you also enter a value for the modifiedDateTo parameter.
modifiedDateTo	Optional. To find orders that were modified between a date range, enter the latest date when the orders were modified.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the modifiedDateTo parameter, ensure that you also enter a value for the modifiedDateFrom parameter.
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default value is MODIFIED_ON.
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default value is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default value is 0.
limit	Optional. Enter the maximum number of results.	Default value is 50. Maximum value is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve and display order details :

```
https://{{CDMP_URL}}/api/v1/integration/orders?
limit=100&status=APPROVED&ordersCreatedBy=User1&sortByField=MODIFIED_BY&sort=ASC
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve and display order details:


```
{
    "processingTime": 1789,
    "offset": 0,
    "limit": 100,
    "totalCount": 195,
    "objects": [
      {
        "justification": "Sales analytics",
        "deliveryRequests": null,
        "requestedProvisionedTargetRef": null,
        "refId": "ORD-374",
        "dataCollections": [
          {
            "id": "908626d6-39fb-4bdd-933d-8e275240c8c3",
            "name": "DS",
            "description": "DS",
            "refId": "DCL-993",
            "category": {
              "id": "b51f8cc7-fd05-4759-a63b-342268c24e29",
              "refId": "CAT-613",
              "parentId": null,
              "parentRefId": null,
              "parent": null,
              "name": "Category",
              "description": "Category",
              "status": "ACTIVE",
              "effectiveStatus": "ACTIVE",
              "hasChildCategory": false,
              "hasActiveChildCategory": false,
              "dataOwners": [],
              "createdBy": {
                "displayName": "Johnny Doe",
                "id": "6bX1o0lH3UmbPuF0OF5lkj",
                "name": "15Jul_CDMP_QE",
                "email": "jydoe@informatica.com",
                "phone": "555-243-456",
                "status": "ACTIVE",
                "userInfo": {},
                "isGroup": "true"
              },
              "createdOn": "2022-07-15T19:04:56.151Z",
              "modifiedBy": {
                "displayName": "Johnny Doe",
                "id": "6bX1o0lH3UmbPuF0OF5lkj",
                "name": "15Jul_CDMP_QE",
                "email": "jydoe@informatica.com",
                "phone": "555-243-456",
                "status": "ACTIVE",
                "userInfo": {},
                "isGroup": "true"
              },
              "modifiedOn": "2022-07-15T19:04:56.151Z"
            },
            "usageContexts": [],
            "dataset": [],
            "dataCollectionStatus": "PUBLISHED",
            "dataOwners": [
              {
                "displayName": "Jane Doe",
                "id": "11bnOFaMvrXc0kal2bPXUX",
                "name": "Jane Doe",
                "email": "jdoe@informatica.com",
                "phone": "8758939746",
```

```
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": "true"
      }
    ],
    "technicalOwners": [
      {
        "displayName": "John Doe",
        "id": "aH2O7v8jSgqeZDYHe45NAJ",
        "name": "John Doe",
        "email": "jdoe@informatica.com",
        "phone": "8758939746",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": "true"
      }
    ],
    "createdBy": {
      "displayName": "User1",
            "id": "6bX1o0lH3UmbPuF0OF5lkj",
            "name": "User1_name",
            "email": "ebc@xyz.com",
            "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-15T19:46:46.866Z",
    "modifiedBy": {
      "displayName": "Johnny Doe",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "15Jul_CDMP_QE",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-15T19:46:46.866Z"
  }
],
"termsOfUse": [
  {
    "id": "1b6b2651-bed6-4cc6-bd41-2f1091cc07a1",
    "termsOfUseId": null,
    "termsOfUseRefId": null,
    "generalTermsOfUse": "{"tosMessage":"general terms of use "}",
    "name": Accessible,
    "description": "This data is accessible to anyone in the organization",
    "type": "ACCESSIBLE",
    "status": "ENABLED",
    "acknowledgement": false,
    "parentId": null,
    "referenceLink": null,
    "createdOn": "2022-07-15T19:07:55.552Z"
  }
],
"status": "APPROVED",
"id": "875a5d43-6d91-473c-ac42-eb02cfe059d9",
"usageContext": null,
"createdBy": {
  "displayName": "Johnny Doe",
  "id": "6bX1o0lH3UmbPuF0OF5lkj",
  "name": "15Jul_CDMP_QE",
  "email": "jydoe@informatica.com",
  "phone": "555-243-456",
  "userInfo": {},
  "isGroup": "true"
},
"createdOn": "2022-07-15T19:47:28.598Z",
```

```
  "modifiedBy": {
    "displayName": "Johnny Doe",
    "id": "6bX1o0lH3UmbPuF0OF5lkj",
    "name": "15Jul_CDMP_QE",
    "email": "jydoe@informatica.com",
    "phone": "555-243-456",
    "userInfo": {},
    "isGroup": "true"
  },
  "modifiedOn": "2022-07-15T19:47:46.143Z"
},
{
  "justification": "Standard retail tasks.",
  "deliveryRequests": "No specification.",
  "requestedProvisionedTargetRef": null,
  "refId": "ORD-834",
  "dataCollections": [
    {
      "id": "a290034e-0362-434f-a3cc-7f659e009fae",
      "name": "Collection_TSKV1",
      "description": "Automation",
      "refId": "Collection_TSKV1",
      "category": {
        "id": "dac80150-bde3-4c8f-9129-9e56893de367",
        "refId": "CAT-173",
        "parentId": null,
        "parentRefId": null,
        "parent": null,
        "name": "Category_TSKV1",
        "description": "Automation",
        "status": "ACTIVE",
        "effectiveStatus": "ACTIVE",
        "hasChildCategory": false,
        "hasActiveChildCategory": true,
        "dataOwners": [],
        "createdBy": {
          "displayName": "John Doe",
          "id": "f400dUqjPuaiJ9KBrzOhiB",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "00000099999999999",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": "true"
        },
        "createdOn": "2022-07-16T12:06:57.049Z",
        "modifiedBy": {
          "displayName": "John Doe",
          "id": "f400dUqjPuaiJ9KBrzOhiB",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "00000099999999999",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": "true"
        },
        "modifiedOn": "2022-07-16T12:06:57.049Z"
      },
      "usageContexts": null,
      "dataset": null,
      "dataCollectionStatus": "PUBLISHED",
      "dataOwners": [],
      "technicalOwners": [],
      "createdBy": {
        "displayName": "User1",
              "id": "6bX1o0lH3UmbPuF0OF5lkj",
              "name": "User1_name",
              "email": "ebc@xyz.com",
              "phone": "555-243-456",
        "status": "ACTIVE",
```

```
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-16T12:07:04.596Z",
    "modifiedBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-16T12:07:04.596Z"
  }
],
"termsOfUse": [
  {
    "id": "1b6b2651-bed6-4cc6-bd41-2f1091cc07a1",
    "termsOfUseId": null,
    "termsOfUseRefId": null,
    "generalTermsOfUse": "{"tosMessage":"general terms of use "}",
    "name": Accessible,
    "description": "This data is accessible to anyone in the organization",
    "type": "ACCESSIBLE",
    "status": "ENABLED",
    "acknowledgement": false,
    "parentId": null,
    "referenceLink": null,
    "createdOn": "2022-07-15T19:07:55.552Z"
  }
],
"status": "APPROVED",
"id": "338a4dba-54f3-4a4b-b7d2-180c07dee68a",
"usageContext": null,
"costCenter": "ORG001-IQ",
"customFields”: [
  {
    "name”: "com.infa.odin.models.custom.ca_6713129624402817413",
    "value”: "2023-04-19",
    "values”: null
  },
  {
    "name”: "com.infa.odin.models.custom.ca_4689891014995490684",
    "value”: null,
    "values”: ["Ferrari","Koenigsegg","Lamborghini"]
  },
  {
    "name”: "com.infa.odin.models.custom.ca_1100233073247017453",
    "value”: "Automobiles",
    "values”: null
  },
  {
    "name”: "com.infa.odin.models.custom.ca_6863327120603592729",
    "value”: "Luxury Ride Services",
    "values”: null
  },
  {
    "name”: "com.infa.odin.models.custom.ca_5660854643729475562",
    "value”: "true",
    "values”: null
  },
  {
    "name”: "com.infa.odin.models.custom.ca_1844904614209918604",
    "value”: "European Manufacturers",
    "values”: null
  },
  {
    "name”: "com.infa.odin.models.custom.ca_1590048468319648867",
```

```
            "value": "10",
            "values": null
          },
          {
            "name": "com.infa.odin.models.custom.ca_62634611096284755",
            "value": "12.5",
            "values": null
          },
          {
            "name": "com.infa.odin.models.custom.ca_5429811987158518158",
            "value": "false",
            "values": null
          },
          {
            "name": "com.infa.odin.models.custom.ca_6366370263733010093",
            "value": "Cars",
            "values": null
          }
        ],

        "createdBy": {
          "displayName": "John Doe",
          "id": "f400dUqjPuaiJ9KBrzOhiB",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "00000099999999999",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": "true"
        },
        "createdOn": "2022-07-16T12:07:54.597Z",
        "modifiedBy": {
          "displayName": "John Doe",
          "id": "f400dUqjPuaiJ9KBrzOhiB",
          "name": "John Doe",
          "email": "jdoe@informatica.com",
          "phone": "00000099999999999",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": "true"
        },
        "modifiedOn": "2022-07-16T12:08:03.463Z"
      }
    ]
  }
```


The following table describes the parameters of each order that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of orders retrieved.
justification	The reason entered at the time of order by the Data User to the stakeholder for the requirement of access to the data.
deliveryRequests	Delivery information of the order.

Parameter	Description
requestedProvisionedTargetRef	The delivery target requested by the Data User. **Note:** If the value of the requestedProvisionedTargetRef parameter is null, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
refId	Reference identifier of the order.
createdBy	Details of the user account that created the order.
createdOn	Date when the order was created.
modifiedBy	Details of the latest user account that modified the order.
modifiedOn	Date when the order was modified.
dataCollections > id	System generated unique identifier of the ordered data collection.
dataCollections > name	Name of the ordered data collection.
dataCollections > description	Purpose of the ordered data collection.
dataCollections > refId	Reference identifier of the ordered data collection.
dataCollections > category	Details of the category that contains the ordered data collection.
dataCollections > usageContexts	Details of the usage type that is used to specify the certified use of the ordered data collection.
dataCollections > dataCollectionStatus	The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - PUBLISHED. The data collection is discoverable to Data Users. - UNPUBLISHED. The data collection isn't discoverable to Data Users.
dataCollections > dataOwners	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
dataCollections > technicalOwners	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
dataCollections > createdBy	Details of the user account that created the ordered collection.
dataCollections > createdOn	Date when the ordered collection was created.
dataCollections > modifiedBy	Details of the latest user account that modified the ordered collection.
dataCollections > modifiedOn	Latest date when the ordered data collection was modified.

Parameter	Description
`termsOfUse`	Details of the terms of use that apply to the ordered data collection.
`termsOfUse > id`	System generated unique identifier of the terms of use snapshot. The terms of use snapshot represents the state of the terms of use of the data collection when the order was placed.
`termsOfUse > termsOfUseId`	System generated unique identifier of the terms of use that apply to the ordered data collection.
`termsOfUse > termsOfUseRefId`	Reference identifier of the terms of use that apply to the ordered data collection.
`termsOfUse > generalTermsOfUse`	Details of the general terms of use that apply to the ordered data collection.
`termsOfUse > name`	Name of the terms of use that apply to the ordered data collection.
`termsOfUse > description`	Description of the terms of use that apply to the ordered data collection.
`termsOfUse > type`	Type of the terms of use that apply to the ordered data collection. Your administrator defines the terms of use types in Metadata Command Center. For more information about terms of use, see the *Terms of use* topic in the *Set Up Data Marketplace* help.
`termsOfUse > status`	The status indicates whether the terms of use are available to be added to data collections. A terms of use can have one of the following statuses: - `ENABLED`. The terms of use are available to be added to data collections. - `DISABLED`. The terms of use isn't available to be added to data collections.
`termsOfUse > acknowledgement`	Parameter that indicates whether the Data User is required to acknowledge the terms of use when they place an order. The parameter can be one of the following values: - `true`. The Data User must acknowledge the terms of use when they place an order. - `false`. The Data User doesn't need to acknowledge the terms of use when they place an order.
`termsOfUse > referenceLink`	Uniform resource identifier of the terms of use.
`termsOfUse > createdOn`	Date when the terms of use that apply to the ordered data collection were created.

Parameter	Description
status	Status of the order. An order can have one of the following statuses: - APPROVED. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - REJECTED. The order was rejected by a stakeholder of the ordered data collection. - COMPLETE. The ordered data was delivered to the Data User. - CANCELLED. The order was cancelled.
id	System generated unique identifier of the order.
usageContext	Details of the usage context that the Data User selected at the time of order.
costCenter	Cost center of the Data User that placed the order.
customFields	The custom fields of the order and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	System generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Approve orders

Use REST APIs to approve orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/<orderId>/approve** <orderId>: Required. Enter the system generated unique identifier of the order that you want to approve. For more information about how you can use an API to get the system generated unique identifier of a order, see "Retrieve orders" on page 268. To get the system generated unique identifier of a order from the Data Marketplace interface, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`comment`	Optional. Enter a comment about the action taken.	-
`costCenter`	Optional. Enter a cost center value.	You can use this parameter to modify the cost center that the Data User entered at the time of order.

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`customFields`	The header where you can modify the custom attributes of the order.	You can use this parameter to modify the additional information that the Data User entered at the time of order. Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attribute, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customFields > name`	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
`customFields > value`	The custom attribute value.	This parameter can have only a single value.
`customFields > values`	The custom attribute value.	This parameter can have multiple values.

Example request

The following example shows how you can use an API to approve an order:

Request query

```
https://{{CDMP_URL}}/api/v1/integration/orders/16e32a13-6fba-4f1a-a337-e0aeecf9fab4/
approve
```

Request body

```
{
  "customFields": [
    {
      "name": "com.infa.odin.models.custom.ca_6713129624402817413",
      "value": "2023-04-19"
    },
    {
      "name": "com.infa.odin.models.custom.ca_1590048468319648867",
      "value": 10
    },
    {
      "name": "com.infa.odin.models.custom.ca_5660854643729475562",
      "value": true
    },
    {
      "name": "com.infa.odin.models.custom.ca_62634611096284755",
      "value": 12.5
    },
    {
      "name": "com.infa.odin.models.custom.ca_4689891014995490684",
      "values": ["Ferrari","Koenigsegg","Lamborghini"]
    },
    {
      "name": "com.infa.odin.models.custom.ca_5429811987158518158",
      "value": false
```

```
        },
        {
          "name": "com.infa.odin.models.custom.ca_1100233073247017453",
          "value": "Automobiles"

        },
        {
          "name": "com.infa.odin.models.custom.ca_1844904614209918604",
          "value": "European Manufacturers"

        },
        {
          "name": "com.infa.odin.models.custom.ca_6863327120603592729",
          "value": "Luxury Ride Services"

        }

      ]
    }
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to approve an order:

```
{
    "justification": "Justification",
    "deliveryRequests": "This order is to be approved from CAI",
    "requestedProvisionedTargetRef": "d02e28ea-6686-4954-85c7-d60c33e4e9c5",
    "refId": "ORD-693",
    "status": "APPROVED",
    "id": "16e32a13-6fba-4f1a-a337-e0aeecf9fab4",
    "createdBy": {
      "displayName": "User1",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "User1_name",
      "email": "ebc@xyz.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-21T17: 17: 16.901Z",
    "modifiedBy": {
      "displayName": "User1",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "User1_name",
      "email": "ebc@xyz.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-22T07: 47: 23.384Z",
    "costCenter": "ORG001-IQ"
  }
```

The following table describes the parameters of each order that is approved:

Parameter	Description
justification	Business justification of the action taken on the order.
deliveryRequests	Delivery information of the order.
requestedProvisionedTargetRef	The delivery target requested by the Data User. **Note:** If the value of the requestedProvisionedTargetRef parameter is null, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
refId	Reference identifier of the order.
status	Status of the order. An order can have one of the following statuses: - APPROVED. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - REJECTED. The order was rejected by a stakeholder of the ordered data collection. - COMPLETE. The ordered data was delivered to the Data User. - CANCELLED. The order was cancelled.
id	System generated unique identifier of the order.
createdBy > displayName	Name of the user that placed the order.
createdBy > id	Reference identifier of the order creator's user account.
createdBy > name	Username of the user that placed the order.
createdBy > email	Email address of the user that placed the order.
createdBy > phone	Contact number of the user that placed the order.
createdBy > status	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - ACTIVE. The user account or user group is active. - INACTIVE. The user account or user group is not active.
createdBy > userInfo	Details retrieved from the **My Data** page of the user account that placed the order.
createdBy > isGroup	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - true. The user account is part of a group - false. The user account isn't part of a group
createdOn	Date when the order was placed.
modifiedBy > displayName	Name of the last user that modified the order.
modifiedBy > id	Reference identifier of the user account of the last user that modified the order.
modifiedBy > name	Username of the last user that modified the order.

Parameter	Description
`modifiedBy > email`	Email address of the last user that modified the order.
`modifiedBy > phone`	Contact number of the last user that modified the order.
`modifiedBy > status`	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The user account or user group is active. - `INACTIVE`. The user account or user group is not active.
`modifiedBy > userInfo`	Details retrieved from the **My Data** page of the user account that last modified the order.
`modifiedBy > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`modifiedOn`	Latest date when the order was modified.
`costCenter`	The cost center of the Data User that placed the order.

Reject orders

Use REST APIs to reject orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/<orderId>/reject** `<orderId>`: Required. Enter the system generated unique identifier of the order that you want to reject. For more information about how you can use an API to get the system generated unique identifier of a order, see "Retrieve orders" on page 268. To get the system generated unique identifier of a order from the Data Marketplace interface, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
comment	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to reject an order:

```
https://{{CDMP_URL}}/api/v1/integration/orders/16e32a13-6fba-4f1a-a337-e0aeecf9fab4/
reject
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to reject an order:

```
{
    "justification": "Justification",
    "deliveryRequests": "This order is to be cancelled from CAI",
    "requestedProvisionedTargetRef": "d02e28ea-6686-4954-85c7-d60c33e4e9c5",
    "refId": "ORD-693",
    "status": "CANCELLED",
    "id": "ORD-693",
    "createdBy": {
      "displayName": "User1",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "User1_name",
      "email": "ebc@xyz.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-21T17: 17: 16.901Z",
    "modifiedBy": {
      "displayName": "User1",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "User1_name",
      "email": "ebc@xyz.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-22T07: 47: 23.384Z"
  }
```

The following table describes the parameters of each order that is rejected:

Parameter	Description
`justification`	Business justification of the action taken on the order.
`deliveryRequests`	Delivery information of the order.
`requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
`refId`	Reference identifier of the order.
`status`	Status of the order. An order can have one of the following statuses: - `APPROVED`. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - `REJECTED`. The order was rejected by a stakeholder of the ordered data collection. - `COMPLETE`. The ordered data was delivered to the Data User. - `CANCELLED`. The order was cancelled.
`id`	System generated unique identifier of the order.
`createdBy > displayName`	Name of the user that placed the order.
`createdBy > id`	Reference identifier of the order creator's user account.
`createdBy > name`	Username of the user that placed the order.
`createdBy > email`	Email address of the user that placed the order.
`createdBy > phone`	Contact number of the user that placed the order.
`createdBy > status`	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The user account or user group is active. - `INACTIVE`. The user account or user group is not active.
`createdBy > userInfo`	Details retrieved from the **My Data** page of the user account that placed the order.
`createdBy > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`createdOn`	Date when the order was placed.
`modifiedBy > displayName`	Name of the last user that modified the order.
`modifiedBy > id`	Reference identifier of the user account of the last user that modified the order.
`modifiedBy > name`	Username of the last user that modified the order.

Parameter	Description
`modifiedBy > email`	Email address of the last user that modified the order.
`modifiedBy > phone`	Contact number of the last user that modified the order.
`modifiedBy > status`	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The user account or user group is active. - `INACTIVE`. The user account or user group is not active.
`modifiedBy > userInfo`	Details retrieved from the **My Data** page of the user account that last modified the order.
`modifiedBy > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`modifiedOn`	Latest date when the order was modified.

Fulfill orders

Use REST APIs to fulfill orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/<orderId>/fulfill** `<orderId>`: Required. Enter the system generated unique identifier of the order that you want to fulfill. For more information about how you can use an API to get the system generated unique identifier of a order, see "Retrieve orders" on page 268. To get the system generated unique identifier of a order from the Data Marketplace interface, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`deliveryTargetId`	Required. Enter the system generated unique identifier of the delivery target that you want to use to deliver the data.	For more information about how you can use an API to get the unique identifier of a delivery target, see "Retrieve delivery targets" on page 241.
`comment`	Optional. Enter a comment about the action taken.	-
`costCenter`	Optional. Enter a cost center value.	You can use this parameter to modify the cost center that the Data User entered at the time of order.

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`customFields`	The header where you can modify the custom attributes of the order.	You can use this parameter to modify the additional information that the Data User entered at the time of order. Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your Administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customFields > name`	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
`customFields > value`	The custom attribute value.	This parameter can have only a single value.
`customFields > values`	The custom attribute value.	This parameter can have multiple values.

Example request

The following example shows how you can use an API to fulfill an order:

Request query

```
https://{{CDMP_URL}}/api/v1/integration/orders/16e32a13-6fba-4f1a-a337-e0aeecf9fab4/
fulfill?deliveryTargetId=16e32a13-6fba-4f1a-a337-e0aeecf9fab4
```

Request body

```
{
  "customFields": [
```

```
        {
          "name": "com.infa.odin.models.custom.ca_6713129624402817413",
          "value": "2023-04-19"
        },
        {
          "name": "com.infa.odin.models.custom.ca_1590048468319648867",
          "value": 10
        },
        {
          "name": "com.infa.odin.models.custom.ca_5660854643729475562",
          "value": true
        },
        {
          "name": "com.infa.odin.models.custom.ca_62634611096284755",
          "value": 12.5
        },
        {
          "name": "com.infa.odin.models.custom.ca_4689891014995490684",
          "values": ["Ferrari","Koenigsegg","Lamborghini"]
        },
        {
          "name": "com.infa.odin.models.custom.ca_5429811987158518158",
          "value": false
        },
        {
          "name": "com.infa.odin.models.custom.ca_1100233073247017453",
          "value": "Automobiles"
        },
        {
          "name": "com.infa.odin.models.custom.ca_1844904614209918604",
          "value": "European Manufacturers"
        },
        {
          "name": "com.infa.odin.models.custom.ca_6863327120603592729",
          "value": "Luxury Ride Services"
        }
      ]
    }
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to fulfill an order:

```
{
  "Result": {
    "id": "8002f8f4-99ae-4389-8588-45442fe49969",
    "refId": "ACC-756",
    "status": "AVAILABLE",
    "accessGrantedOn": "2022-07-22T08:37:41.415Z",
    "order": {
      "justification": "Sales analytics",
      "deliveryRequests": "This order is to be fulfilled from CAI",
      "requestedProvisionedTargetRef": "d02e28ea-6686-4954-85c7-d60c33e4e9c5",
      "refId": "ORD-693",
      "dataCollections": [
        {
          "id": "e40b023f-4064-4974-9705-4d510bd14b26",
          "name": "Collection - Order",
          "description": "Collection to place order on",
          "refId": "DCL-341",
          "category": {
            "id": "e979b800-91ec-4e2d-8271-53e289935d78",
            "refId": "CAT-736",
            "parentId": null,
            "parentRefId": null,
            "parent": null,
```

```
      "name": "Category with collections under it",
      "description": " Category with collections under it ",
      "status": "ACTIVE",
      "effectiveStatus": "ACTIVE",
      "hasChildCategory": false,
      "hasActiveChildCategory": false,
      "dataOwners": [],
      "createdBy": {
        "displayName": "John Doe",
        "id": "f400dUqjPuaiJ9KBrzOhiB",
        "name": "John Doe",
        "email": "jdoe@informatica.com",
        "phone": "00000099999999999",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": "true"
      },
      "createdOn": "2022-07-18T11:05:08.794Z",
      "modifiedBy": {
        "displayName": "John Doe",
        "id": "f400dUqjPuaiJ9KBrzOhiB",
        "name": "John Doe",
        "email": "jdoe@informatica.com",
        "phone": "00000099999999999",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": "true"
      },
      "modifiedOn": "2022-07-18T11:05:08.794Z"
    },
    "usageContexts": [],
    "dataset": [],
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [],
    "technicalOwners": [],
    "createdBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
      },
    "createdOn": "2022-07-18T11:05:12.935Z",
    "modifiedBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
      },
    "modifiedOn": "2022-07-18T11:05:12.935Z"
  }
],
"termsOfUseSnapshots": [],
"status": "COMPLETE",
"inheritedGroupIds": [],
"id": "0a7341db-b5b2-4673-a5fe-c7b731d1bd5c",
"usageContext": {},
"createdBy": {
  "displayName": "Johnny Doe",
  "id": "6bX1o0lH3UmbPuF0OF5lkj",
  "name": "15Jul_CDMP_QE",
  "email": "jydoe@informatica.com",
  "phone": "555-243-456",
```

```
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
      },
    },
    "createdOn": "2022-07-22T08:34:30.288Z",
    "modifiedBy": {
      "displayName": "Johnny Doe",
      "id": "6bX1o0lH3UmbPuF0OF5lkj",
      "name": "15Jul_CDMP_QE",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE"
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-22T08:37:46.974Z",
    "costCenter": "ORG001-IQ"
  },
  "deliveryTarget": {
    "id": "d02e28ea-6686-4954-85c7-d60c33e4e9c5",
    "name": "XLSX over IPFS",
    "description": "An excel workbook sent over IPFS.",
    "isDefault": false,
    "status": "ACTIVE",
    "physicalLocation": "AK",
    "targetSystemReference": "AK",
    "deliveryTemplate": {
      "id": "9bf52d89-7ade-479b-ad88-d657064e6301",
      "name": "XLSX over IPFS",
      "description": "An excel workbook sent over IPFS.",
      "isDefault": false,
      "status": "ACTIVE",
      "managedAccess": "DISABLED",
      "deliveryType": "MANUAL",
      "templateOwners": [],
      "targetSystemReference": "AK",
      "defaultPhysicalLocation": "AK",
      "deliveryMethods": null,
      "deliveryFormats": null,
      "createdBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "createdOn": "2022-07-19T12:40:50.855Z",
      "modifiedBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "modifiedOn": "2022-07-19T17:42:55.341Z"
    },
    "deliveryMethod": {
      "id": "f8b34c4f-bd69-4dd6-9d41-221075444abf",
      "name": "AK",
      "status": "ACTIVE",
      "createdBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "createdOn": "2022-07-19T12:40:24.123Z",
      "modifiedBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "modifiedOn": "2022-07-19T12:40:31.332Z"
    },
    "deliveryFormat": {
      "id": "c6fbbaa4-68f4-4005-a1fb-80bb34ec3707",
      "name": "AK",
      "status": "ACTIVE",
      "createdBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "createdOn": "2022-07-19T12:39:44.926Z",
      "modifiedBy": "6bX1o0lH3UmbPuF0OF5lkj",
      "modifiedOn": "2022-07-19T12:39:52.834Z"
    },
    "dataCollection": {
      "id": "e40b023f-4064-4974-9705-4d510bd14b26",
      "name": "123456789021658142310877",
      "description": "CollectionDescSkearch221658142310875",
      "refId": "DCL-341",
      "category": {},
      "usageContexts": [],
```

```
    "dataset": [],
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [],
    "technicalOwners": [],
    "createdBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-18T11:05:12.935Z",
    "modifiedBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "modifiedOn": "2022-07-18T11:05:12.935Z"
  },
  "createdBy": "6bX1o0lH3UmbPuF0OF5lkj",
  "createdOn": "2022-07-22T08:34:08.916Z",
  "modifiedBy": "6bX1o0lH3UmbPuF0OF5lkj",
  "modifiedOn": "2022-07-22T08:34:08.916Z"
},
"dataCollection": {
  "id": "e40b023f-4064-4974-9705-4d510bd14b26",
  "name": "123456789021658142310877",
  "description": "CollectionDescSkearch221658142310875",
  "refId": "DCL-341",
  "category": {
    "id": "e979b800-91ec-4e2d-8271-53e289935d78",
    "refId": "CAT-736",
    "parentId": null,
    "parentRefId": null,
    "parent": null,
    "name": "CategorySkearchName221658142307670",
    "description": "CategorySkearchDesc221658142307671",
    "status": "ACTIVE",
    "effectiveStatus": "ACTIVE",
    "hasChildCategory": false,
    "hasActiveChildCategory": false,
    "dataOwners": [],
    "createdBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
    },
    "createdOn": "2022-07-18T11:05:08.794Z",
    "modifiedBy": {
      "displayName": "John Doe",
      "id": "f400dUqjPuaiJ9KBrzOhiB",
      "name": "John Doe",
      "email": "jdoe@informatica.com",
      "phone": "00000099999999999",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": "true"
```

```
    },
    "modifiedOn": "2022-07-18T11:05:08.794Z"
  },
  "usageContexts": [],
  "dataset": [],
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [],
  "technicalOwners": [],
  "createdBy": {
    "displayName": "John Doe",
    "id": "f400dUqjPuaiJ9KBrzOhiB",
    "name": "John Doe",
    "email": "jdoe@informatica.com",
    "phone": "00000099999999999",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": "true"
  },
  "createdOn": "2022-07-18T11:05:12.935Z",
  "modifiedBy": {
    "displayName": "John Doe",
    "id": "f400dUqjPuaiJ9KBrzOhiB",
    "name": "John Doe",
    "email": "jdoe@informatica.com",
    "phone": "00000099999999999",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": "true"
    },
  "modifiedOn": "2022-07-18T11:05:12.935Z"
},
"termsOfUseSnapshots": [
  {
    "id": "26c594c2-4b78-4e6b-b171-22364b4eadc8",
    "termsOfUseId": null,
    "termsOfUseRefId": null,
    "generalTermsOfUse": "{"tosMessage\":"General TOU Order Submission"}",
    "name": Accessible,
    "description": "This data is available to everyone in the organization",
    "type": "ACCESSIBLE",
    "status": "ENABLED",
    "acknowledgement": false,
    "parentId": null,
    "referenceLink": null,
    "createdOn": "2022-07-21T14:44:05.962Z"
  }
],
"consumer": {
  "displayName": "Johnny Doe",
  "id": "6bX1o0lH3UmbPuF0OF5lkj",
  "name": "15Jul_CDMP_QE",
  "email": "jydoe@informatica.com",
  "phone": "555-243-456",
  "status": "ACTIVE",
  "userInfo": {},
  "isGroup": "true"
  },
"usageContext": {
"id": "7dead27e-9d00-4a05-b286-70bef9c91402",
"name": "uc",
"description": null,
"status": "ACTIVE"
},
"createdBy": {
  "displayName": "User1",
  "id": "6bX1o0lH3UmbPuF0OF5lkj",
  "name": "User1_name",
  "email": "ebc@xyz.com",
  "phone": "555-243-456",
  "status": "ACTIVE",
```

```
        "userInfo": {},
        "isGroup": "true"
        },
      "createdOn": "2022-07-22T08:37:41.764Z",
      "modifiedBy": {
        "displayName": "User1",
        "id": "6bX1o0lH3UmbPuF0OF5lkj",
        "name": "User1_name",
        "email": "ebc@xyz.com",
        "phone": "555-243-456",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": "true"
        },
      "modifiedOn": "2022-07-22T08:37:41.764Z",
      "customFields": [
          {
            "name": "Year",
            "value": "2021",
            "values": null
          }
    }
  }
```

The following table describes the parameters of each order that is fulfilled:

Parameter	Description
`id`	System generated unique identifier of the consumer access that is created after the order is fulfilled.
`refId`	Referenced identifier of the consumer access that is created after the order is fulfilled.
`status`	Status of the consumer access that is created after the order is fulfilled. A consumer access can have the following statuses: - `AVAILABLE`. The Data User has access to the data collection. - `PENDING_WITHDRAW`. A request is submitted to withdraw the Data User's access to the data collection. - `WITHDRAWN`. The Data User's access to the data collection is withdrawn. **Note:** For a consumer access that is created after an order is fulfilled, the status is always `AVAILABLE`.
`accessGrantedOn`	Date when the order was fulfilled.
`order > justification`	The reason entered at the time of order by the Data User to the stakeholder for the requirement of access to the data.
`order > deliveryRequests`	Delivery information of the order.
`order > requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.

Parameter	Description
order > termsOfUseSnapshots	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
order > status	Status of the order. An order can have one of the following statuses: - APPROVED. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - REJECTED. The order was rejected by a stakeholder of the ordered data collection. - COMPLETE. The ordered data was delivered to the Data User. - CANCELLED. The order was cancelled.
order > inheritedGroupIds	System generated unique identifier of the stakeholders of the ordered data collection.
order > id	System generated unique identifier of the order.
order > usageContext	Details of the usage context that the Data User selected at the time of order.
order > createdBy	Details of the user account that created the order.
order > createdOn	Date when the order was created.
order > modifiedBy	Details of the latest user account that modified the order.
order > modifiedOn	Date when the order was modified.
order > refId	Reference identifier of the order.
order > dataCollections > id	System generated unique identifier of the data collection.
order > dataCollections > name	Name of the data collection.
order > dataCollections > description	Purpose of the data collection.
order > dataCollections > refId	Reference identifier of the data collection.
order > dataCollections > category	Details of the category of the data collection.
order > dataCollections > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
order > dataCollections > dataset	Details of the data assets that the data collection contains.
order > dataCollections > dataCollectionStatus	The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - PUBLISHED. The data collection is discoverable to Data Users. - UNPUBLISHED. The data collection isn't discoverable to Data Users.

Parameter	Description
`order > dataCollections > dataOwners`	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
`order > dataCollections > technicalOwners`	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
`order > dataCollections > createdBy`	Details of the user account that created the data collection.
`order > dataCollections > createdOn`	Date when the data collection was created.
`order > dataCollections > modifiedBy`	Details of the latest user account that modified the data collection.
`order > dataCollections > modifiedOn`	Latest date when the data collection was modified.
`deliveryTarget`	Details of the delivery target that was used to deliver the data to the Data User.
`deliveryTarget > id`	System generated unique identifier of the delivery target.
`deliveryTarget > name`	Name of the delivery target.
`deliveryTarget > description`	Description of the delivery target.
`deliveryTarget > isDefault`	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - `true`. The delivery template is the default delivery option for a data collection. - `false`. The delivery template isn't the default delivery option for a data collection.
`deliveryTarget > status`	The status indicates whether the delivery target is available for use to the Data Users that order the data collection. A delivery target can have one of the following statuses: - `ACTIVE`. The delivery target is available. - `INACTIVE`. The delivery target is unavailable.
`deliveryTarget > physicalLocation`	Default location where the data is delivered. **Note:** If the value of the `managedAccess` parameter is `ENABLED`, the data is not be delivered to the location that is specified in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
`deliveryTarget > targetSystemReference`	Default system where the data is delivered.
`deliveryTarget > deliveryTemplate`	Details of the delivery template based on which the delivery target was created.
`deliveryTarget > deliveryMethod`	Details of the delivery method.

Parameter	Description
deliveryTarget > deliveryFormat	Details of the delivery format.
deliveryTarget > dataCollection	Details of the data collection to which the delivery target is assigned.
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
costCenter	Cost center of the Data User that was granted access to the data collection.
consumer	Details of the Data User that was granted access to the data collection.
usageContext	Details of the usage context that the Data User selected at the time of order.
createdBy	Details of the user account that fulfilled the order that is associated with the consumer access.
createdOn	Date when the order that is associated with the consumer access was fulfilled.
modifiedBy	Details of the latest user account that modified the consumer access.
modifiedOn	Latest date when the consumer access was modified.
customFields	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Cancel orders

Use REST APIs to cancel orders in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/<orderId>/cancel** <orderId>: Required. Enter the system generated identifier of the order that you want to cancel. For more information about how you can use an API to get the system generated unique identifier of a order, see "Retrieve orders" on page 268. To get the system generated unique identifier of a order from the Data Marketplace interface, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
`comment`	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to cancel an order:

```
https://{{CDMP_URL}}/api/v1/integration/orders/16e32a13-6fba-4f1a-a337-e0aeecf9fab4/
cancel
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to cancel an order:

```
{
  "justification": "Standard sales team process.",
  "deliveryRequests": "1",
  "requestedProvisionedTargetRef": "AWS",
  "refId": "947ac3d1-662e-4d3a-a421-12ee38606539-180469874bc",
  "status": "CANCELLED",
  "id": "ORD-693",
```

```
  "createdBy": {
    "displayName": "John Doe",
    "id": "User1",
    "name": "username1",
    "email": "abc@xyz.com",
    "phone": "2020202023",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  }
  "createdOn": "2022-03-20T10:50:39.251Z",
  "modifiedBy": {
    "displayName": "Jane Doe",
    "id": "User2",
    "name": "username2",
    "email": "xyz@abc.com",
    "phone": "2020202021",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  }
  "modifiedOn": "2022-04-20T10:50:39.251Z"
}
```

The following table describes the parameters of each order that is cancelled:

Parameter	Description
`justification`	The reason entered at the time of order by the Data User to the stakeholder for the requirement of access to the data.
`deliveryRequests`	Delivery information of the order.
`requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
`refId`	Reference identifier of the order.
`status`	Status of the order. An order can have one of the following statuses: - `APPROVED`. The order is approved for fulfillment. A stakeholder of the ordered data collection must deliver the data to the Data User. - `REJECTED`. The order was rejected by a stakeholder of the ordered data collection. - `COMPLETE`. The ordered data was delivered to the Data User. - `CANCELLED`. The order was cancelled.
`id`	System generated unique identifier of the order.
`createdBy > displayName`	Name of the user that placed the order.
`createdBy > id`	Reference identifier of the order creator's user account.
`createdBy > name`	Username of the user that placed the order.
`createdBy > email`	Email address of the user that placed the order.
`createdBy > phone`	Contact number of the user that placed the order.

Parameter	Description
`createdBy > status`	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The user account or user group is active. - `INACTIVE`. The user account or user group is not active.
`createdBy > userInfo`	Details retrieved from the **My Data** page of the user account that placed the order.
`createdBy > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`createdOn`	Date when the order was placed.
`modifiedBy > displayName`	Name of the last user that modified the order.
`modifiedBy > id`	Reference identifier of the user account of the last user that modified the order.
`modifiedBy > name`	Username of the last user that modified the order.
`modifiedBy > email`	Email address of the last user that modified the order.
`modifiedBy > phone`	Contact number of the last user that modified the order.
`modifiedBy > status`	The status indicates whether or not a user account or user group is active. A user account or user group can have one of the following statuses: - `ACTIVE`. The user account or user group is active. - `INACTIVE`. The user account or user group is not active.
`modifiedBy > userInfo`	Details retrieved from the **My Data** page of the user account that last modified the order.
`modifiedBy > isGroup`	Parameter that indicates whether the user account is part of a group. This parameter can have one of the following values: - `true`. The user account is part of a group - `false`. The user account isn't part of a group
`modifiedOn`	Latest date when the order was modified.

Delete orders

If you placed an order accidentally or if an order is obsolete, you can use a REST API to delete the order.
Note: To delete a fulfilled order, ensure that you have already deleted its associated consumer access. For more information about how you can delete a consumer access, see "Delete consumer accesses" on page 351.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/orders/<orderId>** <orderId>: Required. Enter the system generated unique identifier of the order that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a order, see "Retrieve orders" on page 268. To get the system generated unique identifier of a order from the Data Marketplace interface, open the order. The order page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the system generated unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Method	DELETE

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete an order:

```
https://{{CDMP_URL}}/api/v1/integration/orders/16e32a13-6fba-4f1a-a337-e0aeecf9fab4
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the order is deleted successfully:

```
204 OK code
```

Consumer accesses

A consumer access is a record that indicates a Data User's access to a data collection, along with other details such as the date of delivery, details of the stakeholder that delivered the data, and the delivery option that was used for the delivery.

Create consumer accesses

Use a REST API to create a consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess**
Method	POST

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`refId`	Optional. Enter a reference identifier for the consumer access.	If you don't specify a reference identifier, Data Marketplace automatically assigns a unique value to the object. The reference identifier that Data Marketplace automatically generates contains a prefix. The Administrator can specify the prefix of the automatically generated reference identifier in Metadata Command Center. If you want to specify a reference identifier, ensure that you enter a unique value. Ensure that you don't use the prefix value that is configured in Metadata Command Center.
`status`	Optional. Specify a status for the consumer access that you want to create.	Enter one of the following values: - For a consumer access where the Data User has access to the data collection, enter `AVAILABLE`. - For a consumer access that is awaiting withdrawal, enter `PENDING_WITHDRAW`. - For a consumer access that is withdrawn, enter `WITHDRAWN`. Default value is `AVAILABLE`.

Parameter	Description	Additional Information
`dataCollectionId`	Required. Enter the system generated unique identifier of the data collection to which the Data User was granted access.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`deliveryTargetId`	Required. Enter the system generated unique identifier of the delivery target that was used to deliver the data.	For more information about how you can use an API to get the system generated unique identifier of a delivery target, see "Retrieve delivery targets" on page 241.
`consumerUserId`	Required. Enter the system generated unique identifier of the user account that was granted access to the data collection.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the system generated unique identifier is `0LH3xBJC9A6haZ26htGZyT`.
`accessGrantedOn`	Optional. Enter the date on which the Data User was granted access to the data collection.	To specify a date, use the `YYYY-MM-DD` format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard.
`usageContextId`	Optional. Enter the system generated unique identifier of the usage type used to specify the context in which the data is to be used as provided by the Data User that was granted access to the collection.	For more information about how you can use an API to get the system generated unique identifier of a usage type, see "Retrieve usage type" on page 174.
`costCenter`	Optional. Enter the cost center of the Data User that was granted access to the data collection.	-

Parameter	Description	Additional Information
customFields	The header where you can modify the custom attributes of the consumer access.	Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
customFields > value	Enter a value in the custom attribute.	This parameter can have only a single value.
customFields > values	Enter a value in the custom attribute.	This parameter can have multiple values.

Example request

The following example shows how you can use an API to create consumer accesses:

```
{
  "refId": "CAS710",
  "status": "WITHDRAWN",
  "dataCollectionId": "ed76133s-86vb-53rt-2914-677d73r4a7c5",
  "deliveryTargetId": "ad90417f-28bf-44ea-8204-127d70a4a7c9",
  "consumerUserId": "d00be828-d47c-4e9f-a65f-502ba6b633f9",
  "accessGrantedOn": "2022-09-15T17:04:29.382Z",
  "usageContextId": "8npzPxKim0XjHE4es2gkAc",
  "costCenter": "Retail-100IEQ"
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to create consumer accesses:

```
{
  "processingTime": 489,
  "id": "407225ad-7870-4678-8169-43829d80c4bc",
  "refId": "CAS710"
}
```

The following table describes the parameters of each consumer access that is created:

Parameter	Description
id	System generated unique identifier of the consumer access that is created.
refId	Reference identifier of the consumer access that is created.

Modify custom attributes of consumer accesses

Use a REST API to modify the custom attributes of a consumer access in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess/<consumerAccessId>/** <consumerAccessId>: Required. Enter the system generated identifier of the consumer access for which you want to modify custom attributes. For more information about how you can use an API to get the system generated unique identifier of a consumer access, see "Retrieve consumer accesses" on page 315. To get the system generated unique identifier of a consumer access from the Data Marketplace interface, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85, the system generated unique identifier is e254491f-5795-49bd-be0b-385eb11d9d5a.
Method	PATCH

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`customFields`	The header where you can modify the custom attributes of the consumer access.	Whether you must enter a value or not enter a value in a custom attribute is determined by how the custom attribute was defined by your administrator in Metadata Command Center. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
`customFields > name`	Enter the system generated unique identifier of the custom attribute that you want to modify.	For more information about how you can retrieve the system generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.
`customFields > value`	Enter a value in the custom attribute.	This parameter can have only a single value.
`customFields > values`	Enter a value in the custom attribute.	This parameter can have multiple values.

Example request

The following example shows how you can use an API to modify the custom attributes of a consumer access:

```
{
  "customFields": [
    {
      "name": "Year of sale",
      "value": "2023",
      "values": null
    }
  ]
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to modify the custom attributes of a consumer access:

```
{
  "id": "794a215f-5479-4b55-8e1b-a4866ec9fe82",
  "refId": "ACC-246",
  "status": "AVAILABLE",
  "accessGrantedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456",
  "order": {
    "justification": "Required for the Q3 sales reporting.",
    "deliveryRequests": null,
```

```
    "requestedProvisionedTargetRef": "b441a10a-d64d-4801-94d8-145e805001c4",
    "refId": "ORD-337",
    "dataCollections": null,
    "termsOfUseSnapshots": null,
    "status": "COMPLETE",
    "id": "b986ae59-7fc9-414c-98d7-14c7a1671023",
    "usageContext": null,
    "createdBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.405Z",
    "modifiedBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T13:30:36.405Z",
    "costCenter": "Retail-IQO3456"
  },
  "deliveryTarget": {
    "id": "b441a10a-d64d-4801-94d8-145e805001c4",
    "name": "IPFS Delivery",
    "description": "Use this template to deliver data via IPFS.",
    "isDefault": true,
    "status": "ACTIVE",
    "physicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
    "targetSystemReference": "IPFS",
    "deliveryTemplate": {
      "id": "1c865800-86ca-4280-8cdd-89dda66c013c",
      "name": "IPFS",
      "description": "Use this template to deliver data via IPFS.",
      "color": null,
      "isDefault": true,
      "status": "ACTIVE",
      "managedAccess": "DISABLED",
      "deliveryType": "AUTOMATIC",
      "templateOwners": [
        {
          "displayName": "Johnny Doe",
          "id": "6k7aaGYrSOsfN7RFlPH1YU",
          "name": "23Aug_CDMP_QE1",
          "email": "jydoe@informatica.com",
          "phone": "555-243-456",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
        }
      ],
      "targetSystemReference": "IPFS",
      "defaultPhysicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
      "deliveryMethods": null,
      "deliveryFormats": null,
      "createdBy": "8npzPxKim0XjHE4es2gkAc",
      "createdOn": "2022-09-14T11:57:00.446Z",
      "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
      "modifiedOn": "2022-09-14T11:57:00.446Z"
    },
    "deliveryMethod": {
      "id": "f8f8as4d-c0f0-3r11-fr04-7b7h2ce46731",
```

```
    "name": "IPFS",
    "status": "ACTIVE",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "deliveryFormat": {
    "id": "e0f8af4d-c0f0-4c02-af03-5b9b2ce43253",
    "name": "CSV",
    "status": "Deliver data as a CSV file.",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "dataCollection": {
    "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
    "name": "Retail Sales Report",
    "description": "Sales reports for the retail outlets.",
    "refId": "DCL-834",
    "category": null,
    "usageContexts": null,
    "dataset": null,
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [],
    "technicalOwners": [],
    "createdBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [
    {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
```

```
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": true
      }
    ],
    "technicalOwners": [
      {
        "displayName": "Johnny Doe",
        "id": "6k7aaGYrSOsfN7RFlPH1YU",
        "name": "23Aug_CDMP_QE1",
        "email": "jydoe@informatica.com",
        "phone": "555-243-456",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": true
      }
    ],
    "createdBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "termsOfUseSnapshots": [
    {
      "id": "e37bf0c7-faf3-4902-8bcc-485d80cc8bb9",
      "termsOfUseId": null,
      "termsOfUseRefId": null,
      "generalTermsOfUse": "This data must not be accessed via unauthorized devices.",
      "name": null,
      "description": null,
      "type": null,
      "status": null,
      "acknowledgement": null,
      "parentId": "null",
      "referenceLink": null,
      "createdOn": "2022-09-14T11:57:00.446Z"
    }
  ],
  "consumer": {
    "displayName": "John Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "usageContext": {
    "id": "9669f6ab-affc-4106-a583-48a6b580b930",
    "name": "Sales Use",
    "description": "This is for sales reporting tasks.",
    "color": null,
```

```
      "status": "ACTIVE"
    },
    "createdBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.726Z",
    "modifiedBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-15T13:59:40.472Z",
        "customFields": [
          {
            "name": "Year",
            "value": "2021",
            "values": null
          }
  }
```


The following table describes the parameters in the response body of each consumer access that is modified:

Parameter	Description
id	System generated unique identifier of the consumer access.
refId	Reference identifier of the consumer access.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
costCenter	Cost center of the Data User that was granted access to the data collection.
order	Details of the order placed by the Data User that was granted access to the data collection.
order > justification	The reason entered at the time of order by the Data User to the stakeholder for the requirement of access to the data.

Parameter	Description
`order > deliveryRequests`	Delivery information of the order.
`order > requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
`order > refId`	Reference identifier of the order.
`order > dataCollections`	Details of the ordered data collection.
`order > termsOfUseSnapshots`	Details of the terms of use snapshot represents the state of the terms of use of the data collection when the order was placed.
`order > status`	Status of the order.
`order > id`	System generated unique identifier of the order.
`order > usageContext`	Details of the usage type that the Data User selected at the time of order.
`order > createdBy`	Details of the user account that ordered the data collection.
`order > createdOn`	Date when the order was created.
`order > modifiedBy`	Details of the latest user account that modified the order.
`order > modifiedOn`	Latest date when the order was modified.
`order > costCenter`	Cost center of the Data User that ordered the data collection.
`deliveryTarget`	Details of the delivery target that was used to deliver the data to the Data User.
`deliveryTarget > id`	System generated unique identifier of the delivery target.
`deliveryTarget > name`	Name of the delivery target.
`deliveryTarget > description`	Description of the delivery target.
`deliveryTarget > isDefault`	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - `true`. The delivery template is the default delivery option for a data collection. - `false`. The delivery template isn't the default delivery option for a data collection.

Parameter	Description
deliveryTarget > status	Status of the delivery target.
deliveryTarget > physicalLocation	Default location where the data is delivered. **Note:** If the value of the managedAccess parameter is ENABLED, the data is not be delivered to the location that is specified in the physicalLocation parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryTarget > targetSystemReference	Default system where the data is delivered.
deliveryTarget > deliveryTemplate	Details of the delivery template based on which the delivery target was created.
deliveryTarget > deliveryMethod	Details of the delivery method.
deliveryTarget > deliveryFormat	Details of the delivery format.
deliveryTarget > dataCollection	Details of the data collection to which the delivery target is assigned.
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
dataCollection	Details of the data collection for which the Data User was granted access.
dataCollection > id	System generated unique identifier of the data collection.
dataCollection > name	Name of the data collection.
dataCollection > description	Purpose of the data collection.
dataCollection > refId	Reference identifier of the data collection.
dataCollection > category	Details of the category of the data collection.
dataCollection > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
dataCollection > dataset	Details of the data assets that the data collection contains.

Parameter	Description
`dataCollection > dataCollectionStatus`	The status that indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`dataCollection > dataOwners`	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
`dataCollection > technicalOwners`	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
`dataCollection > createdBy`	Details of the user account that created the data collection.
`dataCollection > createdOn`	Date when the data collection was created.
`dataCollection > modifiedBy`	Details of the latest user account that modified the data collection.
`dataCollection > modifiedOn`	Latest date when the data collection was modified.
`termsOfUseSnapshots`	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
`consumer`	Details of the Data User that was granted access to the data collection.
`usageContext`	Details of the usage context that the Data User selected at the time of order.
`createdBy`	Details of the user account that created the consumer access.
`createdOn`	Date when the consumer access was created.
`modifiedBy`	Details of the latest user account that modified the consumer access.
`modifiedOn`	Latest date when the consumer access was modified.
`customFields`	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.

Parameter	Description
`customFields > name`	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
`customFields > value`	The custom attribute value. This parameter can have only a single value.
`customFields > values`	The custom attribute value. This parameter can have multiple values.

Retrieve consumer accesses

Use a REST API to retrieve the details of consumer accesses in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`consumerAccessIds`	Optional. Enter the system generated unique identifier of a consumer access.	To get the system generated unique identifier of a consumer access, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the system generated unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`. To enter more than one value, use the following format: `ids=<value1>&ids=<value2>`
`dataCollectionIds`	Optional. Enter the system generated unique identifier of the data collection to which the Data User was granted access.	For more information about how you can use an API to get the system generated unique identifier of a data collection, see "Retrieve data collections" on page 217. To get the system generated unique identifier of a data collection from the Data Marketplace interface, open the data collection. The data collection page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the system generated unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.
`deliveryTemplateIds`	Optional. Enter the system generated unique identifier of the delivery template that was used to deliver the data to the Data User.	For more information about how you can use an API to get the system generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.

Parameter	Description	Additional Information
consumerAccessCreatedBy	Optional. Enter the system generated unique identifier of the user account that created the consumer access.	To get the system generated unique identifier of a user account, navigate to **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the system generated unique identifier. For example, in the URL /cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT, the system generated unique identifier is 0LH3xBJC9A6haZ26htGZyT.
createdDateFrom	Optional. To find consumer accesses that were created between a date range, enter the initial date when the consumer accesses were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateFrom parameter, ensure that you also enter a value for the createdDateTo parameter.
createdDateTo	Optional. To find consumer accesses that were created between a date range, enter the latest date when the consumer accesses were created.	To specify a date, use the YYYY-MM-DD format. The value that you specify is automatically converted and stored in the Coordinated Universal Time (UTC) time standard. If you have specified a value for the createdDateTo parameter, ensure that you also enter a value for the createdDateFrom parameter.
status	Optional. Specify the status of the consumer access.	Enter one of the following values: - To find consumer accesses where the Data User has access to the data collection, enter AVAILABLE. - To find consumer accesses that are pending withdrawal, enter PENDING_WITHDRAW. - To find consumer accesses that are withdrawn, WITHDRAWN.
sortByField	Optional. Specify the parameters to sort the search results.	To sort the search results, enter one of the following values: - ID - STATUS - CREATED_BY - CREATED_ON - MODIFIED_BY - MODIFIED_ON Default is sortByField > MODIFIED_ON.

Parameter	Description	Additional Information
sort	Optional. Set the sorting order of the search results.	You can sort the search results in the following order: - To sort the search results by ascending order, enter ASC. - To sort the search results by descending order, enter DESC. Default is DESC.
offset	Optional. Enter the starting index for the paginated results.	Default is 0.
limit	Optional. Enter the maximum number of results.	Default is 50. Maximum is 100.

Note: The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of a consumer access:

```
https://{{CDMP_URL}}/api/v1/integration/consumerAccess?
consumerAccessIds=40b32fbd-538a-4369-9246-
d18b7998f011&limit=100&status=AVAILABLE&sortByField=ID&sort=ASC
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the details of a consumer access:


```
{
  "processingTime": 1346,
  "offset": 0,
  "limit": 100,
  "totalCount": 345,
  "objects": [
    {
      "id": "40b32fbd-538a-4369-9246-d18b7998f011",
      "refId": "ACC-131",
      "status": "AVAILABLE",
      "accessGrantedOn": "2022-09-14T13:30:36.405Z",
      "costCenter": "Retail-IQO3456",
      "order": {
        "justification": "Required for the Q3 sales reporting.",
        "deliveryRequests": null,
        "requestedProvisionedTargetRef": "b441a10a-d64d-4801-94d8-145e805001c4",
        "refId": "ORD-345",
        "dataCollections": null,
        "termsOfUseSnapshots": null,
        "status": "COMPLETE",
        "id": "b986ae59-7fc9-414c-98d7-14c7a1671023",
        "usageContext": null,
        "createdBy": {
          "displayName": "Johnny Doe",
          "id": "6k7aaGYrSOsfN7RFlPH1YU",
          "name": "23Aug_CDMP_QE1",
          "email": "jydoe@informatica.com",
          "phone": "555-243-456",
          "status": "ACTIVE",
          "userInfo": {},
```

```
    "isGroup": true
  },
  "createdOn": "2022-09-14T13:30:36.405Z",
  "modifiedBy": {
    "displayName": "Johnny Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jydoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "modifiedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456"
},
"deliveryTarget": {
  "id": "b441a10a-d64d-4801-94d8-145e805001c4",
  "name": "IPFS Delivery",
  "description": "Use this template to deliver data via IPFS.",
  "isDefault": true,
  "status": "ACTIVE",
  "physicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
  "targetSystemReference": "IPFS",
  "deliveryTemplate": {
    "id": "1c865800-86ca-4280-8cdd-89dda66c013c",
    "name": "IPFS",
    "description": "Use this template to deliver data via IPFS.",
    "color": null,
    "isDefault": true,
    "status": "ACTIVE",
    "managedAccess": "DISABLED",
    "deliveryType": "AUTOMATIC",
    "templateOwners": [
      {
       "displayName": "Johnny Doe",
       "id": "6k7aaGYrSOsfN7RFlPH1YU",
       "name": "23Aug_CDMP_QE1",
       "email": "jydoe@informatica.com",
       "phone": "555-243-456",
       "status": "ACTIVE",
       "userInfo": {},
       "isGroup": true
      }
    ],
    "targetSystemReference": "IPFS",
    "defaultPhysicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
    "deliveryMethods": null,
    "deliveryFormats": null,
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "deliveryMethod": {
    "id": "string",
    "name": "string",
    "status": "ACTIVE",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "deliveryFormat": {
    "id": "e0f8af4d-c0f0-4c02-af03-5b9b2ce43253",
    "name": "CSV",
    "status": "Deliver data as a CSV file.",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
```

```
  },
  "dataCollection": {
    "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
    "name": "Retail Sales Report",
    "description": "Sales reports for the retail outlets.",
    "refId": "DCL-672",
    "category": {},
    "usageContexts": null,
    "dataset": null,
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [],
    "technicalOwners": [],
    "createdBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
    "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
    "name": "Retail Sales Report",
    "description": "Sales reports for the retail outlets.",
    "refId": "DCL-672",
    "category": null,
    "usageContexts": null,
    "dataset": null,
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [
      {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
      }
    ],
    "technicalOwners": [
      {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
```

```
            }
          ],
          "createdBy": {
            "displayName": "Jane Doe",
            "id": "6k7aaGYrSOsfN7RFlPH1YU",
            "name": "23Aug_CDMP_QE1",
            "email": "jdoe@informatica.com",
            "phone": "555-243-456",
            "status": "ACTIVE",
            "userInfo": {},
            "isGroup": true
          },
          "createdOn": "2022-09-14T11:57:00.446Z",
          "modifiedBy": {
            "displayName": "Jane Doe",
            "id": "6k7aaGYrSOsfN7RFlPH1YU",
            "name": "23Aug_CDMP_QE1",
            "email": "jdoe@informatica.com",
            "phone": "555-243-456",
            "status": "ACTIVE",
            "userInfo": {},
            "isGroup": true
          },
          "modifiedOn": "2022-09-14T11:57:00.446Z"
      },
      "termsOfUseSnapshots": [
        {
          "id": "e37bf0c7-faf3-4902-8bcc-485d80cc8bb9",
          "termsOfUseId": null,
          "termsOfUseRefId": null,
          "generalTermsOfUse": "This data must not be accessed via unauthorized
devices.",
          "name": null,
          "description": null,
          "type": null,
          "status": null,
          "acknowledgement": null,
          "parentId": "null",
          "referenceLink": null,
          "createdOn": "2022-09-14T11:57:00.446Z"
        }
      ],
      "consumer": {
          "displayName": "John Doe",
          "id": "6k7aaGYrSOsfN7RFlPH1YU",
          "name": "23Aug_CDMP_QE1",
          "email": "jdoe@informatica.com",
          "phone": "555-243-456",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
          },
      "usageContext": {
          "id": "9669f6ab-affc-4106-a583-48a6b580b930",
          "name": "Sales Use",
          "description": "This is for sales reporting tasks.",
          "color": null,
          "status": "ACTIVE"
          },
      "createdBy": {
          "displayName": "Jane Doe",
          "id": "6k7aaGYrSOsfN7RFlPH1YU",
          "name": "23Aug_CDMP_QE1",
          "email": "jdoe@informatica.com",
          "phone": "555-243-456",
          "status": "ACTIVE",
          "userInfo": {},
          "isGroup": true
          },
      "createdOn": "2022-09-14T13:30:36.726Z",
      "modifiedBy": {
```

```
            "displayName": "Jane Doe",
            "id": "6k7aaGYrSOsfN7RFlPH1YU",
            "name": "23Aug_CDMP_QE1",
            "email": "jdoe@informatica.com",
            "phone": "555-243-456",
            "status": "ACTIVE",
            "userInfo": {},
            "isGroup": true
            },
        "modifiedOn": "2022-09-15T13:59:40.472Z",
        "customFields": [
          {
            "name": "Year",
            "value": "2021",
            "values": null
          }
      ]
  }
```


The following table describes the parameters of each consumer access that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of consumer accesses retrieved.
id	System generated unique identifier of the consumer access.
refId	Reference identifier of the consumer access.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
costCenter	Cost center of the Data User that was granted access to the data collection.
order	Details of the order placed by the Data User that was granted access to the data collection.
order > justification	The reason for the requirement of access to the data provided by the Data User at the time of order.
order > deliveryRequests	Delivery information of the order.

Parameter	Description
`order > requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
`order > refId`	Reference identifier of the order.
`order > dataCollections`	Details of the ordered data collection.
`order > termsOfUseSnapshots`	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
`order > status`	Status of the order.
`order > id`	System generated unique identifier of the order.
`order > usageContext`	Details of the usage type that the Data User selected at the time of order.
`order > createdBy`	Details of the user account that ordered the data collection.
`order > createdOn`	Date when the order was created.
`order > modifiedBy`	Details of the latest user account that modified the order.
`order > modifiedOn`	Latest date when the order was modified.
`order > costCenter`	Cost center of the Data User that ordered the data collection.
`deliveryTarget`	Details of the delivery target that was used to deliver the data to the Data User.
`deliveryTarget > id`	System generated unique identifier of the delivery target.
`deliveryTarget > name`	Name of the delivery target.
`deliveryTarget > description`	Description of the delivery target.
`deliveryTarget > isDefault`	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - `true`. The delivery template is the default delivery option for a data collection. - `false`. The delivery template isn't the default delivery option for a data collection.
`deliveryTarget > status`	Status of the delivery target.

Parameter	Description
deliveryTarget > physicalLocation	Default location where the data is delivered. **Note:** If the value of the managedAccess parameter is ENABLED, the data is not be delivered to the location that is specified in the physicalLocation parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryTarget > targetSystemReference	Default system where the data is delivered.
deliveryTarget > deliveryTemplate	Details of the delivery template based on which the delivery target was created.
deliveryTarget > deliveryMethod	Details of the delivery method.
deliveryTarget > deliveryFormat	Details of the delivery format.
deliveryTarget > dataCollection	Details of the data collection to which the delivery target is assigned.
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
dataCollection	Details of the data collection for which the Data User was granted access.
dataCollection > id	System generated unique identifier of the data collection.
dataCollection > name	Name of the data collection.
dataCollection > description	Purpose of the data collection.
dataCollection > refId	Reference identifier of the data collection.
dataCollection > category	Details of the category of the data collection.
dataCollection > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
dataCollection > dataset	Details of the data assets that the data collection contains.

Parameter	Description
`dataCollection > dataCollectionStatus`	The status determines whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - `PUBLISHED`. The data collection is discoverable to Data Users. - `UNPUBLISHED`. The data collection isn't discoverable to Data Users.
`dataCollection > dataOwners`	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
`dataCollection > technicalOwners`	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
`dataCollection > createdBy`	Details of the user account that created the data collection.
`dataCollection > createdOn`	Date when the data collection was created.
`dataCollection > modifiedBy`	Details of the latest user account that modified the data collection.
`dataCollection > modifiedOn`	Latest date when the data collection was modified.
`termsOfUseSnapshots`	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
`consumer`	Details of the Data User that was granted access to the data collection.
`usageContext`	Details of the usage context that the Data User selected at the time of order.
`createdBy`	Details of the user account that created the consumer access.
`createdOn`	Date when the consumer access was created.
`modifiedBy`	Details of the latest user account that modified the consumer access.
`modifiedOn`	Latest date when the consumer access was modified.
`customFields`	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.

Parameter	Description
customFields > name	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Make consumer accesses available

Use a REST API to make consumer accesses available in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess/<consumerAccessId>/available** <consumerAccessId>: Required. Enter the system generated identifier of the consumer access for which you want to set the status as AVAILABLE. For more information about how you can use an API to get the system generated unique identifier of a consumer access, see "Retrieve consumer accesses" on page 315. To get the system generated unique identifier of a consumer access from the Data Marketplace interface, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85, the system generated unique identifier is e254491f-5795-49bd-be0b-385eb11d9d5a.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
comment	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to make a consumer access available:

```
https://{{CDMP_URL}}/api/v1/integration/consumerAccess/794a215f-5479-4b55-8e1b-
a4866ec9fe82/available?comment=Request%20Granted
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to make a consumer access available:


```
{
  "id": "794a215f-5479-4b55-8e1b-a4866ec9fe82",
  "refId": "ACC-246",
  "status": "AVAILABLE",
  "accessGrantedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456",
  "order": {
    "justification": "Required for the Q3 sales reporting.",
    "deliveryRequests": null,
    "requestedProvisionedTargetRef": "b441a10a-d64d-4801-94d8-145e805001c4",
    "refId": "ORD-337",
    "dataCollections": null,
    "termsOfUseSnapshots": null,
    "status": "COMPLETE",
    "id": "b986ae59-7fc9-414c-98d7-14c7a1671023",
    "usageContext": null,
    "createdBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.405Z",
    "modifiedBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T13:30:36.405Z",
    "costCenter": "Retail-IQO3456"
  },
  "deliveryTarget": {
    "id": "b441a10a-d64d-4801-94d8-145e805001c4",
    "name": "IPFS Delivery",
    "description": "Use this template to deliver data via IPFS.",
    "isDefault": true,
    "status": "ACTIVE",
    "physicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
    "targetSystemReference": "IPFS",
    "deliveryTemplate": {
      "id": "1c865800-86ca-4280-8cdd-89dda66c013c",
      "name": "IPFS",
      "description": "Use this template to deliver data via IPFS.",
      "color": null,
      "isDefault": true,
      "status": "ACTIVE",
```

```
  "managedAccess": "DISABLED",
  "deliveryType": "AUTOMATIC",
  "templateOwners": [
    {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "targetSystemReference": "IPFS",
  "defaultPhysicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
  "deliveryMethods": null,
  "deliveryFormats": null,
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"deliveryMethod": {
  "id": "f8f8as4d-c0f0-3r11-fr04-7b7h2ce46731",
  "name": "IPFS",
  "status": "ACTIVE",
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"deliveryFormat": {
  "id": "e0f8af4d-c0f0-4c02-af03-5b9b2ce43253",
  "name": "CSV",
  "status": "Deliver data as a CSV file.",
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [],
  "technicalOwners": [],
  "createdBy": {
    "displayName": "Janet Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jtdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": {
    "displayName": "Janet Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jtdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
```

```
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [
    {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "technicalOwners": [
    {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "createdBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"termsOfUseSnapshots": [
  {
    "id": "e37bf0c7-faf3-4902-8bcc-485d80cc8bb9",
    "termsOfUseId": null,
    "termsOfUseRefId": null,
    "generalTermsOfUse": "This data must not be accessed via unauthorized devices.",
```

```
        "name": null,
        "description": null,
        "type": null,
        "status": null,
        "acknowledgement": null,
        "parentId": "null,
        "referenceLink": null,
        "createdOn": "2022-09-14T11:57:00.446Z"
      }
    ],
    "consumer": {
      "displayName": "John Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "usageContext": {
      "id": "9669f6ab-affc-4106-a583-48a6b580b930",
      "name": "Sales Use",
      "description": "This is for sales reporting tasks.",
      "color": null,
      "status": "ACTIVE"
    },
    "createdBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.726Z",
    "modifiedBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-15T13:59:40.472Z",
    "customFields": [
          {
            "name": "Year",
            "value": "2021",
            "values": null
          }
  }
```


The following table describes the parameters of each consumer access that is made available to Data Users:

Parameter	Description
id	System generated unique identifier of the consumer access.
refId	Reference identifier of the consumer access.

Parameter	Description
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
costCenter	Cost center of the Data User that was granted access to the data collection.
order	Details of the order placed by the Data User that was granted access to the data collection.
order > justification	The reason for the requirement of access to the data provided by the Data User at the time of order.
order > deliveryRequests	Delivery information of the order.
order > requestedProvisionedTargetRef	The delivery target requested by the Data User. **Note:** If the value of the requestedProvisionedTargetRef parameter is null, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
order > refId	Reference identifier of the order.
order > dataCollections	Details of the ordered data collection.
order > termsOfUseSnapshots	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
order > status	Status of the order.
order > id	System generated unique identifier of the order.
order > usageContext	Details of the usage type that the Data User selected at the time of order.
order > createdBy	Details of the user account that ordered the data collection.
order > createdOn	Date when the order was created.
order > modifiedBy	Details of the latest user account that modified the order.

Parameter	Description
order > modifiedOn	Latest date when the order was modified.
order > costCenter	Cost center of the Data User that ordered the data collection.
deliveryTarget	Details of the delivery target that was used to deliver the data to the Data User.
deliveryTarget > id	System generated unique identifier of the delivery target.
deliveryTarget > name	Name of the delivery target.
deliveryTarget > description	Description of the delivery target.
deliveryTarget > isDefault	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - true. The delivery template is the default delivery option for a data collection. - false. The delivery template isn't the default delivery option for a data collection.
deliveryTarget > status	Status of the delivery target.
deliveryTarget > physicalLocation	Default location where the data is delivered. **Note:** If the value of the managedAccess parameter is ENABLED, the data is not be delivered to the location that is specified in the physicalLocation parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryTarget > targetSystemReference	Default system where the data is delivered.
deliveryTarget > deliveryTemplate	Details of the delivery template based on which the delivery target was created.
deliveryTarget > deliveryMethod	Details of the delivery method.
deliveryTarget > deliveryFormat	Details of the delivery format.
deliveryTarget > dataCollection	Details of the data collection to which the delivery target is assigned.
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.

Parameter	Description
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
dataCollection	Details of the data collection for which the Data User was granted access.
dataCollection > id	System generated unique identifier of the data collection.
dataCollection > name	Name of the data collection.
dataCollection > description	Purpose of the data collection.
dataCollection > refId	Reference identifier of the data collection.
dataCollection > category	Details of the category of the data collection.
dataCollection > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
dataCollection > dataset	Details of the data assets that the data collection contains.
dataCollection > dataCollectionStatus	The status determines whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - PUBLISHED. The data collection is discoverable to Data Users. - UNPUBLISHED. The data collection isn't discoverable to Data Users.
dataCollection > dataOwners	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
dataCollection > technicalOwners	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
dataCollection > createdBy	Details of the user account that created the data collection.
dataCollection > createdOn	Date when the data collection was created.
dataCollection > modifiedBy	Details of the latest user account that modified the data collection.
dataCollection > modifiedOn	Latest date when the data collection was modified.
termsOfUseSnapshots	Details of the terms of use snapshot represents the state of the terms of use of the data collection when the order was placed.
consumer	Details of the Data User that was granted access to the data collection.
usageContext	Details of the usage context that the Data User selected at the time of order.

Parameter	Description
createdBy	Details of the user account that created the consumer access.
createdOn	Date when the consumer access was created.
modifiedBy	Details of the latest user account that modified the consumer access.
modifiedOn	Latest date when the consumer access was modified.
customFields	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Submit consumer access withdrawals

Use a REST API to submit a request to withdraw a Data User's access to a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess/<consumerAccessId>/pending_withdraw** <consumerAccessId>: Required. Enter the system generated identifier of the consumer access for which you want to request a withdrawal. For more information about how you can use an API to get the system generated unique identifier of a consumer access, see "Retrieve consumer accesses" on page 315. To get the system generated unique identifier of a consumer access from the Data Marketplace interface, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the system generated unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
comment	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to submit a withdrawal request for a consumer access:

```
https://{{CDMP_URL}}/api/v1/integration/consumerAccess/794a215f-5479-4b55-8e1b-a4866ec9fe82/pending_withdraw?comment=Request%20Withdraw
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to submit a withdrawal request for a consumer access:

```
{
  "id": "794a215f-5479-4b55-8e1b-a4866ec9fe82",
  "refId": "ACC-246",
  "status": "PENDING_WITHDRAW",
  "accessGrantedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456",
  "order": {
```

```
  "justification": "Required for the Q3 sales reporting.",
  "deliveryRequests": null,
  "requestedProvisionedTargetRef": "b441a10a-d64d-4801-94d8-145e805001c4",
  "refId": "ORD-337",
  "dataCollections": null,
  "termsOfUseSnapshots": null,
  "status": "COMPLETE",
  "id": "b986ae59-7fc9-414c-98d7-14c7a1671023",
  "usageContext": null,
  "createdBy": {
    "displayName": "Johnny Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jydoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "createdOn": "2022-09-14T13:30:36.405Z",
  "modifiedBy": {
    "displayName": "Johnny Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jydoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "modifiedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456"
},
"deliveryTarget": {
  "id": "b441a10a-d64d-4801-94d8-145e805001c4",
  "name": "IPFS Delivery",
  "description": "Use this template to deliver data via IPFS.",
  "isDefault": true,
  "status": "ACTIVE",
  "physicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
  "targetSystemReference": "IPFS",
  "deliveryTemplate": {
    "id": "1c865800-86ca-4280-8cdd-89dda66c013c",
    "name": "IPFS",
    "description": "Use this template to deliver data via IPFS.",
    "color": null,
    "isDefault": true,
    "status": "ACTIVE",
    "managedAccess": "DISABLED",
    "deliveryType": "AUTOMATIC",
    "templateOwners": [
      {
        "displayName": "Johnny Doe",
        "id": "6k7aaGYrSOsfN7RFlPH1YU",
        "name": "23Aug_CDMP_QE1",
        "email": "jydoe@informatica.com",
        "phone": "555-243-456",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": true
      }
    ],
    "targetSystemReference": "IPFS",
    "defaultPhysicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
    "deliveryMethods": null,
    "deliveryFormats": null,
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
```

```
  "deliveryMethod": {
    "id": "f8f8as4d-c0f0-3r11-fr04-7b7h2ce46731",
    "name": "IPFS",
    "status": "ACTIVE",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "deliveryFormat": {
    "id": "e0f8af4d-c0f0-4c02-af03-5b9b2ce43253",
    "name": "CSV",
    "status": "Deliver data as a CSV file.",
    "createdBy": "8npzPxKim0XjHE4es2gkAc",
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "dataCollection": {
    "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
    "name": "Retail Sales Report",
    "description": "Sales reports for the retail outlets.",
    "refId": "DCL-834",
    "category": null,
    "usageContexts": null,
    "dataset": null,
    "dataCollectionStatus": "PUBLISHED",
    "dataOwners": [],
    "technicalOwners": [],
    "createdBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [
    {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
```

```
        "email": "jtdoe@informatica.com",
        "phone": "555-243-456",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": true
      }
    ],
    "technicalOwners": [
      {
        "displayName": "Johnny Doe",
        "id": "6k7aaGYrSOsfN7RFlPH1YU",
        "name": "23Aug_CDMP_QE1",
        "email": "jydoe@informatica.com",
        "phone": "555-243-456",
        "status": "ACTIVE",
        "userInfo": {},
        "isGroup": true
      }
    ],
    "createdBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "termsOfUseSnapshots": [
    {
      "id": "e37bf0c7-faf3-4902-8bcc-485d80cc8bb9",
      "termsOfUseId": null,
      "termsOfUseRefId": null,
      "generalTermsOfUse": "This data must not be accessed via unauthorized devices.",
      "name": null,
      "description": null,
      "type": null,
      "status": null,
      "acknowledgement": null,
      "parentId": "null,
      "referenceLink": null,
      "createdOn": "2022-09-14T11:57:00.446Z"
    }
  ],
  "consumer": {
    "displayName": "John Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "usageContext": {
    "id": "9669f6ab-affc-4106-a583-48a6b580b930",
    "name": "Sales Use",
```

```
      "description": "This is for sales reporting tasks.",
      "color": null,
      "status": "ACTIVE"
    },
    "createdBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.726Z",
    "modifiedBy": {
      "displayName": "Jane Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-15T13:59:40.472Z",
    "customFields": [
          {
            "name": "Year",
            "value": "2021",
            "values": null
          }
  }
```


The following table describes the parameters of each consumer access for which a withdrawal request is submitted:

Parameter	Description
id	System generated unique identifier of the consumer access.
refId	Reference identifier of the consumer access.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
costCenter	Cost center of the Data User that was granted access to the data collection.
order	Details of the order placed by the Data User that was granted access to the data collection.

Parameter	Description
`order > justification`	The reason for the requirement of access to the data provided by the Data User at the time of order.
`order > deliveryRequests`	Delivery information of the order.
`order > requestedProvisionedTargetRef`	The delivery target requested by the Data User. **Note:** If the value of the `requestedProvisionedTargetRef` parameter is `null`, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
`order > refId`	Reference identifier of the order.
`order > dataCollections`	Details of the ordered data collection.
`order > termsOfUseSnapshots`	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
`order > status`	Status of the order.
`order > id`	System generated unique identifier of the order.
`order > usageContext`	Details of the usage type that the Data User selected at the time of order.
`order > createdBy`	Details of the user account that ordered the data collection.
`order > createdOn`	Date when the order was created.
`order > modifiedBy`	Details of the latest user account that modified the order.
`order > modifiedOn`	Latest date when the order was modified.
`order > costCenter`	Cost center of the Data User that ordered the data collection.
`deliveryTarget`	Details of the delivery target that was used to deliver the data to the Data User.
`deliveryTarget > id`	System generated unique identifier of the delivery target.
`deliveryTarget > name`	Name of the delivery target.
`deliveryTarget > description`	Description of the delivery target.

Parameter	Description
deliveryTarget > isDefault	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - true. The delivery template is the default delivery option for a data collection. - false. The delivery template isn't the default delivery option for a data collection.
deliveryTarget > status	Status of the delivery target.
deliveryTarget > physicalLocation	Default location where the data is delivered. **Note:** If the value of the managedAccess parameter is ENABLED, the data is not be delivered to the location that is specified in the physicalLocation parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
deliveryTarget > targetSystemReference	Default system where the data is delivered.
deliveryTarget > deliveryTemplate	Details of the delivery template based on which the delivery target was created.
deliveryTarget > deliveryMethod	Details of the delivery method.
deliveryTarget > deliveryFormat	Details of the delivery format.
deliveryTarget > dataCollection	Details of the data collection to which the delivery target is assigned.
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
dataCollection	Details of the data collection for which the Data User was granted access.
dataCollection > id	System generated unique identifier of the data collection.
dataCollection > name	Name of the data collection.
dataCollection > description	Purpose of the data collection.
dataCollection > refId	Reference identifier of the data collection.

Parameter	Description
dataCollection > category	Details of the category of the data collection.
dataCollection > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
dataCollection > dataset	Details of the data assets that the data collection contains.
dataCollection > dataCollectionStatus	The status determines whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - PUBLISHED. The data collection is discoverable to Data Users. - UNPUBLISHED. The data collection isn't discoverable to Data Users.
dataCollection > dataOwners	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
dataCollection > technicalOwners	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
dataCollection > createdBy	Details of the user account that created the data collection.
dataCollection > createdOn	Date when the data collection was created.
dataCollection > modifiedBy	Details of the latest user account that modified the data collection.
dataCollection > modifiedOn	Latest date when the data collection was modified.
termsOfUseSnapshots	Details of the terms of use snapshot represents the state of the terms of use of the data collection when the order was placed.
consumer	Details of the Data User that was granted access to the data collection.
usageContext	Details of the usage context that the Data User selected at the time of order.
createdBy	Details of the user account that created the consumer access.
createdOn	Date when the consumer access was created.
modifiedBy	Details of the latest user account that modified the consumer access.
modifiedOn	Latest date when the consumer access was modified.

Parameter	Description
customFields	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Withdraw consumer accesses

Use a REST API to withdraw a Data User's access to a data collection.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess/<consumerAccessId>/withdrawn** <consumerAccessId>: Required. Enter the system generated unique identifier of the consumer access for which you want to withdraw. For more information about how you can use an API to get the system generated unique identifier of a consumer access, see "Retrieve consumer accesses" on page 315. To get the system generated unique identifier of a consumer access from the Data Marketplace interface, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85, the system generated unique identifier is e254491f-5795-49bd-be0b-385eb11d9d5a.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
comment	Optional. Enter a comment about the action taken.

Note: The API has no payload.

Example request

The following example shows how you can use an API to withdraw a consumer access:

```
https://{{CDMP_URL}}/api/v1/integration/consumerAccess/794a215f-5479-4b55-8e1b-
a4866ec9fe82/withdrawn?comment=Request%20Withdraw
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to withdraw a consumer access:


```
{
  "id": "794a215f-5479-4b55-8e1b-a4866ec9fe82",
  "refId": "ACC-246",
  "status": "WITHDRAWN",
  "accessGrantedOn": "2022-09-14T13:30:36.405Z",
  "costCenter": "Retail-IQO3456",
  "order": {
    "justification": "Required for the Q3 sales reporting.",
    "deliveryRequests": null,
    "requestedProvisionedTargetRef": "b441a10a-d64d-4801-94d8-145e805001c4",
    "refId": "ORD-337",
    "dataCollections": {},
    "termsOfUseSnapshots": null,
    "status": "COMPLETE",
    "id": "b986ae59-7fc9-414c-98d7-14c7a1671023",
    "usageContext": null,
    "createdBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T13:30:36.405Z",
    "modifiedBy": {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T13:30:36.405Z",
    "costCenter": "Retail-IQO3456"
  },
  "deliveryTarget": {
```

```
"id": "b441a10a-d64d-4801-94d8-145e805001c4",
"name": "IPFS Delivery",
"description": "Use this template to deliver data via IPFS.",
"isDefault": true,
"status": "ACTIVE",
"physicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
"targetSystemReference": "IPFS",
"deliveryTemplate": {
  "id": "1c865800-86ca-4280-8cdd-89dda66c013c",
  "name": "IPFS",
  "description": "Use this template to deliver data via IPFS.",
  "color": null,
  "isDefault": true,
  "status": "ACTIVE",
  "managedAccess": "DISABLED",
  "deliveryType": "AUTOMATIC",
  "templateOwners": [
    {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "targetSystemReference": "IPFS",
  "defaultPhysicalLocation": "ipfs://{cid}/path/to/subresource/cat.jpg",
  "deliveryMethods": null,
  "deliveryFormats": null,
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"deliveryMethod": {
  "id": "f8f8as4d-c0f0-3r11-fr04-7b7h2ce46731",
  "name": "IPFS",
  "status": "ACTIVE",
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"deliveryFormat": {
  "id": "e0f8af4d-c0f0-4c02-af03-5b9b2ce43253",
  "name": "CSV",
  "status": "Deliver data as a CSV file.",
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [],
  "technicalOwners": [],
  "createdBy": {
    "displayName": "Janet Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jtdoe@informatica.com",
```

```
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "createdOn": "2022-09-14T11:57:00.446Z",
    "modifiedBy": {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "createdBy": "8npzPxKim0XjHE4es2gkAc",
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": "8npzPxKim0XjHE4es2gkAc",
  "modifiedOn": "2022-09-14T11:57:00.446Z"
},
"dataCollection": {
  "id": "e1765e74-7907-4a8a-a622-3ed5532c796f",
  "name": "Retail Sales Report",
  "description": "Sales reports for the retail outlets.",
  "refId": "DCL-834",
  "category": null,
  "usageContexts": null,
  "dataset": null,
  "dataCollectionStatus": "PUBLISHED",
  "dataOwners": [
    {
      "displayName": "Janet Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jtdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "technicalOwners": [
    {
      "displayName": "Johnny Doe",
      "id": "6k7aaGYrSOsfN7RFlPH1YU",
      "name": "23Aug_CDMP_QE1",
      "email": "jydoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    }
  ],
  "createdBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "createdOn": "2022-09-14T11:57:00.446Z",
  "modifiedBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
```

```
      "email": "jdoe@informatica.com",
      "phone": "555-243-456",
      "status": "ACTIVE",
      "userInfo": {},
      "isGroup": true
    },
    "modifiedOn": "2022-09-14T11:57:00.446Z"
  },
  "termsOfUseSnapshots": [
    {
      "id": "e37bf0c7-faf3-4902-8bcc-485d80cc8bb9",
      "termsOfUseId": null,
      "termsOfUseRefId": null,
      "generalTermsOfUse": "This data must not be accessed via unauthorized devices.",
      "name": null,
      "description": null,
      "type": null,
      "status": null,
      "acknowledgement": null,
      "parentId": "null,
      "referenceLink": null,
      "createdOn": "2022-09-14T11:57:00.446Z"
    }
  ],
  "consumer": {
    "displayName": "John Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "usageContext": {
    "id": "9669f6ab-affc-4106-a583-48a6b580b930",
    "name": "Sales Use",
    "description": "This is for sales reporting tasks.",
    "color": null,
    "status": "ACTIVE"
  },
  "createdBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "createdOn": "2022-09-14T13:30:36.726Z",
  "modifiedBy": {
    "displayName": "Jane Doe",
    "id": "6k7aaGYrSOsfN7RFlPH1YU",
    "name": "23Aug_CDMP_QE1",
    "email": "jdoe@informatica.com",
    "phone": "555-243-456",
    "status": "ACTIVE",
    "userInfo": {},
    "isGroup": true
  },
  "modifiedOn": "2022-09-15T13:59:40.472Z",
  "customFields": [
        {
          "name": "Year",
          "value": "2021",
          "values": null
        }
}
```

The following table describes the parameters of each consumer access that is withdrawn:

Parameter	Description
id	System generated unique identifier of the consumer access.
refId	Reference identifier of the consumer access.
status	Status of the consumer access. A consumer access can have the following statuses: - AVAILABLE. The Data User has access to the data collection. - PENDING_WITHDRAW. A request is submitted to withdraw the Data User's access to the data collection. - WITHDRAWN. The Data User's access to the data collection is withdrawn.
accessGrantedOn	Date on which the Data User was granted access to the data collection.
costCenter	Cost center of the Data User that was granted access to the data collection.
order	Details of the order placed by the Data User that was granted access to the data collection.
order > justification	The reason entered at the time of order by the Data User to the stakeholder for the requirement of access to the data.
order > deliveryRequests	Delivery information of the order.
order > requestedProvisionedTargetRef	The delivery target requested by the Data User. **Note:** If the value of the requestedProvisionedTargetRef parameter is null, the order is created without a specific delivery target but rather uses the default delivery template. For more information about how you can retrieve the details of the default delivery template, see "Retrieve delivery templates" on page 152.
order > refId	Reference identifier of the order.
order > dataCollections	Details of the ordered data collection.
order > termsOfUseSnapshots	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
order > status	Status of the order.
order > id	System generated unique identifier of the order.
order > usageContext	Details of the usage type that the Data User selected at the time of order.

Parameter	Description
`order > createdBy`	Details of the user account that ordered the data collection.
`order > createdOn`	Date when the order was created.
`order > modifiedBy`	Details of the latest user account that modified the order.
`order > modifiedOn`	Latest date when the order was modified.
`order > costCenter`	Cost center of the Data User that ordered the data collection.
`deliveryTarget`	Details of the delivery target that was used to deliver the data to the Data User.
`deliveryTarget > id`	System generated unique identifier of the delivery target.
`deliveryTarget > name`	Name of the delivery target.
`deliveryTarget > description`	Description of the delivery target.
`deliveryTarget > isDefault`	Parameter that indicates whether the delivery target is the default delivery option for a data collection. The parameter can have one of the following values: - `true`. The delivery template is the default delivery option for a data collection. - `false`. The delivery template isn't the default delivery option for a data collection.
`deliveryTarget > status`	Status of the delivery target.
`deliveryTarget > physicalLocation`	Default location where the data is delivered. **Note:** If the value of the `managedAccess` parameter is `ENABLED`, the data is not delivered to the location that is specified in the `physicalLocation` parameter. Instead, the data will be delivered to a location that is generated at the time of order fulfillment. The generated location is unique to each order that is fulfilled using this target. For more information, see the *Integrate Data Marketplace with other Informatica services* topic in the *Set Up Data Marketplace* help.
`deliveryTarget > targetSystemReference`	Default system where the data is delivered.
`deliveryTarget > deliveryTemplate`	Details of the delivery template based on which the delivery target was created.
`deliveryTarget > deliveryMethod`	Details of the delivery method.
`deliveryTarget > deliveryFormat`	Details of the delivery format.
`deliveryTarget > dataCollection`	Details of the data collection to which the delivery target is assigned.

Parameter	Description
deliveryTarget > createdBy	Details of the user account that created the delivery target.
deliveryTarget > createdOn	Date when the delivery target was created.
deliveryTarget > modifiedBy	Details of the latest user account that modified the delivery target.
deliveryTarget > modifiedOn	Latest date when the delivery target was modified.
dataCollection	Details of the data collection for which the Data User was granted access.
dataCollection > id	System generated unique identifier of the data collection.
dataCollection > name	Name of the data collection.
dataCollection > description	Purpose of the data collection.
dataCollection > refId	Reference identifier of the data collection.
dataCollection > category	Details of the category of the data collection.
dataCollection > usageContexts	Details of the usage type that is used to specify the certified use of the data collection.
dataCollection > dataset	Details of the data assets that the data collection contains.
dataCollection > dataCollectionStatus	The status indicates whether the data collection is discoverable by Data Users when they search for it. A data collection can have one of the following statuses: - PUBLISHED. The data collection is discoverable to Data Users. - UNPUBLISHED. The data collection isn't discoverable to Data Users.
dataCollection > dataOwners	Details of the stakeholders that are assigned the Data Owner stakeholder role on the data collection.
dataCollection > technicalOwners	Details of the stakeholders that are assigned the Technical Owner stakeholder role on the data collection.
dataCollection > createdBy	Details of the user account that created the data collection.
dataCollection > createdOn	Date when the data collection was created.
dataCollection > modifiedBy	Details of the latest user account that modified the data collection.
dataCollection > modifiedOn	Latest date when the data collection was modified.

Parameter	Description
termsOfUseSnapshots	Details of the terms of use snapshot that represents the state of the terms of use of the data collection when the order was placed.
consumer	Details of the Data User that was granted access to the data collection.
usageContext	Details of the usage context that the Data User selected at the time of order.
createdBy	Details of the user account that created the consumer access.
createdOn	Date when the consumer access was created.
modifiedBy	Details of the latest user account that modified the consumer access.
modifiedOn	Latest date when the consumer access was modified.
customFields	The custom fields of the consumer access and their values. Custom attributes are additional properties for Data Marketplace items that are defined by your administrator in Metadata Command Center. For more information about custom attributes, see the *Create custom attributes for items* topic in the *Set Up Data Marketplace* help.
customFields > name	The system generated unique identifier of the custom attribute. For more information about how you can retrieve the custom attribute name as it appears on the Data Marketplace interface, see "Retrieve custom attributes" on page 353.
customFields > value	The custom attribute value. This parameter can have only a single value.
customFields > values	The custom attribute value. This parameter can have multiple values.

Delete consumer accesses

Use a REST API to delete withdrawn consumer accesses in Data Marketplace.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/consumerAccess/<consumerAccessId>** <consumerAccessId>: Required. Enter the system generated unique identifier of the consumer access that you want to delete. For more information about how you can use an API to get the system generated unique identifier of a consumer access, see "Retrieve consumer accesses" on page 315. To get the system generated unique identifier of a consumer access from the Data Marketplace interface, open the consumer access. The consumer access page's URL contains the system generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the system generated unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Method	DELETE

To invoke this API, ensure your user profile is assigned the Data Marketplace Administrator role.

Alternatively, ensure that your user profile is assigned a role for which the following privileges and permissions are enabled:

- **Delete** and **Read** permissions are enabled in Metadata Command Center for consumer accesses.
- **Access Data Marketplace** privilege is enabled in Administrator.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to delete a consumer access:

```
https://{{CDMP_URL}}/api/v1/integration/consumerAccess/794a215f-5479-4b55-8e1b-a4866ec9fe82
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the consumer access is deleted successfully:

```
204 OK code
```

CHAPTER 10

Custom attributes

Custom attributes are additional properties for Data Marketplace objects that are defined by your Administrator in Metadata Command Center.

A stakeholder of a data collection can use custom attributes to specify additional information about a data collection when the standard properties of the collection are insufficient. Additionally, Data Users that order the data collection can use the newly added property to provide more information when they place an order.

For more information about custom attributes, see the *Create custom attribute for items* topic in the *Set Up Data Marketplace* help.

Retrieve custom attributes

Use REST APIs to retrieve the custom attribute details for a consumer access, data collection or an order.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/model/customAttributes**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`classType`	Required. Specify the type of item for which you want to retrieve the custom attribute details.	Enter one of the following values: - To retrieve the custom attribute details of a consumer access, enter `com.infa.cdmp.marketplace.ConsumerAccess`. - To retrieve the custom attribute details of a data collection, enter `com.infa.cdmp.marketplace.DataCollection`. - To retrieve the custom attribute details of an order, enter `com.infa.cdmp.marketplace.Order`.
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum is `100`.

Example request

The following example shows how you can use an API to retrieve the custom attribute details for a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/model/customAttributes?
classType=com.infa.cdmp.marketplace.DataCollection&offset=0&limit=100
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the custom attribute details for a data collection:


```
{
  "processingTime": 863,
  "offset": 0,
  "limit": 100,
  "totalCount": 2,
  "classType": "com.infa.cdmp.marketplace.DataCollection",
  "items": [
      {
         "customAttributeId": "com.infa.odin.models.custom.ca_7821688086685433570",
         "name": "GDPR Compliance Required",
         "status": "PUBLISHED",
         "mandatory": true,
         "searchable": false,
         "defaultValues": ["false"],
         "datatype":
             {
                "type": "BOOLEAN",
                "properties": null,
                "dropDownOptions": null
```

```
        }
},
{
   "customAttributeId": "com.infa.odin.models.custom.ca_3184028726397751640",
   "name": "Date of Issue",
   "status": "PUBLISHED",
   "mandatory": false,
   "searchable": false,
   "defaultValues": ["2023-09-05"],
   "datatype":
       {
          "type": "DATE",
          "properties": null,
          "dropDownOptions": null
       }
},
{
   "customAttributeId": "com.infa.odin.models.custom.ca_6928840635020975219",
   "name": "Consumption Rate",
   "status": "PUBLISHED",
   "mandatory": true,
   "searchable": true,
   "defaultValues": ["45.6"],
   "datatype":
       {
          "type": "DECIMAL",
          "properties": null,
          "dropDownOptions": null
       }
},
{
   "customAttributeId": "com.infa.odin.models.custom.ca_7907323524500803261",
   "name": "Requirement",
   "status": "PUBLISHED",
   "mandatory": true,
   "searchable": false,
   "defaultValues": ["Secure Data Transfer"],
   "datatype":
       {
          "type": "RICH_TEXT",
          "properties": null,
          "dropDownOptions": null
       }
},
{
   "customAttributeId": "com.infa.odin.models.custom.ca_1535512762047882544",
   "name": "User Count",
   "status": "PUBLISHED",
   "mandatory": true,
   "searchable": false,
   "defaultValues": ["10"],
   "datatype":
       {
          "type": "INTEGER",
          "properties": null,
          "dropDownOptions": null
       }
},
{
   "customAttributeId": "com.infa.odin.models.custom.ca_8610145587620226269",
   "name": "Network Stack",
   "status": "PUBLISHED",
   "mandatory": false,
   "searchable": false,
   "defaultValues": ["Reticulum"],
   "datatype":
       {
          "type": "DROPDOWN_SINGLE_SELECT",
          "properties": {"multivalued": "false"},
          "dropDownOptions": [
                 {
```

```
                        "value": "Reticulum",
                        "label": "Reticulum"
                    },
                    {
                        "value": "libp2p",
                        "label": "libp2p"
                    }
                ]
            }
        },
        {
            "customAttributeId": "com.infa.odin.models.custom.ca_5588843841075376340",
            "name": "Network Protocol",
            "status": "PUBLISHED",
            "mandatory": true,
            "searchable": false,
            "defaultValues": ["LXMF"],
            "datatype":
                {
                    "type": "PLAIN_TEXT",
                    "properties": null,
                    "dropDownOptions": null
                }
        },
        {
            "customAttributeId": "com.infa.odin.models.custom.ca_1007408542741800522",
            "name": "Is Critical",
            "status": "PUBLISHED",
            "mandatory": true,
            "searchable": true,
            "defaultValues": ["false"],
            "datatype":
                {
                    "type": "BOOLEAN",
                    "properties": null,
                    "dropDownOptions": null
                }
        },
        {
            "customAttributeId": "com.infa.odin.models.custom.ca_3068304325528979652",
            "name": "Cloud Platform",
            "status": "PUBLISHED",
            "mandatory": false,
            "searchable": true,
            "defaultValues": ["Apache CloduStack"],
            "datatype":
                {
                    "type": "DROPDOWN_MULTI_SELECT",
                    "properties": {"multivalued": "true"},
                    "dropDownOptions": [
                            {
                                "value": "Apache CloduStack",
                                "label": "Apache CloduStack"
                            },
                            {
                                "value": "Microsoft Azure",
                                "label": "Microsoft Azure"
                            },
                            {
                                "value": "Google Cloud Platform",
                                "label": "Google Cloud Platform"
                            },
                            {
                                "value": "Amazon Web Services",
                                "label": "Amazon Web Services"
                            }
                        ]
                    }
                }
        ]
}
```

The following table describes the parameters of each custom attribute that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
totalCount	Number of custom attributes retrieved.
classType	Type of item for which the custom attribute details were retrieved. This parameter can have one of the following values: - If the parameter value is com.infa.cdmp.marketplace.ConsumerAccess, the item is a consumer access. - If the parameter value is com.infa.cdmp.marketplace.DataCollection, the item is a data collection. - If the parameter value is com.infa.cdmp.marketplace.Order, the item is an order.
items > customAttributeId	System generated unique identifier of the custom attribute in Metadata Command Center.
items > name	Name of the custom attribute as configured in Metadata Command Center.
items > status	Status of the custom attribute as configured in Metadata Command Center. This parameter returns only the custom attributes that are in PUBLISHED state. The PUBLISHED state indicates that the custom attributes are displayed in Data Marketplace.
items > mandatory	This parameter indicates whether or not the custom attribute is mandatory. This parameter can have one of the following values: - true. A user must enter a value in this attribute. - false. A user doesn't require to enter a value in this attribute.
items > searchable	This parameter indicates whether or not you can use the custom attribute to search for a data collection. This parameter can have one of the following values: - true. You can use the custom attribute to search for a data collection. - false. You can't use the custom attribute to search for a data collection.
items > defaultValues	Default value of the custom attribute as configured in Metadata Command Center.
items > datatype > type	Type of the custom attribute as configured in Metadata Command Center.

Parameter	Description
`items > datatype > properties`	Subtype of the custom attribute as configured in Metadata Command Center. The value of the `properties` parameter depends on the value configured for the `type` parameter.
`items > datatype > dropDownOptions`	The values that are acceptable inputs to the custom attribute, as configured in Metadata Command Center. **Note:** This parameter is displayed in the response body only if the custom attribute is of type `DROPDOWN_SINGLE_SELECT`.

CHAPTER 11

Collaboration on objects

You can collaborate with other users in Data Marketplace. This allows you to enhance the quality of data that is available in your organization's Data Marketplace, and allows you to extract more business value from your organization's data.

You can collaborate with other users in the following sections of Data Marketplace:

- On the **Chat** panel of a data asset, data collection or category.
- On the **Timeline** section of an order, consumer access or data collection request.

Comment on an object

Use REST APIs to add a comment on one of the following sections in Data Marketplace:

- On the **Chat** panel of a data asset, data collection or category.
- On the **Timeline** section of an order, consumer access or data collection request.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/integration/collaboration/<objectId>/interactions/comments** `<objectId>`: Required. Enter the system generated unique identifier of the object to which you want to add a comment. For more information about how you can retrieve the system generated unique identifier of an object, "How do I retrieve the system-generated unique identifier of a Data Marketplace item?" on page 373.
Method	POST

Note:

- You can publish a maximum of 100 comments per object.
- You can publish only one comment per API call.
- You can call a maximum of 100 APIs per minute.

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
`text`	Required. Enter your comment.	Enter a comment with length from 0 through 500 characters. **Note:** If you use an API to add a comment, you cannot tag a user in your comment. To tag a user, add a comment from the Data Marketplace user interface. For more information, see the *Collaboration in Data Marketplace* topic in the *Introduction and Getting Started* help.

Example request

The following example shows how you can use an API to add a comment to a data collection:

```
{
  "text": "This data collection does not cover the EMEA region data."
}
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to add a comment to a data collection:

```
{
  "id": "49d4856a-90b3-3584-abd6-47db0fe9acb6"
}
```

The following table describes the parameters of each custom field that is retrieved:

Parameter	Description
`id`	System generated unique identifier of the comment that you added.

Retrieve comments on an object

Use REST APIs to retrieve the comments that are added to one of the following sections in Data Marketplace:

- On the **Chat** panel of a data asset, data collection or category.
- On the **Timeline** section of an order, consumer access or data collection request.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/integration/collaboration/<objectId>/interactions/comments** `<objectId>`: Required. Enter the system generated unique identifier of the object to which you want to add a comment. For more information about how you can retrieve the system generated unique identifier of an object, "How do I retrieve the system-generated unique identifier of a Data Marketplace item?" on page 373.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description	Additional Information
`offset`	Optional. Enter the starting index for the paginated results.	Default is `0`.
`limit`	Optional. Enter the maximum number of results.	Default is `50`. Maximum is `100`.

Example request

The following example shows how you can use an API to retrieve the comments that are added to a data collection:

```
https://{{CDMP_URL}}/api/v1/integration/collaboration/8c4c2089-6c7e-4696-
a8f6-44f87639d65c/interactions/comments
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of an API call to retrieve the comments that are added to a data collection:


```
{
  "offset": 0,
  "limit": 50,
  "totalCount": 1,
  "objects": [
    {
      "id": "49d4856a-90b3-3584-abd6-47db0fe9acb6",
      "text": "This data collection does not cover the EMEA region data.",
      "createdBy": "7w2uGIARApUgxniNoHHWsJ",
      "createdOn": "2022-03-08T17:05:28.208Z",
      "modifiedBy": "7w2uGIARApUgxniNoHHWsJ",
```

```
        "modifiedOn": "2022-03-08T17:09:34.623Z"
      }
    ]
  }
```

The following table describes the parameters of each custom field that is retrieved:

Parameter	Description
offset	Starting index for the paginated results.
limit	Maximum number of results.
id	System generated unique identifier of the comment.
text	Contents of the comment.
createdBy	System generated unique identifier of the user account that added the comment.
createdOn	Date when the comment was added.
modifiedBy	System generated unique identifier of the latest user account that modified the comment.
modifiedOn	Latest date when the comment was modified.

CHAPTER 12

Data Marketplace customizations

You can personalize the look and feel of Data Marketplace according to your organization's requirements.

You must have the Data Marketplace Administrator profile to customize the look and feel of your organization's Data Marketplace instance.

Retrieve customizations

Use REST APIs to retrieve the details of the customizations applied to your Data Marketplace instance.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/admin/settings/customizations/lookandfeel**
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to retrieve the details of the customizations applied to your Data Marketplace instance:

```
https://{{CDMP_URL}}/api/v1/integration/admin/settings/customizations/lookandfeel
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of the API call:

```
{
  "processingTime": 1015,
  "orgLogoURL": "string",
  "primaryColor": "#039FB0",
  "backgroundColor": "#EAEAEA",
  "borderRadius": "11"
}
```

The following table describes the parameters in the response body:

Parameter	Description
orgLogoURL	URL to the location that contains the logo of your organization.
primaryColor	Primary color of the Data Marketplace interface. This is the color used by the buttons, checkbox and other such user interface elements.
backgroundColor	Background color of a page.
borderRadius	Border radius of the buttons on the Data Marketplace interface.

Update customizations

Use REST APIs to update the customizations applied to your Data Marketplace instance.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/admin/settings/customizations/lookandfeel**
Method	PATCH

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the body of the API payload:

Parameter	Description	Additional Information
orgLogoURL	Optional. Enter the URL to the location that contains the logo of your organization.	-
primaryColor	Optional. Specify a primary color for the Data Marketplace interface. This is the color used by the buttons, checkbox and other such user interface elements.	Enter a hexadecimal value that represents the color that you want to use.
backgroundColor	Optional. Specify a background color for a page.	Enter a hexadecimal value that represents the color that you want to use.
borderRadius	Optional. Specify a border radius for the buttons on the Data Marketplace interface.	Enter a value between 0 and 20.

Example request

The following example shows how you can use an API to update the customizations applied to your Data Marketplace instance:

```
{
  "orgLogoURL": "https://www.informatica.com/",
  "primaryColor": "#039FB0",
  "backgroundColor": "#EAEAEA",
  "borderRadius": 11
}
```

Response

When you pass the API payload in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of the API call:

```
{
  "processingTime": 1015,
  "orgLogoURL": "string",
  "primaryColor": "#039FB0",
  "backgroundColor": "#EAEAEA",
  "borderRadius": "11"
}
```

The following table describes the parameters in the response body:

Parameter	Description
orgLogoURL	URL to the location that contains the logo of your organization.
primaryColor	Primary color of the Data Marketplace interface. This is the color used by the buttons, checkbox and other such user interface elements.
backgroundColor	Background color of a page.
borderRadius	Border radius of the buttons on the Data Marketplace interface.

Reset customizations

Use REST APIs to reset the customizations applied to your Data Marketplace instance.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/admin/settings/customizations/lookandfeel**
Method	DELETE

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to reset the customizations applied to your Data Marketplace instance:

```
https://{{CDMP_URL}}/api/v1/integration/admin/settings/customizations/lookandfeel
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the customizations applied to your Data Marketplace instance are reset successfully

```
204 OK code
```

CHAPTER 13

Technical content

A technical content is a specialized payload information that allows Data Marketplace to seamlessly interface with external data repositories.

This API allows you to specify the type of data that must be supplied from Data Marketplace to the external data repository, and the type of data that must be supplied from the external data repository to Data Marketplace, to allow seamless interaction between the two.

For example, to use data from an object data store to create a new data collection in your organization's data lake. After a Data User's data collection request in Data Marketplace is approved, you can use this API via an Application Integration IPD process to retrieve the request details, and compile them into a standardized data interchange file such as a JavaScript Object Notation (JSON) manifest file. After this, Application Integration sends this file to IDMC Data Integration. Data Integration stages the data into the data lake, and then reports the outcome of the staging operation to Application Integration. At this stage, Application Integration calls the "Create data collections" on page 212 API to create a new data collection in Data Marketplace.

Retrieve the technical content of an object

Use a REST API to retrieve the technical content of an object.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/technicalContent/<objectId>** `<objectId>`: Required. Enter the system generated identifier of the Data Marketplace object for which you want to retrieve the API payload. For more information about how you can retrieve the system generated unique identifier of an object, see Chapter 14, "Frequently Asked Questions" on page 372.
Method	GET

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The API has no payload.

Example request

The following example shows how you can use an API to retrieve the technical content:

```
https://{{CDMP_URL}}/api/v1/integration/technicalContent/794a215f-5479-4b55-8e1b-a4866ec9fe82
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

The following example shows the response of the API call:

```
{
  "content": "string"
}
```

The following table describes the parameters of each technical content that is retrieved:

Parameter	Description
content	Specialized payload information that allows Data Marketplace to interface with non-Informatica products.

Update the technical content of an object

Use a REST API to update the technical content of an object.

Endpoint and method

The following table describes the connection properties for the API:

Property	Description
Endpoint	**/api/v1/integration/technicalContent/<objectId>** <objectId>: Required. Enter the system generated identifier of the Data Marketplace object for which you want to replace the API payload. For more information about how you can retrieve the system generated unique identifier of an object, see Chapter 14, "Frequently Asked Questions" on page 372.
Method	PUT

For more information about how you can call an API, see "Authenticate using Application Integration" on page 15.

Request

The following table describes the parameters that you enter in the request query:

Parameter	Description
content	Required. Enter the specialized payload information that allows Data Marketplace to interface with non-Informatica products.

Example request

The following example shows how you can use an API to update the technical content:

```
{
  "content": "string"
}
```

Response

When you pass the API query parameters in the REST client, the client displays a response for the parameter values that you have entered.

If you see the following response code, it means that the technical content is updated successfully:

```
204 OK code
```

Part IV: Frequently Asked Questions

This part contains the following chapter:

- Frequently Asked Questions, 372

CHAPTER 14

Frequently Asked Questions

This chapter includes the following topics:

- When to authenticate with JWT and when with Application Integration?, 372
- Can I use data360 endpoints to design an Application Integration process?, 372
- How do I retrieve the system-generated unique identifier of a Data Marketplace item?, 373
- How do I retrieve the system-generated unique identifier of a user account or user group?, 376
- How do I retrieve the system-generated unique identifier of an asset group or user role?, 376

When to authenticate with JWT and when with Application Integration?

Some Data Marketplace APIs support both JWT and Application Integration authentication, while others require you to only use JWT authentication or use Application Integration. For APIs that support both methods of authentication, JWT provides you with greater flexibility because it works with REST clients, cURL, and can also be used to design Application Integration processes. Use Application Integration for APIs that exclusively require this type of authentication.

Can I use data360 endpoints to design an Application Integration process?

Yes, you can use a Data Marketplace API with a base URL in the following format to design an Application Integration process:

```
https://idmc-api.dm-<region>.informaticacloud.com/data360/marketplace/
```

For more information about Data Marketplace API that use the data360 endpoint, see "Authenticate using JWT" on page 21. For more information about how you can design an Application Integration process, see the *Design* help in Application Integration.

How do I retrieve the system-generated unique identifier of a Data Marketplace item?

Depending on the type of item, you can get the unique identifier from the user interface or using an API. The following table explains how you can get the unique identifier of various items:

Item	Using an API	From the User Interface
Category	For more information about how you can use an API to get the system-generated unique identifier of a category, see "Retrieve all categories" on page 31.	To get the system-generated unique identifier of a category from the Data Marketplace user interface, open the category. The category page's URL contains the system-generated unique identifier. For example, in the URL `https://{{CDMP_URL}}/category/view?ac=67417f72-e5ab-44f0-add9-a1e412c1ce13&dtn=_AfterEBF%20may20`, the system-generated unique identifier is `67417f72-e5ab-44f0-add9-a1e412c1ce13`.
Cost center	For more information about how you can use an API to get the system-generated unique identifier of a cost center, see "Retrieve cost centers" on page 183.	-
Delivery format	For more information about how you can use an API to get the system-generated unique identifier of a delivery format, see "Retrieve delivery formats" on page 136.	-
Delivery method	For more information about how you can use an API to get the system-generated unique identifier of a delivery method, see "Retrieve delivery methods" on page 143.	-
Delivery template	For more information about how you can use an API to get the system-generated unique identifier of a delivery template, see "Retrieve delivery templates" on page 152.	-
Delivery target	For more information about how you can use an API to get the system-generated unique identifier of a delivery target, see "Retrieve all delivery targets" on page 77.	-

Item	Using an API	From the User Interface
Terms of use	For more information about how you can use an API to get the system-generated unique identifier of a terms of use, see "Retrieve terms of use" on page 165.	-
Usage type	For more information about how you can use an API to get the system-generated unique identifier of a usage type, see "Retrieve usage type" on page 174.	-
Data element	For more information about how you can use an API to get the system-generated unique identifier of a data element, see "Retrieve data elements" on page 191.	-
Data asset	For more information about how you can use an API to get the system-generated unique identifier of a data asset, see "Retrieve data assets" on page 203.	To get the system-generated unique identifier of a data asset from the Data Marketplace user interface, open the data asset. The data asset page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/dataAsset/8c4c2089-6c7e-4696-a8f6-44f87639d65c?dtn=Table_Profiling_AK_1676302415587&tab=dataElements`, the unique identifier is `8c4c2089-6c7e-4696-a8f6-44f87639d65c`.
Data collection	For more information about how you can use an API to get the system-generated unique identifier of a data collection, see "Retrieve all data collections" on page 51.	To get the system-generated unique identifier of a data collection from the Data Marketplace user interface, open the data collection. The data collection page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollection/25158afc-3dfb-44ef-8f3e-cec1e171d0f1?dtn=&tab=summary`, the unique identifier is `25158afc-3dfb-44ef-8f3e-cec1e171d0f1`.

Item	Using an API	From the User Interface
Data collection request	For more information about how you can use an API to get the system-generated unique identifier of a data collection request, see "Retrieve data collection requests" on page 258.	To get the system-generated unique identifier of a data collection request from the Data Marketplace user interface, open the data collection request. The data collection request page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/datacollectionrequest/6e5964ec-e0aa-4eac-963a-3dae0fa1d639?dtn=Request~9b4d`, the unique identifier is `6e5964ec-e0aa-4eac-963a-3dae0fa1d639`.
Order	For more information about how you can use an API to get the system-generated unique identifier of an order, see "Retrieve all orders" on page 94.	To get the system-generated unique identifier of a order from the Data Marketplace user interface, open the order. The order page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/order/3d48daf6-5e75-4e1a-848c-b6821fc33f74?dtn=Order~579b`, the unique identifier is `3d48daf6-5e75-4e1a-848c-b6821fc33f74`.
Consumer access	For more information about how you can use an API to get the system-generated unique identifier of a consumer access, see "Retrieve all consumer accesses" on page 111.	To get the system-generated unique identifier of a consumer access from the Data Marketplace user interface, open the consumer access. The consumer access page's URL contains the unique identifier. For example, in the URL `https://{{CDMP_URL}}/access/e254491f-5795-49bd-be0b-385eb11d9d5a?dtn=Access~2e85`, the unique identifier is `e254491f-5795-49bd-be0b-385eb11d9d5a`.
Custom attributes of an item	For more information about how you can retrieve the system-generated unique identifier of a custom attribute, see "Retrieve custom attributes" on page 353.	-

How do I retrieve the system-generated unique identifier of a user account or user group?

How do I retrieve the system-generated unique identifier of a user account?

To get the system-generated unique identifier of a user account, click **My Services > Administrator > Users**. On the **Users** page, click a user account. The user account page's URL contains the unique identifier.

For example, in the URL `/cloudUI/products/administer/main/usersAsset/0LH3xBJC9A6haZ26htGZyT`, the unique identifier is `0LH3xBJC9A6haZ26htGZyT`.

How do I retrieve the system-generated unique identifier of a user group?

To get the system-generated unique identifier of a user group, click **My Services > Administrator > User Groups**. On the **User Groups** page, click a user group. The user group page's URL contains the unique identifier.

For example, in the URL `/cloudUI/products/administer/main/userGroupsAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.

How do I retrieve the system-generated unique identifier of an asset group or user role?

How do I retrieve the system-generated unique identifier of an asset group?

To get the system-generated unique identifier of an asset group, click **My Services > Metadata Command Center > Customize**. On the **Customize** page, select the **Asset Groups** tab. On the **Asset Groups** tab, click an asset group. The user role page's URL contains the unique identifier.

For example, in the URL `/assetGroup/07a3ef9c-9410-421f-9b21-64ec9ac9778f`, the unique identifier is `07a3ef9c-9410-421f-9b21-64ec9ac9778f`.

How do I retrieve the system-generated unique identifier of a user role?

To get the system-generated unique identifier of a user role, click **My Services > Administrator > User Roles**. On the **User Roles** page, click a user role. The user role page's URL contains the unique identifier.

For example, in the URL `/cloudUI/products/administer/main/userRolesAsset/90uizkSWg0ycuu7hSNXSW4`, the unique identifier is `90uizkSWg0ycuu7hSNXSW4`.