Informatica®
10.5.10

Enterprise Data Catalog User Guide

Informatica Enterprise Data Catalog User Guide
10.5.10
February 2026

© Copyright Informatica LLC 2015, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Subject to your opt-out rights, the software will automatically transmit to Informatica in the USA information about the computing and network environment in which the Software is deployed and the data usage and system statistics of the deployment. This transmission is deemed part of the Services under the Informatica privacy policy and Informatica will use and otherwise process this information in accordance with the Informatica privacy policy available at https://www.informatica.com/in/privacy-policy.html. You may disable usage collection in Administrator tool.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http://www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http://httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

See patents at https://www.informatica.com/legal/patents.html.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-05-09

Table of Contents

Preface 11

Informatica Resources 11

- Informatica Network 11
- Informatica Knowledge Base 11
- Informatica Documentation 11
- Informatica Product Availability Matrices 12
- Informatica Velocity 12
- Informatica Marketplace 12
- Informatica Global Customer Support 12

Part I: Discovery 13

Chapter 1: Getting Started with Informatica Enterprise Data Catalog 14

Enterprise Data Catalog Overview 14

- Enterprise Data Catalog User Interface 15

Logging in to Enterprise Data Catalog 15

Business Examples 16

Chapter 2: Search for Assets 19

Search for Assets Overview 19

Searching for Assets 20

Additional Search Options 21

Sort Search Results 26

Search Rank 26

View Additional Details 27

Chapter 3: Customize Search 28

Customize Search Overview 28

Search Filters 28

- Refine By Resource Name 30
- Refine by Asset Type 30
- Refine by Resource Type 31
- Refine by Last Updated Time 31
- Refine by Asset Size 32
- Refine by Data Domain 32
- Refine by Certified Assets 33
- Refine by Rating 33
- Refine by Composite Data Domain 34
- Refine by Attributes 34
- Refine by Reference Assets 35

Refine by Business Term Status. . . . 35
Modify Selected Filters. . . . 35
Search Prefilters. . . . 35
Default Search Prefilters. . . . 36

Chapter 4: View Assets. . . . 38

View Asset Details Overview. . . . 38
Axon Glossary Assets. . . . 39
Axon Glossary Overview 40
Viewing Axon Glossary Assets in Informatica Axon. . . . 42
Business Glossary Assets. . . . 42
Glossary Overview. . . . 44
Business Term Overview. . . . 45
Category Overview. . . . 47
Policy Overview 49
Viewing Business Glossary Assets in Informatica Analyst 50
Tabular Assets. . . . 50
Tabular Asset Overview 51
Viewing Column Details. . . . 55
Data Domain Curation for Columns and Fields from a Tabular Asset. . . . 56
Viewing the Rules and Scorecards Information. . . . 58
Checking the Data Quality of Tabular Assets. . . . 59
Viewing the Unique Key Details. . . . 60
Viewing the Foreign Key Details. . . . 60
Rule Assets. . . . 61
Rule Asset Overview 62
Rule Asset Details. . . . 63
Scorecard Assets. . . . 63
Scorecard Asset Overview. . . . 63
Scorecard Asset Details. . . . 64
Column and Field Assets. . . . 65
Column and Field Overview. . . . 66
Viewing the Field Details. . . . 70
Creating a Smart Data Domain. . . . 71
Data Domain Curation for Columns and Fields. . . . 71
Data Domain Assets. . . . 73
Data Domain Overview Tab. . . . 74
Data Domain Group Overview. . . . 76
Data Domain Curation. . . . 77
Data Domain Curation through Export and Import. . . . 78
Composite Data Domain Assets. . . . 80
Composite Data Domain Overview 81
Mapping Assets. . . . 82

Mapping Overview. . . . 82
Reference Assets. . . . 83

Chapter 5: View Lineage and Impact. . . . 85

View Lineage and Impact Overview. . . . 85
The Classic View (Deprecated). . . . 86
The Compact View. . . . 88
The Asset Summary View. . . . 90
Asset Lineage Summary 91
Asset Impact Summary 91
Asset Control Summary 91
Information in the Asset Summary. . . . 92
Lineage and Impact Tasks. . . . 93
Customizing the Diagram and Compact View. . . . 93
Displaying Child Assets. . . . 94
Displaying Upstream and Downstream Assets. . . . 95
Displaying Assets within a Link. . . . 97
Displaying Business Terms. . . . 98
Displaying Transformation Logic for Assets. . . . 98
Viewing the Context Information. . . . 101
Filtering the Diagram and Compact View 104
Printing, Exporting, and Viewing Legends in the Diagram. . . . 109
Filtering the Asset Summary 110
Exporting the Asset Summary 110

Chapter 6: View Relationships. . . . 111

View Relationships Overview. . . . 111
Relationships View. . . . 111
Customizing the Relationships View. . . . 112
Types of Relationships. . . . 113
Difference Between the Lineage and Impact View and Relationships View. . . . 114
Viewing Asset Relationships. . . . 114
Viewing keys of related tables. . . . 114
Exporting Asset Relationships. . . . 116

Chapter 7: Perform Asset Tasks. . . . 117

Perform Asset Tasks Overview. . . . 117
Associate Business Title. . . . 117
Business Term Association Workflow 119
Automatic Business Term Association. . . . 119
Business Term Recommendations 120
Manual Business Term Association 122
Business Term Curation through Export and Import. . . . 124

Assign Custom Attributes. 125
Assigning Custom Attribute Values to an Asset. 125
Export and Import Assets. 126
Prerequisites. 127
Export File Description. 128
Exporting Assets 129
Exporting Unique and Foreign Keys. 129
Importing Assets. 130
Monitoring Export and Import Jobs. 130
Export Asset Data to a Tableau Data Extract File 131
Prerequisites. 131
Exporting Asset Data to a Tableau Data Extract File. 131

Chapter 8: User Collaboration on Assets 132

User Collaboration on Assets Overview. 132
Follow Asset 132
Following an Asset 133
Following a Resource 138
Managing Assets Followed. 141
Unfollowing an Asset 142
Unfollowing a Resource 142
Rate and Review an Asset. 142
Rating and Reviewing an Asset. 143
Deleting a Review. 143
Asset Questions. 143
Adding Questions. 144
Deleting Questions. 144
Adding Answers. 144
Deleting Answers. 144
Certify an Asset 145
Certifying an Asset 145
Decertifying an Asset 145
Certifying or decertifying assets in bulk. 146

Chapter 9: Data Preview and Provisioning. 147

Data Preview and Provisioning Overview 147
Data Preview 147
Previewing Data. 148
Data Provisioning 149
Source and Target Connection Properties 150
Creating Provisioning Task. 166
Viewing Provisioning Task History 167

Chapter 10: Configure Application 168

Application Configuration Overview. 168
Configure Application Settings 168
Configuring Asset Types. 169
Configuring System Attributes. 170
Configuring Custom Attributes. 171
Configuring Filter Settings 172
Search Prefilter Configuration 173
Creating Search Prefilters. 173
Editing Search Prefilter Properties 174
Rearranging Search Prefilters. 174
Configuring Search Default Prefilters in the Application Configuration Interface. 174

Chapter 11: Catalog Backup and Log Collection Utilities. 176

Overview. 176
Accessing Utilities. 177
Performing a Catalog Backup. 177
Log Collection Utilities. 178
Collect Enterprise Data Catalog Service Logs. 178
Collect Resource Logs. 178
Monitoring Utility Run Status. 179

Part II: Analytics. 180

Chapter 12: Data Asset Analytics 181

Data Asset Analytics Overview. 181
Data Asset Analytics User Interface 182
Accessing Data Asset Analytics. 183
Business Example. 184

Chapter 13: Analyze Dashboard. 185

Analyze Dashboard Overview. 185
Analyzing Dashboard by Time Range. 186
Dashboard Tabs. 186
User Adoption 188
Data Asset Inventory 189
Data Asset Enrichment. 191
User Collaboration. 193
Data Value. 194
Calculating the Resource Value 196
Calculating the Asset Enrichment Value. 198
Calculating the User Collaboration Value. 200

Calculating the Feature Usage Value. 202

Chapter 14: Analyze Reports. 205

Analyze Reports Overview. 205
Viewing the Reports Page. 205
Report Types. 206
Asset Count Report. 207
Asset Enrichment Report. 207
Asset Lineage Links Report. 209
Assets with Lineage and Impact Report. 210
Asset Usage Report. 211
Business Term Association Report. 212
Data Domain Association Report. 214
Resource Scan History Report. 215
User and User Groups Report. 216
User Collaboration Report. 217
User Logins Report. 218
User Searches Report. 219
Creating a Report. 220
Monitoring Report Status. 221
Reusing an Existing Report to Create a New Report. 222
Deleting an Existing Report. 222
Data Asset Analytics Database Views for Reports 222
DAA_ASSET_ENRICHMENT_SV. 223
DAA_ASSET_WITHOUT_ENRICHMENT_SV. 223
DAA_ASSET_COUNT_SV. 227
DAA_ASSET_LINEAGE_FRM_TO_LINKS_SV. 227
DAA_ASSET_LINEAGE_IMPACT_SV. 228
DAA_ASSET_USAGE_SV. 228
DAA_BUSINESS_TERM_ASSOC_SV. 229
DAA_DATA_DOMAIN_ASSOC_SV. 230
DAA_RESOURCE_SCAN_HIST_SV. 231
DAA_USER_COLLABORATION_SV. 231
DAA_USER_GROUPS_SV. 232
DAA_USER_LOGIN_SV. 232
DAA_USER_SEARCH_SV. 233

Chapter 15: Configure Analytics Application 234

Configure Analytics Application Overview. 234
Configure Analytics Application Settings. 235
Configuring Application Settings. 236
Configuring Server Settings. 237
Refresh analytical data in pre-computed tables. 239

Chapter 16: Data Flow Analytics. 240
Data Flow Analytics Overview. 240
Data Flow Analytics User Interface. 240
Accessing Data Flow Analytics. 241
Use Case. 241

Chapter 17: Analyze Mapping Dashboard. 243
Dashboard Overview. 243
Resource Mapping Discovery. 244
Download Reports. 250
Viewing Mapping Diagrams and Expressions. 251

Appendix A: Enterprise Data Catalog Plug-in. 253
Enterprise Data Catalog Plug-in Overview. 253
Enterprise Data Catalog Plug-in User Interface. 254
Prerequisites for the Tableau Server. 255
Enterprise Data Catalog Plug-in Installation. 255
Configuring Enterprise Data Catalog Plug-in. 256
Viewing Assets in Enterprise Data Catalog Plug-in. 256

Appendix B: Enterprise Data Catalog Add-Ons. 257
Enterprise Data Catalog Add-Ons Overview. 257
Deploy the Add-Ons. 258
Log in to the Enterprise Data Catalog Add-Ons. 258
View Resource Schedules and Duplicate Resources. 258
Accept Data Domains. 259
Moving Data Domains using the Data Domains Manager Utility. 260
Associate Business Terms from Synonym File. 261
Migrate Custom Attributes. 262

Index. 263

Preface

Use the *Enterprise Data Catalog User Guide* to learn how to use the Enterprise Data Catalog interface. You can search for assets, verify the quality of data, view asset data flow and relationships, and collaborate on assets. You can also view analytical insights about the catalog in the form of reports and view analytical data about PowerCenter mappings in the catalog.

This guide is intended to help a data analyst or data architect in an enterprise to use Enterprise Data Catalog.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Velocity

Informatica Velocity is a collection of tips and best practices developed by Informatica Professional Services and based on real-world experiences from hundreds of data management projects. Informatica Velocity represents the collective knowledge of Informatica consultants who work with organizations around the world to plan, develop, deploy, and maintain successful data management solutions.

You can find Informatica Velocity resources at http://velocity.informatica.com. If you have questions, comments, or ideas about Informatica Velocity, contact Informatica Professional Services at ips@informatica.com.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

Part I: Discovery

This part contains the following chapters:

- Getting Started with Informatica Enterprise Data Catalog, 14
- Search for Assets, 19
- Customize Search, 28
- View Assets, 38
- View Lineage and Impact, 85
- View Relationships, 111
- Perform Asset Tasks, 117
- User Collaboration on Assets , 132
- Data Preview and Provisioning, 147
- Configure Application , 168
- Catalog Backup and Log Collection Utilities, 176

CHAPTER 1

Getting Started with Informatica Enterprise Data Catalog

This chapter includes the following topics:

- Enterprise Data Catalog Overview, 14
- Logging in to Enterprise Data Catalog, 15
- Business Examples, 16

Enterprise Data Catalog Overview

Enterprise Data Catalog helps you analyze and understand large volumes of metadata in the enterprise.

You can extract physical and operational metadata for many objects, organize the metadata based on business concepts, and view the data lineage and relationship information for each object. Enterprise Data Catalog maintains a catalog. The catalog serves as a centralized repository that stores all the metadata extracted from different external sources.

Enterprise Data Catalog extracts metadata from external sources such as databases, data warehouses, business glossaries, data integration resources, or business intelligence reports. For ease of search, the catalog maintains an indexed inventory of all the assets in an enterprise. Assets represent the data objects such as tables, columns, reports, views, and schemas. Metadata and statistical information in the catalog include profile results, information about data domains, and information about data relationships. Enterprise Data Catalog stores the metadata extracted from external sources in the MongoDB database.

You can use Discovery and Data Asset Analytics within Enterprise Data Catalog. Use Data Asset Analytics to optimize the data asset value in your data catalog by using analytics on data asset inventory, usage, enrichment, and user collaboration. Use Enterprise Data Catalog Discovery to search, enrich, collaborate, verify the quality of the data that you extract from different data sources.


You can use Enterprise Data Catalog Discovery to perform the following tasks:

- Find available assets.
- Explore assets to verify the quality of data, such as profiling information.
- View the start point and the end point along with the data flow for the asset.
- View relationships between assets.
- View transformations for assets.

- Increase your productivity by reducing the time to search for assets by using multiple search filters including data domains. Data domains represent predefined formats for assets that you can search and retrieve from the catalog. Examples Include the Social Security number and Zip code.
- Enrich the asset attributes by tagging the asset with additional attributes to refine and make your search faster. You can assign business glossary resources to assets to define the business context and implement data governance in your enterprise. After tagging an asset, you can search for the asset in the catalog using the additional attributes.
- Collaborate on assets by adding reviews, ratings, questions, following assets, and certifying assets.

Enterprise Data Catalog User Interface

The following image shows the user interface of Enterprise Data Catalog with sample search results.

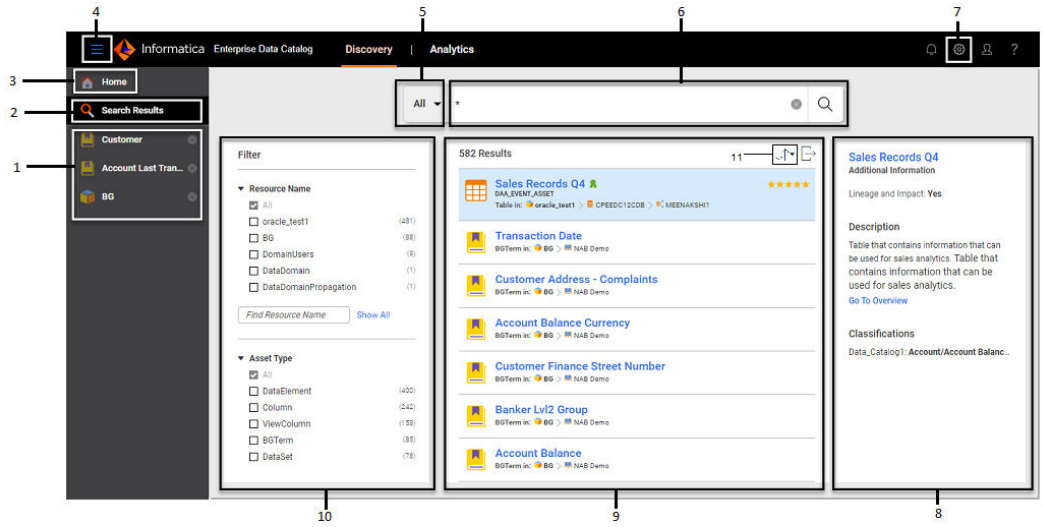

1. List of assets that you previously accessed
2. Return to the search results from any view
3. Return to the home page
4. Hide or display icon names
5. Apply search prefilter
6. Search for assets
7. Access application configuration page
8. Additional information about the selected asset
9. Search results
10Filters used to refine your search
11Sort listed assets based on different attributes

Note: You can access the application configuration page only if you are assigned the "Catalog Privileges: Application Configuration" privilege.

Logging in to Enterprise Data Catalog

Use the Informatica Enterprise Data Catalog URL to log in to Informatica Enterprise Data Catalog from a browser.

1. Open a browser.


2. In the **Address** field, type the URL for the Enterprise Data Catalog login page in the following format:

   ```
   http://<host>:<port>/ldmcatalog
   ```

   The host is the gateway node host name. The port is the Informatica Catalog Service port number.
3. On the **Enterprise Data Catalog** login page, type the user name and password.

   Use the same log in credentials that you used to log in to the Catalog Administrator.
4. Click **Log In**

   The Enterprise Data Catalog search page appears as shown in the following image.

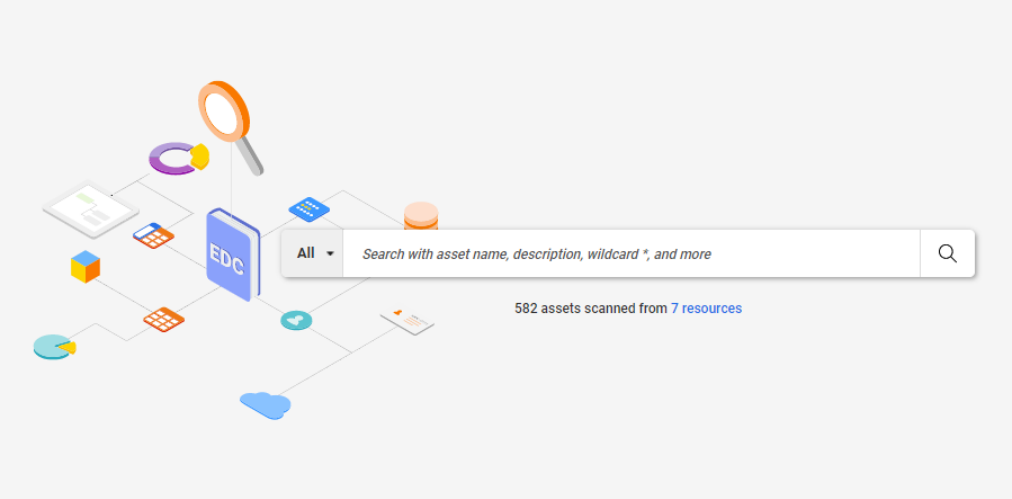

   Enterprise Data Catalog displays the total number of assets in the catalog along with the number of resources. Clicking the number of resources displays all the resources on the **Search Results** page.

Business Examples

The business examples provide some of the scenarios in which you can use Enterprise Data Catalog. These business examples assume that Enterprise Data Catalog is installed and configured and the catalog is populated with metadata from all data sources.

Example 1

Susan works as a data analyst in a retail corporation that has outlets across the country. She is asked to analyze the product and sales distribution for the corporation and produce a report based on her findings. The input that Susan received is the sales distribution report for the retail corporation that exists in one of the regional data warehouses. Susan must search in thousands of databases maintained at different regional data warehouses for the retail corporation across the country.

The following table lists the tasks that Susan must complete and the steps that she must perform in Enterprise Data Catalog to accomplish the tasks:

Tasks	Steps Using Enterprise Data Catalog
Search for the sales distribution report.	Use the search feature provided by Enterprise Data Catalog to search for the report in all the databases. Susan can search based on the report name or perform a generic search using the wildcard search feature. Susan can further customize the search using the search filters.
Discover the source tables that contribute data to the report.	After finding the report, Susan can view the details of the report to identify the tables from where data is taken for the report. She can view the report details using the **Overview** tab.
Ensure the quality of source tables used in the report.	Susan can check and verify the profiling information displayed for the report in the **Overview** tab to ensure the quality of data.
Identify the related assets of the source tables in the report to gather the required assets that she needs to make the new report.	Susan can view the relationship between the assets using the **Relationships** tab. She can also find the flow of data using the **Lineage and Impact** tab. These steps help her identify the different assets that she must consider to build the new report.
Enrich assets used in the new report to tag these assets with additional information for ease of search.	Enriching the assets with the attributes makes search easier. For example, enriching the sales figures based on the regional location makes it easier to find the sales figures for a particular region. Susan designs a new custom attribute based on regions in the Catalog Administrator and names the attributes North, South, East, and West. She then uses the **Edit Attributes** feature in Enterprise Data Catalog to tag these region attributes to the corresponding sales figure assets used in the report. Susan can now search using any of the attributes to get a list of assets for the specific region.

Example 2

Alex, the data architect in a financial institution, must make sure that there are no security violations in the institution. Recently, the institution has had multiple instances where customers have reported fraudulent transactions on their credit cards. Alex must search in millions of databases to find the tables and reports where the credit card numbers exist. He must then report the violations and take the necessary steps to remove or mask credit card details in tables where the credit card details must not be stored.

The following table lists the tasks that Alex must complete and the steps that he must perform in Enterprise Data Catalog to accomplish the tasks:

Tasks	Steps Using Enterprise Data Catalog
Search all the databases for the credit card data domain.	Use the search feature provided by Enterprise Data Catalog to search for the report in all the databases. Alex can search based on the credit card asset name, the column name, or perform a generic search using the wildcard search. Alex can further customize the search using the search filters.
Identify the tables and reports where the credit card details exist.	After finding the assets that include the credit card details, Alex must shortlist the assets that violate the security policy of the institution by storing the credit card details. Alex finds the details of each asset by viewing the **Overview** tab. Alex also uses the **Lineage and Impact** tab to view the data flow for the asset. If the asset must not have the credit card details according to the policy of the institution, Alex marks that asset as a violation.
Annotate tables that violate the security policy with attributes.	Alex annotates the assets that violate the policy of the institution with a custom attribute named Non Compliance. Alex uses the Enterprise Data Catalog to create this custom attribute and uses Enterprise Data Catalog to annotate the violating assets with the custom attribute. The IT team can find the required assets from millions of assets and take the necessary corrective action.

CHAPTER 2

Search for Assets

This chapter includes the following topics:

- Search for Assets Overview, 19
- Searching for Assets, 20
- Additional Search Options, 21
- Sort Search Results, 26
- Search Rank, 26
- View Additional Details, 27

Search for Assets Overview

You can perform a search for assets in multiple ways in Enterprise Data Catalog.

You can use the asset name as a keyword or perform a generic search using the wildcard character, asterisk (*).

You can also search for exact matches using double quotes (""). When you search for a word or phrase using double quotes, the word or phrase is tokenized into different terms with no word boundary.

To make your search results more accurate, you can use search operators, such as AND, OR, NOT, title, and description.

Enterprise Data Catalog also displays suggestions when you type the name of a required asset.

Enterprise Data Catalog displays search results based on the stemming process. Stemming is a process of reducing a word to its root. For example, if you search for an asset called `Customer`, Enterprise Data Catalog might display `Custom` in the search results in addition to assets with `customer` in their names.

Enterprise Data Catalog also ignores stop words in a search query. Some examples of stop words are 'the',' a', 'an', and 'in'. For example, if the catalog contains an asset named `Sales 2018` and you enter `Sales in 2018` in the search box, Enterprise Data Catalog ignores `in` and displays `Sales 2018` in the search results.

To search for assets that contain a backslash in the asset name, include an additional backslash in the keyword. For example, if the catalog contains an asset named `AB/CD`, enter `AB//CD` in the search box to retrieve the correct search results.

When you choose to show details in the search results page, the page by default displays the details of the asset, such as the asset description, asset certification status, rating for the asset, path to the asset, and type of the asset. You can use the search filters displayed to refine your search further based on the Certified Assets, Ratings, Resource Name, Asset Type, Resource Type, Last Updated, Rows, and Data Domains. You can also save your search filter criteria and use them as search prefilters before you search for assets.

After finding the required asset, you can click the asset to view the profiling details, the lineage, and the relationship of the asset with other assets.


Alternatively, you can perform this task using the REST APIs. For more information, see the List the Catalog Search Results topic in the *Enterprise Data Catalog REST API Reference guide*.

Searching for Assets

You can search for assets from the home page of the Enterprise Data Catalog tool.


1. Log in to the Enterprise Data Catalog tool using your credentials.

   The home page of the Enterprise Data Catalog tool appears with the search box as shown in the following image.

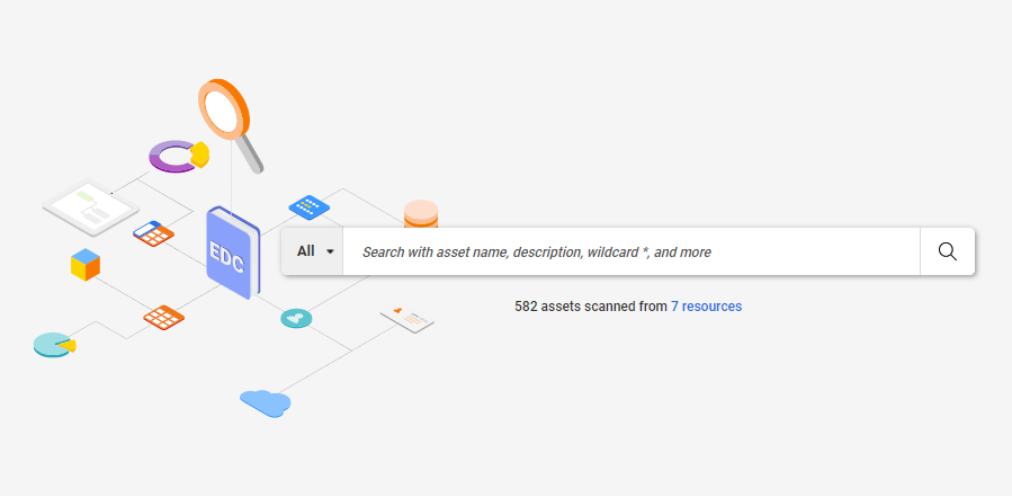

2. Optional. From the search box, select a search prefilter based on which you want to filter the search results.
3. Type the name of the asset that you want to search for in the search box and click the search icon.

The matching results appear as shown in the following image.

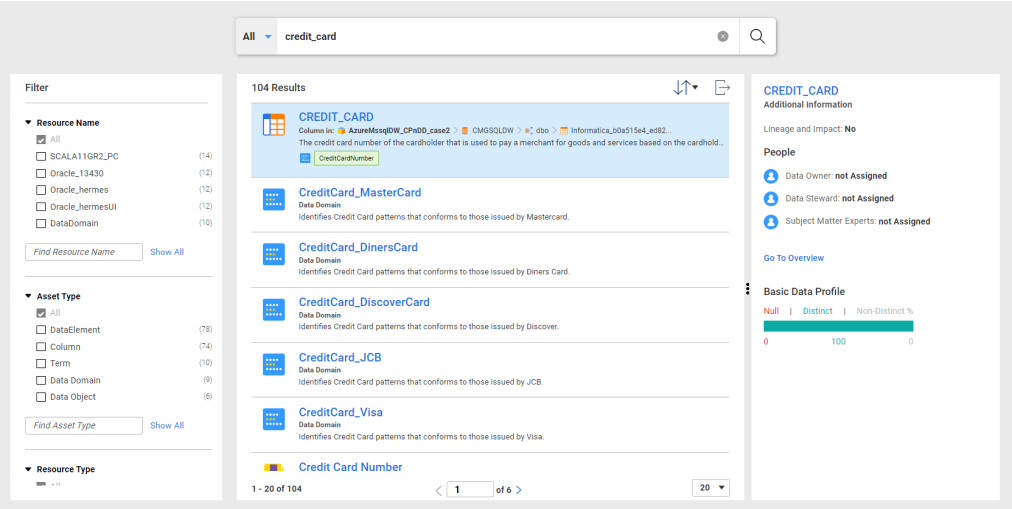

The assets that appear in the **Search Results** page display the following information:

- Business title
- Technical name
- Asset path
- Certification status
- Asset type
- Ratings
- Description
- Data domains
- Composite data domains

Note:

- The search results show a summary of the details of the asset.
- The number in parentheses under the **Filter** panel sections indicates the number of matching results found for the searched asset under those categories.

Additional Search Options


You can use additional search options to search for assets.

Wildcard Search

You can use the asterisk character (*) to perform a wildcard search.

If you enter * in the **Search** box and click the search icon ( ), Enterprise Data Catalog lists all the assets in the catalog. You can also use the asterisk with parts of an asset name. For example, to search for all the assets that end with the string "_name," enter `*_name` in the **Search** box. Enterprise Data Catalog lists all of the assets that match the search criteria, for example, `Associate_Name`, `party_name`, and `cust_name`.

The following image shows an example of search results for a wildcard search.

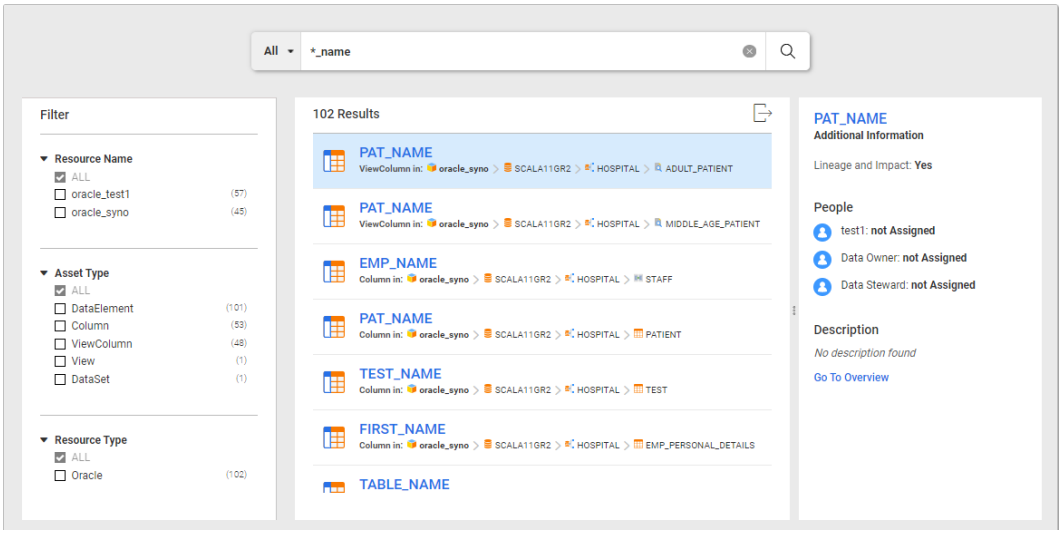

You can also perform wildcard search using the relative asset path with the `id:` keyword. For example, the path for a column might be `<resource>/<database>/<schema>/<table>/<column>`. You might want to search within a schema named HERMES for columns containing the keyword EMAIL. Use `*` in place of the database and table names to include all assets of those asset types, and then enter the search term `id:*/HERMES/*/EMAIL` in the **Search** box to search for the columns.

Search Using Double Quotes ("")

You can use the double quotes (`""`) to search for an exact match.

If you type a word or phrase within the double quotes in the **Search** box and click the search icon (), Enterprise Data Catalog lists the asset that exactly matches the word or phrase within the double quotes. When you search for a word or phrase using double quotes, the word or phrase is tokenized into different terms. The Catalog searches the terms in the exact order and maintains the position of the terms typed within in the double quotes, but without word boundary. For example, if you search for the `"Customer Annual Data"` asset name within the double quotes in the search box, the Catalog might list asset names, such as `Customer_Annual_Data`, `Customer_Annual_Data_Report`, `Informatica_Customer Annual Data Report`, and `Customer Annual Data` in the search results page. However, if you search for the `Customer Annual Data` asset name without the double quotes, the Catalog might list asset names, such as `Annual Customer Data`, `Informatica Annual Customer Data Report`, `Annual Report Customer Data`, and `Customer Annual Report Data` in the search results page.

The word or phrase is tokenized based on the following criteria:

- Camel case. For example, if you search for `CustomerData` in the **Search** box, the search entry is tokenized as `Customer` and `Data`.
- Special characters. For example, if you search for `Customer_Data` in the **Search** box, the search entry is tokenized as `Customer` and `Data`.
- Numbers. For example, if you search for `Customer123Data` in the **Search** box, the search entry is tokenized as `Customer`, `123`, and `Data`.
- Space. For example, if you search for `Customer Data` in the **Search** box, the search entry is tokenized as `Customer` and `Data`.

For example, if you want to search for an asset with the name `"customer"` in the **Search** box, Enterprise Data Catalog lists the assets that contain the exact word `customer` or the root word of `customer`. In addition to the exact matches, the search results include close matches, such as `customer`, `customers` and `customer's`.

If you type a phrase within the double quotes in the **Search** box, Enterprise Data Catalog lists the assets that contain the exact phrase in the same order. For example, if you enter `"customer id"` in the **Search** box, Enterprise Data Catalog lists the assets that contain the exact phrase `customer id` in the same order. In addition to the exact matches, the search results include close matches, such as `customer id`, `customerID`, `customers ID` and `customer's ID`.

If you search for the asset name that has stop words within the double quotes, Enterprise Data Catalog does not completely ignore the stop words in the search query. You can replace the stop word with another stop word, but you cannot remove it from the search query. For example, consider that the catalog contains an asset named `Profits in 2019`, and you want to search for the asset using the double quotes. You can enter `"Profits of 2019"` instead of `Profits in 2019` in the search box. Enterprise Data Catalog lists the `Profits in 2019` asset in the search results.

If you use the double quotes to search for an asset that has a prefix in its name, Enterprise Data Catalog does not apply the prefix match logic for the double quotes search. For example, you want to search for an asset named `customerid`. Using the double quotes, you enter `"customer"` in the search box, Enterprise Data Catalog does not list the asset `customerid` because the word customer is a prefix in the asset name.

Note: The Search query is not case sensitive.

Search Operators

A search operator is a character or string of characters used in Enterprise Data Catalog to narrow the focus of the search. The search operator is also referred to as a search parameter. You can use search operators to make the search results more accurate. To use the search operators, type in the specific operator in uppercase letters.

The following table describes the search operators:

Operator	Search Query	Description
AND	For example, `customer AND id`	Use the AND operator to search for an asset that contains two or more keywords together in its name. The search results need not be in the same order as the search query. For example, to search for an asset named `customer id`, you can use the AND operator as follows: `customer AND id`. After you search for the asset using the operator, Enterprise Data Catalog lists the assets that contain both customer and id along with all variations, but not necessarily in the same order. For example, the search results page might display both `id customer` and `customer id` variations in the search results. **Note:** The AND operator is the default operator.
OR	For example, `customer OR id`	Use the OR operator to search for an asset that contains one of the keywords, multiple key words, and all the keywords in the search query. For example, to search for an asset named `customer id`, you can use the OR operator as follows: `customer OR id`. After you search for the asset using the operator, Enterprise Data Catalog lists the assets that contain either `customer` or `id`, or both along with all variations.

Operator	Search Query	Description
NOT or hyphen (-)	For example, `customer -id`	Use the NOT or hyphen (-) operator to exclude keywords from the name of the asset that you do not want to display in the search results. For example, if you want to search for assets that have `customer` in their names, but not `id`, you can use the NOT operator as follows: `customer -id` or `customer NOT id`. After you search for the asset using the operator, Enterprise Data Catalog lists the assets that contain only customer along with all variations. It eliminates `id` from the search results.
title	For example, `title:"customer id"`	Use the title operator to search for an asset within the title field. For example, if you want to search for an asset named `customer id` within the title field, you can use the title operator as follows: `title:"customer id"`. After you search for the asset using the operator, Enterprise Data Catalog lists the assets that contain `customer id` within the title in the same order. You can also use the title operator as follows: `title:customer title:id`. After you search for the asset using the operator, the catalog lists the assets that contain `customer id` within the title, but not necessarily in the same order. The search results page might display both `customer id` and `id customer` variations in the search results.
description	For example, `description:"customer id"`	Use the description operator to search for an asset within the description field. For example, if you want to search for an asset named `customer id` within the description field, you can use the description operator as follows: `description:"customer id"`. After you search for the asset using the operator, Enterprise Data Catalog lists the assets that contain `customer id` within the description in the same order. You can also use the description operator as follows: `description:customer description:id`. After you search for the asset using the operator, the catalog lists the assets that contain `customer id` within the description, but not necessarily in the same order. The search results page might display both `customer id` and `id customer` variations in the search results.

You can also use the AND, OR, and NOT operators together in a search to get more specific search results when you search for an asset. If you use different operators in the search query, Enterprise Data Catalog evaluates the search query according to operator precedence. Enterprise Data Catalog evaluates a higher precedence operator before a lower precedence operator. The NOT or hyphen (-) operator takes first precedence followed by the AND operator, and then the OR operator.


For example, if you type `"Fulltime Employee" OR "Parttime Employee" AND "Intern" NOT "Other Staff"` in the search box, and then click the search icon. Enterprise Data Catalog ignores the word `Other Staff` from the search query first. Then, searches the words `Parttime Employee` and `Intern` in the catalog. After getting the search results for `Parttime Employee` and `Intern` query, the Catalog then searches for the word `Fulltime Employee` from the remaining search results.

If there are operators with the same precedence, Enterprise Data Catalog evaluates the search query from left to right.

Search Suggestions

When you type the first few letters of an asset name into the **Search** box, Enterprise Data Catalog suggests matching asset names or business titles.

The following image shows an example of search suggestions where probable matches appear as search suggestions:

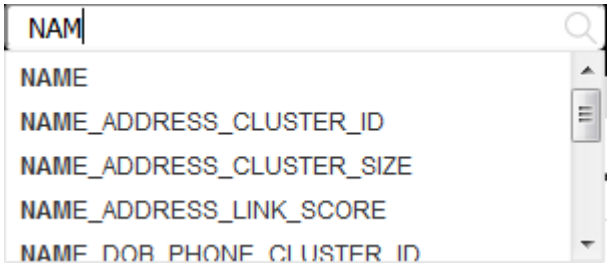

For example, if you enter `NAM` to search for an asset named `NAME`, Enterprise Data Catalog lists probable matches.

Note: The suggestions include all custom attributes that are of type string. Assets or custom attribute names that include special characters do not get listed.

Keyword Search

You can use a keyword when you want to search specifically for a type of asset in the catalog.

Enterprise Data Catalog supports the following keywords:


- Table
- Column
- File
- Report

You can use keywords in regular sentences or phrases.

For example, to search for all tables with customer details, you enter `tables with customer` in the **Search** box. Enterprise Data Catalog returns the following results:

- Tables with the word "customer" in the name
- Tables with descriptions that contain the word "customer"
- Tables that have the associated business term "customer"
- Tables that contain columns for which the "customer" data domain is inferred or assigned

The following image shows the search results.

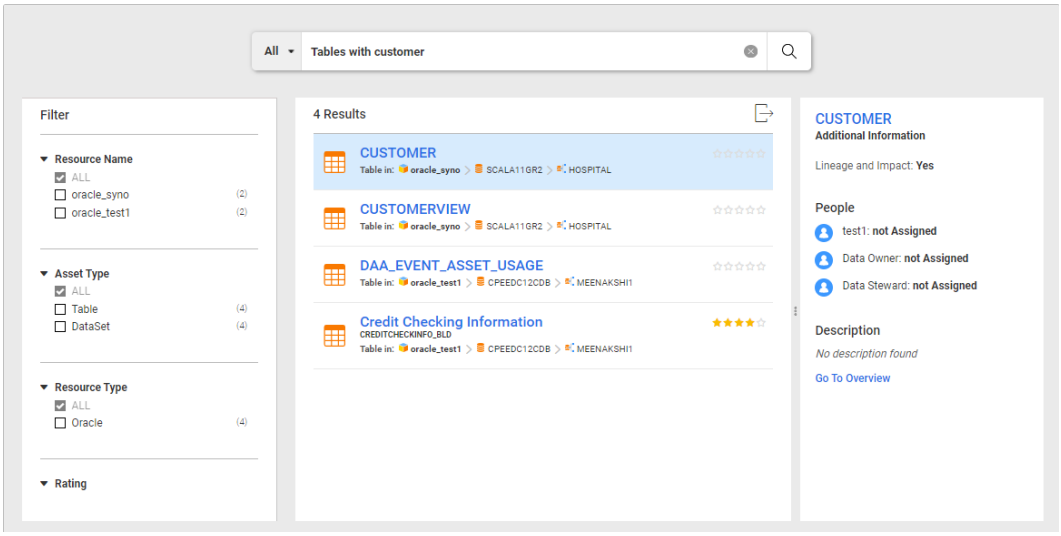

Sort Search Results

You can sort the displayed assets based on the name of the listed assets, the relevance, or the system attributes or the custom attributes selected.

You can sort search results in the following ways:

- To sort assets based on the name, click ↓↑ and select **Name**.
- To sort assets based on the system attribute or the custom attribute, click ↓↑ and select the required attribute.
- To sort assets based on the relevance to the search, click ↓↑ and select **Relevance**.

Note: If you sort the assets based on name, the system attributes, or the custom attributes, the sort options list displays an up arrow (↑) or a down arrow (↓) before the sort criteria selected. An up arrow indicates that the assets are sorted in the ascending order based on the selected criteria and a down arrow indicates that the assets are sorted in the descending order.

Search Rank

Search ranking refers to the precedence of an asset when compared to other assets that are part of specific search results. In Enterprise Data Catalog, you can enter the search query in the **Search** field. Then, when you perform the search, the search results page display assets that meet the search criteria. The search results

page is unique for every search query. Enterprise Data Catalog uses its own ranking algorithm to rank data assets in the search results page.

The data assets in the search results page rank in the following order:

1. In Enterprise Data Catalog, the certified asset appears at the top of the search results in the search results page. You can find assets that are reliable and trustworthy based on the certification of asset stakeholders.
2. Exact match search entries. Displays all the assets that include the search entry on the search results page, but assets that exactly match the search entry in the title take the priority on the search results page. For example, when you search an asset named `Customer`, the catalog displays all the assets that match the word `Customer` in the following order:
   - customer
   - customerdetails
   - Customer details
3. The search results page lists the following types of assets after certified assets:
   - Composite Data Domains
   - Data Domain Group
   - Data Domains
   - Axon Glossary and Business Glossary
   - Reports
4. Assets matching the title rank higher than the assets matching other fields, such as description and attribute values. Additionally, the data assets with user interactions, such as ratings, reviews, custom attributes, and comments take precedence over the data assets without user interactions.

View Additional Details

The search results page by default displays the asset type and the asset path. It also displays details such as the asset certification status, rating for the asset, and system and custom attributes associated with the asset. You can view additional details of the assets in the **Additional Information** panel.

The **Additional Information** panel contains a link to access the overview page of the selected asset and based on the asset type, displays the following details:

- Date and time when the resource was last scanned
- Name of the data owner and data steward
- Subject matter expert for specific asset types
- Custom attributes
- Associated Business terms
- Classifications
- Number of similar columns
- Profiling Information

For asset types such as table, column, viewcolumn, and view, the section displays whether lineage and impact exists. If data flows from other assets to the seed asset, or from the seed asset to other assets, then lineage and impact exists. If the seed asset is not connected to any other asset, then lineage and impact does not exist.

CHAPTER 3

Customize Search

This chapter includes the following topics:

- Customize Search Overview, 28
- Search Filters, 28
- Search Prefilters, 35

Customize Search Overview

After you search for an asset, you can use the search filters to refine the search results further. The filters in the **Filter** section help you to refine the search results based on your requirements. You can also select a different prefilter in the search box and search for assets to view only the results that have been refined based on the predefined filters set by the prefilters.

For example, you might want to search for a data object. You can apply the Data Objects prefilter and search for assets using appropriate search criteria. All data objects that match the search criteria appear in the results page. Now, if you want to further narrow down the search results and view only the tables, you can select Table from the **Asset Type** filter.

Search Filters


You can refine the search results based on filters, such as Asset Type, Attributes, Certified Assets, Composite Data Domain, Data Domain, Ratings, and Resource Type. When you select a filter option from the filters list, Enterprise Data Catalog displays search results based on the selected filter option. For example, the search results page displays all the available assets in the Catalog. You want to view assets that belong to a particular resource named `Oracle_HR`. You can then select the filter option `Oracle_HR` available in the **Resource Name** filter. The search results page then refreshes the results and displays all the assets that belong to the `Oracle_HR` resource.

Use the following search filters to refine the search results:

- **Asset Type**. Type of the asset.
- **Attributes**. System attributes or custom attributes.
- **Certified Assets**. Assets certified by the data owner, data steward, or subject matter expert.
- **Composite Data Domains**. Composite data domains that were inferred.
- **Data Domains**. Data domains that were assigned and inferred.

- **Last Updated**. Last time the assets were updated in the catalog.
- **Reference Assets**. Show or hide reference assets in the search results page.
- **Ratings**. Ratings that users provide on assets in the catalog.
- **Resource Name**. Name of the resource.
- **Resource Type**. Resource type from where the asset details were collected.
- **Size**. Size of the asset.
- **Axon Status**. Active or inactive status of Axon glossaries.
- **Business Glossary Status**. Active or inactive status of business glossary terms.

The following image shows the search filters in the **Filter** panel:

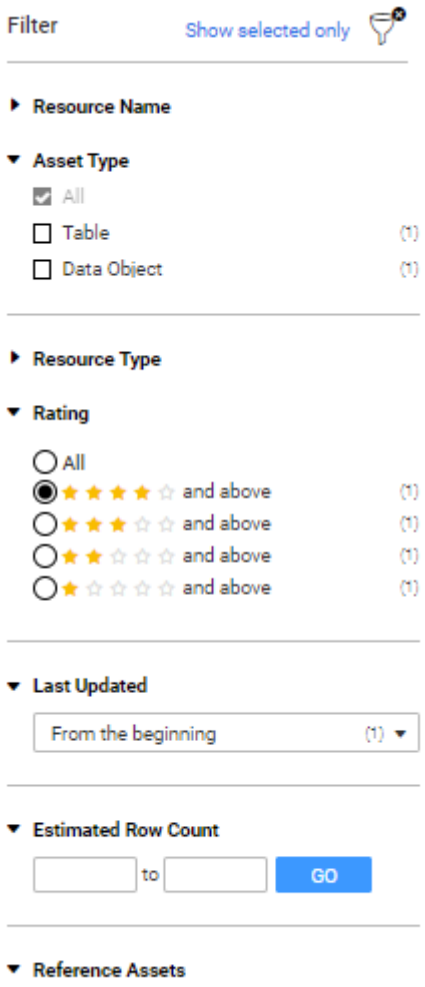

Alternatively, you can list the search filters using the REST APIs. For more information, see the List the Facet Definitions topic in the *Enterprise Data Catalog REST API Reference guide*.

Refine By Resource Name

You can search for assets based on the name of a resource.

Adding Resource Names

You can add resource names that are not displayed in the **Resource Name** list. You can then use these resource names to refine your search.

1. Click **Add**.
2. Start typing the name of the resource in the box. A list of matching resource names appears.
3. Select the resource name. Enterprise Data Catalog refreshes the search results based on the selected resource name.

Viewing all the Resource Names

You can view all the resource names that are not listed in the **Resource Name** list. You can then add the required resource name to the **Resource Name** list and refine your search.

1. Click **Show All**. The **Select Resource Name** dialog box appears.

   Note: The **Show All** option appears if the number of resources created in the catalog is more than five.
2. From the **Name** column, select a resource name.
3. Click **OK**. Enterprise Data Catalog refreshes the search results based on the selected resource name.

Refine by Asset Type

You can refine your search based on the type of asset. You can use the **Asset Type** filter for refining the search.

The Asset Type Filter

You can select **All** from the **Asset Type** filter to specify that the search is applicable to all types of assets. You can click a specific type of asset or click multiple assets based on your search requirement. Examples of data types are the following:

- Column
- Table
- Resource
- View

For example, when you select **Table** from the **Asset Type** list, Enterprise Data Catalog lists all the assets of type Table.

Adding Asset Types

By default, Enterprise Data Catalog does not list all the asset types in the **Asset Type** list. You can add asset types that are not displayed to the **Asset Type** list. You can then use these asset types to refine your search.

1. Click **Add**.
2. Start typing the name of the asset in the box. A list of matching asset types appears.
3. Select the asset type that you want. Enterprise Data Catalog refreshes the search results based on the type of selected asset.

Viewing all the Asset Types

You can view all the asset types that are not listed in the **Asset Type** list. You can then add the required asset types to the **Asset Type** list and refine your search.

1. Click **Show All**. The **Select Asset Type** dialog box appears.

   Note: The **Show All** option appears if the number of assets is more than five in the catalog.
2. From the **Name** column, select the types of assets
3. Click **OK**. Enterprise Data Catalog refreshes the search results based on the attribute selected.

Refine by Resource Type

You can search for assets based on specific data sources.

The Resource Type Filter

You can select **All** from the **Resource Type** list to specify that the search is applicable to all the data source types.

Adding Resource Types

By default, Enterprise Data Catalog does not display all the data sources in the **Resource Type** list. You can add data sources that are not displayed to the **Source** list. You can then use these sources to refine your search.

1. Click **Add**.
2. Start typing the name of the data source in the box. A list of matching data sources appears.
3. Select the data source that you want. Enterprise Data Catalog refreshes the search results based on the type of selected data source.

Viewing all the Resource Types

You can view all the data source types that are not listed in the **Resource Type** list. You can then add the required data source types to the **Resource Type** list and refine your search.

1. Click **Show All**. The **Select Resource Type** dialog box appears.

   Note: The **Show All** option appears if the number of resource types is more than five in the catalog.
2. Select the required data sources from the **Name** column.
3. Click **OK**. Enterprise Data Catalog refreshes the search results based on the type of selected data source.

Refine by Last Updated Time

You can search for assets based on when the information about the asset was last updated in the catalog.

You can select one of the following options from the **Last Updated** list:

Option	Description
Today	Displays the search results for asset details updated on the present day.
Yesterday	Displays the search results for asset details updated on the previous day.
Last 7 days	Displays the search results for asset details updated during the last seven days.

Option	Description
Last 1 month	Displays the search results for asset details updated during the last one month.
Last 6 months	Displays the search results for asset details updated during the last six months.
Last 1 year	Displays the search results for asset details updated during the last year.
From the beginning	Displays the search results for asset details present in the catalog from the time the catalog was created.
Custom	Displays the search results based on a range of dates specified by you. To specify the date ranges, perform the following steps: 1. Select the **Custom** option from the **Last Updated** list. 2. Click the boxes to launch the calendar and select the date ranges. 3. Click **GO** to display the search results.

Refine by Asset Size

You can search for assets based on the size of the asset. Enterprise Data Catalog displays multiple ranges for the sizes based on the assets in the resources.

You can use any of the following options listed:

- Select **All** to specify that assets of all sizes must be considered for a search.
- Select a specific range listed.
- Specify a range for the asset sizes if you do not find the range of asset in the displayed list.
  To specify a range of sizes for the searched assets, type the ranges in the boxes provided and click **GO**.

Refine by Data Domain

You can refine your search based on data domains or data domain groups.

You can categorize data domains based on data domain groups. For example, you might want to view all the data domains that belong to the Payment Card Industry (PCI) or Personal Health Information (PHI) data domain group.

Note: If you are a user without administrative privileges, you must make sure that you have the required permissions for the data domain resource in Catalog Administrator before you view or search for a data domain.

Adding Data Domains

By default, Enterprise Data Catalog displays all the inferred and assigned data domains in the **Data Domains** list. You can add data domains that are not displayed in the **Data Domains** list. You can then use these data domains to refine your search.

1. Click **Add**.
2. Start typing the name of a data domain. A list of matching data domains appears.
3. Select the data domains. Enterprise Data Catalog refreshes the search results based on the selected data domains.

Viewing all the Data Domains

You can view all the data domains that are not listed in the **Data Domains** list. You also can choose to view all the data domain groups that are assigned to data domains.

1. Click **Show All**. The **Select Data Domains** window appears.

   Note: The **Show All** option appears if the number of data domains is more than five in the catalog.
2. From the **Name** column, select the data domains.
3. Optionally, use the **Group By** option to view the data domain groups.
4. From the **Name** column, select the data domain groups .

   Note: The **Select Data Domain** window lists those data domains that are grouped under a particular data domain group.
5. Click **OK**. The Enterprise Data Catalog refreshes the search based on the selected data domains or data domain groups.

Refine by Certified Assets

You can refine your search based on the assets that are certified by the data owner, data steward, or subject matter expert. Filter the search results based on certified assets to quickly find assets that are reliable and trustworthy based on the certification of asset stakeholders.

The **Certified Assets** list displays the options, such as **All Assets** and **Certified Assets**. If you select the **All Assets** option, the search results page displays all the assets that are certified along with the assets that are not certified, and if you select the **Certified Assets** option, the search results page displays only the certified assets.

Refine by Rating

You can search for assets based on the ratings that users provide on assets in the catalog. The **Ratings** list displays ratings on a scale of one to five and the asset count in parentheses.

You can select one of the following options from the **Ratings** list:

Option	Description
All	Displays all the assets in the catalog.
★☆☆☆☆ and above	Displays the search results for assets that are rated between one and five.
★★☆☆☆ and above	Displays the search results for assets that are rated between two and five.
★★★☆☆ and above	Displays the search results for assets that are rated between three and five.
★★★★☆ and above	Displays the search results for assets that are rated either four or five.

Refine by Composite Data Domain

You can refine your search based on composite data domains to view all the assets on which a composite data domain is inferred.

Adding Composite Data Domains

By default, Enterprise Data Catalog displays a maximum of five inferred composite data domains in the **Composite Data Domains** list. You can add composite data domains that are not displayed in the **Composite Data Domains** list. You can then use these composite data domains to refine your search.

1. In the **Composite Data Domains** section of the **Filter By** panel, click **Add**.
2. Start typing the name of the composite data domain in the box. A list of matching composite data domains appears.
3. Select a composite data domain. Enterprise Data Catalog refreshes the search results based on the composite data domain that you select.

Note: When you refine your search by composite data domain, the results display assets at the data object level.

Viewing all the Composite Data Domains

By default, Enterprise Data Catalog displays maximum of five inferred composite data domains in the **Composite Data Domains** list. You can view the complete list of composite data domains when you select the composite data domains from the **Select Composite Data Domains** dialog box.

1. Click **Show All**. The **Select Composite Data Domains** dialog box appears.

   Note: The **Show All** option appears if the number of composite data domains inferred in the catalog is more than five.
2. From the **Name** column, select a composite data domain.
3. Click **OK**. Enterprise Data Catalog refreshes the search results based on the selected composite data domain.

Refine by Attributes

You can refine your search based on the system attributes or the custom attributes listed.

You can select **All** from the attribute list to select all the attributes included in the specific attribute type.

Adding Attributes

1. Click **Add**.
2. Start typing the name of the attribute in the box. A list of matching attributes appears.
3. Select the attribute that you want. Enterprise Data Catalog refreshes the search results based on the attribute selected.

Viewing all the Attributes

1. Click **show all**. The attribute dialog box appears.

   Note: The **show all** option appears if the number of attributes defined is more than five.
2. Select the required attributes and the included attributes from the **Name** column.
3. Click **OK**.

Alternatively, you can view the attribute and it's details using the REST APIs. For more information, see the List Attributes and Reference Attribute Details topics in the Enterprise Data Catalog REST API Reference guide.

Refine by Reference Assets

You can refine your search based on the reference assets. Reference assets indicate the assets that are included in the reference resources. For example, when you configure a PowerCenter resource to get reference assets, the resource might have mappings that point to columns from an Oracle database. A reference resource indicates that the resource you configured includes references from other data sources or resources. You can filter the search results to exclude reference assets in the search results page.

The **Reference Assets** filter displays the **All Assets** and **Exclude Reference Assets** options. If you select the **All Assets** option, the search results page displays all the assets including reference assets. If you select the **Exclude Reference Assets** option, the search results page displays the assets excluding the reference assets.

Refine by Business Term Status

You can refine your search based on the status of the business terms from Informatica Axon and Business Glossary resources. You can filter the search results to view active or inactive business terms on the search results page.

The **Axon Status** and **Business Glossary Status** filters display the **All**, **Active**, and **Inactive** options. If you select the **All** option, the search results page displays the active and inactive business terms. If you select the **Active** option, the search results page displays the active business terms. If you select the **Inactive** option, the search results page displays the inactive business terms.

Modify Selected Filters

When you select an option from a filter, the options available in other filters are narrowed down based on the previous selections. If you have selected multiple options from various filters, you can view the list of all the applied filters separately. You can then choose to remove certain selections.

1. Select the filters that you want to use to narrow down the search results.
2. Click on the link **Show selected only**.

   A list of all selected options appears below the filter names.
3. To remove a selected option, click on the close icon within the option name.

   The selected options are cleared and other selections change dynamically to accommodate the changes.
4. Click **Show All** to return to the filters where you can select additional options.
5. To remove all the filters that you have selected, click  .

Search Prefilters


Search prefilters are predefined filters that you can apply before performing a search in the Catalog. Use search prefilters to get search results filtered according to a set criteria.

Enterprise Data Catalog displays a set of default search prefilters in the search box. The default search prefilters include the Resources, Data Objects, Data Elements, Reports, and Business Terms. The results that appear on the **Search Results** page vary based on the search prefilter that you have applied. Each search prefilter has a set of filters selected. For example, when you apply the Business Terms prefilter, the data

types, such as Terms and Axon Glossary under the **Asset Type** filter are selected, and the search results page displays the available business terms in the catalog.

Note: The filters that are applied by the prefilters are not visible in the **Filter** panel.

The following image displays a sample **Search Results** page.

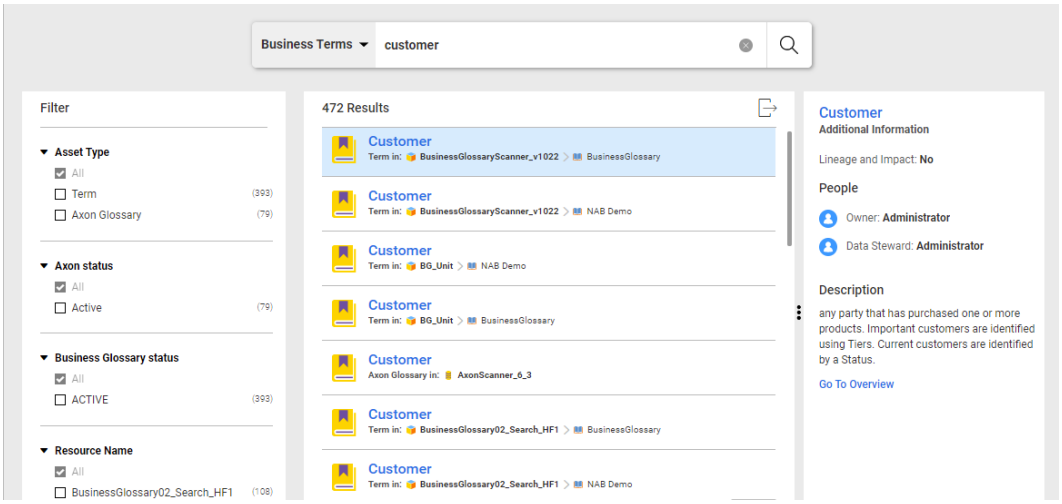

The **Filter** section displays the search filters available to further refine the search results.

Any user who has privileges to access the **Application Configuration** page can create search prefilters to save filter criteria with which you can search for assets. You can create customized search prefilters using a combination of search filters based on business requirements. You can use any filter type while creating a search prefilter.

Enterprise Data Catalog dynamically applies different search criteria based on the search prefilter selected before performing the search.

Business Example

You are a medical data analyst in a healthcare organization who maintains patient records. A patient record contains patient information, doctor information, treatment history, and insurance details from multiple data sources. The data is in different tables named `Patient Details`, `Doctor Details`, `Treatment History`, and `Patient Insurance Details` in an Oracle resource named `Patient_Med_Record`. You want to perform a search to find these records. Instead of searching for the records using different search filters on a regular basis. As a one-time step, you create a search prefilter named **Patient Records** using a combination of search filter options. You use filter options, such as the `Patient_Med_Record` option from the **Resource Name** filter, `Tables` from the **Asset Type** filter, and `Oracle` from the **Resource Type** filter. After you create the search prefilter, you can then apply the **Patient Records** prefilter whenever you need to quickly find the records.

Default Search Prefilters

Enterprise Data Catalog displays a list of default search prefilters, such as Resources, Data Objects, Data Elements, Reports, and Business Terms in the **Search Results** page. Use the default search prefilters to open

a type of asset in the **Search Results** page. For example, if you open the Resources tab, the **Search Results** page displays only the resources. Each default search prefilter has predefined filters applied to it.

The following table lists the filters that are applied to the search prefilters:

Search Prefilter Name	Filters Applied by Default
Resources	Resource
Data Objects	DataSet
Data Elements	DataElement
Business Terms	Axon Glossary and Term
Reports	Report

Enterprise Data Catalog contains the following default search prefilters:

All

Displays all the assets in the Catalog. To refine the search results, you can use the available search filters from the **Filter** section.

Resources

Displays all the available resources in the Catalog. To further refine the search results, you can use the available search filters in the **Filter** section. The Resources prefilter is used to display only resources and not any other asset type.

Data Objects

Displays all the data objects that are available in the Catalog. A data object refers to a collection of tabular and mapping assets in a resource. Examples of data assets are tables, views, synonyms, and public synonyms.

Data Elements

Displays all the data elements that are available in the Catalog. A data element refers to any asset within a data set. For example, a column or view column within a table is a data element. Examples of data assets are columns, view columns, fields, and attributes.

Business Terms

Displays all the business terms that are available in the Catalog. Business terms include Axon glossaries and Business Glossary assets.

Reports

Displays all the reports that are available in the Catalog. Reports might be based on resources, such as QlikView, Cognos, and SAP Business Objects.

CHAPTER 4

View Assets

This chapter includes the following topics:

- View Asset Details Overview, 38
- Axon Glossary Assets, 39
- Business Glossary Assets, 42
- Tabular Assets, 50
- Rule Assets, 61
- Scorecard Assets, 63
- Column and Field Assets, 65
- Data Domain Assets, 73
- Composite Data Domain Assets, 80
- Mapping Assets, 82
- Reference Assets, 83

View Asset Details Overview

You can view the details of an asset in the Overview tab. The Overview tab displays the asset details in different sections, such as the Description, People, Business Terms, Business Classifications, System Attributes, and Custom Attributes. The overview details vary based on the type of an asset that you open.

For example, for a relational column, the Overview tab displays the details, such as the asset description, people associated with the asset, business classifications, business terms, system attributes, composite data domains, and data domains that are assigned to the column. If you configure the profile settings for a resource in the Catalog Administrator, you can also view the profile results in the Overview tab, such as the value frequency, similar columns, pattern, and inferred data types.

You can view the term properties from the Analyst tool for business glossary terms. You can also view the glossary properties from the Informatica Axon for Axon glossaries in the Overview tab. The tab displays the details, such as the technical, classified, glossary, and other assets to which the business term is related.

In the Overview tab, you can view the contents of a resource. The Assets in the Resource dialog within the tab shows a list of all assets along with their details, including Name, Asset Type, Business Term, Recommendation, Description, and additional columns like Source Description, which you can choose to display.

When an asset is linked to a business title in Axon or the Business Glossary, it automatically inherits the corresponding description. If no business title is associated, you can manually customize the asset description.

The tasks that you can perform from the Overview tab vary based on the asset type. For example, you can associate a business title with any asset, assign custom attribute values to an asset from different sections, check the quality of data for relational tables, relational views, CSV files, JSON files, XML files, and Salesforce objects, and assign data domains to certain column and field assets.


Alternatively, you can list the types of data using the REST APIs. For more information, see the List Data Types List Data Types topic in the *Enterprise Data Catalog REST API Reference guide*.

Axon Glossary Assets

You can view and associate an Axon glossary as a business title with an asset in Enterprise Data Catalog. An Axon glossary defines the organization's agreed definitions for data, activities, business terms, and other objects. A set of well-described glossary terms allows users from different business functions to link their data and activities to definitions that everyone within the organization can understand.

When you view details of an Axon glossary, Enterprise Data Catalog displays the details, such as the source description, related Axon glossary assets, classified assets, and related technical assets in the Overview tab.

The following image shows the sample Overview tab for an Axon glossary:

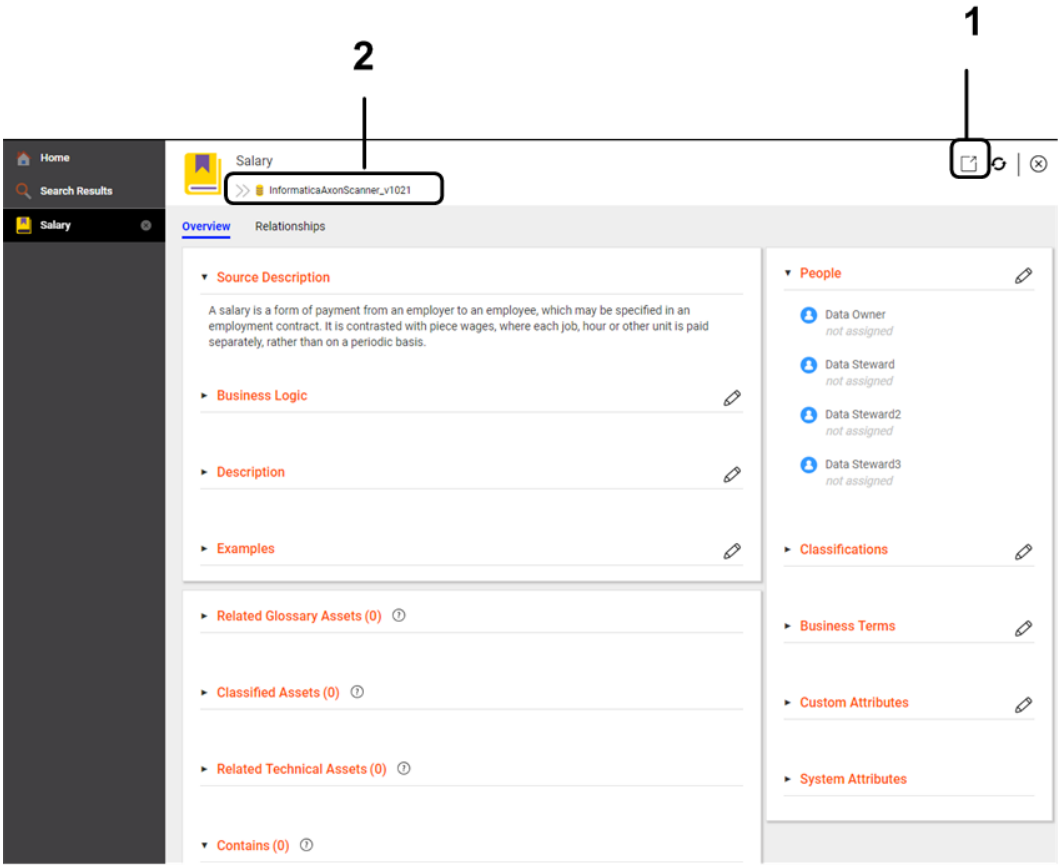

1. Open the asset in the Informatica Axon.
2. Path to the Axon glossary.

For more information about Axon glossaries, see the *Informatica Axon Data Governance User Guide*.

Axon Glossary Overview

The Overview tab for an Axon glossary displays the details, such as the description of the glossary, people associated with the glossary, system attributes, other glossary assets related to the Axon glossary, classified assets, and related technical and logical assets.

Use the **Export** icon to export the related Axon glossaries and data domains in the Overview tab for an Axon glossary. You can also export the related logical, technical, and classified assets.

Enterprise Data Catalog displays the following details for an Axon glossary:

Source Description

The Source Description section displays the description of the Axon glossary. The description that you view in the section comes from the description of the Axon glossary in Informatica Axon.

Related Glossaries

The Related Glossary Assets section displays other glossaries that are related to the Axon glossary that you are viewing. The Axon glossaries are related through relationships in Informatica Axon.

Related Technical Assets

The Related Technical Assets section displays the technical assets and data domains in the catalog relate to the glossary. If you associate the glossary with one or more assets in the catalog, the section lists the associated assets with the glossary. The Related Technical Assets section displays the following information for each asset:

- asset name
- status
- path to the asset

Classified Assets

The Classified Assets section displays all the assets that are grouped based on an Axon glossary that is assigned as a custom attribute value to the assets from the Business Terms section. You can assign multiple Axon glossaries as custom attribute values to an asset. The Classified Assets section also displays the path to the listed assets and the name of the custom attribute associated with the assets.

Use a glossary as a custom attribute if you want to group assets based on a specific attribute and provide more business context to the assets. For example, if you have tables named **Emp_data_2015**, **Emp_data_2016**, and **Emp_data_2017**, you might want to group these tables based on the location they belong to. You can assign an glossary called **Employee Data** as a custom attribute to all the three tables. After you have assigned the custom attribute to the tables, the Overview tab for the glossary **Employee Data** displays **Emp_data_2015**, **Emp_data_2016**, and **Emp_data_2017** table names in the classified assets section.

To view the Classified Assets section for a glossary, click the glossary link in the Business Terms section of the asset.

Related Logical Assets

The Related Logical Assets section displays the logical assets in the catalog excluding the business glossary assets that are related to the glossary.

People

The People section displays the users associated with the Axon glossary. The section by default displays the data owner and data steward fields. Use the Edit Properties icon () to add or change the users associated with the glossary. The additional user fields that you see in the section come when the catalog administrator creates and configures a custom attribute of User data type for an Axon glossary in Catalog Administrator.

Business Logic

The Business Logic section displays the business context in which the Axon glossary is used. The business logic that you view in the section comes from the business context of the Axon glossary in Informatica Axon. You also use to Edit Properties icon () to add your own business logic for the Axon glossary.

Examples

The Examples section displays the contextual example of the Axon Glossary. The examples that you view in the section come from the contextual example of the Axon glossary in Informatica Axon. You also use to Edit Properties icon () to add your own examples for the Axon glossary.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for an Axon glossary in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

You can change the custom attributes that are displayed in the Overview tab when you configure search filters in the Application Configuration dialog box.

System Attributes

The System Attributes section displays the general properties about the Axon glossary. The properties include the following information:

- Security classification of the glossary. Specifies whether the glossary is classified for public, internal, confidential, or secret usage.
- Stage of the glossary in the approval lifecycle.
- Type of the glossary. Specifies whether the glossary refers to an entity, domain, or business term.
- Access type of the glossary. Specifies whether the glossary needs to be available for public viewing or not.
- Current status of the glossary in Informatica Axon.
- Name of the resource that includes the glossary.
- Alias. Alternate names for the glossary that is commonly used in your organization.

Contains

The Contains section displays the child glossaries that are related through hierarchical relationship with the glossary that you are viewing. The section also displays names of the listed glossaries and paths to the glossaries.

Viewing Axon Glossary Assets in Informatica Axon

You can open an axon glossary in Informatica Axon. To open an axon glossary asset in Informatica Axon, you must have the View permission on the glossary.

1. Open the Overview tab for the axon glossary.
2. Click **View in Informatica Axon** in the upper right corner of the tab.

Business Glossary Assets

You can view business glossary assets, such as business terms and categories in Enterprise Data Catalog. The business glossary assets in the catalog come from the business glossaries in the Analyst tool.

You can view the following types of business glossary assets in Enterprise Data Catalog:

Glossaries

Glossaries are collections of business terms, categories, and policies. Different terms within an organization might create and maintain separate glossaries, such as Finance and Human Resource.

When you view the details for a glossary, Enterprise Data Catalog displays the business glossary assets in the glossary.

Business terms

Business terms are words or phrases that use business language to define relevant concepts for business users in an organization. When you view the details for a business term, Enterprise Data Catalog displays the term properties, such as the name, description, and usage.

Categories

Categories are descriptive classifications of business terms and policies that define a structure for a business glossary. For example, an Analyst tool user might create a category called **Financial Statements** and assign the terms related to financial statements to this category. When you view the details for a category, Enterprise Data Catalog displays the terms in the category.


Policies

Policies define the business purposes, processes, or protocols that govern business practices that are related to business terms. For example, an Analyst tool user might create a policy called **US GAAP** to represent a framework of accounting standards and apply the policy to specific business terms. When you view the details for a policy, Enterprise Data Catalog displays the related terms and categories.

You can view details for business glossary assets in the Overview tab. You can also open business glossary assets in the Analyst tool from the Overview tab.

Note: You cannot view lineage and impact for business glossary assets.

The following image shows the Overview tab for a business term:

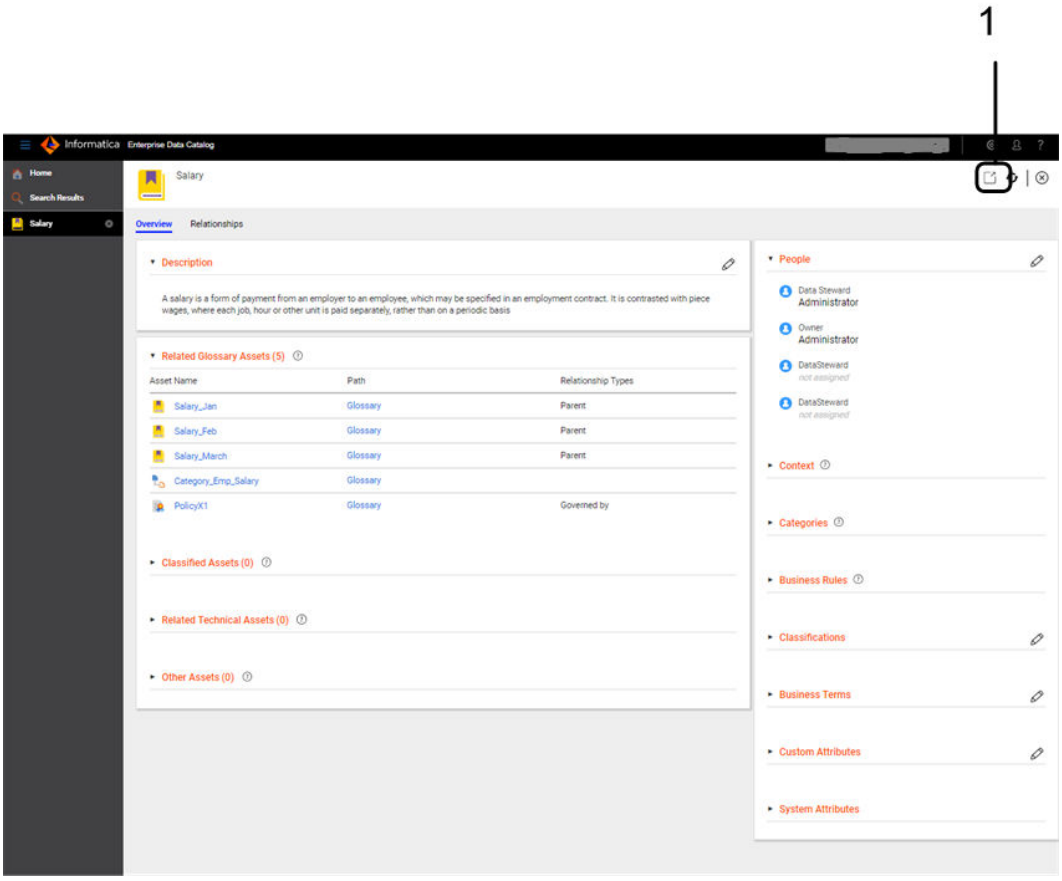

1. Open the asset in the Analyst tool business glossary.

For more information about business terms, categories, and policies, see the *Informatica Business Glossary Guide*.

Glossary Overview

The Overview tab for a glossary displays the details, such as the business glossary assets in the glossary, system attributes, other related business terms, and associated people.

Note: The properties that Enterprise Data Catalog displays in the Overview tab vary based on the glossary template that the business glossary administrator uses in the Analyst tool.

Enterprise Data Catalog displays the following details for glossaries:

People

The People section lists the business glossary users that create, approve, and manage terms. The People section includes the following users:

- Owner. Glossary owner.
- Data steward. The user who manages the glossary.

Use the Edit Properties icon ( ) to add or change the users associated with the glossary. The additional user fields that you see in the section come when the catalog administrator creates and configures a custom attribute of User data type for a glossary in the Catalog Administrator.

System Attributes

The System Attributes section includes the following information about the glossary:

- Name. Glossary name.
- Description. Description of the glossary.
- Resource Name. Name of the resource the glossary belongs to.
- Resource Type. Type of the resource.
- Asset Type. Type of the asset.

Custom Attributes

The properties that the Custom Attributes section displays depends upon different types of custom attributes the catalog administrator creates and configures for an axon glossary in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

Contains

The Contains section lists all the business glossary assets the glossary contains. Glossary assets include categories, terms, and policies. The section by default lists a maximum of five business glossary assets with details, such as the business glossary asset name, associated business title, and type of the asset. Click **Show All** to view the complete list of assets the glossary contains.

Business Terms

The Business Terms section displays custom attributes of data types, such as BusinessTerm, Glossary, AxonGlossary. The section displays related terms when the catalog administrator creates and configures the custom attribute for the glossary asset in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Use the Edit Properties icon  to add, remove, or change the business term values.

Business Term Overview

The Overview tab for a business term displays the details, such as the context in which the term is used, business rules applied to the term, and related assets.

Note: The properties that the Catalog tool displays in the Overview tab can vary based on the business term template that the business glossary administrator uses in the Analyst tool.

The Catalog tool displays the following details for business terms:

Source Description

The Source Description section displays the description of the business term. The description that you view in the section comes from the description of the business term in Informatica Analyst tool.

People

The People section displays the business glossary users that create, approve, and manage the term. The people properties can include the following users:

- Term owner. The user who owns the term.
- Data steward. The user who manages the business term content.
- Stakeholders. Users who participate in the approval process before the data steward publishes the business term.

Context

The Context section displays properties that provide background information about the term. The context properties can include the following information:

- Example that shows the usage of the business term.
- Reference table URL. A link to the reference table that contains the valid values associated with the term. Click the link to open the reference table.
- Usage context. Information that describes the context of the business term usage. For example, the business term "risk management" can be defined differently based on the context.

Categories

The Categories section displays the categories to which the term belongs. The Catalog tool displays the full path for each category in the following format:

```
<resource name>/<glossary name>/<category>
```

System Attributes

The System Attributes section displays general properties about the term. The properties can include the following information:

- Glossary in which the term exists.
- Analyst tool user that created the term.
- Current phase of the business term, either draft, in review, published, or pending publish. The Catalog tool does not import rejected terms.
- Related terms.
- The resource the term belongs to.
- The last time a user modified the term.
- Current status of the business term, either active or inactive.
- Analyst tool user that last updated the term.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a business term in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

Business Rules

The Business Rules section displays mapplet rules or rule definitions that contain transformations or business logic.

For example, a mapplet rule that defines how a Social Security number is masked might be linked to the term "Social Security Number." When you view the Overview for "Social Security Number," this property displays the mapplet rule used to mask the data.

Alternatively, the rule definition used to calculate business term "Net Price" is `Net Price = List Price - Trade Discount Amount`. When you view the Overview for "Net Price," this property displays the rule definition.

Related Technical Assets

The Related Technical Assets section displays the technical assets and data domains in the catalog that relate to the business term. If you associate the business term with one or more assets in the catalog,

this section lists the associated assets with the term. The Related Technical Assets section displays the following information for each asset:

- asset name
- status
- path to the asset

Related Glossary Assets

The Related Glossary Assets section displays business glossary assets that are related to the term. Related glossary assets can include business glossary terms that are related to the term through custom relationships, categories that include the term, and policies that are related to the term.

Classified Assets

The Classified Assets section displays all the assets that are grouped based on a business term that is assigned as a custom attribute to the assets from the Business Terms section. You can assign multiple business terms as custom attributes to an asset. The section also displays the path to the listed assets and the name of the custom attribute associated with the assets.

Use a business term as a custom attribute if you want to group assets based on a specific attribute and provide more business context to the assets. For example, if you have tables named **LA_Sales_2014**, **LA_Sales_2015**, and **LA_Sales_2016**, you might want to group these tables based on the location they belong to. You can assign a business term called **Los Angeles** as a custom attribute to all the three tables. After you have assigned the custom attribute to the tables, the Overview tab for the business term **Los Angeles** displays **LA_Sales_2014**, **LA_Sales_2015**, and **LA_Sales_2016** table names in the classified assets section.

To view the Classified Assets section for a glossary, click the business term link in the Business Terms section of the asset.

Other Assets

The Other Assets section displays assets in other Informatica applications that are related to the term. The assets can include Metadata Manager objects and Analyst tool objects such as data domains, data objects, profiles, and rule specifications.

The Catalog tool lists assets in this section when the assets exist within the same domain as the Catalog Service.

Category Overview

The Overview tab for a category displays the details such as the status and phase of the category, category users, and related glossary assets.

Note: The exact properties that Enterprise Data Catalog displays in the Overview tab can vary based on the category template that the business glossary administrator uses in the Analyst tool.

Enterprise Data Catalog displays the following details for categories:

Source Description

The Source Description section displays the description of the category. The description that you view in the section comes from the description of the category in Informatica Analyst tool.

People

The People section displays business glossary users that create, approve, and manage the category. The people properties can include the following users:

- Category owner.

- Data steward. The user who manages the category.
- Stakeholders. Users who participate in the approval process before the data steward publishes the category.

Classified Assets

The Classified Assets section displays all the assets that are grouped based on a category. The category is assigned as a custom attribute to the assets from the Business Terms section. You can assign multiple categories as custom attribute value to an asset. The section also displays the path to the listed assets and the name of the custom attribute associated with the assets.

Use a category as a custom attribute if you want to group assets based on a specific attribute and provide more business context to the assets. For example, if you have tables named **AccountsPayable_Receivable_2016**, **Payrol_2016**, and **Inventory_2016**, you might want to group these tables based on the department they belong to. You can assign a category called **Accounting Department** as a custom attribute to all the three tables. After you have assigned the custom attribute to the tables, the asset details view for the category **Accounting Department** brings together and displays **AccountsPayable_Receivable_2016**, **Payrol_2016**, and **Inventory_2016** table names in the classified assets section.

To view the Classified Assets section for a glossary, click the category link in the Business Terms section of the asset.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a category in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

System Attributes

The System Attributes section displays general properties about the category. The properties can include the following information:

- Glossary in which the category exists.
- Analyst tool user that created the category.
- Analyst tool user that last updated the category.
- Current status of the category, either active or inactive.
- Current phase of the category, either draft, in review, published, or pending publish. Enterprise Data Catalog does not import rejected categories.
- Resource name and resource type the category belongs to.
- The type of the asset.

Related Glossary Assets

The Related Glossary Assets section displays business glossary assets that are related to the category. Related glossary assets can include terms in the category in addition to policies and other categories that are related to the category.

Policy Overview

The Overview tab for a policy displays the details, such as the status and phase of the policy, business rules applied to the policy, and related glossary assets.

Note: The properties that Enterprise Data Catalog displays in the Overview tab vary based on the policy template that the business glossary administrator uses in the Analyst tool.

Enterprise Data Catalog displays the following details for policies:

People

The People section shows business glossary users that create, approve, and manage the policy. The people properties can include the following users:

- Policy owner.
- Data steward. The user who manages the policy.
- Stakeholders. Users who participate in the approval process before the data steward publishes the policy.

Business Rules

The Business Rules section displays the rule intent for the policy. The rule intent describes how an organization implements a policy and specifies the compliance criteria for terms within the policy. For example, a rule intent for the "Privacy" policy might specify the encryption method used for terms within the policy.

Related Glossary Assets

The Related Glossary Assets section displays business glossary assets that are related to the policy. Related glossary assets can include terms to which the policy is applied in addition to categories and other policies that are related to the policy.

System Attributes

The System Attributes section displays general properties about the policy. The properties can include the following information:

- Glossary in which the policy exists.
- Analyst tool user that last updated the policy.
- Analyst tool user that created the policy.
- Current status of the policy, either active or inactive.
- Current phase of the policy, either draft, in review, published, or pending publish. Enterprise Data Catalog does not import rejected policies.
- The resource type and resource name the policy belongs to.
- The type of the asset.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a policy in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon to add or change values of the properties in the section.

Viewing Business Glossary Assets in Informatica Analyst

You can open a business glossary asset in the Analyst tool. To open a glossary asset in the Analyst tool, you must have the View Glossary privilege and read permission on the glossary.

1. Open the Overview tab for the term, category, or policy.
2. Click **View in Informatica Analyst** in the upper right corner of the view.

Tabular Assets

You can view tabular assets such as relational tables, CSV files, and dimension tables in Enterprise Data Catalog. You can view details about tabular assets, check the data quality of tabular assets, rate and review tabular assets, and ask questions about tabular assets in the Overview tab.

A tabular asset is any asset that contains data that you can view in a tabular format.


The following types of assets are examples of tabular assets:

- Business intelligence dimension, logical, and presentation tables
- CSV, JSON, and XML files
- Hive tables
- Relational tables, views, and synonyms
- Salesforce objects

The Overview tab shows different details for different types of tabular assets. For tabular assets in resources that support profiling, the Overview tab shows the system attributes, custom attributes, composite data domains, and profile results that include column names, business terms, data types, and data domains. For other tabular assets, the Overview view shows the system attributes, custom attributes, and links.

If the columns or fields in a tabular asset have profile results, you can check the quality of the column or field data from the Overview view.

The following image shows the sample Overview tab for a relational table:

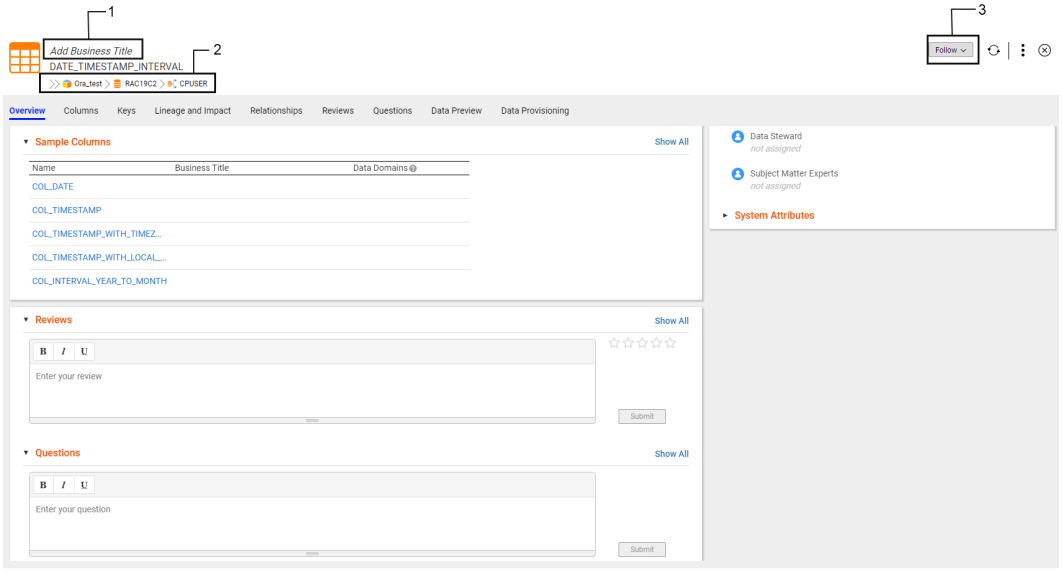

1. Add a business title to the table.
2. Path to the table.
3. Follow the table.

Tabular Asset Overview

The Overview tab for a tabular asset displays the details, such as the description, people associated with the asset, related business terms, composite data domains, system attributes, and column or link details.

Enterprise Data Catalog displays the following details for a tabular asset:

Description

The Description section displays the tabular asset description. Use the Edit Properties icon ( ) to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text type custom attribute called **Additional Description** for the tabular asset in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as an another section under the Description section in the Overview tab.

Sample Columns

The Overview tab displays the sample columns for tabular assets, such as view columns, table columns, CSV fields, XML file fields, and JSON file fields, other semi-structured sources, and for sources that you can run the column profile on.

The Sample Columns section displays the following details for the sample columns:

- Name. Displays the column or field name. To view the column or field asset details, click the column name. The column asset details appear in the Overview tab.
- Business title. Displays the business title associated with the column. Hover the mouse over an accepted business title to view the path of the business term. You can also view the recommended business terms if you want to associate a business term as a business title with the column. Hover the mouse over a recommended business title to view the name, confidence score, and the path of the business term. You can accept or reject the inferred business titles.


- Description. Displays the descriptions of tabular assets in custom resources. You can view the Description column in Overview tab and Columns tab of tabular assets with relational tables or views as the asset type.
- Data Domains. Displays the data domains associated with the column. Hover the mouse over a data domain to view the Name Match, Data Match, Proximity Match, System Suggested, and Assigned by details. The inferred data domains appear in orange color and the curated data domains appear in green color.
- Show All. To view all the columns in the asset in the **Columns** tab, click the **Show All** or click **Columns.**

Reviews

The Reviews section displays the reviews and ratings for a tabular asset. By default, the section displays a text box and five star rating scale next to the text box. To review the tabular asset, enter the review in the text box and rate the tabular asset, and then click **Submit**.


The section displays the review that you provided at the top of the list of the existing reviews. You can mark any review as helpful if you find the review useful.

The following image displays the Reviews section in the Overview tab:

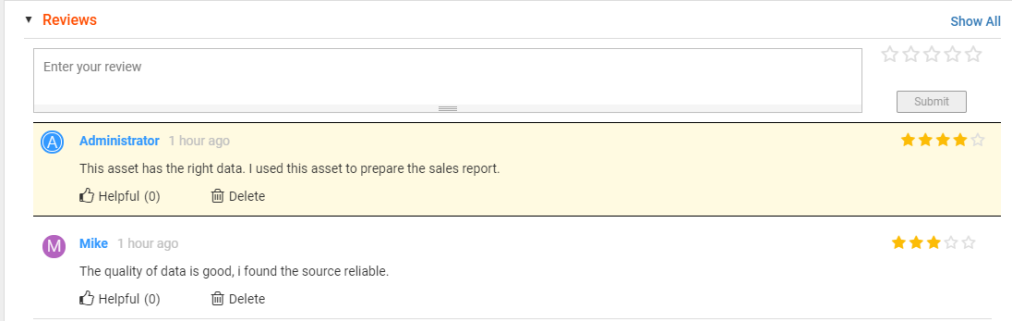

The section displays a maximum of five latest reviews. To view all the reviews, click **Show All**. The **Reviews** tab displays the complete list of reviews about the tabular asset, average ratings of the asset, and total user ratings on the tabular asset.

The following image displays the Reviews tab for a tabular asset:

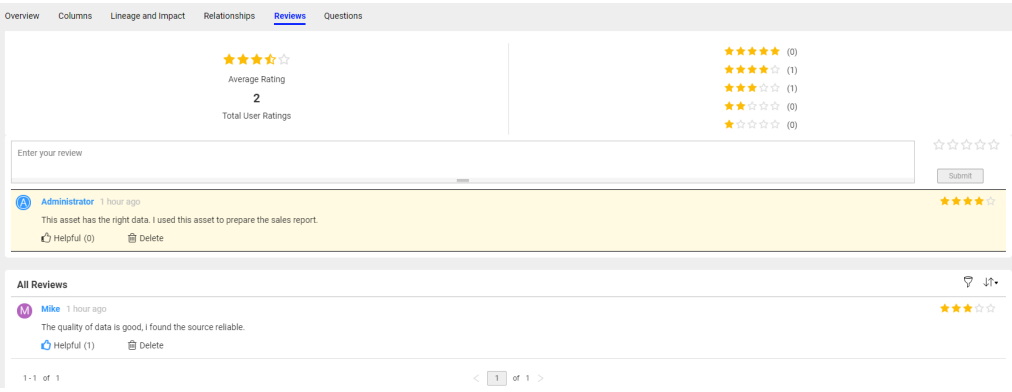

In the **Reviews** tab, you can review the tabular asset and filter the reviews based on the ratings.

You can also sort the list based on the following options:

- Recent Reviews. Sorts the reviews list based on the latest reviews.
- Voted Most Helpful. Sorts the reviews list based on reviews that are voted as most helpful.


- Ratings. Sorts the reviews list based on reviews with highest ratings.

For more information about reviews, see "Rate and Review an Asset" on page 142.

Questions


The Questions section displays the questions that are asked about the tabular asset. To ask a question, enter the question in the text box, and then click **Submit**. The section displays the question that you ask at the top of the existing questions. The questions include the answer and delete options. A user who has knowledge about the tabular asset can answer the questions asked. You can also mark an answer as helpful if you find the answer useful.

The following image displays the Questions section in the Overview tab:

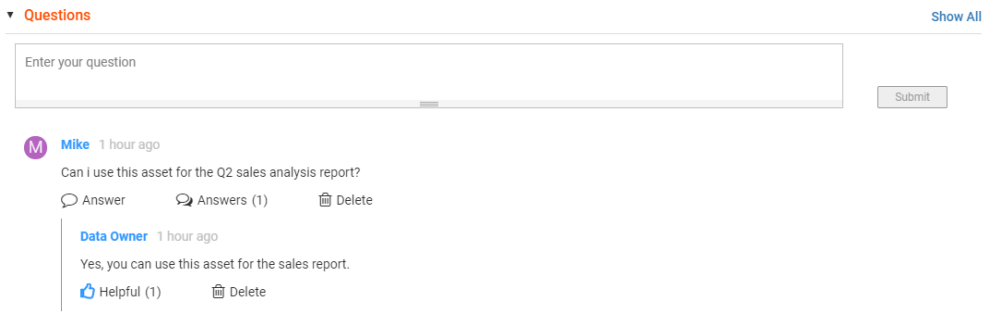

The section displays a maximum of five latest questions that are asked. To view all the questions, click **Show All**. The **Questions** tab displays the complete list of questions asked about the tabular asset.

The following image displays the Questions tab for a tabular asset:

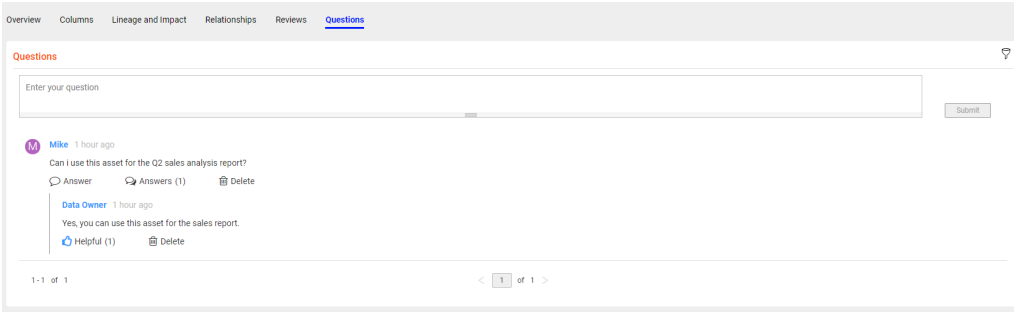

You can filter the questions based on the following options:

- My Questions. Displays all the questions that you asked about the tabular asset.
- Answered Questions. Displays all the questions that have answers.
- Unanswered Questions. Displays all the questions without answers.

For more information about questions, see "Asset Questions" on page 143.

People

The People section displays the users associated with the tabular asset. The section by default displays the data owner and data steward fields. The section also displays the followers of the tabular asset. Use the Edit Properties icon ( ) to add or change the users associated with the glossary. The additional user fields that you see in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a tabular asset in the Catalog Administrator.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a tabular asset in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon ( ) to add or change values of the properties in the section.

System Attributes


The Overview tab displays the System Attributes section for tabular assets. The system attributes that are shown by default vary based on the parent resource type. For example, the default system attributes for a relational table include comments, data source UUID, native type, and resource name.

You can change the system attributes that are displayed in the Overview tab when you configure search filters in the Application Configuration dialog box.

Composite Data Domains

The Overview tab displays the Composite Data Domains section if tabular assets in resources have associated composite data domains. The section displays all the composite data domains that are inferred on the tabular asset. To view the columns that have data domains associated with the composite data domain, click the filter icon next to the composite data domain name. If the composite data domain is inferred on multiple tabular assets, you can hover over the composite data domain name link and click **View Instances** to view other tables on which the composite data domain is inferred. You can also click the composite data domain name link to display the Overview tab for the composite data domain.

The following image shows the Composite Data Domain section in the Overview tab of a tabular asset:

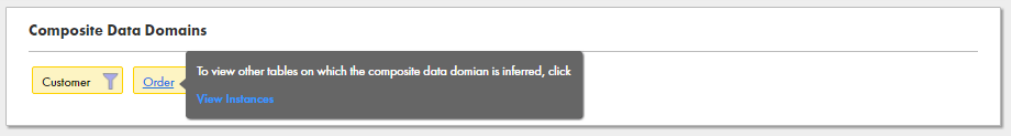

Business Terms

The Related Business Terms section displays custom attributes of data types, such as BusinessTerm, Glossary, AxonGlossary. The section displays related terms when the catalog administrator creates and configures the custom attribute for the tabular asset in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Use the Edit Properties ( ) to add, remove, or change the business term values.

Classifications

The **Classifications** section displays all the asset classifications based on custom attributes of reference data types. The custom attributes of a reference data type depend on how the custom attributes are defined in Informatica Business Glossary or Informatica Axon. For example, if you have a table called **Sales Details** and you want to classify the table based on a region. To classify the table, you can assign a custom attribute of reference data type called **APAC** to the table. Use the Edit Properties ( ) to add, remove, or change the business classification values.

Links

The Overview tab displays the Links section for tabular assets in resources that do not support profiling. The Links section displays the child assets of the tabular asset. For example, if you view the Overview

for a pivot table, the Links section displays the axes in the table. If you view a presentation table, the Links section displays the presentation columns and derived presentation columns.

Viewing Column Details

The Columns tab displays all the columns for tabular assets, such as view columns, table columns, synonym columns, public synonym columns, and for sources that you can run the column profile on.

On the **Columns** tab, you can view the following details for each column in the tabular asset:

Name

Displays column names. By default, the columns list appears in the ascending order based on the column position in the data source. To sort columns in ascending or descending order based on the source position, click the arrow ( ) icon. To sort columns in alphabetical order by name, click the **Name** heading on the Columns tab. To sort columns in reverse alphabetical order, click the column heading again. To view the column asset details on the Overview tab, click the column name link.

Business Title

Displays the business title associated with the column. Hover the mouse over an accepted business title to view the path of the business term. You can also view the recommended business terms if you want to associate a business term as a business title with the column. Hover the mouse over a recommended business title to view the name, confidence score, and the path of the business term. You can accept or reject the inferred business titles.

Description

Displays the descriptions of tabular assets in custom resources. You can view the Description column in Overview tab and Columns tab of tabular assets with relational tables or views as the asset type.

Data domains

Displays the data domains associated with the column. Hover the mouse over a data domain to view the Name Match, Data Match, Proximity Match, System Suggested, and Assigned by details. The inferred data domains appear in orange color and the curated data domains appear in green color. The Name Match displays **Yes** when the column name matches with the data domain. The Proximity Match displays a score that is a ratio of the number of proximal data domains discovered in the data asset to the number of configured proximal data domains for an inferred data domain. You can accept or reject the inferred data domains. The data domains that you accept are assigned to the asset.

Source description

Displays the source information of the column in the table overview section of the SAP HANA resource from which the Enterprise Data Catalog gets the data. The source description appears for SAP HANA assets and the Enterprise Data Catalog hides the source description for all other asset types.


Null Distinct Non-Distinct %

Displays the percentage of null, distinct, and non-distinct values in a column. Hover the mouse over the horizontal bar chart to view the number rows that contain null, distinct, and non-distinct values.

Source Data Type Inferred Data Types

Displays the documented data type and inferred data types of the column. Hover the mouse to view the list of documented data type and inferred data types with percentages.

The following image displays the Columns tab:

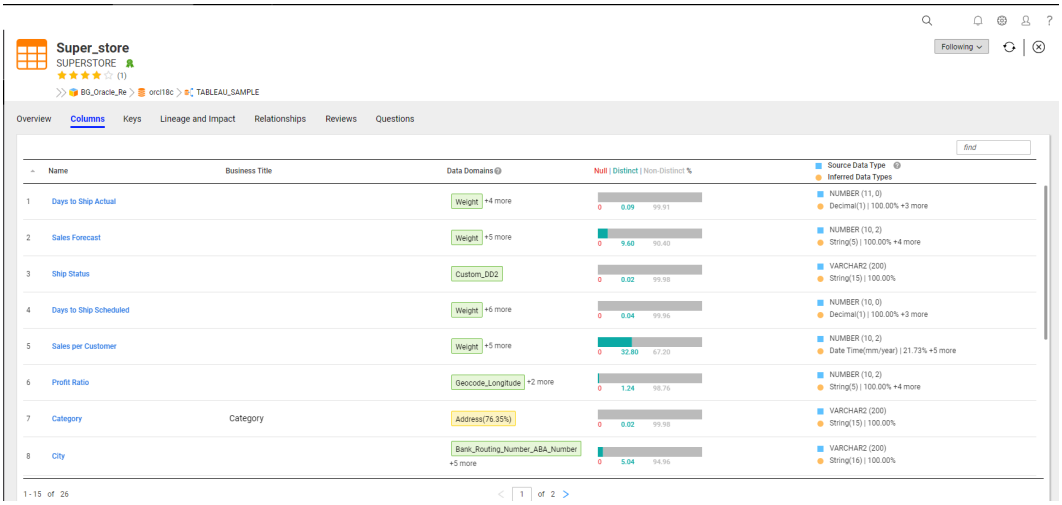

You can search for data elements by name or by business title in the **Find** field.

Data Domain Curation for Columns and Fields from a Tabular Asset

Curation is a process to accept or reject data domains for an asset. You can curate the data domains for column and field assets from a tabular asset.

In Catalog Administrator, you can run data domain discovery on resources. In Enterprise Data Catalog, you can view the inferred data domains for column and field assets. When you configure the **Auto accept if more than** conformance criteria option for a resource, Enterprise Data Catalog accepts the data domain automatically when the data domain match exceeds the configured value. Data domain inference is also based on the data domains that are assigned to similar assets in Enterprise Data Catalog. When you create a data domain in Enterprise Data Catalog and assign it to a column or field, Enterprise Data Catalog infers the data domain for similar assets. When you curate the data domain for a column from a tabular asset, you can view the curation changes in the associated synonym and public synonym columns.

You can perform the following curation tasks for a column or field in the **Columns** tab of a tabular asset:

- Accept or reject the inferred data domains for the asset.
- Assign a data domain to the asset. If an appropriate data domain does not exist, you can create a data domain.
- Reject an assigned data domain.
- Accept a rejected data domain.

Note: If you accept or reject an inferred data domain for an asset, you cannot set the data domain back to the inferred status.

Assigning or Rejecting the Data Domains for a Column or Field from a Tabular Asset

Perform the following steps to accept or reject data domains from a tabular asset.

1. On the Enterprise Data Catalog home page, type a table name that contains columns or fields assets, and click the search icon.

2. On the **Search Results** page, click the table asset.

   In the **Overview** tab of the asset, you can view the inferred data domains in the **Sample Columns** section. The **Data Domain** column displays the data domain name, if the column name matches the data domain, and if there is a proximity match in the asset.

3. Click the **Columns** tab.

   The column or field asset details appear in the **Columns** tab.
   In the **Columns** tab, you can view column details, such as the column name, business title, data domains, percentage distribution of null, distinct, and non-distinct values in each column, source data type, and the inferred data types.

   Data domains that appear in an orange box with the inference percentage are inferred data domains. For example, 

.

   You can perform the following tasks on an inferred data domain:

   - Click the icon to accept the data domain. After you accept the data domain, the box turns green. The data domains that are auto-accepted appear in a green box. For example, 

.
   - Click the icon to reject the data domain. After you reject a data domain, the data domain no longer appears as a data domain for the asset.

   Note: The and icons are inactive for synonym and public synonym columns.

4. Click the **more** link to view the list of data domains that are assigned or inferred for the asset and the list of data domains that are rejected for the asset.
5. To assign a data domain to the asset, perform one of the following steps:
   - If the data domain appears in the **Accepted & Inferred Data Domains** or **Rejected Data Domains** list, click the icon.
   - If the data domain exists in the Model repository but does not appear in the lists, then you can create a data domain. This type of data domain is called a smart data domain.

   The data domain then appears the **Accepted & Inferred Data Domains** list, and the **Assigned By** column lists your user name as the person who assigned the data domain to the asset.

6. To reject an assigned or inferred data domain, click the icon for the data domain in the **Accepted & Inferred Data Domains** list.

   The data domain moves to the **Rejected Data Domains** list, and the **Assigned By** column lists your user name as the person who rejected the data domain for the asset.

7. To accept a data domain and reject all the assigned, inferred, or accepted data domains, perform the following steps:
   1. In the **Accepted & Inferred Data Domains** list, select a data domain that you want to accept.
   2. Click the icon, and then click the **Accept this, reject the rest** option.
8. Click **OK**.


Viewing the Rules and Scorecards Information

The Data Quality tab displays the details of the rules and scorecards for a tabular asset. You can view the column results for a rule and scorecard to measure data quality of the data source.

The **Rules** tab displays the following details:

- Name. Displays the rule name. Hover the mouse to view the description of the rule asset. You can view the value frequency for output columns for a particular rule. In the value frequency section, you can view the distribution of the values across the data asset, the maximum and minimum values in the data asset, the distribution of null, distinct, and non-distinct values in the data asset, and a list of values and their frequency in a tabular form. You can view the details of all the output columns associated with a rule. To view the rule asset details, click the rule name. The rule asset details appear in the Overview tab.
- Null Distinct Non-distinct%: Displays the percentage of null, distinct, and non-distinct values in the column. You can view the number of rows that contain null, distinct, and non-distinct values.
- Input Column. Displays the number of columns on which the rule is applied. You can view a list of the columns for a particular rule asset.
- Value. Displays the minimum and maximum values in the rule output.
- Length. Displays the minimum and maximum length of the values in the rule output.
- Data Type. Displays the data type of the rule. Hover the mouse over a data type to view the details of the documented data type or inferred data type.


The following image displays the Rules section in the Data Quality tab:

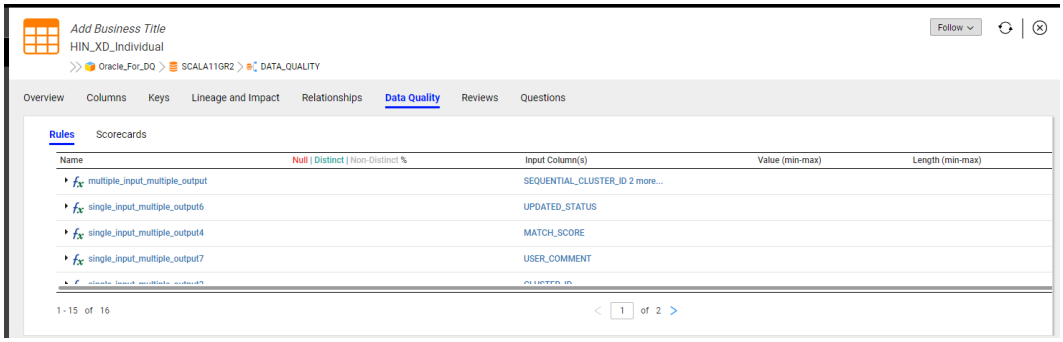

The **Scorecards** tab displays the following details:

- Name. Displays the scorecard name. To view the scorecard asset details, click the scorecard name. The scorecard asset details appear in the Overview tab.
- Total Metric Groups. Displays the total number of metric groups in the scorecard.
- Metric Groups. Displays the name of the metric groups. You can view the percentage of values for each metric group. You can apply filters to view good, acceptable, or unacceptable range of data for each metric group. You can also apply filters to choose metric groups associated with a scorecard asset. You can view scorecards in the ascending or descending order of date.
- Tables Applied. Displays the tables associated with the scorecard.


The following image displays the Scorecard section in the Data Quality tab:

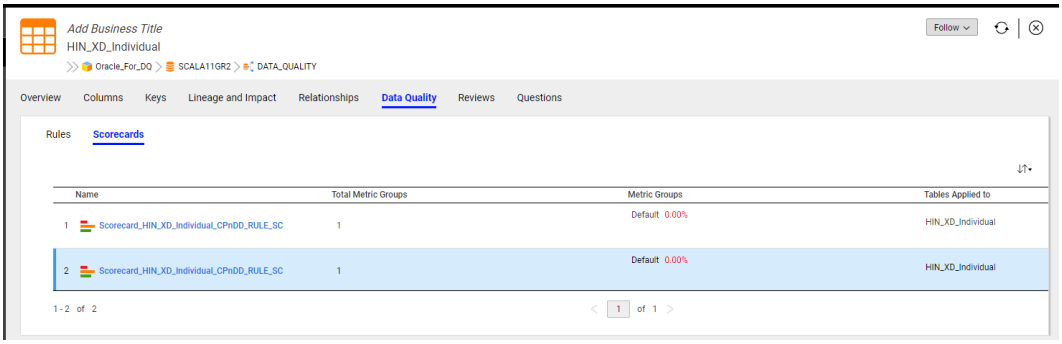

Checking the Data Quality of Tabular Assets

You can check the data quality of tabular assets in resources that support profiling such as relational tables, relational views, CSV files, JSON files, XML files, and Salesforce objects. If the assets have profile results, Enterprise Data Catalog shows the distribution of data in a separate Sample Columns view. To display the detailed Sample Columns view, click **Show All** in the Sample Column section.

The following image shows the sample of the Columns view for a relational table with profile results:

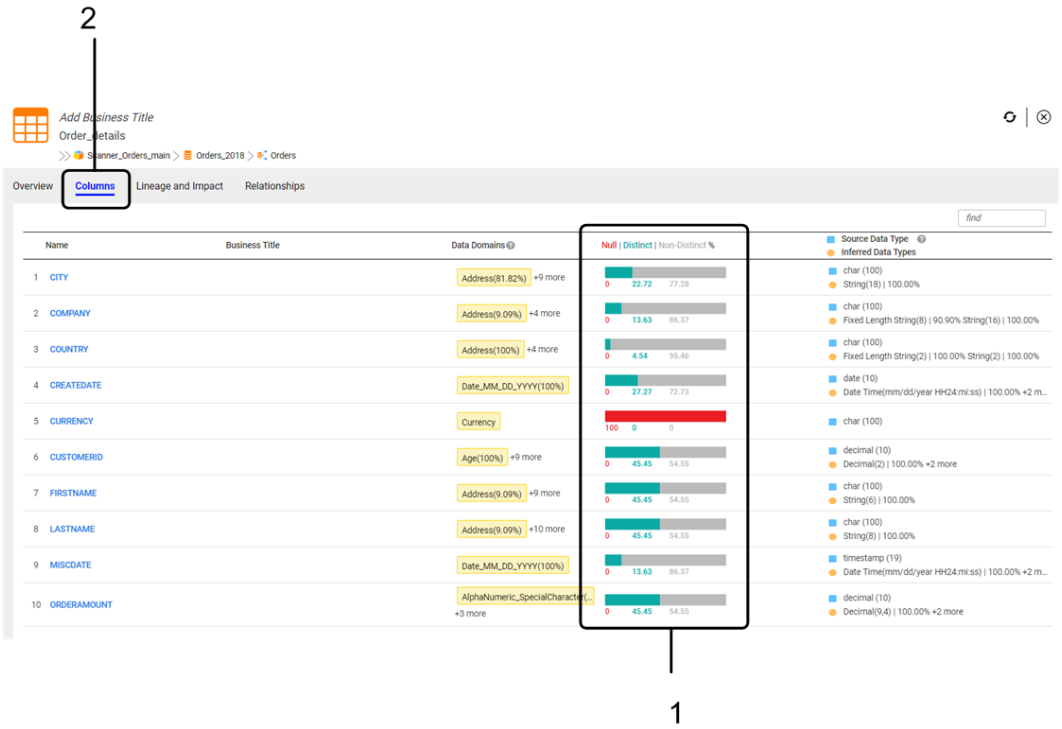

1. Bar charts that show the percentage of null values, distinct values, and non-distinct values in each field.
2. Colums view that displays profile results, data domains, business title, and column names.

The bar chart for each column or field shows the percentage of null values, distinct values, and non-distinct values in the column or field. To view the number of rows associated with each percentage, hover the cursor over the bar chart.


Viewing the Unique Key Details

A unique key is a column or combination of columns that uniquely identifies a row in a data source. Unique key discovery identifies the unique keys that meet a specific confidence score.

The **Keys** tab displays the details of the unique keys and foreign keys for assets such as tables and files.

The **Unique Keys** section displays the following details:

- Key Name. Displays the name of the key.
- Columns. Displays columns that are identified as the unique keys. Drag and expand the **Columns** field to view all the columns identified as unique keys. If there are multiple columns with long column names, hover the mouse over the column names to display the tooltip. The tooltip displays all the column names. To view the details of a column, click the column name. The column asset details appear in the **Overview** tab.
- Description. Displays the key description.
- Confidence Score. Displays the score assigned to the unique key. The confidence score is calculated by an internal algorithm based on the uniqueness of data in the columns, number of null values and the position of discovered columns in the source data object.
- Type. Displays the type of unique key. Unique keys can be documented, inferred, accepted, or rejected. You can curate unique key results in the Enterprise Data Catalog. Hover the mouse over the key name to accept or reject the columns inferred as the unique key. The inferred type appears in orange color, accepted type appears in green color and rejected type appears in red color. You can click **Undo Accept** or **Undo Reject** to reset the unique key results to the inferred state. Hover over ( ) to view the details of the person who accepted or rejected the inferred unique key results.

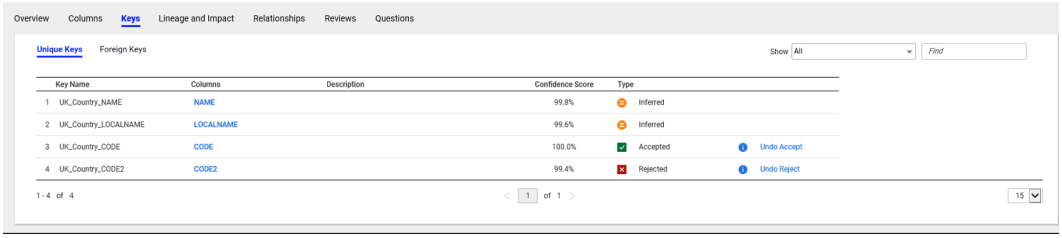

You can use the **Show** filter to view documented, inferred, accepted, rejected, or all types of unique key results. The **Keys** tab displays all types of unique key results by default. You can enter a key name or column name in the **Find** field to search for a unique key inference. You can discover a maximum of five unique keys in each table in the source data object. You can search documented or inferred keys in the Enterprise Data Catalog tool.

You can also view the relationship between the asset and the unique keys of tables related to the asset in the **Relationships** tab. In the **Relationships** tab, you can click on the name of the related table from the **Primary Keys** circle to navigate to the **Relationships** tab of the related table.

You can also click on **Show All** to open the **Tables** dialog box and view the type of relationship between the asset and the related tables. In the **Tables** dialog box, you can click on the relationship and navigate to the **Unique Keys** or **Foreign Keys** tab of the related table. For more information on the Relationships view of an asset, see Chapter 6, “View Relationships” on page 111.

Viewing the Foreign Key Details


In a relational database, a column or a set of columns whose value corresponds to a primary key value in another table is referred to as a foreign key. A foreign key acts as a pointer to the primary key of another

table. For example, the Department_Number column in the Employee table would be a foreign key that points to the primary key of the Department table.

The **Keys** tab displays details of the unique keys and foreign keys for assets such as tables and files.

The **Foreign Keys** section displays the following details:

- Key Name. Displays the name of the foreign key.
- Columns. Displays the parent column that the foreign key refers to along with the table name. Drag and expand the **Columns** field to view all the columns identified as foreign keys. If there are multiple columns with long column names, hover the mouse over the column names to display the tooltip. The tooltip displays all the column names. To view the details of a column, click the column name. The column asset details appear in the **Overview** tab.
- Description. Displays the description of the foreign key.
- Business Title. Displays the business title associated with the foreign key.

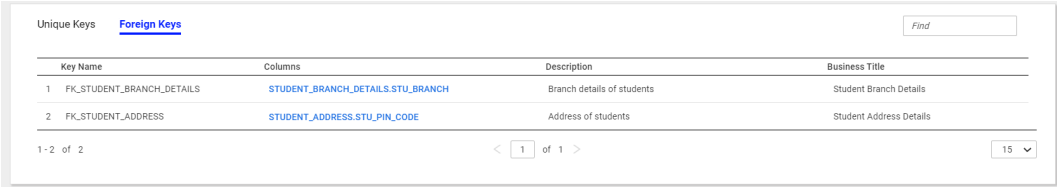

For example, in the above figure `STUDENT_BRANCH_DETAILS.STU_BRANCH` indicates that `STU_BRANCH` is the parent column to which the foreign key refers to and `STUDENT_BRANCH_DETAILS` is the table that contains the parent column.

A table can have foreign keys relationships with more than one table. A table can have foreign key relationships with more than one column of the same table.

You can enter a key name or business title in the **Find** field to search for foreign keys.

You can view the relationship between the asset and the foreign keys of tables related to the asset in the **Relationships** tab. In the **Relationships** tab of the asset, you can click on the name of the related table from the **Foreign Keys** circle to navigate to the **Relationships** tab of the related table.

You can also click on **Show All** to open the **Tables** dialog box and view the type of relationship between the asset and the related tables. In the **Tables** dialog box, you can click on the relationship and navigate to the **Unique Keys** or **Foreign Keys** tab of the related table. For more information on the Relationships view of an asset, see Chapter 6, “View Relationships” on page 111.

Rule Assets

A rule is business logic that defines conditions applied to source data when you run a column profile. You can add a rule to the profile to validate data.

To view a rule asset in the Enterprise Data Catalog, you can configure data quality resource in the catalog administrator. For more information, see the Configuring Informatica Platform Resources chapter in the *Enterprise Data Catalog Scanner Configuration Guide*.

Rule Asset Overview

The Overview tab for a Rule asset displays the details, such as the input column, column results, people associated with the asset, custom attributes, and system attributes.

Enterprise Data Catalog displays the following details for the Overview tab:

Inputs

The inputs section displays the details of the input columns on which you can run rules. You can view name, data type, and description of the columns selected for rule profiling.

Outputs

The output section displays the details of the column results. You can view name, data type and description of the columns after you run rules.

Reviews

The Reviews section displays the reviews and rating for a rule asset. By default, the section displays a text box and five star rating scale next to the text box. To review the rule asset, enter the review in the text box and rate the rule asset, and then click **Submit**.

Questions

The Questions section displays the questions that are asked about the tabular asset. To ask a question, enter the question in the text box, and then click **Submit**.


People

The People section displays users that create, approve, and manage rule asset. The section displays the data owner and data steward fields. Use the Edit Properties icon to add or change the user associated with the glossary.

Custom Attributes

The custom attribute section displays the different types of custom attributes the catalog administrator creates and configures for a Rule asset in the catalog administrator. The section displays tags and URLs. Use the Edit Properties icon to add or change values of the properties in the section.


The following image shows the Overview tab for a Rule asset:

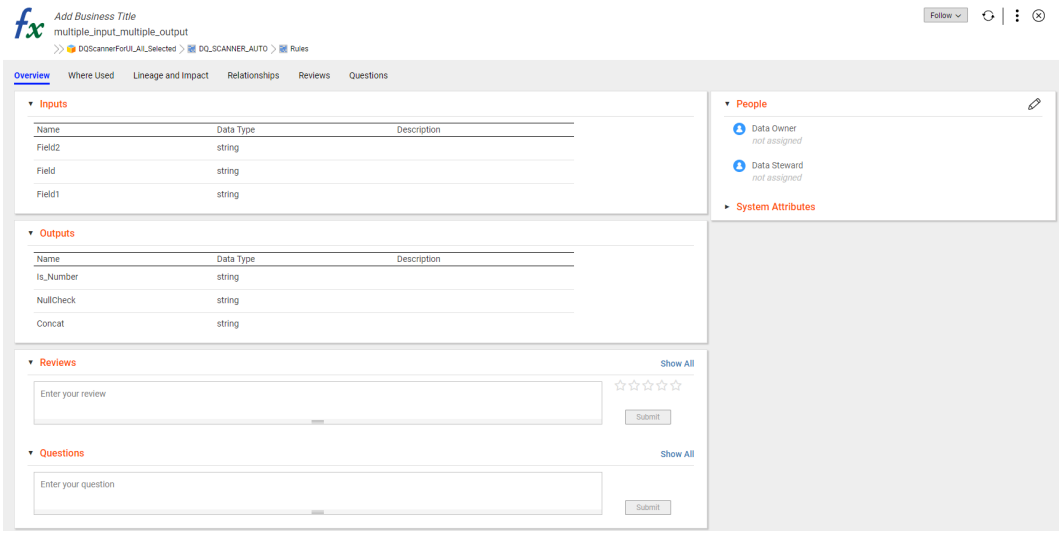

Rule Asset Details

The Where Used tab for the Rule asset displays the list of the tables and path to the tables linked with the rule asset. To view tables associated with the rule, click the asset name or the link in the path section.

The following image shows the details of the Where Used tab in the Rule asset:

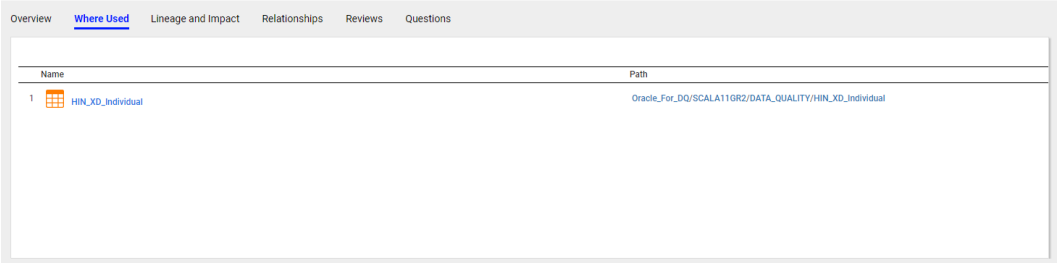

Scorecard Assets

A scorecard is the graphical representation of the valid values for a column or an output of a rule in profile results. You can use scorecards to measure data quality progress. A measure of data quality in the source data is critical information in the management of the data asset in an enterprise.

Scorecards displays the value frequency for columns as scores. The scores shows the percentage of the valid values in the columns. You can add columns from the profile as metrics to a scorecard. To view scorecard asset in the Enterprise Data Catalog, you can configure data quality resource in the catalog administrator. For more information, see the *Configuring Informatica Platform Resources* chapter in the *Enterprise Data Catalog Scanner Configuration Guide*.

Scorecard Asset Overview

The Overview tab for the Scorecard asset displays the details, such as Metric Groups, People, Custom Attributes, and System attributes.

Enterprise Data Catalog displays the following details for the Overview tab:

Metric Groups

The Metric Groups section displays the details of the metrics and metric scores associated with each metric group. You can view the overall accuracy of data across the metric groups. The metric score shows the score for each metric.

People

The People section displays the user associated with the scorecard asset. The sections displays the data owner and data steward fields. Use the Edit Properties icon to add or change the users associated with the asset.


Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a scorecard asset in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon to add or change values of the properties in the section.

System Attributes

The System Attributes section displays the name, description, resource name, and resource type based on the parent resource type. You can change the system attributes when you configure search filters in the Application Configuration dialog box.

The following image shows the Overview tab for the Scorecard asset:

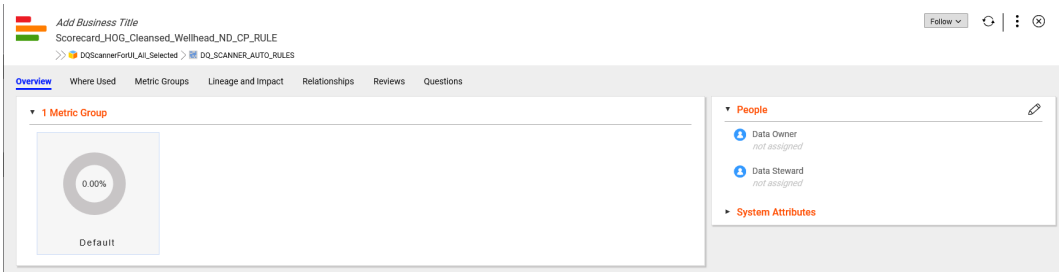


Scorecard Asset Details

You can view the lists of tables and paths to the tables associated with the scorecard. You can click the Metric Group tab to view the quality of data in the data source.

Where Used

The Where Used section displays a list of tables and path to the tables linked with the scorecard.


The following image shows the Where Used tab for the Scorecard asset:

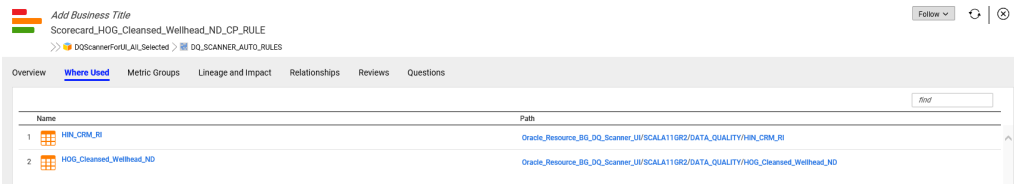

Metric Groups

The Metric Group tab displays details about metric, quality score, and metric score. The Quality Score section displays weighted average value for each metric group. You can view the overall accuracy of data across the metric groups. The Metric Score section displays metric weight for each metric. Click each metric to view the data records that are valid and not valid. You can arrange metric groups in ascending or descending order of quality scores.

The following image shows the Metric Group tab for the Scorecard asset:

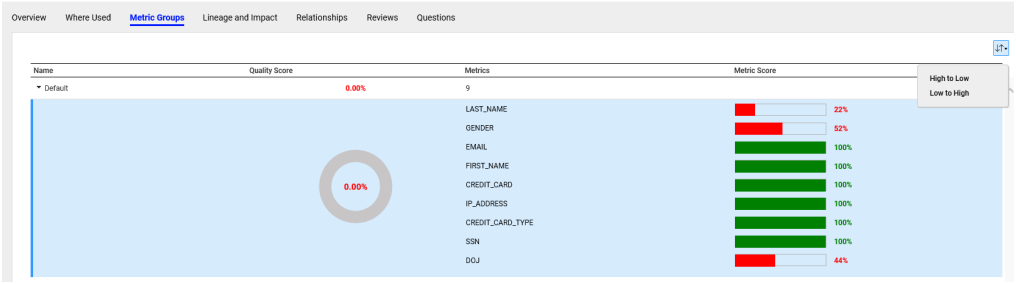

Column and Field Assets

You can view column and field assets such as relational table columns, CSV fields, and business intelligence report fields in Enterprise Data Catalog. You can view details about column and field assets and curate the data domains for column and field assets in the Overview tab.

The following types of assets are examples of column and field assets:


- Business intelligence report columns and fields
- Columns in relational tables, views, and synonyms
- Fields in CSV, JSON, and XML files
- Fields in Salesforce objects
- Hive columns

The Overview tab shows different details for different types of column and field assets. For column and field assets in resources that support profiling, the Overview tab shows the description, associated business terms, system attributes, data domains, and profile results. For other column and field assets, the Overview tab shows the description, system attributes, people associated with the asset, and business terms.

For column and field assets in resources that support profiling, you can accept or reject the data domains that are inferred for the asset. You can also assign one or more data domains to the asset. If an appropriate data domain does not exist, you can create one.

Curation is the process of accepting and rejecting data domains for assets. You can curate data domain results for a column or field asset from the Overview tab.

The following image shows the Overview tab for a relational column that has profile results:

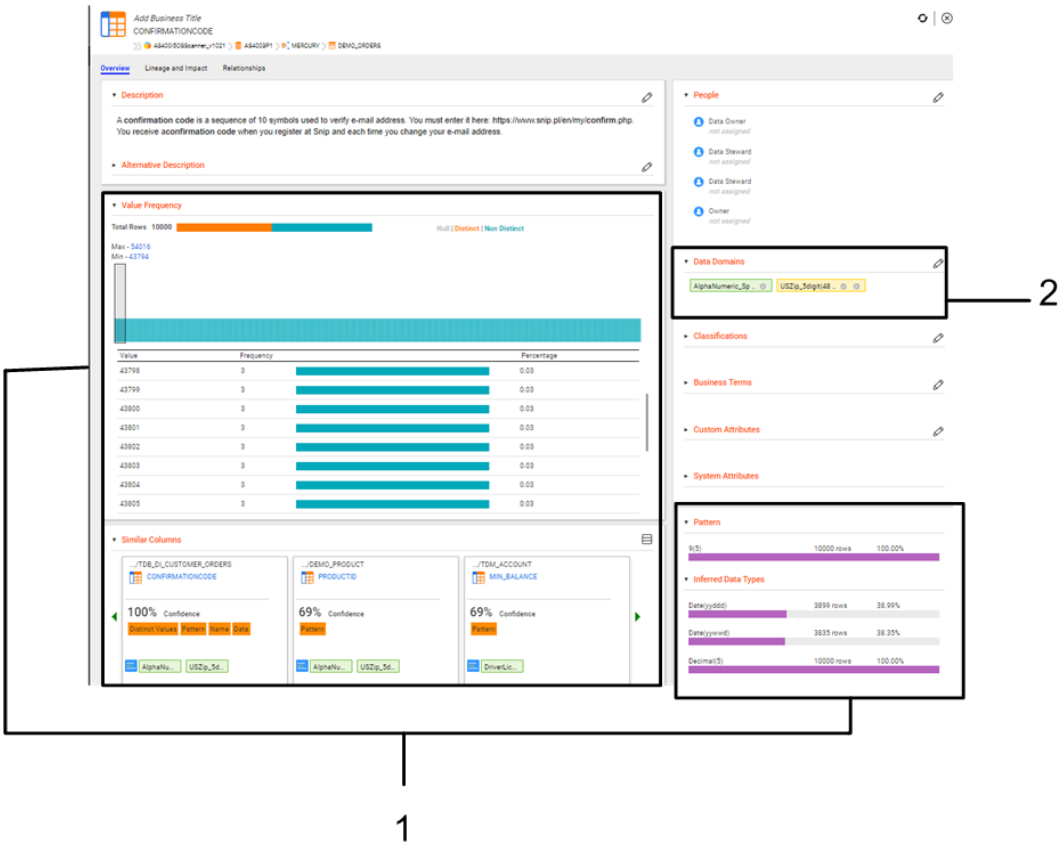

1. Profile results for the column.
2. Curate data domains for the column.

Column and Field Overview

The Overview tab for a column or field asset displays details such as the description of the asset, data domains, system attributes, associated business terms, and profile results. When the asset has profile results, the Overview tab displays the value frequency, patterns, and inferred data types for the column or field values.

Enterprise Data Catalog displays the following details for a column and field assets:

Description

The Description section displays the column or field asset description. Use the Edit Properties icon () to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text type custom attribute called **Additional Description** for the column or field asset in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as an another section under the Description section in the Overview tab.

People

The People section displays the users associated with the column or field asset. The section by default displays the data owner and data steward fields. Use the Edit Properties icon () to add or change the users associated with the glossary. The additional user fields that you see in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a column or field asset in the Catalog Administrator.

Business Terms

The Related Business Terms section displays custom attributes of data types, such as Business Term, Glossary, Axon Glossary. The section displays related terms after the catalog administrator creates and configures the custom attribute for a column or field asset in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Use the Edit Properties () to add, remove, or change the business term values.

Classifications

The **Classifications** section displays all the asset classifications based on custom attributes of reference data types. The custom attributes of a reference data type depend on how the custom attributes are defined in Informatica Business Glossary or Informatica Axon. For example, if you have a column or field containing the sales details belonging to a particular region, you might want to classify the assets based that region. To classify the asset, you can assign a custom attribute of reference data type called **APAC** to the asset. Use the Edit Properties () to add, remove, or change the business classification values.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a column or field asset in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

System Attributes

The Overview tab displays the System Attributes section for all column and field assets. The system attributes that are shown by default vary based on the parent resource type. For example, the default system attributes for an Oracle Business Intelligence Enterprise Edition report field include the data set UUID, native ID, native type, position, and resource name.


You can change the system attributes that are displayed in the Overview tab when you configure search filters in the Application Configuration dialog box.

Value Frequency

You can view the value frequency for view column, table column, CSV field, XML file field, and JSON file data assets in the Overview tab. In the value frequency section, you can view the distribution of values across the data asset, the maximum and minimum values in the data asset, the distribution of distinct values in the data asset, and a list of values and their frequency in a tabular format.

The value distribution chart for a data asset appears by default after you run the similarity profile and value frequency on the data asset in the Catalog Administrator.

The following image displays the value frequency section in the Overview tab:

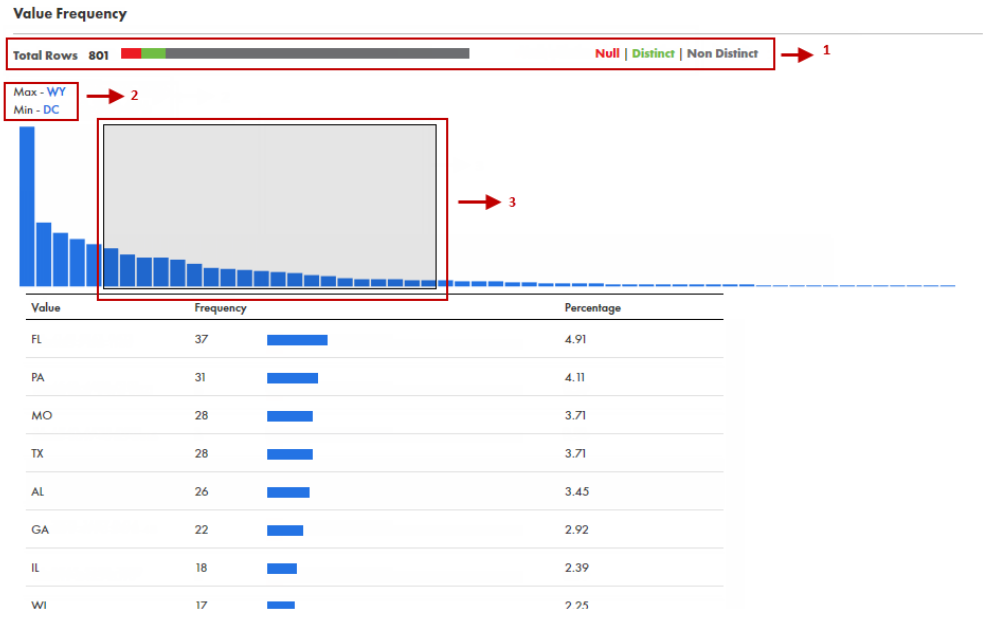

1. Value distribution chart. Displays the number of NULL values, distinct values, and non-distinct values in the first 1000 rows in the data asset.
2. Maximum and minimum value. Displays the maximum value and minimum value in the data asset.
3. Slider. Displays the values in the slider along with the frequency and percentage of values in a tabular format below the graph.

The value distribution for the first 1000 rows in the data asset appears as a horizontal bar chart. The horizontal bar chart displays the distribution of NULL values, distinct values, and non-distinct values in different colors. When you move the pointer over the chart, the number of rows and the percentage of values pertaining to the data point appears in a data label. A data label is similar to a tool tip and it displays the data that pertains to the data point in the chart over which you hover the pointer.

After you run the value frequency for a data asset, you can view the following information about the data asset in the value frequency section:

- Max. Displays the maximum value in the data asset. After you click **Max**, the maximum value along with the frequency and percentage appears in a tabular format below the value frequency graph.
- Min. Displays the minimum value in the data asset. After you click **Min**, the minimum value and the next 19 values in the data asset along with the frequency and percentage appear in a tabular format below the value frequency graph.
- Value frequency graph. The graph displays the distribution of distinct values in the data asset as vertical bars in the column chart. The X-axis in the column chart represents values, and the Y-axis represents the frequency of values. The values are arranged from maximum to minimum number of occurrences in the chart. The chart displays the first 1000 distinct values in the data asset and has a slider. The values within the slider appear in a tabular format below the value frequency graph along with the frequency and percentage of the value.
- Values in tabular format. The values along with the frequency and percentage appear in a tabular format. The values within the slider appear in the table or after you click the **Max** or **Min** value. At a time, you can view only 20 values in the table.

Note: You need specific permissions and privileges to view the value frequency section. Contact the catalog administrator for more information.

Similar Columns

The Similar Columns section displays all the columns that are similar to the column you are viewing. Enterprise Data Catalog discovers similar columns based on column names, column patterns, and unique values. Click **View All** icon to view all the similar columns.

You can view the following details in the Similar Columns section:

- Column Name. Displays the column or field name. To view the column or field asset details, click the column name. The column asset details appear in the Overview tab.
- Business Term. Displays the associated business term.
- Data Domain. Displays the inferred data domains for the column and the percentage of rows that conform to the data domain. The inferred data domains appear in orange color and the curated data domains appear in green color.
- Confidence %. Displays the score and the parameters based on which the score is calculated. The confidence score is calculated by an internal algorithm based on the discovered similar column names, similar column patterns, and similar unique values for the column that you are viewing. You can view the Data, Distinct Values, Name, and Pattern parameters.

Data Domain

The Data Domain section appears for column and field assets that support profiling, such as relational table and view columns, fields in CSV, JSON, and XML files, and fields in Salesforce objects.

A data domain is a predefined or user-defined Model repository object that enables you to discover the functional meaning of column data or column names in a data source. Examples of data domains include Social Security number, account status, IP address, and UPC code.

The inferred data domains appear in orange boxes with the inference percentage. For example, 

. You can accept or reject the inferred domains.

The data domains that you accept are assigned to the asset. The assigned data domains appear in green boxes. For example, 

. You can reject any assigned data domain, if required.

You can create a smart data domain if you want to discover assets that have similar columns or fields. For example, your organization uses a unique pattern for employee ID and you want to discover all the assets that contain the employee ID pattern. To accomplish this task, you can either create a data domain in Catalog Administrator or create an on-the-fly data domain, also called smart data domain in Enterprise Data Catalog.

You can create a smart data domain instantly with the existing pattern of the column or field. This data domain does not contain any rule. To use the column or field pattern as a data domain, click the  icon to create a smart data domain. After you create the data domain, run the Informatica Similarity Discovery and DataDomainPropagation scanner in Catalog Administrator to propagate and discover assets that contain a similar pattern. You can view smart data domains in Catalog Administrator. To convert an smart data domain to a rule-based data domain, add one or more rules, conformance values, and proximity data domains.

Pattern

In the Pattern section, you can view the data patterns for the column or field values along with the percentage and frequency. Each inferred pattern appears a horizontal bar chart along with the pattern format, number of rows, and percentage of rows.

Inferred Data Types

In the Inferred data types section, you can view all of the inferred data types for the column or field. Each inferred data type appears as a horizontal bar chart along with the data type, number of rows, and percentage of rows.

Viewing the Field Details

The Fields tab displays all the fields for assets such as delimited files and JSON files.

On the **Fields** tab, you can view the following details for each field in the asset:

Name

Displays field names. By default, the fields list appears in the ascending order based on the field position in the data source. To sort fields in ascending or descending order based on the source position, click the arrow ( ) icon. To sort fields in alphabetical order by name, click the **Name** heading on the Fields tab. To sort fields in reverse alphabetical order, click the field heading again. To view the field asset details on the **Overview** tab, click the field name link.

Note: You can sort delimited fields by field position.

Business Title

Displays the business title associated with the field. You can also view the recommended business terms if you want to associate a business term as a business title with the field.

Data domains

Displays the data domains associated with the field. Hover the mouse over a data domain to view the Name Match, Data Match, Proximity Match, System Suggested, and Assigned by details. The inferred data domains appear in orange color and the curated data domains appear in green color. The Name Match displays **Yes** when the field name matches with the data domain. The Proximity Match displays a score that is a ratio of the number of proximal data domains discovered in the data asset to the number of configured proximal data domains for an inferred data domain.


Null Distinct Non-Distinct %

Displays the percentage of null, distinct, and non-distinct values in a field. Hover the mouse over the horizontal bar chart to view the number rows that contain null, distinct, and non-distinct values.

Source Data Type Inferred Data Types

Displays the documented data type and inferred data types of the field. Hover the mouse to view the list of documented data type and inferred data types with percentages.

The following image displays the sample Fields tab:

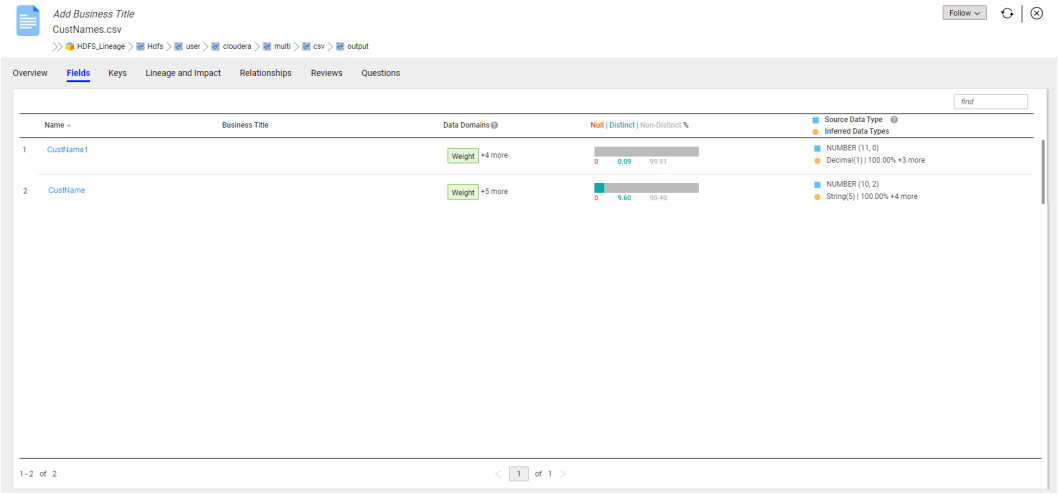

Creating a Smart Data Domain

In Enterprise Data Catalog, if you identify a column or field asset as a potential data domain, you can create a smart data domain instantly. The data domain that you create is stored in the Model repository.

To create a data domain in Enterprise Data Catalog, you must have the **Catalog Management: Domain Curation** privilege.

1. In the **Search Results** screen, identify the column or field asset for which you want to assign the data domain.
2. Click the asset.

   The asset appears in the **Overview** tab.
3. In the **Data Domain** section, click the icon.

   The **Edit Data Domains** dialog box appears.
4. Enter a name for the data domain. Click **Add**.
5. In the **New Data Domain** dialog box, you can enter the following details:
   - Optionally, enter a description for the data domain.
   - Optionally, you can select a data domain group to which you want to assign the data domain.
6. Click **OK**.

   In the **Edit Data Domains** dialog box, the data domain appears in the **Accepted & Inferred Data Domains** list. The **Assigned By** column lists your user name as the person who assigned the data domain to the asset.
7. Click **OK**.

Data Domain Curation for Columns and Fields

Curation is a process to accept or reject data domains for an asset. You can curate the data domains for column and field assets.

In Catalog Administrator, you can run data domain discovery on resources. In Enterprise Data Catalog, you can view the inferred data domains for column and field assets. When you configure the **Auto accept if more than** conformance criteria option for a resource, Enterprise Data Catalog accepts the data domain

automatically when the data domain match exceeds the configured value. Data domain inference is also based on the data domains that are assigned to similar assets in Enterprise Data Catalog. When you create a data domain in Enterprise Data Catalog and assign it to a column or field, Enterprise Data Catalog infers the data domain for similar assets.

You can perform the following curation tasks for a column or field in the Overview tab:

- Accept or reject the inferred data domains for the asset.
- Assign a data domain to the asset. If an appropriate data domain does not exist, you can create one.
- Reject an assigned data domain.
- Accept a rejected data domain.


Note: If you accept or reject an inferred data domain for an asset, you cannot set the data domain back to the inferred status.

Viewing and Curating the Data Domains for Tabular, Column, and Field Asset

You can assign a data domain to a column or field even though the data domain was not inferred for the asset. You can also accept a previously rejected data domain or reject an assigned data domain.

1. In the Enterprise Data Catalog home page, type a table name that contains columns or fields assets, and click the search icon.
2. In the **Search Results** page, click the table asset.
3. In the **Overview** tab for the asset, you can view the inferred data domains in the **Sample Columns** section. The **Data Domain** column displays the data domain name, if column name matches the data domain, and if there is a proximity match in the asset.
4. Click a column or field in the table asset.

   The column or field asset appears in an **Overview** tab.
5. In the **Overview** tab, you can view asset details, such as Description, People, Business Terms, Business Classifications, Custom Attributes, System Attributes, Value Frequency, Similar Columns, Pattern, Inferred Data Types, and Data Domain.
6. Scroll to the **Similar Columns** section to view all the columns that are similar to the column you are viewing.

   The **Data Domain** column in the **Similar Columns** section displays the inferred data domains for the column and the percentage of rows that conform to the data domain.
7. Scroll to the **Data Domain** section to view the data domains that are inferred for the asset from profile results or from similar columns. This section appears only for column and field assets in resources that support profiling such as relational table and view columns, fields in CSV, JSON, and XML files, and fields in Salesforce objects.
8. Data domains that appear in an orange box with the inference percentage are inferred data domains. For example, 

.

   You can perform the following tasks on an inferred data domain:

   - Click the icon to accept the data domain. After you accept the data domain, the box turns green. The data domains that are auto-accepted appear in a green box. For example, 

.
   - Click the icon to reject the data domain. After you reject a data domain, the data domain no longer appears in the **Data Domain** section for the asset.

9. In the **Data Domain** section, click the  icon to view the list of data domains that are assigned or inferred for the asset and the list of data domains that are rejected for the asset.
10. To assign a data domain to the asset, perform one of the following tasks:
    - If the data domain appears in the **Accepted & Inferred Data Domains** or **Rejected Data Domains** list, click the  icon.
    - If the data domain exists in the Model repository but does not appear in the lists, then you can create a data domain on-the-fly. The data domain is called a smart data domain.

    The data domain then appears the **Accepted & Inferred Data Domains** list, and the **Assigned By** column lists your user name as the person who assigned the data domain to the asset.
11. To reject an assigned or inferred data domain, click the  icon for the data domain in the **Accepted & Inferred Data Domains** list.

    The data domain moves to the **Rejected Data Domains** list, and the **Assigned By** column lists your user name as the person who rejected the data domain for the asset.
12. To accept a data domain and reject all the assigned, inferred, or accepted data domains, perform the following tasks:
    1. In the **Accepted & Inferred Data Domains** list, select a data domain that you want to accept.
    2. Click the icon, and then click the **Accept this, reject the rest** option.
13. Click **OK**.

Data Domain Assets

You can view data domain assets in Enterprise Data Catalog. You can view details about data domains and accept or reject the assets for a data domain.

A data domain is a predefined or user-defined asset that is based on the semantics of column or field data or a column or field name. Some examples of data domains are Social Security number, account status, IP address, and UPC code. Assigning a data domain to a column or field makes the asset easier to identify and understand.

You can organize data domains that apply to similar types of data in data domain groups. For example, the Bank Account data domain group might contain data domains such as Account Status, Account Number, and Credit Card Number.

Catalog administrators, Analyst tool users, and Developer tool users can create data domains and data domain groups. You can also create a smart data domain in the catalog when you view the overview details for a column or field that supports profiling. Data domains and data domain groups are stored in the Model repository.

Data domains are inferred for column and field assets based on the profiles that users run in Catalog Administrator and based on the data domains that are assigned to similar assets.

Curation is the process of accepting and rejecting data domains for assets. As you curate data domains for columns and fields, Enterprise Data Catalog becomes more accurate in making data domain inferences for other columns and fields. You can accept or reject the assets that are inferred for a data domain. You can also reject the assets to which the data domain is assigned.

For more information about data domains, see the *Informatica Catalog Administrator Guide*.

Data Domain Overview Tab

The Overview tab for a data domain asset displays the details, such as the description and source description of the data domain, associated business terms, associated people, system attributes, accepted, inferred, and rejected data domains.

The Catalog tool displays the following details for data domain assets:

Description

The Description section displays the data domain description. Use the Edit Properties icon to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text type custom attribute called **Alternative Description** for the data domain in the Catalog Administrator tool. The Catalog tool displays the custom attribute as an another section under the Description section in the Overview tab.

Source description

The Source Description section displays the data domain description that you provide while creating the data domain.

Accepted

The Accepted section lists the columns and fields for which the data domain is accepted.

You can view the following details in the Accepted section:

- Name. Displays the name of the asset for which the data domain is accepted. Hover over the name to view the path of the asset.
- Business Term. Displays the associated business term.
- Dataset. Displays the table asset name.
- Assigned By. Lists the name of the person that assigned the data domain to the asset.
- Inference Type. Displays the inference type and percentage.

You can reject an assigned data domain. You can choose multiple data domains, and click the Menu icon to reject data domains for a table, column, or field asset. You can sort the assets for which a data domain is accepted based on the Name column. You can export the assets for which a data domain is accepted to a CSV file. The sort and export options appear when the data is in tabular format. You can enter the name or business title of the asset in the **Find** field to search for assets.

Inferred

The Inferred section lists the columns and fields for which the data domain is inferred.

You can view the following details in the Inferred section:

- Name. Displays the name of the asset for which the data domain is inferred. Hover over the name to view the path of the asset.
- Business Term. Displays the associated business term.
- Dataset. Displays the table asset name.
- Assigned By. Displays **System** for inferred data domains.
- Inference Type. Displays the inference type and percentage.

You can accept or reject an inferred data domain. You can choose multiple data domains, and click the Menu icon to accept or reject data domains for a table, column, or field asset. You can sort the assets for which a data domain is inferred based on the Name column. You can export the assets for which a

data domain is inferred to a CSV file. The sort and export options appear when the data is in tabular format. You can enter the name or business title of the asset in the **Find** field to search for assets.

Rejected

The Rejected section lists the columns and fields for which the data domain was rejected.

You can view the following details in the Rejected section:

- Name. Displays the name of the asset for which the data domain is rejected. Hover over the name to view the path of the asset.
- Business Term. Displays the associated business term.
- Dataset. Displays the table asset name.
- Assigned By. Lists the name of the person that assigned the data domain to the asset. Displays **System** if the data domain is inferred.

You can accept a rejected data domain for a column or field. You can choose multiple data domains, and click the Menu icon to accept data domains for a table, column, or field asset. You can sort the assets for which a data domain is rejected based on the Name column. You can export the assets for which a data domain is rejected to a CSV file. The sort and export options appear when the data is in tabular format. You can enter the name or business title of the asset in the **Find** field to search for assets.

People

The People section displays the users associated with the data domain. The section by default displays the data owner and data steward fields. Use the Edit Properties icon to add or change the users associated with the glossary. The additional user fields that you see in the section appear after the Catalog Administrator tool creates and configures a custom attribute of User data type for a data domain in the Catalog Administrator tool.

Classifications

The Classifications section displays the asset classifications based on custom attributes of reference data types. The custom attributes of a reference data type depend on how the custom attributes are defined in Informatica Business Glossary or Informatica Axon. For example, if you have a table called Sales Details and you want to classify the table based on a region. To classify the table, you can assign a custom attribute of reference data type called APAC to the table. Use the Edit Properties to add, remove, or change the business classification values.

Custom attributes


The properties that the Custom Attributes section displays depends upon the different types of custom attributes the Catalog Administrator tool creates and configures for a data domain in the Catalog Administrator tool. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon to add or change values of the properties in the section.

System attributes

The System Attributes section displays the following system attributes for the data domain:

- Is Domain by Example. Displays Yes for a smart data domain, and No for a rule-based or pre-defined data domain.
- Resource Name. Displays DataDomain by default. "DataDomain" is the name of the internal job that synchronizes data domains between the catalog and the Model repository.
- Last Modified. Displays the date, time, and year the data domain was last updated.
- Asset type. Displays the type of the asset.

The following image shows the sample Overview tab of a data domain asset:

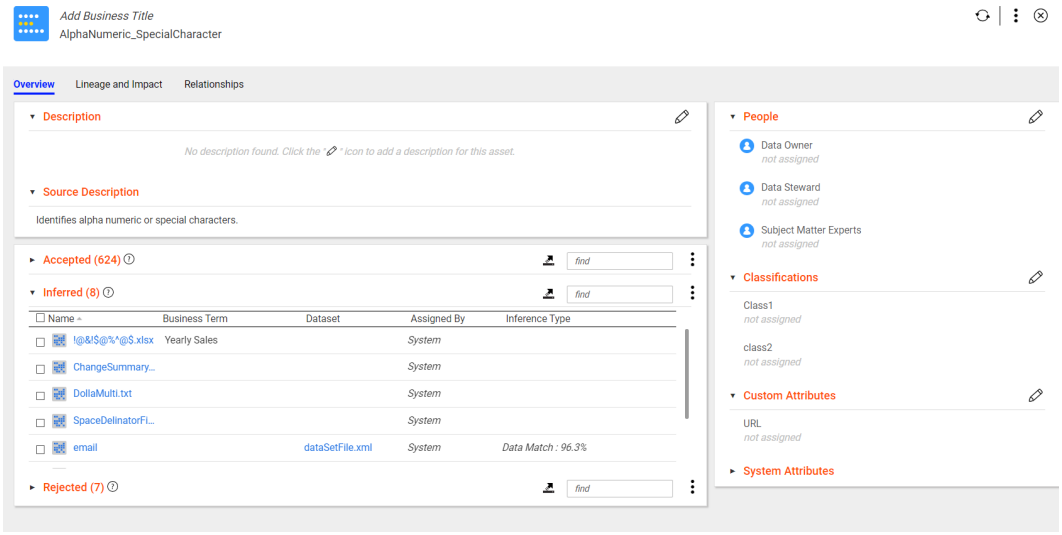

Data Domain Group Overview

The Overview tab for a data domain group displays the details, such as the system attributes, custom attributes, associated business terms, people, and data domains in the group.

Enterprise Data Catalog displays the following details for data domain groups:

Description

The Description section displays the data domain group description. Use the Edit Properties icon ( ) to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text type custom attribute called **Additional Description** for the data domain group in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as an another section under the Description section in the Overview tab.

Source Description

The Source Description section displays the data domain group description that you provide while creating the data domain group.

Contains

The Contains section lists the data domains in the group. The section by default lists maximum a five data domains. Click **Show All** to view the complete list of assets the glossary contains.

You can view the following details in the Contains section:

- Name. Displays the name of the data domain group.
- Business Title. Displays the associated business title.
- Asset Type. Displays Data Domain as asset type.

System Attributes

The System Attributes section displays the following system attributes for the data domain:

- Last Modified. Displays the date, time, and year the data domain group was last updated.

- Resource Name. Displays DataDomainGroup by default. "DataDomain" is the name of the internal job that synchronizes data domains between the catalog and the Model repository.
- Asset type. Displays Data Domain Group as the asset type.

People

The People section displays the users associated with the data domain group . The section by default displays the data owner and data steward fields. Use the Edit Properties icon ( ) to add or change the users associated with the glossary. The additional user fields that you see in the section come when the catalog administrator creates and configures a custom attribute of User data type for a data domain group in the Catalog Administrator.

Business Terms

The Business Terms section displays custom attributes of data types, such as BusinessTerm, Glossary, AxonGlossary. The section displays related terms when the catalog administrator creates and configures the custom attribute for the data domain group in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Use the Edit Properties ( ) to add, remove, or change the business term values.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a data domain group in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon ( ) to add or change values of the properties in the section.

Data Domain Curation

Enterprise Data Catalog infers data domains for columns and fields based on profile results. It also infers data domains for assets based on the data domains that are assigned to similar assets. You can accept and reject assets for a data domain.

When you curate a data domain, you make the data domain more accurately reflect the type of data that belongs in the data domain. Curating a data domain also makes Enterprise Data Catalog more accurate when it infers data domains for similar assets.

You can perform the following curation tasks for a data domain:

- Accept or reject the inferred assets for the data domain. When you accept an asset, the data domain becomes assigned to the asset.
- Reject any assigned asset for the data domain.
- Accept any rejected asset for the data domain.

Note: If you accept or reject an inferred asset for a data domain, you cannot set the asset to back the inferred status.

You can accept or reject one asset for a data domain, or you can accept or reject multiple assets at once.

Curate Individual Assets

You can accept or reject assets for a data domain. When you accept an asset, the data domain is assigned to the asset.

1. In the Enterprise Data Catalog home page, type a data domain name, and click the search icon.
2. In the **Search Results** page, click the data domain asset.

   The **Overview** tab for the asset appears.
3. To accept an asset for the data domain, perform the following tasks:
   1. In the **Inferred** list, find the asset that you want to accept.
      If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field.
   2. To accept the asset for the data domain, click the Accept icon.
4. To accept multiple assets for the data domain, perform the following tasks:
   1. In the **Inferred** list, select the assets that you want to assign.
      If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field. To select all the assets, select the **Name** checkbox.
   2. To accept the assets for the data domain, click the Menu icon, and click **Accept**.
5. To reject an asset for the data domain, perform the following tasks:
   1. In the **Accepted** or **Inferred** list, find the asset that you want to reject.
      If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field.
   2. To reject the asset for the data domain, click the Reject icon.
6. To reject multiple assets for the data domain, perform the following tasks:
   1. In the **Accepted** or **Inferred** list, select the assets that you want to reject.
      If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field. To select all the assets, select the **Name** checkbox.
   2. To reject the assets for the data domain, click the Menu icon, and click **Reject**.

Data Domain Curation through Export and Import

You can accept or reject the multiple inferred assets simultaneously. You can export the assets to the comma-separated values (CSV) file and import the CSV file back into Enterprise Data Catalog. You can also assign a data domain to an asset manually.

The exported CSV file has inferred, accepted, and rejected data domains column headings. You can edit the columns to accept, reject, or delete the assets. You can perform the following actions to change the assets state in the exported CSV file:

Asset State in Exported CSV file	Action	Asset State in Imported CSV file
Inferred	Accept	Accepted
Inferred	Reject	Rejected
Inferred	Delete	Inferred
Accepted	Reject	Rejected

Asset State in Exported CSV file	Action	Asset State in Imported CSV file
Accepted	Delete	Remove assets that are associated with the data domains.
Rejected	Accept	Accepted
Rejected	Delete	Inferred, if a profile scanner assigns a data domain to an asset.
Rejected	Delete	Remove assets that are associated with the data domains.
Auto accepted	Reject	Rejected
Auto accepted	Delete	Rejected

For data domains assigned to the accepted or rejected state, if you remove the data domains from a column and import the CSV file, the data domains will be deleted and all links to the assets will be removed. You cannot add a data domain to the inferred column to move the data domain to the inferred state when you import the file. Likewise, you cannot delete a data domain from the inferred column to delete the data domain that is in the inferred state when you import the file.

Accepting or Rejecting Assets for Data Domains through Export and Import

You can accept or reject the multiple inferred assets simultaneously. You can perform the following steps to accept or reject assets through export and import button:

1. From the **Search Result** page, **Resource Overview** tab, or **Asset Overview** tab, click **Menu** button and select **Export** option.

   The **Export Assets** dialog box appears.
2. Select the asset types and custom attributes that you want to export.
3. Click **OK**.
4. Open the exported CSV file.

   The exported file has inferred, accepted, and rejected data domains column headings.
5. Accept or reject the inferred assets by editing the columns.
   - Add the inferred assets from the inferred data domain column to the accepted or rejected data domain column.
   - Delete the assets from the accepted or inferred data domains column to remove the data domains associated with the assets.

   Note: You cannot reject data domains that are inferred or auto-accepted by the profile scanner.
6. From the **Search Result** page, **Resource Overview** tab, or **Asset Overview** tab, click **Menu** button and select **Import** option.

   The **Import Assets** dialog box appears.
7. Click **Browse** to select the CSV file you want to import from the local machine. Optionally, you can drag the CSV file into the dotted rectangle in the **Select file to Import** section.
8. Click **Next**.
9. To receive notifications on the import status, select the **Send email notification** check box and enter a valid email address in the address field. You can enter multiple email addresses separated by a comma.

10. Click **OK**.

    The Enterprise Data Catalog sends you a notification after the import job is complete and updates assets based on the attribute values that were assigned in the exported CSV file. You can monitor the export and import job in the **Monitor Job** page.

Composite Data Domain Assets


A composite data domain is a collection of data domains or other composite data domains linked using rules. A composite data domain helps you search for the required details of an asset across multiple schemas in the same resource. For example, an asset that contains details of a customer, the associated details include the customer name, age, location, and contact details that might be spread across multiple schemas in the same resource.

Catalog administrator creates composite data domains and defines rules based on a combination of existing data domains or composite data domains in Catalog Administrator.

You can search for composite data domains and view the details about composite data domains in the Overview tab. When you search for an asset using a composite data domain, the search results page includes the composite data domain you searched for along with a list of assets for which the composite data domain is inferred.

For example, when you search for a composite data domain called Customer Details, the catalog displays the Customer Details composite data domain and the associated assets such as Sales_Details, Order_Invoice, Customer_Addresses, and Customer_Orders_Delivery in the search results page.

The following image shows a sample Overview tab for a composite data domain:

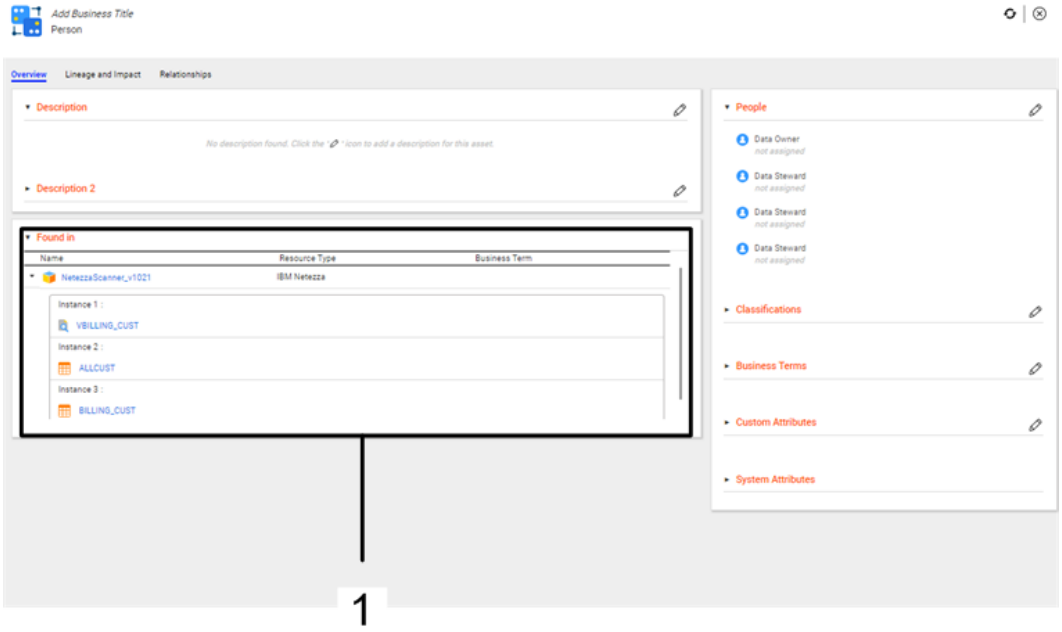

1. Found in. Displays a list of resources that contain assets for which composite data domains are inferred.

For more information about composite data domains, see the *Informatica Catalog Administrator Guide*.

Composite Data Domain Overview

The Overview tab for a composite data domain displays details, such as the description, system attributes, business terms, and resources where the composite data domain is found.

Enterprise Data Catalog displays the following details for composite data domain assets:

Description

The Description section displays the composite data domain description. Use the Edit Properties icon () to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text type custom attribute called **Alternative CDD Description** for the composite data domain in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as an another section under the Description section in the Overview tab.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a composite data domain in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section. .

Business Terms

The Business Terms section displays custom attributes of data types, such as Business Term, Glossary, Axon Glossary. The section displays related terms after the catalog administrator creates and configures the custom attribute for a composite data domain in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Use the Edit Properties () to add, remove, or change the business term values.

People

The People section displays the users associated with the composite data domain. The section by default displays the data owner and data steward fields. Use the Edit Properties icon () to add or change the users associated with the glossary. The additional user fields that you see in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a composite data domain in the Catalog Administrator.

Found in

The Found in section displays a list of resources that contain assets for which composite data domains are inferred. The section also displays the type of the resource that contains the composite data domain, and business glossary term that is associated with the resource.

When you expand a resource in the Found in section, you can view a list of instances. Each instance displays assets on which the composite data domain is inferred. An instance can contain multiple assets depending upon the composite data domain rules that you define in Catalog Administrator.

For example, you create a composite data domain called Customer Details using First_Name AND Last_name rule in Catalog Administrator. Based on the composite data domain rule that you have defined, Enterprise Data Catalog infers Order_Invoice and Delivery_details tables and associates the composite data domain to those tables. When you open the Customer Details composite data domain in

the Overview tab, the Found in section displays tables Order_Invoice and Delivery_details under an instance.


Mapping Assets

A mapping is a set of inputs and outputs that represent the data flow between sources and targets. A mapping contains components such as source objects, target objects, and transformations.

You can view details for mapping assets in the Overview tab. The mapping assets in the catalog come from the Informatica PowerCenter and Informatica Cloud Services. To display Cloudera data flow asset details, open an operation asset type in the Overview tab.

Note: You cannot view lineage and impact for mapping and operation assets.

The following image shows a sample Overview tab for a mapping asset:

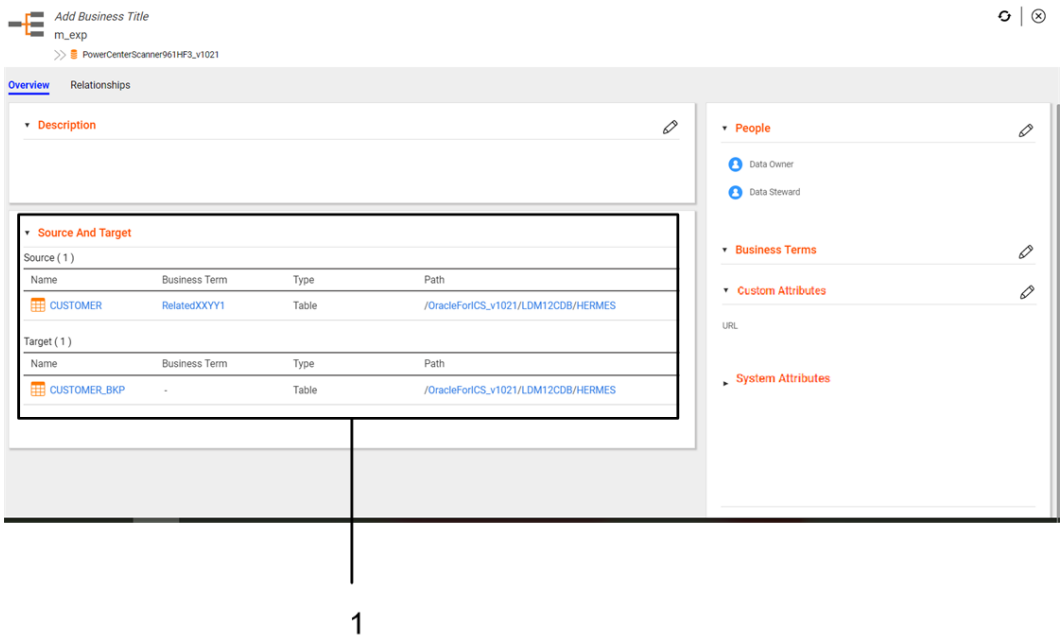

1. Source And Target. Displays the source and target assets that the mapping contains.

Mapping Overview

The Overview tab for a mapping asset displays the details, such as the system attributes, and source and target assets the mapping contains.

Enterprise Data Catalog displays the following details for mapping assets:

Description

The Description section displays the mapping asset description. Use the Edit Properties icon ( ) to edit or add description for the asset. You can enter rich text as the description for the asset. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections under the Description section. For example, you create and configure a rich text

type custom attribute called **Additional Description** for the mapping asset in the Catalog Administrator. Enterprise Data Catalog displays that custom attribute as an another section under the Description section in the Overview tab.

People

The People section displays the users associated with the mapping asset . The section by default displays the data owner and data steward fields. Use the Edit Properties icon () to add or change the users associated with the glossary. The additional user fields that you see in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a mapping asset in the Catalog Administrator.

Related Business Terms

The Related Business Terms section displays all the BusinessTerm, Glossary, AxonGlossary data type custom attributes that an catalog administrator creates and configures for the mapping asset. You can associate multiple business terms as custom attribute values to the asset in the Business Terms section. Use the Edit Properties icon () to edit the section to add or remove business term values.

System Attributes

The System Attributes section displays the mapping description, type of resource that contains the mapping, and folder name where the mapping is created.

Custom Attributes

The properties that the Custom Attributes section displays depends upon the different types of custom attributes the catalog administrator creates and configures for a mapping asset in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the Edit Properties icon () to add or change values of the properties in the section.

Source and Target


The Source and Target section displays all the source and target assets for a mapping. The Source and Target section also displays details, such as, the asset name, business term associated with the asset, type of the asset, and path to the asset.

Reference Assets

Assets from reference resources are known as reference assets. A reference resource indicates that the resource you configured includes references from other data sources or resources. Enterprise Data Catalog displays reference resources and reference assets after you configure a resource to get references from other data sources in Catalog Administrator.

Search for reference assets and view the details about reference assets in the **Overview** tab.

The following image shows the **Overview** tab for a sample reference asset named **Employee_Details**:

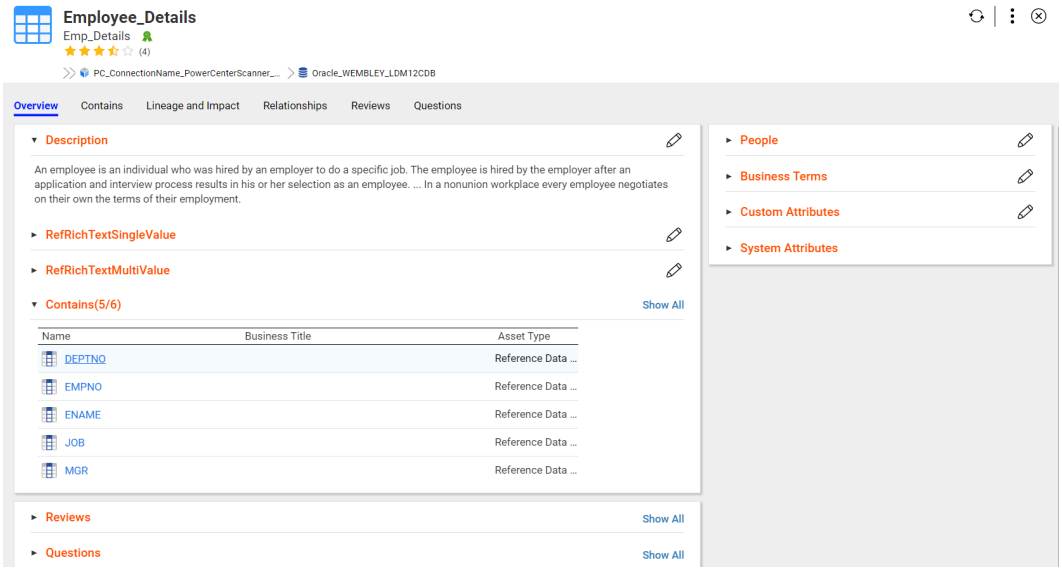

You can view the following types of reference assets in Enterprise Data Catalog:

Reference Data Sets

A reference data set refers to a collection of data objects included in a reference resource. Examples include tables, views, synonyms, and public synonyms.

Reference Data Elements

A reference data element refers to any asset within a reference data set. For example, a column within a table, or view column within a view is a data element. Examples include columns, view columns, and fields.

Reference Data Source

A data source referred by a configured resource is a reference data source. For example, connections and schemas used in PowerCenter mappings.

You can perform the following tasks with reference assets:

- Filter the search results based on reference resource and assets.
- View lineage and impact information for a resource that includes reference resources and assets.
- Annotate and enrich reference assets with custom attributes and business terms.
- Perform a bulk export or import of the custom attributes, business term associations, and other enrichments on reference assets.

For more information about reference resources and assets, see the *Manage Resources* chapter in the *Informatica 10.5 Catalog Administrator* guide.

CHAPTER 5

View Lineage and Impact

This chapter includes the following topics:

- View Lineage and Impact Overview, 85
- The Classic View (Deprecated), 86
- The Compact View, 88
- The Asset Summary View, 90
- Lineage and Impact Tasks, 93

View Lineage and Impact Overview

Lineage and impact describes the end-to-end data flow for an asset. The data flow for an asset has two components, the lineage and the impact.

Lineage describes the flow of data from the origins to an asset. Lineage shows you where the data for an asset comes from and which assets affect the asset that you are viewing. When you view an asset in a lineage and impact diagram, the lineage includes the asset that you are viewing and all of the upstream assets in the data flow.

Impact describes the flow of data from an asset to the destinations. Impact shows you where the data is used and which assets might be affected if you change the asset that you are viewing. When you view an asset in a lineage and impact diagram, the impact includes the asset that you are viewing and all of the downstream assets in the data flow.

You view the lineage and impact information for an asset in the Lineage and Impact tab. The asset from which you open the Lineage and Impact tab is called the seed asset. The Lineage and Impact tab contains the diagram view, compact view, and asset summary view. The Lineage and Impact tab, by default, displays the diagram view for the asset. You can toggle between the diagram view and compact view in the Lineage and Impact tab. Use the **Classic View** option to toggle between the diagram view and compact view. The classic view refers to the diagram view.

You can choose to display the summary information for the assets in the asset summary page. The asset summary view contains the Asset Lineage Summary, Asset Impact Summary, and Asset Control Summary tabs. The Asset Lineage Summary tab lists all the assets in the data flow from the origins to the seed asset. The Asset Impact Summary tab lists all assets in the data flow from the seed asset to the destinations. The Asset Control Summary tab displays all the assets that control the seed asset in the data flow, and assets that the seed asset controls.

The Lineage and Impact tab also displays associated business terms and transformation logic for assets that contain transformations. You can also filter, export, and print the lineage and impact view.

View the lineage and impact for an asset to answer the following types of questions:

How is a field in a report derived?

An analyst at your organization needs to find out which fields or columns are used to calculate the Cost Ratio field in a Tableau report. She searches for "Cost Ratio" in the catalog and opens the Lineage and Impact tab for the asset. The analyst views the lineage and impact diagram and discovers that Cost Ratio is calculated directly from a table in a data warehouse. The analyst can then perform further analysis on the table.

If I replace an asset, which other assets might be affected? Who owns the affected assets?

A developer at your organization owns relational table "Transactions_DB" that is obsolete and needs to be replaced with a different table. He searches for "Transactions_DB" in the catalog and opens the Lineage and Impact tab for the asset. The developer discovers that the table is used in multiple Business Intelligence reports. He opens the asset summary and finds the names of the users that are associated with the report assets. The developer then notifies them that the table will be replaced.

The Classic View (Deprecated)

The classic view (deprecated) displays the detailed lineage and impact diagram for the asset. To enable the classic view (deprecated) in the Lineage and Impact tab, turn on the Classic View (Deprecated) option.


The asset from which you open the Lineage and Impact tab is called the seed asset. The classic view (deprecated) displays the origins of the data, the seed asset, and the destinations for the data. The seed asset appears within its own frame even if there are other assets in the data flow that are within the same resource.

Intermediate assets are the assets between an origin and the seed asset and between the seed asset and a destination. All intermediate assets are hidden by default. Hiding the intermediate assets decreases the time it takes to display the diagram and simplifies the view.

You can view a maximum of 10 lineages in classic view by setting the number of hops from the seed asset to a value greater than or equal to 10, or by checking the **Display full available depth option**. If you set the value to less than 10, the specified number of lineages are displayed.

The assets shown in the diagram vary based on the seed asset type. For example, if the seed asset is a relational table, the lineage and impact diagram shows other tables and data structures that impact and are impacted by the table. The lineage and impact diagram does not display the columns or fields within the other tables and data structures.

The following image shows the classic view (deprecated) for a sample asset:

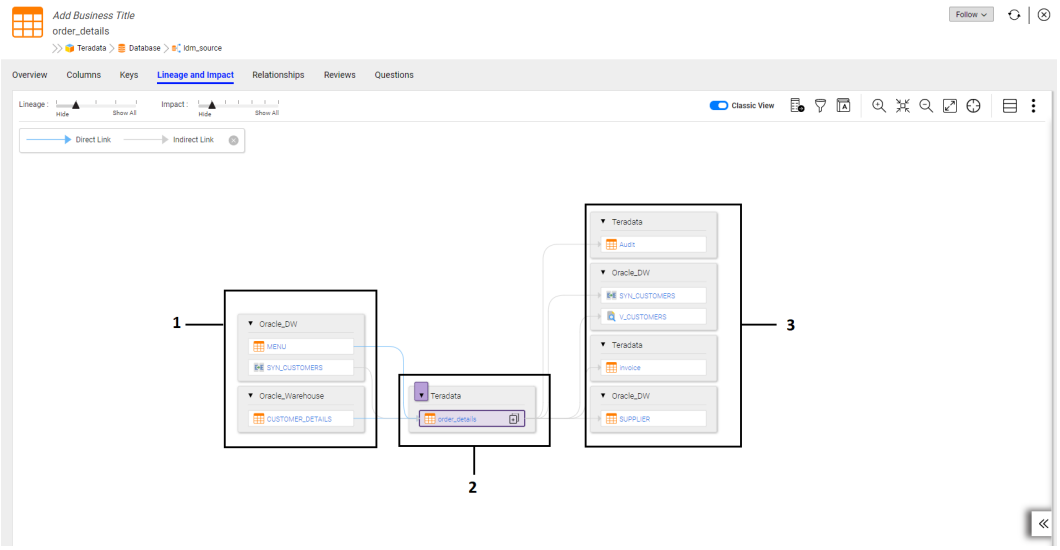

1. Origins
2. Seed asset
3. Destinations


The arrow between adjacent assets is called a link. A diagram can contain the following types of links:

- A direct link ( ) means that there are no other assets between the two assets. Direct links are marked with solid arrows.
- An indirect link ( ) means that the link contains intermediate assets. Indirect links are marked with dashed arrows.

  To view intermediate assets, use the **Lineage** and **Impact** sliders at the top of the diagram or click the plus sign (+) that appears when you hover over the link.

To get information about any asset in the diagram, hover over the asset name. When you hover over the name, Enterprise Data Catalog displays a tooltip that contains information about the asset such as asset type, resource name, resource type, and associated business term. To open the asset, click the asset name. You can use the **Lineage** and **Impact** sliders to display the intermediate assets that are upstream and downstream of the seed asset.

The following image shows the lineage and impact sliders:



You can perform the following tasks in the classic view (deprecated):

- Display the child assets for the seed asset.
- Display the intermediate assets that are upstream and downstream of the seed asset.
- Display transformation logic in the view.
- Display assets within a link.
- Display associated business terms in the view.
- Customize the view to zoom in and out of the diagram, fit the diagram to the window, pan the diagram, and show or hide the legend.

- Export the diagram and print the diagram.
- Filter the diagram.


If you want to set the classic view (deprecated) as the default view in the **Lineage and Impact** tab, configure the `LdmCustomOptions.lineageView` custom property for the Catalog Service and set the value as `classic` in Informatica Administrator.

The Compact View

When you open the Lineage and Impact tab for an asset, Enterprise Data Catalog displays the compact view by default. Use the compact view to understand the summarized lineage and impact information at the resource level. To enable the compact view in the Lineage and Impact tab, turn off the **Classic View** option.


The compact view displays the origins of the data, the seed asset, and the destinations for the data. The view, by default, displays the intermediate assets between an origin and the seed asset and between the seed asset and a destination. The assets in the compact view appear within their own resource box. Each resource box consists of data objects and data elements that participate as the origins of the data or the destinations for the data. If the assets in the origins and destinations belong to different resources, the assets appear in separate resource boxes. The seed asset appears within its own frame even if there are other assets in the data flow that are within the same resource.

The following image shows the sample resource box in the compact view:

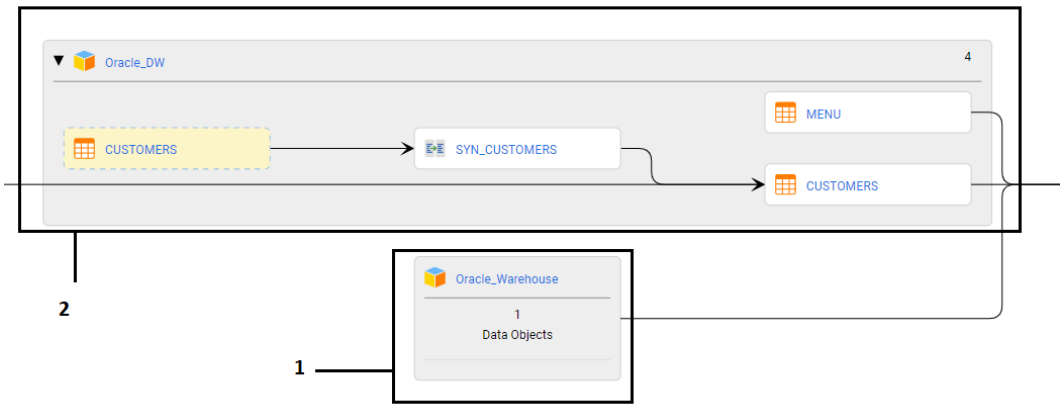


1. Resource box
2. Expanded resource box

You can click anywhere on the resource box to expand and view data objects and data elements within the box. You can also click the  icon to expand all the resource boxes and view data objects and elements in the compact view. The arrows between adjacent assets denote the direction of the data flow. You can click the asset names in the resource box to open the assets in the Overview tab. You can highlight the data flow path inside the resource box. Highlight the path to display the direction of the data flow from start to the end point. To highlight the data flow path, right-click the area next to the asset name in the rectangular box. An asset appears in yellow rectangular box if the asset is included in the data flow more than one time. For example, in the sample image below, the asset **CUSTOMER** is a seed asset, which is also repeating in the lineage and the impact side.

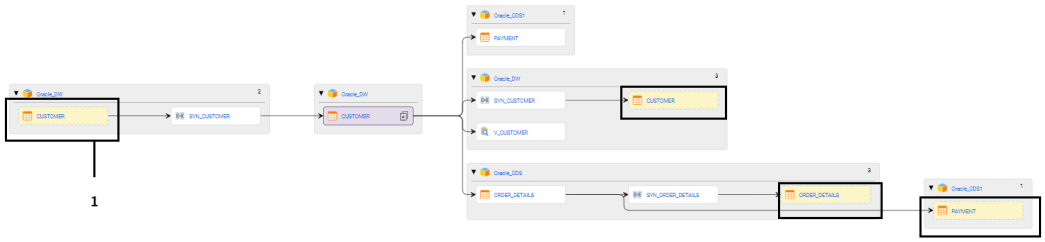


1. Repeated asset in the data flow.

The following image shows the highlighted path in the compact view:



1. Highlighted path in the data flow.

The following image shows the default compact view for a sample asset:

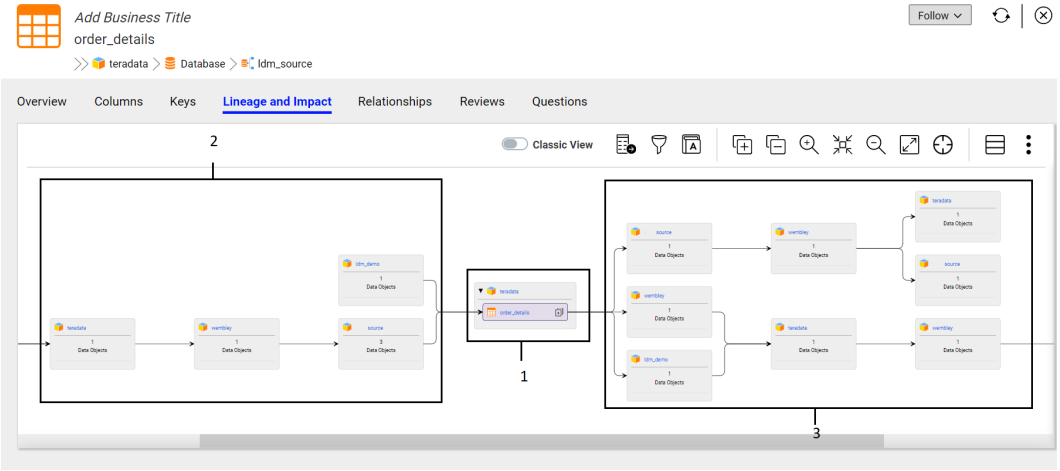

1. Seed asset
2. Origins
3. Destinations

You can perform the following tasks in the compact view:

- Display the child assets for the seed asset.
- Display associated business terms in the compact view.
- Display transformation logic in the compact view.
- Display the total inward and outward hop count for the asset with the **Show Legend** option. Regardless of the filters you apply, the hop count details remain the same in the compact view.
- Customize the view to zoom in and out of the diagram, fit the diagram to the window, and pan the diagram.
- Export the diagram and print the diagram.
- Filter the diagram.

Regardless of the filters you apply, Hop count details remain unchangedHop

The Asset Summary View

The asset summary view contains tables that lists all of the assets that affect and are affected by the seed asset.

To open the asset summary from the lineage and impact diagram, click the **Asset Summary View** icon ( ) at the top of the diagram. The asset summary lists the tables and data structures that affect and are affected by the seed asset. The asset summary lists table and file asset types.


The assets in the asset summary view might not match the assets displayed in the lineage and impact diagram. For example, the default diagram view for any asset shows the origins, seed asset, and destinations. However, the default asset summary lists all assets in the data flow.

The asset summary view contains the Asset Lineage Summary, Asset Impact Summary, and Asset Control Summary tabs.

- The **Asset Lineage Summary** tab lists all assets in the data flow from the origins to the seed asset. These assets impact the seed asset.
- The **Asset Impact Summary** tab lists all assets in the data flow from the seed asset to the destinations. These assets are impacted by the seed asset.
- The **Asset Control Summary** tab lists all assets that control the seed asset or are controlled by the seed asset in the data flow.

The columns on the tabs display information about the assets, such as asset name, asset type, resource name, control type, and associated business terms. You can filter the assets listed on the tabs by asset type, resource name, and resource type. You can also export the asset summary information to a Microsoft Excel file.

The following image shows the asset summary for a relational table:

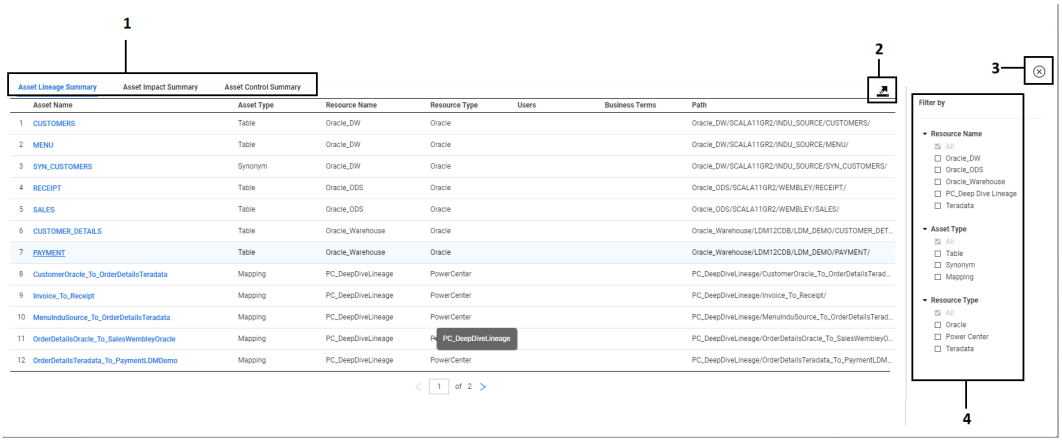


1. Asset Lineage Summary, Asset Impact Summary, and Asset Control Summary tabs.
2. Export icon. Exports the asset summary to a Microsoft Excel file.
3. Close icon. Closes the asset summary view and returns to the diagram view.
4. Filter panel. Filters the assets listed on the tab.

Asset Lineage Summary

The **Asset Lineage Summary** tab lists all the assets in the data flow from the origins to the seed asset. The summary view also lists mapping assets if the seed asset is part of the mappings as the target.

The following image shows the sample **Asset Lineage Summary** tab:

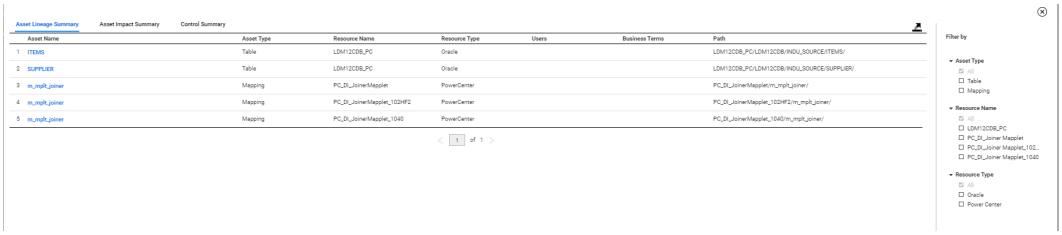

Asset Impact Summary

The **Asset Impact Summary** tab lists all assets in the data flow from the seed asset to the destinations. The seed asset impacts the assets in the destination. The summary view also lists mapping assets if the seed asset is part of the mappings as the target.

The following image shows the sample **Asset Impact Summary** tab:



Asset Control Summary

A control flow places constraints or conditions on the flow of data. For example, a SQL query can contain constraints in the WHERE clause, or mappings can contains transformations with conditions or constraints. View the control flow assets in the **Asset Control Summary** tab for table and file asset types. The assets that you view in the **Asset Control Summary** are assets that are used in a SQL query with clauses or mappings with transformations.

The **Asset Control Summary** tab displays all the assets that control the seed asset in the data flow, and assets that the seed asset controls. If assets control the seed asset in the data flow, the seed asset is one of the target assets in the data flow. If the seed asset controls assets in the data flow, the seed asset is one of the source assets in the data flow.

For assets that control the seed asset, the **Asset Control Summary** tab displays **Controlling** as the control type. For assets that the seed asset controls, the summary displays **Controlled** as the control type.

You can view control flow assets on both Lineage and Impact sides of the diagram. The assets that appear on the lineage side of the Lineage and Impact view are assets that are controlling the seed asset, and the assets that appear on the impact side of the view are assets that are controlled by the seed asset.

The asset names that appear in the **Asset Control Summary** need not necessarily appear in the Lineage and Impact view. If the control flow assets do not appear in the Lineage and Impact view, the assets are indirectly linked as source or target assets to the seed asset.

Example

A developer in your organization is the data owner for the **EmployeeDetails** relational table. He wants to make changes to the columns in the table. Before that, he wants to view the list of assets that are directly or indirectly controlling the **EmployeeDetails** table so that he can inform the owners of those assets. He then opens the **EmployeeDetails** table in the Lineage and Impact view, and sees that the table **EmployeeDetails** has **EmployeeNames** and **EmployeeID** tables on the lineage side of the view. Now, he wants to know the other assets that are indirectly controlling the **EmployeeDetails** table. He then opens the **Asset Control Summary** tab and discovers that **SelectedDepartment** and **Employee** tables are indirectly controlling the **EmployeeDetails** table.

The tables **SelectedDepartment** and **Employee** appear in the **Asset Control Summary** tab because a mapping includes the seed asset **EmployeeDetails** as the target, and the mapping contains the following SQL Override with a condition that affects the seed asset:

```
SELECT EMPLOYEE.EMPID, EMPLOYEE.DEPID, EMPLOYEE.EMPNAME FROM EMPLOYEE, SELECTEDDEPARTMENT
WHERE EMPLOYEE.DEPID = SELECTEDDEPARTMENT.DEPID
```

The following image shows the sample **Asset Control Summary** tab:



Information in the Asset Summary

The columns on the **Asset Lineage Summary**, **Asset Impact Summary**, and **Asset Control Summary** tabs display information about the assets in the data flow.

The following table describes the information in each column in the **Asset Lineage Summary**, **Asset Impact Summary**, and **Asset Control Summary** tabs:

Column	Description
Asset name	Name of the asset.
Asset type	Asset type. For example, table, workbook, or report.
Resource name	Name of the resource that contains the asset.
Resource type	Type of resource that contains the asset. For example, Oracle or PowerCenter.
Control type	Applies to the **Asset Control Summary** tab. Specifies whether the seed asset is controlled by other assets or seed asset is controlling other assets in the data flow.
Users	Users that are associated with the asset. Click a user name to display information about the user, such as department and email address.
Business terms	Business glossary term or Informatica Axon glossary that is associated with the asset. Hover the mouse over the business term to view the path of the business term.
Path	Path of the asset from its parent. For example, the path for a table might be <resource name>/<database>/<schema>/<table>.

Note: If the cells in a column contain long text strings, hover over the cell to display the tooltip. The tooltip displays the entire string.

You can perform the following actions with the columns in the asset summary:

Hide a column

To hide a column, right-click the title bar, and clear the column that you want to hide.

Rearrange the order of columns

To rearrange the order, click a column name and drag the column to a different location.

Lineage and Impact Tasks

You can perform several tasks in the Lineage and Impact tab, such as customize the view, display child assets for the seed asset, display the intermediate assets that are upstream and downstream of the seed asset, display the intermediate assets within any indirect link, display business terms in the view, and display the transformation logic for assets in the view.

Customizing the Diagram and Compact View

You can customize the diagram and compact view to zoom and pan the diagram, and open the asset summary view. Customize the view through the controls at the top of the view and the configuration panel. You can also pan the view by clicking and dragging the diagram.

The following table describes the controls that you can use to customize the view:

Control	Description
Zoom controls	Zoom in, zoom out, select the zoom percentage, view actual size, or fit the diagram to the window. You can also use the scroll wheel on your pointing device to zoom in and out.
Center control	Reposition the diagram so that the seed asset is in the center.
Asset summary view	Open the lineage, impact, and control summary tabs.
Menu	Print the diagram, export the diagram, and show or hide the legend.
<< or **>>**	Open or close the configuration panel. Use the configuration panel to view the links that you expanded, to display or hide business glossary terms, and to pan the diagram. To pan the diagram, drag the blue rectangle over a different part of the mini map.
Find text box	Search for specific assets or objects in the lineage diagram using the Find text box.


Displaying Child Assets

You can display the child assets for the seed asset in a lineage and impact diagram and compact view. When you display the child assets, the view shows the children of other assets that affect and are affected by the child assets that you selected.

You can display child assets for data structures such as relational tables, database queries, and business intelligence workbooks and reports. Columns and fields do not have child assets.


When you display child assets, you can display all child assets or select specific child assets to display. If the child assets that you select are within other data structures, the diagram displays the child assets within the data structures that contain them. For example, if the seed asset is an Oracle Business Intelligence Enterprise Edition report, and you select a report field, the diagram displays the field within the report page.

The following image shows the sample diagram view for a relational table with some child columns displayed:

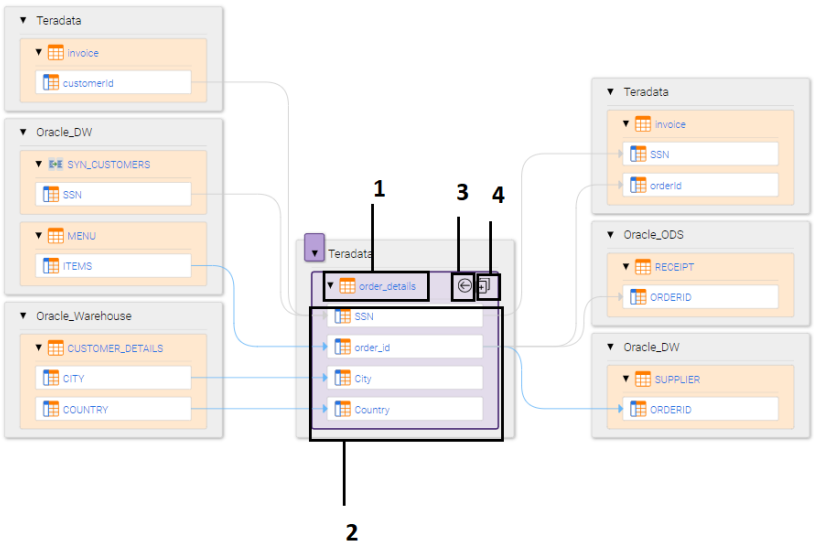

1. Seed asset
2. Child assets
3. Reset icon. Hides all child assets in the seed asset.
4. Drill down icon. Allows you to select the child assets to display in the diagram.

The following image shows the sample compact view for a relational table with some child columns displayed:

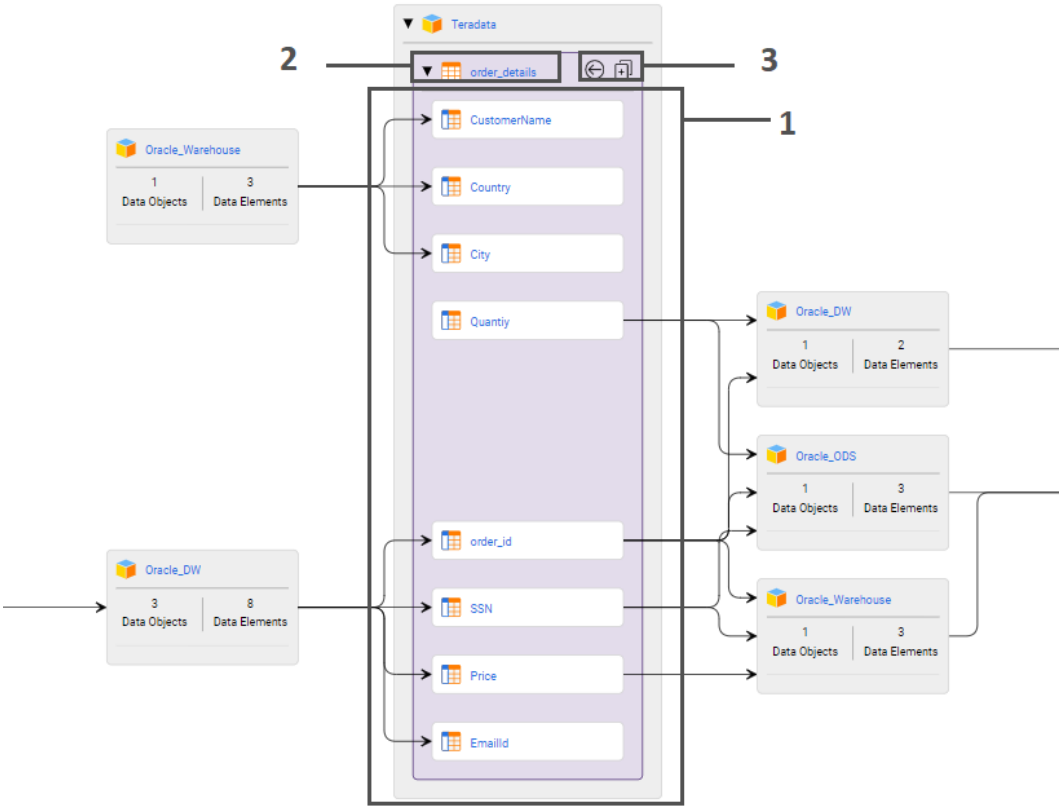

1. Child assets
2. Seed asset
3. Reset icon and Drill down icon.

To display child assets:

1. Click the drill down icon ( ) in the upper right corner of the seed asset.
2. In the **Drill Down** dialog box, select the child assets that you want to display.

   To search for a child asset, enter the first few characters of the asset name or the business title in the **Find** field. To select all child assets, check the check box next to the **Name** column.
3. Click **OK**.


   The lineage and impact diagram displays the child assets that you select and the assets to which the child assets are linked.

To hide all child assets, click the reset icon ( ).

Displaying Upstream and Downstream Assets

You can display the intermediate assets that are upstream and downstream of the seed asset. To display the intermediate assets, use the **Lineage** and **Impact** sliders.

The following image shows the **Lineage** and **Impact** sliders:



When the sliders are at the first position to the right of the **Hide** position, the diagram displays the origins, seed asset, and destinations. To display additional upstream assets, move the **Lineage** slider to the right. To display additional downstream assets, move the **Impact** slider to the right.

The sliders display additional assets by distance from the seed asset. A hop indicates the distance of an asset from the seed asset. For example, the complete data flow for asset D is A -> B -> C -> **D** -> E -> F -> G. Assets C and E are one hop from asset D. Assets B and F are two hops from asset D.

The number of positions on the sliders varies based on the number of hops as follows:

- If a diagram has 10 or fewer hops, each slider position represents one hop. If you move the **Lineage** slider one position to the right, the diagram displays the assets in the next upstream hop.
- If a diagram has more than 10 hops, each slider position represents multiple hops. For example, in a diagram with 100 hops, each slider position represents 10 hops. If you move the **Impact** slider two positions to the right, the diagram displays the assets in the first 20 downstream hops.


To fully expand the diagram, move the **Lineage** and **Impact** sliders to the **Show All** positions.

To hide all upstream assets, move the **Lineage** slider to the **Hide** position. To hide all downstream assets, move the **Impact** slider to the **Hide** position.

Displaying Upstream and Downstream Asset Examples


Use the **Lineage** and **Impact** sliders to display intermediate assets in the diagram view.

The following image shows the sample diagram view for a relational column:

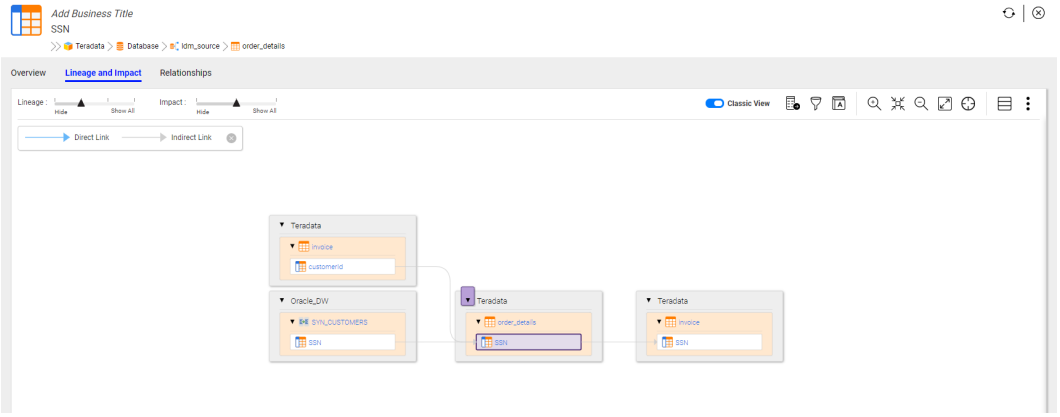


When you move the **Impact** slider two positions to the right, the diagram displays the first and second downstream hops.

The following image shows the diagram with the first and second downstream hops displayed:

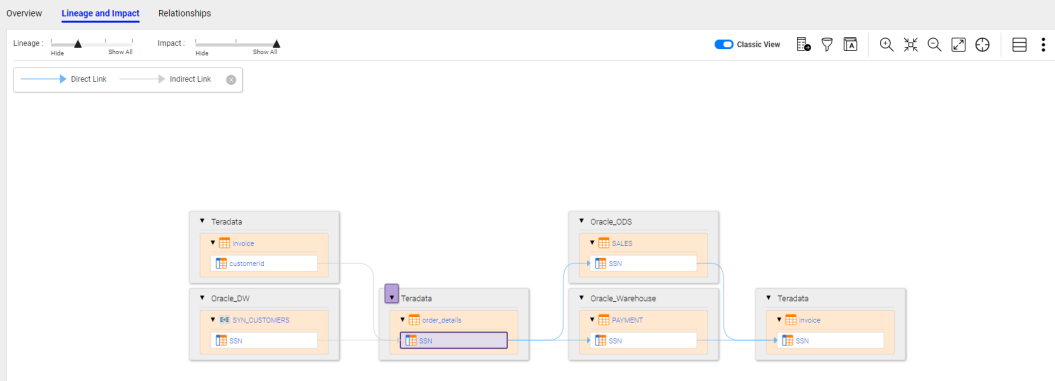


When you move the **Lineage** slider one position to the right and the **Impact** slider to the **Hide** position, the diagram displays the asset in the first upstream hop and hides all downstream assets.

The following image shows the diagram with the first upstream hop displayed and the downstream assets hidden:

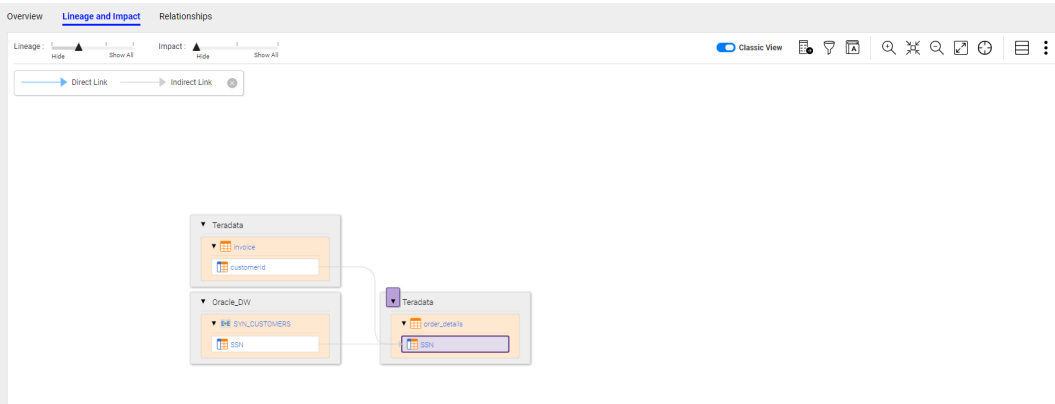

When you move both sliders to the **Show All** positions, the diagram is fully expanded.

The following image shows the fully expanded diagram:

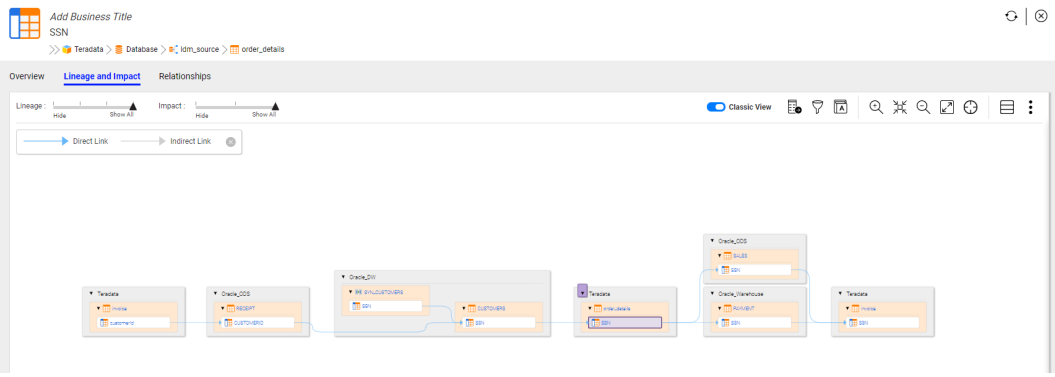


Displaying Assets within a Link

You can display the intermediate assets within any indirect link. Indirect links are represented by dashed lines. To display the assets within an indirect link, hover over the link and click the plus sign (+) that appears.

When you click **+**, the link expands and displays all of the intermediate assets within the link.

The following image shows an expanded link between two relational tables:

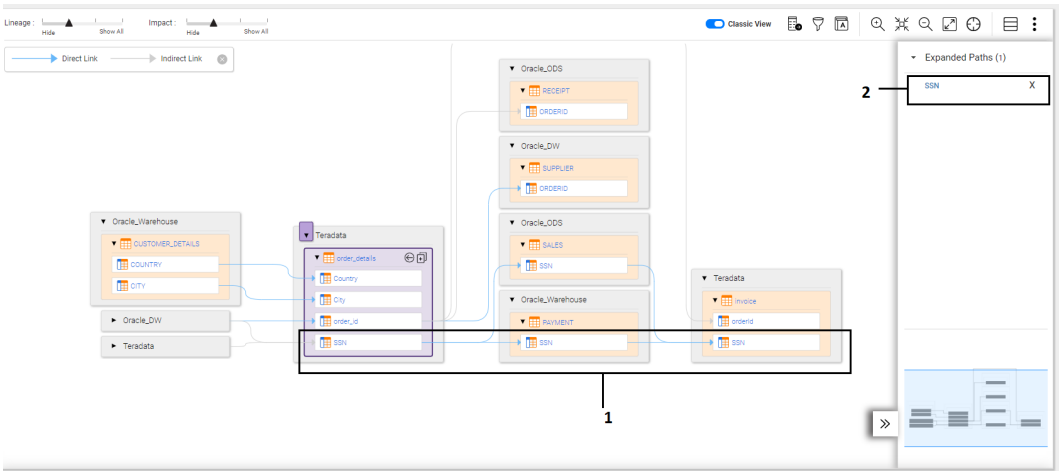

1. The link between the seed and the destination asset is expanded to show an intermediate asset.
2. In the configuration panel, the **Expanded Paths** list shows the expanded links. To collapse a link, click **X**.

To view a list of the expanded links, click **<<** to open the configuration panel. Each link that you expand is listed in the **Expanded Paths** list.

In the **Expanded Paths** list, the expanded links are named as follows:

- If you expand a link that is upstream of the seed asset, the expanded link is named for the upstream asset. For example, if you expand the link between origin asset "BUDGET" and seed asset "costfact," the **Expanded Paths** list shows "BUDGET" as an expanded link.
- If you expand a link that is downstream of the seed asset, the expanded link is named for the downstream asset. For example, if you expand the link between seed asset "costfact" and downstream asset "CostRatioReport," the **Expanded Paths** list shows "CostRatioReport" as an expanded link.

You can collapse any expanded link from the **Expanded Paths** list in the configuration panel. To collapse an expanded link, click **X** next to the link that you want to collapse.

Displaying Business Terms

You can display business terms in a lineage and impact diagram and compact view. Display business terms when assets in the diagram or compact view have names that are cryptic or difficult to understand. Use the configuration panel to display and hide business terms.

To display business terms:

1. Click **<<** in the lower right corner of the view to open the configuration panel.
2. Enable the **Show Business Terms** option.

   The view shows the business terms for all assets that have associated business terms.

To hide business terms, disable the **Show Business Terms** option.

Displaying Transformation Logic for Assets

You can display the transformation logic for assets in the diagram and compact view. A transformation is a repository object that generates, modifies, or passes data from source to target connections.

You can choose to display the transformation logic for assets that contain transformations in the diagram and compact view.

When you click the transformation logic button ( ) in the diagram or compact view, the view displays transformation icons on the assets that contain transformations. Assets that display transformation icons in the view are target assets in the transformation logic view. The view displays transformation logic for resource types, such as PowerCenter, Informatica Cloud Services, Informatica Platform, and Cloudera Navigator.


The transformation icon for PowerCenter and Informatica Cloud Services resource types indicate that a mapping exists between source assets and target assets. A mapping is a set of inputs and outputs that represent the data flow between sources and targets. A mapping contains components such as source objects, target objects, and transformations. The transformation icon for Cloudera Navigator resource type indicates that a data flow relation type exists between source assets and target assets.

Transformation logic view displays all the mappings or data flow relation types between the source assets and target assets for the resource type that you select. The transformation logic view, by default, displays the source assets, transformations, and target assets. The view also displays the properties panel to view details about assets in a mapping or data flow relation type.

If an asset contains multiple transformation logic between the source assets and target assets, the view displays a drop-down menu when you hover over the transformation icon. The drop-down menu lists all the resource types that contain transformation logic. You can select a resource from the drop-down menu for which you want to view the transformation logic.

The transformation view displays transformation logic for data structures, such as tables and columns. The view displays various types of transformations, such as filter, joiner, lookup, expression, sorter, union, and aggregate.

The following image shows a sample transformation logic for a relational table in the diagram view:

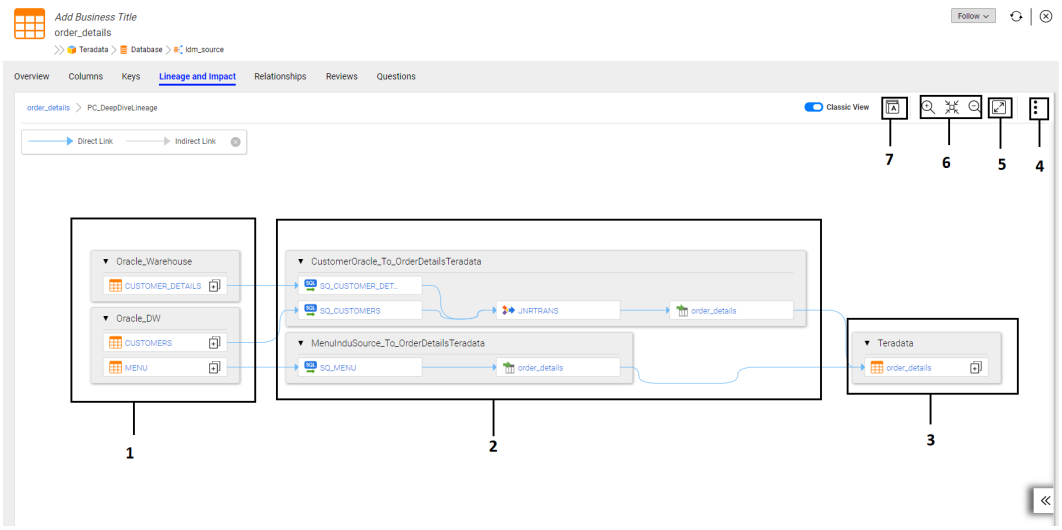

1. Source asset
2. Transformation logic
3. Target asset
4. Menu
5. Fit to window
6. Zoom controls
7. Show business terms

Example

Mike, a developer in your organization needs to find out how a field named Cost_Ratio in a Tableau report is derived using transformations. The developer searches for Cost_Ratio in the catalog and opens the diagram view for the asset. The diagram view displays different tables that contribute to the asset. To analyze the asset further, in the diagram view, he chooses to display transformation icons and opens the asset Cost_Ratio, which contains a transformation. He then finds out that the asset is derived using a PowerCenter transformation.

Transformation Logic View Tasks

You can enable the transformation logic in the diagram view, expand a table, view the table and column level transformation, and view the properties panel. Before you choose to display transformation logic in Enterprise Data Catalog, you must make sure that you have configured transformation logic for resource types such as Powercenter, Cloudera Navigator, and Informatica Cloud Services in Catalog Administrator.

You can perform the following transformation logic view tasks:

View Transformation in the Diagram View

In the diagram view, you can choose to display transformation logic for assets that contain transformations.

To view the transformation logic in the diagram view, click the transformation logic button () at the upper right corner of the view.

When you enable transformations, the view displays transformation icons () next to the asset names indicating that there are mappings or data flow relation types between the source assets and target assets.

To go back to the diagram view, click the asset name link at the upper left corner of the transformation logic view.

Note: The diagram view does not display transformation icons next to the asset names if assets do not contain transformations.

Drill Down on a Table in the Transformation Logic View

You can drill down on a table if you want to select and display fields in the transformation logic view. When you drill down on the table, the transformation logic view displays source fields, ports in the mapping, and target fields. Perform the following steps to expand a table in the transformation logic view:

1. Click the () drill down icon next to the table name in the transformation logic view. The **Select** window appears.
2. In the **Select** window, select the fields you want to display in the transformation logic view.
3. Click **OK**. The transformation logic view then displays the source fields, mapping with ports, and target fields for the selected fields.
4. To go back to the table-level transformation, click the back icon button at the upper right corner of the transformation logic view.

View the Properties Panel in the Transformation Logic View

You can view the properties panel in the transformation logic view. The properties panel displays general details of assets in a mapping such as the name of the resource, type of the resource, and last modification date of the resource. The asset information that you view depends on the type of mapping you see in the transformation logic view.

To view the properties panel in the transformation logic view, hover over the asset name in the mapping and click the asset name.

You can download the property details to a flat file (.txt) file. To download the property details, click the download icon ( ) at the upper right corner of the properties panel.

View the Table-Level Transformation

When you display the table-level transformation, the transformation logic view by default displays the source table, mappings, and the target table. The mapping includes transformations, source qualifier, and target transformation. You can expand the source table or target table to view fields and ports in the transformation logic view.

View the Field-Level Transformation

When you display the field-level transformation, the transformation logic view by default displays the source fields, mapping, and target fields. The mapping includes transformation ports, source qualifier ports, and target transformation ports.

To view transformation at the field level, you must expand the table and select fields you want to view in the transformation logic view. Alternatively, you can open a field in the diagram view and then enable transformation to view if the field contains transformation logic.

Customizing the Transformation View

You can customize the transformation diagram to zoom in and out of the diagram, undo the changes, fit the diagram to the window, pan the diagram, export the diagram, print the diagram, and show or hide the legend.

Customize the view using the controls at the top of the diagram and the configuration panel. You can also pan the diagram by clicking and dragging the diagram.

The following table describes the controls that you can use to adjust the view:

Control	Description
Zoom	Zoom in and out of the transformation view.
Undo	Undo the changes.
Fit to window	Fit the diagram to the window.
	Print the diagram, export the diagram, and show or hide the legend.
<<, >>	Open or close the configuration panel. Use the configuration panel to pan the diagram. To pan the diagram, drag the blue rectangle over a different part of the mini map.

Viewing the Context Information

You can use Enterprise Data Catalog to view the context information associated with a process definition, or a mapping execution. A process definition refers to parameters that define the data flow of multiple source and target assets. The process definition types include stored procedure or mapping definitions. You can view context information for assets on the Lineage and Impact tab. Enterprise Data Catalog extracts the

context information associated with lineage for assets from custom resources that you create in Catalog Administrator.

View context information to determine where a process definition is used in the data flow that includes multiple source and target assets. The dataflow of an asset can include multiple execution instances for the same set of sources or targets. Each execution instance represents a context. For example, when you run a resource that includes a mapping definition with multiple mapping instances created using a parameter file, the mapping definition generates different lineage and impact information based on the specified parameter file. In this example, context refers to specified mapping instance.


Example

You are a developer in an organization and you know that a relational table is associated with a process definition. The process definition includes multiple source and target assets from different context executions. You want to view the lineage and impact information of the process definition so that you can view all the source and target assets that the process definition includes in each of its context execution. To achieve this goal, in Catalog Administrator, you load the process definition and related execution instances into Enterprise Data Catalog. After you load the process definition related information, you then open the process definition on the Overview tab and then select a specific context to view the process definition information based on the context on the Lineage and Impact tab.

To open the process definition asset and the related context or execution instances, type the process definition name in the search box, and then click the process definition name link on the search results page. Alternatively, perform the following steps:

1. Open the asset that includes a process definition on the **Lineage and Impact** tab, and then click the transformation logic button ( ) to view the transformation icon. The transformation icon on the asset indicates that there is a process definition between the source and target assets.
2. To open the process definition on the **Overview** tab, click the number icon that appears next to the process definition name. The number icon indicates that the process definition includes multiple context executions.

The following image displays the sample Lineage and Impact view that includes context information:

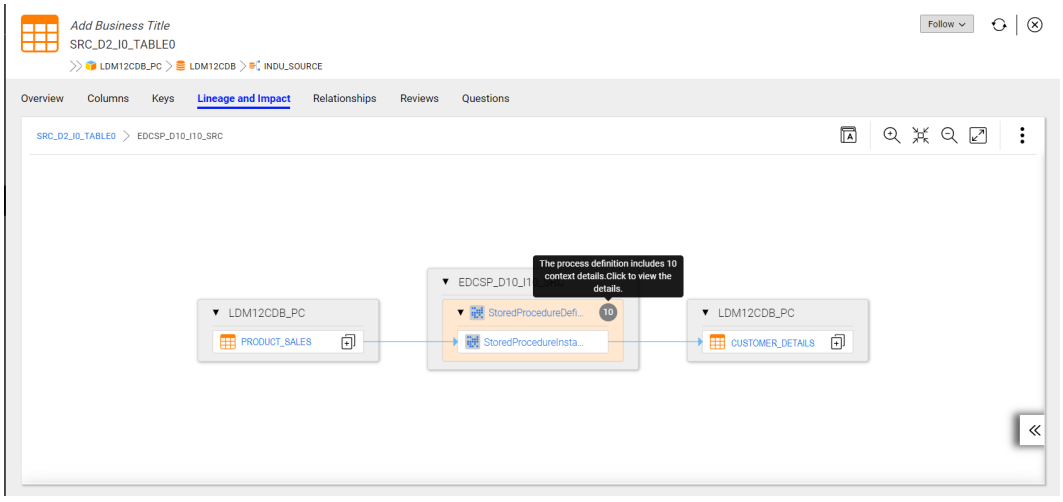


Viewing the context information on the process definition Overview tab

When you open the process definition **Overview** tab, the tab displays different contexts that are associated with the process definition in the **Context** section.

The **Context** section displays the details, such as the name of the context, source and target assets that the process definition includes in a particular context, and the type of the source and target assets. The

context name is based on the context ID that you define in the `objects.csv` file. Each context in the process definition is associated with different source and target assets.

The following image shows a sample **Context** section from the process definition **Overview** tab:

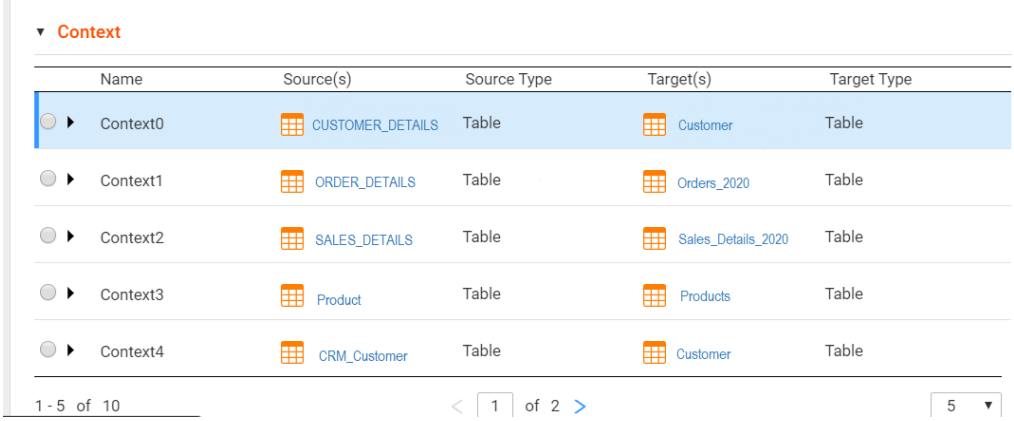


Viewing the lineage and impact information of the process definition based on a specific context

To view the lineage and impact information of the process definition based on a context, select a specific context that you want to view from the **Context** section, and then click **Lineage and Impact**. You can select and open one context at a time.

When you open the process definition on the **Lineage and Impact** tab, the tab displays all the source and target assets that the process definition includes for a specific context that you selected.

To view the process definition with a different context on the **Lineage and Impact** tab, click the **Choose another context** link and select the context from the **Context** section, and then click **Lineage and Impact**.

The following image shows a sample Lineage and Impact view for a context from the process definition **Overview** tab:

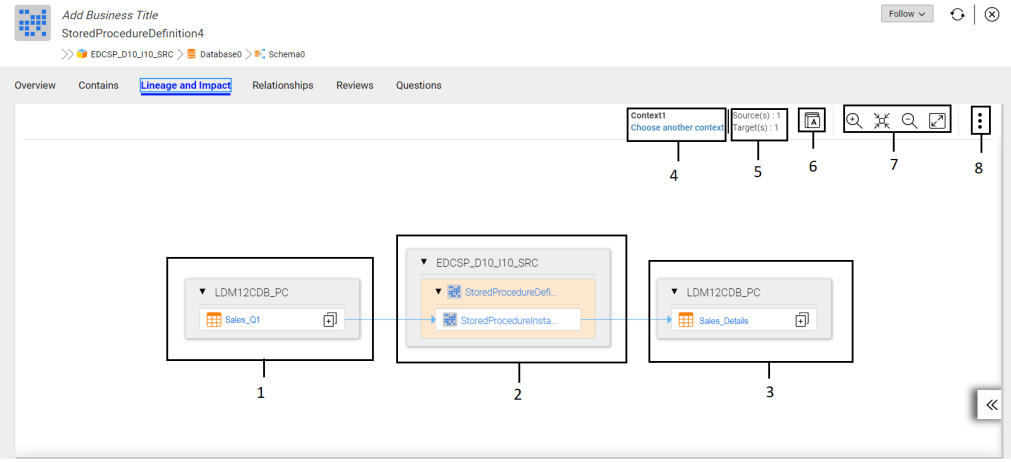

1. Source assets associated with process instances
2. Process instance
3. Target assets associated with process instances
4. Name of the context that is open and the link to select another context
5. Number of sources and targets in the view

6. Show associated business term
7. Customize the view with zoom controls
8. Export or print the view

For information about configuring a custom resource to extract context lineage information, see the Context Lineage Support for Custom Resources topic in the *Informatica Catalog Administrator* guide.

Filtering the Diagram and Compact View

You can create and apply filters to the diagram and compact view. Use filters to narrow down the results in the view. Create customized filters using different combinations of filter options based on the asset types available in the view.

Create a filter based on the **Asset Type**, **Relationship**, **Direction**, **Custom or OOTB Attribute**, **Object Name**, and **Parent Name** filter options.

You can view the inward and outward hop count of the asset in the Hop details section of the **Direction** filter option.

As part of filtering the results, you can hide the assets at different points in the lineage and impact diagram or compact view. You can hide assets while retaining their links to other assets, hide both assets and their links to other assets, and hide assets at the leaf nodes of the diagram. A leaf node represents an asset that is at the end of either side of the origins and destinations.

When you apply a filter to diagram or compact view, the view hides specific asset types on both Lineage and Impact sides. The filter that you apply to the diagram or compact view does not affect the seed asset.

You can save the filter criteria and use the saved filter setting on any diagram or compact view in the Catalog. You can also create and apply a default filter to all the diagram or compact views across the Catalog. A user who has access to the Catalog can create and apply filters. A user with administrative privileges can create and apply a filter as the default filter to all the diagram or compact views in the Catalog.

You can also delete filters that you no longer use or edit filters. When you delete a filter, the Catalog removes the filter setting that you have applied on the Lineage and Impact view. You cannot delete a default filter unless you have the administrative privileges assigned to you.

Example

Consider a report called **Sales_distribution** that has multiple assets, such as tables, files, and fields contributing to the Lineage and Impact view. As an analyst, you want to identify only the fields that contribute to the diagram or compact view so that you can use the fields for a new report that you want to build. To achieve this goal, you can open the **Sales_distribution** report in the **Lineage and Impact** view and use the **Hide assets and retain their links** option in the **Asset Type** tab to hide all the asset types except the field assets.

Lineage and Impact Filter Options

You can apply filters to the diagram or compact view in the Lineage and Impact tab based on the following filter options:

Asset Type

You can filter the diagram or compact view based on asset types, such as views, tables, synonyms, and reports using the **Asset Type** filter. When you hover over an asset type, you can view the model type of the filter in the compact view.


Additionally, you can use the following options to hide specific assets in the diagram or compact view:

- Hide assets and retain their links
- Hide assets and their links
- Hide assets at leaf nodes

Hide assets and retain their links


The diagram or compact view hides specific assets that you select and displays the asset links without disrupting the data flow between the assets. For example, consider that you have opened a table in the diagram or compact view. You see that the view includes multiple asset types, such as views, tables, synonyms, and reports, participating in the data flow. You want to narrow down the results in the view to hide a few asset types and retain the asset links. To achieve this, you can create a filter with **Hide assets and retain their links** filter option and apply the filter to the view. After you apply the filter, the Catalog hides the asset types that you selected and displays the other assets in the diagram or compact view.

The following image shows the comparison between the diagram views:

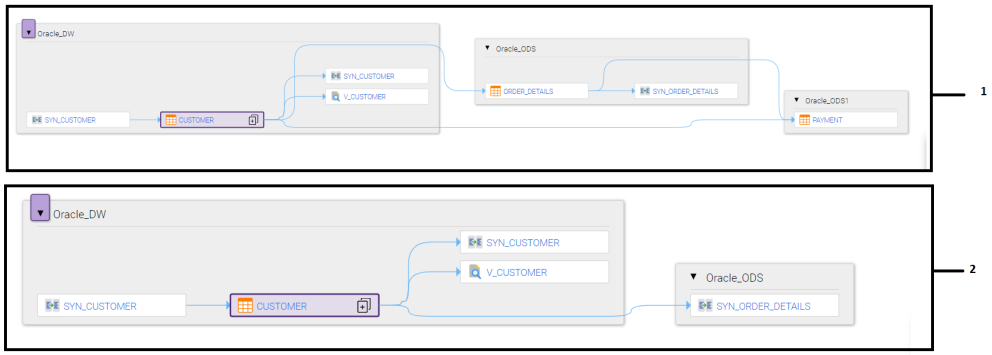

1. Expanded diagram view
2. Diagram view after you apply the **Hide assets and retain links** filter option to the table asset.

The following image shows the comparison between the compact views:

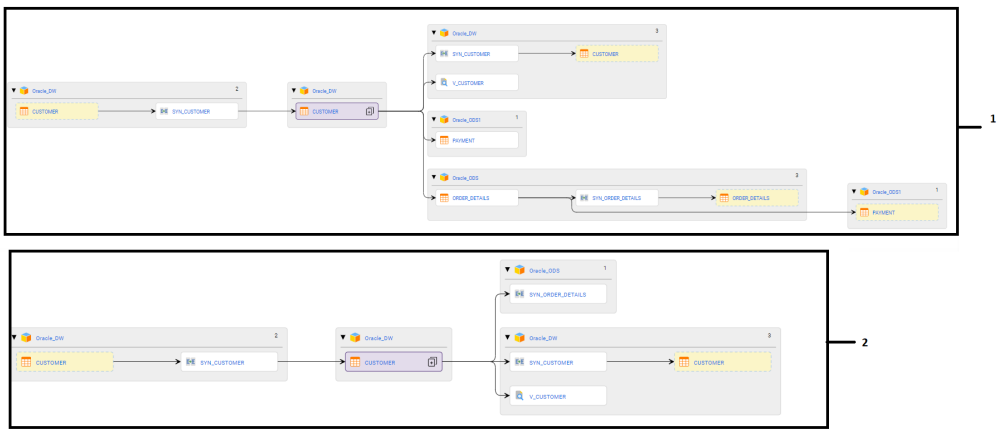


1. Expanded compact view
2. Compact view after you apply the **Hide assets and retain links** filter option to the table asset.

Hide assets and their links


The diagram or compact view hides specific assets that you select, and removes the assets and links that appear following the selected assets in the data flow. For example, consider that you have opened a table named **customer** in the view. On the impact side, the view displays a table asset called **order_details** linked to a synonym asset called **syn_order_details** and table asset called **payment**. When you create a filter with **Hide assets and their links** filter option to hide the table asset **order_details** in the view, the view hides the **order_details** asset and removes its linked assets **syn_order_details** and **payment** from the data flow.

The following image shows the comparison between the diagram views:

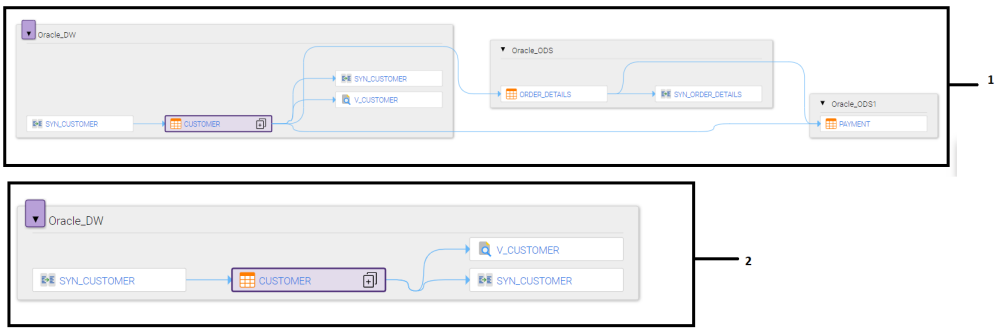

1. Expanded diagram view
2. Diagram view after you apply the **Hide assets and their links** filter option to the table asset.

The following image shows the comparison between the compact views:

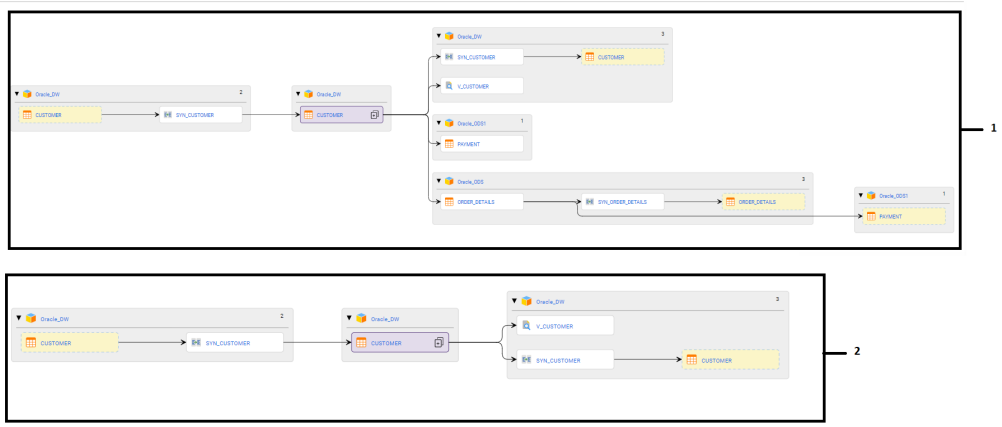


1. Expanded compact view
2. Compact view after you apply the **Hide assets and their links** filter option to the table asset.

Hide assets at leaf nodes


The diagram or compact view hides assets that participate as the endpoints in the view. A leaf node represents an asset that is at the end of either side of the view. The leaf node asset has a single link that connects to the other assets in the view. For example, consider that you have opened a table named **customer** in the diagram or compact view. On the lineage side, the view displays a leaf node called **syn_customer**, and on the impact side, the view displays a leaf node called **Payment**. When you create a filter with **Hide assets at leaf nodes** filter option to hide the table assets that are leaf nodes in the diagram or compact view. The view hides the **Payment** table asset type from the data flow.

The following image shows the comparison between the diagram views:

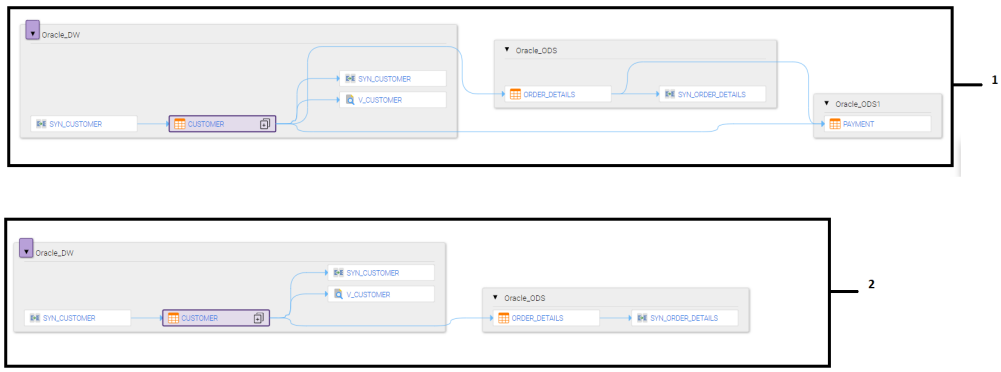

1. Expanded diagram view
2. Diagram view after you apply the **Hide assets at leaf nodes** filter option to the table asset.

The following image shows the comparison between the compact views:

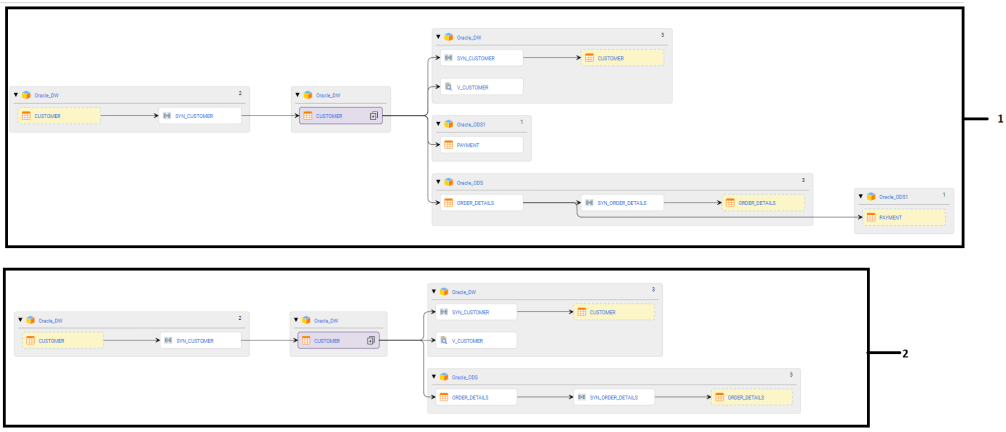

1. Expanded compact view
2. Compact view after you apply the **Hide assets at leaf nodes** filter option to the table asset.

   Note: The filter changes do not apply on assets if the seed asset is repeated either on the lineage or impact side.

Relationship

The diagram or compact view includes assets and the data flow between the assets. You can configure the type of data flow between the assets in the diagram or compact view by using the **Relationship** filter. By default, you can view the value flow between the assets. The value flow is displayed as a direct link ( ) between the assets. The control flow is displayed as a dotted link ( ) between the assets in the lineage diagram.

Direction

The diagram or compact view includes multiple asset types, such as views, tables, synonyms, and reports, participating in the data flow. You can configure the direction of the data flow between assets in the diagram or compact view by using the **Direction** filter. By default, you can view the inflow and outflow of data for an asset.

You can limit the number of hops to view in the lineage diagram in the upstream or downstream of assets. You can also select the **Display complete lineage** option to view the complete lineage in the lineage diagram.

Object Name

You can filter assets based on the object names. You can add multiple objects as filters on the assets.

Note: You cannot include multiple objects with the same name.

You can use one of the following options to apply the filter on assets without disrupting the data flow between the assets:

- Apply filter on assets and links
- Apply filter on assets but retain links

To include objects that match the filter in the lineage, you must clear the checkbox for the **Exclude objects with associated values** option, which is enabled by default.

Custom or OOTB Attribute

You can filter assets based on the custom or OOTB attributes assigned to the assets. You can add multiple custom or OOTB attributes as filters on the assets.

You can use one of the following options to apply the filter on assets without disrupting the data flow between the assets:

- Apply filter on assets and links
- Apply filter on assets but retain links

To include objects that match the filter in the lineage, you must clear the checkbox for the **Exclude objects with associated values** option, which is enabled by default.

Parent Name

You can filter assets based on the parent names. You can add multiple parent names as filters on the assets.

Note: You cannot include multiple parents with the same name.

You can use one of the following options to apply the filter on assets without disrupting the data flow between the assets:

- Apply filter on assets and links
- Apply filter on assets but retain links

To include objects that match the filter in the lineage, you must clear the checkbox for the **Exclude objects with associated values** option, which is enabled by default.

Creating Lineage and Impact Filters

Create a filter to narrow down the results in the diagram or compact view of the Lineage and Impact tab. Create and save a customized filter so that you can frequently apply the saved filter to any diagram or compact view in the Catalog. All users with permissions and privileges to use Enterprise Data Catalog can create filters. A user with administrative permissions and privileges can create and mark a filter as default for all the diagram or compact views across the Catalog.

1. Open an asset in the **Lineage and Impact** tab.
2. Click the  icon in the upper right corner of the **Lineage and Impact** tab.

   The **Apply Filter** dialog box appears.

3. In the **New** tab of the **Apply Filter** dialog box, select the asset types to which you want to apply the filter.
4. Select the filter options that you want to apply to the diagram or compact view.
5. In the **Name** field, enter a name for the filter if you want to reuse the filter settings on another diagram or compact view later. If you do not save the filter, the filter settings are applied to the current diagram or compact view.
   - Alternatively, if you have administrative permissions and privileges, you can check the **Set this filter as default** option to make a filter as the default filter.
6. Click **OK**.

   Enterprise Data Catalog saves the filter, and the filter appears in the **Saved** tab of the **Apply Filter** dialog box.

Editing Lineage and Impact Filters

After you create a filter, you might want to edit the filter to change the name of the filter, and select or clear filter options in the filter. After you edit a filter to change the filter options, the edited filter is applied to the diagram or compact view.

1. In the **Saved** tab of the **Apply Filter** dialog box, select the filter that you want to edit.
2. Click the edit icon.

   The filter opens in the **New** tab.
3. In the **New** tab, edit the filter name or the filter options based on your requirements.
4. Click **Save**.

Applying Lineage and Impact Filters

You can instantly apply a filter, or you can apply a saved filter to the diagram or compact view. If you have administrative permissions and privileges, you can apply a filter as the default filter to all the diagrams or compact views in the Catalog. An administrator can apply a single default filter on the diagram or compact views. You can create multiple filters and apply one saved filter at a time to the diagram or compact view. To apply a new filter to the diagram or compact view that has filter applied, you must clear the existing filter.

To apply a filter setting directly to the diagram or compact view, open the **New** tab in the **Apply Filter** dialog box, select the asset types and filter options, and then click **OK**. To apply the filter after you save the filter setting, open the **Saved** tab in the **Apply Filter** dialog box, select the filter name that you want to apply, and then click **OK.**

Printing, Exporting, and Viewing Legends in the Diagram

You can print a lineage and impact diagram or compact view. You can export the view to a scalable vector graphics (.svg) file. You can also access the legends to learn more about the diagram.

Use the menu at the upper left corner to print, export the view and access the legends (⋮).

To print a diagram or compact view, open the menu and select **Print**.

To export the diagram to an .svg file, open the menu and select **Export**. The options to download the diagram or compact view vary based on the browser.


To access the legends about the diagram, open the menu and select **Show Legend**. You can view information about the icons and lines used in the diagram, such as value flow, control flow, inward hops, and outward hops.

Filtering the Asset Summary

You can filter the assets in the asset summary by asset type, resource name, control type, or resource type. Use the filter panel to filter the assets.

When you open the asset summary view, the filter panel is displayed by default. Each asset summary tab displays different filter types based on the assets listed in the summary.

The following image shows all the filter types in the filter panel:



To filter the asset summary, select the asset types, resource names, resource types, and control types that you want to view. To remove all filters of a particular type, select **All**.

Note: The filters that you apply in the asset summary view do not apply to the lineage and impact diagram.

Exporting the Asset Summary

You can export the asset summary to a Microsoft Excel (.xlsx) file. You can export the asset lineage summary, the asset impact summary, and asset control summary. If you applied filters to the asset summary, the filtered assets do not appear in the export file.

You can also choose to export all the three types of summary information. If you export all the summary information, the Microsoft Excel file displays separate worksheets for the asset lineage summary, asset impact summary, and asset control summary.

1. Click the **Export** icon ( ).
2. Select the asset summary that you want to export. You can choose to export the **Lineage Summary**, **Impact Summary**, and **Control Summary** separately, or you can select all the summary information.
3. Click **OK**.

   The options to download the file vary based on your browser.

CHAPTER 6

View Relationships

This chapter includes the following topics:

- View Relationships Overview, 111
- Relationships View, 111
- Types of Relationships, 113
- Difference Between the Lineage and Impact View and Relationships View, 114
- Viewing Asset Relationships, 114
- Exporting Asset Relationships, 116

View Relationships Overview

The Relationships view describes the relationship between the selected asset and other assets in Enterprise Data Catalog. The view displays the asset relationships in a graphical form.

The related assets that you view for a selected asset depend on the asset type. For example, if the selected asset is a column, the Relationships view shows all the data domains, similar columns, business term, and users that are related to the column. If the selected asset is a data domain, the Relationships view shows all the columns, business term, users, and data domain groups that are related to the data domain.

By default, the Relationships view displays the relationships for the selected asset. You can hover the cursor over any related asset in the Relationships view for additional details such as the asset type, resource type, and the time and date the asset was last updated.

The Relationships view for a business term displays all the related technical assets, related glossary objects, classified assets, users, and data domains.

Alternatively, you can perform these tasks using the REST APIs. For more information, see the Relationships topic in the *Enterprise Data Catalog REST API Reference guide*.

Relationships View

Use the Relationships view to see assets and related assets in the catalog. Related assets can include primary keys, synonyms, and business terms.


When you open an asset in the Relationships view, the selected asset appears at the center of the Relationships view, and the related assets appear around the selected asset.

The Relationships view shows different circles that represent a specific asset or a group of assets. By default, the selected asset is highlighted in blue and the related assets of the same type are represented as small icons within the asset type circle.

The assets that you see in the Relationships view vary based on the selected asset type. For example, if you select a table, the Relationships view displays related assets such as data domains, business term, reports, primary keys, foreign keys, and synonyms.

To expand the asset type circle, click the number icon at the top of the circle, and then click **Show All** to display all the assets of the same asset type which are included in the selected asset. When you click **Show All**, you can see details about all the assets of the same asset type along with the path corresponding to each asset.

The following image shows the default Relationships view for a data domain named Product ID Information:

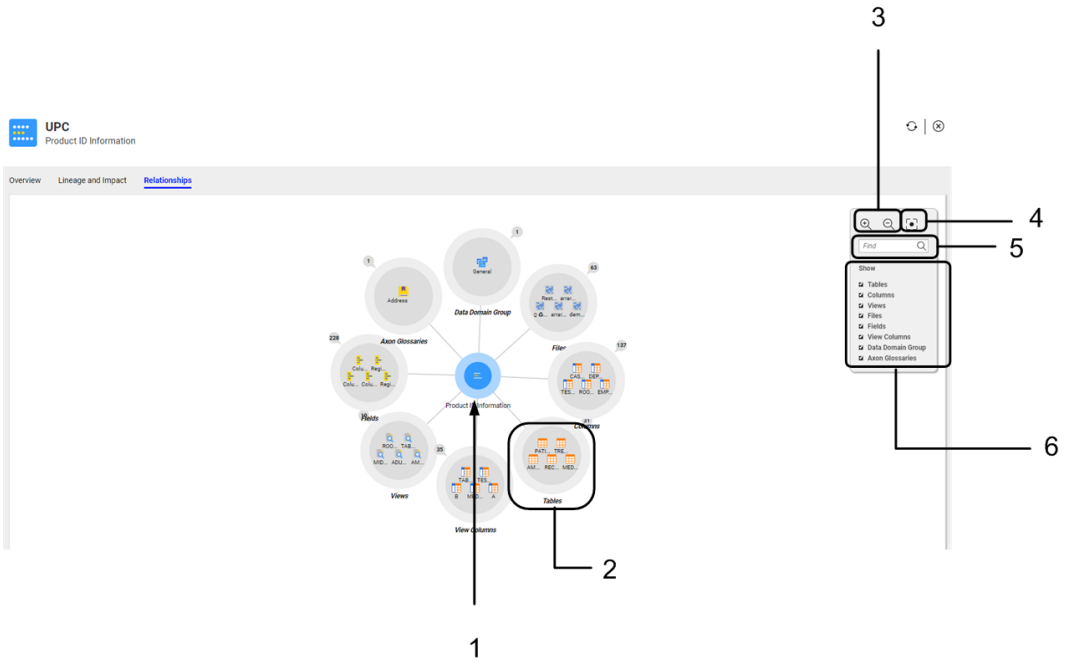

1. Selected asset
2. Related assets
3. Zoom controls
4. Reset the view
5. Find an asset
6. Show asset types

Customizing the Relationships View

You can customize the Relationships view to see specific assets or asset relationships in detail. You can zoom in, zoom out, reset to the original view size, and search for related assets.

The following tables describes the controls that you can use to customize the view:

Control	Description
Zoom controls	Zoom in and out of the Relationship view.
Show	Display or hide assets of a particular type.

Control	Description
Reset	Reset the Relationships view back to the original view size.
Find	Search for an asset in the diagram.

Types of Relationships

The type of asset relationships that you see in the Relationships view depends on the asset that you open in the Relationships view.

The following table lists some of the types of asset relationships that you can see in the Relationships view:

Asset Type	Related Assets
Business Term	Related glossary assets, related technical assets, and classified assets. The related glossary assets include categories, policies, and business terms. The related technical assets include all the technical assets and data domains in the catalog. The classified assets include all the assets that are grouped based on a business term that is assigned as a custom attribute to the assets.
Columns	Data domains, synonyms, similar columns, reports, users, and business term.
Composite Data Domains	Relational assets, files, users, and business term. The relational assets include instances. Each instance contains tables and views on which the composite data domain is inferred. The files include instances. Each instance contains CSV files, JSON files, XML files, and unstructured files on which the composite data domain is inferred.
Data Domains	Columns, data domain groups, fields, files tables, views, synonyms users, and business term. The fields include CSV fields, JSON fields, and XML fields. The files include CSV files, JSON files, and XML files.
Reports	Tables, views, users, files, and business term. The files include CSV files, JSON files, and XML files.
Synonyms	Tables, views, data domains, users, and business term.
Tables	Views, synonyms, reports, users, other tables, data domains, primary keys, foreign keys, and business term.
Users	Tables, views, reports, and business term.
Views	Tables, data domains, users, reports, synonyms, and business term.

Difference Between the Lineage and Impact View and Relationships View

The Lineage and Impact view and Relationships view display different information. The Lineage and Impact view shows visual representation of data flow for an asset and Relationships view shows visual representation of asset relationships in the Catalog tool.

The lineage and Impact view shows you the end-to-end data flow for an asset. You can use this view to understand how a change to one or more assets affects the remaining assets in the data flow. Lineage shows you where the data for an asset comes from and which assets affect the asset that you are studying. Impact shows you where the data is used and which assets might be affected if you change the asset that you are studying.

The Relationships view shows you the relationship between a selected asset and other related assets. The Relationships view helps you understand how a selected asset is associated with other assets.

Viewing Asset Relationships

You can view related assets from the Relationships view. When you open an asset from the Relationships view, the asset opens in the Relationships tab. To view the basic properties of the asset, switch to the **Overview** tab.


To open the assets in the circle, click the name of the asset that you want to open.

Viewing keys of related tables

You can view the type of relationship between a tabular asset and the primary and foreign keys of related tables.

1. Open the **Relationships** tab of a tabular asset.
2. Click the **Tables** circle to display all the related tables.


   The following image shows the **Relationships** tab of a tabular asset:

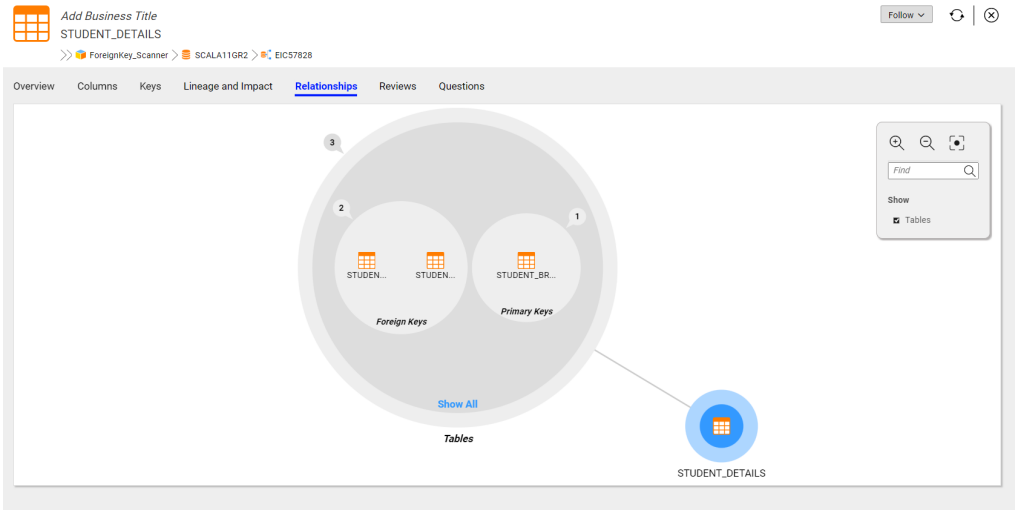

Note: You can click the name of a related table directly from the **Tables** circle.


3. Click **Show All** to view the type of relationship between the asset and the related tables. The **Tables** dialog box appears.

   The following image shows the **Tables** dialog box:

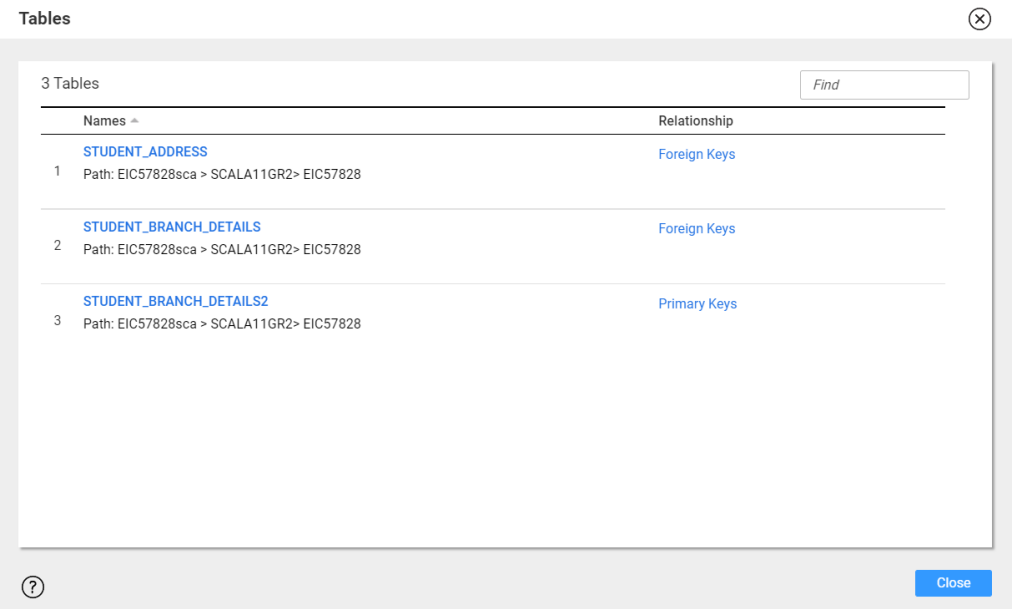


4. Click a value in the **Names** column to view the relationship of the related table.

   The following image shows the **Relationships** tab of a related table:

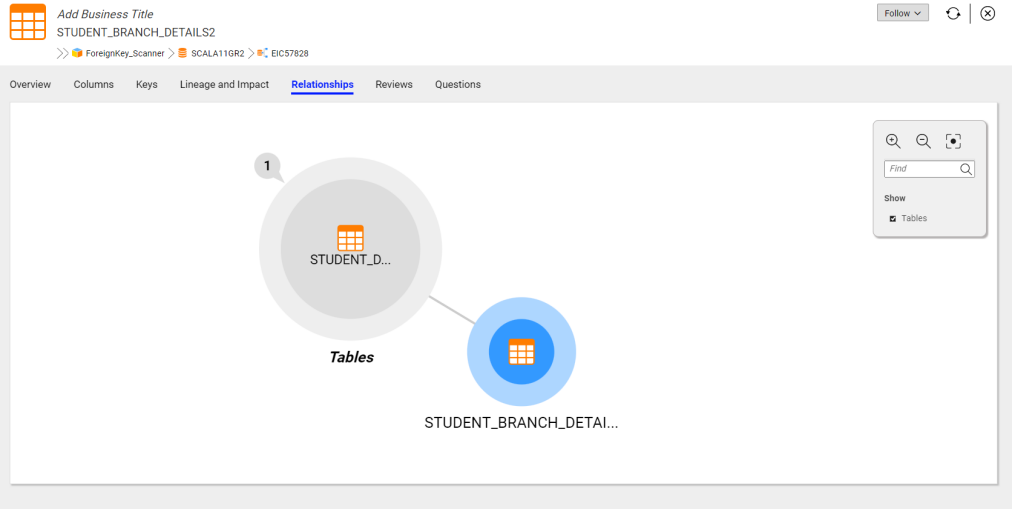

5. Click **Primary Keys** in the **Relationship** column to view the foreign keys of the related table.


   The following image shows the **Foreign Keys** tab of a related table:

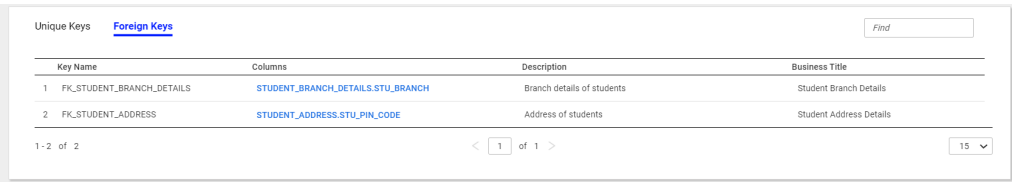

For more information about the foreign key details of an asset, see "Viewing the Foreign Key Details" on page 60.

6. Click **Foreign Keys** in the **Relationship** column to view the unique keys of the related table.

   The following image shows the **Unique Keys** tab of a related table:

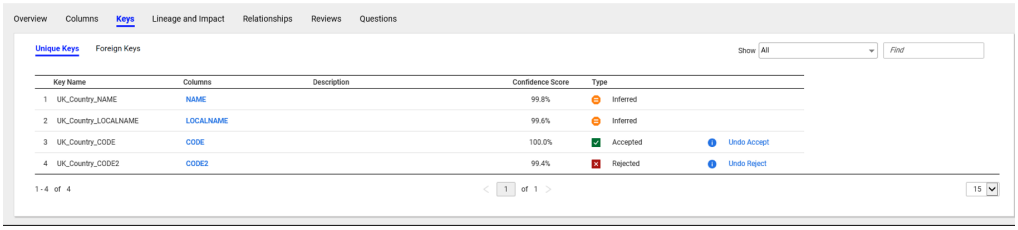

   For more information about the unique key details of an asset, see "Viewing the Unique Key Details" on page 60.

Exporting Asset Relationships

You can export related assets, such as business terms, users, tables, synonyms, views, and data domains from the Relationships view. The type of asset relationships that you see in the Relationships view depends on the asset that you open in the Relationships view. When you open an asset from the Relationships view, the asset opens in the Relationships tab.

Perform the following steps to export related assets from the Relationships view:

1. Open an asset from the Relationships view.
   The Relationships view shows different circles that represent a specific asset or a group of assets. The selected asset is highlighted in blue and the related assets of the same type are represented as small icons within the asset type circle.
2. Click the number icon at the top of the circle to expand the asset type circle, and then click **Show All** to display all the assets.
   The asset dialog box appears.
3. Click **Export**.
   You can monitor the status of the relationship export job in the **Monitor Jobs** page.

CHAPTER 7

Perform Asset Tasks

This chapter includes the following topics:

- Perform Asset Tasks Overview, 117
- Associate Business Title, 117
- Assign Custom Attributes, 125
- Export and Import Assets, 126
- Export Asset Data to a Tableau Data Extract File , 131

Perform Asset Tasks Overview

You can perform several tasks for most types of assets in Enterprise Data Catalog, such as you can add a business title to any asset, add custom attribute values to any asset, export the custom attributes that are configured for asset types in a resource, and export asset data from a resource to a Tableau Data Extract file (TDE).

Associate Business Title

Associate a business title to a technical asset that has a cryptic name to make the asset easier for users to understand and identify in the catalog. For example, as a data steward, you know that an Oracle table named **s_dt** contains sales details, and you want the other stakeholders in the Catalog to know that the table contains sales details. To achieve the goal, you can associate a business title called **Sales details** with the table, Enterprise Data Catalog then displays the business title **Sales details** along with the asset name.

If an asset is a calculated field, you can associate a business term as a business title with the asset to see the business rule that explains how the field should be calculated. For example, a Tableau report in the catalog contains the field called **Cost Ratio**. The enterprise business glossary contains a term called **Cost Ratio** with the following rule definition: `Cost Ratio = Actual Cost / Planned Cost * 100`. Associate the term **Cost Ratio** with the report field so that users can see how the value of **Cost Ratio** should be calculated.

When you associate a business title with the asset, Catalog displays the business title along with the asset name in the search results page, Overview tab, Lineage and Impact tab, and Relationships tab.

You can associate a business term as a business title to the asset in the following ways:

Automatic Business Term Association

The automatic business term association helps minimize the manual intervention of associating business terms to technical assets. When you enable a resource for business term association in Catalog Administrator, Enterprise Data Catalog automatically associates business terms to assets. The automatic business term association is based on the following logic:

- Data domains with associated business term added to columns.
- Column similarity.
- Name match between assets and business terms based on the alignment logic.

Business Term Recommendation

Enterprise Data Catalog recommends business terms when data domains with associated business terms are inferred for columns. The associated business terms of the inferred data domains are then recommended for the columns.

Manual Business Term Association


You can choose to manually associate a business term to an asset if there are no associated or recommended business terms for the asset. You can associate a business term to any asset except Axon and Business Glossary assets in the Catalog.

Note: If you assign a business term to a column inside a table, then the business term is also assigned to the column for public synonyms, synonyms, and views. This occurs when the tables, synonyms, public synonyms, views, and the respective columns have the same name.

For more information about business term association, see the Enable Business Term Association and Business Term Propagation topics in the *Informatica Catalog Administrator Guide*.

Business Term Association Workflow

The following image shows the business term association workflow:

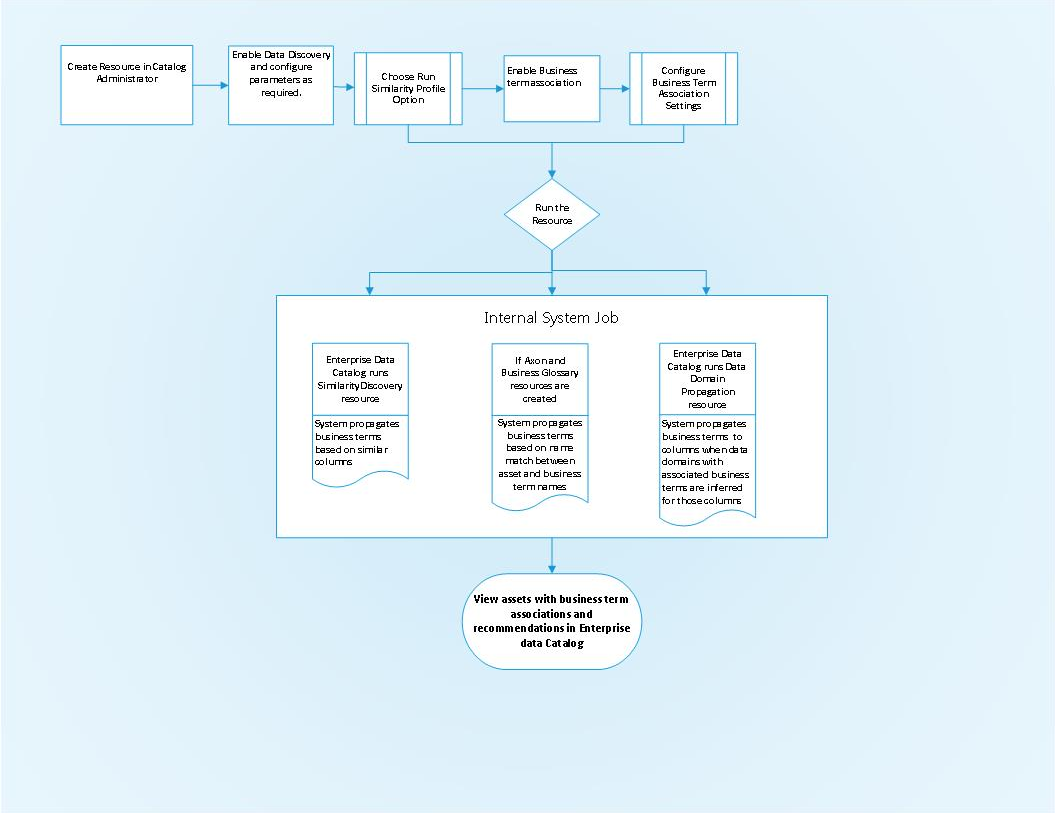

Prerequisites

Before you view business term associations and recommendations in Enterprise Data Catalog, ensure you have met the following prerequisites:

- Create and run Business Glossary and Axon resources.
- Upload the synonym definition list in Catalog Administrator if you want Enterprise Data Catalog to use synonyms and stop words during the business term propagation process, and associate business terms with assets.
- Configure the parameters in the **Similarity Profile Data Preparation and Value Frequency Settings** section, or **Business Term Association** section for a resource in Catalog Administrator.

For more information about configuring the prerequisites, see the Business Term Propagation and Enable Business Term Association sections in the *Informatica Catalog Administrator* guide.

Automatic Business Term Association

Enterprise Data Catalog saves your time by automatically assigning a business term as the business title to tables, views, files, columns, and fields.

The business terms automatically get assigned as business titles to assets based on the confidence score. The confidence score is calculated by an internal algorithm based on accepted business terms on data domains, column similarity, and name match between assets and business terms. A business term with confidence score of 80 percent and above is automatically assigned as a business title to an asset. If there

are multiple business terms that meet the threshold of 80 percent and higher, the term with the highest confidence score is automatically assigned as a business title. if Business Glossary term and Axon object meet the threshold of 80 percent and higher, an Axon object gets the precedence over a business glossary term, and Axon object is associated with the asset.

Enterprise Data Catalog infers and associates a business term as the business title of asset based on the following conditions:

Data Domains with Associated Business Terms

When data domains with associated business terms are inferred for columns, the associated business terms are automatically accepted for the columns. For example, consider that the Catalog contains data domains called **SSN**, **City**, **First Name**, and **Customer ID** and these data domains have a business term called **Customer Details** associated with them. Now, when the data domains get inferred for columns called **cust_name**, **cust_id**, and **cust_city** , the associated business term **Customer Details** gets automatically assigned to the columns.

Column Similarity

If you configure a resource with **Similarity Profile and Value Frequency** settings in Catalog Administrator, system associates business terms to similar columns based on name match between business term and column names, unique value match, and data match. For example, consider that the Catalog contains business terms called **customer_ID**, **customer_name**, and columns called **Customer_id** and **Customer_name**. After you enable intelligent business term association with similarity option. System associates business terms **Customer_name customer_ID** and **customer_name** with columns **Customer_id** and **Customer_name**.

For more information about column similarity, see the Enable Data Discovery section in the Catalog Administrator guide.

Name Match

If you configure a resource with **Enable Business Term Association** settings in Catalog Administrator, system associates business terms based on the name match between assets and business terms. To improve the name match between assets and business terms, you can upload a synonym dictionary to Enterprise Data Catalog for asset names during business term association configuration. The synonym dictionary can include some synonyms and abbreviations that are used commonly for technical assets. You can also add a list of prefixes to Enterprise Data Catalog to avoid prefixes in the asset names during the business term association process.

For more information about synonym dictionary and prefixes, see the Enable Business Term Association section in the Catalog Administrator guide.

Business Term Recommendations


The Catalog recommends business terms if the confidence score is between 60 and 80 percent. Business term recommendations are based on data domains with associated business terms inferred on column assets.

For example, associate a business term as a business title with a data domain to make it easier to associate the term with assets to which the data domain is assigned. For example, you associate a business term called **UPC** with data domain **Product ID Information.** When you associate a business term with any asset to which data domain **Product ID Information** is assigned, Enterprise Data Catalog displays UPC as a recommended term for the asset.

Business term recommendations appear in the **Add Business Title** window and **Sample Columns** section of a table. The **Add Business Title** window displays a maximum of three recommended business terms. You can curate the recommended business terms. As a part of the curation task, you can accept or reject the business term recommendation. Accept the recommended business term as a business title if you find the term appropriate for the column asset. Reject the recommended business term if you do not find it


appropriate. If you reject the recommended business terms or the auto-assigned business title, the terms move to the **Rejected Business Terms** section. Enterprise Data Catalog does not consider the business terms that are in the **Rejected Business Terms** section until you clear the rejected terms from the list.

The following image shows the **Add Business Title** window with business term recommendations:

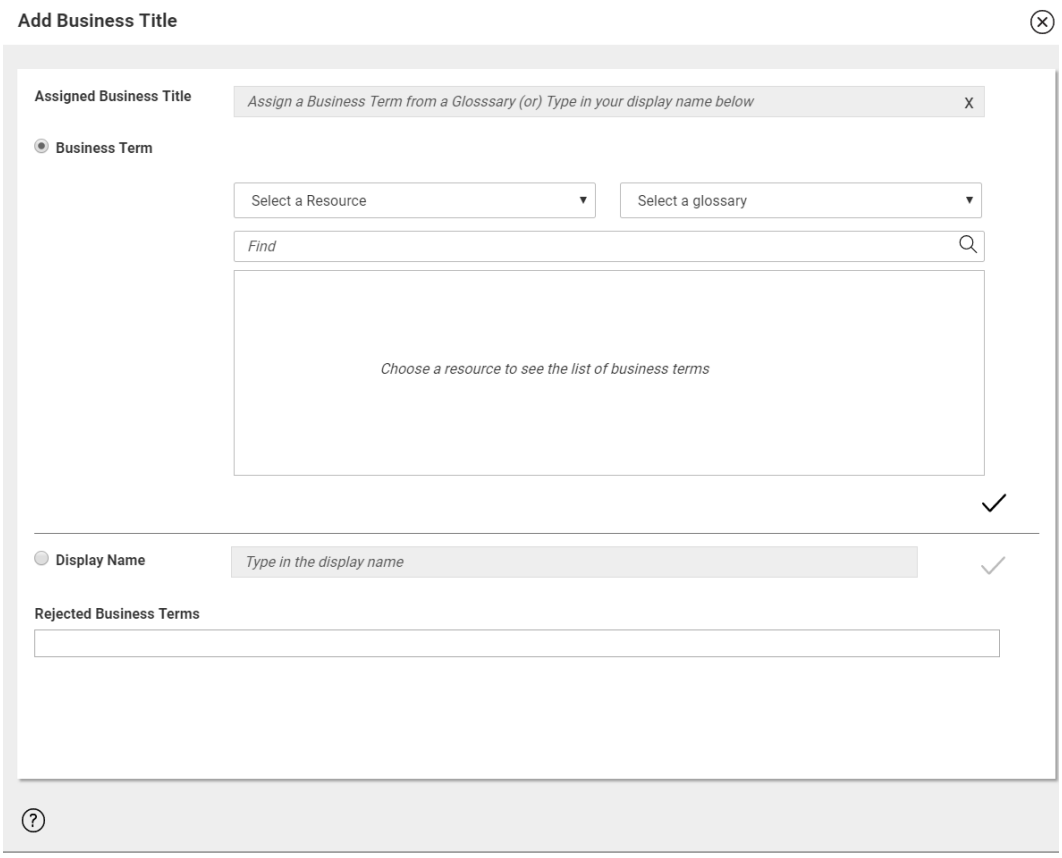

The **Sample Columns** section displays recommended business terms or business terms that are automatically associated. Hover the mouse over the business term to view the name and confidence score. You can accept or reject the recommended business terms.

The following image shows the **Sample Columns** section with business term recommendations:

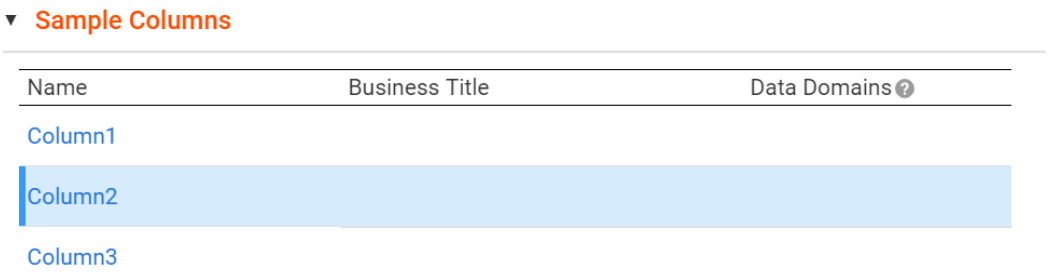


Managing Business Term Associations

You can accept or reject multiple recommended business terms from the **Assets in the Resource** section in the **Overview** tab of the resource. For example, a data steward wants to understand business term

association coverage for a resource in one place. To achieve the goal, he opens the **Assets in the Resource** section so that he can curate recommendations directly from the report.

In the **Resource Contains** section of a resource, click the **Assets in the resource** link to open the list of assets in the resource. The **Assets in the resource** window displays the details, such as the name of the asset, type of the asset, business term associated with the asset, and recommended business terms. Hover the mouse over the business term to view the path of the business term. You can filter the list based on the asset type, assets with business title recommendation, assets with business title association, and assets without business title association.
To accept a recommended term, click the check mark icon next to the term. If you have manually assigned a business title to a column, other business terms are not inferred on the column.

The following image displays the **Assets in the Resource** window:

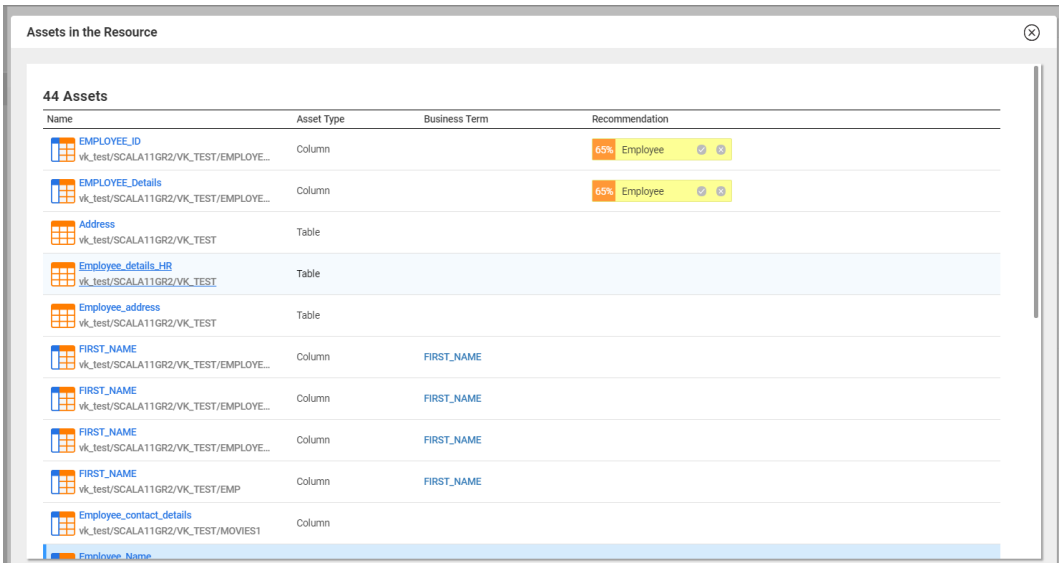


Manual Business Term Association

Associate a business term as a business title to a technical asset if the asset does not have a recommended or automatically associated business term. You can add a business title to any asset in the catalog that is not a business glossary or an Axon glossary asset. To add a business title to an asset, you can either associate a business term or provide a display name. You can add one business title to an asset.

You can associate a business term as a business title with assets in the **Add Business Title** window. After you add a business title to an asset, Enterprise Data Catalog displays the business title with the asset name in the following places:

- In the search results page, under the asset name.
- Above the asset name in the Overview tab, Lineage and Impact view, and Relationships view.

The following image shows the sample **Add Business Title** window:

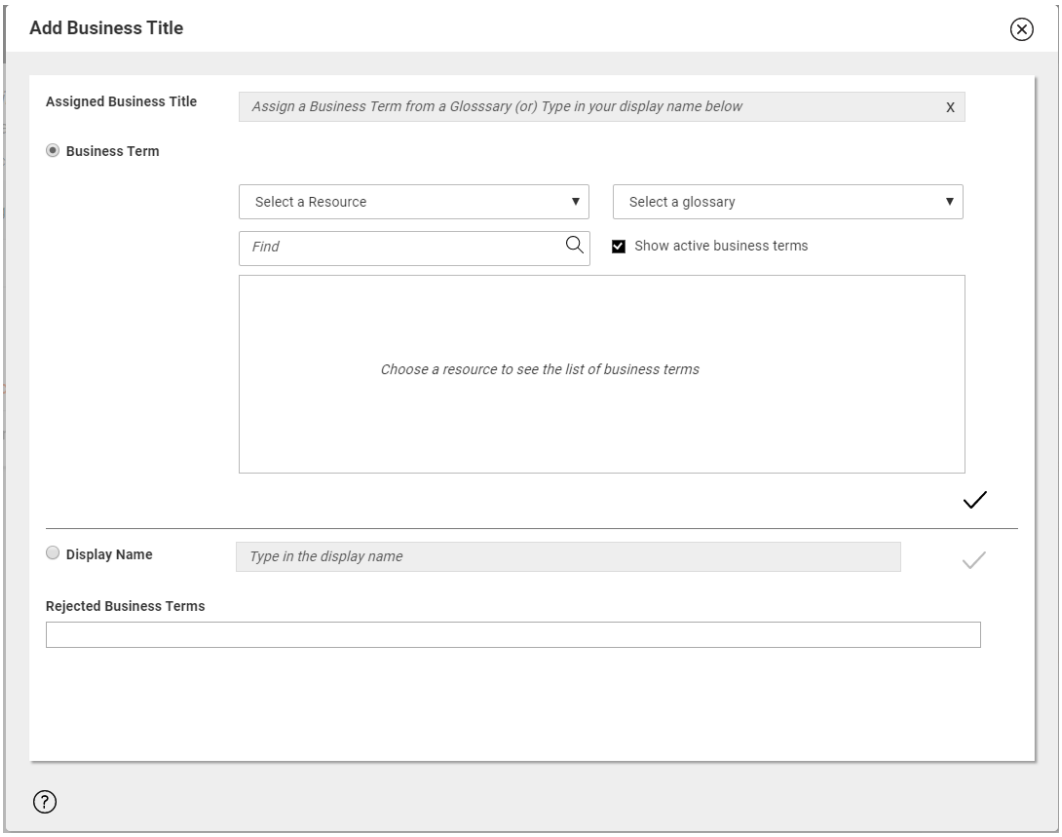

Adding a Business Title to an Asset

1. Click **Add Business Title**.
2. In the **Add Business Title** dialog box, you can either select a business term, an inferred business term, or provide a display name to add a business title to an asset:
   - You can provide a display name if the asset has no business terms or inferred terms.
   - If one or more data domains with an associated business term are added to the asset, the inferred terms appear in the **Recommended Business Terms** section. To accept an inferred term, click the check mark icon next to the term.
   - You can either select a Business Glossary or Axon resource to associate a business term if the asset has no inferred terms.
3. To associate a business glossary asset with an asset, select the business glossary resource from the **Select a Resource** list, and then select the business glossary from the glossary list. Then, select the term that you want to associate from the list of terms.
   - If the list of terms is long, you can search for a term in the list by entering the first few characters of the term name in the search field.
   - If the list includes inactive terms, select **Show active business terms** to view active terms in the list.

   The path corresponding to each business glossary asset also appears in the glossary list.

   Note: You cannot differentiate between business glossary terms with the same name. This can occur when the business glossary terms with the same name have different parent business terms or belong to different categories. This is because the path does not include the parent business term or category.

4. To associate an Axon glossary with an asset, select the Axon resource from the **Select a Resource** list, and then select the Axon glossary that you want to associate from the list of Axon glossaries.
   - If the list of Axon glossaries is long, you can search for a glossary in the list by entering the first few characters of the glossary name in the search field.
   - If the list includes inactive terms, select **Show active business terms** to view active terms in the list.

   The path corresponding to each Axon glossary also appears in the glossary list.
5. Click **OK**.

Removing a Business Title

You can remove an assigned business title for any asset in the catalog.

1. Click the Edit Properties icon next to the assigned business title name of the asset.

   The **Add Business Title** dialog box appears.
2. In the **Display Name** field of the dialog box, click **X** next to the business title name.
3. Click **OK**.

   Note: When you remove a business term that was rejected, the term is re-associated with the asset with the following states:
   - If the business term was inferred and automatically associated with the asset, the association is inferred.
   - If the business term was recommended for association, the association is accepted.

   If the business term was manually associated, the association is deleted when you remove the rejected business term. Enterprise Data Catalog considers the term for inference from the next scan.

Business Term Curation through Export and Import

You can export asset data from the catalog to a CSV file, accept or reject multiple inferred business terms simultaneously from the CSV file, and import the updated file back into the catalog.

You can export asset data to a CSV file from the Resource Overview tab, Asset Overview tab, or Search Results page. If you want to export the confidence score associated with business terms, select the Business Terms and the Terms Inferred Confidence Score options. The exported CSV file contains columns for inferred, accepted, and rejected business terms. You can edit the columns to accept or reject the business terms and import the CSV file back into the catalog.

The following table describes the columns in the exported CSV file and the actions you can perform to accept, reject, or delete business terms:

Column in exported CSV file	Action
Terms Inferred	Accept: To accept an inferred business term, move the term from Terms Inferred to Terms Accepted column. Reject: To reject an inferred business term, move the term from Terms Inferred to Terms Rejected column. **Note:** You cannot delete or add business terms to the Terms Inferred column in the CSV file, you can, however, move the business terms from Terms Inferred to Terms Accepted or Terms Rejected columns.
Terms Accepted	Reject: To reject or delete an accepted business term, move the term from Terms Accepted to Terms Rejected column.
Terms Rejected	Accept: To accept a rejected business term, move the term from Terms Rejected to Terms Accepted column. Delete: To delete a rejected business term, remove the term from the Terms Rejected column. After you run the data domain propagation scanner, business term moves back to its original state.
Manually add a business term that is not inferred	Accept: To manually add a business term that is not inferred, add the term in the Terms Accepted column.
Manually reject a business term that is not inferred	Accept: To manually reject a business term that is not inferred, add the term in the Terms Rejected column.

Assign Custom Attributes

To enhance the asset metadata and improve the search, you can assign or edit custom attribute values for technical assets.

In the Overview tab, edit custom attribute values or assign custom attributes values to an asset. Assign custom attribute values to a technical asset to append additional information to the asset or to make searching for the asset easier. You can edit or assign custom attributes to an asset from different sections in the Overview tab. The sections in the Overview tab include the people, data domains, business classifications, business terms, and custom attributes.

For example, the administrator creates a custom attribute for relational tables called **Business Owner** and configures the list of possible business owners. In Enterprise Data Catalog, you set the business owner for some tables to **jsmith** in the **People** section. When you search for assets, you can configure the search filters to return only the assets that have the business owner set to **jsmith**.

Assigning Custom Attribute Values to an Asset

Assign custom attribute values to provide more context to an asset or to help you quickly find an asset. Assign custom attribute values to an asset from different sections in the Overview tab, such as the

Description, People, Custom Attributes, Business Terms, and Business Classifications. You can search for an asset using the custom attribute values that are assigned to the asset.

You can assign custom attribute values to a technical asset if the catalog administrator has configured custom attributes for the asset type. For example, the catalog administrator configures a custom attribute of string data type called **Data Center Location** for a CSV field. The catalog administrator sets the possible values for the attribute to Denver, Milwaukee, and New York. When you launch the overview for a CSV field, you can set the **Data Center Location** to Denver, Milwaukee, or New York in the Custom Attributes section of the asset.

1. In the Overview tab for an asset, click the Edit Properties icon in the Custom Attributes section.
2. Specify custom attributes from the **Custom Attributes** section.

   The options to enter the attribute values vary based on how the attribute is configured:

   - If the attribute is configured with a predefined set of values, you can see a checklist of possible values to the right of the dialog box. Select one or more values that you want to assign to the asset.

     If the list of values is long, you can search for a value by entering the first few characters of the attribute value in the search field.
   - If the attribute allows you to enter a text string as the attribute value, you can see a text box to the right of the dialog box. Enter a string value in the text box.
   - If the attribute allows you to enter URLs as the attribute value, you can see a text box to the right of the dialog box. Enter a URL in the text box.
   - If the attribute allows you to enter multiple text strings for the attribute value, you can see the **Add** button to the right of the dialog box. Click **Add**, and enter a string value in the text box.
   - If the attribute allows you to enter rich text as the attribute value, you can see a text box to the right of the dialog box. Enter a string value in the text box. Use the text formatting options to format the rich text.
   - If the attribute allows you to enter multiple strings as rich text for the attribute value, you can see the **Add** button to the right of the dialog box. Click **Add**, and enter a rich text string value in the text box.

   To remove an attribute value, clear or delete the attribute value that you want to remove.

   Note: In Enterprise Data Catalog, you cannot delete the custom attribute values that are propagated from the Catalog Administrator.
3. Click **OK**.

Export and Import Assets

You can export the assets, reference assets, child assets, custom attributes, system attributes, business terms, and data domains to the comma-separated values (CSV) file and import the CSV file back into Enterprise Data Catalog.

Use the exported CSV file to edit or assign custom attribute values and business titles to multiple assets simultaneously. You can also use the exported CSV file to collaborate with other business users.

The exported CSV file contains the asset types, reference asset types, child assets, custom attributes, system attributes, Axon glossaries, business glossary terms, and data domains that you select during the export.

For example, the **Finance_Department** resource contains relational tables that have information about the payroll. Your goal as a payroll manager might be to assign the **Payroll** custom attribute value to all the tables in bulk so that you can search for the tables using the assigned custom attribute value. To achieve this goal,

you can export the relational tables in the **Finance_Department** resource and custom attribute called **Payroll** to a CSV file. In the exported CSV file, you can assign the **Payroll** custom attribute value to the relational tables, and then import the file back into the Catalog. After the import job completes, the Catalog updates the tables based on the custom attribute value you assigned in the exported CSV file.

You can export assets from the Resource Overview tab, Asset Overview tab or Search Results Page.

Resource Overview Tab

The Catalog exports specific assets in the resource, custom attributes that are configured for assets in the resource, reference assets, business terms, and data domains. The CSV file includes reference assets if you export a resource that contains reference assets or export a reference resource.

Asset Overview Tab

The Catalog, by default, exports the asset, custom attributes that are configured for the asset, child assets, business terms, and data domains. The CSV file includes child assets if you export data assets, such as tables, views, synonyms, and public synonyms. You can export a maximum of 200000 assets.

Search Results Page

The Catalog, by default, exports all the assets that appear in the search results page, custom attributes that are available in the Catalog, business terms, and data domains. You can export assets after you refine the search results in the search results page. You can export a maximum of 200000 assets.

Import the CSV file back into the catalog to update the assets based on the attribute values that you specify in the exported CSV file. After the import job is complete, Enterprise Data Catalog sends the email to the email address that you specify during the import job. You can send the email notification to more than one person. The email notification message contains an URL to download the details of the import job. To send email notifications to multiple recipients, use a comma to separate the email address entries. You can also monitor the export and import job status in the **Monitor Job** page. To open the **Monitor Job** page, click the user icon, and then select the **Monitor** option from the list. You can import assets from the Resource Overview tab or the **User** menu option in the Enterprise Data Catalog header.

Note: When you assign people custom attributes to assets using a CSV file, you can specify the security domain name and the username of the data owner, data steward, or subject matter expert instead of the full name. Use the following format to specify the security domain name and the username to uniquely identify users with the same full name: `id:<Security domain name>/<User name>`. Enter the distinct accepted and rejected business terms, as well as their accepted and rejected data domains, into the respective columns of the imported CSV file.

Prerequisites

Before you export or import assets, verify that you have met the following perquisites:

- Ensure that you have the **Read and Write** permission assigned to the DomainUsers resource in the Catalog Administrator.
  For information about assigning permissions on resources for users, see the *Managing Resource Security* chapter in the *Informatica Catalog Administrator* guide.
- If you want to receive email notifications on the import job status, ensure that you have configured the **Receive Alerts through Email** option for the catalog service and email service in the Informatica Administrator.
  For information about configuring email notifications, see the *Informatica Administrator Reference* for Catalog guide.

Export File Description

You can create a CSV file to edit or assign custom attribute and business title values to multiple assets simultaneously. To edit multivalued custom attributes in the CSV file, enclose each value within the double quotes and separate the value using a comma.

The following table lists the default order of the columns, column headings, and the format of the values in the CSV file:

Column Heading	Column Value Description
ID	Object ID of assets in a resource.
Name	Specifies the name of the assets that you export from the Resource Overview tab, Asset Overview tab, or search results page.
Class Type	Specifies the type of asset that you export.
DataDomains Accepted	Displays data domains that are accepted for the assets.
DataDomains Inferred(Read Only)	Displays data domains that are inferred for the assets. Do not edit the values in the column.
DataDomains Rejected	Displays data domains that are rejected for the assets.
Custom Attribute Name	Specifies the name of the custom attribute. Use this column to edit or assign custom attributes to assets.
Term Description(Read Only)	Displays the source description of Axon or business glossary terms. Do not edit the values in the column.
Terms Accepted	Displays the path to the Axon or business glossary terms that are accepted for the assets.
Terms Inferred(Read Only)	Displays the path to the Axon or business glossary terms that are inferred for the assets. Do not edit the values in the column.
Terms Rejected	Displays the path to the Axon or business glossary terms that are rejected for the assets.
Source Description	Displays the source description of system attributes configured for the asset.
Position	Displays the position of system attributes in the data source configured for the asset.
Datatype	Displays the datatype of system attributes configured for the asset.
Datatype Length	Displays the datatype length of system attributes configured for the asset.
Datatype Scale	Displays the datatype scale of system attributes configured for the asset.
Nullable	Displays whether the system attributes configured for the asset are nullable or not.
Label	Displays the label value of the system attribute configured for the asset. **Note:** Applies to Salesforce V2 scanner.
Primary Key Column	Displays whether the column is a primary key column or not.

Column Heading	Column Value Description
Identity	Displays whether the identity of system attributes are configured for the asset or not.
Is Partitioned	Displays whether the column is partitioned or unpartitioned for the asset.
Column Partitioned Order	Displays the order in which the column is partitioned for the asset.
Partition Column	Displays the name of the partition column for the asset.
Comment	Displays additional information about the asset.
Definition	Displays the description of the asset.

Note: The Comment and Definition attributes apply exclusively to the Erwin asset type.

Exporting Assets

You can export assets to a comma-separated values (CSV) file from the Resource Overview tab, Asset Overview tab, and search results page.

1. From the Resource Overview tab or Asset Overview tab, open the menu and select **Export Assets**. From the search results page, click the export icon.

   The **Export Assets** dialog box appears.

   Note: To export assets from the Resource Overview tab, select the asset types before you select the custom attributes, data domains, business terms, and system attributes for export.
2. Select business terms, child or grandchild assets, custom attributes, data domains, reference assets, and system attributes to export. Use the related child or grandchild assets, such as tables, views, columns, primary key constraints, and foreign key constraints to export.
   - Optionally, to export all the custom attributes that are configured in the Catalog, select the **Choose attributes to export** check box.
   - Optionally, if you do not want to export data domains, business terms, system attributes, reference assets, and child assets, clear the check boxes.

     Note: The CSV file includes reference assets when you export a reference resource or a resource that contains reference assets.
3. Click **OK**.

   Note: Do not edit or modify the values of the custom attributes that are not applicable in the exported CSV file.


Exporting Unique and Foreign Keys

You can export the unique and foreign keys of a tabular asset to a comma-separated values file from the **Keys** tab of the asset.

1. Navigate to the **Keys** tab.
2. Click the **Unique Keys** or **Foreign Keys** tab.
3. Click the Export icon to export the unique or foreign keys.

   Note: The Export icon exports all the unique and foreign keys regardless of the filters applied. You can monitor the status of the export job in the **Monitor Jobs** page.

4. To download the file that contains the keys, click the download link on the export job in the **Results** column of the **Monitor Jobs** page.

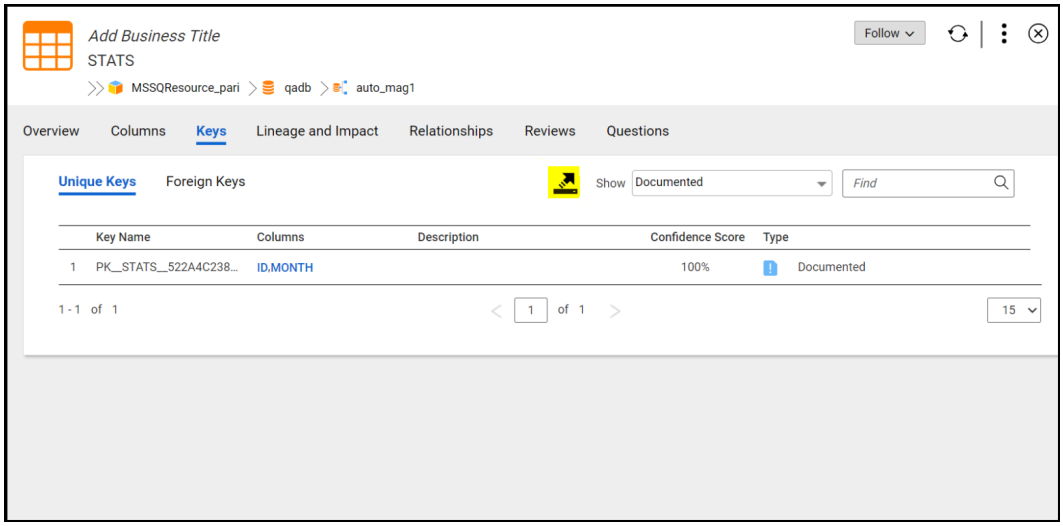

Importing Assets

You can import a CSV file into Enterprise Data Catalog after you make the required changes to the exported CSV file. The content of the CSV file needs to be in the same order and format that the import job requires. The CSV file must contain all the column headings. All the columns in the CSV file need not have values assigned.

1. In the Enterprise Data Catalog header, click the user icon, and then select the **Import** option from the list. Alternatively, from the overview tab of a resource, open the menu and select the **Import Assets** option.

   The **Import Assets** dialog box appears.
2. Click **Browse** to select the CSV file you want to import from the local machine. Optionally, to import the file, you can drag the CSV file into the dotted rectangle in the **Select file to import** section.
3. Click **Next**.
4. To receive notifications on the import status, select the **Send email notification** check box and enter a valid email address in the address field. Enter multiple email addresses separated by a comma.

   Note: You must enable the **Receive Alerts through Email** option for the catalog service and enable email service in Informatica Administrator to receive notifications on the import status.
5. Click **OK**.

   The Enterprise Data Catalog sends you a notification after the import job is complete and updates assets based on the attribute values that were assigned in the exported CSV file.

Monitoring Export and Import Jobs

You can monitor the status of the asset import and export jobs in the **Monitor Jobs** page.

The **Monitor Jobs** page displays the details, such as the type of export or import job that is running, status of the export or import job, date and time of when the job was created, start time of the job, and end time of the job.

You can filter the list of jobs based on the status, such as running, completed, submitted, and failed. You can download the CSV file for the export jobs. To download the export CSV file, click the download link for a

particular job in the **Results** column. You can also view the status of the job in the log file. To open the log file, click the log location link for a particular job in the **Log URL** column.

Note: After you restart the Catalog Service in Informatica Administrator, the export and import job log details are refreshed and deleted every 24 hours.

Export Asset Data to a Tableau Data Extract File

You can export asset data from resources, such as Hive, Teradata, and Oracle in Enterprise Data Catalog to a Tableau Data Exact (TDE) file.

You can export data from data assets, such as tables, and views to a TDE file. After you export asset data, view the TDE file in Tableau Desktop. To export asset data to a TDE file, verify that you have enabled the **All Permissions** or **Metadata and Data Read** permission for the resources in Catalog Administrator. To view classified information of the asset data in Tableau Desktop, verify that you have enabled the sensitive data read privilege in Informatica Administrator. To hide the **Export** option in the catalog for all users irrespective of the permissions assigned, configure the `LdmCustomOptions.enableTDEExport` custom property for the Catalog Service and set the value as `false` in Informatica Administrator.

Note: You must rerun the Catalog Service after you configure the `LdmCustomOptions.enableTDEExport` custom property in Informatica Administrator.

Prerequisites

Before you export the asset data to a TDE file, contact your administrator and make sure that the following prerequisites are met:

- Create the necessary database connections in the Informatica Administrator console for resources, such as Teradata, Hive, and Oracle.
- Assign the required permissions and privileges to the non-administrator users to export and view the asset data in the Tableau Desktop.
- Set the row count value that you want to export in the **Custom Properties** of Informatica Administrator. Configure the `dpRowLimit` custom property to a value that you want to export. By default, Enterprise Data Catalog exports 50,000 row values to a TDE file.

Exporting Asset Data to a Tableau Data Extract File

Export asset data to a TDE file and view the details of the asset in Tableau Desktop.

1. From the overview tab of a table or view, open the menu and select **Export.**

   The **Export Data** dialog box appears.
2. From the **Select a connection** drop-down list, select the database connection and then click **OK**.

   Note: When you export data from Oracle, Hive, or Teradata tables, you can search for the database connection in the Export Data dialog box.

   Enterprise Data Catalog downloads the TDE file to your machine.

   Note: If you use a Hive connection to export, TDE export file does not include the data types, such as Array, Map, and Struc. If you use any other connection type, TDE export file does not include the binary data types.
3. Open the exported TDE file in **Tableau Desktop** application to view the asset details.

CHAPTER 8

User Collaboration on Assets

This chapter includes the following topics:

- User Collaboration on Assets Overview, 132
- Follow Asset , 132
- Rate and Review an Asset, 142
- Asset Questions, 143
- Certify an Asset , 145

User Collaboration on Assets Overview

Collaboration on assets provides you the ability to interact with the other users, share insights about the assets, ask queries related to the assets, follow up on all the asset changes, and certify the assets. You can collaborate on assets in Enterprise Data Catalog. Collaborate on assets by adding reviews, ratings, questions, following assets, and certifying assets. Collaboration on assets increases the visibility of the assets in the catalog.

Business Example

You are a data steward who works in the retail industry, and business analysts in your enterprise need to analyze the product sales for the quarter. You need to prepare a report on the quarterly sales.

You log into Enterprise Data Catalog and search for tables, such as the Sales_details_Q1, Sales_details_Q2, and Sales_details_Q3, for your report. You want to know if the tables are reliable for the report. To find out if the tables are reliable, you view the reviews, ratings, or comments on the tables. You also ask a query to the data owner, data steward, or the subject matter expert of the tables.

Follow Asset

You can follow assets to monitor asset changes in the catalog. For example, as a data analyst, you can follow an asset to be informed about the changes that are made to the asset, so that you can manage the asset and take necessary actions. You can follow data assets, such as resources, tables, views, reports, and files. You can follow enrichment changes, source changes, and collaboration changes of the assets.

If you follow the enrichment changes of an asset, you get notified on changes when users edit or associate a custom attribute, add or remove a business title, add or remove a description, and assign people or remove people.

If you follow the source changes of an asset, you get notified whenever there is a change in the source of the asset. For example, you have followed a table named **Customer_details** to know the source changes. A new column named **New_Address** is added to the table. Enterprise Data Catalog notifies you about the change.

If you follow the collaboration changes of an asset, you get notified when users add reviews, ratings, and questions or when users certify the asset. You implicitly follow the collaboration changes of an asset when you add ratings, reviews, questions, or answers to the asset.

When you follow an asset, Enterprise Data Catalog sends you a notification alert or email notification when a user makes changes to the asset that you are following. You can view the asset change notifications in the **Notifications** page except the resource change notifications. You can also view all the assets that you follow in the **Followed Assets** page.

Following an Asset

Follow assets to keep a track of asset changes in the catalog. The assets that you follow appear in the **Followed Assets** page. Enterprise Data Catalog sends you notification alerts and email notifications when users make changes to the assets that you follow.

1. In the **Search Results** page, click the asset name link to open the asset that you want to follow.

   The asset opens in the **Overview** tab.
2. In the **Overview** tab of the asset, click **Follow**.

   The follow menu appears. The menu displays **All Changes**, **Enrichments**, **Source Changes**, and **Collaboration Changes** options.
3. You can follow assets by selecting any or all of the following options:
   - To follow all the changes of the asset, select the **All Changes** option from the menu.
   - To follow the enrichment changes of the asset, select the **Enrichments** option from the menu.
   - To follow the source level changes of the asset, select the **Source Changes** option from the menu.
   - To follow the collaboration changes of the asset, select the **Collaboration Changes** option from the menu.

   Enterprise Data Catalog notifies that you are following the asset.

Notifications


Enterprise Data Catalog generates different types of notifications when changes are made to assets that you follow. The notification types include application notifications, change email notifications, and digest email notifications. If you follow a resource, you receive notifications for changes made to any asset that the resource contains.

Application Notification

You can view application notifications when users make changes to the asset that you follow. An alert on the Enterprise Data Catalog header indicates that you have a notification. You can click the Notifications () alert icon to view the list of recent notifications. To view the complete list of notifications in the **Notifications** page, click **Show All**.

The **Notifications** page displays the details, such as the name of the asset that was changed, last updated time of the asset, asset type, change description, and the path to the asset. You can filter the list of notifications based on the asset type, last updated time of the asset, and changes that you have followed. In addition, you can click the asset name link in the notifications list to open the asset in the catalog.

The following image displays the **Notifications** page.

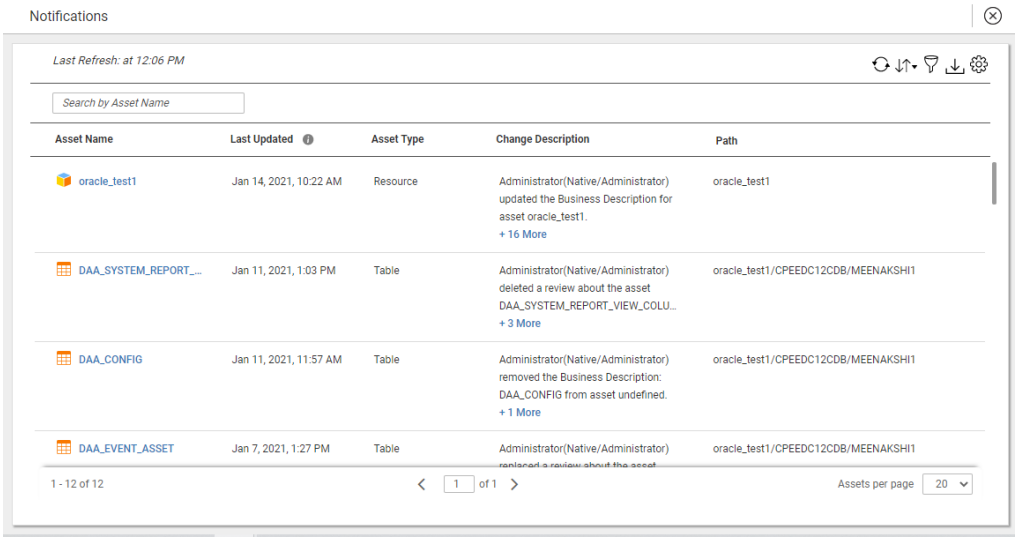

You can perform the following tasks on the **Notifications** page:

Search

You can search for an asset using the search box.


Sort

Sort the list of notifications based on the resource scan time and asset name. To sort the list, click the ( ) sort icon and select the option based on your requirement.

Filter

Filter the notifications list based on asset types last updated time, and changes followed. To view the available filters, click the ( ) filter icon. The filters appear in the **Filter by** panel. The Asset Type filter includes all the asset types in the resource. The Last Updated filter includes options such as Last 1 hour, Last 24 hours, Last 7 days, Last 1 month, and Custom scan time. To apply the filters, select the filter options based on your requirements, and then click **Apply**. To remove the filters, click the clear filter ( ) icon. To view only the filters that you have selected, click **Show selected only**, and to view all available filters, click **Show All**.

The following image shows the **Filter by** panel on the **Notifications** page.

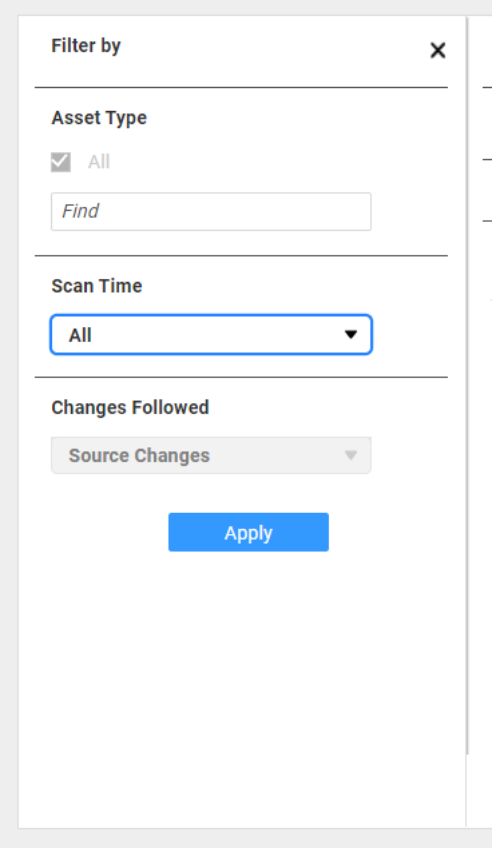

Download Notifications

You can download the notifications list to a csv file. To download the list, click the Download ( ) icon. The csv file displays the details in columns such as the last updated, object ID, object name, object label, object label, operation, and change description.

Configure Email Notifications

You can configure notifications to be sent through emails. To configure email notifications, click the Settings ( ) icon. The notification frequency can be set according to your preference as follows:

- Every change. Email of each change notification. The notification email is sent immediately.
- Daily. Email digest of all the notifications you received for the day.
- Weekly. Email digest of all the notifications for the week. The notification email is sent every Sunday.
- Monthly. Email digest of all the notifications for the month. The notification email is sent on the last day of the month.

Enterprise Data Catalog generates notifications in the following scenarios:

- When you approve or reject the association of data domains with an asset.
- When Enterprise Data Catalog infers data domains and composite data domains for an asset.
- When you add, remove, or edit the business title of an asset.
- When you add or edit the description of an asset.
- When you add, edit, or delete the custom attribute values from an asset.

- When you certify or decertify an asset.
- When you edit the comment or tag of an asset.
- When you add, edit, or delete a question about an asset.
- When you add, edit, or delete an answered question about an asset.
- When you add, edit, or delete a review about an asset.
- When you add or remove assets from the data source of an asset.
- When you import custom attributes.
- When custom attribute value is applied to all assets in the resource.

Enabling the email notifications digest option allows you to get timely email alerts starting from the exact moment of activation based on the preferred notification frequency set.

Note: To view the data source changes on the **Notifications** page, ensure that you select the **Track Data Source Changes** check box when you create a resource in Catalog Administrator.

For example, when you add a custom attribute to a resource with a connection assignment and re-run the resource with **Enable Track Data Source Changes** enabled, the connection assignment runs as a background process, and records changes as made by a System user.

When you enable the **Track Data Source Changes** checkbox, the Enterprise Data Catalog notifies the user about the type of user who made the changes to the asset.

Enterprise Data Catalog tracks changes made by the following user type:

User Type	Description
System user	Special type account used internally by Enterprise Data Catalog to perform system-level operations, run background processes, and run automated services run. The System User carries out tasks, such as data source change tracking and resource updates without manual intervention.
Non-admin user	A regular user with limited privileges.
Admin user	User account with Administrative privileges. Admin Users can access all areas of the system, create and assign roles, configure settings, control access, and oversee overall system administration and maintenance.


View Scan History

You can view and download the scan history when there are more than one changes for a particular asset. The **Change Description** column displays the **+More** link if there are more than one changes for an asset. To open the **Scan History** window, click the **+More** link.

The **Last Updated** column displays the time when the asset was added, deleted, or modified after the resource run.

The **Change Description** column includes the details about the type of change that was made to the asset. To download the scan history summary of the asset to a csv file, click **Download**. The csv file displays the details such as the last updated time, object ID, object name, object label, operation, and change description.

The following image displays a sample **Asset History** window.

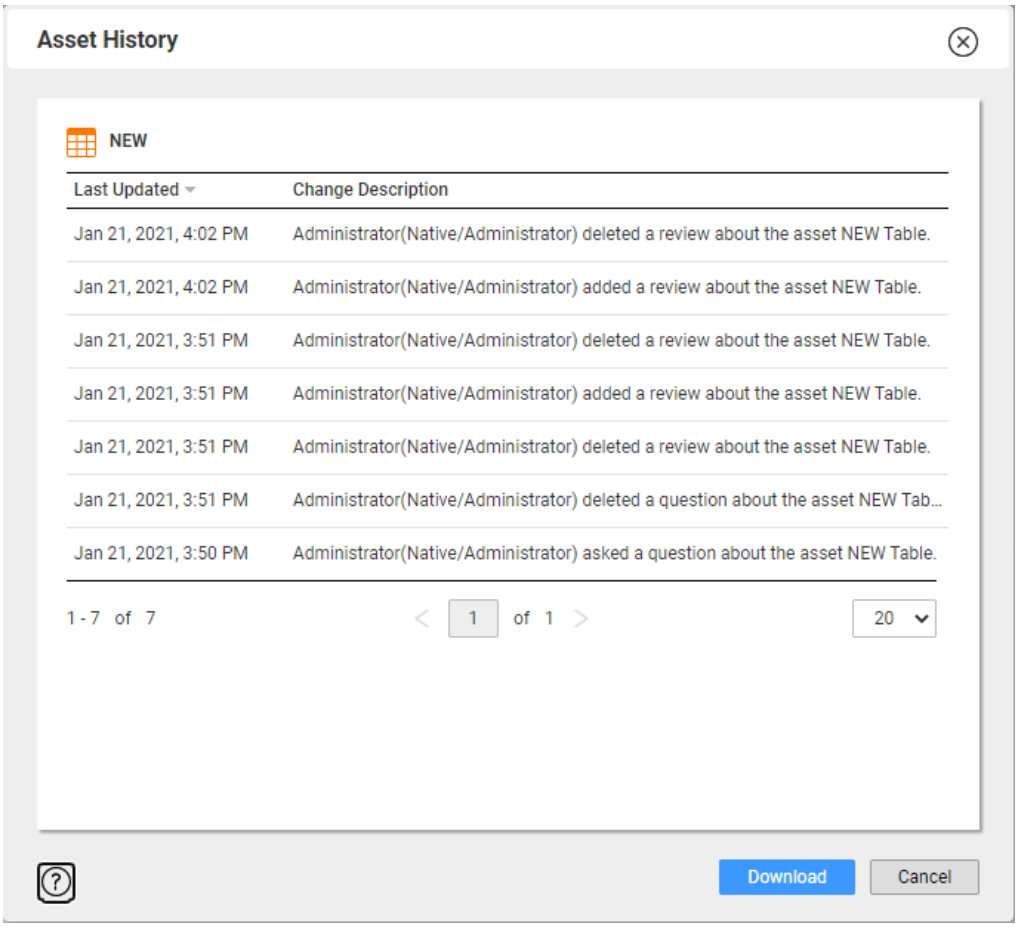

Configuring Email Notifications

You can configure notification settings to receive email notifications about changes to assets that you follow.

You can choose to configure email notifications to receive emails on every change or at different notification frequencies, such as daily, weekly, and monthly.

Prerequisites

Before you enable email notifications in the catalog, ensure that the following prerequisites are met:

- Configure and enable the Email Service in the Administrator tool. For more information about how to configure the Email service, see the Email Service topic in the *Informatica® 10.5.10 Administrator Guide*.
- Select the **Enable Email Notifications for Asset Changes** option in the Catalog Service properties within the Administrator tool.
- Restart the Catalog Service.
- Provide a valid email ID in the **Properties** section for the user in the Administrator tool.

Enabling Email Notifications

1. In the **Notifications** page, click the settings ( ) icon on the right side of the page.

2. Select the **Enable Email Notifications Digest** option.
3. Choose the notification frequency based on your requirement.
4. Click **OK**.

Following a Resource

You can follow a resource to keep a track of all the source changes in the resource. Enterprise Data Catalog displays the resource changes on the **Notifications** page. You can also configure email notifications to receive notifications in an email.

To follow a resource, open the resource in the **Overview** tab, and then click **Follow**.


Viewing Resource Change Summary

You can monitor data source changes of a specific resource on the **Change Summary** page.

Enterprise Data Catalog displays the summary of resource changes whenever there are changes to the source data in the resource after the resource scan.

The **Change Summary** page appears as a separate tab when you open the resource. By default, the source changes appear in newest to oldest order based on the scan time. When you open the **Change Summary** page, the page displays the details, such as the last refresh time of the page, name of the asset that was added, deleted or modified, type of the asset, scan time of the asset, source change details of the asset, and path to the asset. Click the asset name link on the Change Summary page to open the asset on the **Overview** tab. To quickly search for a specific source change by asset name, you can use the search field on the page.

The following image displays the **Change Summary** page:

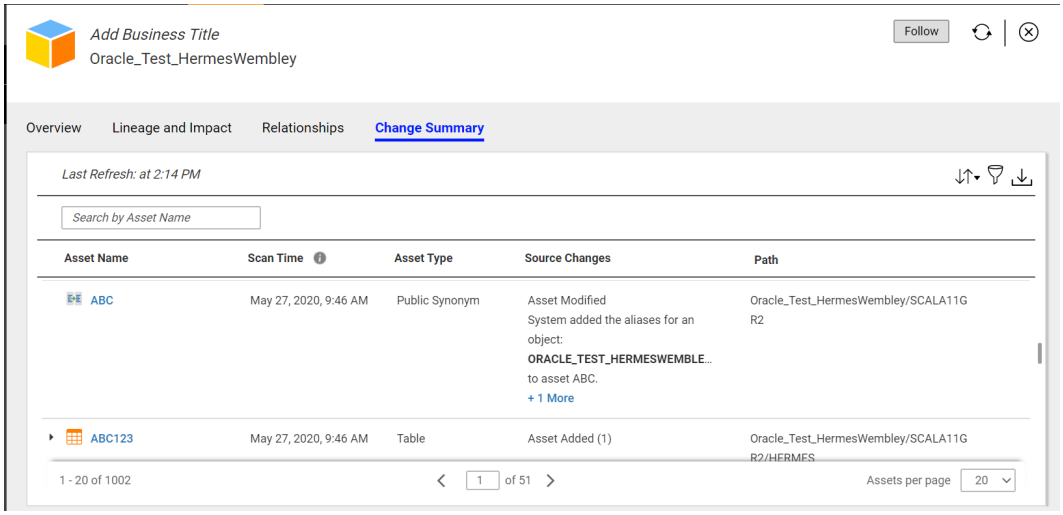

You can perform the following tasks on the **Change Summary** page:

Download Scan History


You can view and download the scan history from the **Source Changes** column of the **Change Summary** page. The **Source Changes** column displays the **+More** link if there are more than one source changes for a particular asset. To open the **Scan History** window, click the **+More** link.

The **Scan History** window displays the time when the asset was added, deleted, or modified after the resource run and source change details.

The **Source Changes** column includes the details about the type of change that was made to the asset. To download the scan history summary of the asset to a csv file, click **Download**. The csv file displays

the details in columns such as the scan time, object ID, object name, object label, operation, and change summary.

The following image displays the sample **Scan History** window:

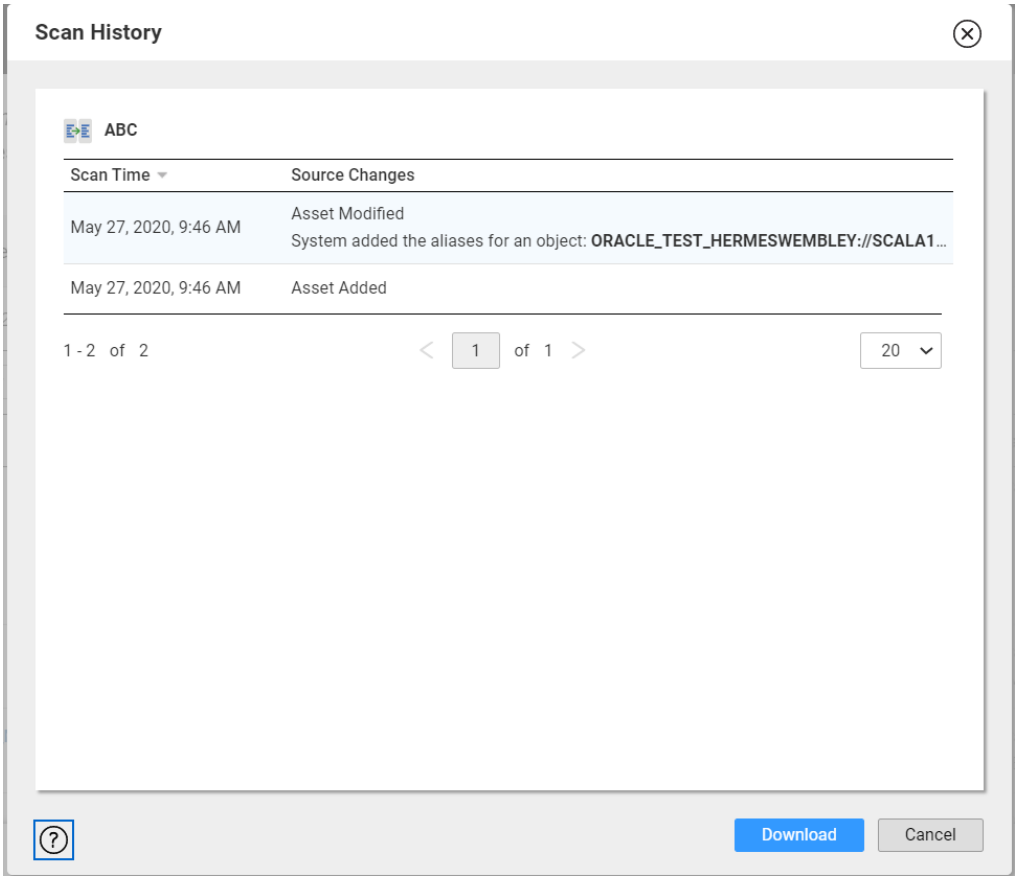


Sort

Sort the list of change summary notifications based on the resource scan time and asset name. To sort the list, click the ( ) sort icon and select the option based on your requirement.

Filter

Filter the change summary notifications list based on asset types and scan time. To view the available filters, click the ( ) filter icon. The filters appear in the **Filter by** panel. The asset type filter includes all the assets in the resource. The scan time filter includes options such as Last one week, Last one month, Last three months, and Custom scan time. To apply the filters, select the filter options based on your requirements, and then click **Apply**. To remove the filters, click the clear filter ( ) icon.

The following image shows the **Filter by** panel on the **Change Summary** page:

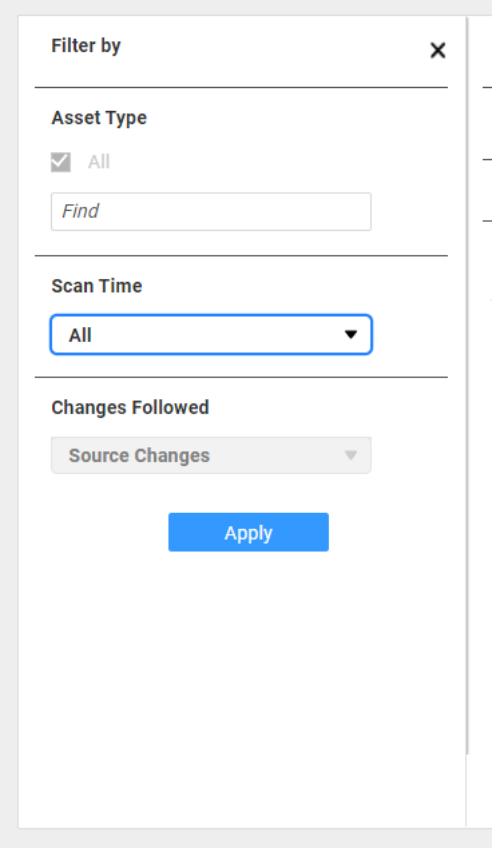

Download

You can download the change summary notifications list to a csv file. To download the list, click the download ( ) icon. The csv file displays the details in columns such as the created on, object ID, object name, object path, object label, change type, and run summary.

Note: To view the data source changes on the **Change Summary** page, ensure that you enable the **Track Data Source Changes** option when you create a resource in Catalog Administrator.

Configuring Email Notifications for Resource Summary Changes

You can configure notification settings to receive email notifications about the resource summary changes for a resource that you follow.

You can choose to configure email notifications to receive emails on every change or at different notification frequencies, such as daily, weekly, and monthly.

Enable Email Notifications for Asset Changes

To enable email notifications in the Catalog, ensure that the following prerequisites are met:

- Configure and enable the Email Service in the Informatica Administrator.
- Select the **Enable Email Notifications for Asset Changes** option in the Catalog Service properties of the Informatica Administrator.
- Provide a valid email ID in the **Properties** section for the user in the Informatica Administrator.


Enable Email Notifications Digest

1. In the **Notifications** page, click the settings ( ) icon on the right side of the page.
2. Select the **Enable Email Notifications Digest** option.
3. Choose the notification frequency based on your requirement.
4. Click **OK**.

Enabling Email Notifications for the Resource Summary Changes

1. To view the resource summary changes open a resource in the **Overview** tab and click **Follow**.
2. Assign a Data Owner, Data Steward, or Subject Matter Expert (SME) role to the resource under the **People** section.
3. Click **Save** and run the resource.

The following image displays the email notification digest that contains the resource summary changes:

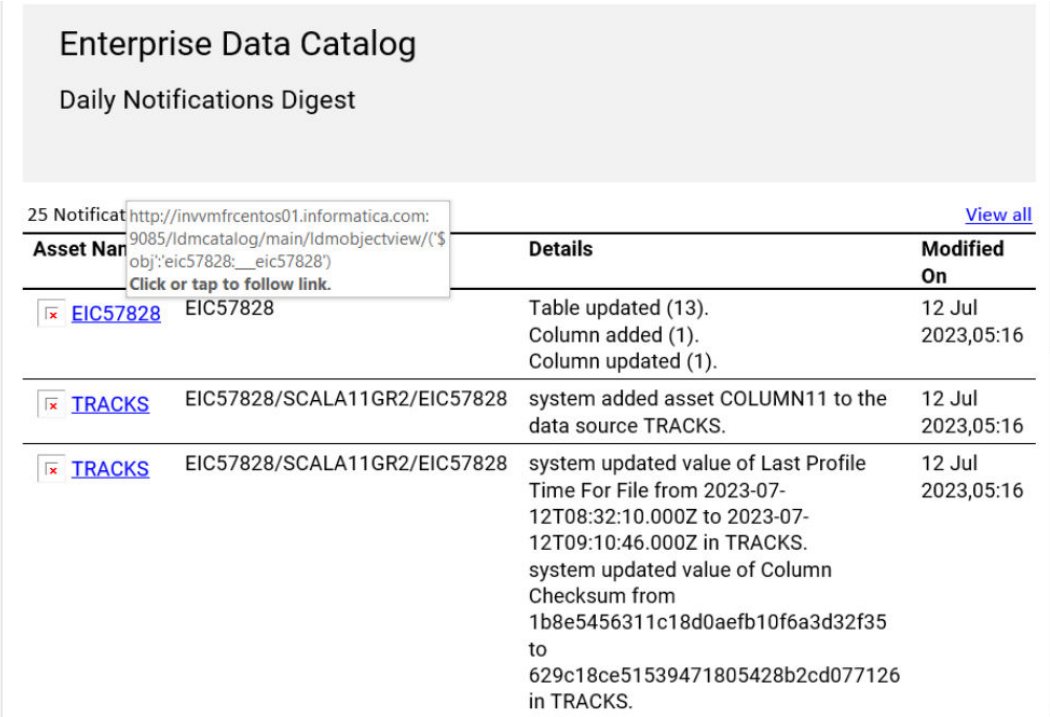

Managing Assets Followed


You can view and manage all the assets that you follow in the **Followed Assets** page.

In the Enterprise Data Catalog header, click the ( ) user icon, and then select the **Followed Assets** option from the list to open the **Followed Assets** page. The **Followed Assets** page displays all the assets that you follow in the **Assets** tab and resources that you follow in the **Resources** tab.

By default, the **Assets** and **Resources** tabs display assets in a grid layout. To change the layout of the section, you can click the ( ) icon. In the **Assets** tab, you can filter the assets based on the asset type, resource name, and type of change you have followed.

You can also choose to follow or unfollow the assets and resources. To follow or unfollow, select the asset or resource from the list, and then click **Following**.

The following image displays the **Followed Assets** page:

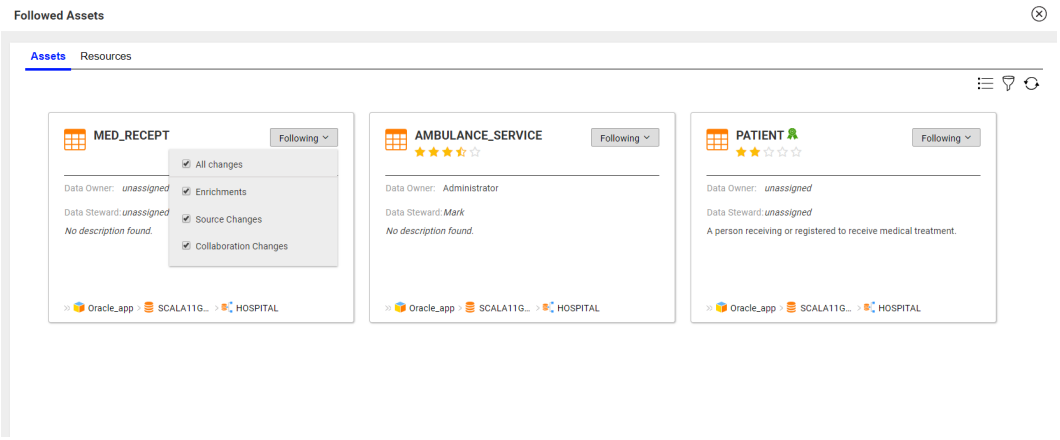

Unfollowing an Asset

Unfollow an asset to stop receiving notification alerts on changes made to the asset. You can either unfollow all the changes or choose to unfollow a specific change depending upon the type of change you chose when you decided to follow an asset.

1. Open the asset that you are following.
2. Click **Following**.

   The follow menu appears.
3. From the follow menu list, clear all the check boxes.

Enterprise Data Catalog notifies you that you have unfollowed the asset.

Note: You automatically unfollow an asset when there is a change in the source of the asset.

Unfollowing a Resource

Unfollow a resource to stop receiving notification alerts on changes made to the resource.

To unfollow the resource, open the resource in the **Overview** tab, and then click **Following**.

Rate and Review an Asset

You can rate and review assets based on a five-star scale in Enterprise Data Catalog. Rate and review an asset to provide feedback about the asset based on different aspects of the asset, such as the quality, applicability, usability, and availability of the asset.

For example, Lisa, a data analyst in a retail industry wants to prepare a report based on the coupon sales for the year 2018. In the catalog, she searches for assets which include the coupon sales details. Based on the findings, she finds out that a few tables are useful for her report. She then provides a five-star rating for the table assets and adds a review explaining why she found the assets useful for her report.

A user who has access to Enterprise Data Catalog can rate and review an asset. The data owner and user who adds a rating and review can delete the rating and review. When you rate and review an asset, you implicitly follow all the collaboration changes of the asset. The collaboration changes include other ratings and reviews about the asset, and questions and answers about the asset. You can mark a review as helpful if you find the review useful. You can rate and review data assets, such as the tables, views, files, and reports.

After you rate and review an asset, catalog displays the average asset ratings under the asset name in the **Overview** tab and **Search Results** page. You can also filter assets based on the ratings in the **Search Results** page.

Alternatively, you can perform these tasks using the REST APIs. For more information, see the Object Comments APIs and Object Review APIs topics in the Enterprise Data Catalog REST API Reference guide.

Rating and Reviewing an Asset

You can rate and review an asset in the **Overview** tab of the asset. You can add a review only after you rate an asset or you can choose to only rate the asset. You can add a single review about an asset. To add another review, you have to replace the existing review.

1. From the **Search Results** page, open the asset that you want to rate and review.

   The asset opens in the **Overview** tab.
2. In the **Reviews** section, enter the review in the review box, and then rate the asset using the five-star rating next to the review box.
3. Optionally, you can just rate the asset using the five-star ratings.
4. Click **Submit**.
5. Optionally, you might want to replace your existing review. To replace your existing review, enter the review in the review box and rate the asset.
6. Click **Submit**.

   The **Replace Review** dialog box appears.
7. Click **OK** to confirm.

   Enterprise Data Catalog replaces your existing review and ratings.

Deleting a Review

A user who rates and reviews an asset and data owner can delete the review.

To delete a review, click the (Delete) icon under the review, and then click **OK** in the **Delete Review** dialog box.

Asset Questions

Ask a question about an asset if you want a better understanding about the asset in the catalog.

You can ask a question that is descriptive, exploratory, predictive, or causal in nature. You can ask questions about all data assets in the catalog. You can add multiple questions and answers about a single asset.

For example, John, a data analyst who wants to prepare a sales report using relational tables containing sales details. The analyst opens a table containing sales details in the Catalog. After viewing the details of

the table, the analyst is unsure if he can use the table for his report. He posts a question stating if he can use the table for his sales analysis in the **Overview** tab of the table.

A user who has access to the catalog can ask a question and answer the question about the asset. The data owner and user who asks the question can delete the question. Similarly, the user who answers the question and data owner can delete the answer.

When you delete a question, the answers associated with the questions also get deleted. The user who asks a question and answers a question, implicitly follows all the collaboration changes of the asset.

Adding Questions

You can ask a question about an asset in the **Overview** tab of the asset. You can ask multiple questions about the same asset. When you ask a question, a user who has access to the Catalog and knowledge about the asset can answer the question.

To ask a question, in the **Questions** section, enter the question, and then click **Submit**.

Deleting Questions

You might want to delete a question that is irrelevant. The user who adds the question and data owner of the asset can delete the question. When you delete a question, the answers that are associated with the question get deleted along with the question.

To delete a question, choose the question that you want to delete, and then click **Delete** in the **Questions** section.

Adding Answers

You can answer a question about an asset in the **Overview** tab of the asset. A user who has access to the Catalog and knowledge about the asset can answer the question.

You can add multiple answers for the same question. You can also mark an answer as helpful if you find the answer reliable so that the other users can consider the answer.

1. In the **Questions** section, identify the question that you want to answer.
2. Click **Answer**.
3. In the answer field, enter the answer.
4. Click **Submit**.
5. Optionally, mark an answer as helpful from the list of available answers.

Deleting Answers

You might want to delete an answer that is no longer relevant to the question. The data owner and user who adds the answer can delete the answer.

1. In the **Questions** section of an asset, identify the answer that you want to delete from the list of answers under the question.
2. Click **Delete** next to the answer.

   The **Delete Answer** dialog box appears.
3. Click **OK**.

Certify an Asset

You can certify an asset to endorse the asset so that other users can use the asset as a trustworthy one over the assets that are not certified. Certifying the asset indicates the reliability of the asset in the Catalog.

The data owner, data steward, and subject matter expert can certify and decertify the asset. When you decertify an asset, you remove the certification associated with the asset.

You can certify data assets, such as tables, views, files, columns, synonyms, and reports. You can add a description and a maximum of 10 tags to the asset when you certify it. You add tags to make the asset easily searchable in the catalog. You can also filter assets on certified assets. To certify an asset, ensure that you have the read and write permission for the **DomainUsers** resource in the Catalog Administrator.

For example, the data owner of the asset called **TicketSalesDetails** finds out that there are multiple assets with the same name as **TicketSalesDetails** in the Catalog. The data owner wants to ensure that the right asset is endorsed to the users as the duplicate assets did not contain the latest asset information. To highlight the right asset in the **Search Results** page, the data owner certifies the asset by adding a description and tags so that users can easily search the for the asset and the asset is quickly available in catalog search results.

When you certify an asset with a tag and search for the tag, the certified asset appears at the top of the search results on the **Search Results** page. You can search for both certified and uncertified assets. To

indicate that the asset is certified, Enterprise Data Catalog displays the certify icon ( ) under the asset name in the **Overview** tab and next to asset name in the **Search Results** page.

Alternatively, you can perform these tasks using the REST APIs. For more information, see the Object Certification APIs topic in the Enterprise Data Catalog REST API Reference guide.

Certifying an Asset

Certify an asset to endorse the asset in the catalog. The resource stakeholders, such as data owner, data steward, and subject matter expert, can certify all the assets in the resource.

1. From the overview tab of an asset, open the menu and select **Certify Asset**.

   The **Certify Asset** dialog box appears.
2. Optionally, in the **Certify Asset** dialog box, add a comment and associate tags.

   Note: You can add a maximum of 10 tags in the **Add Tags** field.
3. Click **OK**.

Enterprise Data Catalog displays the certified icon next to the asset name after you certify the asset.

Alternatively, you can perform this task using the REST APIs. For more information, see the Create or Update Certification Properties for an Object topic in the Enterprise Data Catalog REST API Reference guide.

Decertifying an Asset

The data owner, data steward, and subject matter expert can decertify an asset. Decertify an asset if the asset contains obsolete information.

To decertify an asset, from the **Overview** tab of the asset, open the menu, and then select **Decertify**.

Alternatively, you can perform this task using the REST APIs. For more information, see the Delete Certification Properties for an Object topic in the Enterprise Data Catalog REST API Reference guide.

Certifying or decertifying assets in bulk

Resource stakeholders, such as data owners, data stewards, and subject matter experts, can certify, or decertify assets from the resource in bulk. To certify or decertify assets in bulk, you need to export the assets, update the export file, and import the file.

Prerequisites

1. From the **Resource Overview** tab or **Asset Overview** tab, open the menu ( ) and select **Export Assets**.

   From the search results page, click 
   The **Export Assets** dialog box appears. For more information about exporting assets, see "Exporting Assets " on page 129.
2. Select the certification, reference assets, custom attributes, data domains, business terms, and system attributes.
3. Click **OK**.
4. From the **Monitor Jobs** page, download the CSV file of the exported job.
   The exported CSV file includes columns for details such as asset certified status, tags, and comments.
5. Enter the following details in the CSV file:
   - To certify the required assets, enter TRUE in the Certification status column. To decertify assets, enter FALSE.
   - Optionally, you can use double quotes (" ") to add the certification tags to the assets in the Certification tags column. You can enter multiple tags separated by a comma. For example, you can enter the certification tags in the following format "tag1,tag2".
   - Optionally, you can enter comments in the Certification comments column.
6. Save the CSV file.
7. Import the CSV file into Enterprise Data Catalog.
8. Verify that the Enterprise Data Catalog tool displays or removes the Certified icon for the assets that you updated.

CHAPTER 9

Data Preview and Provisioning

This chapter includes the following topics:

- Data Preview and Provisioning Overview , 147
- Data Preview , 147
- Data Provisioning , 149

Data Preview and Provisioning Overview

An effective data catalog enables business intelligence users and data scientists to locate, preview, prepare, and provision data for ad-hoc analysis.

Data provisioning is the process of moving data from a source in the catalog to a target for further processing. You can preview data for table and file asset types, and create provisioning tasks in Enterprise Data Catalog. Preview a sample of the source data before you create a provisioning task.

Business Example

Susan, a Financial Analyst in your organization, performs financial forecasting and reconciliation of internal accounts. She needs to analyze the financial information and create monthly, quarterly, and annual reports in Tableau to ensure that the financial information is recorded accurately. To create and analyze the reports, she wants to use tables that contain financial information from an Oracle source. She uses Enterprise Data Catalog to achieve this goal. In Enterprise Data Catalog, she previews to assess the sample data of tables that she wants to use in the report, and then creates a data provisioning task to move the tables into the Tableau system. After the task is complete, the tables are moved into the Tableau system in the format that she requires for further analysis.

Data Preview

Preview Data to assess the data before you move it to the target. Ensure that a resource is configured for data provisioning in Catalog Administrator before you can preview data.

You can preview data in the **Data Preview** tab. To preview data, you need to provide the user credentials for the data source. When you preview data, Enterprise Data Catalog displays all columns and up to 10 rows of the data source.

You can preview data for the following resources:

- Amazon Redshift

- Azure Microsoft SQL Server
- Azure Microsoft SQL Data Warehouse
- Amazon S3
- Hive
- JDBC
- Microsoft SQL
- Oracle
- Salesforce
- Teradata

Previewing Data

You need to configure the user credentials for a table to preview the data. The **Data Preview** tab, by default, displays the source connection properties, such as connection name, connection type, service name, and schema. The connection properties that you view are based on the connections that you create in Informatica Intelligent Cloud Services.

Before you proceed with steps to preview data, ensure that you have met the prerequisites listed in the Data Preview and Provisioning Prerequisites topic.

1. From the **Search Results** page, open the asset that you want to preview.

   The asset opens in the **Overview** tab.

2. Click **Data Preview** to open the tab.


   The **Data Preview** tab appears with the connection properties.

3. In the **Connection Properties** section, enter the user credentials for the data source that you want to preview.

4. Click **Preview**.

   After you configure an asset for data preview, Enterprise Data Catalog displays the columns and rows of the table. The **Data Preview** tab displays a maximum of 10 rows and all columns in the table.

   The following image displays the sample data in the **Data Preview** tab:

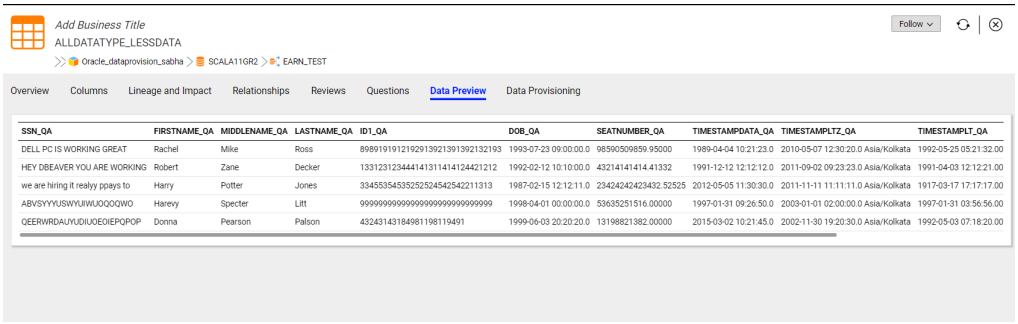

Alternatively, you can perform this task using the REST APIs. For more information, see the Preview Data for a Data Object topic in the Enterprise Data Catalog REST API Reference guide.

Data Provisioning

Data Provisioning is a process of transferring data from a source to target for further analysis and processing. Data Provisioning helps you quickly move data that you require in different source systems for ad-hoc analysis. When you perform data provisioning, the data gets transferred in a format that the target requires. For example, when you create a provisioning task with an Oracle source and Tableau target, the data gets transferred to the target in the Tableau Packaged Data Source (TDSX) file format.

A user who has access to the catalog can perform data provisioning. To perform data provisioning for assets in the resource, a user needs to have read, or read and write permissions for the resource in Catalog Administrator. You can create data provisioning tasks in the **Data provisioning** tab.

Enterprise Data Catalog uses a mapping and database connections from Informatica Intelligent Cloud Services to perform data provisioning.

You can create provisioning tasks for the following sources:

- Amazon Redshift
- Amazon S3
- Azure Data Lake Store
- Azure Microsoft SQL Server
- Azure Microsoft SQL Data Warehouse
- Hive
- JDBC
- Microsoft Azure Blob Storage
- Microsoft SQL Server
- Oracle
- Salesforce
- Snowflake
- Teradata

You can create provisioning tasks for the following targets:

- Amazon Redshift
- Amazon S3
- Azure Data Lake Store
- Azure Microsoft SQL Data Warehouse
- Azure Microsoft SQL Server
- Google Cloud Storage
- Google BigQuery
- HDFS
- Hive
- JDBC
- Microsoft Azure Blob Storage
- Microsoft SQL Server
- Oracle
- QlikView

- Snowflake
- Tableau Online
- Tableau Server
- Teradata

Source and Target Connection Properties

Enterprise Data Catalog displays the connection properties depending upon the source and target type that you select while creating the provisioning task. The source connections include Snowflake, Oracle, Microsoft SQL Server, Amazon S3, Amazon Redshift, Hive, Azure Microsoft SQL Server, Azure Microsoft SQL Data Warehouse, Teradata, Microsoft Azure Blob Storage, Salesforce, JDBC, Azure Data Lake Store, and Azure SQL Database. The target connections include Snowflake, Oracle, Microsoft SQL Server, Tableau, Amazon S3, Azure Data Lake Store, Google BigQuery, Google Cloud Storage, HDFS, JDBC, Microsoft Azure Blob Storage, Amazon Redshift, Teradata, Qlikview, Azure Microsoft SQL Data Warehouse, Hive, and Azure Microsoft SQL Server.

Amazon Redshift Connection Properties

The following table describes the connection properties for an Amazon Redshift source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Amazon Redshift source connection.
Jdbc URL	URL of the Amazon Redshift V2 connection. Enter the JDBC URL in the following format: `jdbc:redshift://<database_name><cluster_name>.<region_name>.redshift.amazonaws.com:<port_number>/<database_name>`
Master Symmetric Key	The 256-bit AES encryption key in the Base64 format when you enable client-side encryption.
Customer Master Key	The customer master key ID or alias name generated by AWS Key Management Service (AWS KMS).
Username	User name of the Amazon Redshift account.
Password	Password for the Amazon Redshift account.
Access Key ID	Access key to access the Amazon S3 bucket.
Secret access Key	Secret access key to access the Amazon S3 bucket.
S3 Bucket Name	Amazon S3 bucket name for staging the data. You can also specify the bucket name with the folder path. Use an Amazon S3 bucket in the same region as your Amazon Redshift cluster.
Batch Size	Minimum number of rows in a batch. Enter a number greater than 0. Default is 2000000.
Max Errors Per Batch Upload Insert	Number of error rows that causes an upload insert batch to fail. Enter a positive integer. Default is 1. If the number of errors is equal to or greater than the property value, the Secure Agent writes the entire batch to the error file.

Property	Description
WaitTime In Seconds For S3 File Consistency	Number of seconds to wait for the Secure Agent to make the staged files consistent with the list of files available on Amazon S3. Default is 0.
Transfer Manager Thread Pool Size	Number of threads to write data in parallel. Default is 10.
Minimum Upload Part Size	Minimum size of the Amazon Redshift object to upload an object. Default is 5 MB

Note: The S3 Bucket Name is an optional field.

The following table describes the connection properties for an Amazon Redshift target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Amazon Redshift target connection.
Jdbc URL	URL of the Amazon Redshift V2 connection. Enter the JDBC URL in the following format: `jdbc:redshift://<database_name><cluster_name>.<region_name>.redshift.amazonaws.com:<port_number>/<database_name>`
Master Symmetric Key	The 256-bit AES encryption key in the Base64 format when you enable client-side encryption.
Customer Master Key	The customer master key ID or alias name generated by AWS Key Management Service (AWS KMS).
Username	User name of the Amazon Redshift account.
Password	Password for the Amazon Redshift account.
Access Key ID	Access key to access the Amazon S3 bucket.
Secret access Key	Secret access key to access the Amazon S3 bucket.
S3 Bucket Name	Optional. Amazon S3 bucket name for staging the data.You can also specify the bucket name with the folder path. Use an Amazon S3 bucket in the same region as your Amazon Redshift cluster.
Batch Size	Minimum number of rows in a batch. Enter a number greater than 0. Default is 2000000.
Max Errors Per Batch Upload Insert	Number of error rows that causes an upload insert batch to fail. Enter a positive integer. Default is 1. If the number of errors is equal to or greater than the property value, the Secure Agent writes the entire batch to the error file.

Property	Description
WaitTime In Seconds For S3 File Consistency	Number of seconds to wait for the Secure Agent to make the staged files consistent with the list of files available on Amazon S3. Default is 0.
Transfer Manager Thread Pool Size	Number of error rows that causes an upload insert batch to fail. Enter a positive integer. Default is 1. If the number of errors is equal to or greater than the property value, the Secure Agent writes the entire batch to the error file.
Minimum Upload Part Size	Minimum size of the Amazon Redshift object to upload an object. Default is 5 MB.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Note: The S3 Bucket Name is an optional field.

Amazon S3 Connection properties

You can use Amazon S3 as a target when you create a provisioning task.

The following table describes the connection properties for an Amazon S3 source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Amazon S3 source connection.
Folder Path	The complete path to the Amazon S3 objects. The folder path must include the bucket name and the folder name. Ensure that you do not use a forward slash at the end of the folder path. For example, `<bucket name>/<my folder name>`
Account Region Name	Name of the region where the Amazon S3 bucket is available and for which you generate the customer master key ID.
Access Key	The access key ID used to access the Amazon account resources. Required if you do not use AWS Identity and Access Management (IAM) authentication. **Note:** Ensure that you have valid AWS credentials before you create a connection.
Secret Key	The secret access key used to access the Amazon account resources. The value is associated with the access key that uniquely identifies the account.
Master Symmetric Key	Provide a 256-bit AES encryption key in the Base64 format when you enable client-side encryption. You can generate a key using a third-party tool.

The following table describes the connection properties for an Amazon S3 target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Amazon S3 target connection.
Account Region Name	The name of the region where the Amazon S3 bucket is available and for which you generated the customer master key ID.
Folder Path	The complete path to the Amazon S3 objects. The folder path must include the bucket name and a folder name.
Access Key	The access key ID used to access the Amazon account resources. **Note:** Ensure that you have valid AWS credentials before you create a connection.
Secret Key	The secret access key used to access the Amazon account resources. This value is associated with the access key and uniquely identifies the account. You must specify this value if you specify the access key ID. Required if you do not use AWS Identity and Access Management (IAM) authentication.
Master Symmetric Key	The 256-bit AES encryption key in the Base64 format when you enable client-side encryption.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default. **Note:** The source asset replaces the target asset if the asset name exists in an Amazon S3 target.

Azure Data Lake Store Connection Properties

The following table describes the connection properties for an Azure Data Lake Store source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The Azure Data Lake Store source connection.
Client ID	The ID of your application to complete the OAuth Authentication in the Azure Active Directory (AD).
File System Name	The name of an existing file system in the Microsoft Azure Data Lake Storage Gen2 account.
Account Name	Microsoft Azure Data Lake Storage Gen2 account name or the service name.
Client Secret Key	The client secret key to complete the OAuth Authentication in the Azure AD.
File Format	Microsoft Azure Data Lake Storage Gen2 format options. Specify `Flat` as the file format type.

The following table describes the connection properties for an Azure Data Lake Store target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Azure Data Lake Store target connection.
Client ID	The ID of your application to complete the OAuth Authentication in the Azure Active Directory (AD).
File System Name	The name of an existing file system in the Microsoft Azure Data Lake Storage Gen2 account.
Account Name	Microsoft Azure Data Lake Storage Gen2 account name or the service name.
Client Secret Key	The client secret key to complete the OAuth Authentication in the Azure AD.
File Format	Microsoft Azure Data Lake Storage Gen2 format options. You can specify one of the following file format types: - Flat - Avro - Parquet
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Azure Microsoft SQL Data Warehouse Connection Properties

The following table describes the connection properties for an Azure Microsoft SQL Data Warehouse source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Azure Microsoft SQL Data Warehouse source connection.
Schema	Name of the schema in Azure Microsoft SQL Data Warehouse.
JDBC URL	Microsoft Azure Data Warehouse JDBC connection string. For example, enter the following connection string: `jdbc:sqlserver://<Server>.database.windows.net:1433;database=<Database>`
Username	User name to connect to the Microsoft Azure SQL Data Warehouse account. Provide AAD user name for AAD authentication.
Password	Password to connect to the Microsoft Azure SQL Data Warehouse account.
Account Name	Name of the Microsoft Azure Storage account to stage the files.

Property	Description
Account Key	Microsoft Azure Storage access key to stage the files.
Container Name	Microsoft Azure Blob Storage container name.

The following table describes the connection properties for an Azure Microsoft SQL Data Warehouse target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Azure Microsoft SQL Data Warehouse target connection.
Schema	Name of the schema in Azure Microsoft SQL Data Warehouse.
JDBC URL	Microsoft Azure Data Warehouse JDBC connection string. For example, enter the following connection string: `jdbc:sqlserver://<Server>.database.windows.net:1433;database=<Database>`
Username	User name to connect to the Microsoft Azure SQL Data Warehouse account. Provide AAD user name for AAD authentication.
Password	Password to connect to the Microsoft Azure SQL Data Warehouse account.
Account Name	Name of the Microsoft Azure Storage account to stage the files.
Account Key	Microsoft Azure Storage access key to stage the files.
Container Name	Microsoft Azure Blob Storage container name.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Azure Microsoft SQL Server Connection Properties

The following table describes the connection properties for an Azure Microsoft SQL Server source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Azure Microsoft SQL Server source connection.
Host Name	Name of the machine hosting the database server.
Port Number	Network port number used to connect to the database server. Default port number is 1433.
Database Name	Database name for the Microsoft SQL Server target.

Property	Description
Schema Name	Schema used for the Microsoft SQL Server connection.
Authentication Type	Authentication method to access Azure Microsoft SQL Server.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.

The following table describes the connection properties for an Azure Microsoft SQL Server target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Azure Microsoft SQL Server target connection.
Host Name	Name of the machine hosting the database server.
Port Number	Network port number used to connect to the database server. Default port number is 1433.
Database Name	Database name for the Microsoft SQL Server target.
Schema Name	Schema used for the Microsoft SQL Server connection.
Authentication Type	Authentication method to access Azure Microsoft SQL Server.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Google Cloud Storage Connection Properties

The following table describes the connection properties for a Google Cloud Storage target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Google Cloud Storage target connection.
Project ID	Specifies the project_id value present in the JSON file that you download after you create a service account. If you have created multiple projects with the same service account, enter the ID of the project that contains the bucket that you want to connect to.
Client Email	Specify the client email value present in the JSON file that you download after you create a service account.

Property	Description
Private Key	Specifies the private_key value present in the JSON file that you download after you create a service account.
File Format	Google Cloud Storage file format. You can specify one of the following file format types: - Flat - Avro - Parquet - JSON
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Google BigQuery Connection Properties

The following table describes the connection properties for a Google BigQuery target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Google BigQuery target connection.
Project ID	A unique identifier for the project. The project ID is composed of the project name and a randomly assigned number.
Storage Location	Path in Google Cloud Storage where you want to read or write data. You can either enter the bucket name or the bucket name and folder name. For example, enter`<bucket name> or <bucket name>/<folder name>`
Client Email	Specify the client email value present in the JSON file that you download after you create a service account.
Private Key	Specifies the private_key value present in the JSON file that you download after you create a service account.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

HDFS Connection Properties

The following table describes the connection properties for an HDFS target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The HDFS target connection.

Property	Description
Name node URL	The URI to access HDFS.
Local Path	A local file system path to read data from or write data to.
Cluster Config Directory	The directory that contains the Hadoop configuration files.
Username	Required to read data from HDFS. Enter a user name that has access to the single-node HDFS location to read data from or write data to.
File Format	File format options for a complex file target object.
File Directory	The directory location of one or more output files. Maximum length is 255 characters. If you do not specify a directory location, the output files are created at the location specified in the connection. If the directory is in HDFS, enter the path without the node URI. For example, `/user/lib/testdir` specifies the location of a directory in HDFS. The path must not contain more than 512 characters. If the file or directory is in the local system, enter the fully qualified path. For example, `/user/testdir` specifies the location of a directory in the local system.
File Name	Renames the output file. The file name is not applicable when you read or write multiple Hadoop Files V2s.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default. **Note:** The **Append Existing** option does not apply to the HDFS target. Use the **Create New Asset** option.

Hive Connection Properties

The following table describes the connection properties for a Hive source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Hive source connection.
Configuration Files Path	The directory that contains the Hadoop configuration files for the client.
JDBC URL	The JDBC URL to connect to Hive.
Username	The user name to connect to Hive in LDAP or None mode.
Password	The password to connect to Hive in LDAP or None mode.

The following table describes the connection properties for a Hive target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Hive target connection.
Configuration Files Path	The directory that contains the Hadoop configuration files for the client.
JDBC URL	The JDBC URL to connect to Hive.
Username	The user name to connect to Hive in LDAP or None mode.
Password	The password to connect to Hive in LDAP or None mode.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default. **Note:** The **Create New Asset** option does not apply to the Hive target. Use the **Append Existing** option.

JDBC Connection Properties

The following table describes the connection properties for a JDBC source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The JDBC source connection.
Host Name	Name of the machine that hosts the database server.
Connection URL	URL schema for the database.
Schema	Schema used for the JDBC connection.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Commit Interval	Interval in rows between commits. Default is 100.

The following table describes the connection properties for a JDBC target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The JDBC target connection.
Schema	Schema used for the JDBC connection.

Property	Description
Connection URL	URL schema for the database.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Commit Interval	Interval in rows between commits. Default is 100.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default. **Note:** The **Create New Asset** option does not apply to the JDBC target. Use the **Append Existing** option.

Microsoft Azure Blob Storage Connection Properties

The following table describes the connection properties for a Microsoft Azure Blob Storage source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The Salesforce source connection.
Container Name	Microsoft Azure Blob Storage container name.
Endpoint Suffix	Type of Microsoft Azure end-points. Default is `core.windows.net`
Account Name	Microsoft Azure Blob Storage account name.
Account Key	Microsoft Azure Blob Storage access key.
Number of concurrent connections to Blob Store	The number of concurrent connections to Blob Store to upload files. Default is 4.
Write Strategy	Write strategy to append block to a blob.
Blob Type	Type of blob. The following options are available: - Block Blob. Ideal for storing text or binary files, such as documents and media files. - Append Blob. Optimized for append operations, for example, logging scenarios.
File Format	Define the format of the file. Configure the following format options: - Delimiter: Delimiter character. You can configure other parameters such as comma, tab, colon, semicolon, or others. - Text Qualifier: Character to qualify text. You can configure other parameters such as single quote or double quote. - Escape: Escape character.

The following table describes the connection properties for a Microsoft Azure Blob Storage target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Microsoft Azure Blob Storage target connection.
Container Name	Microsoft Azure Blob Storage container name.
Endpoint Suffix	Type of Microsoft Azure end-points. Default is `core.windows.net`
Account Name	Microsoft Azure Blob Storage account name.
Account Key	Microsoft Azure Blob Storage access key.
Number of concurrent connections to Blob Store	The number of concurrent connections to Blob Store to upload files. Default is 4.
Write Strategy	Write strategy to append block to a blob.
Blob Type	Type of blob. The following options are available: - Block Blob. Ideal for storing text or binary files, such as documents and media files. - Append Blob. Optimized for append operations, for example, logging scenarios.
File Format	Define the format of the file. Configure the following format options: - Delimiter: Delimiter character. You can configure other parameters such as comma, tab, colon, semicolon, or others. - Text Qualifier: Character to qualify text. You can configure other parameters such as single quote or double quote. - Escape: Escape character.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Microsoft SQL Server Connection Properties

You can use Microsoft SQL Server as a source and target to create a provisioning task.

The following table describes the connection properties for a Microsoft SQL Server source:

Property	Description
Source Connection Name	Name of the source connection.
Source Connection Type	Type of the source connection. The Microsoft SQL Server source connection.
Host Name	Name of the machine hosting the database server.
Database	Database name for the Microsoft SQL Server source.
Authentication Type	Authentication type for the connection.

Property	Description
Schema	Schema used for the Microsoft SQL Server connection.
Port	Network port number used to connect to the database server. Default port number is 1433.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.

The table describes the connection properties for a Microsoft SQL Server target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Microsoft SQL Server target connection.
Host	Name of the machine hosting the database server.
Database	Database name for the Microsoft SQL Server target.
Authentication Type	Authentication type for the connection.
Schema	Schema used for the Microsoft SQL Server connection.
Port	Network port number used to connect to the database server. Default port number is 1433.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Oracle Connection Properties

You can use Oracle as a source and target to create a provisioning task.

The following table describes the connection properties for an Oracle source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The Oracle source connection.
Host Name	Name of the machine that hosts the database server.
Database Name	Database name for the Oracle source.

Property	Description
Schema	Schema used for the Oracle connection.
Port	Network port number used to connect to the database server. Default is 1521.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.

The following table describes the connection properties for an Oracle target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Oracle target connection.
Host Name	Name of the machine that hosts the database server.
Schema Name	Schema used for the Oracle connection.
Port Number	Network port number used to connect to the database server. Default is 1521.
Database Name	Database name for the Oracle source.
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

QlikView Connection Properties

The following table describes the connection properties for a QlikView target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The QlikView target connection.
Template File Path	The directory path to a sample QVX file from where the Secure Agent imports the Qlik metadata.
Target File Directory	The file path of the existing QVX file to which you want append or overwrite data. Ensure that the directory is located on the machine that hosts the Secure Agent.
Write Strategy	The operation type to write data to QVX file.

Property	Description
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Salesforce Connection Properties

The following table describes the connection properties for a Salesforce source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The Salesforce source connection.
Service URL	URL of the Salesforce service. Maximum length is 100 characters. For example: `https://login.salesforce.com/services/Soap/u/47.0`
Username	User name for the database login. The user name cannot contain a semicolon.
Password	Password for the database login. The password cannot contain a semicolon.
Security Token	Security token generated from the Salesforce application.

Tableau Online and Tableau Server Connection Properties

You can use Tableau as a target when you create a provisioning task.

The following table describes the connection properties for a Tableau target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Tableau target connection.
Site	The ID of the site on Tableau Server or Tableau Online where you want to publish the `.tdsx` file.
Connection URL	The URL of Tableau Server or Tableau Online to which you want to publish the `.tdsx` file.
Username	User name of the Tableau Server or Tableau Online account.
Password	Password for the Tableau Server or Tableau Online account.
Target Operation	Creates, appends, or overwrites the .hyper file on the local machine, Tableau Server, or Tableau Online.

Property	Description
Project Name	Name of the project within a specific site on Tableau Server or Tableau Online where you want to publish the Tableau .hyper file. By default, the Tableau V3 connection publishes the .hyper file to the default project on the site that you specify on Tableau Server. **Note:** You must enter the project name as Default to publish the .hyper file to the default project within a specific site on Tableau Server.
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

Teradata Connection Properties

The following table describes the connection properties for a Teradata source:

Property	Description
Source Connection Name	Name of the connection.
Source Connection Type	Type of the source connection. The Teradata source connection.
TDPID	The name or IP address of the Teradata database machine.
Database Name	The Teradata database name.
Username	Database user name with the appropriate read and write database permissions to access the database. If you select KRB5 as the authentication type, you must specify the Kerberos user name.
Password	Password for the database user name. If you select KRB5 as the authentication type, you do not need to specify the Kerberos user password.

The following table describes the connection properties for a Teradata target:

Property	Description
Select Target Type	Type of the target.
Target Connection	Type of the target connection. The Teradata target connection.
TDPID	The name or IP address of the Teradata database machine.
Database Name	The Teradata database name.
Username	Database user name with the appropriate read and write database permissions to access the database. If you select KRB5 as the authentication type, you must specify the Kerberos user name.
Password	Password for the database user name. If you select KRB5 as the authentication type, you do not need to specify the Kerberos user password.

Property	Description
Target Asset Name	Target asset name. Specify the asset name that you want to create in the target.
If Asset Exists	Specify if you want to create a new asset in the target, or append the asset to an existing asset in the target. The **Create New Asset** option is selected by default.

For more information about connections, see the Informatica Intelligent Cloud Services *Data Integration Connections* guide.

Creating Provisioning Task

Create a data provisioning task so that you can transfer the data from a source to target. You can create multiple provisioning tasks. You can create provisioning tasks for table assets. Before you create a provisioning task, you must have the necessary source and target connections created in Informatica Intelligent Cloud Services.

Before you create a provisioning task, ensure that you have met the prerequisites in the Data Preview and Provisioning Prerequisites topic.

Before you proceed with the data provisioning process, ensure that you have met the prerequisites in

1. From the **Search Results** page, open the asset that you want to transfer.

   The asset opens in the **Overview** tab.
2. Click **Data Provision** to open the tab.
3. Click **New Task**.

   The **Source Connection** section appears.
4. In the **Source Connection** section, enter the user credentials for the data source.
5. Click **Next**.

   The **Target Connection** section appears.
6. In the **Target Connection** section, select the target type from the **Select Target Type** menu.
7. Click **Select Connection**.

   The **Select Target Connection** dialog box appears.
8. Select the target connection based on your requirements, and then click **OK**.

   Based on the target connection type, the **Target Connection** section refreshes and properties for the target connection appear.
9. Specify the target connection details of a database to provision data to the target asset.
10. Click **Next**.

    The **Review** section appears.
11. In the **Review** section, review the configuration information. Optionally, click **Back** if you want to change the configuration information.
12. Click **Submit** to complete the task.


    For more information about data provisioning, see the Data Provisioning and Enable Data Provisioning topics in the *Catalog Administrator* guide.

Alternatively, you can perform these tasks using the REST APIs. For more information, see the List Provisioning Tasks for a Task ID, Submit a Provisioning Task and Delete a Provisioning Task topics in the Enterprise Data Catalog REST API Reference guide.

Viewing Provisioning Task History

After you create a provisioning task, you can monitor the status of the task in the **Provision Task History** section. The section displays all the tasks that you create and task information in columns, such as Target, Status, and Submitted By.

The following image displays the **Provision Task History** section:

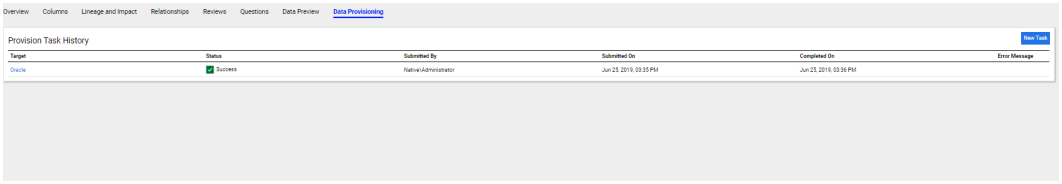

CHAPTER 10

Configure Application

This chapter includes the following topics:

- Application Configuration Overview, 168
- Configure Application Settings , 168
- Search Prefilter Configuration , 173

Application Configuration Overview

You can configure Enterprise Data Catalog to change the search filters based on the asset type, system attributes, or custom attributes. You can create new search prefilters and edit search prefilter properties. You can also change the order of the search filters that appear in the search results page and the order of the search prefilters. Use the **Application Configuration** page to configure the search filters and the search prefilters.

Configure Application Settings

The Application Configuration page displays the search configuration settings in different tabs, such as Custom Attributes, System Attributes, Asset Types, Filter Settings, and Search Prefilter Settings.

You can select the attributes and data types that you wish to display as search filters. You can add custom attributes that you want to display in the **Overview** tab. You can specify the search priority for the attributes. You can also create and customize the search prefilters that appear in the search box.

After you configure the application, Enterprise Data Catalog displays the search filters in the search results page and the search prefilters in the search box based on the application settings that you configure.

You can view the Application Configuration page only if the catalog administrator assigns the **Catalog Privileges: Application Configuration** privilege in the Informatica Administrator tool. For more information about privileges and permissions, see the *Informatica Administrator Reference for Catalog* guide.

Configuring Asset Types


The Asset Types tab helps you configure the data types that you want to display as search filters. Use the configured data types to refine the search.

1. Click the **Application Configuration** icon ( ).

   The **Application Configuration** page appears.

2. Click **Asset Types**.

   The list of asset types appears as shown in the following image:

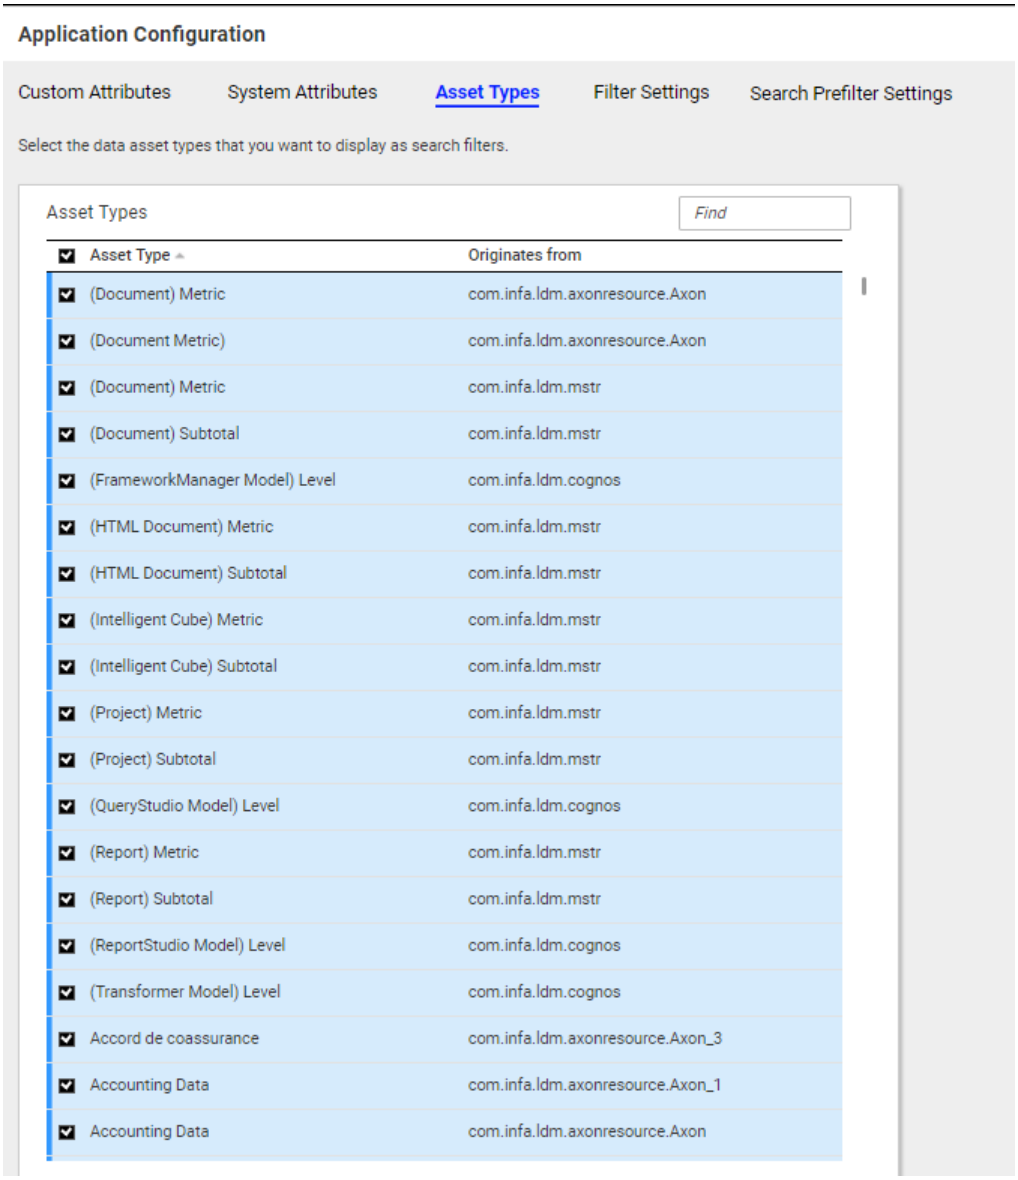

3. Select the required asset types from the **Asset Types** section.

4. Click **Save**.

   Enterprise Data Catalog adds the selected data types to the **Asset Type** list on the **Filter by** panel.

   Note: You cannot search for the assets in the search results page if you clear to remove the assets types from the asset types list.

Configuring System Attributes


The System Attributes tab helps you configure the system attributes that you want to display as search filters. Use the configured system attributes to refine the search.

1. Click the **Application Configuration** icon ( ).

   The **Application Configuration** page appears.

2. Click **System Attributes**.

   The list of available system attributes appears as shown in the following image.

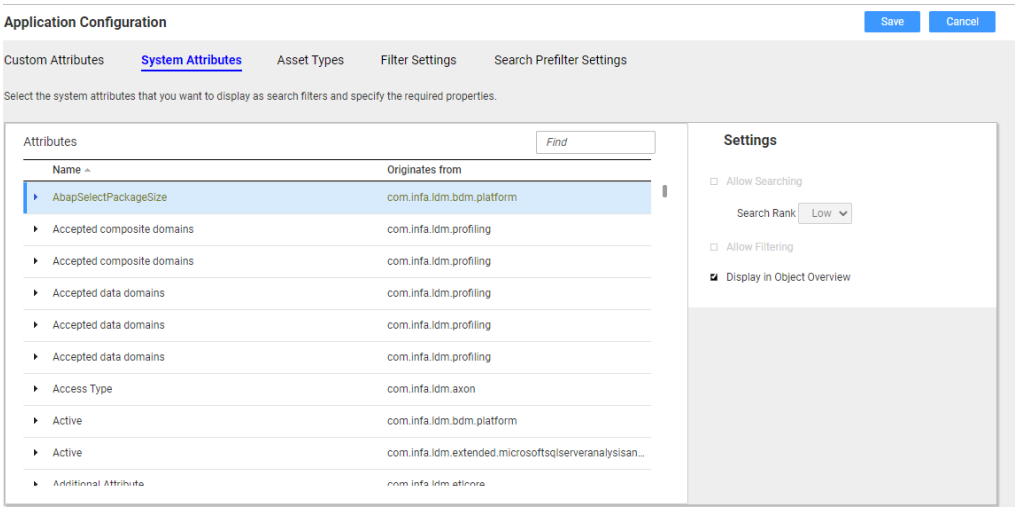

3. Select the required system attributes and select the following details for each attribute based on your requirements:

   - **Display in Object Overview**. Displays the attribute in the **System Attributes** section on the **Overview** tab.
   - **Allow Searching**. Searches based on the attribute. You can specify the search priority for the attribute in the **Search Rank** list by selecting Low or High.
   - **Allow Filtering**. Allows you to make the attribute a search filter on the **Filter** panel.
   - **Allow Sorting** . Allows you to sort the assets based on the attribute.

   Note: The allow sorting option does not apply to the multi-valued system attributes.

4. Click **Save**.


   The selected system attributes appear on the **Filter** panel.

Configuring Custom Attributes

The Custom Attributes tab helps you configure the custom attributes that you want to display as search filters. You also add custom attributes that were recently created into the Catalog. Use the configured custom attributes to refine the search.

1. Click the **Application Configuration** icon ( ).

   The **Application Configuration** page appears and a list of available custom attributes appears in the **Custom Attributes** tab as shown in the following image.

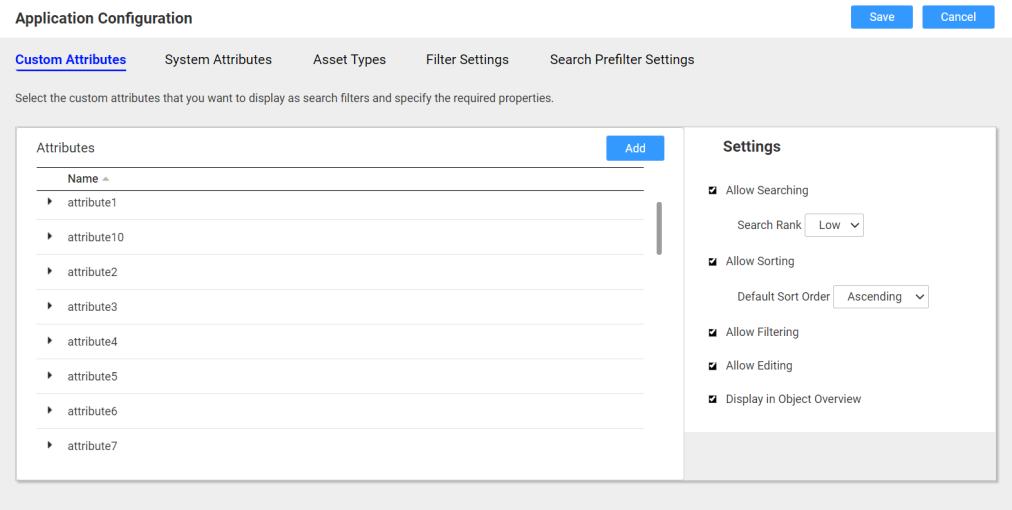

2. Select the required custom attributes and select the following details for each attribute based on your requirements:

   - **Allow Searching**. Searches based on the attribute. You can specify the search priority for the attribute in the **Search Rank** list by selecting one of the following options:

     - **Low**

     - **High**

   - **Display in Object Overview**. Displays the attribute in the different sections depending on the type of the custom attribute on the **Overview** tab.

   - **Allow Filtering**. Allows you to make the attribute a search filter on the **Filter** panel. For custom attributes that are numeric, you can select the range from the **Filter Type** list to specify the range of values for the filter.

   - **Allow Editing**. Allows you to edit the properties of the custom attribute. You can choose to allow or disallow editing of custom attributes. If you disallow editing, the attribute is read-only and you can't change the value during the import or export process. By default editing of custom attributes is true.

   - **Allow Sorting** . Allows you to sort the assets based on the attribute. You can specify the sorting order for the attribute in the **Default Sort Order** list by selecting one of the following options:

     - **Ascending**

     - **Descending**

   Note:

   - By default, the sort order option is Ascending.

- The allow sorting option does not apply to custom attributes of rich text and multi-valued types.

3. Click **Save**.

Configuring Filter Settings


The Filter Settings tab helps you customize the search filters that you view in the **Filter By** panel of the search results page. The Filter Settings tab displays the list of available filters that are expanded by default in the **Filter By** panel.

1. Click the **Application Configuration** icon ( ).

   The **Application Configuration** page appears.

2. Click **Filter Settings**.

   The list of available filters appears as shown in the following image:

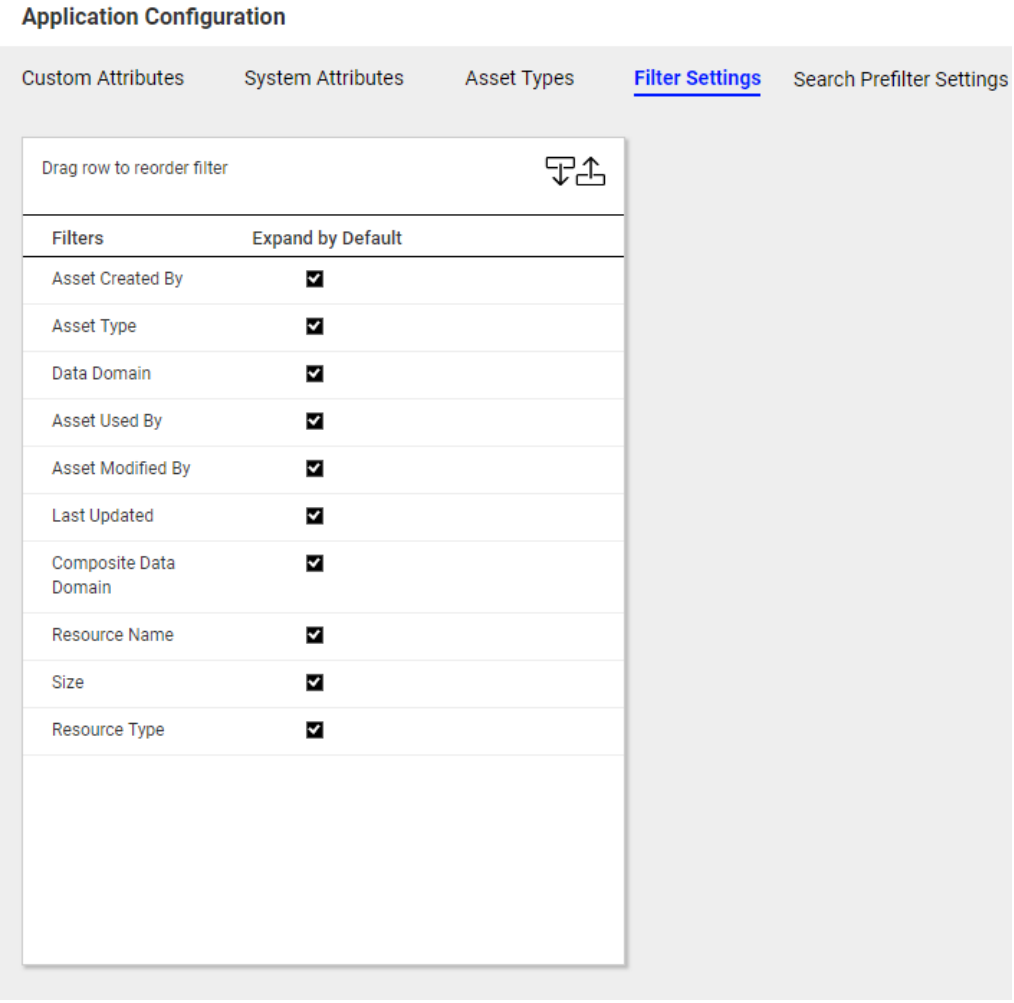

3. To change the order of the search filters, select a filter and then click the Move up or Move down icon ( ). Optionally, you can select a search filter, and then drag the filter to change the order.
4. Clear the check boxes if you want to collapse the search filters in the **Filter** panel.
5. Click **Save**.

Search Prefilter Configuration

You can use the **Search Prefilter Settings** page to set up the search prefilters that you want to view in the **Search Results** page.

You can create search prefilters to save the search filter criteria. After you create a search prefilter, you can edit the search prefilter properties in the **Search Prefilter Properties** section. The **Search Prefilter Properties** section displays the name of the prefilter, filters used to create the search prefilter, users and groups that have permission to view the search prefilters, the owner of the selected prefilter, and the order that the search prefilter appears in the search box.
A user who created a search prefilter can edit the prefilter. You might want to edit the search prefilter to change the name of the prefilter, select or clear search filters for the search prefilter, and revise the view permissions for the search prefilter. You can edit the search prefilters that you create, and disable or enable the default search prefilters.

You can also delete search prefilters that you no longer use. When you delete a search prefilter, you delete the search filter settings along with the search prefilter. You can delete search prefilters that you have created, but not the system search prefilters. You can simultaneously delete multiple search prefilters.

In addition, you can change the order in which the search prefilters appear in the search box.

Alternatively, you can perform this task using the REST APIs. For more information, see the List the Search Tabs, List the Definition for a Search Tab, and Changing the Search Tab Order topics in the *Enterprise Data Catalog REST API Reference guide*.

Creating Search Prefilters

Apart from the default search prefilters available in the search box, you can create search prefilters based on your requirements.

1. In the **Search Prefilter Settings** page, click **New Prefilter**.

   The **Create Prefilter** section appears along with the search filters.
2. Enter the name of the search prefilter in the **Prefilter Name** field.
3. From the search filter boxes, select the filter options that you want use to create the search prefilter.
4. Click **Next**.

   The **Prefilter Permissions** section appears.
5. In the **Prefilter Permissions** section, you can configure access permissions for users and user groups on search prefilters created in Enterprise Data Catalog. Specify permissions to view the search prefilters in the search box by selecting one of the following options:
   - **Visible to all**. Assigns permissions to all users and groups.
   - **Visible to users or groups selected below**. Assigns permissions to specific users and groups from the list of users and user groups.
6. Click **Save**.

Alternatively, you can perform this task using the REST APIs. For more information, see the Creating a New Search Tab topic in the Enterprise Data Catalog REST API Reference guide.

Editing Search Prefilter Properties

After you create a search prefilter, you might want to edit the prefilter to change the name of the prefilter, select or clear search filters for the prefilter, and revise the view permissions for the prefilter.

1. In the **Search Prefilter Settings** page, select the prefilter that you want to edit.
2. In the **Search Prefilter Properties** section, click **Edit**.

   The **Create Prefilter** section appears.
3. In the **Create Prefilter** section, edit the prefilter name, and select or clear search filters.
4. Click **Next**.

   The **Prefilter Permissions** section appears.
5. In the **Prefilter Permissions** section, edit the search prefilter permissions based on your requirements.
6. Click **Save**.

Alternatively, you can perform this task using the REST APIs. For more information, see the Update a Search Tab and Update the Search Tab Order topics in the Enterprise Data Catalog REST API Reference guide.

Rearranging Search Prefilters

You can change the order in which the search prefilters appear in the search box.

1. Click on , and then click **Application Configuration**.
2. Click **Search Prefilter Settings**.

   The list of available search prefilters appears.
3. To change the order of the search prefilters, select a search prefilter name and then click the Move up or Move down icon ( ). Optionally, you can select a search prefilter name, and then drag it to change the order.

   Note: The topmost search prefilter will be displayed as the default prefilter.
4. Click **Save**.


Configuring Search Default Prefilters in the Application Configuration Interface

You can control the availability of the default search prefilters in the Search Prefilter Settings tab of the Application Configuration.

Before you edit the default search prefilters, you must have administrator privileges.

1. To view the default search prefilters, navigate to the Search Prefilter Settings tab of the Application Configuration.
2. Select the prefilter to disable or enable.
3. To set the mode of the prefilter, select the Disable or Enable option.
4. Click **Save**.

The following image displays the Disable option for the selected search prefilter:

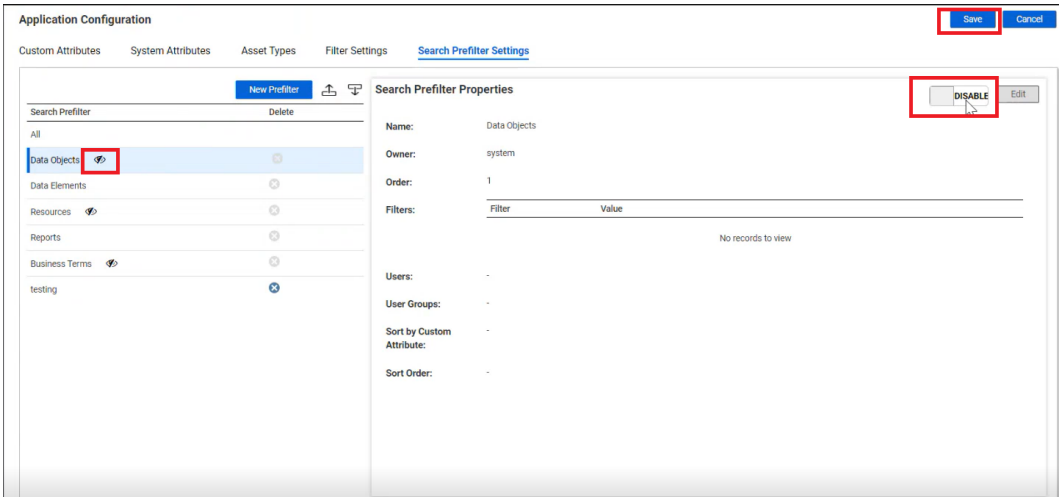

A symbol appears next to the deselected prefilters that indicates the status. You cannot view the deselected prefilters in the Search Home and Search Results pages.

CHAPTER 11

Catalog Backup and Log Collection Utilities

This chapter includes the following topics:

- Overview, 176
- Accessing Utilities, 177
- Performing a Catalog Backup, 177
- Log Collection Utilities, 178
- Monitoring Utility Run Status, 179

Overview

The utilities help you to back up the catalog and collect the required log files to analyze and troubleshoot issues that you might encounter when you use Enterprise Data Catalog.

Catalog Backup

You can backup the catalog data if you want to troubleshoot issues based on the data in the catalog without stopping the Catalog Service.

Service Logs

The logs for the Enterprise Data Catalog services (Catalog Service, Informatica Cluster Service, EBF history, and PhoneHome), MongoDB, Apache Solr, Nomad service and scan jobs, Apache ZooKeeper (ZK), and PostgreSQL help you analyze and troubleshoot issues related to metadata ingestion in the catalog, issues related to search, or issues related to service failures and stability.

Resource Logs

Resource logs help you troubleshoot issues related to failure of specific resources.

Accessing Utilities

You can use the backup and log collection utilities after you install and configure Enterprise Data Catalog. Make sure that you use a user account configured with Informatica Administrator privileges to access the utilities.

To access the utilities, perform the following steps:

1. Click on the Help menu, and click **Log Interface**.
2. In the login page, enter the user name and password. The **Monitoring Job Details** page appears by default.
3. Click **Back Up Catalog** to access catalog backup, or click **Collect Service Logs** or **Collect Resource Logs** to access the service and resource log collection utilities.

Performing a Catalog Backup

You can back up the catalog without stopping the Catalog Service. Also, you need not stop using Enterprise Data Catalog when you take a backup.

You can back up the catalog to a directory of your choice. You can perform the backup from the **Catalog Backup Settings** page.
When you perform a backup, you can view the catalog data and the catalog configuration details using the Enterprise Data Catalog applications. However, you cannot perform any configuration changes, updates, or add new resource or assets in Enterprise Data Catalog. The restricted tasks during backup include running resources, creating new resources, adding enrichments to resources, creating new connection assignments, and performing bulk imports.

Perform the following steps to back up the catalog:

1. Click **Back Up Catalog** from the left panel. The **Catalog Backup Settings** page appears.
2. Configure the following optional properties as required:
   a. In the **Backup Path** text box, enter the path to the directory where you want the catalog backup to be saved. By default, the backup is saved in `<INFA_HOME>/logs/<NODE_NAME>/services/CatalogService/<SERVICE_NAME>/JobsStore/`.

      Note: The content in the default backup directory is retained only for 24 hours. Also, the content in the default directory is lost when you restart the Catalog Service. Make sure that you specify a separate directory to store the backup or download the backup from the default directory.

   b. Select the store that you want to backup.
3. Click **Download** to start the backup job. The **Monitoring Job Details** page appears from where you can download the backup.

Note: When you perform a catalog backup, the status of running resource scans changes to System Cancelled. The scan resumes after the backup job is completed.

The backup file is encrypted using the Advanced Encryption Standard (AES) algorithm.

Log Collection Utilities

Enterprise Data Catalog provides utilities that you can use to collect logs from the Catalog Service, Informatica Cluster Service, and specific resources.

You can collect logs to analyze and troubleshoot issues related to services and resources if they do not work as expected. The utilities do not require you to stop the services or resources when the logs are collected. After you run the utilities to collect the logs, make sure that you download the logs within 24 hours. The logs are removed from the directory after 24 hours. Also, if you recycle the Catalog Service after you run the REST APIs, the logs are removed from the directory.

Collect Enterprise Data Catalog Service Logs

You can collect Enterprise Data Catalog service logs to identify and troubleshoot issues related to Enterprise Data Catalog services. You can use the **Collect Service Logs** page to collect the service logs.

To collect service logs, perform the following steps:

1. Click **Collect Service Logs** on the left panel. The **Collect Service Logs** page appears.
2. From **Select Logs**, choose any of the following options for which you want to collect the logs:
   MONGO

   Collect MongoDB logs on data ingestion.

   SOLR

   Collects Apache Solr logs to troubleshoot issues with data asset search.

   NOMAD

   Collects logs related to the Nomad orchestration service and scan jobs.

   ZK

   Collects logs related to the Apache ZooKeeper service.

   POSTGRES

   Collects logs related to PostgreSQL database.

   SERVICE

   Collects logs related to the Catalog Service, Informatica Cluster Service, EBF history, and PhoneHome.

   ALL

   Collect logs for all the above listed items.
3. From the **Start Date** box, select the date from which you want to collect the service logs.
4. From the **End Date** box, select the date till which you want to collect the service logs.
5. Click **Download**. The **Monitoring Job Details** page appears from where you can download the log file.

Collect Resource Logs

You can collect specific resource Nomad logs and Data Integration logs for profiling to identify and troubleshoot issues related to resources. You can use the **Collect Resource Logs** page to collect the logs.

To collect resource logs, perform the following steps:

1. Click **Collect Resource Logs** on the left panel. The **Collect Resource Logs** page appears.

2. Select **SCANNER**, **PROFILING**, or both the options to collect the logs.
3. From the **Start Date** box, select the date from which you want to collect the logs for the resource.
4. In the **Resource** box, click **Add item** to specify the names of the resources for which you want to collect the log files.
5. Click **Download**. The **Monitoring Job Details** page appears from where you can download the log file.

After you download and extract the log files, the resource log files appear in the <resource name> directory in the Informatica logs directory.

Note: If there are no resources corresponding to the resource name that you specified, the resource log collection job fails. Click **Log Location** to download the log file.

Monitoring Utility Run Status

You can monitor the status of the catalog backup and log collection utility runs that you initiated, on the **Monitoring Job Details** page. You can also download the logs and the backup from this page.

Click **Monitoring** on the left panel to launch the **Monitoring Job Details** page.
The page lists the status of the utility runs using the following labels:

- Submitted
- Running
- Completed
- Failed

You can click **Refresh** to refresh the **Monitoring Job Details** page with the updated status.

To download the required log or backup, click the **Download** link present in the **Result** column for the job.

If a job fails, it displays the **Failed** status. You can click the **Log Location** link in the **Log URL** column for the job to view the log generated for the job failure.

Part II: Analytics

This part contains the following chapters:

- Data Asset Analytics , 181
- Analyze Dashboard, 185
- Analyze Reports, 205
- Configure Analytics Application , 234
- Data Flow Analytics, 240
- Analyze Mapping Dashboard, 243

CHAPTER 12

Data Asset Analytics

This chapter includes the following topics:

- Data Asset Analytics Overview, 181
- Accessing Data Asset Analytics, 183
- Business Example, 184

Data Asset Analytics Overview

Use Data Asset Analytics to optimize the data asset value in the catalog by using analytics on the data asset inventory, asset enrichment, and user collaboration.

After you configure Data Asset Analytics for Enterprise Data Catalog, the **Data Asset Analytics** tab is enabled in Enterprise Data Catalog. See the *Informatica 10.5 Installation for Enterprise Data Catalog* guide for more information about configuring Data Asset Analytics for Enterprise Data Catalog.

You can use the **Dashboard** and **Reports** pages in the **Data Asset Analytics** tab to analyze the catalog data.

You can directly connect to Data Asset Analytics and create reports to use data asset events in business intelligence tools. The data asset events include information on the user logins, searches, asset inventory over the time, asset changes, asset configuration scan history, user collaboration, asset enrichment, asset lineage, and asset impact.

You can also use the out of the box dashboards in Data Asset Analytics for analysis on user adoption, asset inventory, asset enrichment, collaboration, and data value. Each dashboard comes with real-time, pertinent key metrics, trend charts, and filters for quick analysis.

Data Asset Analytics provides you options to analyze the catalog data from different perspectives based on your requirement. As the catalog owner, you might be interested in knowing which resources are frequently used, what enrichments are most commonly associated with assets, or what proportion of assets are critical to your enterprise. Answers in the form of reliable, analytical data for these questions help you take decisions to enhance the catalog experience for data analysts or business users, increase the business adoption rate, and optimize the value of data assets in your enterprise.

Data Asset Analytics addresses the following key areas related to asset analytics in the catalog:

Available Assets

You can analyze the number of available assets, asset types, resources, and resource types during a specified period of time.

Available Users and User Adoption Rate

You can view the number of users who have access to the critical assets in the catalog and the number of active users who regularly access the catalog. You can also view the user adoption rate in the catalog that indicates the number of users among the provisioned users who accessed the catalog.

Searches and Average Searches

You can view the strings that were searched for the most and the average number of searches performed by users.

Accessed Resources and Assets

You can view the most accessed resources and assets in the catalog.

Assets with Business Term and Data Domain Association

You can view the users who performed data asset curation tasks in the catalog. Curation is the process of accepting and rejecting data domains for assets.

Collaborators

You can view the users who collaborated the most using reviews, ratings, questions, and answers on the assets in the catalog.

Resource Scan History


You can view the details about the history of resource scan settings.

Asset Data Value

You can assign values to resources, asset enrichments, and collaborations in the catalog. You can then view the charts that show you the analytical summary of the assets based on the values assigned to them. You can use these charts to identify the proportion of assets and resources in the catalog that are critical to you.

Data Asset Analytics User Interface

The following image shows the user interface of Data Asset Analytics with the **Dashboard** page open:

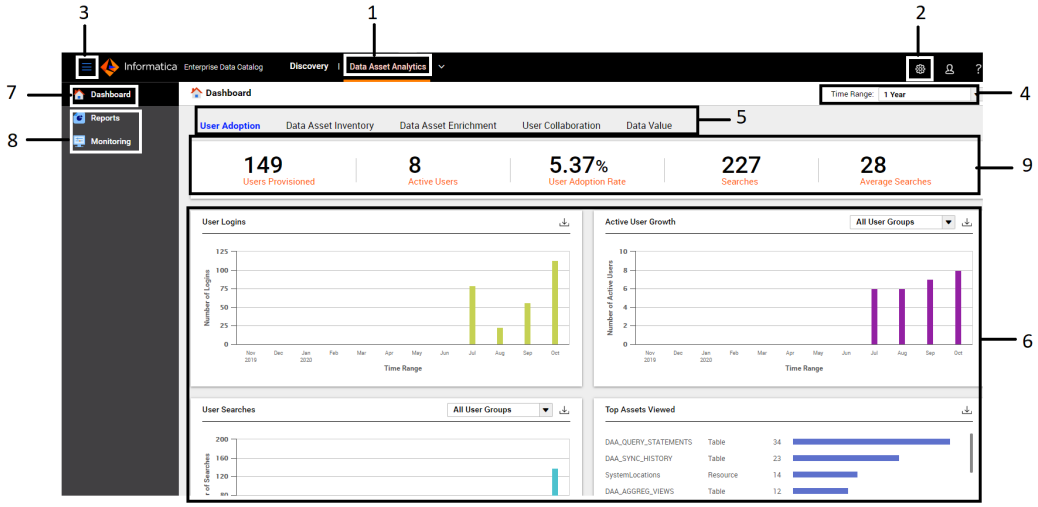

1. **Data Asset Analytics** tab to analyze the catalog data with dashboard and reports
2. Customize Data Asset Analytics application settings
3. Hide or display page names

4. Change the time range to view the dashboard
5. Dashboard tabs
6. Charts on the tab
7. Return to the **Dashboard** page
8. Open the **Reports** or **Monitoring** page
9. Key metrics of the dashboard tab

Accessing Data Asset Analytics

You can access Data Asset Analytics from the Enterprise Data Catalog home page.

Before you access Data Asset Analytics, make sure that the Informatica administrator has enabled Data Asset Analytics for Enterprise Data Catalog.

Note: After you enable Data Asset Analytics, you must set the `LdmCustomOptions.ingest.store.events.on.reindex.bool` custom property as true for the Catalog Service, and then re-index the Catalog Service to synchronize data asset events.

See the *Creating a Catalog Service* section in the *Informatica Installation for Enterprise Data Catalog* guide for more information.

You must also make sure that the Informatica administrator has configured the required privileges for you to access Data Asset Analytics.

See the *Configuring Privileges in Catalog Service for Data Asset Analytics* section in the *Informatica Administrator Reference for Enterprise Data Catalog* for more information.

To log in to Data Asset Analytics, perform the following steps:

1. Open a browser.
2. In the **Address** field, type the URL for the Enterprise Data Catalog login page in the following format:

   ```
   http://<host>:<port>/ldmcatalog
   ```

   The host is the gateway node host name. The port is the Informatica Catalog Service port number.


   - Alternatively, on the **Services and Nodes** tab of Informatica Administrator, select the Catalog Service, and then click the service URL to launch Enterprise Data Catalog from Informatica Administrator.
3. On the **Enterprise Data Catalog** login page, type the user name and password.

   Use the same log in credentials that you used to log in to the Catalog Administrator.
4. Click **Log In**.

   The Enterprise Data Catalog home page appears.

5. On the Enterprise Data Catalog home page, click **Data Asset Analytics**.

   The **Data Asset Analytics Dashboard** page appears as shown in the following image:

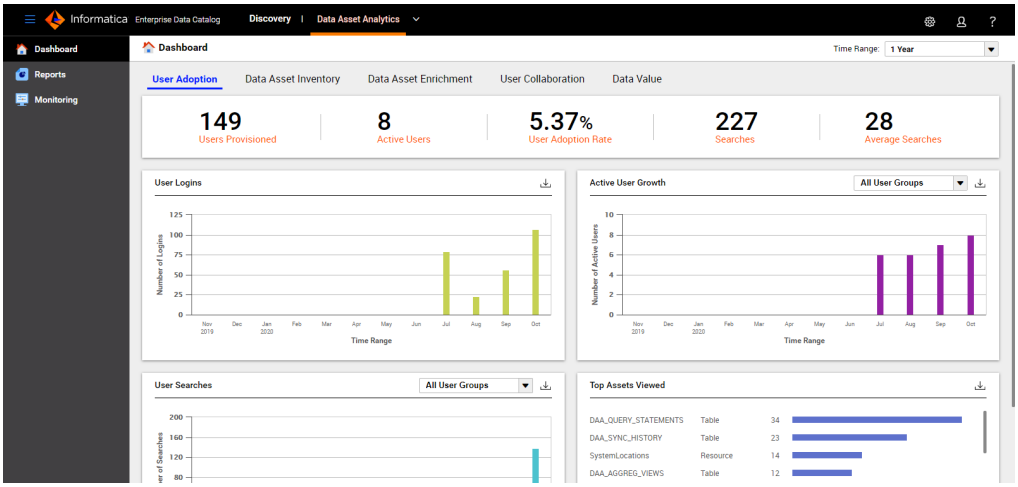

Business Example

You are a catalog user who is asked to analyze the usage of data assets in the catalog based on specific requirements. The outcome of the analysis needs to be exported to a third-party reporting application to customize the data and map the assets to the source data. The report is presented to the data stewards to identify the enhancements that need to be made in the enterprise to implement efficiency and availability for the most used data sources. The challenge that you face is to analyze the large volume of assets in your catalog.

The following table lists the specific analytical requirements and the corresponding feature in Data Asset Analytics that helps you to accomplish the tasks:

Requirements	Data Asset Analytics Features
Find out the count of assets and resources that were added to the catalog over a particular period of time. Download the analytical report in a format that can be exported to any third party reporting application for customization and data mapping.	To view the statistical reports on the asset count, asset growth, and asset changes, you can use the **Data Asset Inventory** tab. To view the report information based on the different time range, you can use the **Time Range** option. You can then download the report in CSV format to use it in any third-party reporting applications.
Identify the different ways with which the data assets were enriched.	To view the statistical reports on all asset enrichments, you can use the **Data Asset Enrichment** tab. To view the report based on a type of enrichment, you can use the **All Enrichment Types** option.
Identify the users who contributed to the crucial data assets.	To view information about users who contributed to data assets, you can create a report of type **User Collaboration**. To view the top users who contributed to data assets and top assets with collaboration, you can use the User Collaboration tab on the **Dashboard** page.

CHAPTER 13

Analyze Dashboard

This chapter includes the following topics:

- Analyze Dashboard Overview, 185
- Analyzing Dashboard by Time Range, 186
- Dashboard Tabs, 186
- User Adoption , 188
- Data Asset Inventory , 189
- Data Asset Enrichment, 191
- User Collaboration, 193
- Data Value, 194


Analyze Dashboard Overview

Use the dashboard to analyze the statistical and analytical summary of the catalog. The dashboard contains several out of the box charts that you can customize.

The information that you view on each dashboard tab varies based on the tab that is open. By default, the **Dashboard** page opens with the **User Adoption** tab. The **Dashboard** page displays analytical charts in different tabs. The dashboard includes tabs such as the User Adoption, Data Asset Inventory, Data Asset Enrichment, User Collaboration, and Data Value.

Note: If you disable Data Asset Analytics after enabling it, you might see duplicate data asset events or missing events in Data Asset Analytics after you re-index the Catalog Service.

The following image displays the sample **Dashboard** page with **User Adoption** tab open:

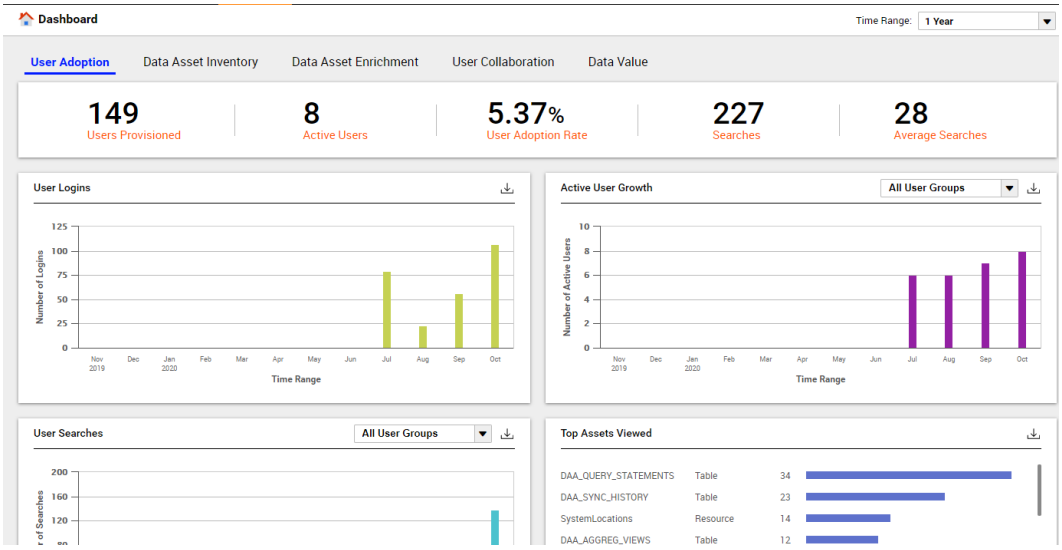

Analyzing Dashboard by Time Range

You can customize and view the dashboard tabs on the **Dashboard** page based on the time range that you specify. When you select a time range option from the **Dashboard** page, the time range option applies to all the dashboard tabs. By default, the **1 Year** time range is selected.

You can click the **Time Range** drop-down list to select any of the following options to view the statistical information and charts:

- 1 Month. Displays the details for the past one month from the current date.
- 3 Months. Displays the details for the past three months from the current date.
- 1 Year. Displays the details for the past one year from the current date.
- From Beginning. Displays all the statistical reports for the catalog data, beginning from 01/01/2010.
- Custom. Displays the details based on the date range specified.

Dashboard Tabs

The **Dashboard** page contains out of the box analytical dashboards that you can view to understand the catalog data from different perspectives. The page displays key metrics at the top and key charts at the bottom of each tab that you view. You can view the charts based on the required time range.

The following tabs on the **Dashboard** page list the details:

User Adoption

View the key metrics and charts on this tab to analyze the users accessing the catalog. The key metrics show statistical information such as number of users who have access to the catalog, number of active users, number of searches, and user adoption rate. The key charts show analytical details such as the number of user logins, number of users added, number of searches performed by users, and the list of top 25 assets in the catalog based on the maximum number of views.

Data Asset Inventory

View the key metrics and charts on this tab to analyze the catalog based on the resources and assets scanned or created during the specified time range and available at the end of the specified time range. The key metrics show statistical information such as the number of resources, number of assets, and number of asset and resource types created and available during the specified time range in the catalog. The key charts show analytical details such as the top 15 resource types based on the number of resources of a specific type, asset and resource growth over a specified period of time, and the number of assets that had a change after they were added to the catalog.

Data Asset Enrichment

View the key metrics and charts on this tab to analyze the catalog based on the available assets that are enriched with business titles, associated with data domains, and assets for which you can view the lineage and impact diagram. The key metrics show statistical information such as the number of business terms and data domains available in the catalog, percentage of available assets associated with business terms and data domains, and percentage of available assets that include lineage and impact information. You can customize the charts based on the assets with business titles, business description, assets with lineage and impact details, and assets with all enrichments.

User Collaboration

View the key metrics and charts on this tab to analyze the catalog based on the assets with collaboration details available in the catalog. The key metrics show statistical information such as the number and percentage of available assets with collaboration, number and percentage of users collaborating, number of available questions, and percentage of available responses to questions. The key charts show analytical details such as the number of available collaboration activities across all resources, the percentage of total resources with available collaboration details based on specified metrics, the list of top users who have collaborated, and the list of available assets with the maximum collaboration by the users.


Data Value

View the key metrics and charts on this tab to analyze the catalog based on the value that you assigned to resources, asset enrichment, and collaboration. You can hover over key metrics to understand how the data value is calculated. The charts show the change in values over a specified time range and the usage value of Enterprise Data Catalog features based on their usage over a period of time. For more information about data values and configuring data values, see the *Data Value* and the *Application Configuration* sections.

User Adoption

The **User Adoption** tab displays analytical charts and statistics for the user logins and searches performed in the catalog.

The following image shows a sample **User Adoption** tab with the key metrics highlighted:

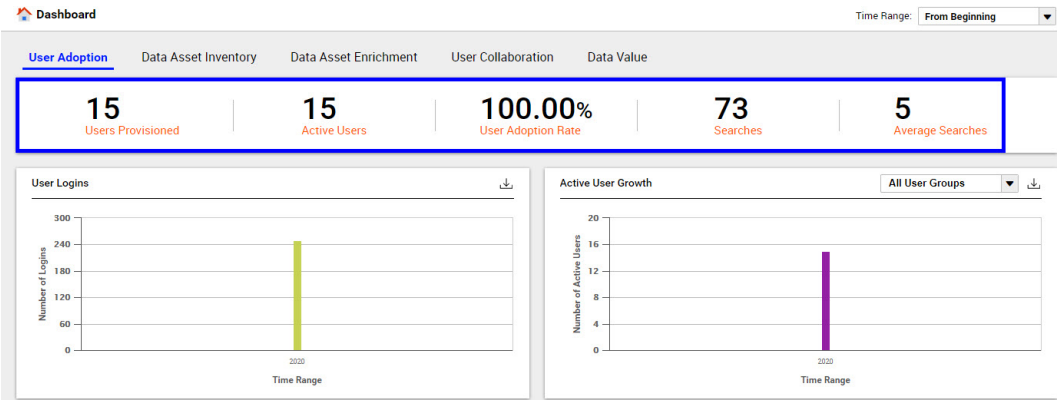

User Adoption Key Metrics

You can view the following key metrics on the **User Adoption** tab:

Users Provisioned

Displays the count of the total number of users configured to access the catalog from the time when Data Asset Analytics was configured.

Active Users

Displays the count of the total number of active users who have logged in to the catalog at least once in the specified time range.

User Adoption Rate

Displays the percentage of configured users who accessed the catalog in the specified time range.

Searches

Displays the total number of searches performed by all users in the specified time range.

Average Searches

Displays the average number of searches performed by active users in the specified time range.

User Adoption Charts

Note: You cannot view the user logins and user searches information if Data Asset Analytics is disabled even after you upgrade from any previous version.

You can analyze the following charts on the **User Adoption** tab:

User Logins

The chart displays the total number of users who logged in during the specified time range. You can move your mouse pointer on the bar graph to view the count of user logins. The X axis of the chart represents the time range and the Y axis represents the total number of user logins.

Active User Growth

The chart displays the total number of users who were active from the time you configured Data Asset Analytics. You can move your mouse pointer on the bar graph to view the count of users. The X axis of

the chart represents the time range and the Y axis represents the total number of active users. Click the **All User Groups** drop-down list to customize and view the charts for a specific user group.

User Searches

The chart displays the total number of searches performed by the users during the specified time range. You can move your mouse pointer on the bar graph to view the exact count of searches. The X axis of the chart represents the time range and the Y axis represents the total number of searches. Click the **All User Groups** drop-down list to customize and view the charts for a specific user group.

Top Assets Viewed

The chart displays a list of the top 25 assets in the catalog based on the maximum number of views.

The chart includes the following details:

- Name of the asset
- Type of asset
- A numeral that indicates the number of times the asset was viewed.
- A horizontal bar graph to compare the values.

Note: To see a list of all assets viewed, you can download the chart in CSV format.


Downloading the Chart Data

For charts that provide the  option, you can click  to download the chart in CSV format. You can use the downloaded chart in third-party reporting tools to add or enhance reporting details based on your requirements.

Data Asset Inventory

The **Data Asset Inventory** tab displays analytical charts and statistics for the resources and assets created and available during the specified time range in the catalog.

The following image shows a sample **Data Asset Inventory** tab with the key metrics highlighted:

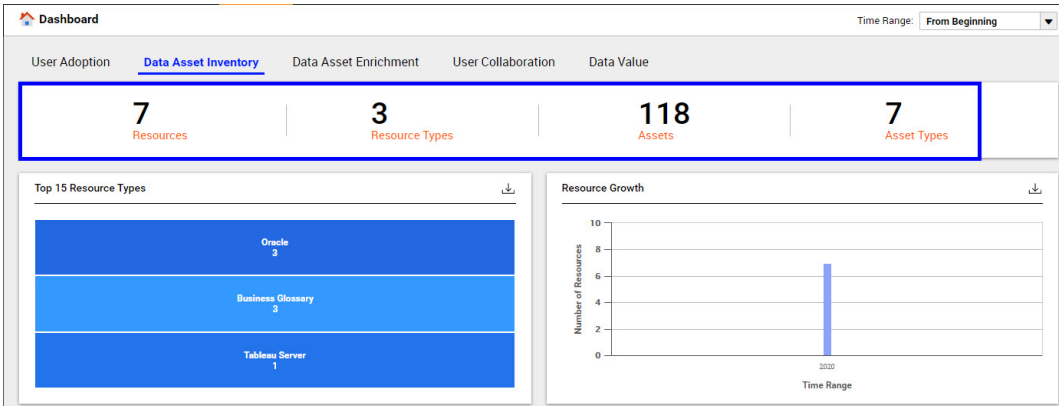

Data Asset Inventory Key Metrics

You can view the following key metrics on the **Data Asset Inventory** tab:

Resources

Displays the total number of resources scanned and available in the catalog during the specified time range. The key metric does not include the system resources.

Resource Types

Displays the total number of resource types available in the catalog during the specified time range. The key metric does not include the system resource types.

Assets

Displays the total number of assets from resources and system resources available in the catalog during the specified time range. The key metric includes the number of resources but does not include the number of system resources.

Asset Types

Displays the total number of asset types available in the catalog during the specified time range. The key metric includes the number of resource types but does not include the number of system resource types.

Data Asset Inventory Charts

You can view the following charts on the **Data Asset Inventory** tab:

Top 15 Resource Types

The chart displays the top 15 resource types in descending order based on the total number of resources of the same type in the catalog.

Resource Growth

The chart displays the total number of resources added to the catalog from the time you configured Data Asset Analytics. You can move your mouse pointer on the bar graph to view the exact count of resources. The X axis of the chart represents the time range and the Y axis represents the total number of resources.

Note: The **Resource Growth** and **Top 15 Resource Types** charts do not include the system resources.

Asset Growth

The chart displays the total number of assets from resources and system resources added to the catalog from the time you configured Data Asset Analytics. You can move your mouse pointer on the bar graph to view the exact count of assets. The X axis of the chart represents the time range and the Y axis represents the total number of assets. Click the **All Resources** drop-down list to select a specific resource for which you want to view the chart.

Asset Changes

The chart displays the total number of assets from resources and system resources that had changes in the data source during the specified time range. You can move your mouse pointer on the bar graph to view the exact count of assets. The X axis of the chart represents the time range and the Y axis represents the total number of assets with changes. Click the **All Resources** drop-down list to select a specific resource for which you want to view the chart. The chart includes a legend to represent the asset changes as shown in the following image: 

Note: The **Asset Growth** and **Asset Changes** charts do not include the count of system resources, but the charts include the count of assets within system resources when you do not select a specific resource from the **All Resources** drop-down list.

Downloading the Chart Data


For charts that provide the option, you can click to download the chart in CSV format. You can use the downloaded chart in third-party reporting tools to add or enhance reporting details based on your requirements.

Data Asset Enrichment

Use the **Data Asset Enrichment** tab in the dashboard to view the summary of the asset enrichments from Enterprise Data Catalog.

You can view the summary of asset enrichments such as the business description, business term association, classifications, asset certification, data domain association, and people association. The tab displays analytical charts and statistics based on asset enrichment in different panels. The information that you view in the panels depend on the time range that you specify.

The following image shows a sample **Data Asset Enrichment** tab with the key metrics highlighted:

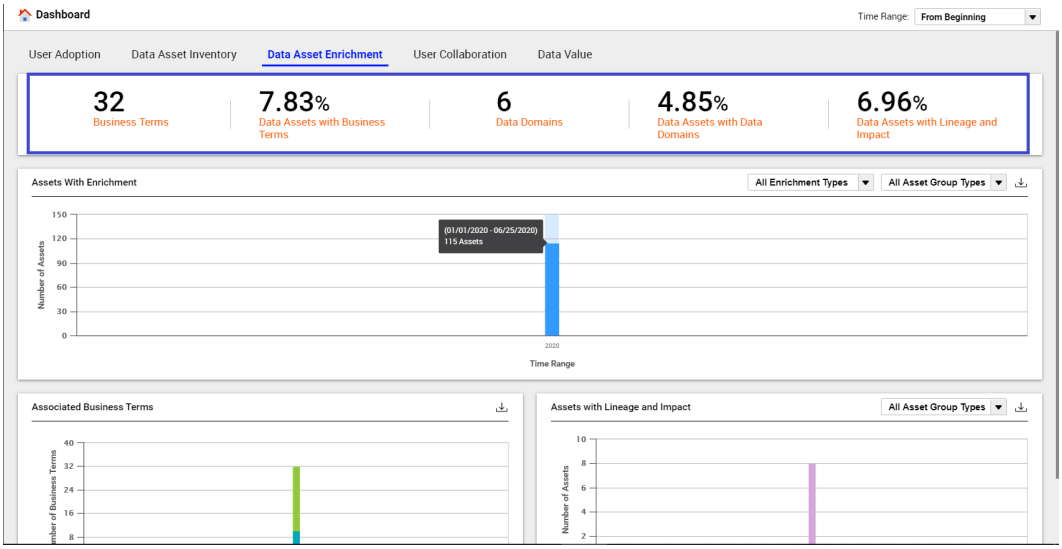

Data Asset Enrichment Key Metrics

You can view the following key metrics on the **Data Asset Enrichment** tab:

Business Terms

Displays the count of business terms that are available in the catalog during the specified time range.

Data Assets with Business Terms

Displays the percentage of assets available in the catalog that have at least one available association with business terms during the specified time range. You can view the business term association for tables, views, and columns.

Data Domains

Displays the count of unique available data domains that are associated with at least one column or field assets available in the catalog during the specified time range.

Data Assets with Data Domains

Displays the percentage of available columns or field assets for which data domains are either inferred or accepted during the specified time range.

Data Assets with Lineage and Impact

Displays the percentage of available assets that include lineage information or lineage and impact information during the specified time range. You can view the lineage and impact information for tables, views, and columns.

Data Asset Enrichment Charts

The tab displays asset enrichment information in different types of charts. The charts visually display the asset enrichment activities across asset types, such as tables, views, and columns in the catalog. You can download each chart in the CSV format.

You can view the following charts on the **Data Asset Enrichment** tab:

Assets with Enrichment

The Y axis of the chart represents the number of assets with enrichments in the catalog and the X axis represents the time range. The chart displays vertical bars that represent the number of assets with enrichments in the catalog for a particular time range. You can hover over the vertical bars in the chart to view details, such as the total count of assets with enrichments and the time when the asset was enriched. The vertical bars vary based on the time range that you specify. Click the **All Enrichment Types** drop-down list to view the chart for a specific enrichment.

Associated Business Terms

The Y axis of the chart represents the number of active business terms in the catalog and the X axis represents the time range. The chart displays vertical bars that represent the number of business terms and the percentage of associated business terms from the time you configured Data Asset Analytics. You can hover over the vertical bar in the chart to view details such as the total count of business terms and percentage of associated business terms from the time you configured Data Asset Analytics. The chart also displays a legend as shown in the following image:



The legend represents the data that you view on the vertical bars.

Assets with Lineage and Impact

The Y axis of the chart represents the number of assets in the catalog and the X axis represents the time range. The chart displays vertical bars that represent the number of assets with lineage and impact information from the time you configured Data Asset Analytics. You can hover over the vertical bar in the chart to view details such as the total count of assets that include lineage or lineage and impact information from the time you configured Data Asset Analytics.


Downloading the Chart Data

For charts that provide the option, you can click to download the chart in CSV format. You can use the downloaded chart in third-party reporting tools to add or enhance reporting details based on your requirements.

User Collaboration

Use the **User Collaboration** tab in the dashboard to view the summary of the collaboration activities that users perform in Enterprise Data Catalog Discovery.

The collaboration activities include questions, answers, and reviews that users provide for assets in the catalog. The tab displays analytical charts and statistics based on collaboration activities in different panels. The information that you view in the panels depend on the time range that you specify.
The following image shows a sample **User Collaboration** tab with the key metrics highlighted:

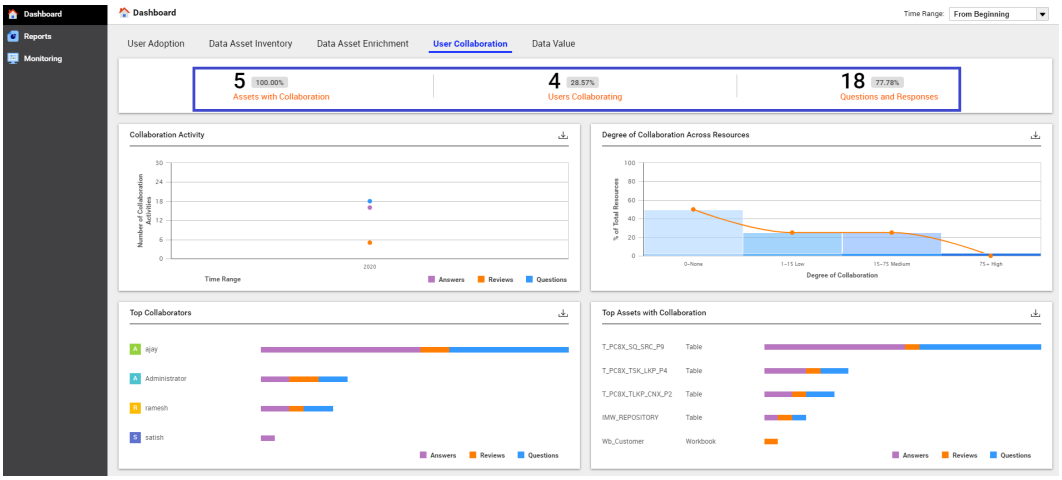

User Collaboration Key Metrics

You can view the following key metrics on the **User Collaboration** tab:

Assets with Collaboration


Displays the count and percentage of available assets that include questions, answers, or reviews available in the catalog during the specified time range.

Users Collaborating

Displays the count and percentage of users that are collaborating across the catalog during the specified time range.

Questions and Responses

Displays the count of questions asked about assets in the catalog and percentage of questions that were answered by users in the catalog during the specified time range.

For example, 

. In this image, 18 questions were asked and 77.78% questions were answered out of the total questions.

User Collaboration Charts

The tab displays the user collaboration information in different types of charts. The charts visually display information based on the collaboration activity, degree of collaboration, top user collaborators, and top assets with collaboration. You can download each chart in CSV format. The charts include a legend to represent the collaboration activities as shown in the following image:



You can view the following charts with collaboration information on the **User Collaboration** tab:

Collaboration Activity

The Y axis of the chart represents the number of collaboration activities in the catalog and the X axis represents the time range. The chart displays dotted lines that represent the different collaboration activities. The dotted lines change based on the time range that you specify.

Degree of Collaboration Across Resources

The Y axis of the chart represents the percentage of total resources in the catalog and the X axis represents the degree of collaboration. The chart categorizes the collaboration activities across the resources based on various degrees of collaboration. The degree of collaboration is classified as low, medium, and high range. By default, the chart displays collaboration activities ranging between 1 to 15 under the low range, between 16 to 75 under the medium range, and above 75 under the high range. The chart also displays a line with pointers to represent various degrees of collaboration. You can hover over the pointers to view the percentage of resources that fall under each degree of collaboration. You can also customize the degree of collaboration value range on the **Application Configuration** page.

Top Collaborators

The chart displays the names of the top collaborators in the catalog. The chart also displays horizontal bars that represent the total number and type of collaboration activity each collaborator performed. You can hover over the horizontal bar in the chart to view the total count of each collaboration activity a user performed. You can view a maximum of eight top collaborators in the chart.

Top Assets with Collaboration

The chart displays the top asset names and the type of assets that users have collaborated on. The chart also displays horizontal bars that represent the total number and types of collaboration activities that were performed on an asset. You can view a maximum of eight top assets with collaboration in the chart.

Downloading the Chart Data


For charts that provide the  option, you can click  to download the chart in CSV format. You can use the downloaded chart in third-party reporting tools to add or enhance reporting details based on your requirements.

Data Value

Use the **Data Value** tab to assign the value to assets in the catalog and analyze the catalog based on the value that you assigned to resource types, asset enrichment, feature usage, and collaboration.

The tab displays analytical charts and statistics based on the data value in different panels. You can use these charts to identify the proportion of assets and resources in the catalog that are critical to you. The information that you view in the panels depend on the time range that you specify.

The following image shows a sample **Data Value** tab with the key metrics highlighted:

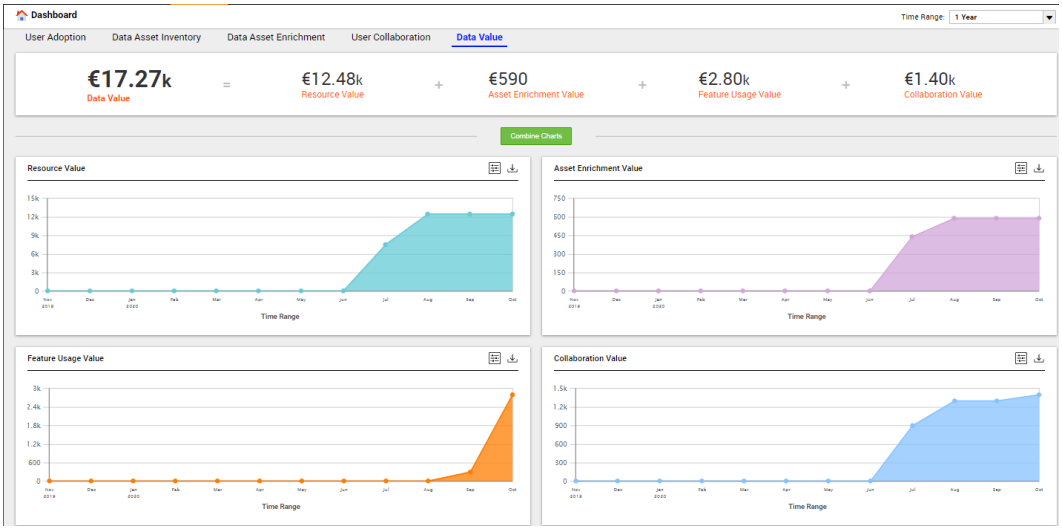

Data Value Key Metrics

You can view the following key metrics on the **Data Value** tab:

Data Value

Displays the sum of values that you assigned to resources, asset enrichment, feature usage, and collaboration.

Resource Value

Displays the value for all the resources by adding the adding the following values:

- Multiply the specified resource type value with the total number of assets selected based on the asset keywords specified.
- Multiply the value specified for all other resource types with the total number of assets selected based on the asset keywords specified.

Note: You can specify the asset keywords in the **Asset Keywords for Resource Value Calculation** text box in **Application Configuration**.

Asset Enrichment Value

Displays the value that you assigned to all the asset enrichment activities in the catalog. The asset enrichment value is calculated based on the value that you specify for number of asset enrichment activities.

Feature Usage Value

Displays the value of Enterprise Data Catalog features based on their usage and configured values.

Collaboration Value

Displays the value that you assigned to all the collaboration activities in the catalog. The collaboration value is calculated based on the value that you specify for number of collaboration activities.

Data Value Charts

The tab displays the data value in statistical and graphical format. The charts show the change in values over a specified time range. You can view multiple data value charts into a single view using the **Combine Chart** option.

You can view the following charts with data value information on the **Data Value** tab:

Resource Value

The chart displays the total value calculated for all resource types based on the assets in the catalog over a specified period of time. The Y axis of the chart represents the values ranging from lowest through highest. The X axis of the chart represents the time range. You can click  (**Open Value Calculator**) to calculate and assign a value to the resource types. You can specify the list of assets to be selected as asset keywords in the application configuration. You can hover over the value indicators on the chart to view the assigned value for a particular time range.

Asset Enrichment Value

The chart displays values assigned to asset enrichment activities over a specified period of time. The Y axis of the chart represents the values ranging from lowest through highest. The X axis of the chart represents the time range. You can use the calculator  (**Open Value Calculator**) to calculate and assign a value to the asset enrichment activities. You can hover over the value indicators on the chart to view the assigned value on a particular time range.

Feature Usage Value

The chart displays the value of Enterprise Data Catalog features based on their usage over a period of time. The X axis of the chart displays the time range in months and the Y axis displays the usage value of features. You can move the mouse pointer over the value indicators on the chart to view the value for that time range. The chart uses the values you assign for the features in the **Feature Usage Value** calculator dialog box. You can access the dialog box by clicking  (**Open Value Calculator**) on the top left part of the chart.

Collaboration Value

The chart displays values assigned to collaboration activities over a specified period of time. The Y axis of the chart represents the values ranging from lowest through highest. The X axis of the chart represents the time range. You can use the calculator  to calculate and assign a value to the collaboration activities. You can hover over the value indicators on the chart to view the assigned value on a particular time range.

Downloading the Chart Data

For charts that provide the  option, you can click  to download the chart in CSV format. You can use the downloaded chart in third-party reporting tools to add or enhance reporting details based on your requirements.

Calculating the Resource Value

Use the resource calculator to estimate and analyze the total value of resources based on the assets selected from the catalog. The assets are selected based on the asset keywords that you specify in application configuration for resource value calculation.


To calculate the resource value, provide a value in the **Resource Value Calculator**. Provide a value ranging between the minimum and maximum value limit. The administrator can customize the minimum and maximum range of the value calculator on the **Application Configuration** page.

You can assign a value to all the resource types or you can choose to assign values to individual resource types.

To assign a value to resource types, perform the following steps:

1. From the **Resource Value** section, click the value calculator icon .
   The **Resource Value Calculator** window appears.
2. In the **Search and add resource types** text box, type the name of the required resource type for which you want to assign a value. The list of resource types that match with what you type, appears.
3. From the list of resource types, select the required resource type. The resource type is added as a resource type for which you can allocate a value.
4. Optional. Repeat steps 2 and 3 to add more resource types as required.
5. Use the value slider to drag and assign a value to all the resource types. If you do not assign a value specifically for a resource, the resource calculator considers the value that you assign to resource types using the **All Others** slider.
6. Click **Save** to save the value instantly or click **Preview** to preview the value before saving. Optionally, click the ( ) icon to reset to the previously saved value.

The following image displays the sample **Resource Value Calculator** dialog box:

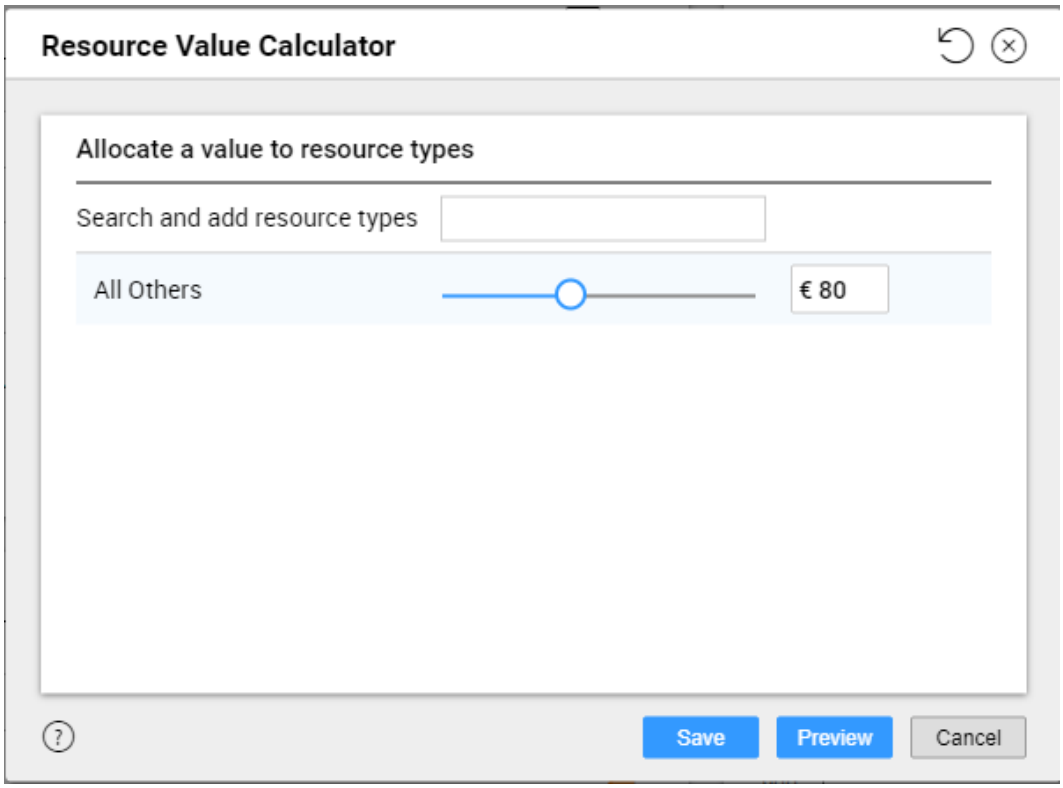

Example

The following table lists the resources and assets in the catalog along with the count of the assets:

Resource Type	Asset Type	Count
Oracle	Table	100
Business Glossary	Term	50
Oracle	Column	2000
Informatica Platform	Mapping	1000
All	File	500

You need to calculate the resource value based on the assets listed in the table using the following values:

- Oracle. $10
- Business Glossary. $5
- OneDrive $10
- Informatica Platform. $25
- All file-type resources that include JSON files, Excel files, and XML files. $10

To configure the resource value calculation, specify the asset types listed as **Asset Keywords for Resource Value Calculation** in **Application Configuration**. In addition, select the **Currency** as **US Dollar** and specify the required values in the minimum and maximum fields for the **Value Calculator**.

To calculate the resource value, open the **Resource Value Calculator** and specify the following values for the resource types in the calculator:

- **Oracle**. $10
- **Business Glossary**. $5
- **Informatica Platform**. $25.
- **All Others**. $10

The **Resource Value Calculator** calculates the resource value by adding the following numbers::

- Oracle. 100 tables * $10+ 2000 columns *$10
- Business Glossary. 50 terms * $5
- Informatica Platform. 1000 mappings * $25
- All Others. 500 file type resources * $10

Calculating the Asset Enrichment Value

Use the **Asset Enrichment Value** calculator to estimate and analyze the value of all the asset enrichment activities in the catalog.


To calculate the asset enrichment value, provide a value in the **Asset Enrichment Value Calculator**. Provide a value ranging between the minimum and maximum value limit. You can assign values to all the enrichment activities.
By default, the asset enrichment value calculator displays the value ranging from 0 through 100. The Administrator can customize the minimum and maximum range of the value calculator on the **Application Configuration** page.

The **Asset Enrichment Value Calculator** estimates the value of asset enrichment activities based on the following calculation: `(Number of Asset Enrichment Activities × User Specified Value)`

To assign values to enrichment activities, perform the following steps:

1. From the **Asset Enrichment Value** section, click the value calculator icon .
   The **Asset Enrichment Value Calculator** window appears.
2. In the **Allocate a Value to Data Enrichments** section, use the value sliders to drag and assign values to all the enrichment activities.
3. Click **Save** to save the value instantly or click **Preview** to preview the value before saving. Optionally, click the ( ) icon to reset to the previously saved value.

The following image displays the sample **Asset Enrichment Value Calculator** window:

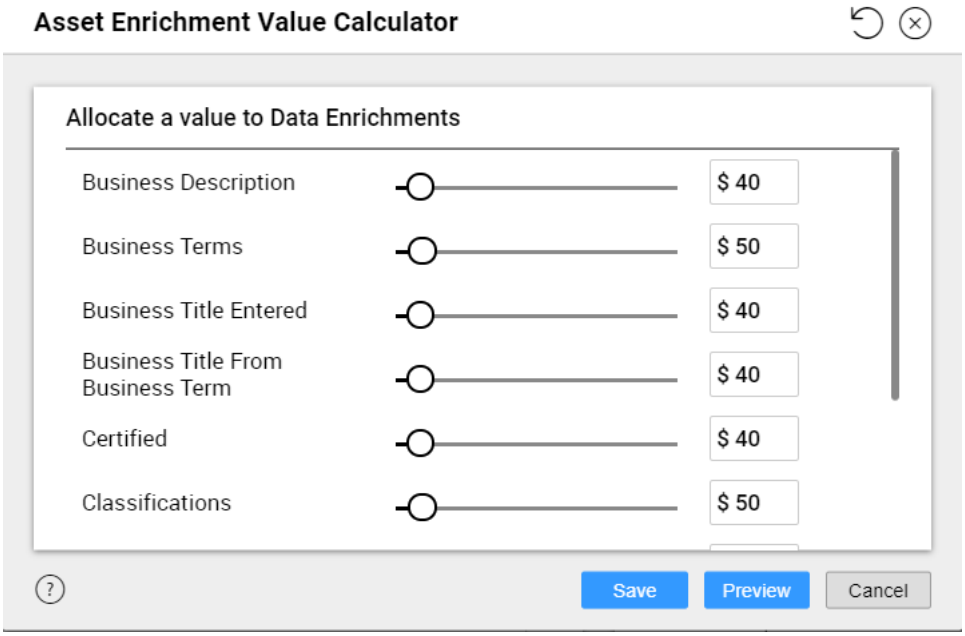

Example

The catalog includes assets with business description, business term, and data domain enrichments. The catalog includes two instances of each asset enrichment activity. You are asked to calculate the value of all the asset enrichment activities. To calculate the asset enrichment value, you open the **Asset Enrichment Value Calculator** and specify the following values for enrichment options in the calculator:

- **Business Description**. You provide 20 $ value.
- **Business Term**. You provide 30 $ value.
- **Data Domain**. You provide 40 $ value.

The **Asset Enrichment Value Calculator** estimates the value based on the values you specified with the following calculation:

`(Number of Asset Enrichment Activities × User Specified Value)`

In this example, the **Asset Enrichment Value** is 180 $.

The following table shows the details of the calculation:

Enrichment Type	Number of Instances	User Specified Value	Calculated Value
Business Description	2	20 $	40 $
Business Term	2	30 $	60 $
Data Domain	2	40 $	80 $
Total Value	-	-	180 $

Calculating the User Collaboration Value

Use the **Collaboration Value** calculator to estimate and analyze the value of all the user collaboration activities in the catalog.


To calculate the user collaboration value, provide a value in the **Collaboration Value Calculator**. Provide a value ranging between the minimum and maximum value limit. You can assign values to all the collaboration activities.
By default, the user collaboration value calculator displays the value ranging from 0 through 100. The administrator can customize the minimum and maximum range of the value calculator on the **Application Configuration** page.

The **Collaboration Value Calculator** estimates the value of user collaboration activities based on the following calculation: `(Number of User Collaboration Activities × User Specified Value)`

To assign values to collaboration activities, perform the following steps:

1. From the **Collaboration Value** section, click the value calculator icon  .
   The **Collaboration Value Calculator** window appears.
2. In the **Allocate a value to collaboration activities** section, use the value sliders to drag and assign values to all the collaboration activities.
3. Click **Save** to save the value instantly or click **Preview** to preview the value before saving. Optionally, click the () icon to reset to the previously saved value.

The following image displays the sample **Collaboration Value Calculator** window:

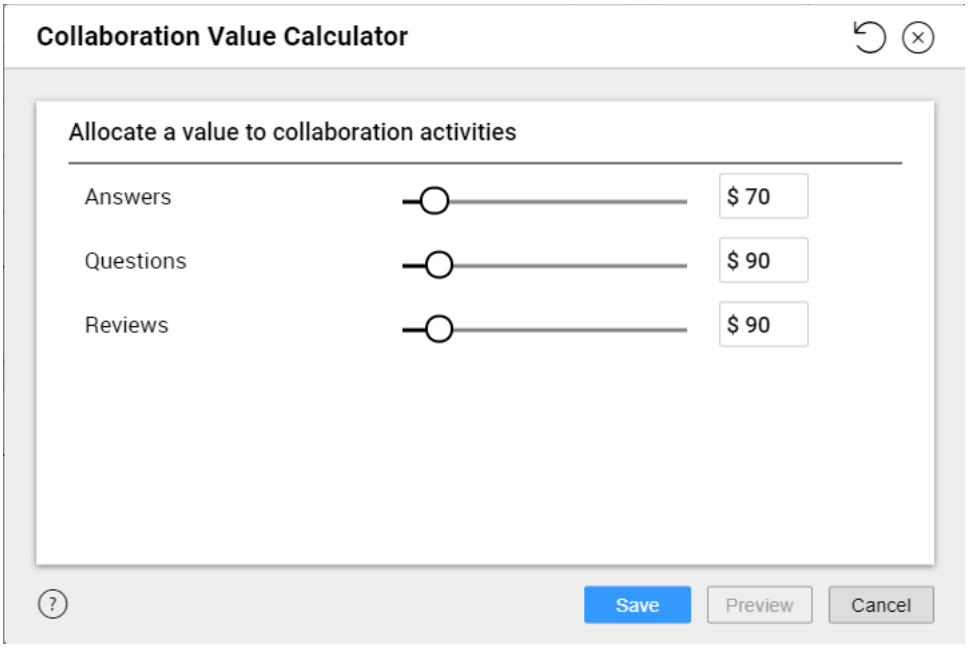

Example

The catalog includes assets with questions, answers, and reviews. The catalog includes three instances of each user collaboration activity. You are asked to calculate the value of all the user collaboration activities. To calculate the user collaboration value, you open the **Collaboration Value Calculator** and specify the following values for collaboration activities in the calculator:

- **Questions**. You provide 30 $ value.
- **Answers**. You provide 40 $ value.
- **Reviews**. You provide 50 $ value.

The **Collaboration Value Calculator** estimates the value based on the values you specified with the following calculation:

```
(Number of User Collaboration Activities × User Specified Value)
```

In this example, the **Collaboration Value** is 360 $.

The following table shows the details of the calculation:

Enrichment Type	Number of Instances	User Specified Value	Calculated Value
Business Description	3	30 $	90 $
Business Term	3	40 $	120 $
Data Domain	3	50 $	150 $
Total Value	-	-	360 $

Calculating the Feature Usage Value

Use the **Feature Usage Value** calculator to assign values of your choice to the features in Enterprise Data Catalog.

Data Asset Analytics uses the values to display the **Feature Usage Value** chart on the **Data Value** tab page. The **Feature Usage Value** chart displays the value of the Enterprise Data Catalog features based on their usage over a period of time.

The feature usage increases every time you access the feature for which you assigned a value. Repeated access to the feature from the same view does not add up the usage value for the feature. However, if you navigate away from the view and access the feature again, the usage value increases.


To assign values to features, perform the following steps:

1. On the **Feature Usage Value** chart, click  (**Open Value Calculator**).
   The **Feature Usage Value Calculator** dialog box appears.
2. Assign values as required for the following features in the **Allocate a value to Feature Usages** section:

Feature	Description
Change Summary	Summary of resource changes when there are changes to the source data associated with the resource after a scan.
Data Element Details	**Data Element Details** refers to the details included in an asset. For example, the following assets include the listed details in associated tabs: - A table asset displays the columns in the **Columns** tab. - A rule asset displays the list of tables linked to the rule in the **Where Used** tab. - A file asset displays the fields in the **Contains** tab.
Data Preview	Preview data using the **Data Preview** tab before you provision data.
Data Provisioning	Provision data for further analysis and processing using the **Data Provisioning** tab.
Data Quality	The **Data Quality** tab that displays the rules and scorecards for a tabular asset.
Keys	The **Keys** tab that displays the details of the unique keys and foreign keys for assets such as tables and files.
Lineage and Impact	The **Lineage and Impact** tab that shows the end-to-end flow for an asset.
Metric Groups	The **Metric Groups** column on the **Data Quality** > **Scorecards** tab page that displays the names of the metric groups.
Overview	The **Overview** tab that displays the asset details.
Questions	The **Questions** section on the **Overview** tab for an asset.
Relationships	The **Relationships** view that shows the relationship between an asset and other assets in the catalog.
Reviews	The **Reviews** section on the **Overview** tab for an asset.

3. Click **Save** to save the value instantly or click **Preview** to preview the value before saving. Optionally, click the () icon to reset to the previously saved value.

The following image displays the sample **Feature Usage Value Calculator** dialog box:

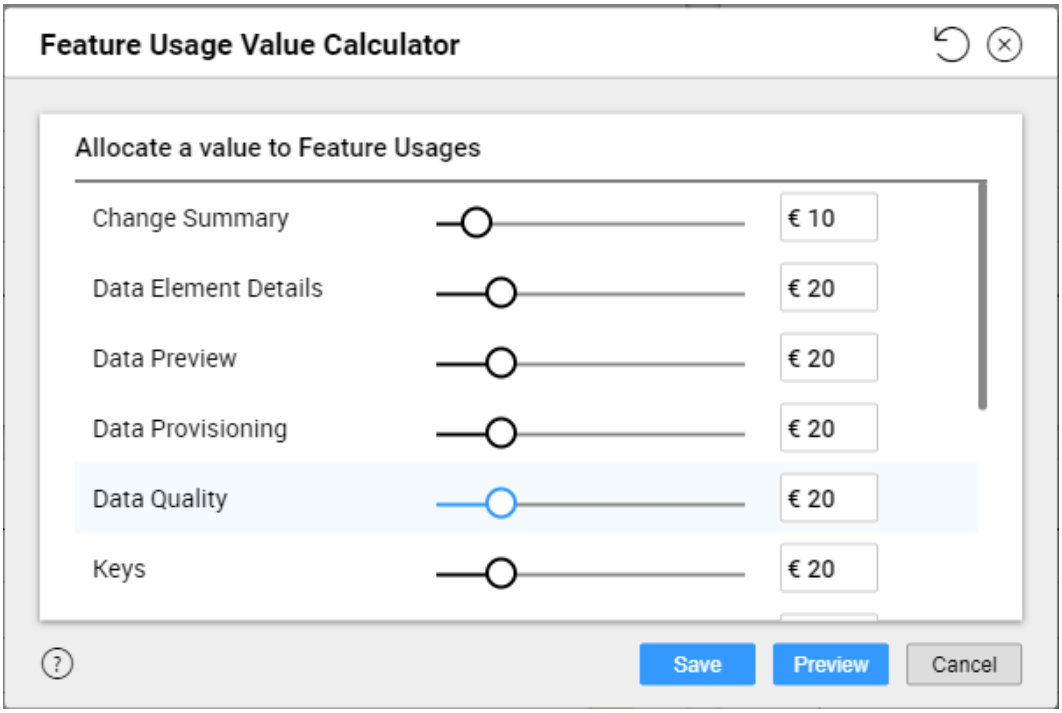

Example

Assign values to the following features in the **Feature Usage Value Calculator** dialog box:

Feature	Value
Overview	$10
Lineage and Impact	$20
Questions	$5
Reviews	$5
Data Elements	$10

The following table lists the feature access details and the usage value calculation:

Feature Used	Calculation
Overview	1 x $10 for accessing the Overview tab.
Lineage and Impact tab of 10 separate assets	The usage value is calculated by adding the following values: - 10 x $20 for accessing the Lineage and Impact tab of 10 separate assets - 10 x $10 for accessing the Overview tab that opens by default when you click an asset.

Feature Used	Calculation
Questions and Reviews tabs of an asset	The usage value is calculated by adding the following values: - 1 x $5 for accessing the Questions section of the asset. - 1 x $5 for accessing the Reviews section of the asset. - 1 x $10 for accessing the Overview tab that opens by default when you view an asset.
Overview tab of an asset, followed by the Lineage and Impact, Questions, and Overview tabs of the same asset.	The usage value is calculated by adding the following values: - 1 x $20 for accessing the Lineage and Impact tab. - 1 x $5 for accessing the Questions section - 1 x $10 for accessing the Overview tab.
Columns tab for an asset	The usage value is calculated by adding the following values: - 1 x $10 for accessing the Overview tab. - 1 x $10 for accessing the Columns tab or the Data Element Details.

To customize the feature values, you can specify the minimum and maximum range of the values in the **Value Calculator** on the **Application Configuration** page.

CHAPTER 14

Analyze Reports

This chapter includes the following topics:

- Analyze Reports Overview, 205
- Creating a Report, 220
- Monitoring Report Status, 221
- Reusing an Existing Report to Create a New Report, 222
- Deleting an Existing Report, 222
- Data Asset Analytics Database Views for Reports , 222

Analyze Reports Overview

Data Asset Analytics provides you with a set of report types that you can use to easily create reports and analyze the data assets in your enterprise.

A report type is a data set which contains the historical data of a specific catalog event from Enterprise Data Catalog Discovery. Some examples of catalog event information include business term associations, asset enrichments, data domain association, and user collaboration.

You can use the **Reports** page to create a report and analyze the data assets. You can preview a maximum of 50 records of the reports on the **Monitoring** page. To view the complete report and export the report to a third-party reporting tool, you can download the report in the CSV file format.

Note: In Data Asset Analytics, view names with a _SV suffix denote reports, and those with a _CV suffix denote chart views.

Viewing the Reports Page


The **Reports** page lists all the existing reports that you created. The page displays report details such as the name of the report, type of the report, report created time, and last run time of the report.

To find a particular report on the **Reports** page, you can search for the report by name in the search field. To edit the report description, you can click the report name link from the list of reports and click ( ), and then click ( ) to save the changes. You can sort the reports based on the name, type, and created time. You can also change the view of the report from the list to grid view.

The grid view of the **Reports** page displays the details such as name of the report, time the report was created, and the last run time of the report. You can copy or delete a report. When you copy a report, you

choose to reuse the same report to create a duplicate report out of it. Additionally, you can add or remove report filters, modify the name and description of the duplicate report that you create.

The following image displays a sample **Reports** page:

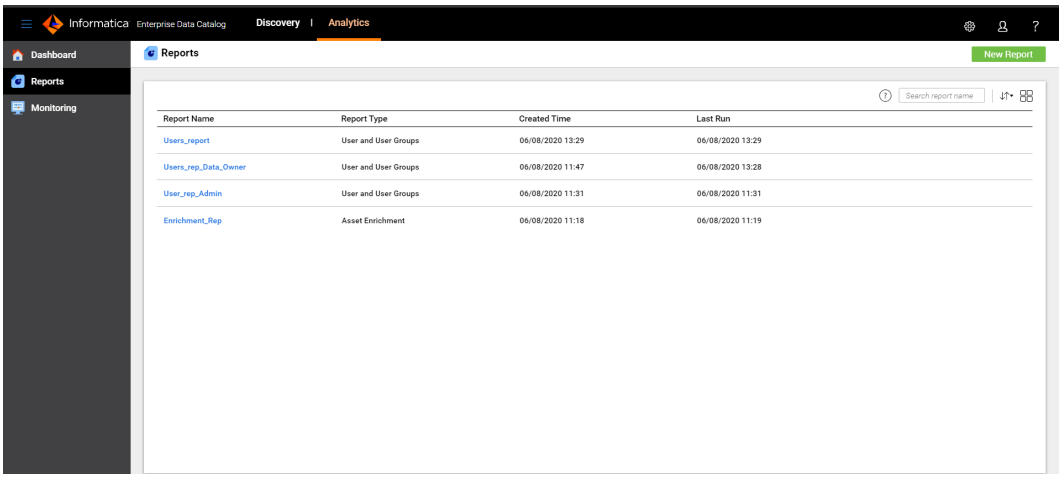

Note: Reports are unique to each user in Data Asset Analytics. You cannot view reports that other users create on the **Reports** page.

Report Types

You can create reports based on the report types that Data Asset Analytics provides. Create reports to analyze the data that each report extracts.

The following table describes the reports that you can run in Data Asset Analytics:

Report Type	Description
Asset Count	Data asset count of asset types based on resources in the catalog
Asset Enrichment	Data assets and associated enrichment types, such as the description, business glossary terms, and people association
Asset Lineage Links	Data asset lineage and/or impact links to other data assets
Assets with Lineage and Impact	Data assets that include the lineage and/or impact information
Asset Usage	List of assets used along with the Enterprise Data Catalog feature used while accessing the asset.
Business Term Association	Business terms and data asset association details
Data Domain Association	Data Domains and data asset association details
Resource Scan History	History of resource scans and scan settings
Users and User Groups	Users who has access to the catalog and user group association details
User Collaboration	User collaboration activities on data assets

Report Type	Description
User Logins	User login timestamp
User Searches	Search strings entered by users

Asset Count Report

Create an **Asset Count** report to view details about the asset count based on different types of asset groups and resources.

Note: The **Asset Count** report displays the count of assets from resources. Data Asset Analytics does not display the count of resources in the **Asset Count** report.

Follow the steps listed in the "Creating a Report" on page 220 section to create an **Asset Count** report.

You can view the following details in an **Asset Count** report:

Report Details	Description
Resource Name	Displays the resource name.
Resource Type	Displays the type of the resource from where the assets were collected.
Asset Type	Displays the type of the asset.
Asset Count	Displays the total count of assets that belong to a particular asset group.
Scan By	Lists the name of the user who ran the resource in Catalog Administrator.
Scan Date	Lists the date on which the user ran the resource.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Scan Date After	Select a date from which you want the report to list all the assets which are scanned after the specified date.
Asset Type	Specify an asset type for which you want to view the report.
Resource Type	Specify a resource type for which you want to view the report.
Resource Name	Specify a resource name for which you want to view the report.

Asset Enrichment Report

Create an **Asset Enrichment** report to view details about all the asset enrichment activities that a user performs in the catalog. The asset enrichment activities include business description, business term

association, classification, business title association, asset certification, data domain association, and people association.

Follow the steps listed in the "Creating a Report" on page 220 section to create an **Asset Enrichment** report.

You can view the following details in an **Asset Enrichment** report:

Report Details	Description
Resource Name	Displays the resource name which includes the asset that is enriched.
Resource Type	Displays the type of resource that the resource belongs to.
Asset Name	Displays the name of the asset that is enriched.
Asset Type	Displays the type of asset that the enriched asset belongs to.
Enrichment Type	Displays the type of enrichment activity that was performed on the asset.
Auto Enrichment	Lists the following values to indicate how the asset is enriched: - Inferred. The recommended enrichments for the asset based on profile results. - Inferred-Accepted. The inferred enrichment association is accepted by the user. - Inferred-Auto-Accepted. The inferred enrichment association is automatically accepted based on the conformance score specified. - Inferred-Rejected. The inferred enrichment association is rejected by the user. - Manual. The enrichment for the asset is done manually.
Enriched By	Lists the name of the user who added the asset enrichment.
Enrichment Added on	Displays the date on which an asset enrichment was added.
Enrichment Deleted On	Displays the date on which an asset enrichment was deleted.
Asset Created on	Displays the date on which assets are added in the catalog.
Asset Deleted on	Displays the date on which assets are deleted from the catalog.
Asset ID	Displays the full path for the asset in the following format:`<resource name>/<name>/<category>`
KDE	Lists **Y** or **N** to indicate whether the associated Axon glossary is marked as a key data element or not. **Note:** You cannot view the key data element information in versions 10.4.1, 10.4.1.1, and 10.4.1.2. In versions 10.5, 10.5.1, and 10.5.1.1, the report contains the Critical Data Element column.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Enrichment Added After	Select a date from which you want the report to list all the assets that include enrichments added after the specified date.
Asset Type	Specify an asset type for which you want to view the report.

Filter	Description
Resource Type	Specify a resource type for which you want to view the report.
Resource Name	Specify a resource name for which you want to view the report.
Auto Enrichment	Select from the following values to filter assets based on how they were enriched: - Inferred - Inferred-Accepted - Inferred-Auto-Accepted - Inferred-Rejected - Manual

Asset Lineage Links Report

Create an **Asset Lineage Links** report to view details about the asset links that are created for assets and resources to extract lineage and impact information into the catalog.

Follow the steps listed in the "Creating a Report" on page 220 section to create an **Asset Lineage Links** report.

You can view the following details in an **Asset Lineage Links** report:

Report Details	Description
From Resource Name	Displays the resource from where the lineage link is created.
From Resource Type	Displays the resource type that includes the lineage link.
From Asset Name	Displays the asset from where the lineage link is created.
From Asset Type	Displays the asset type that includes the lineage link.
From Asset ID	Displays the full path for the asset in the following format:`<resource name>/<name>/<category>`
From Asset KDE	Lists **Y** or **N** to indicate whether the associated Axon glossary is marked as a key data element or not. **Note:** You cannot view the key data element information in versions 10.4.1, 10.4.1.1, and 10.4.1.2. In versions 10.5, 10.5.1, and 10.5.1.1, the report contains the Critical Data Element column.
To Resource Name	Displays the resource to which the lineage link is associated.
To Resource Type	Displays the resource type that includes the lineage link.
To Asset Name	Displays the asset to which the lineage link is associated.
To Asset Type	Displays the asset type that includes the lineage link.
To Asset ID	Displays the full path for the asset in the following format:`<resource name>/<name>/<category>`

Report Details	Description
To Asset KDE	Lists **Y** or **N** to indicate whether the associated Axon glossary is marked as a key data element or not. **Note:** You cannot view the key data element information in versions 10.4.1, 10.4.1.1, and 10.4.1.2. In versions 10.5, 10.5.1, and 10.5.1.1, the report contains the Critical Data Element column.
Lineage Method	Lists **Y** or **N** to indicate the way the lineage links were created. **Y** indicates the link that was created automatically. **N** indicates the link that was created manually.
Enrichment Time	Lists the date when the lineage link was created.
Link Deleted on	Lists the date when the lineage link was deleted.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
From Asset Type	Specify the asset type from which you want to view the associated lineage.
From Asset Name	Specify the asset name from which you want to view the associated lineage.
From Resource Type	Specify the resource type from which you want to view the associated lineage.
From Resource Name	Specify the resource name from which you want to view the associated lineage.
Lineage Method	Select **Y** if you want to view the report with lineage links that were created automatically. Select **N** if you want to view the report with lineage links that were created manually.

Assets with Lineage and Impact Report

Create an **Assets with Lineage and Impact** report to view details about assets that include lineage and impact information in the catalog.

Follow the steps listed in the "Creating a Report" on page 220 section to create an **Assets with Lineage and Impact** report.

You can view the following details in an **Assets with Lineage and Impact** report:

Report Details	Description
Resource Name	Displays the resource name that includes assets with the lineage or lineage and impact information.
Resource Type	Displays the type of the resource.
Asset Name	Displays the asset name that includes the lineage or lineage and impact information.
Asset Type	Displays the asset type that the asset with the lineage or lineage and impact information belongs to.

Report Details	Description
Includes Lineage	Lists **Y** or **N** based on whether the asset includes lineage information or not.
Includes Impact	Lists **Y** or **N** based on whether the asset includes impact information or not.
KDE	Lists **Y** or **N** to indicate whether the associated Axon glossary is marked as a key data element or not. **Note:** You cannot view the key data element information in versions 10.4.1, 10.4.1.1, and 10.4.1.2. In versions 10.5, 10.5.1, and 10.5.1.1, the report contains the Critical Data Element column.
Asset ID	Displays the full path of the asset in the following format:`<resource name>/<name>/<category>`
Asset Created On	Displays the date on which the asset was created.
Asset Deleted On	Displays the date on which the asset was deleted.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Asset Type	Specify the asset type for which you want to view the lineage and impact report.
Resource Type	Specify the resource type for which you want to view the lineage and impact report.
Resource Name	Specify the resource name for which you want to view the lineage and impact report.

Asset Usage Report

Create an **Asset Usage** report to view details about the list of assets used in Enterprise Data Catalog.

Follow the steps listed in the "Creating a Report" on page 220 section to create an **Asset Usage** report.

You can view the following details in an **Asset Usage** report:

Report Details	Description
User Login Name	Login name of the user who accessed the asset.
User Security Domain	Security domain that includes the logged-in user.
Resource Name	Name of the resource used to extract the asset.
Resource Type	Type of resource.
Asset Name	Name of the asset used.
Asset Type	Type of asset used.

Report Details	Description
Feature Used	Lists one of the following Enterprise Data Catalog features used when the asset was accessed: - Change Summary - Data Element Details - Data Preview - Data Provisioning - Data Quality - Keys - Lineage and Impact - Metric Groups - Overview - Questions - Relationships - Reviews **Note:** By default, the Overview feature is used for an asset when you access the asset. See Calculating the Feature Usage Valueon page 202 section for more information about the features.
Event Date	Date in mm/dd/yyyy format on which the asset was accessed.
Asset ID	The ID of the asset accessed that shows the path to the asset in the catalog.

Note: Asset types such as data domain groups and composite data domains belong to logical resource types in the catalog. For such assets, the **Resource Name** and **Resource Type** details do not display any information.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Event Date After	Specify the date after which you want to view the asset usage details in the report.
User Login Name	Specify the user name of the user who accessed the asset for which you want to view the report.
Resource Type	Specify a resource type for which you want to view the report.
Resource Name	Specify a resource name for which you want to view the report.
Asset Type	Specify an asset type for which you want to view the report.

Business Term Association Report

Create a **Business Term Association** report to view details about business terms that are associated with different asset and resource types in the catalog.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **Business Term Association** report.

You can view the following details in a **Business Term Association** report:

Report Details	Description
Business Term	Displays the name of the business term that was associated.
Glossary Resource Name	Displays the name of the Business Glossary or Informatica Axon resource.
Glossary Source	Displays the source of the glossary from where the business term was associated. The glossary source includes Informatica Axon and Business Glossary.
Resource Name	Displays the resource name associated with the business term.
Resource Type	Displays the resource type associated with the business term.
Asset Name	Displays the name of the asset associated with the business term.
Asset Type	Displays the type of asset associated with the business term.
Association Type	Displays the type of the business term association. The business term association can happen through custom attributes, business title, or classifications.
Business Term Created On	Displays the date on which the business term was created.
Business Term Deleted On	Displays the date on which the business term was deleted.
Enriched By	Displays the username or `system` based on whether the business term was associated with the asset manually or automatically through inference.
Auto Enrichment	Lists the following values to indicate how the asset is associated with the business term: - Inferred. The recommended business terms for the asset based on profile results. - Inferred-Accepted. The inferred business term association is accepted by the user. - Inferred-Auto-Accepted. The inferred business term association is automatically accepted based on the conformance score specified. - Inferred-Rejected. The inferred business term association is rejected by the user. - Manual. The business term is associated with the asset manually.
Enrichment Time	Displays the date on which the business term was associated with the asset.
Enrichment Removed On	Displays the date on which the business term association was removed from the asset.
KDE	Lists **Y** or **N** to indicate whether the associated Axon glossary is marked as a key data element or not. **Note:** You cannot view the key data element information in versions 10.4.1, 10.4.1.1, and 10.4.1.2. In versions 10.5, 10.5.1, and 10.5.1.1, the report contains the Critical Data Element column.
Asset ID	Displays the full path of the asset in the following format: `<resource name>/<name>/<category>`
Business Term Asset ID	Displays the full path of the business term in the following format: `<resource name>/<business term name>/<category>`

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Glossary Source	Specify the type of glossary source such as Informatica Axon or Business Glossary source from where you want to view the associated resources.
Glossary Resource Name	Specify the Informatica Axon or Business Glossary resource name from where you want to view the associated business terms in the report.
Resource Name	Specify the resource name for which you want to list the associated business terms.
Business Term	Specify the name of the business term for which you want to view the report.
Resource Type	Specify the resource type for which you want to list the associated business terms.
KDE	Select **Y** if you want to view the report with the key data elements. Select **N** if you want to view the report without the key data elements.

Data Domain Association Report

Create a **Data Domain Association** report to view the details of the data domains in the catalog.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **Data Domain Association** report.

You can view the following details in a **Data Domain Association** report:

Report Details	Description
Data Domain	Displays the name of the data domain.
Data Domain Type	Displays the type of data domain.
Resource Name	Displays the resource name associated with the data domain.
Resource Type	Displays the resource type associated with the data domain.
Asset Name	Displays the name of the asset associated with the data domain.
Asset Type	Displays the type of asset associated with the data domain.
Auto Enrichment	Lists the following values to indicate how the asset is associated with the data domain: - Inferred. The recommended data domains for the asset based on profile results. - Inferred-Accepted. The inferred data domain association is accepted by the user. - Inferred-Auto-Accepted. The inferred data domain association is automatically accepted based on the conformance score specified. - Inferred-Rejected. The inferred data domain association is rejected by the user. - Manual. The data domain is associated with the asset manually.
Enriched By	Displays the username if the data domain was associated with the asset manually. Displays `system` if the data domain was associated with the asset automatically through inference or inferred on the asset.

Report Details	Description
Enrichment Added on	Displays the date on which the data domain was associated with the asset.
Enrichment Removed on	Displays the date on which the data domain association was removed from the asset.
Data Domain Created on	Displays the data on which the data domain was created.
Data Domain Deleted on	Displays the date on which the data domain was deleted.
Asset ID	Displays the full path of the asset in the following format: `<resource name>/<name>/<category>`

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Enrichment Added After	Select a date from which you want the report to list all data domain associations after the specified date.
Asset Type	Specify the asset type for which you want to list the associated data domains.
Resource Type	Specify the resource type for which you want to list the associated data domains.
Resource Name	Specify the resource name for which you want to list the associated data domains.
Data Domain Type	Specify the data domain type for which you want to list the data domain associations.
Data Domain	Specify the data domain name for which you want to list the data domain associations.

Resource Scan History Report

Create a **Resource Scan History** report to view the details of the resources used to extract metadata from the data sources.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **Resource Scan History** report.

You can view the following details in a **Resource Scan History** report:

Report Details	Description
Resource Name	Displays the name of the resource.
Resource Type	Displays the type of the resource.

Report Details	Description
Scan Type	Displays one of the following values based on the type of metadata extraction of the resource: - Manual. Indicates that the metadata extraction from the data source is by creating a resource in Catalog Administrator. - Schedule. Indicates that the metadata extraction from the data source is by creating and scheduling the scan time for a resource. - Offline. Indicates that the metadata extraction from the data source is by using the offline scanner binaries. **Note:** To view the mode in which scan was initiated, make sure you are using Enterprise Data Catalog version 10.4.1.1.
Scan By	Indicates if the metadata extraction was initiated automatically by Enterprise Data Catalog based on the configured schedule or if the scan was initiated manually by the user. The column displays `system` if the extraction was initiated automatically.
Scan Date	Lists the date on which the metadata extraction was performed.
Source Metadata	Lists **Y** or **N** based on whether the extract source metadata option is enabled for the resource.
Composite Domain Discovery	Lists **Y** or **N** based on whether composite data domain discovery is enabled for the resource.
Data Discovery	Lists **Y** or **N** based on whether data discovery is enabled for the resource.
Business Term Association	Lists **Y** or **N** based on whether the resource is enabled for business term association.
Data Provisioning	Lists **Y** or **N** based on whether the resource is enabled for data provisioning.
Custom Attribute Applied	Lists **Y** or **N** based on whether the resource is enabled with custom attributes.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Scan Date After	Select a date from which you want the report to list all resource scan details.
Resource Type	Specify a resource type for which you want to view the report.
Resource Name	Specify a resource name for which you want to view the report.

User and User Groups Report

Create a **User and User Groups** report to view the catalog user details.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **User and User Groups** report.

You can view the following details in a **User and User Groups** report:

Report Details	Description
User Login Name	Lists the user names that are added to the Catalog Service. **Note:** If a user belongs to multiple user groups, Data Asset Analytics displays multiple records of the same user with a different user group name.
User Group Name	Displays the user group that includes the user name.
Administrator	Indicates if the user has administrator privileges: **Y** indicates a user with administrator privileges and **N** indicates a user without administrator privileges.
User Security Domain	Lists the security domain that a user belongs to.
User Created on	Displays the date on which the user was created. **Note:** The user created and deleted dates depend on the time you synchronize the user information into Data Asset Analytics.
User Deleted on	Displays the date on which the user was deleted, if applicable.
User Group Association Created on	Displays the date on which the user was associated with the user group.
User Group Deleted on	Displays the date on which the user was removed from the user group, if applicable.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
User Created After	Select a date from which you want the report to list all the users created.
User Group Name	Specify a user group for which you want to view the user details in the report.
Administrator	Select **Y** to specify that you want the report to only include users with administrator privileges. Select **N** to specify that you want the report to include only users without administrator privileges.

User Collaboration Report

Create a **User Collaboration** report to view the details about the collaboration activities that users performed in the catalog. Collaboration activities include reviews, ratings, answers, and questions.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **User Collaboration** report.

You can view the following details in a **User Collaboration** report:

Report Details	Description
User Name	Lists the users who performed the collaboration activity.
Resource Name	Displays the resource name that includes assets with collaboration activities.

Report Details	Description
Resource Type	Displays the resource type that includes assets with collaboration activities.
Asset Name	Displays the asset name on which users collaborated.
Asset Type	Displays the type of the asset that includes the asset with collaboration.
Asset Group Name	Displays the asset group that includes the asset with collaboration.
Collaboration Action	Displays the type of collaboration activity that the user performed. Collaboration activities include questions, answers, and reviews.
Reference Action	Displays the reference collaboration activity on which a collaboration activity is performed. Example of a reference action is a question to which an answer is provided.
Collaboration Date	Lists the date when the collaboration activity was performed.
Asset ID	Displays the full path for the asset in the following format:`<resource name>/<name>/<category>`

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Collaboration Date After	Select a date from which you want the report to list all collaboration activity details.
Collaboration Action	Specify a collaboration action for which you want to view the report.
User Name	Specify the user name of the user who performed the collaboration action for which you want to view the report.
Resource Type	Specify a resource type for which you want to view the report.
Resource Name	Specify a resource name for which you want to view the report.
Asset Type	Specify the asset type for which you want to view the report.

User Logins Report

Create a **User Logins** report to view the details of the users who logged in to the Enterprise Data Catalog applications.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **User Logins** report.

You can view the following details in a **User Logins** report:

Report Details	Description
User Login Name	Lists the users who logged in to the Enterprise Data Catalog applications. **Note:** If a user belongs to multiple user groups, Data Asset Analytics displays multiple records of the same user with a different user group name.
User Group Name	Displays the user group that includes the user who logged in.
User Login App Name	Indicates that the user has logged in to one of the following Enterprise Data Catalog applications: - CATALOG. Indicates that the user has logged in to the Enterprise Data Catalog application. - ADMIN. Indicates that the user has logged in to the Catalog Administrator application.
User Login Date	Lists the date on which the user logged in to the application.
User Security Domain	Displays the security domain that the user belongs to.
User Group Association Created on	Displays the date on which the user was associated with the user group.
User Group Association Deleted on	Displays the date on which the user was removed from the user group, if applicable.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
User Login Date After	Select a date from which you want the report to list all the users who logged in to the Enterprise Data Catalog applications.
User Login App Name	Select any of the following applications if you want to specifically view the list of users who logged in to that application: - CATALOG. Indicates that you want to view the users who logged in to the Enterprise Data Catalog application. - ADMIN. Indicates that you want to view the users who logged in to the Catalog Administrator application.
User Group Name	Specify a user group for which you want to view the user login details in the report.
User Login Name	Specify a specific username for which you want to view the login details.

User Searches Report

Create a **User Searches** report to view the details of the searches performed by the users.

Follow the steps listed in the "Creating a Report" on page 220 section to create a **User Searches** report.

You can view the following details in a **User Searches** report:

Report Details	Description
User Login Name	Lists the users who performed searches in the catalog. **Note:** If a user belongs to multiple user groups, Data Asset Analytics displays multiple records of the same user with a different user group name.
User Group Name	Displays the user group that the user belongs to.
Search String	Indicates the search string and wildcard search character (*) used for the search.
Search Date	Lists the date on which the search was performed.
User Security Domain	Displays the security domain that the user belongs to.
User Group Association Created on	Displays the date on which the user was associated with the user group.
User Group Association Deleted on	Displays the date on which the user was removed from the user group, if applicable.

Report Filters

You can customize the report using the following optional filters available in the **Filter by** section:

Filter	Description
Search Date After	Select a date from which you want the report to list all searches performed.
Search String	Specify a search string based on which you want to view the report.
User Group Name	Specify a user group for which you want to view the search details in the report.
User Login Name	Specify a specific username for which you want to view the search details.

Creating a Report

Create and run reports based on asset information in the catalog. Create reports to analyze the catalog data based on the available report types. Create reports such as the asset count, asset enrichment, user logins, and user collaboration.

Perform the following steps to create a new report based on the existing report templates:

1. Click **Reports** from the left panel of the **Data Asset Analytics** tab. The **Reports** page appears with a list of existing reports.
2. Click **New Report**. The **New Report** dialog box appears with the list of existing report types that you can use.
3. Select a report type and click **Create**. The **New Report < Report Template Name>** page appears.

   Note: A preview of the report appears at the bottom of the page in the **Report Preview** section with 50 rows of data displayed.

4. In the **Report Name** box, specify the name of the report. The name you specify must not exceed 50 characters in length. The name can include the following special characters: - (hyphen), @ (at sign), and _ (underscore).
5. In the **Description** box, specify a description for the report. Make sure that the description does not exceed 250 characters in length.
6. Select the required filters from the **Filter by** section to customize the report as required.
7. Click **Save** to save the report or **Save and Run** to save and generate the report.


After you run the report you can go to the **Monitoring** page to view the status of the report run and download the report in CSV format. For more information about **Monitoring** page, see the "Monitoring Report Status" on page 221 section.

Monitoring Report Status

You can use the **Monitoring** page to view the status of report runs, download the reports in CSV format, and download the report logs.

Click **Monitoring** from the left panel to launch the **Monitoring** page. The page lists the reports run by the current logged in user under the **Report Runs** section.

The following image displays a sample **Monitoring** page:

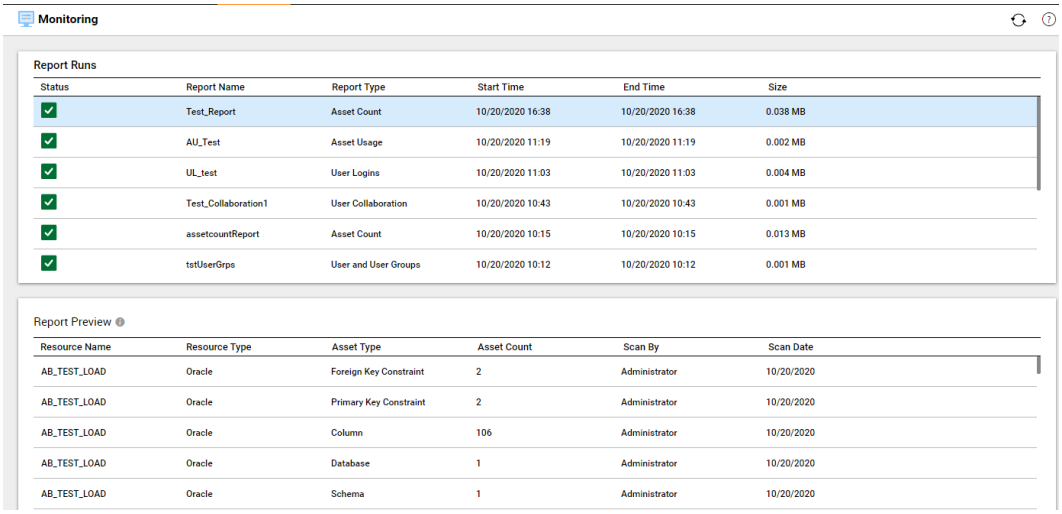

You can perform the following tasks on the **Monitoring** page:

- Click (**Refresh**) to refresh the page and view the current status of the reports.
- Move the mouse pointer over the report runs that are completed and click to download the report in CSV format.
- Click to download the report run log to verify if there were some errors that caused the report run to be unsuccessful.

Reusing an Existing Report to Create a New Report

You can reuse an existing report on the **Reports** page to create a new report.

Perform the following steps to reuse an existing report to create a new report:

1. Click **Reports** from the left panel of the **Data Asset Analytics** tab. The **Reports** page appears with a list of existing reports.
2. Click an existing report based on your requirement. The **<Report Name>** dialog box appears.
3. Click  on the dialog box and select **Copy** from the drop-down list. The confirmation dialog box appears.

   Note: Alternatively, to copy the report, you can click the  icon that appears beside the report when you move the mouse pointer over the report name.
4. Click **OK**. The New Report **<Report Template Name>** page appears.
5. Follow the steps from step 4 through step 7 listed in the "Creating a Report" on page 220 section to create a report.

Deleting an Existing Report

You can delete an existing report on the **Reports** page. When you delete a report from the **Reports** page, you also delete the report run history on the **Monitoring** page.

Perform the following steps to delete an existing report:

1. Click **Reports** from the left panel of the **Data Asset Analytics** tab. The **Reports** page appears with a list of existing reports.
2. Click an existing report that you want to delete. The **<Report Name>** dialog box appears.
3. Click  on the dialog box and select **Delete** from the drop-down list. The confirmation dialog box appears.

   Note: Alternatively, to delete the report, you can click the  icon that appears beside the report when you move the mouse pointer over the report name.
4. Click **OK** to delete the report.

Data Asset Analytics Database Views for Reports

You can use Data Asset Analytics database views to build custom reports and charts using reporting tools such as Tableau, Microstrategy etc.

Each view displays different types of information. You can transform data based on business requirements and use any business intelligence reporting tool that supports queries and provides a user interface to view

the reports. When you build a custom report, you specify a query based on one or more views that provide the information you need.

All the reports provided in Data Asset Analytics use one of these views. View names with a _SV suffix denote reports.

Note: You must connect to the database as a user with read only access to the Data Asset Analytics views. You can also connect to the database using a JDBC or ODBC driver based on the database type of the Data Asset Analytics repository to import the view data into a reporting tool.

DAA_ASSET_ENRICHMENT_SV

Displays the asset name, asset type, name of the resource to which the asset belongs, and the type of enrichment performed.

The *Asset Enrichment* report uses this view. The following table describes the view columns:

View Column	Description
ASSET_DELETE_TIME	The time when the asset was deleted.
ASSET_ID	The path of the asset in the Catalog.
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource.
ASSET_NAME	The name of the asset on which enrichment is performed.
ASSET_TYPE	The type of the asset.
ENRICHMENT_TYPE	The type of enrichment performed on the asset. It can be one of the following: - Business description - Business term association - Classification - Business title association - Asset certification - Data domain association - Data owner and data steward association
ENRICHMENT_METHOD	The method by which, the enrichment is performed. For example, manual, inferred, etc.
ENRICHED_BY	The user who performed the enrichment.
ENRICHED_TIME	The time when the enrichment was performed.
ASSET_CREATE_TIME	The time when the asset was created in the Catalog.

DAA_ASSET_WITHOUT_ENRICHMENT_SV

Displays the asset name, asset type, name of the resource to which the asset belongs, and the enrichments that are not performed on the asset.

Enrichments are additional context added to the asset metadata, such as business descriptions, business titles, profiling information, data domain and composite data domain associations, certifications, and custom

attributes. These enrichments can either be user-curated or assigned automatically by the system. Certain enrichments are specific to an asset type. For example, data domains can be assigned only to columns or fields.

This view does not display custom attributes.

Any asset metadata can be considered complete when it contains the required enrichments. Retrieving the list of assets and missing enrichments can help Catalog users perform curation tasks and associate quality scores to the assets.

The following table describes the view columns:

View Column	Description
ASSET_ID	The path of the asset in the Catalog.
ASSET_NAME	The name of the asset on which enrichment is performed.
ASSET_TYPE	The type of asset.
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of resource.
MISSING_ENRICHMENT	The type of enrichment not performed on the asset.
ASSET_CREATE_TIME	The time when the asset was created in the Catalog.

Custom Views

If the Catalog contains too many assets that don't have enrichments, the default database view returns a very large number of records. This can impact the performance of the Data Asset Analytics database. To avoid performance impact, use the default view to create custom curation views. You can use a custom view to retrieve filtered assets, such as assets of a particular type, assets within a specific resource, or assets that don't contain a specific enrichment.

For an Oracle Database server, the definition of the default view is as follows:

```
CREATE OR REPLACE VIEW DAA_ASSET_WITHOUT_ENRICHMENT_SV AS
SELECT
    AST.ASSET_ID ASSET_ID,
    AST.ASSET_NAME ASSET_NAME,
    AST.ASSET_TYPE ASSET_TYPE,
    (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.ASSET_NAME ELSE RES.ASSET_NAME
END) RESOURCE_NAME,
    (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.RESOURCE_TYPE ELSE
RES.RESOURCE_TYPE END) RESOURCE_TYPE,
    DAE.ENRICHMENT_TYPE MISSING_ENRICHMENT,
    AST.CREATE_TIME ASSET_CREATE_TIME
FROM DAA_EVENT_ASSET AST
LEFT JOIN DAA_EVENT_ASSET RES
    ON AST.RESOURCE_ASSET_KEY = RES.ASSET_KEY
LEFT JOIN DAA_APPLICABLE_ENRICHMENT DAE
    ON AST.ASSET_TYPE = DAE.ASSET_TYPE
LEFT JOIN DAA_EVENT_ASSET_ENRICHMENT ENR
    ON AST.ASSET_KEY = ENR.ASSET_KEY
    AND SUBSTR(DAE.ENRICHMENT_TYPE, 1, 14) = SUBSTR(ENR.ENRICH_TYPE, 1, 14)
    AND ENR.DELETE_TIME IS NULL
WHERE
    ENR.ENRICHMENT_KEY IS NULL
AND
    AST.DELETE_TIME IS NULL
AND
```

```
    AST.ASSET_NAME NOT IN
('DataDomainPropagation','DomainUsers','DataDomain','SimilarityDiscovery','SystemLocation
s')
AND
    RES.RESOURCE_TYPE != 'DomainUsers';
```

To retrieve tables in the Catalog that don't have enrichments, you can create a TABLES_WITHOUT_ENRICHMENT custom view as follows:

```
CREATE OR REPLACE VIEW TABLES_WITHOUT_ENRICHMENT AS
SELECT
    AST.ASSET_ID ASSET_ID,
    AST.ASSET_NAME ASSET_NAME,
    AST.ASSET_TYPE ASSET_TYPE,
    (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.ASSET_NAME ELSE RES.ASSET_NAME
END) RESOURCE_NAME,
     (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.RESOURCE_TYPE ELSE
RES.RESOURCE_TYPE END) RESOURCE_TYPE,
     DAE.ENRICHMENT_TYPE MISSING_ENRICHMENT,
     AST.CREATE_TIME ASSET_CREATE_TIME
FROM DAA_EVENT_ASSET AST
LEFT JOIN DAA_EVENT_ASSET RES
     ON AST.RESOURCE_ASSET_KEY = RES.ASSET_KEY
LEFT JOIN DAA_APPLICABLE_ENRICHMENT DAE
     ON AST.ASSET_TYPE = DAE.ASSET_TYPE
LEFT JOIN DAA_EVENT_ASSET_ENRICHMENT ENR
     ON AST.ASSET_KEY = ENR.ASSET_KEY
     AND SUBSTR(DAE.ENRICHMENT_TYPE, 1, 14) = SUBSTR(ENR.ENRICH_TYPE, 1, 14)
     AND ENR.DELETE_TIME IS NULL
WHERE
     ENR.ENRICHMENT_KEY IS NULL
AND
     AST.DELETE_TIME IS NULL
AND
     AST.ASSET_TYPE = 'com.infa.ldm.relational.Table';
```

To retrieve assets within the Q3_SALES resource that don't have enrichments, you can create a Q3_SALES_ASSETS_WITHOUT_ENRICHMENT custom view as follows:

```
CREATE OR REPLACE VIEW Q3_SALES_ASSETS_WITHOUT_ENRICHMENT AS
SELECT
    AST.ASSET_ID ASSET_ID,
    AST.ASSET_NAME ASSET_NAME,
    AST.ASSET_TYPE ASSET_TYPE,
    (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.ASSET_NAME ELSE RES.ASSET_NAME
END) RESOURCE_NAME,
     (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.RESOURCE_TYPE ELSE
RES.RESOURCE_TYPE END) RESOURCE_TYPE,
     DAE.ENRICHMENT_TYPE MISSING_ENRICHMENT,
     AST.CREATE_TIME ASSET_CREATE_TIME
FROM DAA_EVENT_ASSET AST
LEFT JOIN DAA_EVENT_ASSET RES
     ON AST.RESOURCE_ASSET_KEY = RES.ASSET_KEY
LEFT JOIN DAA_APPLICABLE_ENRICHMENT DAE
     ON AST.ASSET_TYPE = DAE.ASSET_TYPE
LEFT JOIN DAA_EVENT_ASSET_ENRICHMENT ENR
     ON AST.ASSET_KEY = ENR.ASSET_KEY
     AND SUBSTR(DAE.ENRICHMENT_TYPE, 1, 14) = SUBSTR(ENR.ENRICH_TYPE, 1, 14)
     AND ENR.DELETE_TIME IS NULL
WHERE
     ENR.ENRICHMENT_KEY IS NULL
AND
     AST.DELETE_TIME IS NULL
AND
     RES.ASSET_NAME = 'Q3_SALES';
```

To retrieve assets that don't have data domain associations, you can create an ASSETS_WITHOUT_DDA custom view as follows:

```
CREATE OR REPLACE VIEW ASSETS_WITHOUT_DDA AS
SELECT
    AST.ASSET_ID ASSET_ID,
    AST.ASSET_NAME ASSET_NAME,
    AST.ASSET_TYPE ASSET_TYPE,
    (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.ASSET_NAME ELSE RES.ASSET_NAME
END) RESOURCE_NAME,
     (CASE WHEN AST.ASSET_TYPE = 'core.Resource' THEN AST.RESOURCE_TYPE ELSE
RES.RESOURCE_TYPE END) RESOURCE_TYPE,
     DAE.ENRICHMENT_TYPE MISSING_ENRICHMENT,
     AST.CREATE_TIME ASSET_CREATE_TIME
FROM DAA_EVENT_ASSET AST
LEFT JOIN DAA_EVENT_ASSET RES
     ON AST.RESOURCE_ASSET_KEY = RES.ASSET_KEY
LEFT JOIN DAA_APPLICABLE_ENRICHMENT DAE
     ON AST.ASSET_TYPE = DAE.ASSET_TYPE
LEFT JOIN DAA_EVENT_ASSET_ENRICHMENT ENR
     ON AST.ASSET_KEY = ENR.ASSET_KEY
     AND SUBSTR(DAE.ENRICHMENT_TYPE, 1, 14) = SUBSTR(ENR.ENRICH_TYPE, 1, 14)
     AND ENR.DELETE_TIME IS NULL
WHERE
     ENR.ENRICHMENT_KEY IS NULL
AND
     AST.DELETE_TIME IS NULL
AND
     DAE.ENRICHMENT_TYPE = 'Data Domain Association';
```

For complex use cases such as to retrieve tables that have the data steward named Daemon and don't have a business description, you can use a custom view and intersect another SELECT statement as follows:

```
SELECT
    TO_CHAR(AST.ASSET_ID) ASSET_ID,
    AST.ASSET_NAME ASSET_NAME,
    AST.CREATE_TIME ASSET_CREATE_TIME
FROM DAA_EVENT_ASSET_ENRICHMENT ENR
LEFT JOIN DAA_EVENT_ASSET AST ON AST.ASSET_KEY = ENR.ASSET_KEY
LEFT JOIN DAA_EVENT_ASSET ENR_AST ON ENR_AST.ASSET_KEY = ENR.ENRICHED_BY_ASSET_KEY
WHERE AST.ASSET_TYPE = 'com.infa.ldm.relational.Table'
AND AST.DELETE_TIME IS NULL
AND ENR_AST.ASSET_NAME = 'Daemon'
AND ENR.DELETE_TIME IS NULL
AND ENR.ENRICH_TYPE = 'Data Steward'

INTERSECT

SELECT
    TO_CHAR(ASSET_ID),
    ASSET_NAME,
    ASSET_CREATE_TIME
FROM DAA_ASSET_WITHOUT_ENRICHMENT_SV
WHERE ASSET_TYPE = 'com.infa.ldm.relational.Table'
AND MISSING_ENRICHMENT = 'Business Description'
```

You can modify filters in the default view and create custom views to further refine the results based on your use case.

DAA_ASSET_COUNT_SV

Displays the asset count by grouping the assets by asset type for each resource.

The *Asset Count* report uses this view. The following table describes the view columns:

View Column	Description
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource.
ASSET_TYPE	The type of the asset.
ASSET_COUNT	The number of assets of a particular asset type.
SCAN_BY	The name of the user who initiated the resource scan.
SCAN_TIME	The time at which the scan was performed.

DAA_ASSET_LINEAGE_FRM_TO_LINKS_SV

Displays details of the assets that contain lineage.

The *Asset Lineage Links* report uses this view. The following table describes the view columns:

View Column	Description
FROM_RESOURCE_NAME	The resource from where the lineage link is created.
FROM_RESOURCE_TYPE	The type of the resource from where the lineage link is created.
FROM_ASSET_NAME	The name of the asset from where the lineage link is created.
FROM_ASSET_TYPE	The type of the asset from where the lineage link is created.
FROM_ASSET_ID	The path to the asset from where the lineage link is created.
TO_RESOURCE_NAME	The resource to which the lineage link is associated.
TO_RESOURCE_TYPE	The type of the resource to which the lineage link is associated.
TO_ASSET_NAME	The name of the asset to which the lineage link is associated.
TO_ASSET_TYPE	The type of the asset to which the lineage link is associated.
TO_ASSET_ID	The path to the asset to which the lineage link is associated.
LINEAGE_ENRICH_TIME	The time when the lineage link was created.
LINEAGE_DELETE_TIME	The time when the lineage link was deleted.

DAA_ASSET_LINEAGE_IMPACT_SV

Displays all the assets that have lineage and impact.

The *Assets with Lineage and Impact* report uses this view. The following table describes the view columns:

View Column	Description
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource to which the asset belongs.
ASSET_NAME	The name of the asset that has lineage or impact.
ASSET_TYPE	The type of the asset.
HAS_LINEAGE	Specifies if the asset has lineage.
HAS_IMPACT	Specifies if the asset has impact.
ASSET_ID	The path of the asset in the Catalog.
ASSET_CREATE_TIME	The time at which the asset was created in the Catalog.
ASSET_DELETE_TIME	The time at which the asset was deleted from the Catalog.

DAA_ASSET_USAGE_SV

Displays the usage details for each asset such as the name of the user who accessed the asset and the list of Enterprise Data Catalog features used.

The *Asset Usage* report uses this view. The following table describes the view columns:

View Column	Description
USER_LOGIN_NAME	The username of the user who accessed the asset.
SECURITY_DOMAIN	The security domain to which the user belongs.
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource to which the asset belongs.
ASSET_USED	The name of the asset used.
ASSET_ID	The path of the asset in the Catalog.
ASSET_TYPE	The type of the asset.

View Column	Description
FEATURE_USED	Specifies one of the following Enterprise Data Catalog features that were used: - Overview - Data Element Details - Metric Groups - Keys and Joins - Lineage and Impact - Relationships - Data Quality - Reviews and Ratings - Questions and Answers - Change Summary - Data Preview - Data Provisioning
EVENT_TIME	The time when the asset was accessed.

DAA_BUSINESS_TERM_ASSOC_SV

Displays details about the business terms that are associated with assets during enrichment.

The *Business Term Association Report* uses this view. The following table describes the view columns:

View Column	Description
BUSINESS_TERM	The name of the associated business term.
BUSINESS_GLOSSARY	The name of the business glossary or Axon glossary to which the term belongs.
GLOSSARY_SOURCE	Specifies whether the business term belongs to business glossary or Axon glossary.
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource to which the asset belongs.
ASSET_NAME	The name of the enriched asset.
ASSET_TYPE	The type of the enriched asset.
ASSOCIATION_TYPE	The type of enrichment performed. For example, business title, business description, etc.
BUSINESS_TERM_CREATE_TIME	The time when the business term was created in the Catalog.
BUSINESS_TERM_DELETE_TIME	The time when the business term was deleted from the Catalog.
ENRICHED_BY	The name of the user who has performed the enrichment.
ENRICHMENT_METHOD	Specifies how the enrichment was performed. For example, manual, inferred, etc.
ENRICHED_TIME	The time when the enrichment was performed.

View Column	Description
ENRICHMENT_DELETE_TIME	The time when the enrichment was deleted.
ASSET_ID	The path of the asset in the Catalog.
BT_ASSET_ID	The path of the business term in the Catalog.

DAA_DATA_DOMAIN_ASSOC_SV

Displays details about the data domains that are associated with assets.

The *Data Domain Association* report uses this view. The following table describes the view columns:

View Column	Description
DATA_DOMAINS	The name of the data domain that is associated.
DOMAIN_TYPES	The type of the data domain that is associated.
RESOURCE_NAME	The name of the resource to which the asset belongs.
RESOURCE_TYPE	The type of the resource to which the asset belongs.
ASSET_NAME	The name of the asset associated with the data domain.
ASSET_TYPE	The type of the asset associated with the data domain.
ENRICHED_BY	The name of the user who has performed the data domain association.
ENRICHMENT_METHOD	Specifies how the asset is associated with the data domain.
ENRICHED_TIME	The time when the data domain enrichment was performed.
ENRICHMENT_DELETE_TIME	The time when the data domain enrichment was deleted.
DATA_DOMAIN_CREATE_TIME	The time when the data domain was created in the Catalog.
DATA_DOMAIN_DELETE_TIME	The time when the data domain was deleted from the Catalog.
ASSET_ID	The path of the asset in the Catalog.

DAA_RESOURCE_SCAN_HIST_SV

Displays the scan details of the resource such as the type of scan and the name of the user who initiated the scan. The view also displays the resource configuration.

The *Resource Scan History* report uses this view. The following table describes the view columns:

View Column	Description
RESOURCE_NAME	The name of the scanned resource.
RESOURCE_TYPE	The type of the resource.
SCAN_TYPE	The type of scan. For example, manual, offline, scheduled, etc..
SCAN_BY	The name of the user who has initiated the scan.
SCAN_TIME	The time when the resource was scanned.
IS_SOURCE_METADATA	Specifies whether source metadata is enabled.
IS_COMPOSITE_DOMAIN_DISCOVERY	Specifies whether domain discovery is enabled.
IS_DATA_DISCOVERY	Specifies whether data discovery is enabled.
IS_BUSINESS_TERM_ASSOCIATION	Specifies whether business term association is enabled.
IS_DATA_PROVISIONING	Specifies whether data provisioning is enabled.
IS_CUSTOM_ATTRIBUTE_APPLIED	Specifies whether custom attributes are enabled.

DAA_USER_COLLABORATION_SV

Displays details related to the collaboration activities performed by users.

The *User Collaboration* report uses this view. The following table describes the view columns:

View Column	Description
USER_NAME	The name of the user who has collaborated on the asset.
RESOURCE_NAME	The name of the resource to which the collaborated asset belongs.
RESOURCE_TYPE	The type of the resource to which the collaborated asset belongs.
ASSET_NAME	The name of the asset on which the user has collaborated.
ASSET_TYPE	The type of the asset.
COLLABORATION_ACTION	The type of collaboration performed. For example, review, question and answer, etc.
REFERENCE_ACTION	The reference collaboration activity on which the collaboration is done.

View Column	Description
COLLABORATION_TIME	The time when the collaboration is done.
ASSET_ID	The path of the asset in the Catalog.

DAA_USER_GROUPS_SV

Displays user specific information such as the group that the user is associated with, the group association and disassociation times, and the user creation and deletion times.

The *User and User Groups* report uses this view. The following table describes the view columns:

View Column	Description
USER_LOGIN_NAME	The name of the user. **Note:** If a user belongs to multiple user groups, the view displays multiple records of the same user with a different user group name.
USER_GROUP_NAME	The user group to which the user belongs.
IS_ADMIN	Specifies whether the user is an administrator.
SECURITY_DOMAIN	The name of the security domain to which the user belongs.
USER_CREATE_TIME	The time when the user was created. **Note:** The user created and deleted dates depend on the time you synchronize the user information into Data Asset Analytics.
USER_DELETE_TIME	The time when the user was deleted.
USR_GRP_ASSOC_CREATE_TIME	The time when the user was associated with the user group.
USR_GRP_ASSOC_DELETE_TIME	The time when the user was deleted from the associated user group.

DAA_USER_LOGIN_SV

Displays the login information for users and their group association and disassociation times.

The *User Logins* report uses this view. The following table describes the view columns:

View Column	Description
USER_LOGIN_NAME	The name of the users who logged in to Enterprise Data Catalog applications. **Note:** If a user belongs to multiple user groups, Data Asset Analytics displays multiple records of the same user with a different user group name.
USER_GROUP_NAME	The name of the user group to which the user belongs.

View Column	Description
LOGIN_APP_NAME	Specifies whether the user has logged into enterprise data catalog or the catalog administrator application.
LOGIN_TIME	The time when the user logged into the application.
SECURITY_DOMAIN	The name of the security domain to which the user belongs.
USR_GRP_ASSOC_CREATE_TIME	The time when the user was associated with the user group.
USR_GRP_ASSOC_DELETE_TIME	The time when the user was removed from the associated user group.

DAA_USER_SEARCH_SV

Displays information about the catalog searches performed by users.

The *User Searches* report uses this view. The following table describes the view columns:

View Column	Description
USER_LOGIN_NAME	The name of the user who performed the search.
USER_GROUP_NAME	The name of the user group to which the user belongs.
SEARCH_STRING	The search string used by the user for searching.
SEARCH_TIME	The time when the search was performed.
USR_GRP_ASSOC_CREATE_TIME	The time when the user was associated with the user group.
USR_GRP_ASSOC_DELETE_TIME	The time when the user was removed from the associated user group.

CHAPTER 15

Configure Analytics Application

This chapter includes the following topics:


- Configure Analytics Application Overview, 234
- Configure Analytics Application Settings, 235
- Refresh analytical data in pre-computed tables, 239

Configure Analytics Application Overview

You can configure Data Asset Analytics to customize the minimum and maximum values of the data value calculator. You can customize the value range of the degree of collaboration.

You can also configure the sever settings of Data Asset Analytics on the **Application Configuration** page.

The following image shows a sample **Application Configuration** page:

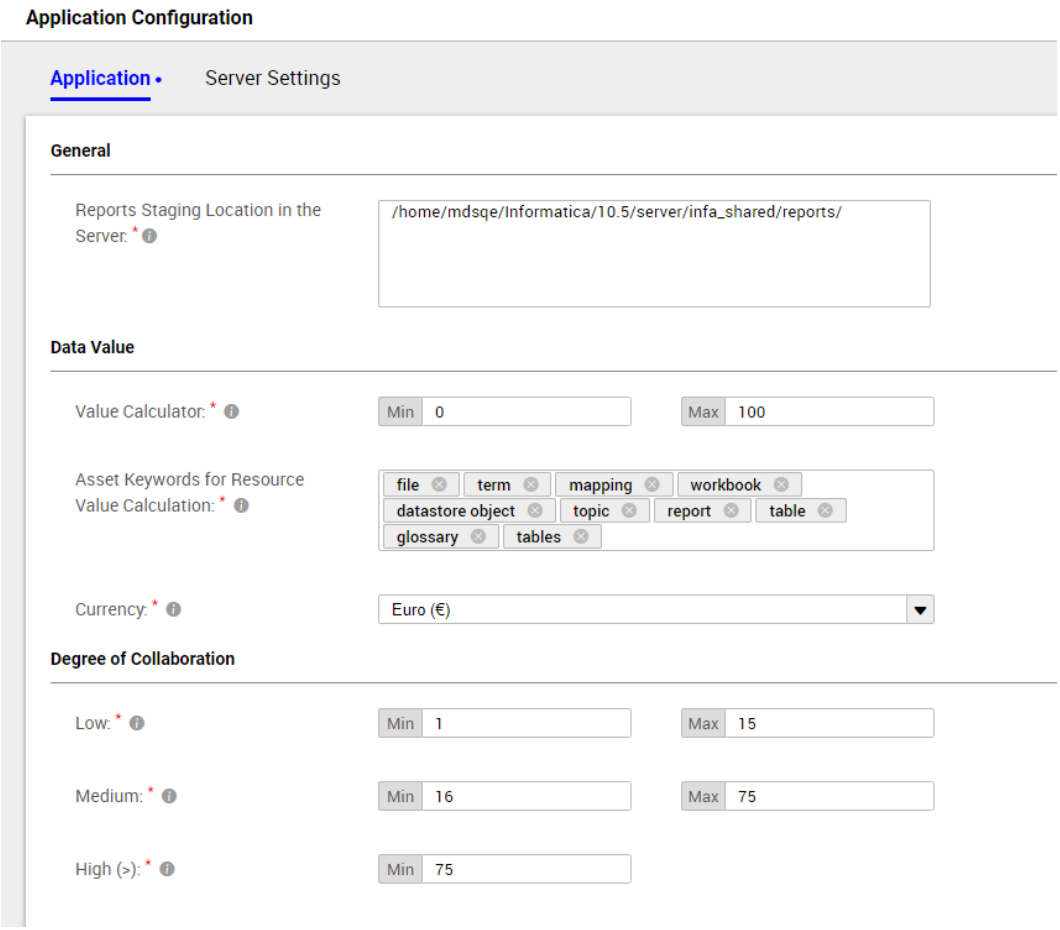

Note: Effective in Enterprise Data Catalog version 10.5.0.1, the **View Analytics From** option is no longer available.

Configure Analytics Application Settings

The **Application Configuration** page displays the Data Asset Analytics configuration settings on the **Application** and **Server Settings** tabs.

Each tab displays different configuration settings. On the **Application** tab, you can specify the staging location where you want to view the log file and csv file details of the reports that you create. You can specify the minimum and maximum values that you want to use when you assign a data value for asset enrichments and resources on the **Data Value** tab. You can also specify the values that you want to use as the low, medium, and high range when you view the degree of collaboration chart.

On the **Server Settings** tab, you can enable the event purge setting and specify the time when you want to purge the processed event data from the staging location. You can specify the cache size limit that you want Data Asset Analytics to store. You can also specify the interval when you want Data Asset Analytics to remove the cache information.

You can view the **Application Configuration** page after the Informatica administrator assigns the **Admin Management:Configuration** privilege for you in the Catalog Service. For more information about privileges and permissions, see the *Informatica Administrator for Enterprise Data Catalog* guide.


Configuring Application Settings

The **Application** tab displays configuration settings in the General, Data Value, and Degree of Collaboration sections.

Use the **General** section to specify the start date from when you want to view the analytics data in dashboard charts, and specify the staging location where you want to store the executed reports and log file information in the server. Use the **Data Value** section to configure the minimum and maximum value of the data value calculator. Use the **Degree of Collaboration** section to configure the range based on which you want to catagorize the collaboration activities across resources. You can configure the range based on the Low, Medium, and High options.

1. Click the **Application Configuration** icon ( ).

   The **Application** tab appears on the Application Configuration page.

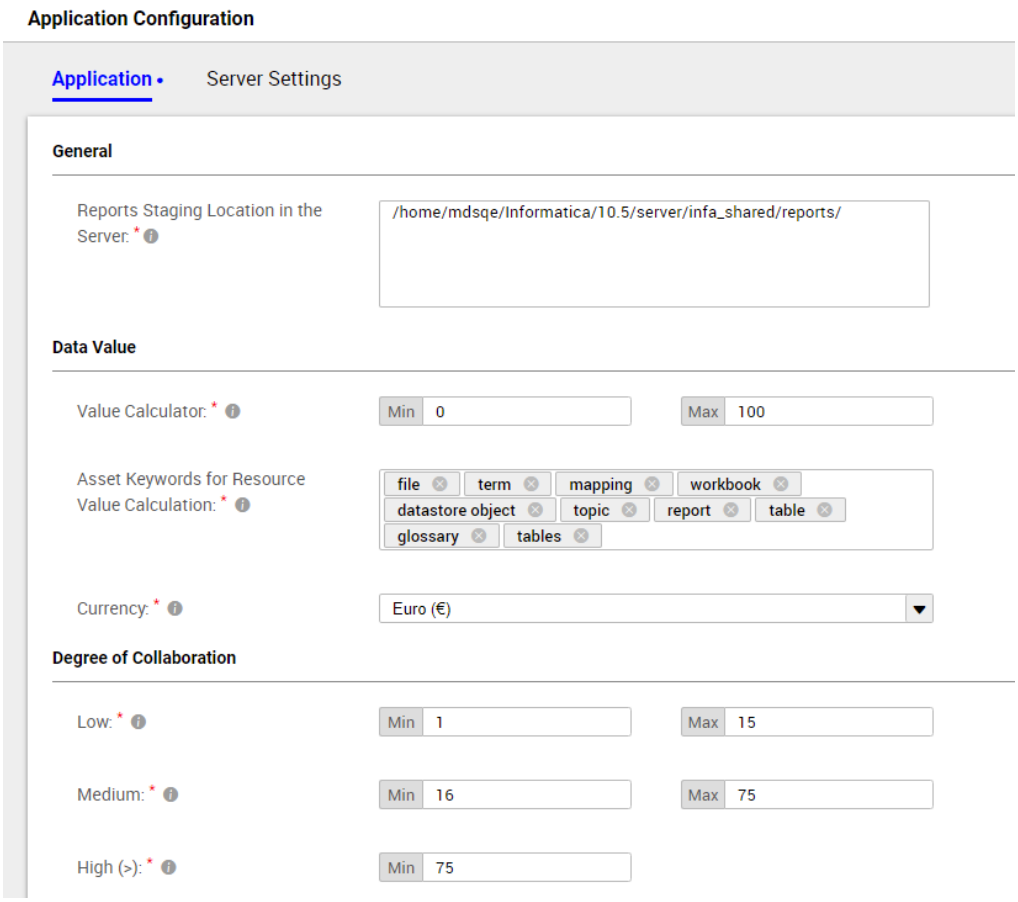

2. In the **General** section, configure the following option:

   - In the **Reports Staging Location in the Server** field, enter the valid path to the staging location in the server starting with a slash (/). The default path is `/<INFA_HOME>/server/infa_shared/reports/`.

   Note: Effective in Enterprise Data Catalog version 10.5.0.1, the **View Analytics From** option is no longer available.

3. In the **Data Value** section, configure the following options:

   - Specify the minimum and maximum value in the **Value Calculator** field. The minimum value must be greater than or equal to 0 and the maximum value must be lesser than or equal to 1000.

- Specify asset keywords in the **Asset Keywords for Resource Value Calculation** section. Data Asset Analytics matches the keywords with the string with which an asset name ends to select the assets in the catalog. The **Resource Value** is calculated by applying the data value to the selected assets.
- Specify asset keywords using the following criteria:
  - You can use keywords from the following list of default keywords: topic, table, tables, glossary, term, file, datastore object, mapping, report, and workbook.
  - Use keywords that represent the asset types in the catalog. Examples include table, column, term, and report. To select a group of assets, you can specify keywords based on the string with which an asset ends. For example, if you specify a keyword such as file, all assets such as Excel File, File, and XML file are selected from the catalog.
  - Do not include numerals or special characters.

  Note: Keywords that are not found in the catalog along with keywords that do not match the criteria are removed from the list after you save the application configuration.
- Select the required currency from the following options in the **Currency** drop-down list:
  - Euro
  - Japanese Yen
  - US Dollar.

  Note: The **Data Value** dashboard displays the values in the currency selected.

4. In the **Degree of Collaboration** section, configure the following options:
   - **Low**. Specify the minimum and maximum values you want to categorize as the low range for the collaboration activities. The default values are `1 through 15`.
   - **Medium**. Specify the minimum and maximum values you want to categorize as the medium range for the collaboration activities. The default values are `16 through 75`.
   - **High**. Specify the minimum value you want to categorize as the high range for the collaboration activities. The default value is `75`.
5. Click **Save**.

Configuring Server Settings

The **Server Settings** tab displays configuration settings in the Event Load and Performance Cache sections.


Use the **Event Load Settings** section to configure the user account synchronization time frequency, enable the event purge, and specify the time when you want to purge the processed event data from the staging location. Use the **Performance Cache Settings** section to specify the cache size limit that you want Data Asset Analytics to store, and specify the interval when you want Data Asset Analytics to remove the cache information.

Note: Data Asset Analytics does not update the latest changes if you configure the **Performance Cache Settings** for more than once within 30 minutes of the previous configuration. It is recommended that you configure the cache settings after 30 minutes of the previous configuration.

1. Click the **Application Configuration** icon ( ).

   The **Application Configuration** page appears.
2. Click **Server Settings**.

The **Server Settings** tab appears.

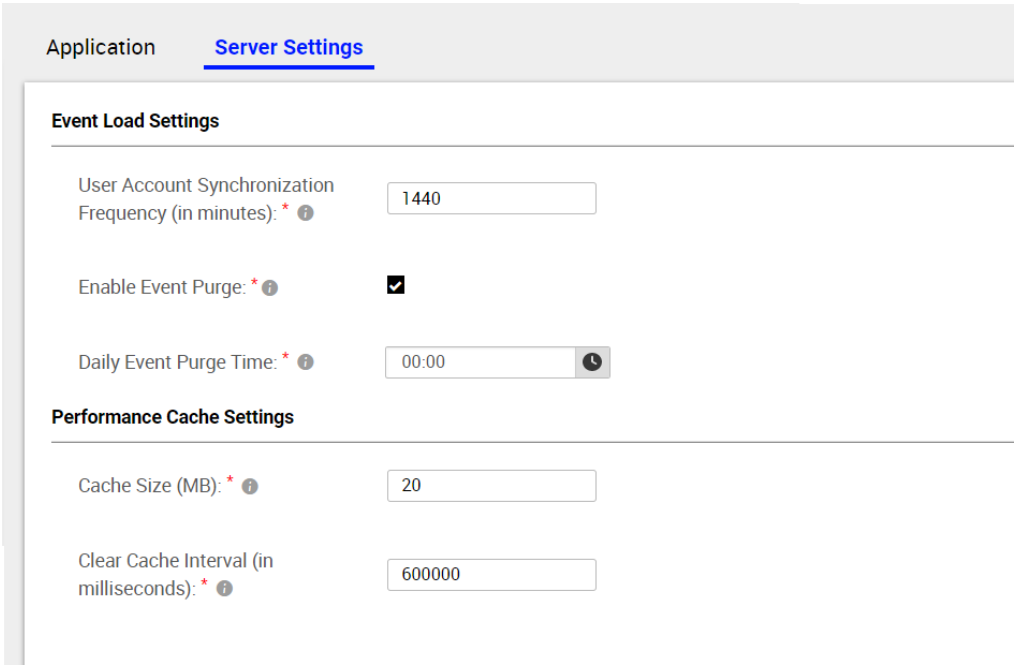

3. In the **Event Load Settings** section, configure the following options:
   - To set the time frequency when you want Data Asset Analytics to load new user account details, specify the time in the **User Account Synchronization Frequency** field. The default is `1440` minutes (24 hours).
   - To remove processed event data from the staging location, select the **Enable Event Purge** option. This option is selected by default.
   - To set the daily time frequency when you want Data Asset Analytics to delete the processed event data from the staging location, specify the time in the **Daily Event Purge Time** field. The default time is `00:00(12:00 AM)`.
4. In the **Performance Cache Settings** section, configure the following options:
   - To set the cache size limit you want Data Asset Analytics to store, specify the value in the **Cache Size** field. The default limit is `20` MB.
   - To set the time interval when you want Data Asset Analytics to remove the cache information, specify the value in the **Clear Cache Interval** field. The default is `600000` milliseconds (10 minutes) .

     Note: Effective in Enterprise Data Catalog version 10.4.1.0.1 and 10.4.1.1, the **Clear Expire Interval** label is renamed to **Clear Cache Interval**.
5. Click **Save**.

Refresh analytical data in pre-computed tables

Data Asset Analytics displays key metrics and key charts on the dashboard tabs based on pre-computed analytical data. If you notice a discrepancy in the data, you must refresh the analytical data in the pre-computed database tables.

Perform the following steps to run the Data Asset Analytics utility in synchronize mode to refresh the analytical data:

1. Back up the Data Asset Analytics database schema.
2. Disable the Catalog Service.
3. From the Akamai Download Manager, download and extract the informatica_1051_daa_utility.zip file on the domain machine.

   Note: If you applied a service pack, you must download the utility corresponding to the service pack version.
4. Go to the directory where you extracted the files and navigate to the `config` directory.
5. Open the input.properties file and configure the following connection parameters for the Data Asset Analytics repository.

Property	Description
databaseType	The Data Asset Analytics database type. Enter ORACLE, POSTGRESQL, or SQLSERVER.
databaseHostName	The fully qualified host name of the machine where the database is hosted. **Note:** If the value contains a special character, you must enclose the value within single quotes (').
databasePort	The port number for the database engine service.
databaseServiceName	The service name for the Oracle database.
databaseName	The database name for the PostgreSQL or SQL Server database.
databaseUserName	The name of the user account to connect to the database.
databaseAdvanceParameter	Optional. Enter the advanced JDBC connection parameters used to connect to the Data Asset Analytics repository. **Note:** You must enclose the parameters within single quotes (').

6. On a shell command line, enter the following command to run the utility from the directory where you extracted the files: `./daautil.sh`.
7. Press **2** to select the synchronize mode.
8. Enter the password to connect to the database.

   Note: To know the execution status, see the daautil.log file from the directory from which you run the utility.

CHAPTER 16

Data Flow Analytics

This chapter includes the following topics:

- Data Flow Analytics Overview, 240
- Accessing Data Flow Analytics, 241
- Use Case, 241

Data Flow Analytics Overview

Use Data Flow Analytics to view statistical information about the mappings that exist in PowerCenter resources.

You can view key metrics about mappings in PowerCenter resources. The key metrics include the number of resources, folders, workflows, and mappings. You can also view the mapping discovery metrics associated with each resource such as the number of mappings and the date on which the mappings were discovered.


Data Flow Analytics analyzes mappings. It performs analyses such as similar mapping analysis and duplicate mapping analysis. The analyses also include mapplet candidate analysis, reusable transformation candidate analysis, and user-defined function candidate analysis. For each mapping resource, you can view the percentage of mappings for each analysis type with respect to the total number of mappings.

To view the mapping details specific to a resource, you can click the resource name from the dashboard page. At the resource level, for each mapping analysis type, the discovered mappings are organized into multiple groups.

Data Flow Analytics User Interface

After you configure Data Asset Analytics for Enterprise Data Catalog, the **Data Flow Analytics** tab is enabled in Enterprise Data Catalog.

The following image shows the user interface of Data Flow Analytics with the **Dashboard** page open:

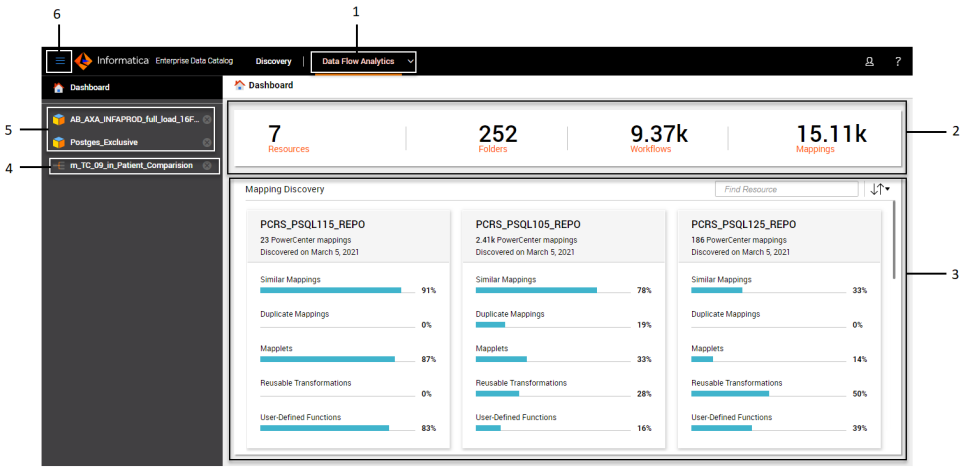

1. **Data Flow Analytics** tab to view the discovered mappings from PowerCenter resources
2. Key metrics about PowerCenter Resources
3. View the mapping discovery metrics for each PowerCenter resource
4. List of mappings that you have previously accessed
5. List of resources that you have previously accessed
6. Hide or display page names

Accessing Data Flow Analytics

You can access the **Data Flow Analytics** dashboard page from the Enterprise Data Catalog tool.

Before you access Data Flow Analytics, make sure that Data Asset Analytics is enabled for Enterprise Data Catalog and you have the required privileges to access Data Asset Analytics. Also, make sure that a read-only database user with the required privileges exists to connect to the PowerCenter repository.

To log in to Data Flow Analytics, log in to the Enterprise Data Catalog tool, click  , and select **Data Flow Analytics**.

Use Case

You are a catalog user who wants to view statistical information about the mappings that exist in PowerCenter resources. You might want to visualize the mappings to gain useful insights and to download the report that you can export to a third-party application. Additionally, you might want to view the mapping diagram for a mapping to understand the data transformation logic.

The challenge is to categorize the large number of mappings based on predefined criteria and present them in a format from which you can draw meaningful inferences.

The specific analytical requirements and the features in Data Flow Analytics that helps you to accomplish the tasks are as follows:

View statistical mapping information

You can view statistical information about a resource such as the number of mappings within the resource, resource discovery date, and mapping statistics. To view resource specific statistical information, use the search box or the sort options from the **Dashboard** page to find the resource. You can then select a resource in the **Mapping Discovery** section to view information specific to a mapping type.

View the mapping diagram for a mapping

You can view the mapping diagram for a specific mapping within a group. To view the mapping diagram for a mapping, in the table that contains the mappings, hover over the corresponding row in the last column, and click **View Diagram**.

Download a report

You can download a report that contains the statistics for each resource in a format that is suitable for exporting into a third-party application. To download the report containing the statistics specific to the resource, click  .

View the groups or candidates associated with a mapping

A mapping can be a part of multiple groups or candidates. To view mapping specific classification, select the mapping name from the table from the resource details page.

CHAPTER 17

Analyze Mapping Dashboard

This chapter includes the following topic:

- Dashboard Overview, 243

Dashboard Overview

Use the dashboard to view the statistical summary of mappings that exist in PowerCenter resources. You can view the key metrics such as the number of resources with mappings, folders where the mappings exist, number of workflows defined for the mappings, and total number of mappings that were part of the analysis.


The dashboard contains the **Mapping Discovery** section. The section displays the mapping statistics for each resource in different subsections.

The mapping statistics include the name of the resource, total number of mappings that were discovered, and date and year when the mappings were discovered. The resource subsection also displays information such as the percentage of similar mappings, duplicate mappings, and mappings with mapplets, reusable transformations, and user-defined functions.

To view details of each resource, click the resource subsection to open the resource on the resource mapping discovery page.

You can sort the **Mapping Discovery** section based on the resource name and discovery date. To find a particular resource, you can search for the resource by name in the search field.

The following image displays a sample mapping discovery dashboard:

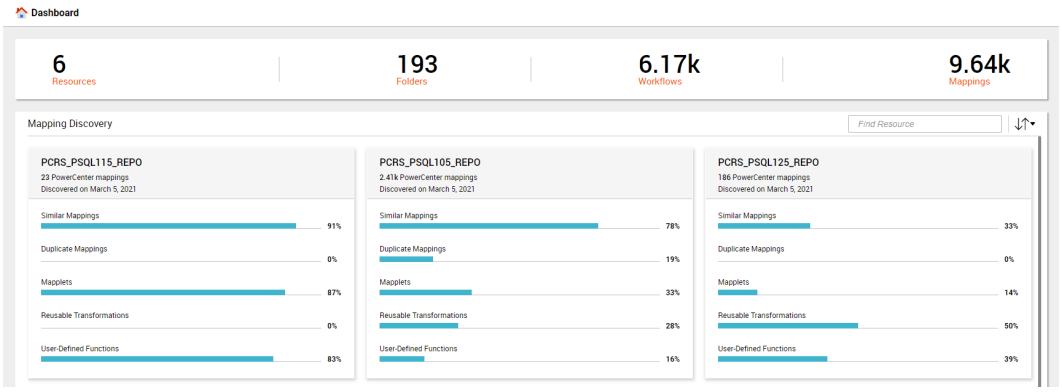

Note: The mapping discovery dashboard displays the total number of mappings available in the PowerCenter repository. The asset overview page for the PowerCenter resource displays the number of mappings that are associated with at least one workflow.

Resource Mapping Discovery

Use the resource mapping discovery page to view the analytical information of a particular mapping resource.

The page displays general information such as the name of the resource, the total number of mappings that the resource contains, and the date when the mappings were discovered. The page also displays the **Mapping Discovery** section. By default, the **Mapping Discovery** section displays the **Similar Mappings** tab. The section contains other mapping discovery tabs such as duplicate mappings, mapplets, reusable transformations, and user-defined functions.

Each mapping discovery tab displays mapping groups or candidates and a table that contains a list of mappings within the selected mapping group or candidate.

You can view the following details in the mapping discovery tabs:

Similar Mappings

Use the similar mappings tab to view a summary of the similarity analysis of all the mappings in the resource. The tab categorizes mappings into different groups based on the similar mapping structure. Each group consists of mappings that include similar data integration patterns and identical sources, targets, and transformation types.

Duplicate Mappings

Use the duplicate mappings tab to view a summary of the duplicate mappings analysis of all the mappings in the resource. The tab categorizes mappings into different groups based on the identical mapping structure. Each group consists of mappings that include identical transformation objects, data integration patterns, and sources and targets.

Mapplets

Use the mapplets tab to view a summary of the mapplet candidate analysis in the resource. A mapplet is a reusable object that you create in the Mapplet Designer. It contains a set of transformations and lets you reuse the transformation logic in multiple mappings. Data Flow Analytics discovers identical repeated mapping transformation sequences that you can use to create reusable mapplets. The tab categorizes identical repeated mapping transformation sequences as mapplet candidates. Each candidate consists of identical mapplet instances.

Reusable Transformations

Use the reusable transformations tab to view a summary of the reusable transformation candidate analysis in the resource. The tab categorizes the reusable transformations into different candidates based on an identical transformation that you can reuse in other mappings. Each candidate consists of identical reusable transformations.


User-defined Functions

Use the user-defined functions tab to view a summary of the user-defined function candidates analysis in the resource. The tab categorizes expressions in transformation fields into different candidates if the expressions are found in five or more transformation fields. Each candidate consists of identical expression templates. Data Flow Analytics discovers complex expressions with similar syntax within the expression transformation fields. A complex expression includes at least 24 leaf nodes in the expression parse tree. You can use the expressions as user-defined functions.

Similar Mappings

The **Similar Mappings** tab displays the analytical summary of the similar mappings in the resource.

The following image displays a sample **Similar Mappings** tab with the key metrics highlighted:

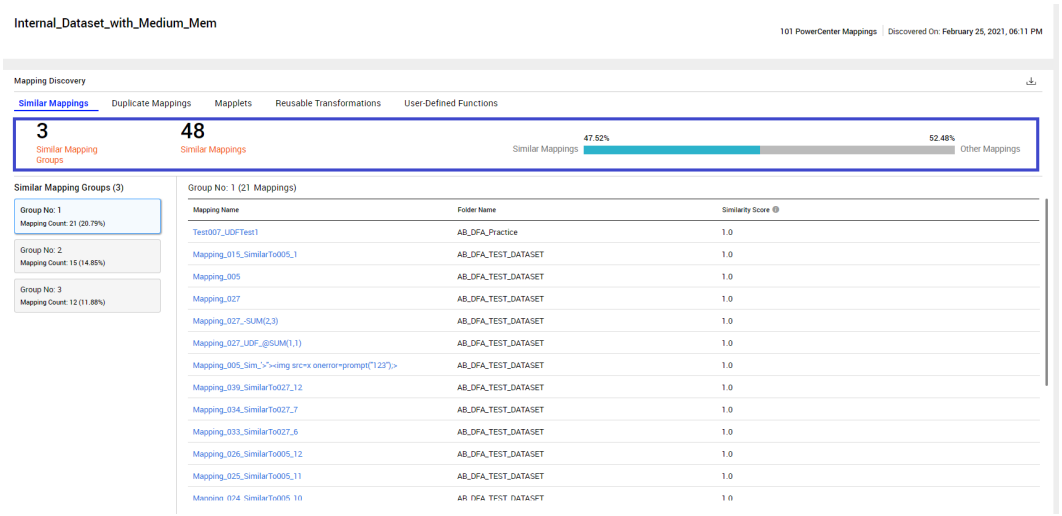

Similar Mappings Key Metrics

You can view the following key metrics on the **Similar Mappings** section:

Similar Mapping Groups

Displays the number of similar mapping groups in the resource.

Similar Mappings

Displays the number of similar mappings in the resource.

Similar Mappings Percentage

Displays the percentage of similar mappings to the total number of mappings in the resource.

Similar Mapping Groups

Data Flow Analytics categorizes mappings into different groups based on similar data integration patterns, identical source and target types, and transformation types. For example, consider that a resource `R1` consists of ten mappings. Out of the ten mappings, three mappings in the resource have DB2 as the source and Oracle as the target type, and other seven mappings include Teradata as the source and Oracle as the target type. The first three mappings are grouped into **Group 1** and the other seven mappings are grouped into **Group 2**.

The **Similar Mapping Groups** section displays a list of mapping groups. Each mapping group displays the count and percentage of mappings that belong to that group. Based on the number of mappings in each group, the section displays top 30 mapping groups and each group includes at least ten mappings.


The section also contains a table that displays details of the mappings in that group. The details include the folder name where the mapping exists and the similarity score. The similarity score provides a measure of how similar the mapping is to other mappings in the group.

If you want to view the details of a particular mapping, click the mapping name from the table. To view the graphical representation of the mapping, click the **View Diagram** button.

Duplicate Mappings

The **Duplicate Mappings** tab displays the analytical summary of the duplicate mappings in the resource.

The following image displays a sample **Duplicate Mappings** tab with the key metrics highlighted:

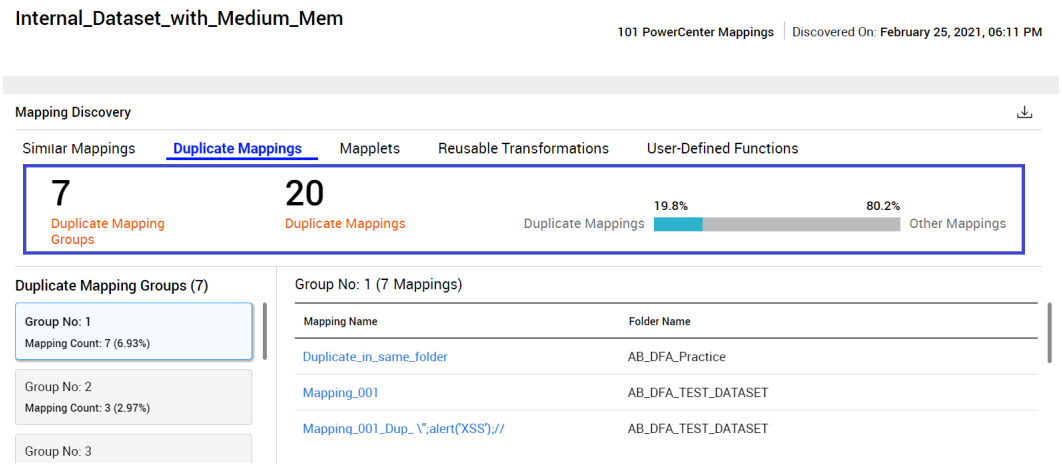

Duplicate Mappings Key Metrics

You can view the following key metrics on the **Duplicate Mappings** tab:

Duplicate Mapping Groups

Displays the number of duplicate mapping groups in the resource.

Duplicate Mappings

Displays the number of duplicate mappings in the resource.

Duplicate Mappings Percentage

Displays the percentage of duplicate mappings to the total number of mappings in the resource.

Duplicate Mapping Groups

Data Flow Analytics categorizes mappings into different groups based on identical sources, targets, transformations, and field links that the mappings include.


The **Duplicate Mapping Groups** section displays the list of mapping groups. Each mapping group displays the count and percentage of mappings that belong to that group. The section also contains a table that displays the folder names where the mappings exist.

If you want to view the details of a particular mapping, click the mapping name from the table. To view the graphical representation of the mapping, you can click the **View Diagram** button.

Mapplets

The **Mapplets** tab provides a summary of the mapplet candidates analysis of all mappings in the resource.

The following image displays a sample **Mapplets** tab with the key metrics highlighted:

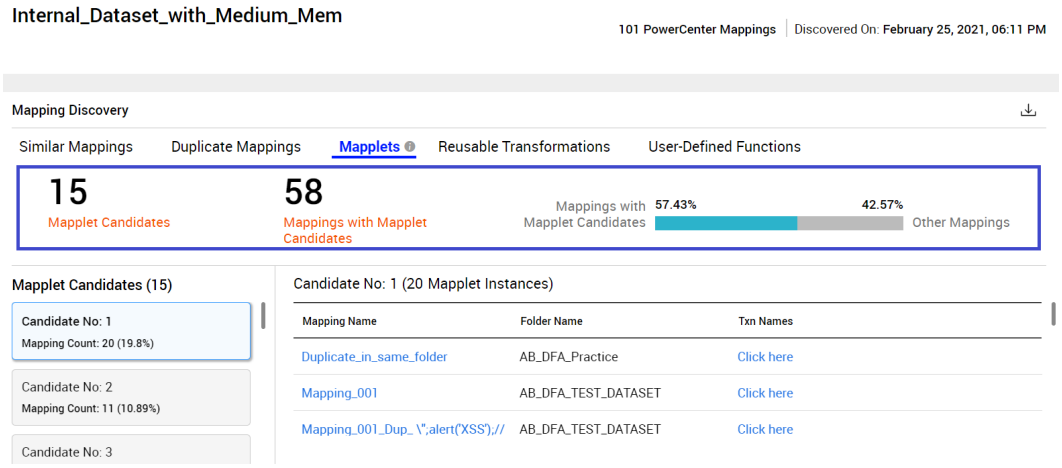

Note: In Data Flow Analytics, the abbreviation Txn is used to denote transformation.

Mapplets Key Metrics

You can view the following key metrics on the **Mapplets** tab:

Mapplet Candidates

Displays the number of mapplet candidates in the resource.

Mappings with Mapplet Candidates

Displays the number of mappings that include mapplet candidates in the resource.

Mappings with Mapplet Candidates Percentage

Displays the percentage of mappings with mapplet candidates to the total number of mappings in the resource.

Mapplet Candidates

Data Flow Analytics categorizes identical repeated mapping transformation sequences into mapplet candidates. Each candidate consists of identical mapplet instances.


The **Mapplet Candidates** section displays the list of mapplet candidates in the resource. Each mapplet candidate displays the count and percentage of mappings that contain a particular mapplet candidate. The section also contains a table that displays the folder names where the mappings exist and transformations that are included in the mapplet instances.

If you want to view the details of a particular mapping, click the mapping name from the table. To view the transformation name and type of transformation that is used in the mapplet instance, click the link under the **Txn Names** column. To view the graphical representation of the mapping, you can click the **View Diagram** button. In the diagram, the mapplet instances or transformation sequences are highlighted.

Reusable Transformations

The **Reusable Transformations** tab provides a summary of the reusable transformation candidates analysis of all mappings in the resource.

The following image displays a sample **Reusable Transformations** tab with the key metrics highlighted:

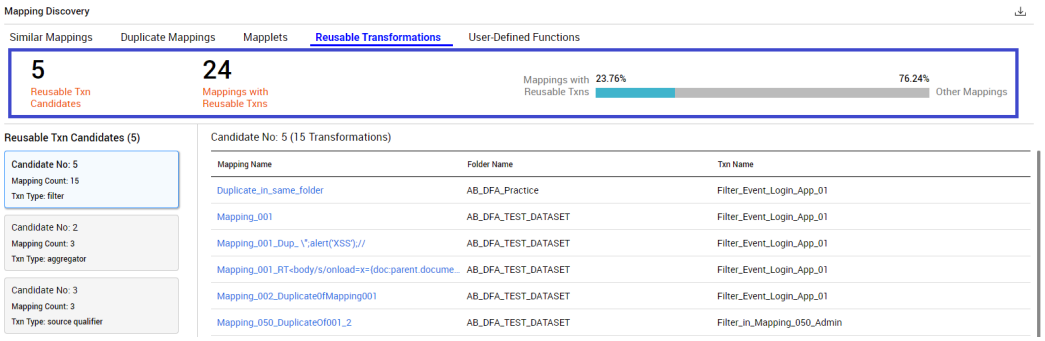

Reusable Transformations Key Metrics

You can view the following key metrics on the **Reusable Transformations** tab:

Reusable Transformation Candidates

Displays the number of reusable transformation candidates in the resource.

Mappings with Reusable Transformations

Displays the number of mappings that include reusable transformation candidates in the resource.

Mappings with Reusable Transformations Percentage

Displays the percentage of mappings that contain reusable transformation candidates to the total number of mappings in the resource.

Reusable Transformations Candidates

Data Flow Analytics categorizes the reusable transformations into different candidates based on an identical transformation that can be reused in other mappings.


The **Reusable Txn Candidates** section displays the list of reusable transformation candidates. Each reusable transformation candidate displays the count of mappings that contain a particular candidate and the type of transformation. The section also contains a table that displays the folder names where the mappings exist and names of the transformations that you can reuse.

If you want to view the details of a particular mapping, click the mapping name from the table. To view the graphical representation of the mapping, you can click the **View Diagram** button. In the diagram, the re-usable transformations are highlighted.

User-Defined Functions

The **User-Defined Functions** tab provides a summary of the user-defined function candidates analysis of all mappings in the resource.

The following image displays a sample **User-Defined Functions** tab with the key metrics highlighted:

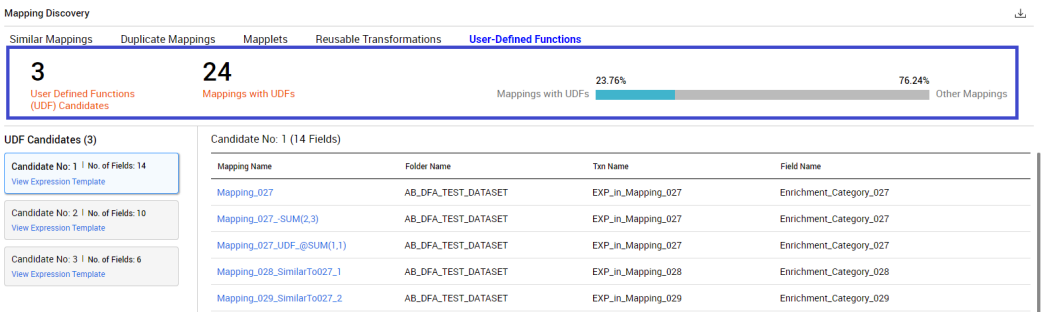

User-Defined Functions Key Metrics

You can view the following key metrics on the **User-Defined Functions** tab:

User Defined Functions (UDF) Candidates

Displays the number of UDF candidates in the resource.

Mappings with UDFs

Displays the number of mappings that include UDF candidates in the resource.

Mappings with UDFs Percentage

Displays the percentage of mappings that include UDF candidates to the total number of mappings in the resource.

User-Defined Functions Candidates

Data Flow Analytics categorizes mappings based on complex expressions that have similar syntax within expression transformation fields.

The **UDF Candidates** section displays the list of UDF candidates. Each candidate displays the number of fields where the UDF candidate was discovered and a link to view the expression template.

The following image displays a sample expression template:



The section also contains a table that displays the folder names where the mappings that contain the UDF candidates exist, the name of the transformation, and the mapping field where the UDF candidate was found.

If you want to view the details of a particular mapping, click the mapping name link from the table. To view the expression, you can click the **View Expression** button.

The following image displays a sample expression:



Download Reports

You can export a report containing the mapping statistics for each discovered group to a Microsoft Excel (.xlsx) file. The file contains separate worksheets for summary and details for each group. To download the report for a PowerCenter resource, select the resource from the dashboard and click .

Mapping Discovery Worksheets

The resource mapping discovery report includes the following worksheets:

- **Resource Mapping Discovery**. The Mapping Discovery Description section contains a brief description about the statistics that appear in each worksheet. The Mapping Discovery Summary section contains the resource level statistics.
- **Mapping Details**. Contains a list of all mappings within the resource that are part of mapping discovery groups and their corresponding statistical details.
- **Similar Mappings Summary**. Contains the key statistics and the group specific summary statistics for each group within the similar mappings discovery group.
- **Similar Mappings Details**. Contains a list of all mappings within the similar mappings discovery group and their corresponding details such as the group number, description, folder name, similarity score, number of sessions, and the date and time when a workflow associated with a mapping was last run.
- **Duplicate Mappings Summary**. Contains the key statistics and the group specific summary statistics for each group within the duplicate mappings discovery group.


- **Duplicate Mappings Details**. Contains a list of all mappings within the duplicate mappings discovery group and their corresponding details such as the group number, description, folder name, number of sessions, and the date and time when a workflow associated with a mapping was last run.
- **Mapplets Summary**. Contains the key statistics and the specific summary statistics for each mapplet candidate within the mapplets discovery group.
- **Mapplets Details**. Contains a list of all mappings within the mapplets discovery group and their corresponding details such as the candidate number, description, folder name, and the transformation names and types for a mapplet candidate.
- **Reusable Transformation Summary**. Contains the key statistics and the specific summary statistics for each reusable transformation candidate within the reusable transformation discovery group.
- **Reusable Transformation Details**. Contains a list of all mappings within the reusable transformation discovery group and their corresponding details such as the candidate number, description, folder name, and the transformation name and type.
- **UDF Summary**. Contains the key statistics and the specific summary statistics for each user defined functions candidate within the user defined functions discovery group.
- **UDF Details**. Contains a list of all mappings within the user defined functions discovery group and their corresponding details such as the candidate number, description, folder name, transformation name and type, field name, and the expressions that are discovered as user-defined function candidates.

Viewing Mapping Diagrams and Expressions

You can view the graphical representation of a mapping consisting of source and target definitions, transformations, and links in a mapping diagram. Reusable mapplets and transformations are highlighted in the mapping diagram for identification. For each user-defined function candidate, you can view the expression template. You can use the expression template to create user-defined functions.

To view the mapping diagram, hover over the row corresponding to the mapping, and then select **View Diagram**. Similarly, to view the expression template corresponding to a user-defined function candidate, select the link **View Expression Template** from the box that contains the candidate. The expression template consists of placeholders such as P1, P2, and P3 instead of expression values. To view the expression used in a mapping field, hover over the row containing the mapping in the table and select **View Expression**.

The following image displays a sample mapping diagram:

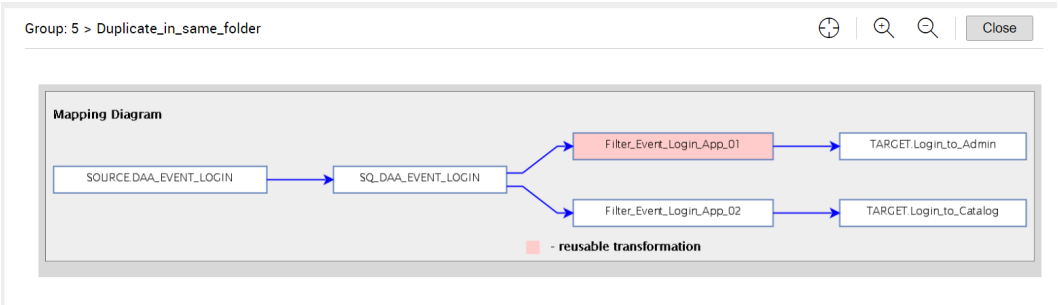

The following image displays a sample expression template:



The following image displays a sample mapping expression:



APPENDIX A

Enterprise Data Catalog Plug-in

This appendix includes the following topics:

- Enterprise Data Catalog Plug-in Overview, 253
- Prerequisites for the Tableau Server, 255
- Enterprise Data Catalog Plug-in Installation, 255
- Viewing Assets in Enterprise Data Catalog Plug-in, 256

Enterprise Data Catalog Plug-in Overview

Enterprise Data Catalog Plug-in is a web-browser based extension that you can use with Google Chrome browser. Use Enterprise Data Catalog Plug-in to access the contextual business and metadata information on assets from various sources, such as Tableau, Microstartegy, and Qlik Sense.

You can launch the Enterprise Data Catalog Plug-in from any website that you open in a Chrome tab. By default, the plug-in displays the plug-in home page. The home page lists the most searched keywords based on the recent search that you perform using Enterprise Data Catalog.

You can open a URL in a Chrome tab to launch the plug-in after you enrich an asset with a URL in Enterprise Data Catalog.

When you view an asset in Enterprise Data Catalog Plug-in, it displays details, such as the business title associated with the asset, description of the asset, business terms, people associated with the asset, and source assets that are related to the asset.


You can use Enterprise Data Catalog Plug-in to search for an asset based on the name, or perform a wildcard search to find all the catalog assets. You can use the filter and sort options to refine your search. To get a comprehensive view of the asset, you can launch Enterprise Data Catalog application from the Enterprise Data Catalog Plug-in to display the asset details view or the lineage and impact view.

Example

Susan, a business user in your organization, looks at a Tableau report called **Cost_Ratio_Report**. She needs to find out more about the business context and technical assets associated with the report so that she can understand the report better. She opens the **Enterprise Data Catalog Plug-in** extension within the Tableau Server and finds out that the business terms, such as **Variable Cost**, **Cost Ratio**, and **Fixed Cost** are associated with the report. She also finds out that **James** is the owner of the asset and **Mary**, **Patricia**, and **Jennifer** are associated as data stewards for the asset. Susan launches the Enterprise Data Catalog application from the extension to display the asset details view or the lineage and impact view for the report.

Enterprise Data Catalog Plug-in User Interface

The following image displays the user interface of Enterprise Data Catalog Plug-in:

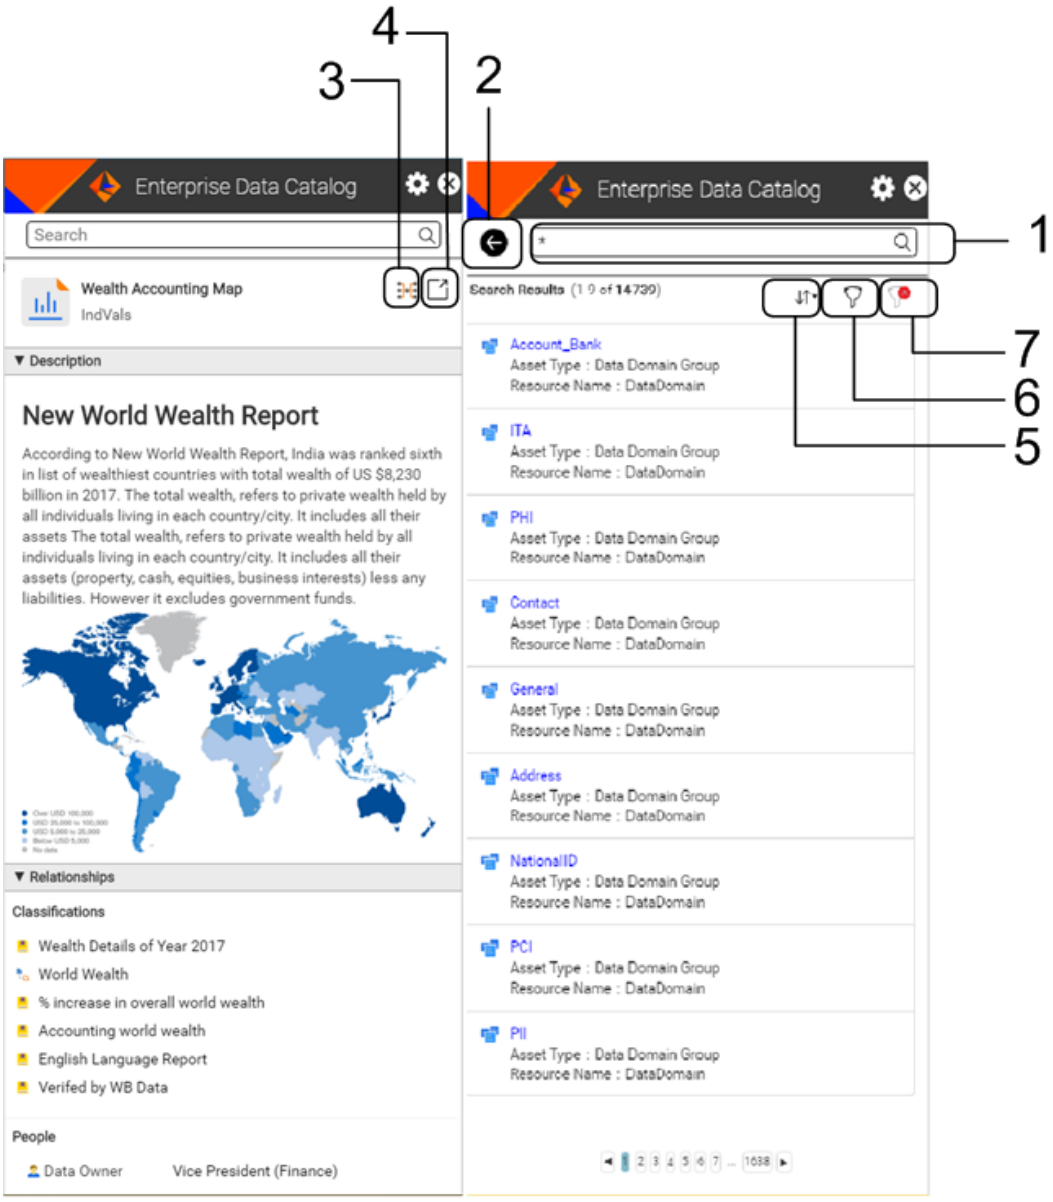

1. Search for assets.
2. Go back to the Enterprise Data Catalog Discover view.
3. Launch Enterprise Data Catalog to view the Lineage and Impact summary.
4. Launch Enterprise Data Catalog to view the Asset Details view.
5. Sort the asset list based on different attributes.
6. Filters used to refine your search.
7. Clear the filters.

Prerequisites for the Tableau Server

Before you configure and use Enterprise Data Catalog Plug-in, contact your administrator and make sure that the following prerequisites are met:

- Enterprise Data Catalog is installed.
- Access to the Tableau Server.
- In the Catalog Administrator, make sure that the administrator has performed the necessary administrative tasks, such as creating the required resources for the relevant Tableau asset, Business Glossary, Axon, and domain users. To view the lineage and impact information, make sure that the administrator has configured the related resources and connection assignment settings.
- If you upgrade from an existing version to the latest version of Enterprise Data Catalog, you must re-run an existing Tableau resource before you can view it in the plug-in.
- To disable Enterprise Data Catalog plug-in access from all URLs, configure the log level to **ERROR** in the Catalog Service options, or disable the site access in the Chrome browser.

See the *Catalog Administration Guide* for more information.

Enterprise Data Catalog Plug-in Installation

You can install the Enterprise Data Catalog Plug-in from the Chrome web store or the **Help** menu in the Enterprise Data Catalog tool.

Note: Effective in Enterprise Data Catalog version 10.5.2 or later, you can install the plug-in only from the **Help** menu in the Enterprise Data Catalog tool.

Installing Enterprise Data Catalog Plug-in from Chrome web store

1. Open the Chrome web store in the Chrome browser.
2. In the Chrome web store, search for **Enterprise Data Catalog Plug-in**.
3. Select **Enterprise Data Catalog Plug-in** from the extension results page.
4. Click **Add To Chrome**.
5. Click **Add extension** to confirm the installation.

Enterprise Data Catalog Plug-in appears on the upper right corner of the page.

Note: You cannot launch the Enterprise Data Catalog Plug-in from dynamic web pages that refresh the content automatically.

Installing Enterprise Data Catalog Plug-in from Help menu

1. From the **Help** menu in the Enterprise Data Catalog tool, click **Download EDC Chrome Plug-in**.
   A zipped file that contains the Enterprise Data Catalog plug-in installation files is downloaded.
2. Extract the Enterprise Data Catalog plug-in installation .zip file.
3. In Google Chrome, enter `chrome://extensions/` in the search bar.
4. On the **Extensions** page, click the Developer mode toggle.
   The new options appear on the page.
5. Click the **Load unpacked** option.
   The Select the extension directory window appears.

6. In the Select the extension directory window, navigate to the location where you extracted the Enterprise Data Catalog plug-in installation files. Locate the `manifest.json` file and then click **Select Folder**.

The Enterprise Data Catalog Plug-in gets added to your browser.

Configuring Enterprise Data Catalog Plug-in

After you install Enterprise Data Catalog Plug-in extension, you must enter the Enterprise Data Catalog Plug-in login credentials to get started.

1. Right-click the **Enterprise Data Catalog Plug-in** extension  icon from the header area and choose **Options** from the menu.

   The **Enterprise Data Catalog Plug-in Configuration** dialog box appears.
2. Enter the following properties for the connection:
   - **Username**. Username to log in to the Enterprise Data Catalog Plug-in.
   - **Password**. Password to log in to the Enterprise Data Catalog Plug-in.
   - **Security Domain**. Name of the Security Domain.
   - **Enterprise Data Catalog URL**. Enterprise Data Catalog application URL. Use the following URL format:

     `http[s]://<host>:<port>/ldmcatalog`
3. Optionally, select the **Remember Credentials** check box to save the login credentials.
4. Click **Save**.

Viewing Assets in Enterprise Data Catalog Plug-in

View an asset in Enterprise Data Catalog Plug-in to display business context and asset information of the asset.

1. Click the Enterprise Data Catalog Plug-in () icon on the top right area of the browser window.
2. Click the Enterprise Data Catalog Plug-in () icon on the right side of the page.

   The Enterprise Data Catalog Plug-in home page appears.
3. In the home page, type the name of the asset that you want to search for in the search box and click the search icon.

   The matching results appear in the results page.
4. Click an asset name that you want to view in the Enterprise Data Catalog Plug-in.

APPENDIX B

Enterprise Data Catalog Add-Ons

This appendix includes the following topics:

- Enterprise Data Catalog Add-Ons Overview, 257
- Deploy the Add-Ons, 258
- Log in to the Enterprise Data Catalog Add-Ons, 258
- View Resource Schedules and Duplicate Resources, 258
- Accept Data Domains, 259
- Moving Data Domains using the Data Domains Manager Utility, 260
- Associate Business Terms from Synonym File, 261
- Migrate Custom Attributes, 262

Enterprise Data Catalog Add-Ons Overview

Enterprise Data Catalog add-ons extend or supplement the features available in the Catalog tool and the Catalog Administrator tool.

Use the following add-ons to perform additional tasks on the resources and assets in the Catalog:

Catalog Operation Reports

View resource schedules for all resources in the Catalog and the list of duplicate resources.

CurateAssist

Curate data domain assets by moving specified data domains to the accepted state and rejecting other data domains in bulk.

Business Term Association from Synonym file

Associate business terms from an Informatica Axon resource with specific columns in a tabular asset.

Data Domains Manager

Move the accepted resources from one data domain to another in bulk.

Deploy the Add-Ons

Download the Enterprise Data Catalog add-ons installation package from the Informatica Marketplace. The ZIP file includes the files that you need to deploy the add-ons.

Perform the following steps to deploy the add-ons:

1. On the node on which you want to deploy the add-ons, extract the ZIP file.
2. From the directory where you extracted the files, run the following command to start the application: `./startup.sh`
   The host name and the port number to access the application appear in the following format: https://<host>:<port>

Log in to the Enterprise Data Catalog Add-Ons

After you deploy the add-ons, perform the following steps to log in to the Enterprise Data Catalog add-ons:

1. Open a browser.
2. In the address field, type the URL to access the add-ons in the following format: https://<host>:<port>
3. Enter the connection properties to log in to the Catalog tool.
   The following table describes the connection properties:

Property	Description
Catalog host	The gateway node host name.
Catalog port	The port number configured for the Catalog Service.
Protocol	Select **https** if you enabled a secure HTTPS connection for the Catalog tool.
Username	The user name to log in to the Catalog tool.
Password	The password to log in to the Catalog tool.

4. Click **Log In**.

Note: The Enterprise Data Catalog add-ons does not support single sign-on using LDAP authentication. To access the Enterprise Data Catalog add-ons using LDAP authentication, you must have the following Catalog Service privileges on the Informatica domain:

- REST API Privilege
- REST API User Privilege

View Resource Schedules and Duplicate Resources

You can generate the Resource Schedules report to view a list of all resources in the catalog and the schedules attached to each resource. The report helps you determine the best schedule to minimize the

number of simultaneous resource scan jobs when you create a new schedule. You can also generate the Duplicate Resources report to identify duplicate non-JDBC relational database type resources. Use the report to view the resource types and the number of duplicate resource groups for each resource type. You can also download the schedule report in Enterprise Data Catalog Add-On.

View Resource Schedules

1. Access the Enterprise Data Catalog add-ons.
2. In the **My Services** page, click **Catalog Operation Reports**.
3. In the **Catalog Information** page, verify that Resource Schedules is selected as the type of report.
4. Click **Connect** to view the report.
   The Resource Schedule Report displays scan schedules in calendar view or report view. Default is calendar view. Use the toggle icon to switch between the views.

Use the report view to view a list of all resources in the catalog, and the scan schedules. In the report view, click **Resources with schedules** to view only the resources with schedules. Click the link to the resource in the **Schedule details** column to view schedule details for the resource.

Note: The time zone of the resource schedule is the same as the system time zone.

In the report view, you can sort the list of resources, filter the list of resources, download a report containing the list of resources and schedules to a CSV file, and refresh the list. The CSV file includes the following schedules:

- Business Term Scheduler
- Composite Domain Discovery Scheduler
- Metadata Scheduler
- Profile Scheduler

You can also save filter criteria. Saved filters appear in the **Saved filters** menu. Use the calendar view to view the resource scan schedules on a calendar. Customize the view using the options at the top of the calendar.

View Duplicate Resources

1. In the **Catalog Information** page, select Duplicate Resource Groups as the type of report.
2. Click **Connect** to view the report.
3. Click the number corresponding to a resource type to view the duplicate resource groups for the resource type. Resources that are grouped as duplicates have identical connection properties.
4. Click **Duplicate properties** in the **Connection properties** column to view the connection properties for the resource group. The page also indicates if a metadata filter is applied to the resource.

Accept Data Domains

You can move specified data domains to the accepted state and reject other data domains in bulk using the Enterprise Data Catalog Add-on. To perform bulk curation, export the assets to a CSV file and specify the data domains to move to the accepted state. Use the add-on to parse the CSV file and generate an output

file. In the output file, the specified data domains are moved to the accepted state and all other data domains are moved to the rejected state. Import the CSV file into the Enterprise Data Catalog tool to curate the assets.

Specify the data domains that you want to move to the accepted state.

1. Export the assets to a CSV file.
2. Open the CSV file that you exported.
3. Add an AcceptedDataDomains column at the end of the worksheet.
4. For each asset that you want to curate, enter the data domain that you want to move to the accepted state in the AcceptedDataDomains column.
5. Save the file.

Perform bulk curation.

1. Access the Enterprise Data Catalog add-ons.
2. In the **My Services** page, click **CurateAssist**.
3. Click **Choose File** and select the CSV file.
4. Click **Curate** to parse the file.
5. Click the Download button to download the output file.
   The data domains that you specified in the AcceptedDataDomains column are moved to the accepted state and all other data domains that were in the Accepted or Inferred state are rejected.
6. Import the CSV file that you downloaded into the Enterprise Data Catalog tool to complete the data domain curation for the assets.

Moving Data Domains using the Data Domains Manager Utility

You can move the accepted resources in bulk from one data domain to another with the Enterprise Data Catalog Add-on.

Perform the following tasks to move accepted resources from one data domain to another data domain in bulk:

1. Access the Enterprise Data Catalog add-ons.
2. In the **My Services** page, click **Data Domains Manager**.
3. Select the source and destination data domains to use for the bulk move operation.
4. Click **Next**.
   A list of accepted resources of the source data domain appears.
5. Click **Submit**.
6. In the confirmation pop-up dialog box, click **Continue**.
   In the **Monitoring** page, view the status of job created for the bulk move operation.

Associate Business Terms from Synonym File

You can associate business terms from an Informatica Axon resource with specific columns within a tabular asset using the Enterprise Data Catalog add-on. The add-on supports tabular assets from relational database type resources. To associate business terms, use a synonym file in CSV format to define the associations. You can then specify the resource name, the Informatica Axon resource that contains the business term, upload the synonym file, and run the utility.

Define the business term associations in a synonym file.

1. Create a comma-separated values (CSV) synonym file with the following columns: TableName, ColumnName, BGMapping
2. Enter the names of columns that you want to associate with business terms, and the corresponding table names.
3. In the BGMapping column, enter the business terms that you want to associate.
4. Save the file.


Associate business terms with specific columns.

1. Access the Enterprise Data Catalog add-ons.
2. In the **My Services** page, click **Business Term Association from Synonym file**.
3. Specify the resource that contains the columns to associate with business terms.
4. Select the Informatica Axon resource that contains the business term.
5. Choose the synonym file.
6. Click **Submit** to start the business term association.
   The job status appears in a table.
7. To download a CSV file with the status for each column that you specified, click **Download file**. You can also view error messages for failed associations.

Migrate Custom Attributes

You can migrate the value of a custom attribute to another custom attribute.

Use the Custom Attribute Manager in the Enterprise Data Catalog Marketplace Add-on portal to migrate a custom attribute.

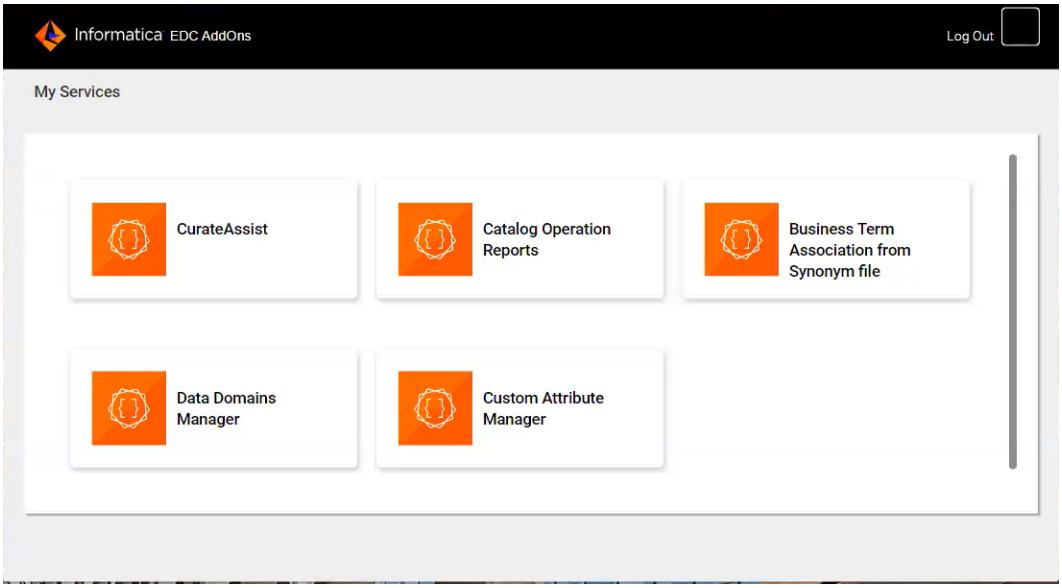

The value of the attribute you migrate replaces or appends to the value of the destination attribute depending on the data type of the destination attribute. Migration of custom attribute is applicable for attributes with the following data types:

- String
- Boolean
- Integer
- Date
- Decimal

Follow the steps below to migrate a custom attribute:

1. From the Marketplace Add-on portal, open the Custom Attribute Manager.
2. Choose the source and destination custom attributes and click Next.
3. Click continue to initiate the migration.
4. To monitor the status, click the link that appears.

INDEX

A

accept
  data domain 260
add
  answers 144
adding
  queries 144
application configuration
  asset types 169
  custom attributes 171
  filter settings 172
  overview 168, 234
  system attributes 170
asset
  queries 143
Asset Count
  Report 207
Asset enrichment
  Calculator 198
Asset Impact Summary
  columns 92
  displaying 90
  exporting 110
Asset Lineage Summary
  columns 92
  displaying 90
  exporting 110
asset summary view
  column descriptions 92
  displaying 90
  exporting 110
  filtering 110
  hiding columns 92
  overview 90
  rearranging column order 92
asset tasks
  overview 38
asset types
  application configuration 169
Asset Usage
  Report 211
assets
  assigning custom attribute values 126
  associating a business term 123
  Axon glossaries 39
  Axon glossary details 40
  business glossary assets 42
  business glossary categories 47
  business glossary glossaries 44
  business glossary policies 49
  business term details 45
  column assets 65
  composite data domain assets 80
  data domain assets 73
  export and import 126
assets *(continued)*
  field assets 65
  overview 38
  removing a business term association 124
  removing custom attribute values 126
  search overview 19
  searching from the home page 20
  tabular assets 50
  viewing additional details 27
Assets
  Following 141
associate
  business term 261
Axon glossaries
  details 40
  Overview 39
Axon glossary assets
  viewing in Informatica Axon 42

B

business example
  use cases 16
business glossary assets
  overview 42
  viewing in Analyst tool 50
Business Term Association
  Report 212
Business Term Association from Synonym file 261
business terms
  associating with assets 123
  associating with data domains 123
  details 45
  displaying in lineage and impact diagrams 98
  removing a term association 124
  viewing in Analyst tool 50

C

cache 234
categories
  details 47
  viewing in Analyst tool 50
certify
  assets 145
certifying
  assets 145
changes 138
child assets
  displaying in the diagram view 94
Collaboration
  calculator 200
column assets
  accepting data domains 56, 72

column assets *(continued)*
assigning data domains 56, 71
creating data domains 71
curating data domains 56, 71
details 66
overview 65
rejecting data domains 56, 72
composite data domains
asset details 81
configuration panel
opening and closing 93
configuring
general 234
emailnotificartion 137, 140
context
lineage and impact 102
CurateAssist 260
curation
assigning one asset 78
for individual assets 56, 71
overview 77
rejecting one asset 78
custom attributes
application configuration 171
assigning attribute values 126
export and import 126
removing attribute values 126

D

DAA
Overview 181
data
preview 147
provisioning 149
Data Catalog Analytics 182
Data Domain Association
Report 214
data domain groups
details 76
overview 73
data domains
asset details 74
assigning one asset 78
associating a business term 123
creating 71
curation 77
curation for individual assets 56, 71
group details 76
overview 73
rejecting one asset 78
data value
calculator 196
feature usage value calculator 202
decertify
assets 145
delete
questions 144
review 143
deleting
answers 144
diagram view
adjusting 93
assets within a link 97
default view 86
displaying additional hops 95
displaying and hiding business glossary terms 98
diagram view *(continued)*
displaying and hiding the legend 93
displaying child assets 94
displaying intermediate assets 95, 97
displaying the legend 93
expanding fully 95
expanding links 97
export file format 109
exporting 109
opening the asset summary 93
opening the configuration panel 93
panning 93
printing 109
slider controls 95
slider examples 96
zooming 93
direct link
definition 86

E

Enrichment
Report 208
Enterprise Data Catalog
logging in 15, 183
overview 14
user interface 15
Enterprise Data Catalog Add-Ons 259–261
Enterprise Data Catalog Plug-in
Configuration 256
Overview 253
Prerequisites 255
user interface 254
view Tableau assets 256
event load 234
examples
Lineage and Impact sliders 96

F

field assets
accepting data domains 56, 72
assigning data domains 56, 71
creating data domains 71
curating data domains 56, 71
details 66
overview 65
rejecting data domains 56, 72
filter
lineage and impact 104
filter settings
application configuration 172
follow
resource 138
Follow
Assets 132
following
assets 133
foreign keys
viewing the foreign key details 61

G

glossaries
details 44

H

hops
  definition 95
  examples 96

I

Impact Asset Summary
  filtering 110
impact definition 85
Impact slider
  examples 96
  using 95
indirect link
  definition 86
Informatica Global Customer Support
  contact information 12
Intelligent 119

K

keys
  opening foreign keys and primary keys 114
keyword search
  performing 21

L

legend
  displaying and hiding 93
Lineage
  Report 209
lineage and impact
  adjusting the diagram view 93
  asset summary view 90
  assets within a link 97
  diagram view 86
  difference with Relationships view 114
  displaying business glossary terms 98
  displaying child assets 94
  exporting the diagram 109
  hiding business glossary terms 98
  printing the diagram 109
  seed asset definition 86
  slider controls 95
  slider examples 96
  tabular view 90
Lineage and Impact
  Report 210
Lineage Asset Summary
  filtering 110
lineage definition 85
Lineage slider
  examples 96
  using 95
links
  definition 86
  expanding 97
logging in
  Enterprise Data Catalog 15, 183
Login
  Report 218

M

mini map control
  displaying 93
Monitoring
  overview 221

O

overview 85, 102, 104

P

policies
  details 49
  viewing in Analyst tool 50
Preview Data 148

R

rate
  review 142
ratings
  reviewing 143
reference assets 83
reference resources 83
relationships
  overview 111
Relationships view
  adjusting the diagram 112
  asset type circles 111
  difference with Lineage and Impact view 114
  exporting assets relationships 116
  opening assets from 114
  overview 111
  selected assets 111
Report
  creation 220, 222
Reports
  overview 205
resource
  summary 138
Resource Schedule Report add-on 259

S

Scan History
  Report 215
search
  configuring search filters 168
  customizing 28
  from the home page 20
  keyword search 21
  overview 19
  refine by asset size 32
  refine by asset type 30
  refine by attributes 34
  refine by business term status 35
  refine by certified assets 33
  refine by composite data domains 34
  refine by data domains 32
  refine by last updated time 31
  refine by ratings 33
  refine by reference assets 35

search *(continued)*
refine by resource name 30
refine by resource type 31
search suggestions 21
wildcard search 21
Search
Report 219
search results
sorting 26
viewing additional details 27
seed asset
definition 86
system attributes
application configuration 170

T

Tableau Data Extract File
Export 131
Overview 131
Prerequisites 131
tabular assets
checking data quality 59
details 51
overview 50

U

unfollowing
assets 142
resource 142
unique keys
viewing the unique key details 60
user
collaboration 132
User and Groups
Report 216
user interface 182
UserCollaboration
Report 217

V

view
lineage and impact 85
notifications 133
resource schedules 259

W

wildcard search
performing 21