How-To Library

Informatica

Using Data Domains in Enterprise Data Catalog

© Copyright Informatica LLC 2018, 2021. Informatica, the Informatica logo, and Big Data Management are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can use predefined data domains, rule-based data domains, and example-based data domains in Enterprise Data Catalog. Example-based data domains are also known as smart data domains. This article discusses how to create, view, and curate data domains.

Supported Versions

- Enterprise Data Catalog 10.2.1

Table of Contents

Overview. . . . 2
Predefined Data Domains. . . . 3
Running the Infacmd Command to Import Data Domains. . . . 3
Using Informatica Developer to Import Data Domains. . . . 4
Permissions and Privileges. . . . 4
Rule-based Data Domains. . . . 5
Creating or Editing Data Domains in Catalog Administrator. . . . 7
Data Domain Group. . . . 8
Creating or Editing Data Domain Groups in Catalog Administrator. . . . 9
Viewing Data Domain Groups and Data Domains in Catalog Administrator. . . . 9
Configuring and Running Data Discovery on a Resource to Discover Data Domains. . . . 10
View and Curate Data Domains in Enterprise Data Catalog. . . . 14
Example-based or Smart Data Domains. . . . 19
Creating an Example-based Data Domain. . . . 20
Propagating the Example-based Data Domains to Assets. . . . 21
FAQ. . . . 22
List of Predefined Data Domains in Enterprise Data Catalog. . . . 24
Column Name Rules in Enterprise Data Catalog. . . . 37
Data Rules in Enterprise Data Catalog. . . . 42
References. . . . 48

Overview

A data domain is a predefined or user-defined Model repository object that enables you to discover the functional meaning of column data or column names in an asset. Examples of data domains include Social Security number, account status, IP address, and UPC code. You can add one or more data domains into a data domain group.

You can use data domains to identify and understand the meaning of critical source data or undiscovered source data so that you can take measures, such as data masking, to work effectively on it. For example, you might have legacy data systems that contain Social Security numbers in a Comments field. You need to find this information so that you can take appropriate measures before you move it to new data systems.

Data domain discovery is the process of discovering the functional meaning of data in the data sources based on the semantics of data. After you enable data domain discovery for a resource and run the resource, the profiling scanner

uses the data domains to infer matching column data or column name patterns from the metadata extracted by the resources. In Enterprise Data Catalog, you can view a data domain as an asset. You can accept or reject the inferred assets for the data domain. You can also view the data domains for tabular, column, and field assets. These data domains are inferred for the asset from the profile results or from similar columns. You can accept or reject a inferred data domain for a tabular, column, or field asset.

In Catalog Administrator, you can view all the available data domains and data domain groups in the Library workspace. You can view or edit data domains, and view, edit, or delete data domain groups.

You can also create data domains and data domain groups in Informatica Analyst or Informatica Developer and use it in Enterprise Data Catalog. You can create mapplet rules in the Developer tool and use these rules to create data domains in Catalog Administrator. To use these data domains, Enterprise Data Catalog runs the DataDomain scanner which is auto-scheduled to run every 45 minutes. The scanner synchronizes the data domains between the Model repository and catalog.

To discover data domains in the data sources, you can choose predefined data domains, create and use rule-based data domains, or create and propagate the example-based data domains. Example-based data domains are also known as smart data domains. To create or view data domains and data domain groups, you need appropriate permissions and privileges.

Predefined Data Domains

Predefined data domains and predefined data domain groups are system-defined data domains and data domain groups that are available by default in Enterprise Data Catalog. The data domains are imported automatically when you install Enterprise Data Catalog. Predefined data domains use default conformance values. In Catalog Administrator, you can edit the predefined data domains to modify the default conformance values and add proximity data domains.

Predefined data domains use data rule, column name rule, or data and column name rules. Examples for predefined data domains include AccountNumber, India_NationalID, SSN_General, and ZipCode.

After you install Enterprise Data Catalog, you can choose to import the predefined data domains either in the Developer tool or run the `infacmd.sh oie importobjects` command.

Running the Infacmd Command to Import Data Domains

The predefined data domains are available in an XML file. To import the data domains into Enterprise Data Catalog, run the **infacmd oie ImportObjects** command to import the XML file into an existing project in the Model repository.

1. Navigate to `<Informatica_installation_directory>/properties/CMS` location.
2. In the `Import_Profile_DATA_DOMAIN.xml` file, verify that the connection name in the file is same as in Informatica Administrator.

   To view the connection name in the Administrator tool, navigate to the **Manage** > **Services and Nodes** > **Content Management Service** > **Associated Services and Reference Data Location Properties** > **Reference Data Location** section.
3. If the target option does not match, then you can edit, modify the target option to add the correct connection name, and save the file.
4. It is recommended that you add a temporary file location on the Informatica services machine that the Content Management Service uses to import the data domains.

   Perform the following steps to create a temporary file:

   a. In the Administrator tool, navigate to the **Manage** > **Services and Nodes** > **Content Management Service** > **Properties** > **File Transfer Options** section.

   b. Click the **Edit** icon.

c. In the **Edit File Transfer Options** dialog box, enter a temporary file location in the Informatica services machine.

d. Click **OK**.

5. Run the following command:

```
${INFA_HOME}/isp/bin/infacmd.sh oie importobjects -dn <Domain
name> -un <Username> -pd <Password> -rs ModelRepositoryServicename
-fp
<Informaticainstallationdirectory>/properties/CMS/Informatica_IDE_DataDomain.xml
-sc true -scv true -cp
<Informaticainstallationdirectory>/properties/CMS/Import_Profile_DATA_DOMAIN.xml
-oo
"rtm:codePage=UTF-8,refDataFile=<Informaticainstallationdirectory>/properties/CMS/
Informatica_IDE_DataDomain.zip"
```

The command imports the reference table metadata from the XML file into the Model repository. The command imports the reference table data from a zip file. When you run the command, specify the path and file name of both the XML and zip files to be imported.

Using Informatica Developer to Import Data Domains

In the Developer tool, you can import the data domain XML file in the Model repository to the reference data database.

1. In the Developer tool, navigate to **Windows** > **Preferences** > **Informatica** > **Data Domain Glossary** pane.
2. Select the top-level node for data domains or data domains groups, and click **Import**.
3. In the **Import File** dialog box, click **Browse** to choose the XML file.
4. Click **Next**.
5. In the **Select Objects to Import** screen, select the data domain glossary project, and click the **Add Contents to Target** option.
6. In the **Resolution** field, choose **Replace option in target** option. Cliick **Next**.
7. In the **Content Import Settings** screen, click **Browse** to choose the compressed reference data file in the accelerator directory.
8. In the **Import Summary** screen, if the **Connection Rebinding** > **Target Connection** field displays an incorrect database, click the **Edit** icon and choose the reference data database.
9. Click **Finish** to import the data domains.

Permissions and Privileges

You need permissions and privileges to access data domains and data domain groups in Enterprise Data Catalog.

Assign Privileges in Informatica Administrator to Access Data Domains

In Informatica Administrator, you need to assign privileges for users to view, edit, or delete data domains and data domain groups.

Configure the following privileges in the Administrator tool to access data domains and data domain groups:

Application Service	Privilege	Description
Model Repository Service	Manage Data Domains	User can create, edit, and delete data domains in the data domain glossary. This privilege is part of the **Data Domain Administration** privilege group.
Catalog Service	Catalog Management: Domain Creation	Users can perform the following actions: - Create data domains - Update data domains - View data domains - Delete data domains
	Catalog Management: Domain Curation	Users can perform the following actions: - View data domains - Accept or reject data domains
	Domain Management: Admin - ViewDomain and Domaingroup	Users can perform the following actions: - View data domain and data domain group
	Domain Management: Admin - EditDomain and Domaingroup	Users can perform the following actions: - Create data domains and data domain groups - Update data domain and data domain group - View data domains and data domain group - Delete data domain and data domain group

Assign Permissions on Resources in Catalog Administrator to Access Data Domains

You can specify default permissions for one or more resources, users, user groups, or specify resources, permissions, users, and user groups as required. For more information about specifying permissions for resources and users, see the "Managing Resource Security" chapter in the *Catalog Administrator Guide*.

As a catalog administrator, you can assign the following permissions on resources to users and user groups:

Permission	Description
Read	View data domains and data domain groups in Enterprise Data Catalog.
Read and Write	View data domain and data domain group assets and assign data domains to assets.
All Permissions	View data domains and data domain groups, assign data domains to assets, and create example-based data domains. You can perform all data domain-related tasks.

Rule-based Data Domains

You can use one or more rules to define a rule-based data domain. In Catalog Administrator, you can create and edit rule-based data domains. When you enable data domain discovery on resources, Enterprise Data Catalog uses the data domains to discover matching column data or column name patterns from the metadata extracted by the resources. In Enterprise Data Catalog, you can view data domain assets and data domains in tabular, column, and field assets.

When you create or edit a data domain, you can add rules, configure conformance values, add proximity data domains, and data domain groups. You can curate the data domains in Enterprise Data Catalog.

Rules

You can use the rules that have a single output with Integer data type. If you do not use any rule in a data domain, Enterprise Data Catalog assigns the data domain to similar columns based on the data domain you assign to the column.

Choose one or both of the following rules to define a data pattern for a data domain:

- Data rule. Uses source data that match the metadata. The rule discovers columns with data that match a specific logic defined in the rule.
- Column name rule. Uses column-name patterns that match the metadata. The rule discovers columns that match the column name logic defined in the rule.

When you create or edit a data domain, choose one of the following rules as a data rule or column name rule:

Rule	Description
Reference table	Choose the reference table in the Model repository. When you choose a reference table, the rule uses the column data in the reference table to discover data domains.
Regular expression	Choose a regular expression. A regular expression is a specialized formula for matching text strings that follow a pattern. When you choose a regular expression, the rules use the expression to discover the data domains.
Existing rules	Choose existing rules in Model repository. Before you choose a rule, verify that the rules are available to you with appropriate permissions. You can choose the rules that you created in Informatica Analyst or Informatica Developer.

Proximity Data Domains

Enterprise Data Catalog uses proximity data domains to narrow down the inferred results to identify close-to-identical columns or fields for a data domain. Enterprise Data Catalog displays the results as a match score for the data domain. The match score is the ratio of number proximal data domains discovered in the data source to the number of configured proximal data domains for an inferred data domain.

To use proximity data domains in the data domain discovery process, perform the following tasks:

1. When you create or edit a data domain, add one or more data domains as proximity data domains.
2. When you create or edit a resource and enable data domain discovery, add the proximity data domains to the data domain.

When you enable data discovery and run the resource, the profiling scanner scans the data source for the data domain and the proximity data domains in the resource and displays a match score in Enterprise Data Catalog.

Conformance Criteria

When you choose a rule for a data domain, you can configure the conformance criteria for the data domain. Enterprise Data Catalog identifies the data domains based on the conformance criteria.

You can configure the following conformance criteria for a data domain:

- Minimum conformance. Enter a minimum conformance percentage for the data domain. By default, this option displays 40.
- Auto accept if more than. Enter a percentage. Enterprise Data Catalog accepts the data domain automatically if the data domain match exceeds the configured percentage. By default, this option displays 80.00 percent.
- Row Count. Enter the number of minimum rows for data conformance. By default, this option displays 1.

The default values are called predefined conformance values. You can configure a custom value to override the predefined values. When you choose multiple data domains or data domain groups, Enterprise Data Catalog computes the conformance value based on the predefined values or custom values.

When you create or edit a resource, you can choose the data domains, its default or configured conformance values, or choose custom conformance values as conformance criteria. You can also choose to exclude the null values during data domain computation.

Creating or Editing Data Domains in Catalog Administrator


In Catalog Administrator, you can create or edit a rule-based data domain.

1. In Catalog Administrator, click **New** > **Data Domain**.
2. In the **New Data Domain** wizard, enter the following options:

Option	Description
Name	Enter a name for the data domain. Do not include whitespace characters, or start the name of the data domain with special characters or numbers except the at (@), hash (#), or underscore (_) in the data domain name.
Description	Optional. Enter a brief description of the data domain.
Specify Rules for this data domain	Choose one of the following options: - Yes. Specify data rules, column name rules, or both the rules for the data domain. - No. Enterprise Data Catalog assigns the data domain to similar columns based on the data domain you assign to the column.
Data Rule	Click **Browse** to choose one of the following rules: - Select Reference Table. Choose a reference table in the list of records. - Select Regular Expression. Enter a regular expression in the expression field. - Select Rule. Choose a rule in the list of records.
Column Rule	Click **Browse** to choose one of the following rules: - Select Reference Table. Choose a reference table in the list of records. - Select Regular Expression. Enter a regular expression in the expression field. - Select Rule. Choose a rule in the list of records.
Data conformance properties	Specify the following properties if you specify rules for the data domain: - Minimum conformance. Enter a minimum conformance percentage for the data domain. - Auto accept if more than. Enter a percentage. Enterprise Data Catalog accepts the data domain automatically if the data domain match exceeds the configured percentage. - Row Count. Enter the number of minimum rows for data conformance.
Data Domain Group	Click  to add a data domain group.
Proximity Data Domains	Optional. Click  to add one or more data domains as proximity data domains if you specify rules for the data domain.

3. Click **Save** to save the data domain.

   The following image shows a sample data domain wizard:

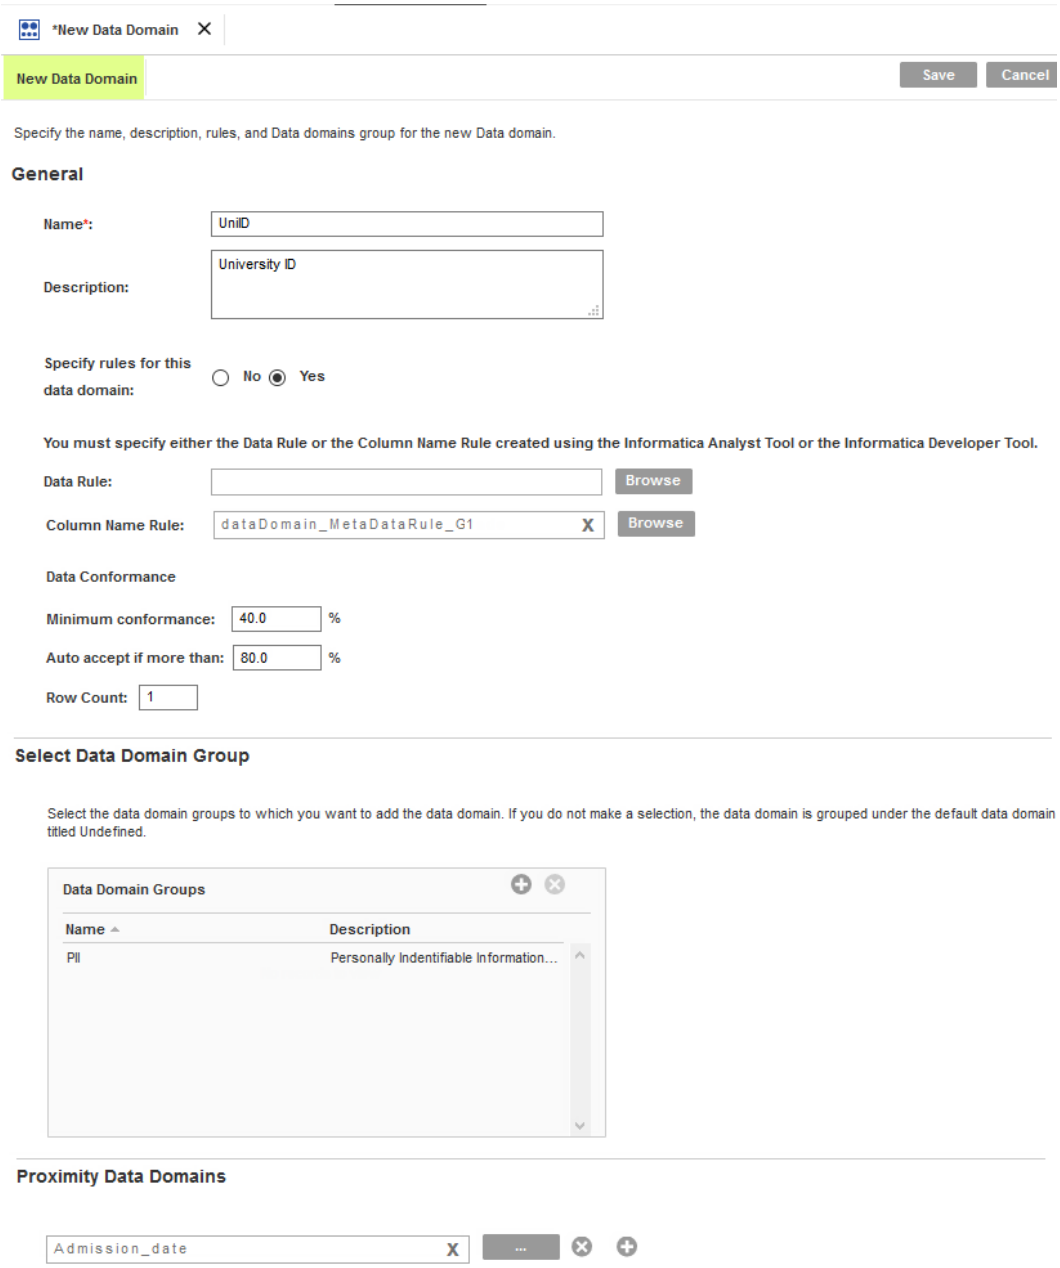

Data Domain Group

Data domain groups help you categorize data domains into specific groups. For example, you can group the data domains first_name, last_name, and account_number into the Personal Health Information (PHI) data domain group.

When you create or edit a data domain group, you can add one or more data domains to the group. You can delete a data domain from the data domain group. A data domain can be a part of multiple data domain groups. For example, the Social Security number can belong to both Payment Card Industry (PCI) and PII data domain groups. Data domain groups can contain data domains and not other data domain groups. Examples for data domain groups include PCI, PHI, and PII.

Creating or Editing Data Domain Groups in Catalog Administrator


In Catalog Administrator, you can create, edit, or delete a data domain group.

1. Click **New** > **Data Domain Group**.
2. In the **New Data Domain Group** wizard, you can configure the following options based on your requirements:

Option	Description
Name	Enter the name of the data domain group. In the **Name** field, do not include whitespace characters, or start the name of the data domain with special characters or numbers except the at (**@**), hash (**#**), or underscore (**_**) in the data domain group name.
Description	Optional. Enter the description for the data domain group.
icon	Click to add one or more data domains to the group in the **Data Domains** dialog box.
icon	Select a data domain and click the icon to remove the data domain from the data domain group.

3. Click **Save** to save the data domain group.

   The following image shows a sample data domain group wizard:

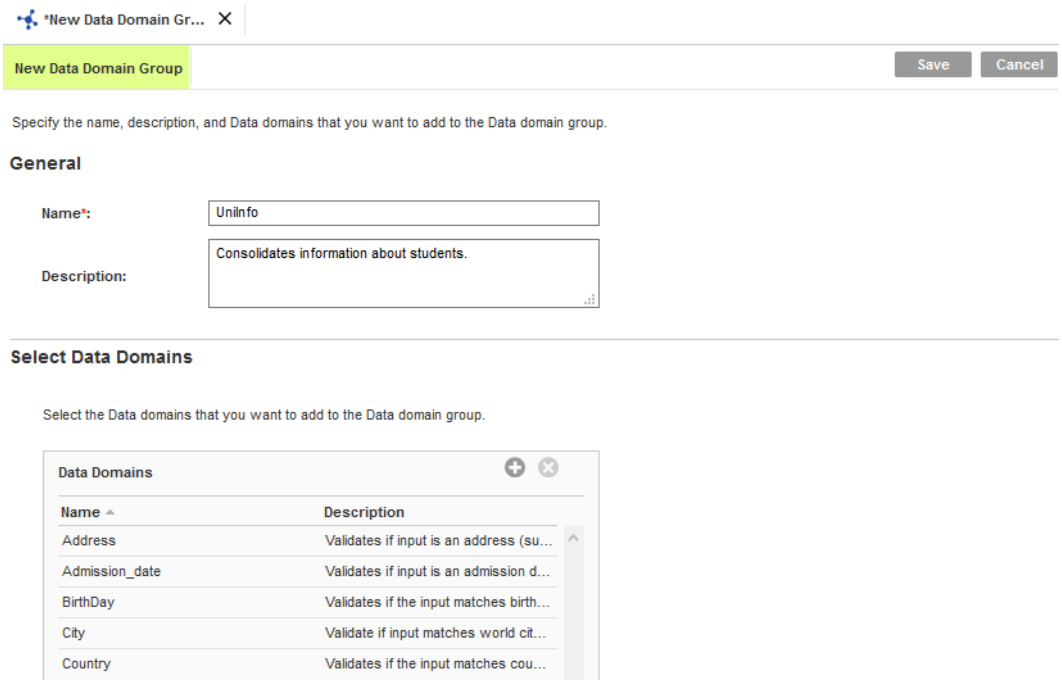

Viewing Data Domain Groups and Data Domains in Catalog Administrator

In Catalog Administrator, you can view, open, and edit the data domains. You can also view, open, edit, and delete the data domain groups.


1. In the header space, Click **Open**.
2. In the **Library** workspace, click **Data Domain Groups**.

All the available data domain groups appear.

3. To view a data domain group, choose a data domain group, and click **Actions** > **Open**.
4. Similarly, click **Edit** to edit the data domain group, and click **Delete** to delete the data domain group.
5. In the **Library** workspace, click **Data Domains**.

   All the available data domains appear.
6. To open or edit a data domain, choose a data domain, and click the **Actions** menu.
7. To view specific data domains. choose one or more data domain groups or enter a data domain name in the **Filter** > **Domain Filters** pane, and click **Apply**.

   The following image shows the **Data Domains** pane in the **Library** workspace:

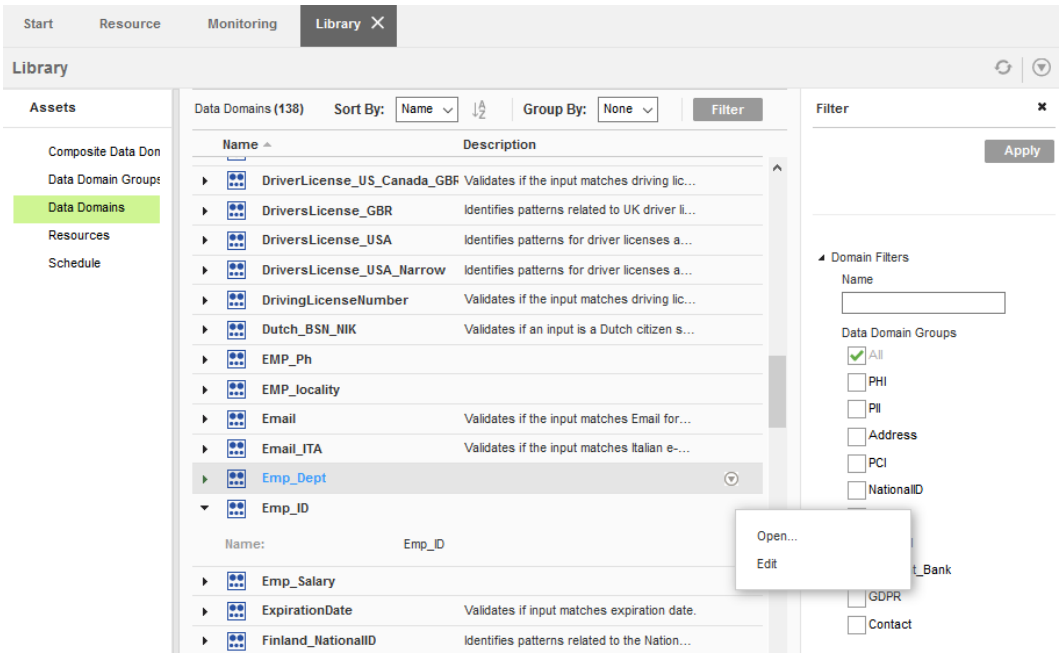

Configuring and Running Data Discovery on a Resource to Discover Data Domains

You can enable data discovery for a resource, choose data domains, and run the resource to discover the data domains in the resource.


1. In Catalog Administrator, click **New** > **Resource**.
2. In the **New Resource** wizard, enter the name and description for the resource. Choose a resource type and enter the resource-related parameters as required.
3. Click **Next**.
4. In the **Metadata Load Settings** tab, choose the type of metadata that you want Enterprise Data Catalog to extract from the source systems.

5. To identify data domains in the resource, configure the following options:

Option	Description
Enable Data Discovery	Choose the option to run the profiling scanner on the resource.
Domain Connection Settings	Enter the properties for the Data Integration Service. The profiling scanner runs the profile in the configured Data Integration Service.
Basic Profile Settings	Choose the **Profile Run Option** as **Data Domain Discovery** or **Column Profile and Data Domain Discovery** to discover data domains in the data source. Choose values for the following options based on your requirements: - Priority - Sampling Option - Exclude Views - Incremental Profiling - Source Connection Name - Run On
Data domain specific options	Choose values for the following options based on your requirements: - Data Domain Discovery Type. You can run discovery on source data, source metadata, source data and metadata, or on source data where metadata matches. - Select Data Domain. Choose all the data domains, specific data domains, or specific data domain groups. - Use Conformance from. Choose conformance values as specified in the data domain, or enter custom conformance values. - Data Domain Match Criteria. Choose percentage or rows as criteria to match the data domains in the data source. - Exclude Null Values from Data Domain Discovery.
Similarity Profile and Value Frequency Settings	Choose values for the following options based on your requirements: - Run Similarity Profile. Choose **Yes** to prepare data and run the SimilarityDiscovery system resource to discover column name similarity, pattern similarity, unique value similarity, and value frequency in the resource. - Save Source Data. Choose **Yes** to persist the computed information about similar columns, column patterns, unique values, and value frequency in the resource in Apache HBase. - Sampling Options. Choose a sampling option as required. - Domain Connection Settings. Choose the profile configuration settings, or specify the domain connection settings.

6. Click **Next** to add custom attributes, click **Save** to save the resource configuration, or click **Save and Run** to save the resource configuration and run the resource.

   The following image shows a sample **New Resource** wizard:

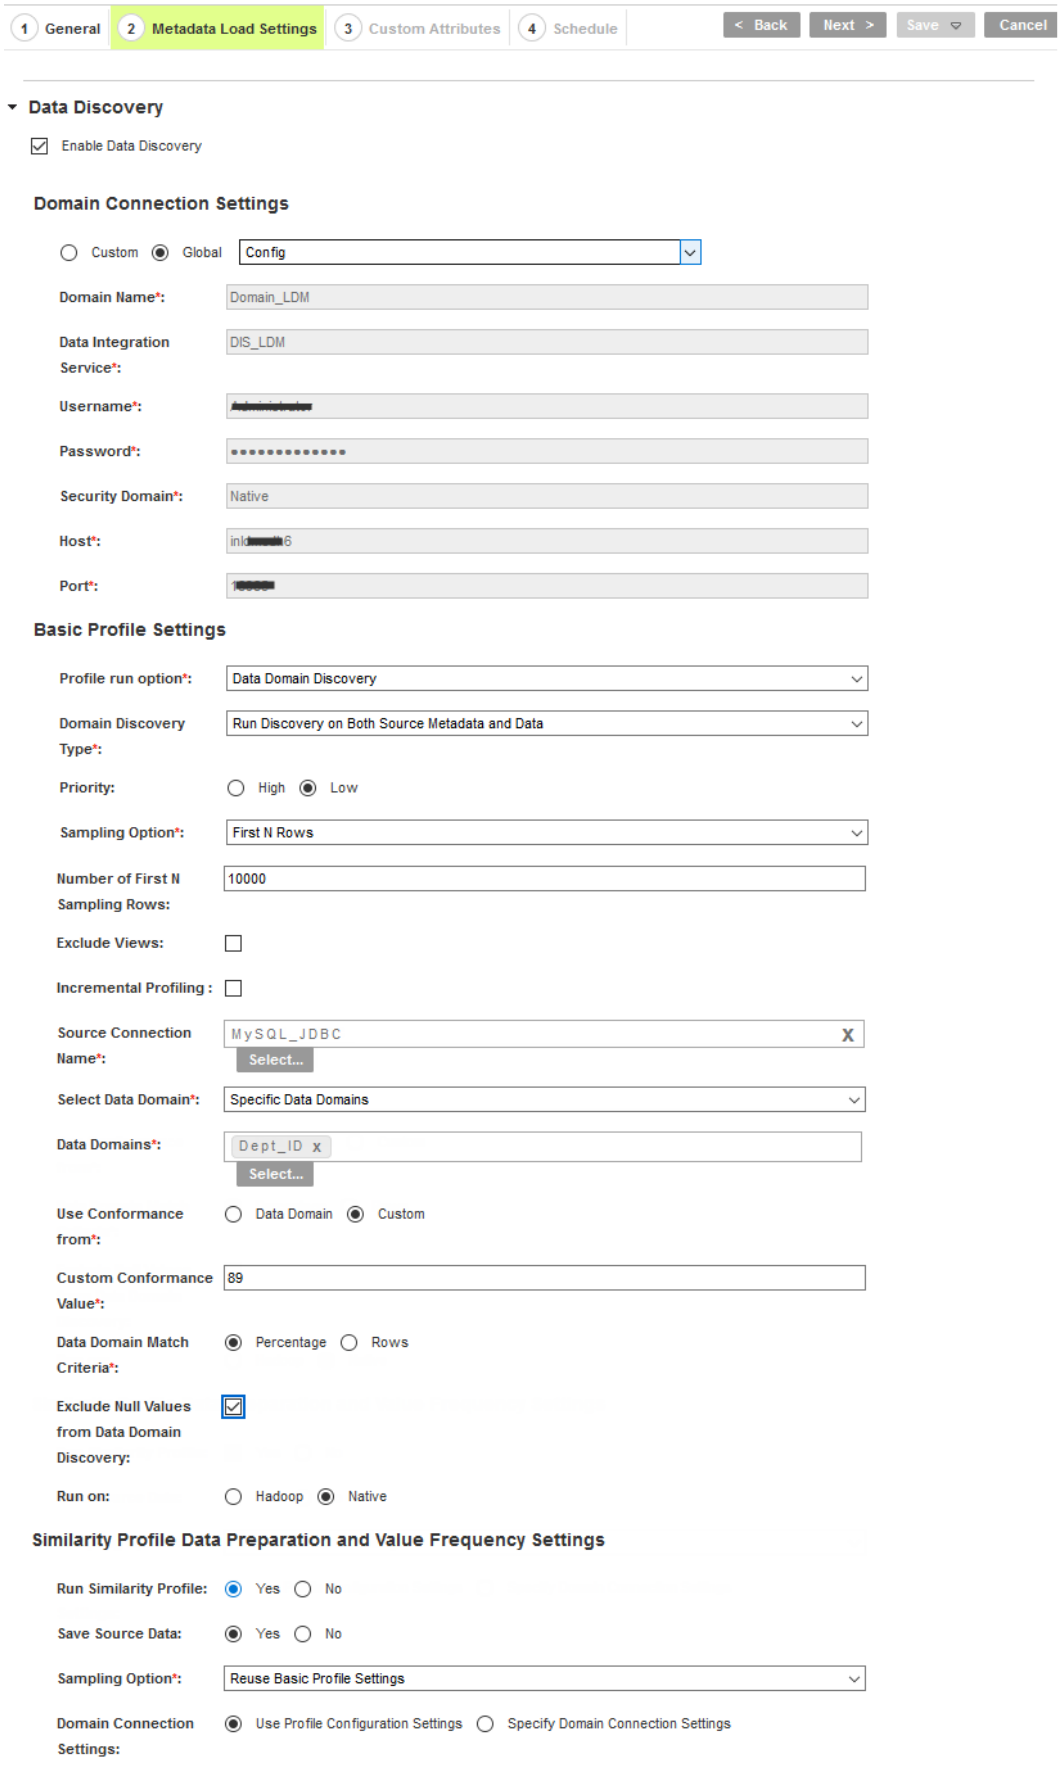
1 General
2 Metadata Load Settings
3 Custom Attributes
4 Schedule
< Back
Next >
Save
Cancel
Data Discovery
Enable Data Discovery
Domain Connection Settings
Custom
Global
Config
Domain Name*:
Domain_LDM
Data Integration Service*:
DIS_LDM
Username*:
Password*:
Security Domain*:
Native
Host*:
Port*:
Basic Profile Settings
Profile run option*:
Data Domain Discovery
Domain Discovery Type*:
Run Discovery on Both Source Metadata and Data
Priority:
High
Low
Sampling Option*:
First N Rows
Number of First N Sampling Rows:
10000
Exclude Views:
Incremental Profiling :
Source Connection Name*:
MySQL_JDBC
Select...
Select Data Domain*:
Specific Data Domains
Data Domains*:
Dept_ID
Select...
Use Conformance from*:
Data Domain
Custom
Custom Conformance Value*:
89
Data Domain Match Criteria*:
Percentage
Rows
Exclude Null Values from Data Domain Discovery:
Run on:
Hadoop
Native
Similarity Profile Data Preparation and Value Frequency Settings
Run Similarity Profile:
Yes
No
Save Source Data:
Yes
No
Sampling Option*:
Reuse Basic Profile Settings
Domain Connection Settings:
Use Profile Configuration Settings
Specify Domain Connection Settings

View and Curate Data Domains in Enterprise Data Catalog

After you run the resources in Catalog Administrator, you can view data domain assets, data domain group assets, and data domains in tabular, column, and field assets in Enterprise Data Catalog. Based on your requirements, you can curate the data domains.

View Data Domains

After you enable data discovery, choose profiling options, and run the resource, the profiling scanner identifies tabular, column, and field assets that has the data domains. Enterprise Data Catalog infers data domains for tabular, column, and field assets based on profile results. Navigate to the Overview tab of tabular, column, or field assets to view the details about the asset. You can curate the data domains for column and field assets. Enterprise Data Catalog also infers data domains for assets based on the data domains that are assigned to similar assets. Navigate to the Overview tab of the data domain asset to view more details about the asset and to view the assets that contain the data domain. You can curate the assets for the data domain.

Curation

Curation is the process of validating and managing discovered metadata of a data source so that the metadata is fit for use and reporting.

Column and Field Assets

Enterprise Data Catalog identifies the matching column data or column names and marks the inferred data domains in the catalog for approval or rejection. You can accept or reject a data domain based on your requirements. When you create a data domain in Catalog Administrator, you can configure the **Auto accept if more than** conformance value. Enterprise Data Catalog accepts the data domains automatically if the data domain match in a column or field asset exceeds the **Auto accept if more than** value.

Data Domain Assets

Enterprise Data Catalog also infers data domains for assets based on the data domains that are assigned to similar assets. You can accept or reject assets for a data domain. When you curate a data domain, you make the data domain more accurately reflect the type of data that belongs in the data domain. Curating a data domain also makes Enterprise Data Catalog more accurate when it infers data domains for similar assets.

You can perform the following curation tasks for a data domain asset:

- Accept or reject the inferred assets for the data domain. When you accept an asset, the data domain becomes assigned to the asset.
- Reject any assigned asset for the data domain.
- Accept any rejected asset for the data domain.

Note: If you accept or reject an inferred asset for a data domain, you cannot set the asset to back the inferred status.

Viewing and Curating Data Domain Assets

You can view data domain assets in Enterprise Data Catalog.

1. In the Enterprise Data Catalog home page, type a data domain name, and click the search icon.
2. In the **Search Results** page, click the data domain asset.


   The **Overview** tab for the asset appears.

3. In the **Overview** tab, you can view the following data domain asset details:

Section	Description
Description	Displays data domain description. Click the  icon to edit or add the description. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections. For example, you create and configure a rich text type custom attribute called **Alternative Description** for the data domain in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as another section under the Description section in the Overview tab.
Source Description	Displays the data domain description that you provide while creating the data domain.
System Attributes	Displays the following system attributes for the data domain: - Is Domain by Example. Displays **Yes** if the data domain is created in Enterprise Data Catalog. - Resource Name. Displays **DataDomain**. - Last modified. Displays the date, time, and year the data domain was last updated. - Asset type. Displays the type of the asset.
People	Displays the users associated with the data domain. By default, the section displays the data owner and data steward fields. Click the  icon to add or change the users associated with the glossary. Additional user fields in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a data domain in the Catalog Administrator.
Business Terms	Displays custom attributes of data types, such as Business Term, Glossary, and Axon Glossary. The section displays related terms after the catalog administrator creates and configures the custom attribute for a data domain in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Click the  icon to add, remove, or change the business term values.
Business Classification	Displays all the asset classifications based on the custom attributes of the reference data types. The custom attributes of a reference data type depend on how the custom attributes are defined in Informatica Business Glossary or Informatica Axon. Click the  icon to add, remove, or change the business classification values.
Custom Attributes	Displays custom attribute properties. The properties that appear in this section depends on the different types of custom attributes that the catalog administrator creates and configures for a data domain in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Use the  icon to add or change values of the properties in the section.
Assigned Columns	Displays the columns and fields for which the data domain is assigned or inferred. The section displays the name of the person that assigned the data domain to the asset if a data domain is assigned to a column or field. The section displays **System** and the Inference Type column displays the inference type and percentage if the data domain is inferred.
Rejected Columns	Displays the columns and fields for which the data domain was rejected. You can accept a rejected data domain for a column or field.

4. To accept an asset for the data domain, perform the following tasks:
    1. In the **Assigned Columns** list, find the asset that you want to accept.
    If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field.
    2. To accept the asset for the data domain, click the icon.
5. To accept multiple assets for the data domain, perform the following tasks:
    1. In the **Assigned Columns** list, select the assets that you want to assign.
    If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field. To select all the assets, select the **Name** checkbox.
    2. To accept the assets for the data domain, click the icon, and click **Accept**.
6. To reject an asset for the data domain, perform the following tasks:
    1. In the **Rejected Columns** list, find the asset that you want to reject.
    If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field.
    2. To reject the asset for the data domain, click the icon.
7. To reject multiple assets for the data domain, perform the following tasks:
    1. In the **Rejected Columns** list, select the assets that you want to reject.
    If the list of assets is long, you can search for an asset in the list by entering the first few characters of the asset name in the search field. To select all the assets, select the **Name** checkbox.
    2. To reject the assets for the data domain, click the icon, and click **Reject**.

    The following image shows a sample data domain asset:

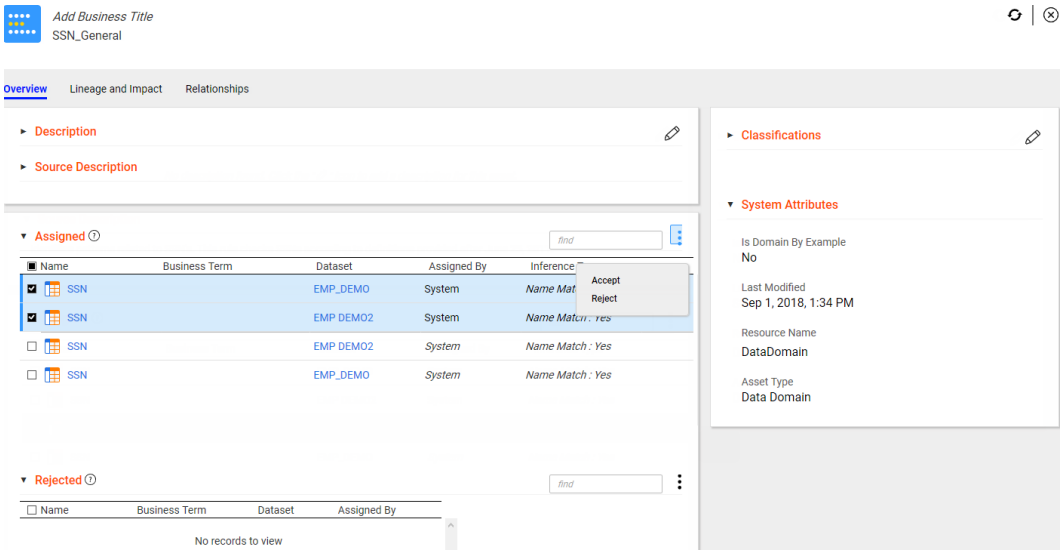

Viewing Data Domain Groups

You can view data domain group assets in Enterprise Data Catalog.


1. In the Enterprise Data Catalog home page, type a data domain group name, and click the search icon.
2. In the **Search Results** page, click the data domain group asset.

    The **Overview** tab for the asset appears.

3. In the **Overview** tab, you can view the following data domain group asset details:

Section	Description
Description	Displays data domain group description. Click the icon to edit or add the description. Use the text formatting options to format the rich text. To add more descriptive context to the asset, you can also add multiple sections. For example, you create and configure a rich text type custom attribute called **Alternative Description** for the data domain in the Catalog Administrator. Enterprise Data Catalog displays the custom attribute as another section under the Description section in the Overview tab.
System Attributes	Displays the description of the data domain group. The Resource Name attribute displays **DataDomain**.
People	Displays the users associated with the data domain group. By default, the section displays the data owner and data steward fields. Click the icon to add or change the users associated with the glossary. Additional user fields in the section appear after the catalog administrator creates and configures a custom attribute of User data type for a data domain group in the Catalog Administrator.
Business Terms	Displays custom attributes of data types, such as Business Term, Glossary, and Axon Glossary. The section displays related terms after the catalog administrator creates and configures the custom attribute for a data domain group in the Catalog Administrator. You can associate multiple business terms as custom attribute values with the asset. Click the icon to add, remove, or change the business term values.
Custom Attributes	Displays custom attribute properties. The properties that appear in this section depends on the different types of custom attributes that the catalog administrator creates and configures for a data domain in the Catalog Administrator. The section displays custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. Click the icon to add or change values of the properties in the section.
Contains	The Links section lists the data domains in the group. By default, a maximum of five business glossary assets with details, such as the business glossary asset name, associated business title, and type of the asset appear in the section. Click **Show All** to view the complete list of assets the glossary contains.

The following image shows a sample data domain group asset:

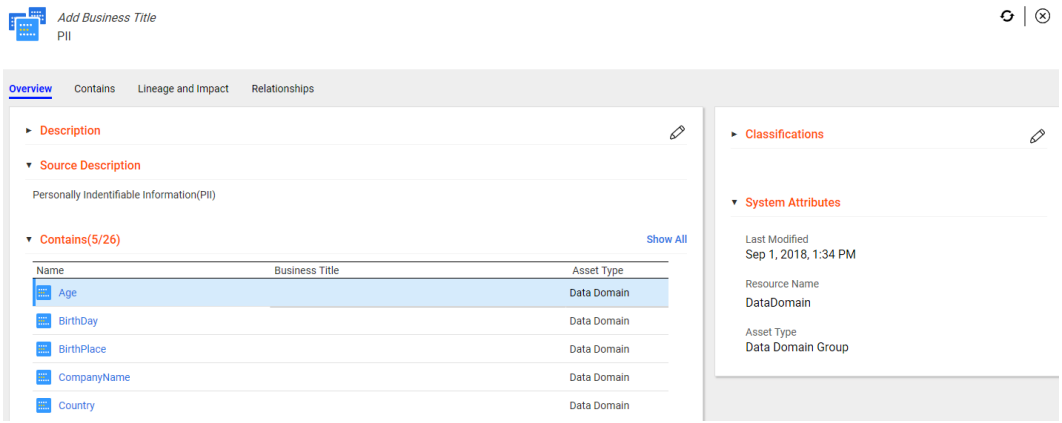


Viewing and Curating the Data Domains for Tabular, Column, and Field Asset

You can view data domains for a tabular, column, or field asset in Enterprise Data Catalog. Based on your requirements, you can curate the data domain.


1. In the Enterprise Data Catalog home page, type a table name that contains columns or fields assets, and click the search icon.
2. In the **Search Results** page, click the table asset.
3. In the **Overview** tab for the asset, you can view the inferred data domains in the **Sample Columns** section. The **Data Domain** column displays the data domain name, if column name matches the data domain, and if there is a proximity match in the asset.

   The following image shows a sample table asset:

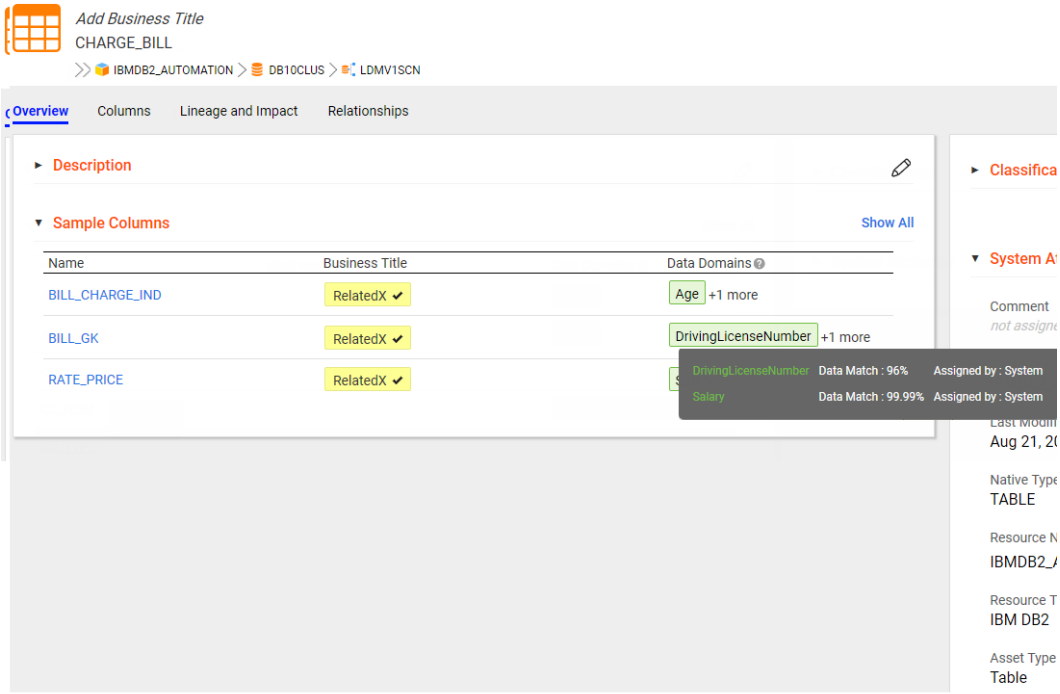

4. Click a column or field in the table asset.

   The column or field asset appears in an **Overview** tab.
5. In the **Overview** tab, you can view asset details, such as Description, People, Business Terms, Business Classifications, Custom Attributes, System Attributes, Value Frequency, Similar Columns, Pattern, Inferred Data Types, and Data Domain.
6. Scroll to the **Similar Columns** section to view all the columns that are similar to the column you are viewing.

   The **Data Domain** column in the **Similar Columns** section displays the inferred data domains for the column and the percentage of rows that conform to the data domain.
7. Scroll to the **Data Domain** section to view the data domains that are inferred for the asset from profile results or from similar columns. This section appears only for column and field assets in resources that support profiling such as relational table and view columns, fields in CSV, JSON, and XML files, and fields in Salesforce objects.
8. Data domains that appear in an orange box with the inference percentage are inferred data domains. For example, 

.

You can perform the following tasks on an inferred data domain:


- Click the icon to accept the data domain. After you accept the data domain, the box turns green. The data domains that are auto-accepted appear in a green box. For example, Geocode_Latitude.
- Click the icon to reject the data domain. After you reject a data domain, the data domain no longer appears in the **Data Domain** section for the asset.

9. In the **Data Domain** section, click the icon to view the list of data domains that are assigned or inferred for the asset and the list of data domains that are rejected for the asset.
10. To assign a data domain to the asset, perform one of the following tasks:
    - If the data domain appears in the **Accepted & Inferred Data Domains** or **Rejected Data Domains** list, click the icon.
    - If the data domain exists in the Model repository but does not appear in the lists, then you can create a data domain on-the-fly. This data domain is called an example-based data domain.

    The data domain then appears the **Accepted & Inferred Data Domains** list, and the **Assigned By** column lists your user name as the person who assigned the data domain to the asset.
11. To reject an assigned or inferred data domain, click the icon for the data domain in the **Accepted & Inferred Data Domains** list.

    The data domain moves to the **Rejected Data Domains** list, and the **Assigned By** column lists your user name as the person who rejected the data domain for the asset.
12. Click **OK**.

The following image shows a sample column asset:

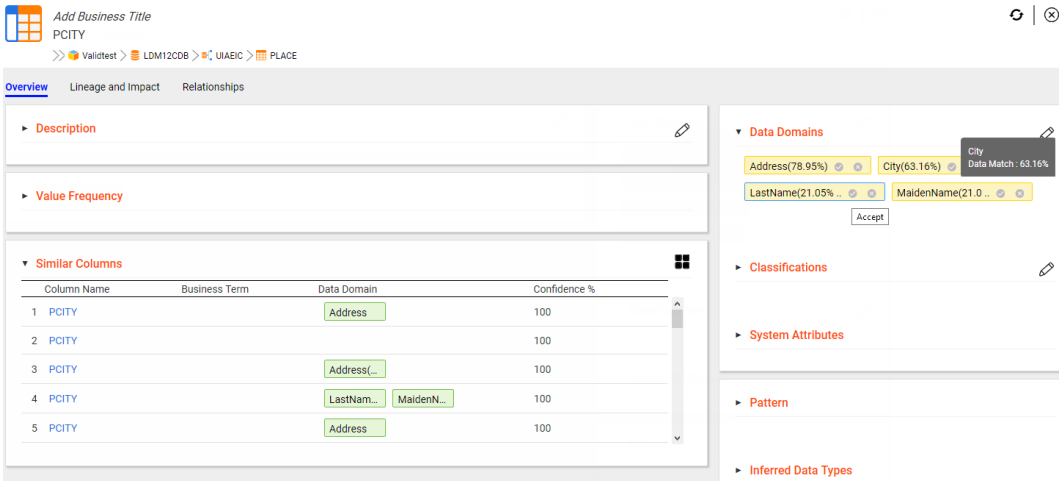

Example-based or Smart Data Domains

In Enterprise Data Catalog, you can create an example-based data domain. Example-based data domains are also known as smart data domains. You can create a example-based data domain instantly with the existing pattern of the column or field. This data domain does not contain any rule.

Sometimes, you might come across a pattern in a column or field for which you want to create a data domain so that you can discover assets that have similar columns or fields. For example, your organization uses a unique pattern for employee ID and you want to discover all the assets that contain the employee ID pattern. To accomplish this task, you

can either create a data domain in Catalog Administrator or create an on-the-fly data domain, also called example-based data domain in Enterprise Data Catalog.

To create an example-based data domain, navigate to the Overview tab for columns and fields, choose a column or field, and create a data domain. The data domain that you create is stored in the Model repository. After you create the data domain, propagate it to all the assets by running the SimilarityDiscovery scanner and DataDomainPropagation scanner in Catalog Administrator to discover assets that contain a similar pattern.

You can view a example-based data domain in Catalog Administrator. To convert an example-based data domain to a rule-based data domain, you can add one or more rules, conformance values, and proximity data domains.

Creating an Example-based Data Domain

In Enterprise Data Catalog, if you identify a column or field asset as a potential data domain, you can create an example-based data domain on-the-fly.

1. In the **Search Results** screen, identify the column or field asset for which you want to assign the data domain.
2. Click the asset.

   The asset appears in the **Overview** tab.
3. In the **Data Domain** section, click the  icon.


   The **Edit Data Domains** dialog box appears.
4. Enter a name for the new data domain. Click **Add**.

   The **New Data Domains** dialog box appears.
5. Optionally, enter a description for the data domain.
6. Optionally, choose one or more data domain groups to which you want to assign the data domain.
7. Click **OK**.

   In the **Edit Data Domains** dialog box, the data domain appears in the **Accepted & Inferred Data Domains** list, and the **Assigned By** column lists your user name as the person who assigned the data domain to the asset.

8. Click **OK**.

   The following image shows a sample example-based data domain wizard:

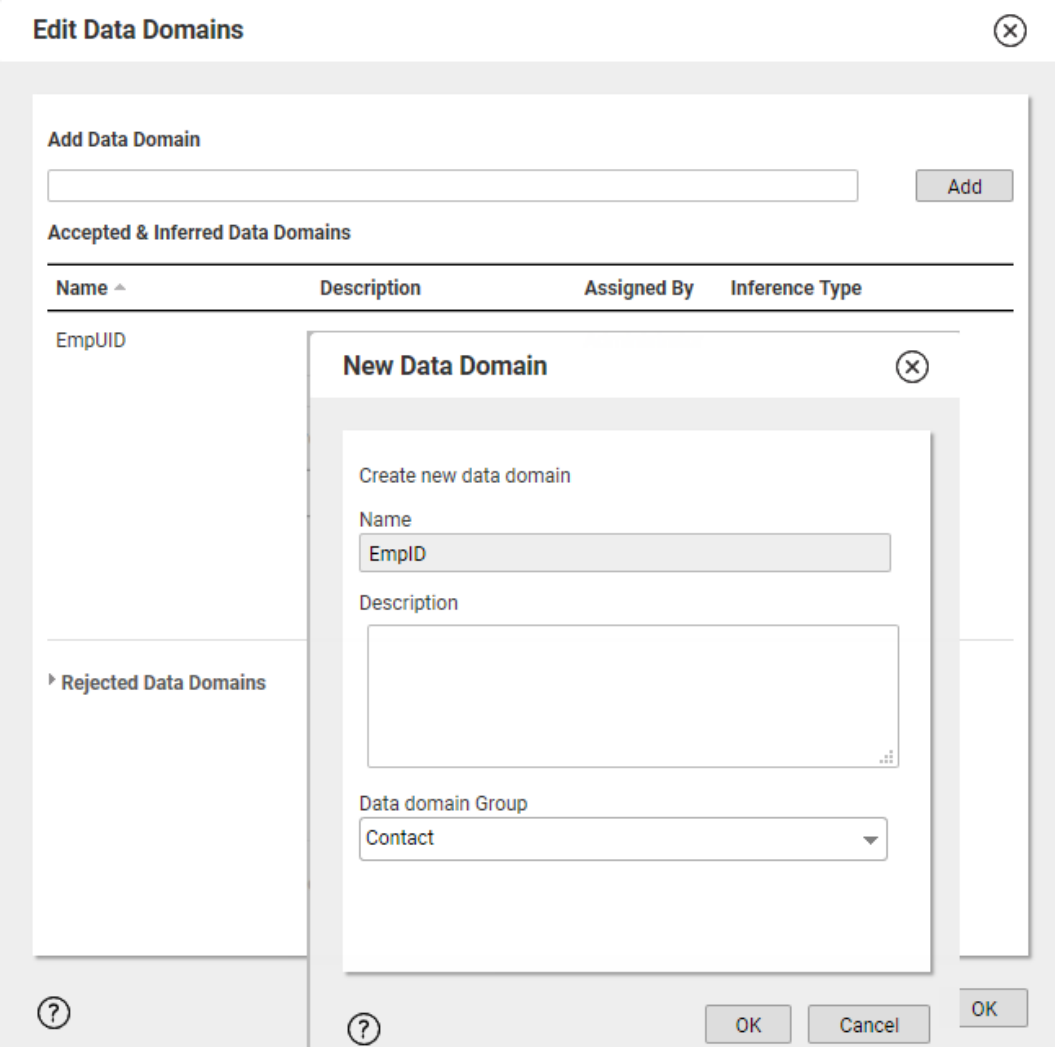

Propagating the Example-based Data Domains to Assets

After you create an example-based data domain, you can propagate the data domain to all the assets.

1. Log in to Catalog Administrator.
2. Navigate to the **Library** > **Resource** workspace.
3. Select the **SimilarityDiscovery** scanner.
4. Click **Actions** > **Run** to run the scanner.

   The scanner runs on all the resources to identify the similar columns in the resources.
5. Select the **DataDomainPropagation** scanner.
6. Click **Actions** > **Run** to run the scanner.

   The scanner runs on all the resources to identify the resources that contain the example-based data domain.
7. Log in to Enterprise Data Catalog.

8. Search and open the example-based data domain asset to view all the assets that contain the data domain.

FAQ

The following section lists a few frequently asked questions for data domains:

Do data domains get imported automatically when I create the Catalog Service?

No, data domains are not imported when you create the Catalog Service. You can either import the data domains with the `infacmd.sh oie importobjects` command or import the data domain XML file in Informatica Developer.

How does Enterprise Data Catalog handle data domain acceptance?

Enterprise Data Catalog uses the conformance criteria to identify and accept data domains. The conformance criteria include minimum conformance value, auto accept if more than the configured value, and row count. You can choose to retain the predefined values or configure the values in the **Data Domain** wizard or **Resource** wizard.

What are the different ways of creating data domains that can be used in Enterprise Data Catalog?

You can use the following methods to create data domains to use in Enterprise Data Catalog:

- Predefined data domains. These data domains are available as part of the Enterprise Data Catalog installer. During installation, the Enterprise Data Catalog imports the predefined data domains. In case of any failure, you can import it after installation.
- Rule-based data domains. You can use reference table, regular expression, or existing rules to create these data domains in Catalog Administrator.
- Example-based data domains. You can choose to use a column or field asset as a data domain. You can create these data domains on-the-fly in Enterprise Data Catalog.
- Existing data domains. The data domains that you create in the Analyst tool or Developer tool is available in the catalog after the DataDomain scanner synchronizes the data domains between Model repository and catalog.
- Existing rules. You can create mapplet rules in the Developer tool and use these rules to create data domains in Catalog Administrator. DataDomain scanner synchronizes the data domains between Model repository and catalog.

What are composite data domains?

A composite data domain is a collection of data domains or other existing composite data domains that are linked using rules. Enterprise Data Catalog links multiple rules using OR operators and links the data domains or composite data domains in each rule using AND operators. You need to make sure that you create data domains before you create composite data domains. After you create composite data domains and enable composite data domain discovery for resources, you can search for the entity using composite data domains in Enterprise Data Catalog.

Enterprise Data Catalog finds the assets associated with the entity in the catalog. An entity refers to a particular subject for which you need all the associated information. For example, for an entity such as customer, you might want to search for all the associated details such as the customer name, age, location, and contact number.

What is the difference between a data domain and composite data domain?

You use rules to create a data domain. You use one or more data domains and existing composite data domains to create a composite data domain.

Does data domain propagation work for rule-based data domains?

No, Enterprise Data Catalog does not support data domain propagation for rule-based data domains. Data domain propagation is supported for example-based data domains.

What is a profiling scanner, DataDomain scanner, DataDomainPropagation scanner, and SimilarityDiscovery scanner?

Profiling scanner. When you enable data discovery for a resource and run the resource, the scanner runs data discovery on the resources to identify profiling-related metadata, such as null values, distinct values, inferred data types, and data domains in the resource.

DataDomain scanner. This is an internal system job that synchronizes data domains between the Model repository and catalog. This is auto-scheduled to run every 45 minutes. If you create any data domain in the Analyst tool or Developer tool and you want to use it in Enterprise Data Catalog, the data domain is available to you in the Catalog Administrator after the DataDomain scanner runs and synchronizes the catalog.

DataDomainPropagation scanner. This is an internal system job that you can run as required or create a schedule to run it at frequent intervals. When you run the resource, the scanner propagates the example-based data domains to all the resources. You can view the assets in Enterprise Data Catalog.

SimilarityDiscovery scanner. This is a system resource that you can run as required or create a schedule to run it at frequent intervals. When you run the resource, the scanner scans the resource and discovers similar columns in the catalog based on column name, column data pattern, unique values, and value frequency in the resource. To run this scanner, you need to choose the **Run Similarity Profile** option in a resource, run the resource, and then run the scanner.

Sometimes, inaccurate data domains appear for data sources with certain file types, such as Microsoft Word, Microsoft Excel, and Adobe PDF. Why?

This issue appears for unstructured data sources. To resolve this issue, enable unstructured semantic parsing for the Data Integration Service so that Enterprise Data Catalog can use Natural Language Processing (NLP) to discover data domains in the data sources.

To enable NLP or unstructured semantic parsing for the Data Integration Service, perform the following steps:

1. In Informatica Administrator, navigate to **Manage** > **Services and Nodes** screen.
2. In the **Domain Navigator**, choose the **Data Integration Service**.
3. Click the **Edit** icon in the **Properties** > **Custom Properties** section.
4. In the **Edit Custom Properties** dialog box, click **New**.
5. Enter **AdvancedProfilingServiceOptions.UnstructuredNLPProcessing** in the **Property** field, and enter **True** in the **Value** field.
6. Click **OK**.
7. In the **Edit Custom Properties** dialog box, click **OK**.
8. Recycle the Data Integration Service.

Can Catalog Administrator infer data domains for a data source if the file type is unstructured text?

Yes, Catalog Administrator can infer data domains for a data source whose file type is unstructured text. But, incorrect data domain inference might occur if there is no trailing space after a punctuation mark in the file.

How do I know if a data domain is example-based or rule-based data domain?

In Enterprise Data Catalog, open the data domain asset and expand the **System Attributes** section. The **Is Domain by Example** attribute displays **Yes** for example-based data domains and **No** for rule-based and predefined data domains.

If I change the Model repository for Enterprise Data Catalog, what do I do to move the data domains to the new repository?

Take a backup of the old Model repository content and restore the content in the new Model repository.

List of Predefined Data Domains in Enterprise Data Catalog

You can use the predefined data domains to perform data domain discovery and identify critical data characteristics within an enterprise.

Note: In the table, the asterisk (*) symbol is a wildcard character.

The following table describes the data domains available in Enterprise Data Catalog:

Name	Description	Dependent Rule Type	Data Domain Group
Account_Status	Discovers columns that contain data that matches the account status values in a reference table.	Data rule	Account_Bank
AccountNumber	Discovers column names that contain the "a*c*num" or "acc" string.	Metadata rule	Account_Bank, PCI, PHI
Address	Discovers columns that contain address data values, such as cities, counties, countries, country codes, address prefixes, or address suffixes. Supports addresses from Canada, France, Germany, Great Britain, New Zealand, Portugal, and the United States. Discovers column names that can indicate or match terms for address data.	Data rule Metadata rule	General, PHI, PII
Admission_date	Discovers date values in the column data and standardizes the date values to a single format. Discovers column names that can indicate or match terms for admission date. See also Discharge_date.	Data rule Metadata rule	PHI
Age	Discovers column data with values from 1 through 120. Discovers column names that contain the "age" string or "dob" string.	Data rule Metadata rule	PHI, PII
AlphaNumeric_SpecialCharacter	Discovers column data that contains unformatted alphanumeric data and special-character data.	Data rule	General
Austria_NationalID	Discovers column data that matches the format of national identity numbers in Austria. Discovers column names that can indicate or match terms for national identification data.	Data rule Metadata rule	NationalID

Name	Description	Dependent Rule Type	Data Domain Group
Bank_Routing_Number_ABA_Number	Discovers numbers in column data that match the format of the American Banking Association routing number. Discovers column names that match the indicators that the metadata rule defines for American Banking Association routing numbers.	Data rule Metadata rule	General
BIC_SwiftCode	Discovers column data that matches Bank Identifier Code (BIC) or Society for Worldwide Interbank Financial Telecommunication (SWIFT) code data. The data rule uses pattern recognition and country code validation to find the data values. Discovers column names that match the indicators that the metadata rule defines for BIC data or SWIFT code data.	Data rule Metadata rule	Account_Bank
BinaryValue	Discovers column data that contains binary values.	Data rule	General
BirthDay	Discovers column data that matches valid birth dates. A birth date is valid for an age up to 120 years. Discovers column names that contain the "dob" string, "date*of*bir*" string, or "birth*da*" string.	Data rule Metadata rule	PHI, PII
BirthPlace	Discovers column data that matches country names in the reference data. Discovers column names that contain the "birth*place" string or "location*birth" string.	Data rule Metadata rule	PHI, PII
Brazil_IDDoc	Discovers column data that matches the format of the national identity number in Brazil.	Data rule	NationalID
Brazil_NationalID_CPF	Discovers column data that matches the format of the individual taxpayer registry identification number in Brazil. Discovers column names that can indicate or match terms for national identification data.	Data rule Metadata rule	NationalID
Brazil_NationalID_RG	Discovers column data that matches the format of national identity numbers (*Registro Geral* or *Carteira de Identidade*) in Brazil. Discovers column names that can indicate or match terms for national identification data.	Data rule Metadata rule	The rule does not belong to a data domain group.

Name	Description	Dependent Rule Type	Data Domain Group
Bulgaria_NationalID	Discovers column data that matches the format of national identity numbers in Bulgaria. Discovers column names that can indicate or match terms for national identification data.	Data rule Metadata rule	NationalID
CAP	Discovers column data that matches the format of the postcode patterns for Italy.	Data rule Metadata rule	ITA
Canada_Driver_License_Narrow	Discovers column data that matches the format of driver license numbers in Canada, with the following exceptions: - License numbers from British Columbia, Quebec, Manitoba, and Prince Edward Island. - License numbers with four, five, six, seven, or eight digits. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	The rule does not belong to a data domain group.
Canada_SIN	Discovers column data that matches the Social Insurance number format in Canada. Discovers column names that can indicate or match terms for Social Insurance number data.	Data rule Metadata rule	NationalID
CartaCredito	Discovers column data that matches the format of the credit card number.	Metadata rule	ITA
CertificateLicenseNumber	Discovers column names that contain the "cert*lic*number" string, "cert*lic*no*" string, "lic* nu*" string, or "lic*no*" string.	Metadata rule	PHI
China_NationalID	Discovers column data that matches the format of national identity numbers in China. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Citta	Discovers column data that matches the format of the Italian city names.	Metadata rule	ITA
City	Discovers column data that matches city names around the world. Discovers column names that can indicate or match terms for city names.	Data rule Metadata rule	PHI
CodiceFiscale	Discovers column data that matches the format of an Italian tax code card ID.	Data rule Metadata rule	ITA
Cognome	Discovers column data that matches the format of Italian family name.	Data rule Metadata rule	ITA

Name	Description	Dependent Rule Type	Data Domain Group
CompanyName	Discovers column data that matches the organization name values in a reference table. Discovers column names that contain the "company" string.	Data rule Metadata rule	Contact, PII
Computer_Address	Discovers column data that matches the format of IP addresses or MAC addresses. Discovers column names that can indicate or match terms for IP addresses or MAC addresses.	Data rule Metadata rule	General
Comune	Discovers column data that matches the format of Italian district names.	Data rule Metadata rule	ITA
ComuneNascita	Discovers column data that matches the format of Italian district names.	Metadata rule	ITA
Country	Discovers column data that matches country names in the reference data. Discovers column names that contain the "iso*countr*code" string, "iso*country" string, or "countr*" string.	Data rule Metadata rule	Address, PHI, PII
CountryCode_Phone	Discovers telephone numbers in column data based on international dialing codes. Discovers column names that can indicate or match terms for telephone numbers.	Data rule Metadata rule	Contact
CreditCard_AMEX	Discovers column data that matches the American Express credit card number format.	Data rule	Account_Bank
CreditCard_DinersCard	Discovers column data that matches the Diners Club International credit card number format.	Data rule	Account_Bank
CreditCard_DiscoverCard	Discovers column data that matches the Discover credit card number format.	Data rule	Account_Bank
CreditCard_JCB	Discovers column data that matches the JCB International credit card number format.	Data rule	Account_Bank
CreditCard_MasterCard	Discovers column data that matches the MasterCard credit card number format.	Data rule	Account_Bank
CreditCard_Visa	Discovers column data that matches the Visa credit card number format.	Data rule	Account_Bank

Name	Description	Dependent Rule Type	Data Domain Group
CreditCardNumber	Discovers column data that matches the format of credit card numbers from major credit card organizations. Discovers column names that contain the "ccn" string, "cr*ca*nu" string, or "credit*no*" string.	Data rule Metadata rule	Account_Bank, PCI, PII
Croatia_NationalID	Discovers column data that matches the format of national identity numbers in Croatia. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Currency	Discovers column data that contains a currency indicator. Discovers column names that can indicate or match terms for currency data.	Data rule Metadata rule	Not applicable
DataNascita	Discovers column data that matches the format of birth day.	Metadata rule	ITA
Date_AllFormats	Discovers date values in the column data.	Data rule	General
Date_MM_DD_YYYY	Discovers date values in the column data that appear in a single format. The default format is MM/DD/YYYY.	Data rule	General
Denmark_NationalID	Discovers column data that matches the format of national identity numbers in Denmark. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
DeviceSerialNumber	Discovers column names that contain the "device*number" string, "device*no*" string, "serial*number" string, "serial*no*" string, or "device*identi*" string.	Metadata rule	PHI
Discharge_date	Discovers date values in the column data and standardizes the date values to a single format. Discovers column names that can indicate or match terms for discharge dates. See also Admission_date.	Data rule Metadata rule	PHI
DriverLicense_Canada	Discovers column data that matches the format of driver license numbers in Canada, with the exception of licenses from British Columbia, Quebec, Manitoba, and Prince Edward Island. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	NationalID

Name	Description	Dependent Rule Type	Data Domain Group
DriverLicense_US_Canada_GBR	Discovers column data that matches the format of driver license numbers from the United Kingdom and from many states and provinces in Canada and the United States. The data domain does not discover the following licenses: - License numbers from British Columbia, Quebec, Manitoba, and Prince Edward Island. - License numbers with four, five, six, seven, or eight digits. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	Not applicable
DriversLicense_GBR	Discovers column data that matches the format of United Kingdom driver license numbers. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	NationalID
DriversLicense_USA	Discovers column data that matches the driver license number format in most of the states in the United States. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	NationalID, PHI
DriversLicense_USA _Narrow Reviewed	Discovers column data that matches the driver license number format in a majority of the states in the United States. In order to reduce false positives, the data domain does not cover states in which the license format overlaps with other common formats, such as eight-digit date formats. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	PHI
DrivingLicenseNumber	Discovers column data that matches driver license numbers in the United Kingdom, in most states of the Unites States, and in Canadian provinces with the exception of British Columbia, Manitoba, Prince Edward Island, and Quebec. Discovers column names that can indicate or match terms for driver license data.	Data rule Metadata rule	PII
Dutch_BSN_NIK	Discovers column data that matches the format of Dutch citizen service number.	Data rule Metadata rule	
Email	Discovers column data that matches a predefined email identification format. Discovers column names that contain the "email" string.	Data rule Metadata rule	Contact, PHI, PII

Name	Description	Dependent Rule Type	Data Domain Group
Email_ITA	Discovers column data that matches the format of Italian e-mail format using only Italian mail domain.	Data rule Metadata rule	ITA
ExpirationDate	Discovers column data that matches expired credit card dates. Discovers column names that contain the "exp*da*" string or "cr*exp*" string.	Data rule Metadata rule	PCI
Finland_NationalID	Discovers column data that matches the format of national identity numbers in Finland. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
FirstName	Discovers column data that matches values in a reference table of first names. Discovers column names that contain the "f*nam*" string.	Data rule Metadata rule	Contact, PCI, PHI, PII
France_INSEE	Discovers column data that matches the French Institut National de la Statistique et des Études Économiques (INSEE) number format.	Data rule	NationalID
FullName	Discovers strings in column data that match first, middle, and last names in the reference data. Discovers column names that can indicate or match terms for full names.	Data rule Metadata rule	Contact, PCI, PHI, PII
Gender	Discovers column data that matches the gender values in a reference table. Discovers column names that contain the "gender" string or strings such as "female" and "male".	Data rule Metadata rule	Contact, PHI, PII
Genere	Discovers column data that matches the format of gender, in Italian language.	Metadata rule	ITA
Geocode_Latitude	Discovers column data that matches valid latitude coordinates. Discovers column names that contain the "latitude" string.	Data rule Metadata rule	Address, General
Geocode_LatitudeLongitude	Discovers column data that matches valid latitude or longitude coordinates. Discovers column names that contain strings such as "latitude," "longitude," and "geocode".	Data rule Metadata rule	Address, General

Name	Description	Dependent Rule Type	Data Domain Group
Geocode_Longitude	Discovers column data that matches valid longitude coordinates. Discovers column names that contain the "longitude" string.	Data rule Metadata rule	Address, General
Grade	Discovers column names that contain the "grade" string.	Metadata rule	PII
GreatBritain_NINO	Discovers column data that matches the Great Britain National Insurance number format. Discovers column names that can indicate or match terms for National Insurance numbers.	Data rule Metadata rule	NationalID
Health_Plan_Beneficiary_Number	Discovers column names that can indicate or match terms for health plan beneficiary numbers.	Metadata rule	PHI
Height	Discovers column data with values in a range from 1 through 8, where 8 represents feet in height. Discovers column names that can indicate or match terms for height information.	Data rule Metadata rule	PHI
Hostname	Discovers column data that matches valid host names. Discovers column names that can indicate or match terms for host names.	Data rule Metadata rule	General
IBAN	Discovers column data that matches the International Bank Account Number (IBAN) format of multiple European countries. Discovers column names that can indicate or match terms for IBAN values.	Data rule Metadata rule	Account_Bank
ICD_10_Codes	Discovers column data that matches the codes for medical conditions in the tenth revision of the International Statistical Classification of Diseases and Related Health Problems (ICD). Discovers column names that can indicate or match terms for the ICD codes.	Data rule Metadata rule	PHI
ICD_9_Codes	Discovers column data that matches the codes for medical conditions in the ninth revision of the International Statistical Classification of Diseases and Related Health Problems (ICD). Discovers column names that can indicate or match terms for the ICD codes.	Data rule Metadata rule	PHI

Name	Description	Dependent Rule Type	Data Domain Group
India_NationalID	Discovers column data that matches the format of the Indian Permanent Account Number. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Indirizzo	Discovers column data that matches the format of an Italian address.	Metadata rule	ITA
IPAddress	Discovers column data that matches a predefined IP address format. Discovers column names that contain the "ip" string or "inter*port*add" string.	Data rule Metadata rule	General, PII
ISBN	Discovers column data that matches the International Standard Book Number format. Discovers column names that can indicate or match terms for International Standard Book Numbers.	Data rule Metadata rule	General
Italy_FiscalCode	Discovers column data that matches the format of the *Codice Fiscale* or Fiscal Code number in Italy.	Data rule	NationalID
JobPosition	Discovers column data that includes job position descriptors or job titles. Discovers column names that contain the "title" string, "position" string, or "designation" string.	Data rule Metadata rule	PHI, PII
Korea_NationalID	Discovers column data that matches the format of national identity numbers in South Korea. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
LastName	Discovers column data that matches values in a reference table of last names. Discovers column names that can indicate or match terms for last name information.	Data rule Metadata rule	Contact, PCI, PHI, PII
Localita	Discovers column data that matches the format of Italian locality names.	Metadata rule	ITA
MaidenName	Discovers strings in column data that match last names in the reference data. Discovers column names that can indicate or match terms for maiden name information.	Data rule Metadata rule	Contact, PHI, PII

Name	Description	Dependent Rule Type	Data Domain Group
MiddleName	Discovers strings in column data that match first names in the reference data. Discovers column names that can indicate or match terms for a column of middle name information.	Data rule Metadata rule	Contact, PHI, PII
NationalID_EMEA	Generic matches patterns related to the National ID of EMEA	Data rule Metadata rule	
Nome	Discovers column data that matches the format of Italian first name.	Data rule Metadata rule	ITA
Norway_NationalID	Discovers column data that matches the format of national identity numbers in Norway. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
NumeroTelefono	Discovers column data that matches the format of Italian phone number.	Metadata rule	ITA
Partitalva	Discovers column data that matches the format of VAT number.	Data rule Metadata rule	ITA
Passport_DEU_MR	Discovers column data that matches the machine-readable German passport number format.	Data rule	NationalID
Passport_GBR	Discovers column data that matches the United Kingdom passport number format.	Data rule	NationalID
Passport_India	Discovers column data that matches the India passport number format.	Data rule	NationalID
Passport_MachineReadable	Discovers column data that matches machine-readable passport numbers of all countries.	Data rule	NationalID
Passport_USA_MR	Discovers column data that matches machine-readable United States passport number format. Discovers column names that can indicate or match terms for a column of passport numbers.	Data rule Metadata rule	NationalID, PHI
PhoneNumber	Discovers column data that matches the United States phone number format. Discovers column names that contain the "phone" string or "fax" string.	Data rule Metadata rule	Contact, PHI

Name	Description	Dependent Rule Type	Data Domain Group
Postcode	Discovers column data that matches the postal codes of multiple countries. Discovers column names that can describe a column of post codes.	Data rule Metadata rule	Address, PCI
Provincia	Discovers column data that matches the format of Italian province names.	Data rule Metadata rule	ITA
Race	Discovers column data that matches the name of a race of people in the reference data. Discovers column names that can indicate or match terms for a race of people.	Data rule Metadata rule	PHI
RagioneSociale	Discovers column data that matches the name format of Company Name.	Metadata rule	ITA
Religion	Discovers column data that matches the name of a religion in the reference data. Discovers column names that can indicate or match terms for religion or religious affiliation.	Data rule Metadata rule	PHI
Romania_NationalID	Discovers column data that matches the format of national identity numbers in Romania. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Salary	Discovers column data that can represent an amount of money. Discovers column names that can indicate or match terms for compensation, salary, or wages.	Data rule Metadata rule	PII
SouthAfrica_NationalID	Discovers column data that matches the format of national identity numbers in South Africa. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Spanish_National_IDS	Matches patterns related to the National ID for Spain.	Data rule Metadata rule	
SSN	Discovers column data that matches the United States Social Security number format. Discovers column names that contain the "SSN" string, "social*sec*no" string, or "social* sec*num*" string.	Data rule Metadata rule	NationalID, PHI

Name	Description	Dependent Rule Type	Data Domain Group
SSN_General	Discovers column data that matches the Social Security number format. Based on the SSN Randomization initiative of June 2011, the data domain does not verify the group and area number combination in a column data value. Discovers column names that contain the "SSN" string, "social*sec*no" string, or "social* sec*num*" string.	Data rule Metadata rule	NationalID, PII
State	Discovers column data that matches a state name in the United States. Discovers column names that contain the "add*sta" string, "state" string, or "us*sta*" string.	Data rule Metadata rule	PII
Street	Discovers column data that includes any street descriptor in a set of over twenty descriptors that the data rule specifies. The rule includes the following descriptors: - avenue - boulevard - junction - lane - road - street - valley - way Discovers column names that can indicate or match terms for a column of street address information.	Data rule Metadata rule	PII
Sweden_NationalID	Discovers column data that matches the format of national identity numbers in Sweden. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Taiwan_NationalID	Discovers column data that matches the format of national identity numbers in Taiwan. Discovers column names that can indicate or match terms for national identity numbers.	Data rule Metadata rule	NationalID
Track1_Format_B	Discovers column data that matches Track 1 Format B credit card data. Discovers column names that can indicate or match terms for Track 1 Format B information.	Data rule Metadata rule	PCI
UniqueIdentifyingNumber	Discovers column names that contain the "unique*iden*number" string or "iden*num" string.	Metadata rule	PHI

Name	Description	Dependent Rule Type	Data Domain Group
Unit_of_Measure	Discovers column data that includes units of measurement. Discovers column names that can indicate or match terms for quantity or units of measurement.	Data rule Metadata rule	Not applicable
UPC	Discovers column data that matches the format of a valid Universal Product Code or European Article Number. Discovers column names that can indicate or match terms for Universal Product Codes or European Article Numbers.	Data rule Metadata rule	General
URL	Discovers column data that matches predefined URL formats. Discovers column names that contain the "uni*res*loc" string, "URL" string, or "web" string.	Data rule Metadata rule	PHI
USA_Bank_Account	Discovers column data that matches a bank account number format in the United States. Discovers column names that can indicate or match terms for bank account information.	Data rule Metadata rule	PHI, PII
USA_County	Discovers column data that matches a county name in the United States. Discovers column names that can indicate or match terms for county name information.	Data rule Metadata rule	Address, PHI, PII
USA_National_Drug_Code_NDC	Discovers column data that matches a National Drug Code (NDC) value in the National Drug Code directory in the United States. Discovers column names that can indicate or match terms for National Drug Code or NDC information.	Data rule Metadata rule	PHI
USA_National_Provider_Identifier_Standard_NPI	Discovers column data that matches a National Provider Identifier (NPI) number in the United States. Discovers column names that can indicate or match terms for National Provider Identifier or NPI information.	Data rule Metadata rule	PHI
USA_Taxpayer_Identification_Number	Discovers column data that matches the format of an Individual Taxpayer Identification Number (ITIN) in the United States. Discovers column names that can indicate or match terms for Individual Taxpayer Identification Number or ITIN information.	Data rule Metadata rule	NationalID, PHI

Name	Description	Dependent Rule Type	Data Domain Group
USZip_5digit	Discovers column data that matches United States ZIP Code values. Discovers column names that can indicate or match terms for ZIP or post codes.	Data rule Metadata rule	Address, PHI, PII
VIN	Discovers column data that matches the format of Italian vehicle identification number	Data rule Metadata rule	
VehicleRegPlateNumber	Discovers column names that contain the "registration" string, "number*plate" string, "license*plate" string, or "vehicle*registration" string.	Metadata rule	PHI, PII
Weight	Discovers column data with values in a range from 1 through 500, where 500 represents a weight value. Discovers column names that can indicate or match terms for weight information.	Data rule Metadata rule	PHI
ZipCode	Discovers column data that matches United States ZIP codes. Discovers column names that can indicate or match terms for ZIP or post codes.	Data rule Metadata rule	PCI, PHI, PII

A Note on Data Domain Group Name Abbreviations

The data domain group name PCI is an abbreviation for Payment Card Industry Information.

The data domain group name PHI is an abbreviation for Protected Health Information.

The data domain group name PII is an abbreviation for Personally Identifiable Information.

Column Name Rules in Enterprise Data Catalog

Use the data domain column name rules to identify data columns with names that match the column name logic that the rules define. Each rule uses one or more regular expressions to search for common strings that the column name might include.

For example, the rule *dataDomain_MetaDataRule_BIC_SWIFTCode* contains a Labeler transformation that searches with the following regular expressions:

```
^*[iI][sS][oO].*.[9][3][6][2].*$
^*[sS][wW][iI][fF][tT]*[bB][iI][cC]$
^*{bB][iI][cC].*[cC][oO][dD][eE].*$
```

The column name rules analyze the characters in the column names. The column name rules do not analyze the data values in the columns.

You can find the column name rules in the following repository location:

```
[Informatica_EDC_Content]\Domain_Discovery\MetaData_Rules
```

The following table describes the column name rules:

Name	Description
dataDomain_MetaDataRule_ABARoutingNumber	Searches for names that can describe a column of American Banking Association routing numbers.
dataDomain_MetaDataRule_AccountNumber	Searches for names that can describe a column of account numbers.
dataDomain_MetaDataRule_AccountStatus	Searches for names that can describe a column of account status information.
dataDomain_MetaDataRule_Address	Searches for names that can describe a column of address information.
dataDomain_MetaDataRule_AdmissionDate	Searches for names that can describe a column of admission date information.
dataDomain_MetaDataRule_Age	Searches for names that can describe a column of age or date of birth information.
dataDomain_MetaDataRule_BankAccount	Searches for names that can describe a column of bank account information.
dataDomain_MetaDataRule_BIC_SwiftCode	Searches for names that can describe a column of Business Identifier Codes. Business Identifier Codes are also called SWIFT codes and ISO 9362 codes.
dataDomain_MetaDataRule_BirthDay	Searches for names that can describe a column of date of birth or birthday information.
dataDomain_MetaDataRule_BirthPlace	Searches for names that can describe a column of place or location of birth information.
dataDomain_MetaDataRule_CAP	Searches for names that can describe a column of postcode patterns for Italy.
dataDomain_MetaDataRule_CartaCredito	Searches for names that can describe a credit card number.
dataDomain_MetaDataRule_CertificateLicenseNumber	Searches for names that can describe a column of certificate license number information.
dataDomain_MetaDataRule_Citta	Searches for names that can describe a column of Italian city names.
dataDomain_MetaDataRule_City	Searches for names that can describe a column of city information.
dataDomain_MetaDataRule_CodiceFiscale	Searches for names that can describe a column of an Italian tax code card ID.
dataDomain_MetaDataRule_Cognome	Searches for names that can describe a column of Italian family name.
dataDomain_MetaDataRule_CompanyName	Searches for names that can describe a column of company name information.
dataDomain_MetaDataRule_Computer_Address	Searches for names that can describe a column of machine or MAC address data.
dataDomain_MetaDataRule_Comune	Searches for names that can describe a column of Italian district names.

Name	Description
dataDomain_MetaDataRule_ComuneNascita	Searches for names that can describe a column of Italian district names.
dataDomain_MetaDataRule_Country	Searches for names that can describe a column of country information, including ISO country code information.
dataDomain_MetaDataRule_CountryCode_Phone	Searches for names that can describe a column of telephone country codes.
dataDomain_MetaDataRule_County	Searches for names that can describe a column of county information.
dataDomain_MetaDataRule_CreditCardNumber	Searches for names that can describe a column of credit card numbers.
dataDomain_MetaDataRule_CreditCardTrack1FormatB	Searches for names that can describe a column of track 1 format B information from a credit card.
dataDomain_MetaDataRule_Currency	Searches for names that can describe a column of currency information.
dataDomain_MetaDataRule_DataNascita	Searches for names that can describe a birth day.
dataDomain_MetaDataRule_DeviceSerialNumber	Searches for names that can describe a column of device number or serial number information.
dataDomain_MetaDataRule_DischargeDate	Searches for names that can describe a column of discharge date information.
dataDomain_MetaDataRule_DrivingLicenseNumber	Searches for names that can describe a column of drivers license information.
dataDomain_MetaDataRule_Email	Searches for names that can describe a column of email information.
dataDomain_MetaDataRule_EmailITA	Searches for names that can describe a column of an Italian e-mail format using only Italian mail domain.
dataDomain_MetaDataRule_ExpirationDate	Searches for names that can describe a column of expiration date information, for example expiration date information for credit cards.
dataDomain_MetaDataRule_FirstName	Searches for names that can describe a column of first name information.
dataDomain_MetaDataRule_FullName	Searches for names that can describe a column of full name information.
dataDomain_MetaDataRule_Gender	Searches for names that can describe a column of gender information.
dataDomain_MetaDataRule_Genere	Searches for names that can describe a column of gender information in Italian language.
dataDomain_MetaDataRule_Grade	Searches for names that can describe a column of grade information.
dataDomain_MetaDataRule_HealthCareBeneficiaryNumber	Searches for names that can describe a column of health care beneficiary numbers.
dataDomain_MetaDataRule_Height	Searches for names that can describe a column of height information.
dataDomain_MetaDataRule_Hostname	Searches for names that can describe a column of computer host name information.

Name	Description
dataDomain_MetaDataRule_IBAN	Searches for names that can describe a column of International Bank Account Numbers.
dataDomain_MetaDataRule_ICD_10	Searches for names that can describe a column of values from the tenth revision of the International Statistical Classification of Diseases and Related Health Problems.
dataDomain_MetaDataRule_ICD_9	Searches for names that can describe a column of values from the ninth revision of the International Statistical Classification of Diseases and Related Health Problems.
dataDomain_MetaDataRule_Indirizzo	Searches for names that can describe a column of Italian addresses.
dataDomain_MetaDataRule_IPAddress	Searches for names that can describe a column of computer IP address information.
dataDomain_MetaDataRule_ISBN	Searches for names that can describe a column of International Standard Book Numbers.
dataDomain_MetaDataRule_ITIN_USA	Searches for names that can describe a column of Individual Taxpayer Identification Numbers.
dataDomain_MetaDataRule_JobPosition	Searches for names that can describe a column of job title, position, or designation information.
dataDomain_MetaDataRule_LastName	Searches for names that can describe a column of last name information.
dataDomain_MetaDataRule_Latitude	Searches for names that can describe a column of latitude information.
dataDomain_MetaDataRule_LatitudeLongitude	Searches for names that can describe a column of latitude, longitude, or geocoordinate information.
dataDomain_MetaDataRule_Localita	Searches for names that can describe a column of Italian locality names.
dataDomain_MetaDataRule_Longitude	Searches for names that can describe a column of longitude information.
dataDomain_MetaDataRule_MaidenName	Searches for names that can describe a column of maiden name information.
dataDomain_MetaDataRule_MiddleName	Searches for names that can describe a column of middle name information.
dataDomain_MetaDataRule_NationalId	Searches for names that can describe a column of national identity numbers.
dataDomain_MetaDataRule_NationalId18	Searches for names that can describe a column of Dutch citizen service number.
dataDomain_MetaDataRule_NationalId19	Searches for names that can describe a column of National ID of EMEA.
dataDomain_MetaDataRule_NationalId34	Searches for names that can describe a column of National ID for Spain.
dataDomain_MetaDataRule_NDC_USA	Searches for names that can describe a column of National Drug Code information

Name	Description
dataDomain_MetaDataRule_Nome	Searches for names that can describe a column of an Italian first name.
dataDomain_MetaDataRule_NPI_USA	Searches for names that can describe a column of National Provider Identifier numbers.
dataDomain_MetaDataRule_NumeroTelefono	Searches for names that can describe a column of Italian phone numbers.
dataDomain_MetaDataRule_PartitaIva	Searches for names that can describe a column of VAT numbers.
dataDomain_MetaDataRule_Passport	Searches for names that can describe a column of passport information.
dataDomain_MetaDataRule_PhoneNumber	Searches for names that can describe a column of telephone numbers or fax numbers.
dataDomain_MetaDataRule_Provincia	Searches for names that can describe a column of Italian province names.
dataDomain_MetaDataRule_Quantity	Searches for names that can describe a column of quantity information.
dataDomain_MetaDataRule_Race	Searches for names that can describe a column of race or color information.
dataDomain_MetaDataRule_RagioneSociale	Searches for names that can describe a column of company names.
dataDomain_MetaDataRule_Religion	Searches for names that can describe a column of information about religion, faith, or belief.
dataDomain_MetaDataRule_Salary	Searches for names that can describe a column of salary, wages, or compensation information.
dataDomain_MetaDataRule_SSN	Searches for names that can describe a column of Social Security numbers.
dataDomain_MetaDataRule_State	Searches for names that can describe a column of United States state information.
dataDomain_MetaDataRule_Street	Searches for names that can describe a column of street address information.
dataDomain_MetaDataRule_UniqueIdentifyingNumber	Searches for names that can describe a column of unique identification numbers.
dataDomain_MetaDataRule_UPC_EAN	Searches for names that can describe a column of Universal Product Codes or European Article Numbers.
dataDomain_MetaDataRule_URL	Searches for names that can describe a column of Uniform Resource Locator or web address information.
dataDomain_MetaDataRule_VehicleRegPlateNumber	Searches for names that can describe a column of vehicle registration or vehicle license plate numbers.
dataDomain_MetaDataRule_VIN	Searches for names that can describe a column of italian vehicle identification numbers.

Name	Description
dataDomain_MetaDataRule_Weight	Searches for names that can describe a column of weight information.
dataDomain_MetaDataRule_ZipCode	Searches for names that can describe a column of ZIP Codes.

Data Rules in Enterprise Data Catalog

Use the data domain data rules to identify columns that contain data that matches the rule criteria.

Find the data rules in the following repository location:

```
[Informatica_EDC_Content]\Domain_Discovery\Data_Rules
```

The following table describes the data rules:

Name	Description
dataDomain_DataRule_ABARoutingNumber	Identifies column data that matches the format of an American Banking Association routing number. The routing number identifies a financial institution in a financial transaction.
dataDomain_DataRule_Account_Status	Identifies column data that matches account status values in the reference data.
dataDomain_DataRule_Address_Data	Identifies column data that represents address information. The rule recognizes address data from multiple countries globally.
dataDomain_DataRule_Age	Identifies column data with values from 1 through 120.
dataDomain_DataRule_Alphanumeric_SpecialCharacter	Identifies column data that contains unformatted alphanumeric data and special-character data.
dataDomain_DataRule_Amount	Identifies column data that represents a physical quantity.
dataDomain_DataRule_AUT_NATID	Identifies column data that matches the Austrian national ID format.
dataDomain_DataRule_BankAccount_USA	Identifies column data that matches a bank account number format in the United States.
dataDomain_DataRule_BGR_NATID	Identifies column data that matches the Bulgarian national ID format.
dataDomain_DataRule_BIC_SWIFTCode	Identifies column data that matches Bank Identifier Code (BIC) or Society for Worldwide Interbank Financial Telecommunication (SWIFT) code by pattern recognition and country code.
dataDomain_DataRule_BinaryValues	Identifies column data that contains binary values.
dataDomain_DataRule_BirthDay	Identifies column data that matches valid birth dates. The rule verifies the number of years between the input date and current date. The rule returns "Adult," "Minor," or "Valid" based on the values from 1 through 120. The rule returns "Invalid" for all other values.
dataDomain_DataRule_BRA_IDDoc	Identifies column data that matches the number format of the *Registro Geral* ID card in Brazil.
dataDomain_DataRule_BRA_Personal_ID	Identifies column data that matches the Brazilian personal ID format.

Name	Description
dataDomain_DataRule_CAP	Identifies column data that matches the postcode patterns for Italy.
dataDomain_DataRule_CAN_SIN	Identifies column data that matches the Social Insurance number format in Canada.
dataDomain_DataRule_CHN_NATID	Identifies column data that matches the Chinese national ID format.
dataDomain_DataRule_City	Identifies column data that contains a valid city name. The rule reads reference data that contains international city names.
dataDomain_DataRule_CodiceFiscale	Identifies column data that matches an Italian tax code card ID.
dataDomain_DataRule_Cognome	Identifies column data that matches an Italian family name.
dataDomain_DataRule_CompanyName	Identifies column data that matches the organization-name values in the reference data.
dataDomain_DataRule_Computer_Address	Identifies column data that matches the format of IP addresses and MAC addresses.
dataDomain_DataRule_Comune	Identifies column data that matches the Italian districts names.
dataDomain_DataRule_Country	Identifies column data that matches an ISO country name.
dataDomain_DataRule_CountryCode_Phone	Identifies column data that matches phone numbers based on international dialing codes.
dataDomain_DataRule_County	Identifies column data that matches a United States county name.
dataDomain_DataRule_CreditCard_AMEX	Identifies column data that matches the American Express credit card number format.
dataDomain_DataRule_CreditCard_DinersCard	Identifies column data that matches the Diners Club International credit card number format.
dataDomain_DataRule_CreditCard_DiscoverCard	Identifies column data that matches the Discover credit card number format.
dataDomain_DataRule_CreditCard_JCB	Identifies column data that matches the JCB International credit card number format.
dataDomain_DataRule_CreditCard_MasterCard	Identifies column data that matches the MasterCard credit card number format.
dataDomain_DataRule_CreditCard_Visa	Identifies column data that matches the Visa credit card number format.
dataDomain_DataRule_CreditCardNumber	Identifies column data that matches the credit card number format of major credit card organizations, such as American Express, Diners Club International, and Maestro.
dataDomain_DataRule_CreditCardTrack1FormatB	Identifies column data that matches Track 1 Format B credit card information.
dataDomain_DataRule_Currency	Identifies column data that matches a currency term in the reference data.

Name	Description
dataDomain_DataRule_Date_Validation	Identifies the date strings in the source data that appear in a single format in a date column. To configure the date format that the rule uses for validation, open the dq_ValidateDate Expression transformation in the rule and update the In_Date_Format expression variable. The default format is "MM/DD/YYYY." The rule returns "Valid" or "Invalid."
dataDomain_DataRule_Date_Validation_All_Formats	Identifies the date values in the column data and standardizes the column data to a single date format.
dataDomain_DataRule_DEU_Machine_Readable_Passport	Identifies column data that matches the machine-readable German passport number format.
dataDomain_DataRule_DNK_NATID	Identifies column data that matches the Danish national ID format.
dataDomain_DataRule_DriversLicense	Identifies column data that matches Canada, United Kingdom, and Unites States driver license numbers based on the length and pattern of the data values.
dataDomain_DataRule_DriversLicense_Canada	Identifies column data that matches Canada driver license numbers except for numbers from the provinces of British Columbia, Quebec, Manitoba, and Prince Edward Island.
dataDomain_DataRule_DriversLicense_Canada_narrow	Identifies column data that matches Canada driver license numbers except for numbers from the provinces of British Columbia, Quebec, Manitoba, and Prince Edward Island. The rule is similar to the dataDomain_DataRule_DriversLicense_Canada rule. However, dataDomain_DataRule_DriversLicense_Canada_narrow performs a more narrow analysis to reduce the likelihood of false positives.
dataDomain_DataRule_DriversLicense_GBR	Identifies column data that matches United Kingdom driver license numbers.
dataDomain_DataRule_DriversLicense_narrow	Identifies column data that matches driver license numbers from the United Kingdom and from many states and provinces in Canada and the United States. The rule does not validate numbers from the provinces of British Columbia, Quebec, Manitoba, and Prince Edward Island. To reduce the likelihood of false positives, the rule does not validate numbers that contain between four and eight digits.
dataDomain_DataRule_DriversLicense_USA	Identifies column data that matches the driver license numbers of most of the states in the United States.
dataDomain_DataRule_DriversLicense_USA_narrow	Identifies column data that matches the driver license numbers of most of the states in the United States. To reduce the likelihood of false positives, the rule excludes data values that comprise between six and eight digits. For example, the rule excludes a value such as 01012017.
dataDomain_DataRule_Dutch_BSN1	Identifies column data that matches the Dutch citizen service number.
dataDomain_DataRule_Email	Identifies column data that matches a predefined email ID format.

Name	Description
dataDomain_DataRule_Email1	Identifies column data that matches the Italian e-mail format using only Italian mail domain.
dataDomain_DataRule_ExpirationDate	Identifies column data that matches expired credit card dates. The rule compares the input date to the system date for validation.
dataDomain_DataRule_FIN_NATID	Identifies column data that matches the Finnish national ID format.
dataDomain_DataRule_FirstName	Identifies column data that matches values in a reference data set of first names.
dataDomain_DataRule_FRA_INSEE	Identifies column data that matches the French Institut National de la Statistique et des Études Économiques (INSEE) number format.
dataDomain_DataRule_FullName	Identifies the strings in a column of data that contain first, middle, and last names. The rule compares the words in each string to the reference data.
dataDomain_DataRule_GBR_NINO	Identifies column data that matches the United Kingdom National Insurance number format.
dataDomain_DataRule_GBR_Passport_Number	Identifies column data that matches the United Kingdom passport number format.
dataDomain_DataRule_Gender	Identifies column data that matches the gender values in the reference data.
dataDomain_DataRule_Height	Identifies column data with values 1 through 8, where 8 represents feet in height.
dataDomain_DataRule_HostName	Identifies column data that matches valid host names.
dataDomain_DataRule_HRV_NATID	Identifies column data that matches the Croatian national ID format.
dataDomain_DataRule_IBAN	Identifies column data that matches the International Bank Account Number format for multiple European countries.
dataDomain_DataRule_ICD_10	Identifies column data that matches the names of conditions in the tenth revision of the International Statistical Classification of Diseases and Related Health Problems (ICD). The World Health Organization (WHO) maintains the classification.
dataDomain_DataRule_ICD_9	Identifies column data that matches the names of conditions in the ninth revision of the International Statistical Classification of Diseases and Related Health Problems (ICD). The World Health Organization (WHO) maintains the classification.
dataDomain_DataRule_IND_NATID	Identifies column data that matches the Indian Permanent Account Number format.
dataDomain_DataRule_IND_Passport	Identifies column data that matches the Indian passport number format.
dataDomain_DataRule_IPAddress	Identifies column data that matches a predefined IP address format.

Name	Description
dataDomain_DataRule_ISBN	Identifies column data that matches the International Standard Book Number format.
dataDomain_DataRule_ISIN	Identifies column data that matches the international securities identification number (ISIN) format. An ISIN uniquely identifies a security such as a stock or a bond.
dataDomain_DataRule_ItalyFiscalCode	Identifies column data that matches the Italian national ID format.
dataDomain_DataRule_ITIN_USA	Identifies column data that matches the format of an Individual Taxpayer Identification Number (ITIN) in the United States. The Internal Revenue Service issues the identification numbers.
dataDomain_DataRule_JobPosition	Identifies column data that matches the job position names in the reference data.
dataDomain_DataRule_KOR_NATID	Identifies column data that matches the Korean national ID format.
dataDomain_DataRule_LastName	Identifies column data that matches values in a reference data set of last names.
dataDomain_DataRule_Latitude	Identifies column data that matches valid latitude coordinates.
dataDomain_DataRule_LatitudeLongitude	Identifies column data that matches valid pairs of latitude and longitude coordinates, where each pair is separated by a semicolon.
dataDomain_DataRule_Longitude	Identifies column data that matches valid longitude coordinates.
dataDomain_DataRule_Machine_Readable_Passport	Identifies column data that matches machine-readable passport numbers from all countries.
dataDomain_DataRule_NationalID_EMEA	Identifies column data that matches the National ID of EMEA.
dataDomain_DataRule_NDC_USA	Identifies column data that matches a National Drug Code (NDC) value in the National Drug Code directory in the United States. Each code uniquely identifies a drug that a manufacturer developed for human use.
dataDomain_DataRule_Nome	Identifies column data that matches a Italian first name.
dataDomain_DataRule_NOR_NATID	Identifies column data that matches the Norwegian national ID format.
dataDomain_DataRule_NPI_USA	Identifies column data that matches a National Provider Identifier (NPI) number in the United States. The Centers for Medicare and Medicaid Services issue the numbers to healthcare providers.
dataDomain_DataRule_PartitaIva	Identifies column data that matches a VAT number.
dataDomain_DataRule_PhoneNumber	Identifies column data that matches the United States phone number format.
dataDomain_DataRule_PostCode	Identifies column data that matches the postal codes of multiple countries.
dataDomain_DataRule_Quantity	Identifies column data that describes a physical quantity and includes units of measurement.

Name	Description
dataDomain_DataRule_Race	Identifies column data that matches the name of a race of people in the reference data.
dataDomain_DataRule_Religion	Identifies column data that matches the name of a religion in the reference data.
dataDomain_DataRule_ROU_NATID	Identifies column data that matches the Romanian national ID format.
dataDomain_DataRule_Sigla_Provincia	Identifies column data that matches the Italian province names.
dataDomain_DataRule_SouthAfrica_NATID	Identifies column data that matches the South African national ID format.
dataDomain_DataRule_Spanish_NATID1	Identifies column data that matches the National ID for Spain.
dataDomain_DataRule_Spanish_NIF	Identifies column data that matches the format of the fiscal identification number (NIF) in Spain.
dataDomain_DataRule_SSN	Identifies column data that matches the United States Social Security number format.
dataDomain_DataRule_State	Identifies column data that matches the state names in the United States.
dataDomain_DataRule_Street	Identifies the strings in the column data that describe street address information, for example street, road, avenue. The rule uses a regular expression to find street descriptors in the column data.
dataDomain_DataRule_SWE_NATID	Identifies column data that matches the Swedish national ID format.
dataDomain_DataRule_TWN_NATID	Identifies column data that matches the Taiwanese national ID format.
dataDomain_DataRule_UPC	Identifies column data that matches a valid Universal Product Code. A Universal Product Code is a type of barcode.
dataDomain_DataRule_UPC_EAN	Identifies column data that matches a valid Universal Product Code or European Article Number. Universal Product Codes and European Article Numbers are types of barcode.
dataDomain_DataRule_URL	Identifies column data that matches predefined URL formats.
dataDomain_DataRule_US_Zip5	Identifies column data that matches United States ZIP Codes.
dataDomain_DataRule_USA_Machine_Readable_Passport	Identifies column data that matches a machine-readable United States passport number format.
dataDomain_DataRule_USA_SSN_post_2011June	Identifies column data that matches the Social Security number format in length, numeric values, and minimum and maximum values of the area, group, and serial number sections. Based on the SSN Randomization initiative, effective June 25, 2011, the rule does not verify the issuance of a Social Security number and the group and area number combination.
dataDomain_DataRule_VIN	Identifies column data that matches the Italian vehicle identification number.

Name	Description
dataDomain_DataRule_Weight	Identifies column data that describes a weight value. The rule checks for a number between 0 and 500.
dataDomain_DataRule_ZipCode	Identifies column data that matches United States ZIP Codes.

References

For more information about data domains in Enterprise Data Catalog, see the following guides:

- *Catalog Administrator Guide*.
- *Enterprise Data Catalog User Guide*.
- *Command Reference Guide*.
- *Informatica Administrator Reference Guide for Enterprise Data Catalog*.

Author

Lavanya S

Acknowledgements

The author would like to acknowledge Sudhanshu Kumar Singh for his technical assistance.