How-To Library

Informatica

Enterprise Data Catalog Disaster Recovery Reference

© Copyright Informatica LLC 2019, 2021. Informatica, the Informatica logo, and Big Data Management are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

Refer to the *Enterprise Data Catalog Disaster Recovery Reference* article for information about planning and implementing disaster recovery for Enterprise Data Catalog.

Supported Versions

- Enterprise Data Catalog 10.2.2 Hot Fix 1

Table of Contents


Overview. 2
Disaster Recovery Architecture. 2
Disaster Recovery Implementation Guidelines. 3
Backup Workflow. 4
Service Configuration Guidelines. 4
Disaster Recovery Process. 5

Overview

Enterprise Data Catalog supports disaster recovery that helps your enterprise run the application services without a disruption in the event of a disaster. Disaster recovery includes configuring a recovery site on the Informatica domain and replicating the application services, the Hadoop cluster, the catalog, and the model repository between the production site and the recovery site. Follow the listed guidelines, workflow, and process to implement disaster recovery for Enterprise Data Catalog.

Disaster Recovery Architecture

The following image shows the disaster recovery architecture in Enterprise Data Catalog:

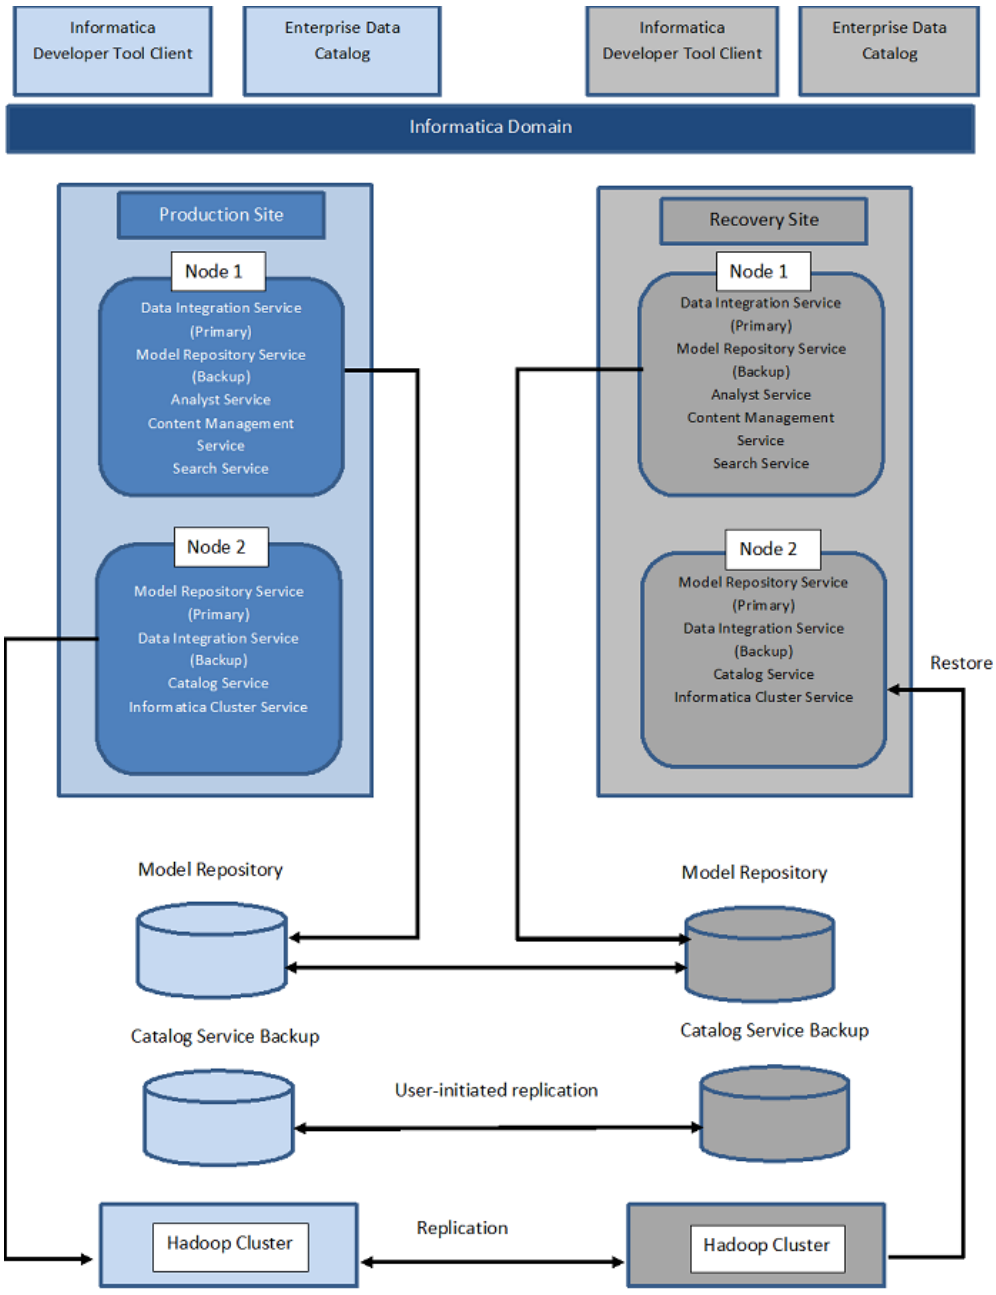

Disaster Recovery Implementation Guidelines

Consider the following guidelines to implement disaster recovery in Enterprise Data Catalog:

- You can configure multiple nodes in production and recovery sites. You can then set up the application services on these multiple nodes. Make sure that you configure primary nodes and their backup nodes.
- The nodes in the recovery site are registered with the Informatica domain. After you complete the manual configuration of the services on the nodes, ensure that you stop the nodes.
- You can configure backup nodes for the Data Integration Service and Model Repository Service across sites. For the other services, make sure that you configure the primary nodes and their backup nodes in the same site.

- In disaster recovery implementation, new instances of Analyst Service, Content Management Service, and Search Service are created on the recovery site. The services are configured to access a single Model Repository Service instance. Make sure that the services are in a disabled state in the recovery site.
- A new Catalog Service is configured on the recovery site to point to the same Model Repository Service instance accessed by the other services. The Catalog Service also accesses the backup Hadoop cluster. Make sure that the Catalog Service is in a disabled state in the recovery site.
- Make sure that the Catalog Service is in the disabled state before you back up and restore Catalog Service. Make sure that no content exists in the HDFS directory before you restore the Catalog Service.
- Ensure that the configuration for the Catalog Service is the same on both the sites including the property file configuration.
- Ensure that you configure separate Informatica Cluster Services and Catalog Services on the production site and the recovery site.
- Back up the Catalog Service periodically.
- You can replicate the profiling warehouse database on the recovery site for failover in the event of a production site crash.
- You can use virtual IP addresses when you configure databases at the recovery site.
- Make sure that the Informatica Cluster Service is in the disabled state on the recovery site.

Backup Workflow

As part of disaster recovery, when you back up the domain and the application services, make sure that you perform the steps in the following order:

1. Back up the Enterprise Data Catalog. The `infacmd ldm BackupContents` command as shown in the following sample, creates a .zip file of the directory in the local machine: `./infacmd.sh LDM backupContents -dn <name of the Informatica domain> -un <username to connect to the Informatica domain> -pd <password for the username> -sn <name of the Catalog Service> -of <name of the backup ZIP file>` . For more information about the syntax, parameters, and description of the command, see Informatica Command Reference.
2. Back up the Informatica domain using the following command: `infasetup BackupDomain <-da database_hostname:database_port | -cs database_connection_string> -du database_user_name -dp database_password -dt database_type [-ds database_service_name] -bf backup_file_name [<-Force|-f>] -dn domain_name`. See the Informatica Upgrade Guide for more information.
3. Back up the model repository using the following command: `infacmd mrs backupcontents`. Alternatively, you can use the informatica Administrator to back up the repository. See the Application Service Guide for more information.
4. Back up the reference data location configured for the Content Management Service.

Service Configuration Guidelines

Configure the services based on the following guidelines:

- You must configure the following services manually on the recovery site:
  - Analyst Service
  - Content Management Service
  - Catalog Service
  - Informatica Cluster Service, if you deployed Enterprise Data Catalog on an embedded cluster.

- If you deploy Enterprise Data Catalog on a Kerberos-enabled cluster, make sure that the keytabs on the recovery site have not expired. You must also ensure that any new nodes added to the recovery site has valid keytabs.
- Make sure that you configure the third-party applications that you use with Enterprise Data Catalog. Third-party applications include Active Directory, SMTP Server for email service, and relational databases.

Disaster Recovery Process

In the event of the production site crash, perform the following steps on the recovery site:

1. Enable the Model Repository Service.
2. Enable the Data Integration Service.
3. Enable the Content Management Service.
4. Enable the Informatica Cluster Service.
5. Restore the Catalog Data using the CLI. For more information, click here.
6. Enable the Catalog Service.

For more information about enabling services, see the Informatica Application Service Guide.

Author

Suraj Jayan