How-To Library

Informatica

Follow assets with an associated data domain

© Copyright Informatica LLC 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can use Enterprise Data Catalog REST APIs to fetch assets that are associated with a particular data domain, and then follow the assets. This article includes steps on how to use the Catalog Search API call to identify assets with an associated data domain and use the Subscription API call to follow assets. Alternatively, you can also use a Python script to fetch assets with an associated data domain, and then follow the assets.

Supported Versions

- Enterprise Data Catalog 10.5.1

Table of Contents

Overview. 2
Run the subscription API to follow assets. 2
Prerequisites for Python script. 7
Python code to invoke API. 7

Overview

A user who has access to an asset can follow a table or file asset. You can use the Subscription API or a Python script to follow table or file assets that are associated with a specific data domain.

To follow assets with associated data domains, you must first run the Search Catalog API to fetch asset IDs of assets with an associated data domain, and then run the Subscription API.


In the Python script, you can provide the data domain name as an input to automatically follow assets that are associated with a specific data domain.

Run the subscription API to follow assets

To follow catalog assets using the Subscription API in Swagger, you must first search for all assets that have a specific data domain associated. After you search assets with an associated data domain, use asset IDs that you fetch from the response of the Catalog Search API to follow the assets.

For example, Enterprise Data Catalog contains a data domain named ZipCode, which is associated with columns named PIN and POSTAL_CODE. You need to find assets associated with ZipCode data domain and then follow the assets.

The following image displays the ZipCode data domain **Overview** tab:

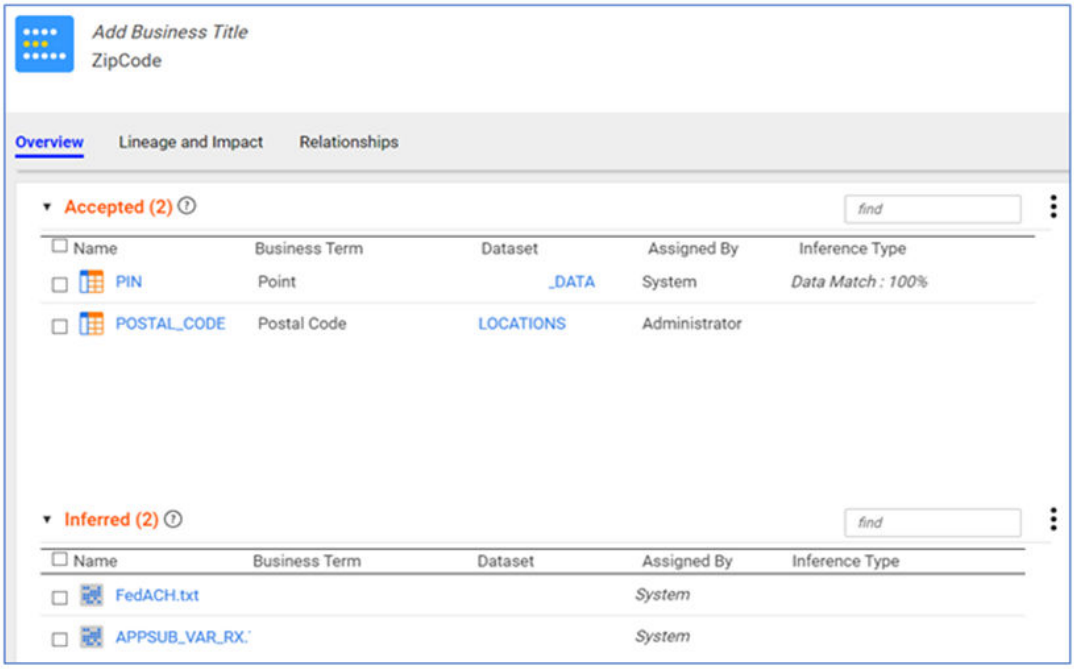

Fetch assets associated with the ZipCode data domain



Perform the following steps to fetch assets that are associated with the ZipCode data domain:

1. Log in to the Swagger user interface with the following default URL: `<Hostname>:<port>/access/swagger-ui.html#/<CatalogAdmin>`
2. Navigate to the Object Information APIs. You can use the Object Information APIs to list the objects, view the details of the objects, and view the relationships between the objects in the catalog.
3. Use the GET method Catalog Search API to find assets with an associated data domain as shown in the following image:



4. Click **Try it out**.

5. The following table lists parameters that you need to specify to view assets with an associated data domain:


Property	Value
q string (query)	Enter the search query to match catalog assets. For example, `com.infa.ldm.profiling.dataDomainsAccepted:ZipCode` See the following image for a sample:  **Note:** If you want to search for both accepted and inferred assets, use the following search queries: `com.infa.ldm.profiling.dataDomainsAccepted:ZipCode AND com.infa.ldm.profiling.dataDomainsInferred:ZipCode` value.
fl array (string) (query)	Enter `id`. The following image is a sample: 
defaultFacets	Enter `False`.
facet	Enter `False`.

6. Click **Execute**.

After you run the Catalog Search API, the response displays the total count of assets that are associated with the data domain and the **id** field in the response. The **id** field provides the path of the asset.

The following image is a sample response:

Response Body:

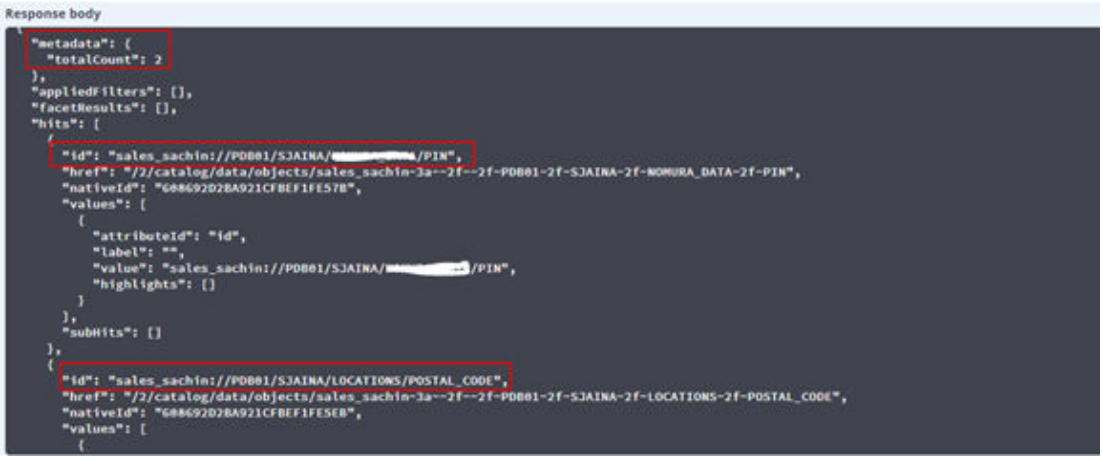

Follow assets using the subscription API


You can use the Subscription API to follow basic changes, source changes, and collaboration changes of the assets.

- If you follow the basic changes of an asset, you get notified on the following changes when users:
  - Edit or associate a custom attribute
  - Add or remove a business title
  - Add or remove a description
  - Assign people or remove people
- If you follow the source changes of an asset, you get notified whenever there is a change in the source of the asset.
- If you follow the collaboration changes of an asset, you get notified when users add reviews, ratings, and questions or when users certify the asset.

Note: A user who runs the API can follow or unfollow assets.

Perform the following steps to follow or unfollow assets that are associated with the ZipCode data domain:

1. From the response of the Catalog Search API, modify the asset **id** field to include the table name as shown in the following image:

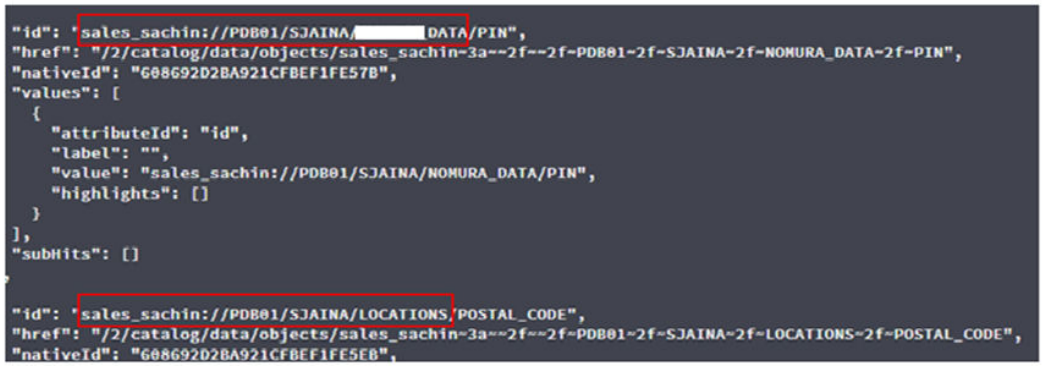

   Note: You can follow resources, tables, views, reports, and files, but not columns. So, you must modify the asset ID to include the table name that you want to follow.
2. Navigate to the Catalog Events APIs. You can use the Catalog Events APIs to access, update, or delete the user configuration, email configuration, and user subscriptions, you can use the Catalog Events REST APIs.
3. Use the PUT method Subscriptions API to follow assets that have an associated data domain as shown in the following image:



4. Click **Try it out**.
5. In the API body, edit the **changeTypes** and **objectId** fields to add assets and changes that you want to follow, as shown in the following example:

```
{
  "items": [
    {
      "changeTypes": [
        "SOURCE",
        "INFERENCES_ANNOTATIONS",
        "COLLABORATION"
      ],
      "objectId": "sales_sachin://PDB01/SJAINA/******_DATA"
```


```
    },
    {
      "changeTypes": [
        "SOURCE",
        "INFERENCES_ANNOTATIONS",
        "COLLABORATION"
      ],
      "objectId": "sales_sachin://PDB01/SJAINA/LOCATIONS"
    }
  ]
}
```

Note: Based on your requirements, you can specify the types of changes you want to follow in the **changeTypes** field.

6. Click **Execute**.


Response code: 200


Response body: The response body displays the updated metadata.

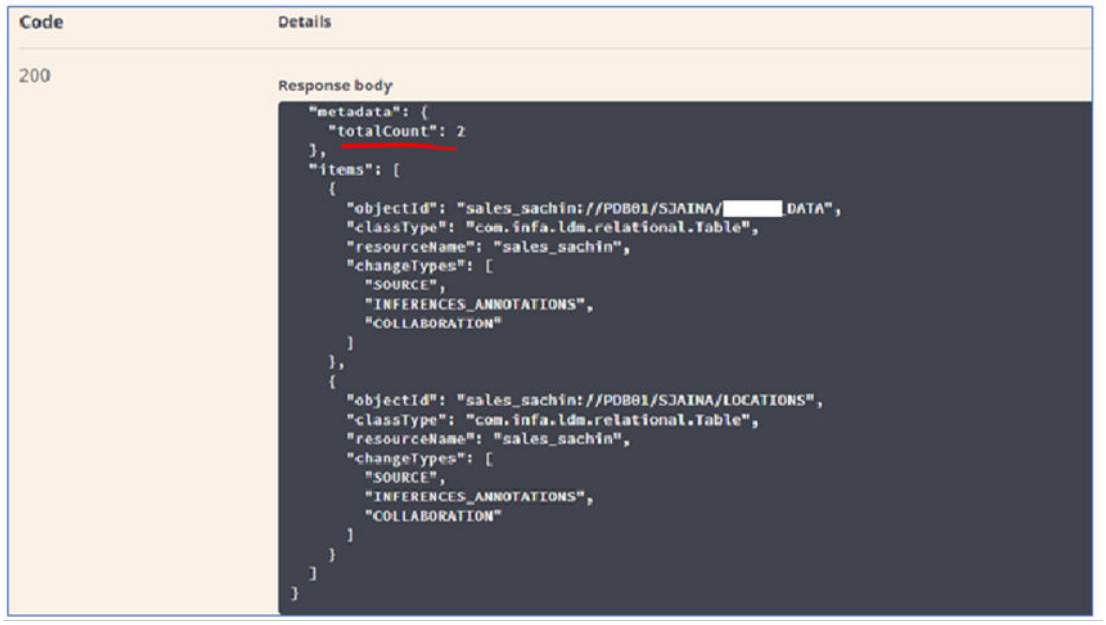

After you follow the assets using the Subscription API, you can view the changes in the Catalog. If you had opened the asset page before you followed the changes, you need refresh the page to view the changes after you followed the assets.

The following images display the assets you followed using the Subscription API:

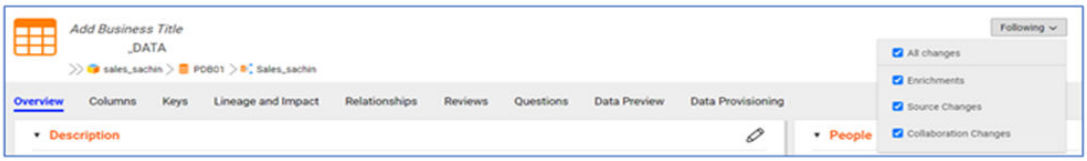

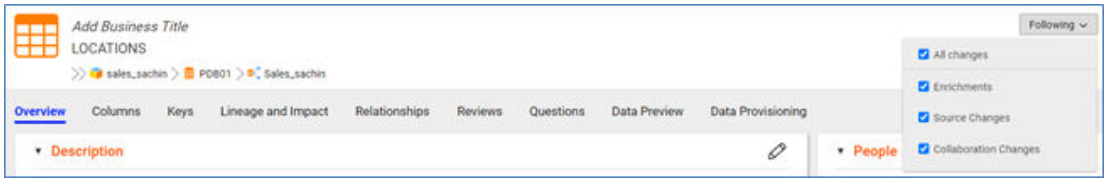


Delete the asset subscription

Optionally, to delete the subscriptions, you can use the Delete Subscriptions API as shown in the following image:



To unsubscribe an asset, you can use the Delete Subscriptions API as shown in the following image:

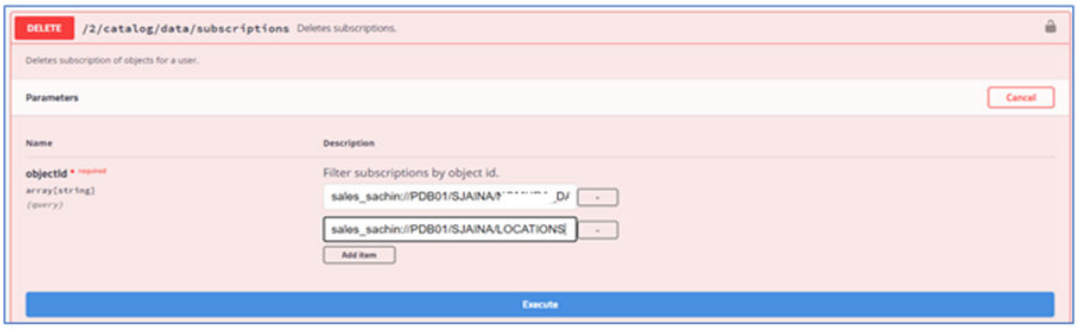

Response code: 200. Ensures that you have unsubscribed the objects.

Prerequisites for Python script

Before you follow assets using the Python script, you must consider the following prerequisites:

- Install Python version 3.6 or later on a UNIX machine. Ensure that you specify the Enterprise Data Catalog host and port details.
- The catalog user that you provide in the Python script must have access to the resource.

Python code to invoke API

The public github repository contains the Python code that you can use to follow assets.
https://github.com/arindamghosh2021/InformaticaDG/blob/main/Subscribe_Dataset_Datadomain.py

Author

Sabha S and Sachin Jain