How-To Library

Informatica

Deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace (10.5.1.1)

© Copyright Informatica LLC 2021, 2022. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

You can deploy Enterprise Data Catalog on the Amazon Web Services (AWS) Marketplace. This deployment reference includes step-by-step instructions for deploying Enterprise Data Catalog on the Amazon Web Services (AWS) Marketplace. It also includes information on prerequisites and how to troubleshoot common issues.

Supported Versions

- Enterprise Data Catalog 10.5.1.1

Table of Contents

Overview. . . . 2
Intended audience. . . . 3
Specialized knowledge. . . . 3
Costs and licenses. . . . 3
Apache Log4j RCE Vulnerabilities. . . . 4
Architecture. . . . 4
Deployment Prerequisites. . . . 5
Network prerequisites. . . . 6
User permissions. . . . 6
AWS resources created by the deployment. . . . 7
Deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace. . . . 8
Deployment steps. . . . 8
Step 1. Prepare an AWS account. . . . 8
Step 2. Get a license for Enterprise Data Catalog. . . . 9
Step 3. Launch the deployment. . . . 9
Troubleshooting. . . . 13
Log files. . . . 13
Stack Failure. . . . 14
Frequently asked questions on deployment error messages. . . . 14
Additional resources. . . . 16

Overview

Automated reference deployments use AWS CloudFormation templates to launch, configure, and run the AWS compute, network, storage, and other services required to deploy a specific workload on AWS.

In addition, the deployment reference also provides information about the required prerequisites, user permissions, associated costs and licenses, and troubleshooting information.

Intended audience

This document is for users who are responsible for deploying Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace.

As a user with administrator privileges to deploy applications on AWS, it is assumed that you are familiar with AWS resources such as Cloud formation, VPC, EC2, S3, RDS, Internet gateway, NAT Gateway, Route table, Security group, and Elastic IP.

Familiarity with the concepts of IP CIDR and public and private IP addresses is recommended.

You must also be familiar with Enterprise Data Catalog.

For Enterprise Data Catalog documentation, see the Informatica Documentation Portal.

Specialized knowledge

Before you deploy Enterprise Data Catalog, we recommend that you become familiar with the following AWS services:

- Amazon VPC
- Amazon EC2
- Amazon RDS
- Amazon S3
- Elastic IP Addresses

If you are new to AWS, see Getting Started with AWS.

Costs and licenses

You are responsible for the cost of the AWS services used while running this deployment. There is no additional cost for using this deployment.

The AWS CloudFormation template for this deployment includes configuration parameters that you can customize. Some of these settings, such as instance type, will affect the cost of deployment. See the pricing pages for each AWS service you plan to use, for cost estimates.

This deployment requires a license for Enterprise Data Catalog. To sign up for a license, contact Informatica.

The following table lists the instance types that you can choose based on sizing requirements:

Virtual Machine	Instance Type	Cluster Size
Database	M5.xlarge	Small, Medium, Large
Informatica Domain	M4.2xlarge / M5.2xlarge	Small, Medium, Large
Informatica Cluster Service	M4.4xlarge / M5.4xlarge	Small
Informatica Cluster Service	M4.2xlarge / M5.2xlarge	Medium, Large

See the Enterprise Data Catalog EDC Performance Tuning Guide to choose an SLA-based sizing recommendation.

The deployment chooses M4 or M5 type of instances based on instance-type availability in a specific AWS region.


Apache Log4j RCE Vulnerabilities

Informatica 10.5.1.1 addresses the Log4j RCE vulnerabilities by removing the JndiLookup class from the vulnerable Log4j libraries.

For information about the vulnerabilities, see Informatica Response to Apache Log4j RCE Zero Day Vulnerability.

Architecture

The following image shows the architecture of Enterprise Data Catalog on AWS U.S. Intelligence Community Marketplace:

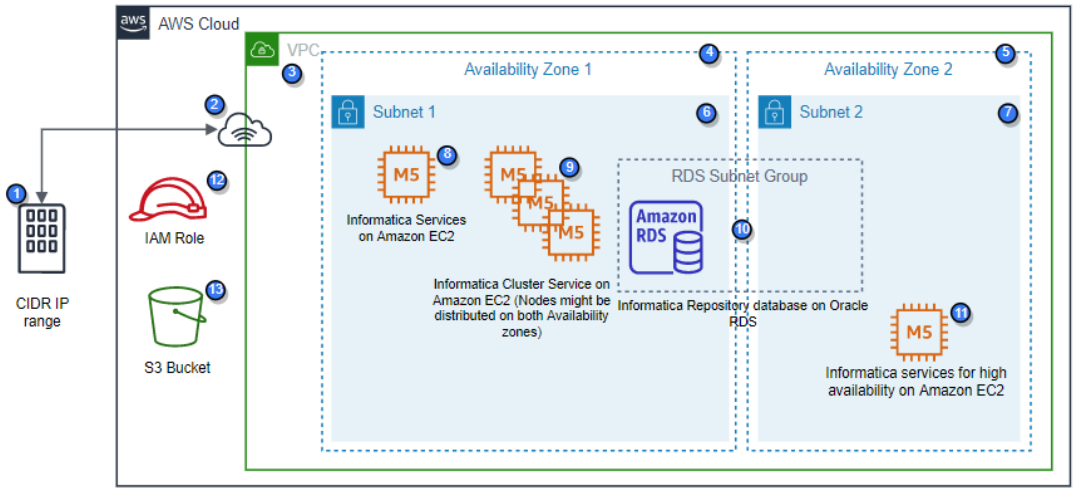

The architecture includes the following components:

1. Your company network CIDR IP range.
2. A gateway to enter AWS VPC resources. It can be a NAT gateway, Internet gateway, or a virtual private gateway.
3. A VPC configured across two Availability Zones. For each Availability Zone, this deployment provisions one private. The Enterprise Data Catalog deployment uses both subnets.
4. Availability Zone 1. The deployment provisions one subnet.
5. Availability Zone 2. The deployment provisions one subnet.
6. Subnet 1 to contain specific elements such as Amazon EC2 and Amazon RDS databases. Creates one subnet.
7. Subnet 2 to contain specific elements such as Amazon EC2 and Amazon RDS databases for high availability. Creates one subnet.
8. The informatica domain with EC2 instances to run Enterprise Data Catalog.
9. Informatica Cluster Service on Amazon EC2. An application service that runs and manages all the associated services that are required to run Enterprise Data Catalog in the Informatica domain. The associated services include Mongo DB, Nomad, Solr, PostgreSQL, and ZooKeeper.
10. Oracle database. You configure the Informatica domain configuration repository, the model repository, the content management service reference data warehouse, and the profiling warehouse.
11. The Informatica services for high availability.
12. The IAM roles.

13. The Amazon S3 storage to store the license key.

You can deploy Enterprise Data Catalog on a single-node or multi-node embedded cluster based on the cluster size you configure. Each node represents an EC2 instance. The Informatica domain runs on a single node with all the associated services. The cluster runs on separate nodes. The application services such as the Model Repository Service and the Data Integration Service run on the Informatica domain node.

The Enterprise Data Catalog deployment includes the scanners used to extract metadata from the supported data sources.

The Informatica domain is the fundamental administrative unit of the Informatica platform. The Informatica platform has a service-oriented architecture that provides the ability to scale services and share resources across multiple machines.

The Model Repository Service manages the repository database that stores the metadata for objects created using Informatica client tools. The model repository also stores runtime and configuration information for applications that are deployed using the Data Integration Service. The Catalog Administrator tool uses the model repository.

The Data Integration Service is a component of the Informatica domain that manages requests submitted to the Hadoop cluster for processing.

The Catalog Service manages the connections between the Enterprise Data Catalog service components and external applications.

The Content Management Service manages reference data. It provides reference data to the Data Integration Service and Informatica Developer.

The Analyst Service runs the Analyst tool in the Informatica domain. The Analyst Service manages the connections between the service components and the users who log in to the Analyst tool. You can perform column and rule profiling, manage scorecards, and manage bad records and duplicate records in the Analyst tool.

Profiling enables you to find the content quality, and structure of data sources of an application, schema, or enterprise. A profile is a repository object that finds and analyzes the data irregularities across data sources in the enterprise and hidden problems that put data projects at risk. The profiling results include unique values, null values, data domains, and data patterns. In this deployment, you can run profiling on the Data Integration Service or the Informatica cluster.

Business Glossary consists of online glossaries of business terms and policies that define important concepts within an organization. Glossaries are stored in a central location for easy lookup.

You can collect metadata both from resources deployed on a VPC and from resources deployed on premises. For on-premises resources, Enterprise Data Catalog collects metadata through a virtual private network (VPN), a VPC, or by using AWS Direct Connect.

After deploying Enterprise Data Catalog, you must configure the required resources to extract metadata.

If you decide to deploy Enterprise Data Catalog into your existing VPC, the deployment assumes that the infrastructure components already exist, and deploys Enterprise Data Catalog into the environment you specify during deployment. See "Deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace" on page 8 for information on deployments.

Deployment Prerequisites

Before you deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace, verify that you have performed the following tasks:

- Complete all the network prerequisites.
- Verify the user permissions.

Network prerequisites

Before you deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace, verify that you have completed the network prerequisites for the Enterprise Data Catalog application services:

VPC and subnet prerequisites

Verify that you completed the following VPC and subnet prerequisites:

- Set the DNS resolution to **True**.
- Each subnet in the VPC is associated with a route table.
- The routes in the route table must have the route defined to any of the following gateways:
  - Internet Gateway
  - NAT Gateway
  - Virtual Private Gateway
- The subnet is associated with any of the following gateways:
  - Internet Gateway
  - NAT Gateway
  - Virtual Private Gateway
- The S3 and Cloudformation endpoints are set up for the selected VPC and subnets.

If private subnets are configured, verify that the subnets can communicate to AWS services through VPC endpoints, NAT gateway, or other available connectivity options.

Existing VPC deployment

Verify that you completed the following prerequisites for an existing VPC deployment:

- The VPC has the DNS resolution enabled.
- Attach the subnet to a route table. Use a local route to the VPC CIDR.
- The service subnets you choose are attached to a route table under the selected VPC.
- The VPC must meet the following requirements:
  - It must be set up with public access through the Internet via an attached Internet gateway.
  - The **DNS Resolution** property of the VPC must be set to **Yes**.
  - The **Edit DNS Hostnames** property of the VPC must be set to **Yes**.
- An IAM role and IAM instance profile with the same name is present with ListBucket, GetObjects, and ListObjects permissions. Make sure that you use the same bucket and folders that are a part of the IAM role policy resources.
- The Amazon Resource Name (ARN) for the RDS role has the ListBucket and GetObject permissions and access permission on the RDS bucket, the selected key pair and the License key S3 bucket.
- The EC2 user has the ListBucket, GetObject, and PutObject permissions on the RDS bucket.

User permissions

Before you deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace, verify that you have the required user permissions to launch Enterprise Data Catalog application services on the AWS U.S. Intelligence Community Marketplace.

Ensure that the AWS user account that you use has the administrator privileges or the following policies assigned to the user account:

- arn:aws:iam::aws:policy/AWSCloudFormationFullAccess
- arn:aws:iam::aws:policy/AmazonEC2FullAccess
- arn:aws:iam::aws:policy/IAMFullAccess
- arn:aws:iam::aws:policy/AmazonS3FullAccess
- arn:aws:iam::aws:policy/AmazonRDSFullAccess
- arn:aws:iam::aws:policy/AmazonVPCFullAccess

AWS resources created by the deployment

Each deployment creates AWS resources based on the type of deployment.

The following table describes the components that you create when you deploy Enterprise Data Catalog in an existing VPC:

Component	Number of Components Created
Security group	4 security groups: - 1 for RDS, 1 for Informatica domain instance, and 2 for Informatica Cluster Service nodes
DB subnet group	1
RDS	1 Oracle RDS instance with 200 GB of storage capacity that runs on a db.m5.xlarge DB instance type.
EC2	The deployment creates the following EC2 components: - One Informatica domain with 1 EC2 instance and 500 GB of storage space. The instance created is of type m5.2xlarge / m4.2xlarge, based on availability of the instance size in the selected region. - Based on your choice, one Informatica high availability node with an EC2 instance and 500 GB of storage space. The instance created is of type m5.2xlarge or m4.2xlarge, depending on availability of the instance size in the selected region. - Based on your choice, a small-sized Informatica Cluster with 1 EC2 instance and 500 GB of storage space is created. The instance created is of type m5.4xlarge / m4.4xlarge based on availability of the instance size in the selected region. - Based on your choice, a medium-sized Informatica Cluster with 3 EC2 instances with each instance providing a storage space of 500 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on the availability of the instance size in the selected region. - Based on your choice, a large-sized Informatica Cluster with 6 EC2 instances with each instance providing a storage space of 500 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on availability of the instance size in the selected region.
IAM Role and Instance Profile	1

Deploy Enterprise Data Catalog on the AWS U.S. Intelligence Community Marketplace

The automated deployment of Enterprise Data Catalog on AWS U.S. Intelligence Community Marketplace uses the AWS CloudFormation console to guide your choices and launch the solution deployment.

The deployment lets you configure additional settings such as CIDR blocks, instance types, and Enterprise Data Catalog settings, as discussed later in this guide.

Use the AWS CloudFormation console to specify the stack name and to enter parameter values to the template that you use to deploy the application. A stack is a logical representation of an AWS deployment.

Specify the identifiers for the VPC, for the subnet that contains the Amazon EC2 instances where the deployment process deploys the application components, and for the subnet where the deployment process creates the Model repository. The deployment process provisions the application components and creates the Model repository based on the values that you specify.

Availability Zones and Subnets

The automated solution deploys the components and services for Enterprise Data Catalog into an Amazon VPC configured across two Availability Zones. Each Availability Zone is provisioned with two subnets.

In the first subnet, the deployment process provisions Enterprise Data Catalog application services on an Amazon EC2 instance within the VPC:

- Data Integration Service
- Model Repository Service
- Metadata Access Service
- Informatica Cluster Service
- Content Management Service
- Analyst Service
- Search Service
- Catalog Service

For more information about domain components, see the Informatica Administrator Guide and Informatica Application Service Guide.

In the second subnet, the solution deploys an Oracle database on Amazon RDS for use as the Model repository. The Model repository stores metadata created by Informatica services.

Deployment steps

You must perform multiple tasks to deploy the Enterprise Data Catalog 10.5.1.1 AWS U.S. Intelligence Community Marketplace solution.

You configure multiple parameters, such as availability zones and subnets.

Step 1. Prepare an AWS account

Perform the following steps to prepare an AWS account:

1. If you do not have an AWS account, create an account at http://aws.amazon.com by following the on-screen instructions.
2. Use the region selector in the navigation bar to choose the AWS Region where you want to deploy Enterprise Data Catalog on AWS.

3. Create a key pair in your preferred region.
4. When you log in to an EC2 instance, you use a password file for authentication. The file is called a private key file and has a file name extension of .pem.
5. If you do not have an existing .pem key to use, follow the instructions in the AWS documentation to create a key pair.
   When you create a key pair, you save the .pem file to your desktop system. Simultaneously, AWS saves the key pair to your account. Make a note of the key pair that you want to use for the Enterprise Data Catalog instance, so that you can provide the key pair name during network configuration.

   Note: Your administrator might ask you to use an existing key pair.
6. If necessary, request a service limit increase for the EC2 instance type that you want to use for the Informatica domain. You might need to do this if an existing deployment uses this instance type and you think you might exceed the default limit with this reference deployment.

Step 2. Get a license for Enterprise Data Catalog

This deployment requires a license for Enterprise Data Catalog. To sign up for a license, contact Informatica.

1. In your AWS account, create an S3 bucket.
2. Optionally, create a directory under the S3 bucket.
3. Place the Enterprise Data Catalog license key file for the software in the S3 bucket or directory.

Step 3. Launch the deployment

You are responsible for the cost of the AWS services used while running this deployment. There is no additional cost for using this deployment. See the pricing pages for each AWS service you will be using for full details. Each deployment takes approximately one to two hours to complete.

Perform the following steps to launch the deployment:

1. Log in to AWS U.S. Intelligence Community Marketplace using the AWS account.
2. Type Enterprise Data Catalog in the search box and press **Enter**.
3. Click **Enterprise Data Catalog**. The **Product Overview** page appears.
4. Click **Continue to Subscribe**. The **Subscribe to this software** page appears.
5. Click **Continue to Configuration**. The **Configure this software** page appears.
6. From the **Delivery Method** drop-down box, select Enterprise Data Catalog (Existing VPC) to deploy Enterprise Data Catalog on an existing VPC.
7. Choose **10.5.1.1** from the **Software Version** list.
8. Click Continue to Launch. The **Launch this software** page appears.
9. Select **Launch CloudFormation** from the **Choose Action** drop-down list and click **Launch**. The **Create stack** page appears.
10. On the **Specify template** section, keep the default setting for the template URL, and then choose **Next**.

    The default option is **Amazon S3 URL**.
11. On the **Specify stack details** page, change the stack name if needed. Review the parameters for the template. Provide values for the parameters that require input.
12. Under **Capabilities**, select the check box to acknowledge that the template will create IAM resources.
13. To deploy the stack, click **Create**.

AWS begins to create the stack and displays the CloudFormation dashboard. When the status is CREATE_COMPLETE, the deployment is complete. You can use the URL displayed on the **Output tab** to view the stack properties.

14. For all other parameters, review the default settings and customize them as necessary. When you finish reviewing and customizing the parameters, choose **Next.**

    Note: Verify that your VPC has a minimum of two subnets.

Parameters for Deployment

1. Enter a name for the stack. The stack name can include letters (A-Z and a-z), numbers (0-9), and dashes (-).
2. Enter the parameters required to deploy the application.
   The following table lists the parameters in the **Network Configuration** section:

Parameter	Default	Description
VPC	Requires input	ID of your existing VPC where you want to deploy Enterprise Data Catalog.
Subnet 1	Requires input	Select the subnet ID where you want to deploy Enterprise Data Catalog. Make sure that the subnet is included in the VPC and associated with an Internet Gateway or a NAT Gateway. Ensure that service subnet ID1 and service subnet are not the same.
Subnet 2	Requires input	If you want to deploy Enterprise Data Catalog with high availability enabled, provide the subnet ID that you want to use for high availability. Make sure that subnet 1 and subnet 2 are in different availability zones.
CIDR IP Range	Requires input	The CIDR IP range that is permitted to access Enterprise Data Catalog. To reduce the potential of inbound attacks from unknown IP addresses, you can use a constrained CIDR range. For example, to specify the range of 10.20.30.40 to 10.20.30.47, enter 10.20.30.40/29.

The following table lists the parameters in the **Amazon EC2 Configuration** section:

Parameter label (name)	Default	Description
Key Pair Name	Requires input	Name of an existing Amazon EC2 key pair to enable SSH and Remote Desktop Protocol (RDP) access to Enterprise Data Catalog.
Keypair S3 URI	Requires input	S3 Bucket URI for the keypair selected. Use the following format: `s3://bucket-name/Keypair.pem` or `s3://bucket-name/sub-folder/Keypair.pem`
Instance Profile	Requires input	Name of an existing instance profile with the same name as the IAM role to be attached to the EC2 instance. The IAM role must have the ListBucket, GetObject and PutObject permissions on the RDS bucket. The user must also have access to the selected key pair and the license key S3 bucket with the GetObject and ListBucket permissions.

Parameter label (name)	Default	Description
RDS Role ARN	Requires input	A valid IAM role ARN for RDS to access data from the RDS bucket. The RDS role ARN must have access to the RDS bucket with the ListBucket and GetObject permissions.
RDS Bucket	Requires input	The bucket RDS to use to retrieve data.

The following table lists the parameters in the Informatica Enterprise Data Catalog Configuration section:

Parameter label (name)	Default	Description
License Key S3 Bucket URI	Requires input	The S3 bucket URI for the Enterprise Data Catalog license key in the following format: `s3://<bucket-name>/<directory>/<license key>`
High Availability Deployment	Requires input	Enable or disable high availability for the deployment. For information about high availability for the Informatica domain, see the Informatica documentation.
Deployment Type	Requires input	You can select one of the following sizes: - Select the Amazon EC2 instance type where you deploy the Informatica cluster. Choose from the following options for the Informatica cluster: - Small: one m*.4xlarge node - Medium: three m*.2xlarge nodes - Large: six m*.2xlarge nodes **Note:** The instance types you can select might depend on your AWS region.

3. Click **Next**.
4. On the **Configure stack options** page, you can specify tags (key-value pairs) for resources in your stack and set advanced options. When you are done, choose **Next**.
5. On the **Review** page, review and confirm the template settings. Under Capabilities, select the check box to acknowledge that the template will create IAM resources.
6. Choose **Create** to deploy the stack.
7. Monitor the status of the stack. When the status is `CREATE_COMPLETE`, the deployment is complete.

You can use the keys displayed in the **Output** page as shown in the following table to view the details of the deployment:

Key	Description
AdminConsoleUser	Username to access the Informatica domain.
AdminConsoleUserPwd	Password for the Informatica domain username.
DBUserPwd	Password to access the Informatica domain repository database.
DBUsers	Usernames to access the Informatica domain repository database.

Key	Description
HANodeIP	IP address of the Informatica high availability node.
InformaticaAdminConsolePrivateURL	Private URL to access the Informatica Administrator.
informaticaAdminConsoleServerLogs	Location where the Informatica domain installation log files are stored.
InstanceSetupLogs	Location where the Informatica domain instance setup log files are stored.
AdvScannerPrivateURL	Private URL to access Informatica EDC Advanced Scanner
AdvScannerUser	Username to access Informatica EDC Advanced Scanner
AdvScannerUserPwd	Password for the Informatica EDC Advanced Scanner user name

See the Enterprise Data Catalog User Guide for information about logging in to Enterprise Data Catalog.

The following table shows a sample completed stack for Enterprise Data Catalog deployed on AWS:

Stack and Nested Stack Names	Stack Description	Condition for Stack Usage
StackName	Main stack	Not applicable
StackName-SecurityGroupStack	Template to create the security groups and network interfaces used by EC2 instances.	Default
StackName-RDSStack	Template to create the RDS resources.	Default
StackName-ICSStack	Template to create the Informatica cluster.	Default
StackName-ICSStack-ICSGatewayStack	Template to create the Informatica cluster gateway node.	Default
StackName-ICSStack-Infa-ICS-Node2	Template to create the Informatica cluster node.	Used when the **Deployment Type** parameter is set to **Medium**.
StackName-ICSStack-Infa-ICS-Node3	Template to create the Informatica cluster node.	Used when the **Deployment Type** parameter is set to **Medium**.
StackName-ICSStack-Infa-ICS-Node4	Template to create the Informatica cluster node.	Used when the **Deployment Type** parameter is set to **Large**.
StackName-ICSStack-Infa-ICS-Node5	Template to create the Informatica cluster node.	Used when the **Deployment Type** parameter is set to **Large**.
StackName-ICSStack-Infa-ICS-Node6	Template to create the Informatica cluster node.	Used when the **Deployment Type** parameter is set to **Large**.

Stack and Nested Stack Names	Stack Description	Condition for Stack Usage
StackName-EDCServerStack	Template to create the Informatica Enterprise Data Catalog node.	Default
StackName-EDCHANodeStack	Template to create the Informatica Enterprise Data Catalog high availability node.	Used when the **High Availability Deployment** option is enabled.

Accessing Informatica Administrator

Based on the type of deployment, follow the instructions to access Informatica Administrator:

- To access the Informatica Administrator, use the private IP address or DNS. Use an instance in the same VPC if you have not deployed a remote Windows server to access other resources in the VPC. Use that instance to access other resources. For example, to access the Informatica Administrator, use the URL in the following format:*<Private IP Address or private DNS>:6008*.
- To access the Informatica Administrator, use the URL in the following format: <Private IP Address or private DNS>:6005
- To access Enterprise Data Catalog use the URL in the following format: *<Private IP Address or private DNS>:9185*

Change the Default Passwords

When logging in for the first time, enter the default credentials. You must change the default passwords before you use Enterprise Data Catalog

Use the following default credentials for each of the application components:

Application	Username	Password
Informatica domain	Administrator	Administrator@1
Advanced Scanners	admin	admin
Database User	admin	infa_12345

For information on how to change the Informatica domain password, see Changing Your Password and for information on how to change the password for Advanced Scanners, see Changing the Advanced Scanners password.

Troubleshooting

You can review the AWS log files to troubleshoot issues with your Enterprise Data Catalog deployment. Use the CloudWatch service to monitor all of the events in your AWS deployments.

Log files

Log files for troubleshooting are available in the following locations in the Informatica server:

- Node preparation log file: `/opt/Infa_node_configure.log`
- Installation log file: `/opt/Infa_OneClick_Solution.log`

- Service Initialization log file: /var/log/cfn-init.log
- Informatica Cluster Service log file: /<opt/Informatica/<Infa_Oracle>/logs/InfaNode/services/InfaHadoopService/ICS/ICS.log
- Catalog Service log file: /opt/Informatica/<Infa_Oracle>/logs/InfaNode/services/CatalogService/Catalog_Service/LDM.log

If the Informatica EC2 instance is running, but the stack fails or if the Informatica Administrator console does not open, see the following log files to identify the issues:

- /opt/Infa_OneClick_Solution.log
- /var/log/cfn-init-cmd.log
- /var/log/cfn-init.log
- /var/log/cloud-init.log

Stack Failure

Review the following log files if an EC2 instance where Informatica services run is running but the stack fails, or if the Administrator tool fails to launch:

- Node preparation log file: `/opt/Infa_node_configure.log`
- Installation log file: `/home/Infa_OnceClick_Solution.log`
- Command Initialization log file: `/var/log/cfn-init-cmd.log`
- Service Initialization log file: `/var/log/cfn-init.log`
- Cloud log file: `/var/log/cloud-init.log`

Frequently asked questions on deployment error messages

I encountered a CREATE_FAILED error when I launched the deployment.

If AWS CloudFormation fails to create the stack, we recommend that you relaunch the template with **Rollback on failure** set to **No**. (This setting is under **Advanced** in the AWS CloudFormation console, **Options** page.) With this setting, the stack's state will be retained, and the instance will be left running, so you can troubleshoot the issue. (You will want to look at the log files in `/var/log/cfn-init-cmd.log`)

Note: When you set **Rollback on failure** to **No**, you will continue to incur AWS charges for this stack. Please make sure to delete the stack when you have finished troubleshooting.

For additional information, see Troubleshooting AWS CloudFormation on the AWS website or contact us on the AWS Discussion Forum.

I encountered errors while installing the Informatica domain and services. Where can I find more information?

View the `/opt/Infa_OneClick_Solution.log` log file to see more information about the errors that you encountered.

I encountered a size limitation error when I deployed the AWS CloudFormation templates.

We recommend that you launch the deployment templates from the location we provided or from another S3 bucket. If you deploy the templates from a local copy on your computer or from a non-S3 location, you might encounter template size limitations when you create the stack. For more information about AWS CloudFormation limits, see the AWS documentation.

What should I do before I relaunch the template with Rollback on failure?

Ensure that you disable rollback when you launch the stack in case of a stack failure. If Enterprise Data Catalog server stack is created, check the following logs to identify the issues:

- `/opt/Infa_OneClick_Solution.log`
- `/var/log/cfn-init.log`
- `/opt/Informatica/<Infa_Oracle>/logs/InfaNode/services/InfaHadoopService/ICS/ICS.log`
- `/opt/Informatica/<Infa_Oracle>/logs/InfaNode/services/CatalogService/Catalog_Service/LDM.log`

A "No license available" message appears on the Advanced Scanner user interface

Ensure that the EDC_USER, EDC_PASSWORD, and EDC_URL global variables are set under Administration, and that the Catalog Service is enabled.

I am facing Model Repository Service connectivity issues with the following error messages:


```
MRS_50015 "The Repository Service operation failed. ['[PRSVCSHARED_01707] Connection issues with the configured database. Request failed with the error message [[PERSISTENCEAPI_0307] [DBPERSISTER_1005] Failed to process requested operation. This was caused by [informatica][Oracle JDBC Driver]No more data available to read.].']"
```

```
MRS_50015 "The Repository Service operation failed. ['[PRSVCSHARED_01707] Connection issues with the configured database. Request failed with the error message [[PERSISTENCEAPI_0307] [PERSISTENCECOMMON_0001] Internal error. The request processing failed. This was caused by [informatica][Oracle JDBC Driver]Exception generated during deferred local transaction handling.  See next exception via SQLException.getNextException for details.].']"
```

Applicable for Oracle. Perform the following steps to resolve the Model repository database connectivity issue:

1. Launch the AWS RDS page.
2. Select the RDS instance.
3. Click the **Configuration** tab.
4. Scroll down the tab page and click the link under the **Parameter group** section.
5. Search for the following parameters in the list of parameters that appear:
   - sqlnetora.sqlnet.send_timeout
   - sqlnetora.sqlnet.recv_timeout
   - sqlnetora.sqlnet.inbound_connect_timeout
   - sqlnetora.sqlnet.outbound_connect_timeout
   - sqlnetora.tcp.connect_timeout

   Note: If the listed parameters are not present in the list, make sure that add the parameters to the list.
6. Change the value of each of the parameters listed in the previous step to 0 as shown in the following sample image:
   The following image shows the `sqlnetora.sqlnet.recv_timeout` parameters

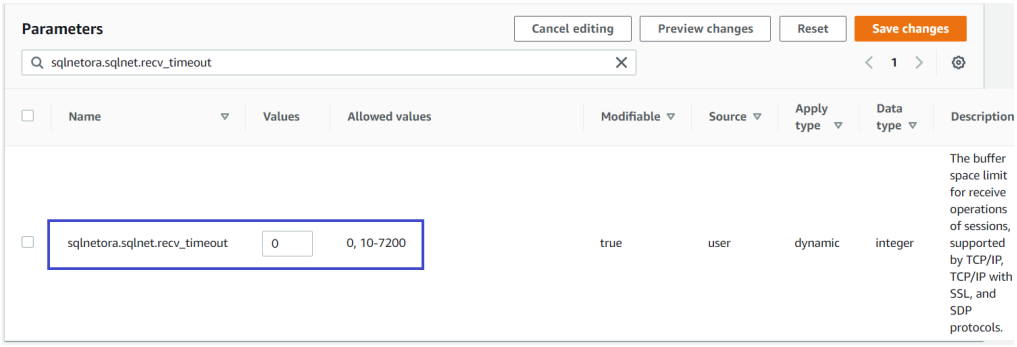

7. Click **Save changes**.

Additional resources

AWS Services

- AWS CloudFormation
- Amazon EBS
- Amazon EC2
- Amazon VPC

Enterprise Data Catalog Documentation

- Product Documentation

Reference Deployments

- AWS Deployment home page

Author

Suraj Jayan