How-To Library

Informatica

Informatica Enterprise Data Catalog on the AWS Cloud Marketplace

© Copyright Informatica LLC 2019, 2020. Informatica, the Informatica logo, and Big Data Management are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

Supported Versions

- Enterprise Data Catalog 10.2.2

Table of Contents

Abstract. . . . 0
Overview. . . . 2
Intended Audience. . . . 3
Costs and Licenses. . . . 3
AWS Resources Created by the Deployment. . . . 4
Architecture. . . . 5
Prerequisites. . . . 8
Specialized Knowledge. . . . 8
Deployment Prerequisites. . . . 8
Network Prerequisites. . . . 9
User Permissions. . . . 9
Deployment Options. . . . 10
Deployment Steps. . . . 10
Step 1: Prepare an AWS Account. . . . 10
Step 2: Obtain a License for Enterprise Data Catalog. . . . 11
Step 3: Launch the Deployment. . . . 11
Verifying Lambda CloudWatch Logs for Failures. . . . 19
Verifying Enterprise Data Catalog CloudWatch Logs for Failures. . . . 21
FAQ. . . . 22
Additional Resources. . . . 24
Send Us Feedback. . . . 24
Document Revisions. . . . 24
Notices. . . . 24

Overview

This deployment reference guide provides step-by-step instructions for deploying Informatica Enterprise Data Catalog on the AWS Cloud. Automated reference deployments use AWS CloudFormation templates to launch, configure, and run the AWS compute, network, storage, and other services required to deploy a specific workload on AWS.

Informatica Enterprise Data Catalog brings together all data assets in an enterprise and presents a comprehensive view of the data assets and data asset relationships. A data asset is a type of data object, such as a physical data source, Hadoop Distributed File System (HDFS), or big data repository. The data assets in the enterprise might exist in relational databases, purpose-built applications, reporting tools, HDFS, and other big data repositories.

Informatica Enterprise Data Catalog captures the physical and operational metadata for a large number of data assets that you use to determine the effectiveness of enterprise data. Metadata is data about data. Metadata contains details about the structure of data sources. Metadata also includes information, such as data patterns, data types, relationships between columns, and relationships between multiple data sources.

Informatica Enterprise Data Catalog gathers information related to metadata across the enterprise. The metadata includes column data statistics, data domains, data object relationships, and data lineage information. A comprehensive view of enterprise metadata can help you make critical decisions on data integration, data quality, and data governance in the enterprise.

This guide is for users who are responsible for deploying Enterprise Data Catalog on the AWS Cloud.

Intended Audience

As a user with administrator privileges to deploy applications on AWS, it is assumed that you are familiar with AWS resources such as Cloud formation, VPC, EC2, S3, RDS, Internet gateway, NAT Gateway, Route table, Security group, and Elastic IP.

Familiarity with the concepts of IP CIDR, public and private IP addresses is recommended. In the current deployment, you can connect to cloud-based resources only using a public IP address.

You are also assumed to be familiar with Informatica Enterprise Data Catalog.

Costs and Licenses

You are responsible for the cost of the AWS services used while running this deployment. There is no additional cost for using this deployment.

The AWS CloudFormation template for this deployment includes configuration parameters that you can customize. Some of these settings, such as instance type, will affect the cost of deployment. See the pricing pages for each AWS service you will be using for cost estimates.

This deployment requires a license for Informatica Enterprise Data Catalog. To sign up for a demo license, please contact Informatica.

The following table lists the instance types that you can choose based on sizing requirements:

Virtual Machine	Instance Type	Cluster Size
Database	M5.xlarge	Small, Medium, Large
Informatica Domain	M4.2xlarge / M5.2xlarge	Small, Medium, Large
Informatica Cluster Service	M4.4xlarge / M5.4xlarge	Small
	M4.2xlarge / M5.2xlarge	Medium, Large

See the Enterprise Data Catalog EDC Performance Tuning Guide to choose an SLA-based sizing recommendation.

The deployment chooses M4 or M5 type of instances based on the instance type availability for the specific AWS region.

AWS Resources Created by the Deployment

The following components are created when you deploy Enterprise Data Catalog in a new virtual private cloud (VPC):

Component	Number of Components Created
VPC	1
Internet gateway	1
Subnet	2
Route table	2
Security group	4 security groups: - 1 for RDS, 1 for Informatica domain instance, and 2 for Hadoop nodes - Based on your choice, 1 security group for RDP server is created for to support remote log in. The group is created if you selected the option to create the RDP server as **Yes**.
DB subnet group	1
RDS	1 Oracle RDS instance with 200 GB of storage capacity that runs on a db.m5.xlarge DB instance type.
EC2	Informatica domain with 1 EC2 instance and 200 GB of storage space. The instance created is of type m5.2xlarge / m4.2xlarge based on availability of the instance size in the selected region. Based on your choice, a small-sized Informatica Hadoop Cluster with 1 EC2 instance and 150 GB of storage space is created. The instance created is of type. m5.4xlarge / m4.4xlarge based on availability of the instance size in the selected region. Based on your choice, a medium-sized Informatica Hadoop Cluster with 3 EC2 instances with each instance providing a storage space of 150 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on the availability of the instance size in the selected region. Based on your choice, a large-sized Informatica Hadoop Cluster with 6 EC2 instances with each instance providing a storage space of 150 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on availability of the instance size in the selected region. Based on your choice, a Windows Remote Desktop server with 1 EC2 instance that has 100 GB of storage space is created. The instance created is of type m5.large / m4.large based on availability of the instance size in the selected region.
Elastic IP	1 Elastic IP attached to the NAT gateway.

The following components are created when you deploy Enterprise Data Catalog in an existing VPC:


Component	Number of Components Created
Security group	4 security groups: - 1 for RDS, 1 for Informatica domain instance, and 2 for Hadoop nodes - Based on your choice, 1 security group for RDP server is created for to support remote log in. The group is created if you selected the option to create the RDP server as **Yes**.
DB subnet group	1

Component	Number of Components Created
RDS	1 Oracle RDS instance with 200 GB of storage capacity that runs on a db.m5.xlarge DB instance type.
EC2	Informatica domain with 1 EC2 instance and 200 GB of storage space. The instance created is of type m5.2xlarge / m4.2xlarge, based on availability of the instance size in the selected region. Based on your choice, a small-sized Informatica Hadoop Cluster with 1 EC2 instance and 150 GB of storage space is created. The instance created is of type. m5.4xlarge / m4.4xlarge based on availability of the instance size in the selected region. Based on your choice, a medium-sized Informatica Hadoop Cluster with 3 EC2 instances with each instance providing a storage space of 150 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on the availability of the instance size in the selected region. Based on your choice, a large-sized Informatica Hadoop Cluster with 6 EC2 instances with each instance providing a storage space of 150 GB is created. The instances created are of type m5.2xlarge / m4.2xlarge based on availability of the instance size in the selected region. Based on your choice, a Windows Remote Desktop server with 1 EC2 instance that has 100 GB of storage space is created. The instance created is of type m5.large / m4.large based on availability of the instance size in the selected region.

Architecture

Deploying into a new virtual private cloud (VPC) with the default parameters builds the following Enterprise Data Catalog environment in the AWS Cloud.

Figure 1. Deployment architecture for Enterprise Data Catalog on AWS

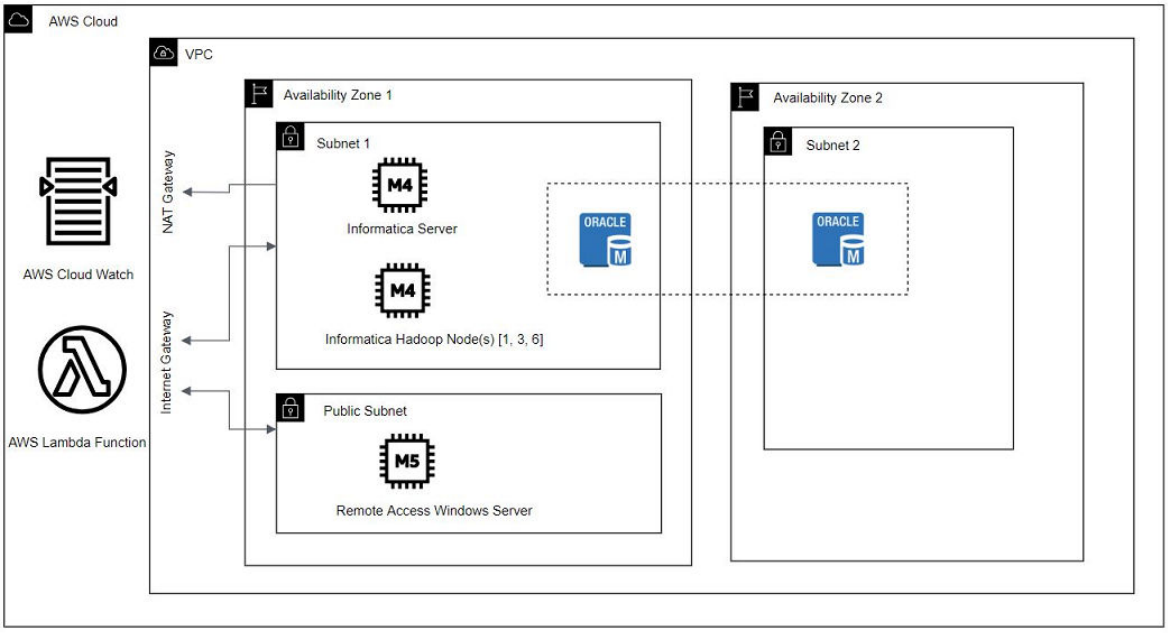

The architecture includes the following components:

- A VPC configured across two Availability Zones. For each Availability Zone, this deployment provisions one private and one public subnet. The Enterprise Data Catalog deployment uses both subnets.
- Managed network address translation (NAT) gateways deployed into the public subnets and configured with an Elastic IP address for outbound internet connectivity.

- An AWS Identity and Access Management (IAM) role with fine-grained permissions for access to AWS services necessary for the deployment process.
- Appropriate security groups for each instance or function to restrict access to only necessary protocols and ports.
- In the public subnets, EC2 instances for Enterprise Data Catalog, including the following:
  - A single-node or multi-node, embedded cluster based on the cluster size you configure. A node represents an EC2 machine. The Informatica domain runs on a single node with all the associated services. The cluster runs on a separate node or nodes based on your selection. The application services such as the model repository service and the data integration service run on the Informatica domain node.
  - Scanners to extract metadata from all data sources supported by Enterprise Data Catalog.
  - **Oracle database**, where the Informatica domain configuration repository, the model repository, the content management service reference data warehouse, and the profiling warehouse are configured.
  - **Informatica domain**, which is the fundamental administrative unit of the Informatica platform. The Informatica platform has a service-oriented architecture that provides the ability to scale services and share resources across multiple machines.
  - **Model Repository Service**, which is a relational database that stores all the metadata for projects created using Informatica client tools. The model repository also stores run-time and configuration information for applications that are deployed to a Data Integration Service. The information relating to the administrative module of Enterprise Data Catalog, called Catalog Administrator, is stored in the model repository.
  - **Data Integration Service**, which is a compute component within the Informatica domain that manages requests to submit big data integration, big data quality, and profiling jobs to the Hadoop cluster for processing.
  - **Informatica Cluster Service**, which runs and manages all the Hadoop services, Apache Ambari server, and Apache Ambari agents on an internal Hadoop cluster.
  - **Catalog Service**, which runs Enterprise Data Catalog and manages connections between service components and external applications.
  - **Content Management Service**, which manages reference data. It provides reference data information to the Data Integration Service and Informatica Developer.
  - **Analyst Service**, which runs the Analyst tool in the Informatica domain. The Analyst Service manages the connections between the service components and the users who log in to the Analyst tool. You can perform column and rule profiling, manage scorecards, and manage bad records and duplicate records in the Analyst tool.
  - **Profiling**, which helps you find the content, quality, and structure of data sources of an application, schema, or enterprise. A profile is a repository object that finds and analyzes all data irregularities across data sources in the enterprise and hidden data problems that put data projects at risk. The profiling results include unique values, null values, data domains, and data patterns. In this deployment, profiling can be run on the Data Integration Service (default) or Hadoop.
  - **Business Glossary**, which consists of online glossaries of business terms and policies that define important concepts within an organization. Data stewards create and publish terms that include information such as descriptions, relationships to other terms, and associated categories. Glossaries are stored in a central location for easy lookup by end-users. Glossary assets include business terms, policies, and categories that contain information that consumers might search for. A glossary is a high-level container that stores Glossary assets. A business term defines relevant concepts within the organization, and a policy defines the business purpose that governs practices related to the term. Business terms and policies can be associated with categories, which are descriptive classifications.


- **Metadata and Catalog**, which include the metadata persistence store, search index, and graph database in an embedded Hortonworks cluster. The catalog represents an indexed inventory of all the data assets in the enterprise that you configure in Enterprise Data Catalog. Enterprise Data Catalog organizes all the enterprise metadata in the catalog and enables the users of external applications to discover and understand the data.

- **Data Sources** representing the source databases or metadata sources that Enterprise Data Catalog scans to extract relevant metadata for further use. You can extract metadata from the following data sources:

Data Source Type	Data Sources
Database	- Oracle - IBM DB2 - IBM DB2 for z/OS - DB2 for i5/OS - Microsoft SQL Server - Sybase - JDBC - Teradata - IBM Netezza
Cloud	- Amazon S3 (CSV/XML/JSON) - Amazon Redshift - Azure Data Lake Store - Azure Microsoft SQL Data Warehouse - Azure Microsoft SQL Server - Google BigQuery - Microsoft Azure Blob Storage - Salesforce - Workday
Big Data	- Cloudera Navigator - Apache Atlas - HDFS - Hive
Business Glossary	- Axon - Business Glossary
Data Integration	- Informatica Cloud Service - Informatica Master Data Management - Informatica Platform - PowerCenter - SQL Server Integration Service
Data Modeling	- Erwin
File Management	- File System - OneDrive - SharePoint
Business Intelligence	- IBM Cognos - SAP Business Objects - Tableau - Microstrategy - OBIEE
Applications	- SAP R3

You can also use Enterprise Data Catalog on AWS to collect metadata from resources deployed on premises, as shown in Figure.

Figure 2. Working with on-premises resources

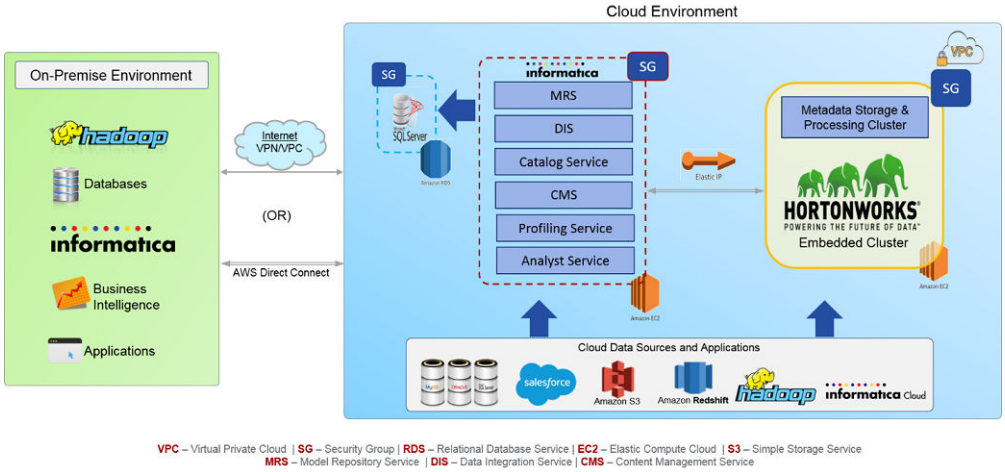

You can collect metadata both from resources deployed on a VPC and from resources deployed on premises. For on-premises resources, Enterprise Data Catalog collects metadata through a virtual private network (VPN), a VPC, or by using AWS Direct Connect.

After deploying Informatica Enterprise Data Catalog, you must configure the required resources to extract metadata.

If you decide to deploy Enterprise Data Catalog into your existing VPC (see Deployment Options), the deployment assumes that the infrastructure components already exist, and deploys Enterprise Data Catalog into the environment you specify during deployment.

Prerequisites

Specialized Knowledge

Before you deploy Enterprise Data Catalog, we recommend that you become familiar with the following AWS services. (If you are new to AWS, see Getting Started with AWS.)

- Amazon VPC
- Amazon EC2
- Amazon RDS
- Amazon S3
- Elastic IP Addresses

Deployment Prerequisites

Before you deploy Enterprise Data Catalog in the AWS cloud, verify that you have performed the following steps:

- Complete all the network prerequisites.
- Verify the user permissions.

Network Prerequisites

Before you deploy Enterprise Data Catalog in the AWS cloud, verify that you have completed the following network prerequisites for the Enterprise Data Catalog application services:

Existing VPC Deployment

- Ensure that the VPC has the DNS resolution enabled.
- You must also attach the subnet to a route table with a local route to the VPC CIDR.
- For a successful deployment, make sure that the service subnets you choose are attached to a route table under the selected VPC.

New VPC Deployment

- For the availability zone, ensure that selected availability zone has sufficient capacity to create a new subnet, route table, and internet gateway, NAT gateway.
- Ensure that the VPC creation has not exceeded the supported limit.

User Permissions

Before you deploy Enterprise Data Catalog in the AWS cloud, verify that you have the required user permissions to launch Enterprise Data Catalog application services on the AWS marketplace.

The user must have the IAM role and policy creation and lambda run permissions.

Configure the following minimum required policies for the IAM user to launch Enterprise Data Catalog application services on the AWS marketplace:

- rds:CreateDB*
- rds:DeleteDB*
- rds:DescribeDB*
- ec2:*Vpc*
- ec2:*Subnet*
- ec2:*Gateway*
- ec2:*Route*
- ec2:*Address*
- ec2:*SecurityGroup*
- ec2:*NetworkAcl*
- ec2:RunInstances
- ec2:StopInstances
- ec2:StartInstances
- ec2:TerminateInstances
- ec2:DescribeVpcs
- ec2:DescribeSubnets
- ec2:DescribeInternetGateways
- ec2:DescribeEgressOnlyInternetGateways
- ec2:DescribeVpcEndpoints
- ec2:DescribeNatGateways
- ec2:DescribeCustomerGateways

- ec2:DescribeVpnGateways
- ec2:DescribeVpnConnections
- ec2:DescribeRouteTables
- ec2:DescribeAddresses
- ec2:DescribeSecurityGroups
- ec2:DescribeNetworkAcls
- ec2:DescribeDhcpOptions
- ec2:DescribeTags
- ec2:DescribeInstances
- logs:CreateLogGroup
- logs:CreateLogStream
- logs:PutLogEvents
- logs:DescribeLogStreams

Deployment Options

You can select one of the following deployment options:

- Deploy Enterprise Data Catalog into a new VPC (end-to-end deployment). This option builds a new AWS environment consisting of the VPC, subnets, NAT gateways, security groups, and other infrastructure components, and then deploys Enterprise Data Catalog into this new VPC.
- Deploy Enterprise Data Catalog into an existing VPC. This option provisions Enterprise Data Catalog in your existing AWS infrastructure.

The deployment also lets you configure additional settings such as CIDR blocks, instance types, and Enterprise Data Catalog settings, as discussed later in this guide.

Deployment Steps

Step 1: Prepare an AWS Account

If you don't already have an AWS account, create one at http://aws.amazon.com by following the on-screen instructions.

Use the region selector in the navigation bar to choose the AWS Region where you want to deploy Enterprise Data Catalog on AWS.

Create a key pair in your preferred region.

When you log in to an EC2 instance, you use a password file for authentication. The file is called a private key file and has a file name extension of .pem.

If you do not have an existing .pem key to use, follow the instructions in the AWS documentation to create a key pair.

Note: Your administrator might ask you to use an existing key pair.

When you create a key pair, you save the .pem file to your desktop system. Simultaneously, AWS saves the key pair to your account. Make a note of the key pair that you want to use for the Enterprise Data Catalog instance, so that you can provide the key pair name during network configuration.

If necessary, request a service limit increase for the EC2 instance type you've decided to use for the Informatica domain. You might need to do this if you already have an existing deployment that uses this instance type, and you think you might exceed the default limit with this reference deployment.

Step 2: Obtain a License for Enterprise Data Catalog

1. This deployment requires a license for Informatica Enterprise Data Catalog. To sign up for a demo license, please contact Informatica.
2. In your AWS account, create an S3 bucket.

   (Optional) Create a directory under the bucket.


   Place the Enterprise Data Catalog license key file for the software in the S3 bucket or directory. You'll be prompted for its location in step 3.

Step 3: Launch the Deployment


You are responsible for the cost of the AWS services used while running this deployment. There is no additional cost for using this deployment. See the pricing pages for each AWS service you will be using for full details. Each deployment takes approximately one to two hours to complete.

Perform the following steps to launch the deployment:


1. Login to AWS Marketplace using the AWS account.
2. Type `Enterprise Data Catalog` in the search box as shown in the following image and press **Enter**:

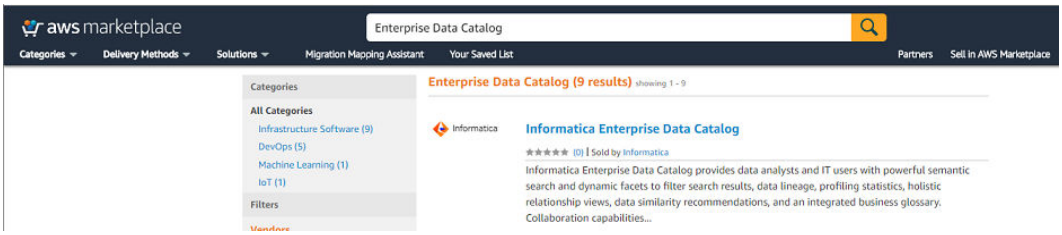


3. Click **Informatica Enterprise Data Catalog**. The **Product Overview** page appears as shown in the following image:

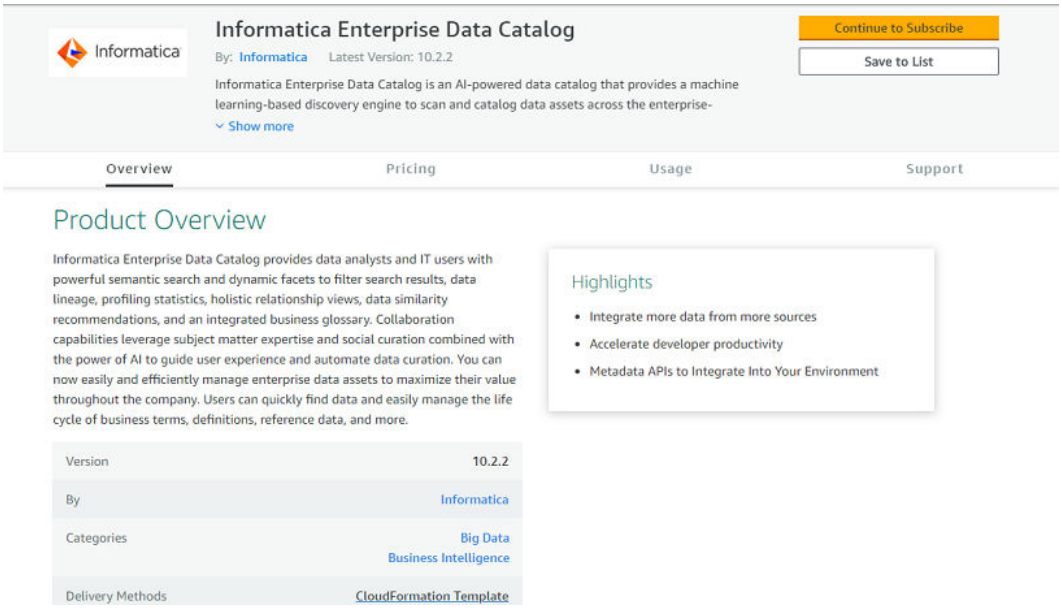


4. Click **Continue to Subscribe**. The **Subscribe to this software** page appears as shown in the following image:

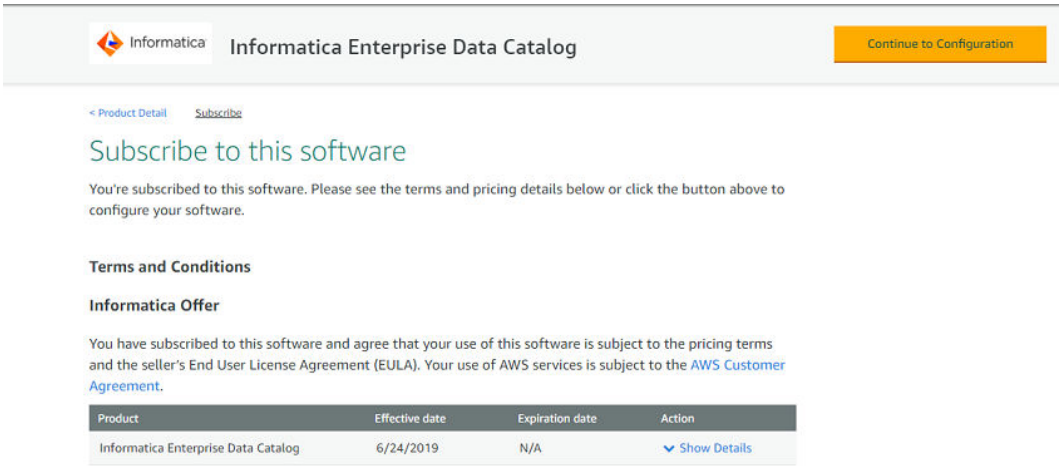


5. Click **Continue to Configuration**. The **Configure this software** page appears as shown in the following image:

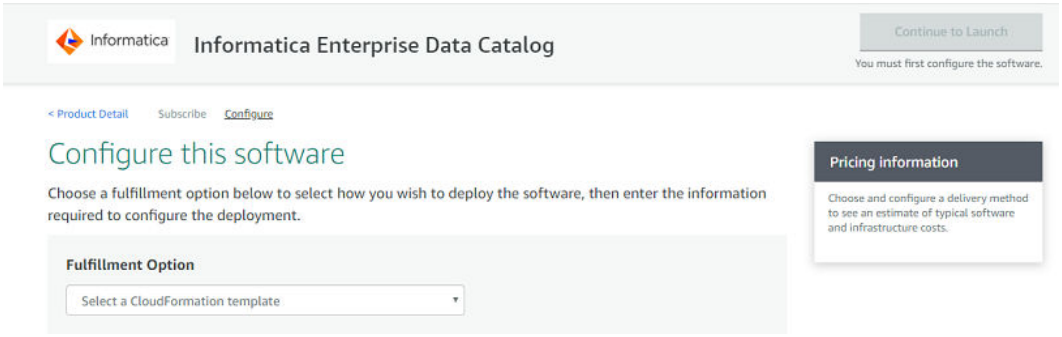


6. Based on your requirement, select one of the following options from the **Fulfillment Option** drop-down box to specify where you want to deploy Enterprise Data Catalog:
   - Informatica Enterprise Data Catalog (New VPC). Select this option to deploy Enterprise Data Catalog on a new VPC.
   - Informatica Enterprise Data Catalog (Existing VPC). Select this option to deploy Enterprise Data Catalog on an existing VPC.

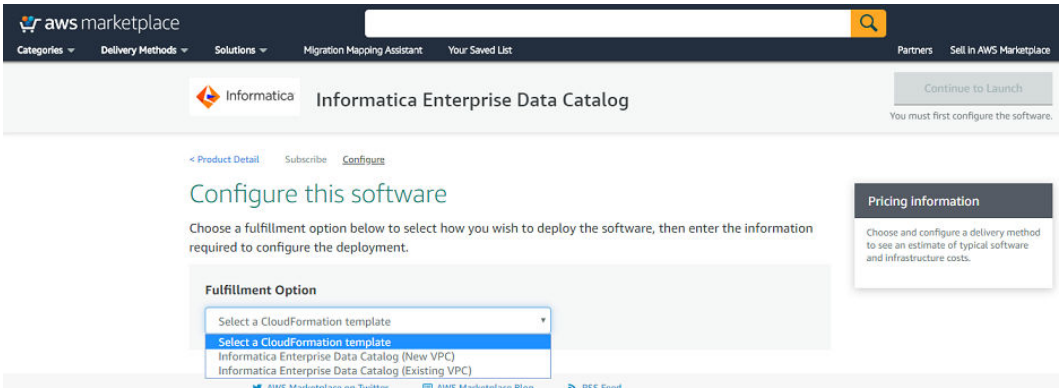

7. Click **Continue to Launch**. The **Launch this software** page appears as shown in the following image:

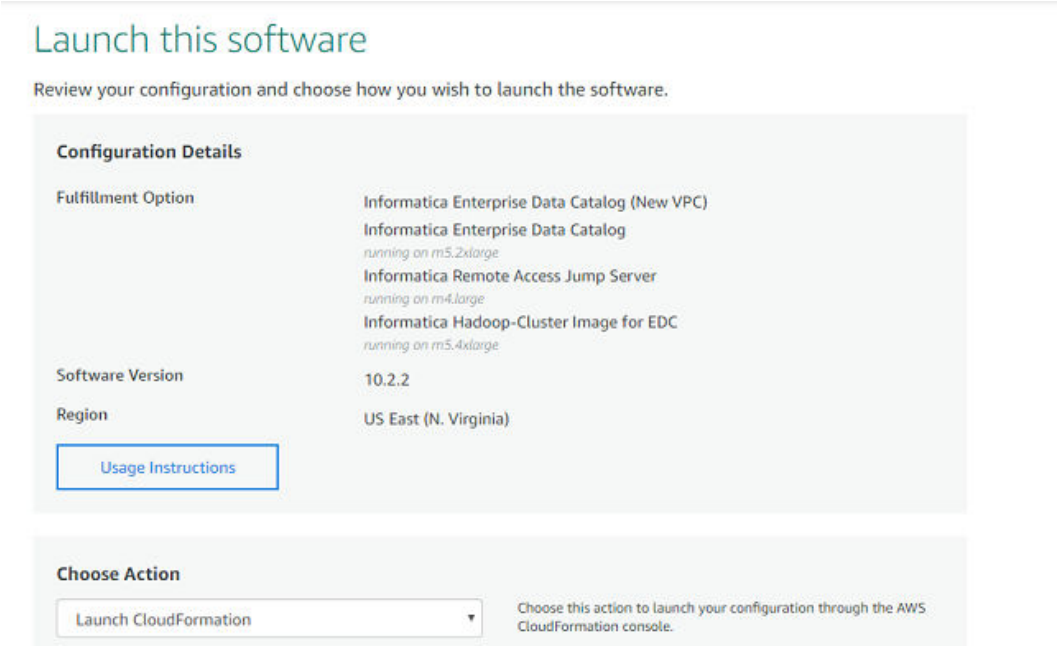

8. Select **Launch CloudFormation** from the **Choose Action** drop-down list and click **Launch**. The **Create stack** page appears as shown in the following image:

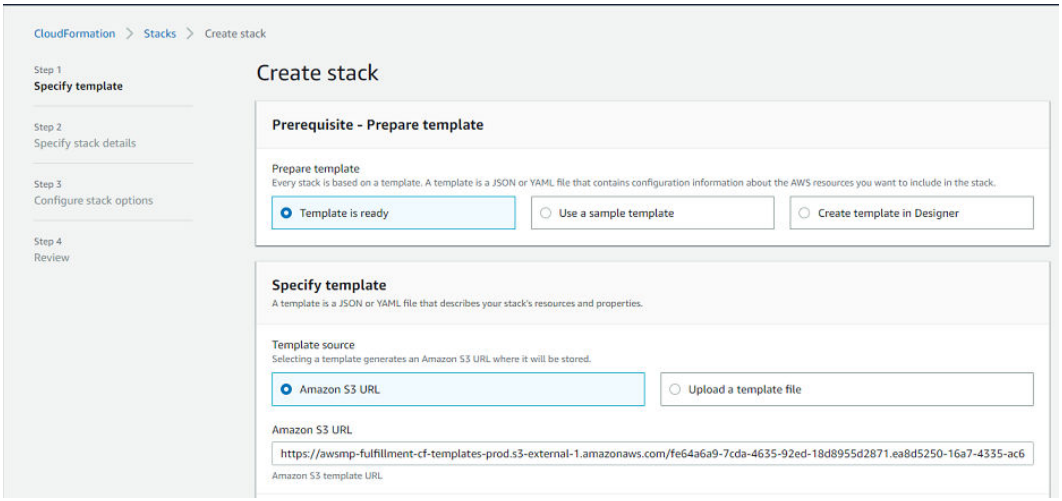

9. Check the region that's displayed in the upper-right corner of the navigation bar, and change it if necessary. This is where the network infrastructure for Enterprise Data Catalog will be built. The template is launched in the US West (Oregon) Region by default.
10. On the **Specify template** section, keep the default setting for the template URL, and then choose **Next**.
11. On the **Specify stack details** page, change the stack name if needed. Review the parameters for the template. Provide values for the parameters that require input. For all other parameters, review the default settings and customize them as necessary. When you finish reviewing and customizing the parameters, choose **Next.**

    In the following tables, parameters are listed by category and described separately for the two deployment options:

    - "Option1:Parameters for deployment into a new VPC" on page 14

- "Option 2: Parameters for deployment into an existing VPC" on page 15

Note: If you're deploying Enterprise Data Catalog into an existing VPC, make sure that your VPC has a minimum of two subnets. If you choose a remote desktop, you can either use one of the two subnets or use a separate public subnet. These subnets require NAT gateways in their route tables, to allow the instances to download packages and software without exposing them to the Internet. You'll also need the domain name option configured in the DHCP options as explained in the Amazon VPC documentation. You'll be prompted for your VPC settings when you launch the deployment.

Option1:Parameters for deployment into a new VPC

View template

Network Configuration:

Parameter label (name)	Default	Description
Availability Zones for subnets (AvailabilityZones)	Requires input	The list of Availability Zones to use for the subnets in the VPC. The Quick Start uses two Availability Zones from your list and preserves the logical order you specify.
VPC CIDR (VPCCIDR)	10.0.0.0/16	CIDR block for the VPC.
Public Subnet CIDR		CIDR block for the public subnet. Ensure that you include the subnet in the VPC CIDR.
Private Subnet 1 CIDR (PrivateSubnet1CIDR)	10.0.0.0/19	CIDR block for the private subnet 1. Ensure that you include the subnet in the VPC CIDR.
Private Subnet 2 CIDR (PrivateSubnet2CIDR)	10.0.32.0/19	CIDR block for the private subnet 2. Ensure that you include the subnet in the VPC CIDR.
Valid CIDR IP Range	Requires input	The CIDR IP range that is permitted to access the Informatica domain and the Informatica embedded cluster. We recommend that you use a constrained CIDR range to reduce the potential of inbound attacks from unknown IP addresses. For example, to specify the range of 10.20.30.40 to 10.20.30.49, enter 10.20.30.40/49.
Deploy Remote Access Windows Server	No	Select Yes to deploy a remote Windows Server to access other resources in the VPC. Make sure that you select the service subnets that are not associated to an Internet Gateway.

Amazon EC2 Configuration:

Parameter label (name)	Default	Description
Key Pair Name (KeyName)	Requires input	Name of an existing Amazon EC2 key pair from "Step 2: Obtain a License for Enterprise Data Catalog" on page 11. You must specify this option to enable SSH access to Informatica domain and the cluster nodes.

Amazon RDS Configuration:

Parameter label (name)	Default	Description
Amazon RDS Database Account Password	Requires input	User name for the RDS database instance associated with the Informatica domain and services (such as Model Repository Service, Data Integration Service, Content Management Service).
Confirm Password	Requires input	Confirm the password for the RDS database instance.
Deploy High Availability RDS (MultiAZ)?	No	Select Yesif you want to deploy a high-availability RDS.

Informatica Enterprise Data Catalog Configuration:

Parameter label (name)	Default	Description
Informatica Embedded Cluster Size	Requires input	The available cluster sizes based on the region you selected. You can select any of the following options based on your requirement: - Small - Medium - Large
Informatica Administrator Username	Requires input	Username to access Informatica Administrator. **Note:** The default username is Administrator.
Informatica Administrator Password (InformaticaAdminPassword)	Requires input	Administrator password for accessing Informatica Administrator.
Confirm Password	Requires input	Confirm the password for accessing Informatica Administrator.
Enterprise Data Catalog License Key Location (InformaticaEICKeyS3Bucket)	Requires input	Name of the S3 bucket in your account that contains the Informatica Enterprise Data Catalog license key, from "Step 1: Prepare an AWS Account" on page 10.
Enterprise Data Catalog License Key Name (InformaticaEICKeyname)	Requires input	The Informatica Enterprise Data Catalog license key name. For example, *EICLicense_10_2_2.key* or *EICLicense/EICLicense_10_2_2.key*
Import Sample Content (ImportSampleData)	Yes	Keep the default setting **Yes** to import the sample catalog data. You can use the sample data to get started with the product. Make sure that you do not run resources using the sample data.

Option 2: Parameters for deployment into an existing VPC

View template

Network Configuration:

Parameter label (name)	Default	Description
VPC (VPCID)	Requires input	ID of your existing VPC where you want to deploy Enterprise Data Catalog (for example, vpc-0343606e). The VPC must meet the following requirements: - It must be set up with public access through the Internet via an attached Internet gateway. - The **DNS Resolution** property of the VPC must be set to **Yes**. - The **Edit DNS Hostnames** property of the VPC must be set to **Yes**.
Valid CIDR IP Range	Requires input	The CIDR IP range that is permitted to access the Informatica domain and the Informatica embedded cluster. We recommend that you use a constrained CIDR range to reduce the potential of inbound attacks from unknown IP addresses. For example, to specify the range of 10.20.30.40 to 10.20.30.49, enter 10.20.30.40/49.
Informatica Service Subnet1	Requires input	Select the subnet ID where you want to deploy the Informatica Server and the Hadoop nodes. Make sure that the subnet is included in the included in the VPC. Make sure that the subnet is associated with an Internet Gateway or a NAT Gateway. Ensure that Service subnet ID1 and Service subnet are not the same.
Informatica Service Subnet2	Requires input	If you want to deploy a high-availability RDS, ensure that you select the Service Subnet ID for the database in the second availability zone. You must also verify that the VPC includes the subnet. If you do not want to deploy a high-availability RDS, choose any subnet that is included in the VPC.

Remote Windows Server Configuration:

Parameter label (name)	Default	Description
Deploy a Remote Windows Server	No	Select Yes to deploy a remote Windows Server to access other resources in the VPC. Make sure that you select the service subnets that are not associated to an Internet Gateway.
Public SubnetID	Requires input	If you selected Yes for the previous option, then select a subnet ID attached to an Internet Gateway. Else, choose any subnet included in the VPC.

Amazon EC2 Configuration:

Parameter label (name)	Default	Description
Key Pair Name (KeyName)	Requires input	Name of an existing Amazon EC2 key pair from step 1. You must specify this option to enable SSH access to the Informatica domain.

Amazon RDS Configuration:

Parameter label (name)	Default	Description
Amazon RDS Database Account Password	Requires input	User name for the RDS database instance associated with the Informatica domain and services (such as Model Repository Service, Data Integration Service, Content Management Service).
Confirm Password	Requires input	Confirm the password for the RDS database instance.
Deploy High Availability RDS (Multi-AZ)?	No	Select Yesif you want to deploy a high-availability RDS.

Informatica Enterprise Data Catalog Configuration:

Parameter label (name)	Default	Description
Informatica Embedded Cluster Size	Requires input	The available cluster sizes based on the region you selected. You can select any of the following options based on your requirement: - Small - Medium - Large
Informatica Administrator Username (InformaticaAdminUsername)	Requires input	User name for accessing Informatica Administrator. **Note:** The default username is Administrator.
Informatica Administrator Password (InformaticaAdminPassword)	Requires input	Password for accessing Informatica Administrator.
Confirm Password	Requires input	Confirm the password for accessing Informatica Administrator.
Enterprise Data Catalog License Key Location (InformaticaEICKeyS3Bucket)	Requires input	Name of the S3 bucket in your account that contains the Informatica Enterprise Data Catalog license key, from "Step 2: Obtain a License for Enterprise Data Catalog" on page 11.
Enterprise Data Catalog License Key Name (InformaticaEICKeyName)	Requires input	The Informatica Enterprise Data Catalog license key name. For example, *<license key name>* or *<bucket sub folder/license key name>*
Import Sample Content (ImportSampleData)	Yes	Keep the default setting **Yes** to import the sample catalog data. The resources do not get imported. You can use the sample data to get started with the product. Make sure that you do not run resources using the sample data.


On the **Configure stack options** page, you can specify tags (key-value pairs) for resources in your stack and set advanced options. When you are done, choose **Next**.

On the **Review** page, review and confirm the template settings. Under Capabilities, select the check box to acknowledge that the template will create IAM resources.

Choose **Create** to deploy the stack.

Monitor the status of the stack. When the status is CREATE_COMPLETE, the deployment is complete.


You can use the URL displayed in the **Output**s tab as shown in the following image to launch Enterprise Data Catalog on AWS.

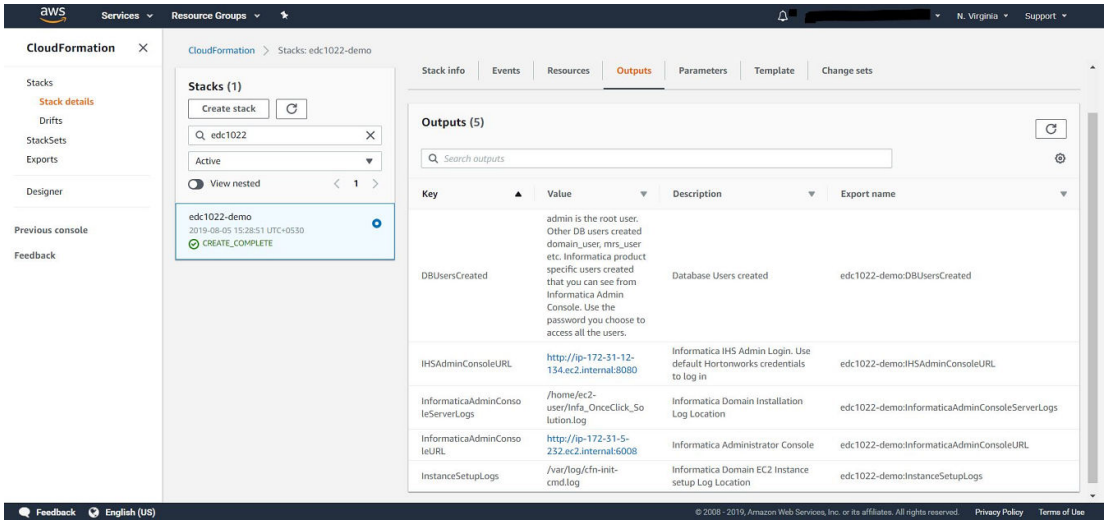

See the Informatica Enterprise Data Catalog User Guide for information about logging in to Enterprise Data Catalog.

A sample completed stack for Enterprise Data Catalog deployed on AWS is shown in Figure 3.

Figure 3. Sample Completed Stack for Enterprise Data Catalog on AWS

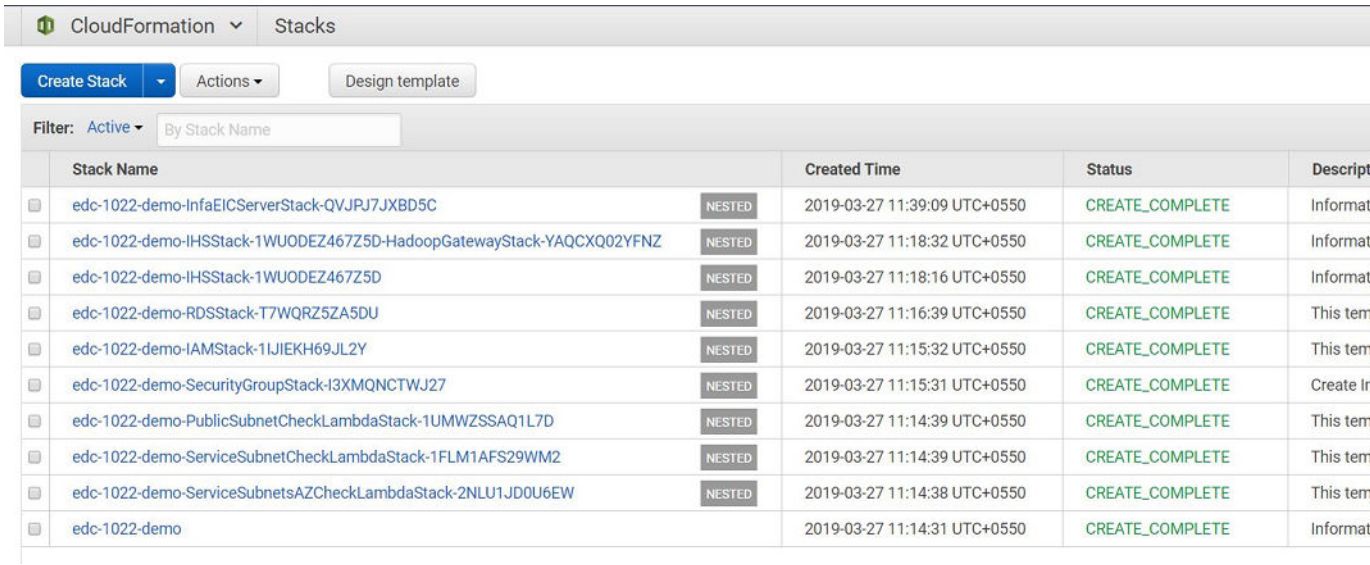

Accessing Informatica Administrator and the Apache Ambari Server

Based on the type of deployment, follow the instructions to access Informatica Administrator and the Apache Ambari Server:

- Deployment on a new VPC. Use an instance in the same VPC that you can access from outside the VPC. It is assumed that you have not deployed a remote Windows server to access other resources in the VPC. Use that instance to access other resources. See the following URL formats that you can use:
  - To access the Informatica Administrator, use the URL in the following format: <Private IP Address or private DNS>:6008 and
  - To access the Apache Ambari Server, use the URL in the following format: <Private IP Address or private DNS>:8080

- Deployment on an existing VPC. If the created instances are assigned a public IP address or DNS, you can access the Informatica Administrator and the Apache Ambari Server using the public IP address or the DNS with port numbers as shown in the following sample:
  - To access the Informatica Administrator, use the URL in the following format: *<Public IP Address or DNS>:6008*
  - To access the Apache Ambari Server, use the URL in the following format: *<Public IP Address or DNS>:8080*. You can use the default Hadoop username and password to access the Apache Ambari Server.
  - If the public IP address or DNS is not assigned to the created instance, then you can use the private IP address or DNS. Use an instance in the same VPC if you have not deployed a remote Windows server to access other resources in the VPC. Make sure that you can access the instance from outside the VPC. Use that instance to access other resources. For example, to access the Informatica Administrator , use the URL in the following format:*<Private IP Address or private DNS>:6008*. To access the Apache Ambari Server, use the URL in the following format: *<Private IP Address or private DNS>:808*0

Troubleshooting


If you want to troubleshoot issues relating to Informatica Cluster Service, Catalog Service, Installation, and service initialization, you'll have to look at the following log files:

- Installation log file: `/home/Infa_OnceClick_Solution.log`
- Service Initialization log file: `/var/log/cfn-init.log`
- Informatica Cluster Service log file: `/home/Informatica/Server/logs/InfaNode/services/InfaHadoopService/Informatica_Hadoop_Service/IHS.log`
- Catalog Service log file: `/home/Informatica/Server/logs/InfaNode/services/CatalogService/Catalog_Service/LDM.log`


Verifying Lambda CloudWatch Logs for Failures

Perform the following steps to verify the Lambda CloudWatch logs if any of the Lambda stacks fail:


1. Identify the Lambda stack that failed from the list of stacks displayed as shown in the following image:




2. Select the check box adjacent to the failed stack as shown in the following image:

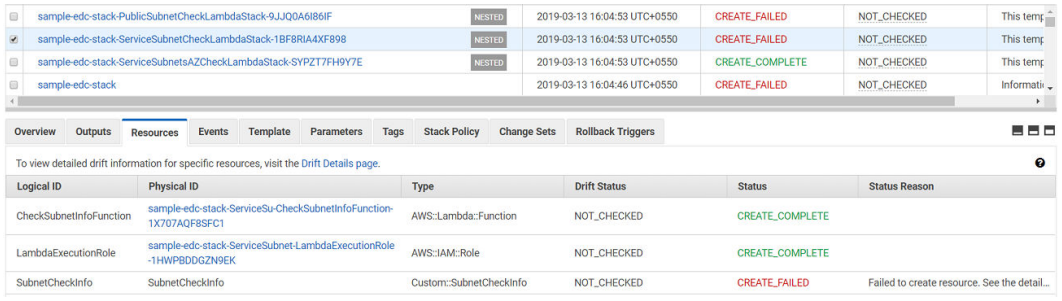


3. Copy the Physical ID of the Logical ID CheckSubnetInfoFunction. The Physical ID in the sample is sample-edc-stack-ServiceSu-CheckSubnetInfoFunction-1X707AQF8SFC1
4. Go to **CloudWatch** on the AWS Management Console.
5. Click **Logs** in CloudWatch as shown in the following image:

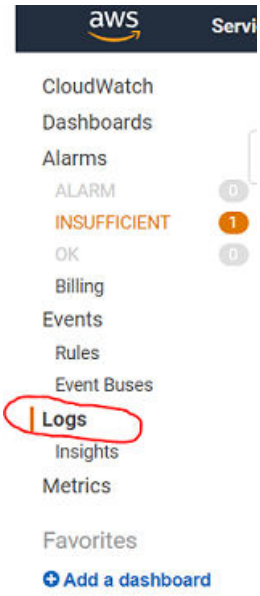

6. Paste the **Physical ID** that you copied, prefixed with `/aws/lambda`, in the **Filter** box as shown in the following image and press **Enter.** The **Log Groups** pane appears.

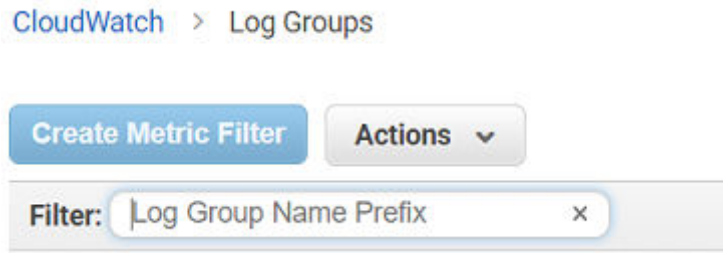


7. Click the link that appears under **Log Groups** as shown in the following image:

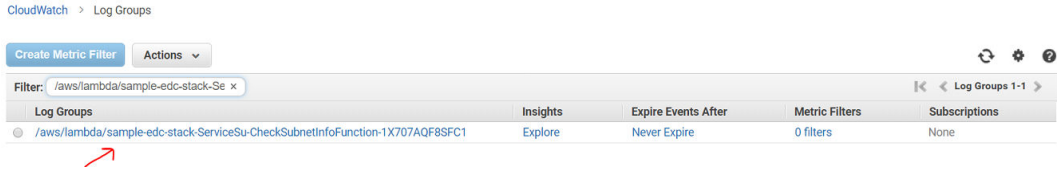


The Log Streams pane appears.

8. Click the link that appears under the Log Streams pane as shown in the following image:

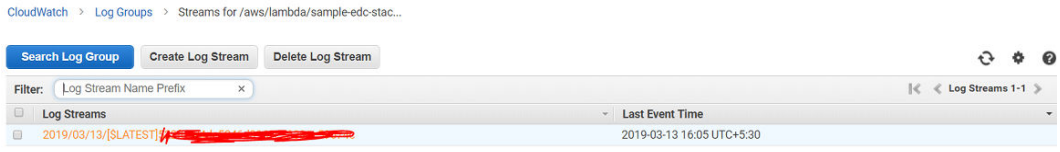


The list of log events appears.

9. Search for the first instance of a Status message as shown in the following image:

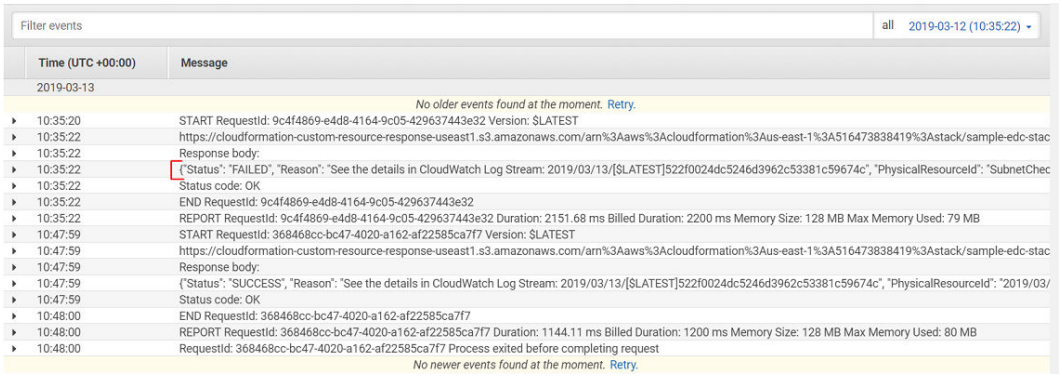


10. Expand the event to see the details of the Lambda stack failure as shown in the following image:

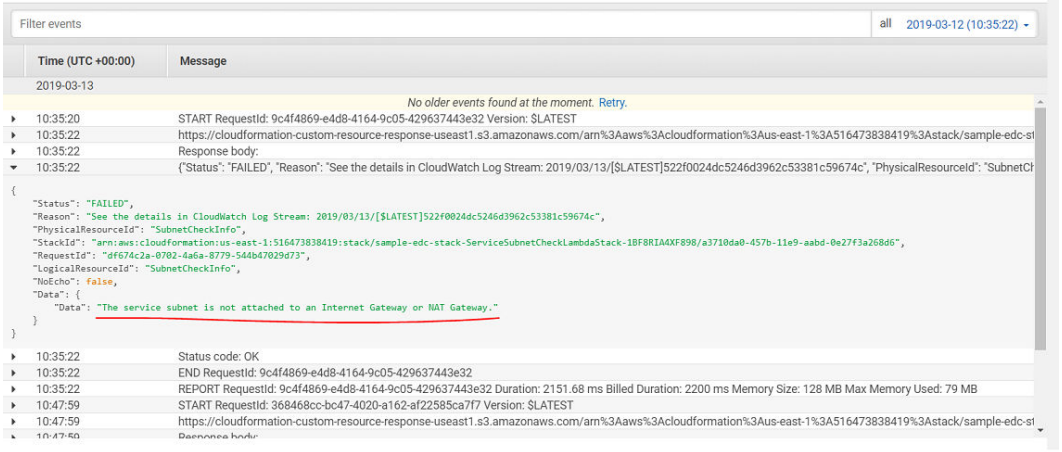


Verifying Enterprise Data Catalog CloudWatch Logs for Failures

You can perform the following steps to verify the Enterprise Data Catalog CloudWatch logs:

1. Go to CloudWatch on the AWS Management Console.
2. Click **Logs** in CloudWatch as shown in the following image:

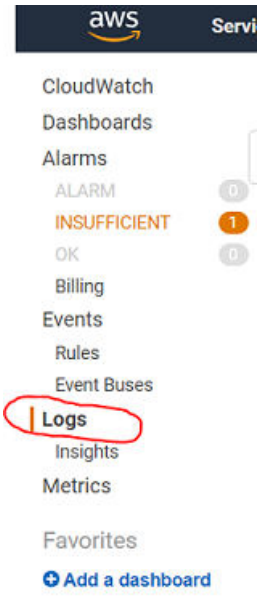

3. Scroll to find the Enterprise Data Catalog log group as shown in the following image:



4. Click the log group. The list of logs appears as shown in the following image:



5. Click each log to see the details for any failures.

FAQ

Q. I encountered a CREATE_FAILED error when I launched the deployment. What should I do?

A. If AWS CloudFormation fails to create the stack, we recommend that you relaunch the template with **Rollback on failure** set to **No**. (This setting is under **Advanced** in the AWS CloudFormation console, **Options** page.) With this setting, the stack's state will be retained, and the instance will be left running, so you can troubleshoot the issue. (You will want to look at the log files in `/var/log/cfn-init-cmd.log`)

Note: When you set **Rollback on failure** to **No**, you will continue to incur AWS charges for this stack. Please make sure to delete the stack when you have finished troubleshooting.

For additional information, see Troubleshooting AWS CloudFormation on the AWS website or contact us on the AWS Discussion Forum.

Q. I encountered errors while installing the Informatica domain and services. Where can I find more information?

A. View the `/home/Infa_OnceClick_Solution.log` log file to see more information about the errors that you encountered.

Q. I encountered a size limitation error when I deployed the AWS CloudFormation templates.

A. We recommend that you launch the deployment templates from the location we've provided or from another S3 bucket. If you deploy the templates from a local copy on your computer or from a non-S3 location, you might encounter template size limitations when you create the stack. For more information about AWS CloudFormation limits, see the AWS documentation.

Q. What should I do before I relaunch the template with **Rollback on failure**?

A. Ensure that you disable rollback when you launch the stack in case of a stack failure. If Informatica Enterprise Data Catalog server stack is created, check the following logs to identify the issues:

- /home/Infa_OnceClick_Solution.log
- /var/log/cfn-init.log
- /home/Informatica/Server/logs/InfaNode/services/InfaHadoopService/Informatica_Hadoop_Service/IHS.log
- /home/Informatica/Server/logs/InfaNode/services/CatalogService/Catalog_ Service/LDM.log

If the Informatica Enterprise Data Catalog server stack is not created, you can check the CloudWatch logs to identify the issues. For more information, see the Verifying Lambda CloudWatch Logs for Failures section.

Q. I am facing MRS database connectivity issues with the following error messages:


```
MRS_50015 "The Repository Service operation failed. ['[PRSVCSHARED_01707] Connection issues with the configured database. Request failed with the error message [[PERSISTENCEAPI_0307] [DBPERSISTER_1005] Failed to process requested operation. This was caused by [informatica] [Oracle JDBC Driver]No more data available to read.].']"
```

```
MRS_50015 "The Repository Service operation failed. ['[PRSVCSHARED_01707] Connection issues with the configured database. Request failed with the error message [[PERSISTENCEAPI_0307] [PERSISTENCECOMMON_0001] Internal error. The request processing failed. This was caused by [informatica][Oracle JDBC Driver]Exception generated during deferred local transaction handling.  See next exception via SQLException.getNextException for details.].']"
```

A. Perform the following steps to resolve the MRS database connectivity issue:

1. Launch the AWS RDS page.
2. Select the RDS instance.
3. Click the **Configuration** tab.
4. Scroll down the tab page and click the link under the **Parameter group** section.
5. Search for the following parameters in the list of parameters that appear:
   - sqlnetora.sqlnet.send_timeout
   - sqlnetora.sqlnet.recv_timeout
   - sqlnetora.sqlnet.inbound_connect_timeout
   - sqlnetora.sqlnet.outbound_connect_timeout
   - sqlnetora.tcp.connect_timeout

   Note: If the listed parameters are not present in the list, make sure that add the parameters to the list.
6. Change the value of each of the parameters listed in the previous step to 0 as shown in the following sample image:

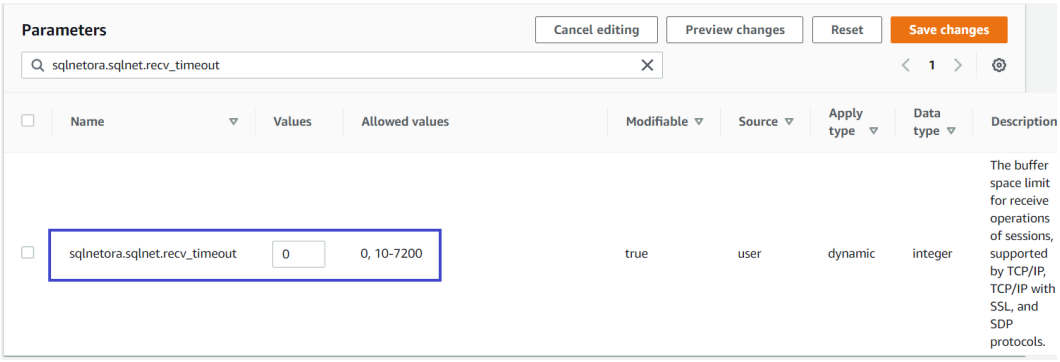

7. Click **Save changes**.

Additional Resources

AWS services

- AWS CloudFormation
- Amazon EBS
- Amazon EC2
- Amazon VPC

Enterprise Data Catalog overview

- Product overview tutorial

Reference deployments

- AWS Deployment home page

Send Us Feedback

We welcome your questions and comments. Please post your feedback on the AWS Deployment Discussion Forum.

You can visit our GitHub repository to download the templates and scripts for this deployment, and to share your customizations with others.

Document Revisions

Date	Change	In sections
March 2017	Initial publication	-
July 2019	Updated for Enterprise Data Catalog 10.2.2	

Notices

This document is provided for informational purposes only. It represents AWS's current product offerings and practices as of the date of issue of this document, which are subject to change without notice. Customers are responsible for making their own independent assessment of the information in this document and any use of AWS's products or

services, each of which is provided "as is" without warranty of any kind, whether express or implied. This document does not create any warranties, representations, contractual commitments, conditions or assurances from AWS, its affiliates, suppliers or licensors. The responsibilities and liabilities of AWS to its customers are controlled by AWS agreements, and this document is not part of, nor does it modify, any agreement between AWS and its customers.

The software included with this paper is licensed under the Apache License, Version 2.0 (the "License"). You may not use this file except in compliance with the License. A copy of the License is located at http://aws.amazon.com/apache2.0/ or in the "license" file accompanying this file. This code is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Author

Suraj Jayan