Informatica® Axon Data Governance
7.3.8

REST API Guide

Informatica Axon Data Governance REST API Guide
7.3.8
September 2026

© Copyright Informatica LLC 2018, 2026

This software and documentation contain proprietary information of Informatica LLC and are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright law. Reverse engineering of the software is prohibited. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. This Software may be protected by U.S. and/or international Patents and other Patents Pending.

Use, duplication, or disclosure of the Software by the U.S. Government is subject to the restrictions set forth in the applicable software license agreement and as provided in DFARS 227.7202-1(a) and 227.7702-3(a) (1995), DFARS 252.227-7013©(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

The information in this product or documentation is subject to change without notice. If you find any problems in this product or documentation, please report them to us in writing.

Portions of this software and/or documentation are subject to copyright held by third parties, including without limitation: Copyright DataDirect Technologies. All rights reserved. Copyright © Sun Microsystems. All rights reserved. Copyright © RSA Security Inc. All Rights Reserved. Copyright © Ordinal Technology Corp. All rights reserved. Copyright © Aandacht c.v. All rights reserved. Copyright Genivia, Inc. All rights reserved. Copyright Isomorphic Software. All rights reserved. Copyright © Meta Integration Technology, Inc. All rights reserved. Copyright © Intalio. All rights reserved. Copyright © Oracle. All rights reserved. Copyright © Adobe Systems Incorporated. All rights reserved. Copyright © DataArt, Inc. All rights reserved. Copyright © ComponentSource. All rights reserved. Copyright © Microsoft Corporation. All rights reserved. Copyright © Rogue Wave Software, Inc. All rights reserved. Copyright © Teradata Corporation. All rights reserved. Copyright © Yahoo! Inc. All rights reserved. Copyright © Glyph & Cog, LLC. All rights reserved. Copyright © Thinkmap, Inc. All rights reserved. Copyright © Clearpace Software Limited. All rights reserved. Copyright © Information Builders, Inc. All rights reserved. Copyright © OSS Nokalva, Inc. All rights reserved. Copyright Edifecs, Inc. All rights reserved. Copyright Cleo Communications, Inc. All rights reserved. Copyright © International Organization for Standardization 1986. All rights reserved. Copyright © ej-technologies GmbH. All rights reserved. Copyright © Jaspersoft Corporation. All rights reserved. Copyright © International Business Machines Corporation. All rights reserved. Copyright © yWorks GmbH. All rights reserved. Copyright © Lucent Technologies. All rights reserved. Copyright © University of Toronto. All rights reserved. Copyright © Daniel Veillard. All rights reserved. Copyright © Unicode, Inc. Copyright IBM Corp. All rights reserved. Copyright © MicroQuill Software Publishing, Inc. All rights reserved. Copyright © PassMark Software Pty Ltd. All rights reserved. Copyright © LogiXML, Inc. All rights reserved. Copyright © 2003-2010 Lorenzi Davide, All rights reserved. Copyright © Red Hat, Inc. All rights reserved. Copyright © The Board of Trustees of the Leland Stanford Junior University. All rights reserved. Copyright © EMC Corporation. All rights reserved. Copyright © Flexera Software. All rights reserved. Copyright © Jinfonet Software. All rights reserved. Copyright © Apple Inc. All rights reserved. Copyright © Telerik Inc. All rights reserved. Copyright © BEA Systems. All rights reserved. Copyright © PDFlib GmbH. All rights reserved. Copyright © Orientation in Objects GmbH. All rights reserved. Copyright © Tanuki Software, Ltd. All rights reserved. Copyright © Ricebridge. All rights reserved. Copyright © Sencha, Inc. All rights reserved. Copyright © Scalable Systems, Inc. All rights reserved. Copyright © jQWidgets. All rights reserved. Copyright © Tableau Software, Inc. All rights reserved. Copyright© MaxMind, Inc. All Rights Reserved. Copyright © TMate Software s.r.o. All rights reserved. Copyright © MapR Technologies Inc. All rights reserved. Copyright © Amazon Corporate LLC. All rights reserved. Copyright © Highsoft. All rights reserved. Copyright © Python Software Foundation. All rights reserved. Copyright © BeOpen.com. All rights reserved. Copyright © CNRI. All rights reserved.

This product includes software developed by the Apache Software Foundation (http://www.apache.org/), and/or other software which is licensed under various versions of the Apache License (the "License"). You may obtain a copy of these Licenses at http://www.apache.org/licenses/. Unless required by applicable law or agreed to in writing, software distributed under these Licenses is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the Licenses for the specific language governing permissions and limitations under the Licenses.

This product includes software which was developed by Mozilla (http://www.mozilla.org/), software copyright The JBoss Group, LLC, all rights reserved; software copyright © 1999-2006 by Bruno Lowagie and Paulo Soares and other software which is licensed under various versions of the GNU Lesser General Public License Agreement, which may be found at http:// www.gnu.org/licenses/lgpl.html. The materials are provided free of charge by Informatica, "as-is", without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.

The product includes ACE(TM) and TAO(TM) software copyrighted by Douglas C. Schmidt and his research group at Washington University, University of California, Irvine, and Vanderbilt University, Copyright (©) 1993-2006, all rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (copyright The OpenSSL Project. All Rights Reserved) and redistribution of this software is subject to terms available at http://www.openssl.org and http://www.openssl.org/source/license.html.

This product includes Curl software which is Copyright 1996-2013, Daniel Stenberg, <daniel@haxx.se>. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://curl.haxx.se/docs/copyright.html. Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

The product includes software copyright 2001-2005 (©) MetaStuff, Ltd. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://www.dom4j.org/ license.html.

The product includes software copyright © 2004-2007, The Dojo Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http://dojotoolkit.org/license.

This product includes ICU software which is copyright International Business Machines Corporation and others. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://source.icu-project.org/repos/icu/icu/trunk/license.html.

This product includes software copyright © 1996-2006 Per Bothner. All rights reserved. Your right to use such materials is set forth in the license which may be found at http:// www.gnu.org/software/ kawa/Software-License.html.

This product includes OSSP UUID software which is Copyright © 2002 Ralf S. Engelschall, Copyright © 2002 The OSSP Project Copyright © 2002 Cable & Wireless Deutschland. Permissions and limitations regarding this software are subject to terms available at http://www.opensource.org/licenses/mit-license.php.

This product includes software developed by Boost (http://www.boost.org/) or under the Boost software license. Permissions and limitations regarding this software are subject to terms available at http:/ /www.boost.org/LICENSE_1_0.txt.

This product includes software copyright © 1997-2007 University of Cambridge. Permissions and limitations regarding this software are subject to terms available at http:// www.pcre.org/license.txt.

This product includes software copyright © 2007 The Eclipse Foundation. All Rights Reserved. Permissions and limitations regarding this software are subject to terms available at http:// www.eclipse.org/org/documents/epl-v10.php and at http://www.eclipse.org/org/documents/edl-v10.php.

This product includes software licensed under the terms at http://www.tcl.tk/software/tcltk/license.html, http://www.bosrup.com/web/overlib/?License, http:// www.stlport.org/doc/ license.html, http://asm.ow2.org/license.html, http://www.cryptix.org/LICENSE.TXT, http://hsqldb.org/web/hsqlLicense.html, http:// httpunit.sourceforge.net/doc/ license.html, http://jung.sourceforge.net/license.txt , http://www.gzip.org/zlib/zlib_license.html, http://www.openldap.org/software/ release/license.html, http://www.libssh2.org, http://slf4j.org/license.html, http://www.sente.ch/software/OpenSourceLicense.html, http://fusesource.com/downloads/ license-agreements/fuse-message-broker-v-5-3- license-agreement; http://antlr.org/license.html; http://aopalliance.sourceforge.net/; http://www.bouncycastle.org/ licence.html; http://www.jgraph.com/jgraphdownload.html; http://www.jcraft.com/jsch/LICENSE.txt; http://jotm.objectweb.org/bsd_license.html; . http://www.w3.org/

Consortium/Legal/2002/copyright-software-20021231; http://www.slf4j.org/license.html; http://nanoxml.sourceforge.net/orig/copyright.html; http://www.json.org/license.html; http://forge.ow2.org/projects/javaservice/, http://www.postgresql.org/about/licence.html, http://www.sqlite.org/copyright.html, http://www.tcl.tk/software/tcltk/license.html, http://www.jaxen.org/faq.html, http://www.jdom.org/docs/faq.html, http://www.slf4j.org/license.html; http://www.iodbc.org/dataspace/iodbc/wiki/iODBC/License; http://www.keplerproject.org/md5/license.html; http://www.toedter.com/en/jcalendar/license.html; http://www.edankert.com/bounce/index.html; http://www.net-snmp.org/about/license.html; http://www.openmdx.org/#FAQ; http://www.php.net/license/3_01.txt; http://srp.stanford.edu/license.txt; http://www.schneier.com/blowfish.html; http://www.jmock.org/license.html; http://xsom.java.net; http://benalman.com/about/license/; https://github.com/CreateJS/EaselJS/blob/master/src/easeljs/display/Bitmap.js; http://www.h2database.com/html/license.html#summary; http://jsoncpp.sourceforge.net/LICENSE; http://jdbc.postgresql.org/license.html; http://protobuf.googlecode.com/svn/trunk/src/google/protobuf/descriptor.proto; https://github.com/rantav/hector/blob/master/LICENSE; http://web.mit.edu/Kerberos/krb5-current/doc/mitK5license.html; http://jibx.sourceforge.net/jibx-license.html; https://github.com/lyokato/libgeohash/blob/master/LICENSE; https://github.com/hjiang/jsonxx/blob/master/LICENSE; https://code.google.com/p/lz4/; https://github.com/jedisct1/libsodium/blob/master/LICENSE; http://one-jar.sourceforge.net/index.php?page=documents&file=license; https://github.com/EsotericSoftware/kryo/blob/master/license.txt; http://www.scala-lang.org/license.html; https://github.com/tinkerpop/blueprints/blob/master/LICENSE.txt; http://gee.cs.oswego.edu/dl/classes/EDU/oswego/cs/dl/util/concurrent/intro.html; https://aws.amazon.com/asl/; https://github.com/twbs/bootstrap/blob/master/LICENSE; https://sourceforge.net/p/xmlunit/code/HEAD/tree/trunk/LICENSE.txt; https://github.com/documentcloud/underscore-contrib/blob/master/LICENSE, and https://github.com/apache/hbase/blob/master/LICENSE.txt.

This product includes software licensed under the Academic Free License (http://www.opensource.org/licenses/afl-3.0.php), the Common Development and Distribution License (http://www.opensource.org/licenses/cddl1.php) the Common Public License (http://www.opensource.org/licenses/cpl1.0.php), the Sun Binary Code License Agreement Supplemental License Terms, the BSD License (http:// www.opensource.org/licenses/bsd-license.php), the new BSD License (http://opensource.org/licenses/BSD-3-Clause), the MIT License (http://www.opensource.org/licenses/mit-license.php), the Artistic License (http://www.opensource.org/licenses/artistic-license-1.0) and the Initial Developer's Public License Version 1.0 (http://www.firebirdsql.org/en/initial-developer-s-public-license-version-1-0/).

This product includes software copyright © 2003-2006 Joe Walnes, 2006-2007 XStream Committers. All rights reserved. Permissions and limitations regarding this software are subject to terms available at http://xstream.codehaus.org/license.html. This product includes software developed by the Indiana University Extreme! Lab. For further information please visit http://www.extreme.indiana.edu/.

This product includes software Copyright (c) 2013 Frank Balluffi and Markus Moeller. All rights reserved. Permissions and limitations regarding this software are subject to terms of the MIT license.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

Publication Date: 2026-09-22

Table of Contents

Preface 8

Informatica Resources 8

- Informatica Network 8
- Informatica Knowledge Base 8
- Informatica Documentation 8
- Informatica Product Availability Matrices 9
- Informatica Marketplace 9
- Informatica Global Customer Support 9

Chapter 1: Introduction 10

Call Properties 10

Request Body and Response Body 10

Authentication 11

- Access Tokens 11
- Refresh Tokens 12
- Generate Refresh Token from Axon 12
- Generate Access Token Using the Refresh Token 13
- Generate Access Token and Refresh Token from the API Client 13

Chapter 2: Retrieve Object Details 16

Retrieve Primary Objects and Their Related Objects 16

- Endpoint and Method 17
- Syntax 17
- Filter Values in the Query Body 26
- Response 28
- Example 30
- List of Facet Values 41
- List of Relationship Type Values 43

Retrieve Object History 45

Retrieve Object Locks 48

Chapter 3: Manage Objects, Roles, and Relationships 50

Manage a Single Object, a Single Relationship or a Single Role 50

- Endpoint and Method 51
- Syntax 52
- Response 53
- Example: Create a System Object 54
- Example: Update a System Object 55
- Example: Delete a System Object 56
- Example: Create a Policy X System Relationship 57

Example: Delete a Policy X System Relationship. . . . 57
Example: Create a Role for a System Object. . . . 58
Example: Delete a Role for a System Object. . . . 59
Create, Update, or Delete Multiple Objects. . . . 59
Endpoint and Method. . . . 60
Syntax. . . . 60
Track Upload Status. . . . 61
Example: Create 2 Policy Objects. . . . 62
Example: Update 2 Policy Objects. . . . 64
Example: Delete 2 Policy Objects. . . . 67
Create or Delete Multiple Roles and Relationships. . . . 67
Endpoint and Method. . . . 67
Syntax. . . . 68
Track Upload Status. . . . 69
Example: Create 2 Policy X System Relationships. . . . 69
Example: Delete 2 Policy X System Relationships. . . . 71
Example: Create Two Roles for two System Objects. . . . 72
Example: Delete two roles for System Objects. . . . 73
Upload a Template File. . . . 74
Step 1: Download Template File. . . . 75
Step 2: Enter Values in Template File. . . . 75
Step 3: Upload File to Axon. . . . 76
Step 4: Map File Fields to Axon Fields. . . . 82
Track Bulk Upload Status. . . . 87
Example. . . . 88
Download Error Report. . . . 89
Example. . . . 89
List of Facet Values. . . . 90
List of Role Type Values. . . . 91
List of Relationship Type Values. . . . 92

Chapter 4: Manage Change Requests. . . . 95

Create a Change Request. . . . 95
Retrieve Change Requests. . . . 97
Start Change Requests. . . . 99
Update Change Requests. . . . 100
Complete Change Requests. . . . 102
Cancel Change Requests. . . . 102

Chapter 5: Manage Value Lists. . . . 104

Create Value Lists. . . . 104
Example. . . . 105
Update Value Lists. . . . 105

Example. . . . 106
Retrieve Value Lists. . . . 107
Example. . . . 107
Delete Value Lists. . . . 108
Example. . . . 108

Chapter 6: Data Marketplace APIs. . . . 110

Retrieve Data Collections by Dataset ID. . . . 110
Retrieve Datasets Associated With a Data Collection. . . . 114
Retrieve Delivery Target Details. . . . 117
Manage Orders. . . . 117
Retrieve Order Details by ID. . . . 117
Update Order Status. . . . 118
Retrieve Orders. . . . 118
Create an Order. . . . 119
Create an Order as Another User. . . . 120
Fulfill an Order. . . . 122
Add Comments to an Order. . . . 122
Retrieve Custom Fields of Orders. . . . 123
Manage Consumer Accesses. . . . 124
Retrieve Consumer Access by ID. . . . 124
Update Status of Consumer Access. . . . 124
Retrieve Consumer Access by Order ID. . . . 125
Retrieve Consumer Access Details. . . . 125
Add Comments to Consumer Access. . . . 127
Examples of Data Marketplace API Usage. . . . 127
Search for Data Collections. . . . 127
Create Data Collections. . . . 131
Get Job Status of Creating a Data Collection. . . . 133
Update Data Collections. . . . 134
Get Job Status of Updating a Data Collection. . . . 135

Chapter 7: Other APIs in Axon. . . . 137

Retrieve Links Between Axon and External Applications. . . . 137
Endpoint, Method and Syntax. . . . 138
Example 1. Retrieve Linked Resources. . . . 140
Example 2. Retrieve Linked Attributes. . . . 141
Retrieve Data Quality Rules. . . . 143
Example. . . . 144
Retrieve Data Quality Report. . . . 145
Example 146
Add Data Quality Scores. . . . 149
Update Data Quality Scores. . . . 150

Delete Data Quality Reports. 152
Retrieve Segment Names for Segment IDs. 152
Example. 153
Retrieve Documents. 154
Example. 154

Index. 156

Preface

Refer to the *REST API Guide* to update or retrieve Axon objects using the REST APIs that Informatica provides.

This guide is written for developers and administrators who are responsible for implementing Informatica Axon Data Governance. This guide assumes that you have a basic knowledge of how to use Axon. It also assumes that you understand JSON and API programming techniques.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:
https://www.informatica.com/services-and-training/customer-success-services/contact-us.html.

To find online support resources on the Informatica Network, visit https://network.informatica.com and select the eSupport option.

CHAPTER 1

Introduction

You can make REST API calls to Axon using a REST client, the cURL tool, or a suitable programming interface. Using these REST calls, you can retrieve Axon objects and display them in the REST client. You can then send the objects to another application and reuse them for other purposes. You can also use these REST calls to create or update Axon objects.

Call Properties

Use the Axon APIs to make REST calls to Axon. When you make a REST call, you specify the Base URL of the REST API to which you want to make calls.

Provide the following categories of properties when you make a REST call:

- Endpoint properties: Enter the Base URL and the API call endpoint.
- Form properties: Enter the request and input parameters for the API call.
- Header properties: Enter the header request and header input parameters.
- Authentication properties: Configure the authentication type and authentication properties for secure communication between the REST client and Axon.

Request Body and Response Body

When you make the API call in the REST client, the request is sent in JSON format. Depending on the request, the REST client receives a response in JSON format that contains the information for the request that was sent.

Request Body

When you make the API call, enter the following parameters in the JSON request body:

- Endpoint: Enter the Base URL and the API endpoint to access the API.
- Method: Enter the method to make the API call.
- Input parameters: Specify the primary Axon objects for the API call.

  Note: To specify parameters that correspond to field names in the Axon user interface, enter the field name exactly as it appears in the corresponding bulk upload template file. For example, the bulk upload

template for Policy objects contains the **Parent Name** column header to specify parent objects. In the API request body, enter `Parent Name` to refer to this parameter.

- Additional input parameters: Specify additional fields, ports, or services in Axon for the API call.
- Output parameters: Specify the format to display the output of the API request.

Response Body

The REST API sends a response header and response body in JSON format with information about the success or failure of the REST API call.

Response Codes

If the REST API call is successful, the API might return the following codes in the response body:

- 200: Returns data.
- 201: Request is created successfully.
- 202: Request is accepted.
- 204: No content to send back.

If the REST API call fails, the API might return the following codes in the response body:

- 400: Bad request.
- 401: Incorrect authorization.
- 403: Forbidden request.
- 404: Resource not found.
- 405: Method not allowed.
- 500: Internal server error.

Authentication

Before you make REST API calls, you must authenticate yourself in Axon and get an access token. Use access tokens to make secure API calls without having to authenticate yourself for each call. To get an access token, you can either use your Axon login credentials or a refresh token.

Access Tokens

An access token authenticates and authorizes you to access the objects in Axon. Use an access token to authenticate yourself and send a payload when you make API calls to Axon.

You can generate an access token using the following methods:

- From an existing refresh token. See "Generate Access Token Using the Refresh Token" on page 13.
- From the API client. See "Generate Access Token and Refresh Token from the API Client" on page 13.

Access Token Timeout Period

An access token has a specific timeout period that is defined by the Axon administrator. During this period, you can make multiple API calls using the access token without having to authenticate yourself for each call. When the access token expires, you can generate a new access token.

For example, if you generate an access token on June 01 with a timeout period of 7 days, the token will expire on June 07. After the token expires, you can generate a new access token on June 08. The new token will expire on June 14.

To configure the timeout period of the access token, see the *Configure Timeout Period for API Tokens* topic in the *Axon Data Governance 7.3.6 Administrator Guide*.

Refresh Tokens

A refresh token authenticates you in Axon similar to your Axon login credentials. Use a refresh token to generate an access token.

You can generate a refresh token using the following methods:

- From the Axon interface. See "Generate Refresh Token from Axon" on page 12.
- From the API client. See "Generate Access Token and Refresh Token from the API Client" on page 13.

Refresh Token Timeout Period

The timeout period of a refresh token is typically longer than the timeout period of an access token. Within the timeout period of a refresh token, you can use the refresh token to generate multiple access tokens. When an access token expires, use the refresh token to generate a new access token.

Each time you use the refresh token to generate an access token, the timeout period of the refresh token restarts from the usage date. For example, if you generate a token on June 01 with a timeout period of 60 days, the token will expire on July 30. If you use the token on June 03, the timeout period restarts, and the token will expire on August 02.

To configure the timeout period of the refresh token, see the *Configure Timeout Period for API Tokens* topic in the *Axon Data Governance 7.3.6 Administrator Guide*.

As a security measure, we recommend that you regularly use the refresh token to generate access tokens whenever the access tokens expire. If you follow the recommendation, you can keep the refresh token continuously alive and use new access tokens regularly to authenticate yourself in the REST API client.

Generate Refresh Token from Axon

Generate a refresh token from the Axon interface after you log in to Axon.

You can use the familiar Axon interface to generate a refresh token if you do not want to enter your login credentials in the API client interface. In this situation, log in to Axon to generate a refresh token. Use the refresh token in the API client to generate an access token without entering your login credentials again. You can now use the access token to make API calls.

Perform the following steps to generate a refresh token for your account:

1. Log in to Axon, and click the **My Account** menu item under your user name.
2. Go to the **Activity Stream** tab, and select the **My API Tokens** sub-tab.
   The page displays your refresh tokens.
3. To generate a new refresh token, click the **Actions** menu, and select **Generate New**.
4. Click the copy icon next to a to valid token to copy the token to the clipboard.

To delete tokens, select the tokens and click **Delete Selected** under the **Actions** menu. You can also click **Delete Expired** under the **Actions** menu to delete all the expired tokens.

Generate Access Token Using the Refresh Token

If you have a refresh token, use the refresh token to generate an access token. Use the access token to authenticate yourself when you send a payload to make API calls to Axon.


Enter the following parameters in the REST API client to generate an access token using the refresh token:

Property	Value
URL	**http(s)://<Axon_host_name>:<Axon_port_number>/api/v1/token/refresh**
Method	POST
Input parameter `refresh_token`	The refresh token

After you enter the parameters and make the API call, you will receive the access token in the response body:

Property	Value
`refresh_token`	The existing refresh token
`token`	The access token

The following image shows a sample access token generated from a refresh token:

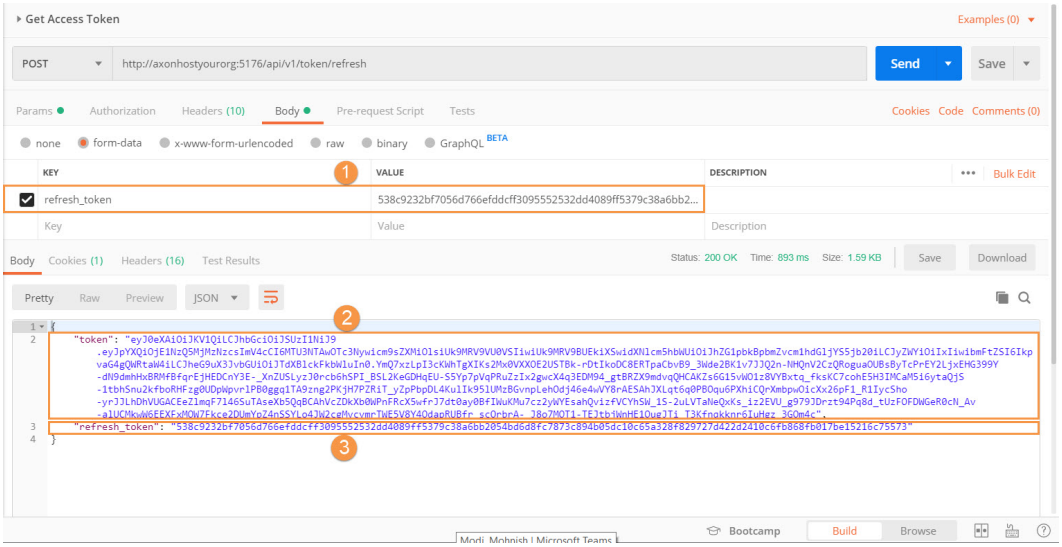

1. The refresh token that you enter
2. Your access token that is generated from the refresh token
3. Your existing refresh token

Generate Access Token and Refresh Token from the API Client

You can generate an access token and a refresh token from the REST API client by entering your user name and password. You can use any of the following authentication methods to generate an access token and refresh token:

- Basic Access Authentication

- Form-based Authentication

Basic Access Authentication

In basic access authentication, the header field of the authentication request sent by your web browser contains the username and password that you entered in the REST API client. Your Axon credentials or LDAP credentials are encoded with Base64 type encryption in transit.
Note: This is the recommended method of authentication.

Enter the following parameters in the REST API client to connect to the Axon host and receive the access and refresh tokens:

Property	Value
URL	**http(s)://<Axon_host_name>:<Axon_port_number>/api/login_check_basic**
Method	GET

After you enter the parameters and make the API call, you will receive the access token and refresh token in the response body:

Property	Value
`token`	The access token
`refresh_token`	The refresh token

Form Based Authentication

In form-based authentication, you enter your Axon credentials or LDAP credentials in the API call body.

You can use the API client to generate the tokens if you want to quickly make API calls without logging in to Axon at all. As a security measure, however, we recommend that you use the Axon interface to generate a refresh token, and use the refresh token in the API client to generate an access token. For more information, see "Generate Refresh Token from Axon" on page 12 and "Generate Access Token Using the Refresh Token" on page 13.

Enter the following parameters in the REST API client to connect to the Axon host and receive the access and refresh tokens:

Property	Value
URL	**http(s)://<Axon_host_name>:<Axon_port_number>/api/login_check**
Method	POST
Input parameter `username`	Required. Your Axon or LDAP login user name

Property	Value
Input parameter `password`	Required. Your Axon or LDAP login password
Input parameter `refresh_token`	Optional. Your existing refresh token. If you enter the refresh token here, Axon uses the refresh token to generate an access token. If you do not enter the refresh token, Axon generates a new refresh token and access token.

After you enter the parameters and make the API call, you will receive the access token and refresh token in the response body:

Property	Value
`token`	The access token
`refresh_token`	The refresh token

CHAPTER 2

Retrieve Object Details

This chapter includes the following topics:

- Retrieve Primary Objects and Their Related Objects, 16
- Retrieve Object History, 45
- Retrieve Object Locks, 48

Retrieve Primary Objects and Their Related Objects

You can use a REST API client to retrieve Axon objects and their related objects. You can also search and retrieve objects that have specific values within the fields.

Example Usage

The following list provides some examples of the type of Axon objects you can search and retrieve using the API:

- Retrieve the Process object called “Know Your Customer”.
- Retrieve the “Know Your Customer” Process object for the "Finance" System for the "Sweden" Geography.
- Retrieve all Process objects that contain the word "Customer" in the **Name** field.
- Retrieve all Process objects that contain either the word "Customer" in the **Name** field or "Active" in the **Axon Status** field.
- Retrieve all Policy objects that belong to the "Human Resources" segment.
- Retrieve all Glossary and Product objects that are related to the "Know Your Customer" Process objects.
- Retrieve all Glossary objects that are related to each other by the “Is Identified By” relationship, and retrieve their child objects

You might want to retrieve Process objects using the API in the following situations:

- You want to extract Process objects and its related objects to prepare a compliance report.
- You want to create a catalog of the various processes used in your organization.
- You want to extract objects from Axon and then send them to a third-party application.

Note: If you use this API programmatically to send multiple requests, the operation might consume extensive CPU resources and slow down your system.

- For optimal performance, we recommend that you send a maximum of 280 requests per minute. Additionally, use this API during a downtime period when very few users are using Axon.

- The API can serve up to 900 requests per minute. If you send more than 900 requests per minute, the API will rejects requests and returns a 429 HTTP status code.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/unison/v2/facet/_search**
Method	POST

Syntax

The following is a sample query for the API:

```
{
  "mainFacet": "GLOSSARY",
  "relationship": {
    "type": "direct",
    "applyFilters": true
  },
  "segmentNames": [
    "EMEA Ops",
    "EMEA Marketing"
  ],
  "searchGroups": [
    {
      "operator": "START",
      "active": true,
      "searches": [
        {
          "operator": "START",
          "active": true,
          "facetId": "GLOSSARY",
          "filterGroups": [
            {
              "operator": "START",
              "filters": [
                {
                  "operator": "START",
                  "type": "VALUE",
                  "properties": {
                    "field": "name",
                    "value": "CMD",

                  }
                }
              ]
            }
          ]
        }
      ],
      "searchContext": {
        "children": {
          "level": 99,
          "applyFilters": true
        },
        "relationship": {
          "type": "direct",
          "applyFilters": true
        }
      }
```

```
      }
    ],
    "searchScopes": {
      "mainFacet": {
        "facetId": "GLOSSARY",
        "fields": [
          "name",
          "description"
        ],
        "orderList": [
          {
            "field": "Id",
            "type": "ASC"
          }
        ],
        "properties": {
          "offset": "0",
          "limit": "500"
        }
      ],
      "relationships": [
        {
          "facetId": "PROCESS",
          "fields": [

          ],
          "orderList": [
            {
              "field": "Id",
              "type": "ASC"
            }
          ],
          "type": "ASC"
        }
      ],
      "properties": {
        "offset": "0",
        "limit": "500"
      },
      "filters": [
        {
          "operator": "START",
          "type": "VALUE",
          "properties": {
            "field": "name",
            "value": "Is Related to",

          }
        }
      ]
    },

  ]
  }
  }
```

The query has 3 sections:

1. The primary facet and segment for which you want to search and retrieve objects.
2. The search criteria that applies to the primary facet.
3. The search results that you want to display in the response.

Primary Facet and Segment

In the `mainFacet` parameter, enter the primary facet for which you want to retrieve Axon objects. This facet is the starting point for the query. You can enter only one facet in this parameter. The API query

searches for Axon objects within this facet, and retrieves related objects for this facet. This parameter is required.

In the `segmentNames` parameter, enter the segments for which you want to retrieve Axon objects. Enter commas to specify multiple segments. The API retrieves objects within the segments for which your user account has access. If you are a SuperAdmin user, the API retrieves objects from all segments. This parameter is optional.

In the `relationship` parameter, enter the type of relationship corresponding to the one you want to retrieve the related Axon objects.

Note: If `relationship` parameter is not mentioned in the request, the API returns both the direct and indirectly related objects with respect to the main facet.

The following table lists the important parameters that you can enter in the `relationship` parameter.

Parameter	Description
`relationship:`	Optional. Specify the conditions to apply for related objects. Within this section, you can enter the following parameters: - In the `type` parameter, specify the type of relationship corresponding to which you want to retrieve the related Axon objects. - In the `applyFilters` parameter, specify whether you want to apply the relationship filter or not.
`relationship: type`	Required. Specify the type of relationship corresponding to which you want to get the related axon objects. The values allowed in this parameter are as follows: - `direct`: To get the directly related objects of facets mentioned in the search scope with respect to the main facet. - `indirect`: To get the indirectly related objects of facets mentioned in the search scope with respect to the main facet. - `both`: To get all the related objects of facets mentioned in the search scope with respect to the main facet.
`relationship: applyFilters`	Required. Specify whether you want to apply the relationship filter or not. Supported parameter values are as follows: To apply the filter conditions, enter `true`. To ignore the filter conditions, enter `false`.

In this sample query, Glossary is the primary facet and EMEA Ops and EMEA Marketing are the segments.

Search Criteria

In the `searchGroups` category of the API query, enter the criteria to search for Axon objects. The `searchGroups` category is a collection of several search conditions. The API applies the search conditions to the facet that you have entered in the `mainFacet` parameter.

The following table lists the important parameters that you can enter in the `searchGroups` category.

Parameter	Description
`searchGroups`	Required. Enter values to create a search group. A search group is a collection of several search conditions. For each search group, you can enter the following parameters: - In the `operator` parameter, enter the logic for the combination of results that the API should query. - In the `active` parameter, specify whether you want to apply the condition. - In the `searches` parameter, enter the conditions of the API search. - In the `searchContext` parameter, enter the number of children levels to retrieve and specify their filter conditions.
`searchGroups : operator`	Optional. Enter the logic for the combination of results that the API should query. The values allowed in this parameter are as follows: - For the first instance of the query, enter `START`. - To retrieve search results that match several search conditions, enter `AND`. - To retrieve search results that match one of several search conditions, enter `OR`. - To retrieve search results that exclude a specific search conditions, enter `NOT`. If you do not enter a value, the API takes the `START` value.
`searchGroups : active`	Optional. Specify whether you want to apply the condition. - To apply the condition, enter `true`. - To ignore the condition, enter `false`.
`searchGroups : searches`	Required. Enter values to create a search condition. In each search condition, you specify a facet that is related to the main facet, and the values of the related facet that you want the API to query. You can create several search conditions. For each search condition, you can enter the following parameters: - In the `operator` parameter, enter the logic for the combination of results that the API should query. - In the `active` parameter, specify whether you want to apply the condition. - In the `facetId` parameter, enter the related facet. - In the `filterGroups` section, specify the filter groups that the API should query in the related facet.
`searchGroups : searches : operator`	Optional. Enter the logic for the combination of results that the API should query. The values allowed in this parameter are as follows: - For the first instance of the query, enter `START`. - To retrieve search results that match several related facets, enter `AND`. - To retrieve search results that match one of several related facets, enter `OR`. - To retrieve search results that exclude a specific related facet, enter `NOT`. If you do not enter a value, the API takes the `START` value.
`searchGroups : searches : active`	Optional. Specify whether you want to apply the condition. - Enter `true` to apply the condition. - Enter `false` to ignore the condition.
`searchGroups : searches : facetId`	Required. Enter the related facets that the API should search. In the preceding example, the `GLOSSARY` value indicates that you want to API to search for objects in the Glossary facets.

Parameter	Description
`searchGroups : searches : filterGroups`	Required. Enter values to create a filter group. A filter group is a collection of filter conditions that the API should apply to the related facet. For each filter group, you can enter the following parameters for each related object that you want to search: - In the `operator` parameter, enter the logic for the combination of filter groups that the API should query - In the `filters` section, enter the filter groups that the API should query.
`searchGroups : searches : filterGroups : operator`	Optional. Enter the logic for the combination of filter groups that the API should query. A filter group is a collection of several object fields of the related Axon objects. The values allowed in this parameter are as follows: - For the first instance of the filter groups, enter `START`. - To retrieve search results across several filter groups, enter `AND`. - To retrieve search results that match one of several filter groups, enter `OR`. - To retrieve search results that exclude a specific filter group, enter `NOT`. If you do not enter a value, the API takes the `START` value.
`searchGroups : searches : filterGroups : filters`	Required. Enter the conditions that the API should apply in the related facet. You can apply several filter conditions. Within this section, you can enter the following parameters for each related object that you want to search: - In the `operator` parameter, enter the logic for the combination of Axon fields that the API should query - In the `type` parameter, specify whether you want to search for the object by the object name or the object internal Axon value. - In the `properties` parameter, specify the field in the Axon database that corresponds to the field that you want to search for. To know the permissible values that you can enter in the parameters, see "Filter Values in the Query Body" on page 26.
`searchGroups : searches : filterGroups : filters : operator`	Optional. Enter the logic for the combination of Axon fields that the API should query. The values allowed in this parameter are as follows: - For the first instance of the Axon fields, enter `START`. - To retrieve search results across several fields, enter `AND`. - To retrieve search results that match one of several fields, enter `OR`. - To retrieve search results that exclude a specific field, enter `NOT`. If you do not enter a value, the API takes the `START` value.
`searchGroups : searches : filterGroups : filters : type`	Required. Specify the value type that you want Axon to search. The values allowed in this parameter are as follows: - Enter the `"VALUE"` value to search by the object value. - Enter the `"ID"` value to search by the object internal value. - Enter the `"OPTIONS"` value to search by the field in the Axon database. - Enter the `"USERS"` value to search by the email ID of the user associated with the object. The value you enter in this parameter will depend on the value that you enter in the `searchGroups : searches : filterGroups : filters : properties : field` parameter.

Parameter	Description
`searchGroups : searches : filterGroups : filters : properties`	Required. Specify the field in the Axon database that corresponds to the field that you want to search for. Within this section, you can enter the following parameters: - In the `field` parameter, specify the field in the Axon database that corresponds to the field that you want to search for. - In the `value` parameter, enter the object name or object internal value that you want to search.
`searchGroups : searches : filterGroups : filters : properties : field`	Required. Specify the field in the Axon database that corresponds to the field that you want to search for. The values allowed in this parameter are as follows: - Enter the "`name`" value to search by the name as applicable to the facet. - Enter the"`id`" value to search by the object internal value. - Enter the "`axonStatus`" value to search by the Axon Status option for the object. In the preceding example, the "`name`" value indicates that you want to API to search for Glossary objects by name.
`searchGroups : searches : filterGroups : filters : properties : value`	Required. Enter the object name or object internal value that you want to search. Leave this field blank to retrieve all objects. To search for objects that are relevant to the current logged in user, enter `@currentuser` as the input value. In the preceding example, the "`CMD`" value indicates that you want the API to search for Glossary objects that contain the word "CMD" in the Glossary name.
`searchGroups : searchContext`	Used for children or relationship value. - For Children value: Optional. Enter the number of children levels of the related objects that you want Axon to retrieve. Enter the "`children`" value in this parameter. Use this parameter for facets that are hierarchical, such as the Process and Glossary facets. - For Relationship value: Optional. Enter the type of relationship corresponding to which you want to get the main facet object. Enter the `relationship` value in this parameter.
`searchGroups : searchContext : children`	Required. Specify the conditions to apply for child objects. Within this section, you can enter the following parameters: - In the `level` parameter, specify the number of children levels that you want Axon to retrieve. - In the `applyFilters` parameter, specify whether you want to apply to the child objects the same filter conditions that you applied to the related objects.
`searchGroups : searchContext : children : level`	Required. Specify the number of children levels that you want Axon to retrieve. Enter a number to indicate the level. For example, enter `0` to retrieve no child objects, and enter `2` to retrieve related objects that are two levels deep. In the preceding example, the "`99`" value indicates that you want to API to retrieve objects of all children levels.
`searchGroups : searchContext : children : applyFilters`	Required. Specify whether you want to apply to the child objects the same filter conditions that you applied to the related objects. The values allowed in this parameter are as follows: - To apply the filter conditions, enter the "`true`" value. - To not apply the filter conditions, enter the "`false`" value.

Parameter	Description
searchGroups : searchContext : relationship	Optional. Specify the conditions to apply to get the main object. Within this section, you can enter the following parameters: - In the type parameter, specify the type of relationship corresponding to which you want to retrieve the main object. - In the applyFilters parameter, specify whether you want to apply the relationship filter or not.
searchGroups : searchContext : relationship : type	Required. Specify the type of relationship corresponding to which you want to get the main object. The values allowed in this parameter are as follows: - direct: To get the directly related object with respect to the facet ID mentioned in the searchGroups. - indirect: To get the indirectly related object with respect to the facet ID mentioned in the searchGroups. - both: To get all the related main object with respect to the facet ID mentioned in the searchGroups.
searchGroups : searchContext : relationship : applyFilters	Required. Specify whether you want to apply the relationship filter or not. The values allowed in this parameter are as follows: - To apply the condition, enter true. - To ignore the condition, enter false.

Search Results

In the searchScopes category of the API query, enter the search results that you want the query to retrieve and display. The searchScopes category is a collection of several filter conditions. The API filters the search results of the searchGroups category and displays the results in the API response.

The following table lists the important parameters that you can enter within the searchScopes parameter:

Parameter	Description
searchScopes	Optional. Enter the search results and the related objects that you want the query to retrieve and display. Within this section, you can enter the following parameters: - In the mainFacet parameter, enter the search results that you want the query to retrieve and display. - In the relationships parameter, enter the related objects that you want to retrieve and display.
searchScopes : mainFacet	Optional. Enter the fields for the primary object that you want the query to retrieve and display. Within this section, you can enter the following parameters: - In the facetId parameter, enter the related facets for which you want to retrieve and display objects. - In the fields parameter, enter the fields for the related objects that you want to retrieve and display. - In the orderList parameter, specify the order in which you want to display the related objects - In the properties parameter, specify the number of related objects that the API call retrieves.

Parameter	Description
`searchScopes : mainFacet : facetId`	Required. Enter the primary facet that you entered for the `mainFacet` parameter.
`searchScopes : mainFacet : fields`	Optional. Enter the fields for the primary objects that you want to retrieve and display. If you want to retrieve all fields for an object, enter the following: `([ ])`. **Note:** To retrieve change request and related object, enter CHANGE_REQUEST value in the `mainFacet` parameter and include the following three parameters in the API query: - objectType - objectId - objectName
`searchScopes : mainFacet : fields : objectType`	Required. Specify the type of object **Note:** Object type values in the response are "GLOSSARY","SYSTEM", and so on.
`searchScopes : mainFacet : fields : objectId`	Required. Enter the object that API should search.
`searchScopes : mainFacet : fields : objectName`	Required. Name of the object to which change request has been created.
`searchScopes : mainFacet : orderList`	Optional. Specify the order in which you want to display the fields for the primary objects. Within this section, you can enter the following parameters for each related object that you want to display: - In the `field` parameter, specify the field in the Axon database according to which you want to sort the related objects. - In the `type` parameter, specify the order of results displayed in the API response.
`searchScopes : mainFacet : orderList : field`	Required. Specify the field in the Axon database according to which you want to sort the primary objects. For example, to sort the objects by the `ID` field, enter the `"id"` value. The values allowed in this parameter are as follows: - To sort the display results by the object names, enter the `"name"` value. - To sort the display results by the object identifiers, enter the `"id"` value.
`searchScopes : mainFacet : orderList : type`	Required. Specify the order of results displayed in the API response. The values allowed in this parameter are as follows: - To display the related objects in ascending order, enter `ASC`. - To display the related objects in descending order, enter `DESC`.
`searchScopes : mainFacet : properties`	Optional. Specify the number of primary objects that the API call retrieves. Within this section, you can enter the following parameters for each primary object that you want to display: - In the `offset` parameter, enter the offset value for pagination. - In the `limit` parameter, enter the number of objects to retrieve and display.
`searchScopes : mainFacet : properties : offset`	Optional. Enter the offset value for pagination. In the preceding example, the `"0"` value indicates that you want to retrieve and display entries from the beginning

Parameter	Description
`searchScopes : mainFacet : properties : limit`	Optional. Enter the number of related objects to retrieve. In the preceding example, the `"10"` value indicates that you want to retrieve and display the first 10 objects.
`searchScopes : relationships`	Optional. Enter the related objects that you want to retrieve in the search results.
`searchScopes : relationships : facetId`	Required. Enter the related facets for which you want to retrieve and display objects. In the preceding example, the `"PROCESS"` value indicates that you want to display Process objects that are related to the main Glossary object.
`searchScopes : relationships : fields`	Optional. Enter the fields for the related objects that you want to retrieve and display. If you want to retrieve all fields for an object, enter the following: `([ ])`
`searchScopes : relationships : orderList`	Optional. Specify the order in which you want to display the related objects. Within this section, you can enter the following parameters for each related object that you want to display: - In the `field` parameter, specify the field in the Axon database according to which you want to sort the related objects. - In the `type` parameter, specify the order of results displayed in the API response.
`searchScopes : relationships : orderList : field`	Required. Specify the field in the Axon database according to which you want to sort the related objects. For example, to sort the objects by the `ID` field, enter the `"id"` value. The values allowed in this parameter are as follows: - To sort the display results by the object names, enter the `"name"` value. - To sort the display results by the object identifiers, enter the `"id"` value.
`searchScopes : relationships : orderList : type`	Required. Specify the order of results displayed in the API response. The values allowed in this parameter are as follows: - To display the related objects in ascending order, enter `ASC`. - To display the related objects in descending order, enter `DESC`.
`searchScopes : relationships : properties`	Optional. Specify the number of related objects that the API call retrieves. Within this section, you can enter the following parameters for each related object that you want to display: - In the `offset` parameter, enter the offset value for pagination. - In the `limit` parameter, enter the number of objects to retrieve and display.
`searchScopes : relationships : orderList : offset`	Optional. Enter the offset value for pagination. In the preceding example, the `"0"` value indicates that you want to retrieve and display entries from the beginning
`searchScopes : relationships : orderList : limit`	Optional. Enter the number of related objects to retrieve. In the preceding example, the `"10"` value indicates that you want to retrieve and display the first 10 objects.

Parameter	Description
`searchScopes : relationships : filters`	Required. Enter the relationship type that you want to apply to the search result. Within this section, you can enter the following parameters for each related object that you want to display: - In the `operator` parameter, enter the logic for the combination of results that the API should query. - In the `type` parameter, specify the filter criteria to apply to the search results. - In the `properties` parameter, enter the values for the filter criteria that you specified in the `type` parameter. To know the permissible values that you can enter in the parameters, see "Filter Values in the Query Body" on page 26.
`searchScopes : relationships : filters : operator`	Optional. Enter the logic for the combination of Axon fields that the API should query. The values allowed in this parameter are as follows: - For the first instance of the Axon fields, enter `START`. - To retrieve search results across several fields, enter `AND`. - To retrieve search results that match one of several fields, enter `OR`. - To retrieve search results that exclude a specific field, enter `NOT`. If you do not enter a value, the API takes the `START` value.
`searchScopes : relationships : filters : type`	Required. Enter the type of filter that you want to apply to the search results. In this section, enter the `RELATIONSHIP` value to filter the search results by the relationship of the objects to each other.
`searchScopes : relationships : filters : properties`	Required. Specify the field in the Axon database that corresponds to the field that you want to search for. Within this section, you can enter the following parameters: - In the `field` parameter, specify the field in the Axon database that corresponds to the field that you want to search for. - In the `value` parameter, enter the object name or object internal value that you want to search.
`searchScopes : relationships : filters : properties : field`	Required. Specify whether you want to filter the results by the filter name or the internal Axon value of the filter. The values allowed in this parameter are as follows: - To search by the filter name, enter the `"name"` value. - To search by the filter's internal value, enter the `"id"` value.
`searchScopes : relationships : filters : properties : value`	Required. Enter the name or internal value of the relationship type that you want to apply to the search results. Leave this field blank to retrieve objects for all relationships. **Note:** The filter name is not case-sensitive. In the preceding example, the `"Is Related To"` value indicates that you want to API to search for Glossary objects that are related to each other by the "Is Related To" relationship.

Filter Values in the Query Body

In the `searchGroups : filterGroups : filters` section, you can filter the search results for the primary object. In the `searchScopes : relationships : filters` section, you can filter the search results for the related object.

The following table shows the values that you can enter in the `filters` section to filter the search results by various Axon criteria:

To filter by	Enter for "type" parameter	Enter for "properties":"field" parameter	Enter for "properties":"value" parameter
Object internal value	`ID`	`ID`	Enter an internal value. For example, you can enter `2`.
Object name	`value`	`name`	Enter the object name. For example, you can enter `CMD` to search for objects that contain the term "CMD."
Data Quality measurement	`boolean`	`measured`	Enter `true` if the object is measured for data quality, and enter `false` if the object is not measured for data quality.
Children level	`level`	`level`	Enter the number of child levels that you want to display. For example, enter `0` to not retrieve children, enter `2` to retrieve child objects that are two levels deep, and enter `99` to retrieve all child objects.
Data Quality score	`dqtarget`	`level`	Enter the data quality score as represented by the threshold color. Enter `RED`, `AMBER`, or `GREEN`.
Axon Status value	`options`	`axonStatus`	Enter the database value that represents the **Axon Status** value. For example, if the "Draft" value is stored as 2 in the database, enter `2`.
Lifecycle value	`options`	`lifecycle`	Enter the database value that represents the **Lifecycle** value. For example, if the "In Production" value is stored as 1 in the database, enter `1`.
Created By value	`users`	`createdBy`	Enter the email ID of the user that represents the **Created By** value. For example, enter the email ID `admin@yourorganization.com` of the user that has created or updated the object. Enter the email IDs of the multiple users separated by commas.

The following guidelines apply to the properties in the API payload:

- When you use the API client to retrieve Axon objects and their related objects, make sure that you enter the facet in the URL for the API correctly. To see the list of facet values, refer to "List of Facet Values" on page 41.
- When you use the API client to retrieve Axon relationships, make sure that you enter the relationship type in the URL for the API correctly. To see the list of relationship type values, refer to "List of Relationship Type Values" on page 43.

Response

When you pass the API query parameters in a REST client, the client retrieves and displays Axon objects that match your search query.

The following table lists the important parameters in the output:

Parameter	Description
`mainObject`	Object that match the primary search criteria
`mainObject : facetID`	Primary facet for which information is retrieved
`mainObject : totalItems`	Total number of objects for the primary facet. If the administrator has enabled segmentation in the Axon Admin Panel, the parameter shows the total number of objects for the primary facet that your user account can access.
`mainObject : totalHits`	Number of objects that match your search criteria.
`mainObject : fields`	Field names for the Axon objects that are retrieved
`mainObject : items`	List of Axon objects that match your search criteria
`mainObject : items : ref`	Database ID of the object
`mainObject : items : id`	ID of the object as displayed in the Axon interface
`mainObject : items : values`	Object name and its corresponding fields. Each value in the `"values"` section corresponds to the field names that are listed in the `"fields"` section.
`mainObject : items : businessLogic`	Describes the relevant business logic for an attribute.
`mainObject : items : relationships`	List of Axon objects that are semantically related to the primary object
`mainObject : items : relationships : toFacet`	Facet for the related objects
`mainObject : items : relationships : relationships`	Relationship type of the related objects
`mainObject : items : relationships : relationships : id`	ID of the object as displayed in the Axon interface.
`mainObject : items : relationships : relationships : relTypeId`	ID of the relationship type
`mainObject : items : relationships : relationships : relTypeName`	Name of the relationship type

Parameter	Description
`mainObject : items : relationships : relationships : extra : sourcingLogic`	Captures any logic applied to the flow of data. For example, selections or transformations performed.
`relatedObjects`	Objects that are hierarchically related to the primary objects
`relatedObjects : facetID`	Related facet for which information is retrieved
`relatedObjects : totalItems`	Total number of objects for the related facet
`relatedObjects : totalHits`	Number of related objects that match your search criteria
`relatedObjects : fields`	Field names for the related objects that are retrieved
`relatedObjects : items`	List of related Axon objects that match your search criteria
`relatedObjects : items : ref`	Database ID of the object
`relatedObjects : items : id`	ID of the object as displayed in the Axon interface.
`relatedObjects : items : values`	Name of the related object and the corresponding fields. Each value in the "`values`" section corresponds to the field names that are listed in the "`fields`" section.

Note: The API query is passed in JSON format, and the API output is displayed in JSON format. Make a note of the following points in the output display:

- If the Axon objects contain Rich Text Format in the object fields, the API output displays HTML tags. For example, if you enter `Customer` **`Name`** in a glossary description field, the API output displays this description as `Customer <b>Name</b>`.
- If the Axon objects contain JSON control characters and JSON special characters in the object fields, the API output appends the JSON escape tag backslash (`\`) to the characters. For example, if you enter "`Customer name`" in a glossary description field, the API output displays this description as `\"Customer name\"`.
- A custom field of the date type is stored in the Axon database in Unix time. If you use the API to retrieve an object that contains a custom field of the date type, the response is displayed in Unix time. You can use a Unix time converter tool to display the result in a readable format.
- A custom field of the time type is appended with the Unix epoch of January 1, 1970 and stored in the Axon database. If you use the API to retrieve an object that contains a custom field of the time type, the response is displayed in Unix time. You can use a Unix time converter tool to display the result in a readable format.
- If you retrieve a data quality rule, the **Criticality** classification of the rule is displayed as a numeric value. Low criticality is displayed as `1`, medium criticality is displayed as `2`, and high criticality is displayed as `3`.
- If the administrator has enabled segmentation in the Axon Admin Panel, the output displays the segment ID in the `segments` parameter. Segment IDs are unique reference IDs for segments that are used internally by Axon. To see the corresponding names for the segment IDs, use the **http(s)://<Axon_host>:<port>/segment/v1/identity/segment** API. For more information, see "Retrieve Segment Names for Segment IDs" on page 152.

Example

Search and display Policy objects and the related System, Policy, and People objects that meet the following criteria:

- The Policy objects are related to Glossary objects that contain the word "Party." The Policy objects are also related to System objects that contain the word "KYC."
- The Policy objects belong to the "Retail Finance" segment.
- Additionally, display System objects that are related to the retrieved Policy objects. The System objects must be related to the Policy objects by the "Policy is regulating system" relationship type.
- Additionally, display all Policy objects that are related to the retrieved policy objects.
- Additionally, display all People objects that are related to the retrieved policy objects.

The following table shows the search criteria for the API and the parameters where you can specify the criteria:

Result Set	Criteria	Parameter

1	All policy objects in the "Retail Finance" segment that are related to Glossary objects that contain the word "Party" and System objects that contain the word "KYC."	Policy is the primary facet. Specify the primary facet in the `mainFacet` parameter.
		The Policy objects belong to the "Retail Finance" segment. Specify the segment in the `segmentNames` parameter.
		Specify the related Glossary and System criteria in the `searchGroups` parameter.
		Specify the fields and display format for this criteria in the following parameters:
		`- searchScopes : mainFacet : facetID`
		`- searchScopes : mainFacet : fields`
		`- searchScopes : mainFacet : orderList`
		`- searchScopes : mainFacet : properties`

2	System objects that are related to the retrieved Policy objects. The System objects must be related to the Policy objects by the "Policy is regulating system" relationship type.	Specify the System facet of the related objects in the `searchScopes : relationships : facetID` parameter.
		Specify the fields, display format, and relationship type for this criteria in the following parameters:
		`- searchScopes : relationships : fields`
		`- searchScopes : relationships : orderList`
		`- searchScopes : relationships : properties`
		`- searchScopes : relationships : filters`

Result Set	Criteria	Parameter

3	All Policy objects that are related to the retrieved Policy objects.	Specify the Policy facet of the related objects in the `searchScopes : relationships : facetID` parameter.
		Specify the fields and display format for this criteria in the following parameters:
		`- searchScopes : relationships : fields`
		`- searchScopes : relationships : orderList`
		`- searchScopes : relationships : properties`

4	All People objects that are related to the retrieved Policy objects.	Specify the People facet of the related objects in the `searchScopes : relationships : facetID` parameter.
		Specify the fields and display format for this criteria in the following parameters:
		`- searchScopes : relationships : fields`
		`- searchScopes : relationships : orderList`
		`- searchScopes : relationships : properties`

When you enter the search criteria in the API query, you can expect to see four sets of results.

Query Parameters

To retrieve the Axon objects that meet the above criteria, enter the following API parameters:

```
{
    "mainFacet": "POLICY",
    "segmentNames": ["RETAIL FINANCE"],
    "searchGroups": [
        {
            "operator": "START",
            "active": true,
            "searches": [
                {
                    "operator": "START",
                    "active": true,
                    "facetId": "GLOSSARY",
                    "filterGroups": [
                        {
                            "operator": "START",
                            "filters": [
                                {
                                    "operator": "START",
                                    "type": "VALUE",
                                    "properties": {
                                        "field": "name",
                                        "value": "Party"
                                    }
                                }
                            ]
                        }
                    ],
                    "searchContext": {
                        "children": {
                            "level": 99,
                            "applyFilters": true
                        }
                    }
                },
                {
                    "operator": "AND",
                    "active": true,
                    "facetId": "SYSTEM",
```

```
                "filterGroups": [
                    {
                        "operator": "START",
                        "filters": [
                            {
                                "operator": "START",
                                "type": "VALUE",
                                "properties": {
                                    "field": "name",
                                    "value": "KYC"
                                }
                            }
                        ]
                    }
                ],
                "searchContext": {
                    "children": {
                        "level": 99,
                        "applyFilters": true
                    }
                }
            }
        ]
    }
],
"searchScopes": {
    "mainFacet": {
        "facetId": "POLICY",
        "fields": [
            "id",
            "refNumber",
            "name",
            "parentId",
            "parentName"
        ],
        "orderList": [
            {
                "field": "id",
                "type": "ASC"
            }
        ],
        "properties": {
            "offset": "0",
            "limit": "500"
        }
    },
    "relationships": [
        {
            "facetId": "SYSTEM",
            "fields": [
                "id",
                "name",
                "description",
                "parentId",
                "parentName",
                "type",
                "axonStatus",
                "lifecycle"
            ],
            "orderList": [
                {
                    "field": "id",
                    "type": "ASC"
                }
            ],
            "properties": {
                "offset": "0",
                "limit": "500"
            },
            "filters": [
```

```
                {
                    "operator": "START",
                    "type": "RELATIONSHIP",
                    "properties": {
                        "field": "name",
                        "value": "Policy is regulating System"
                    }
                }
            ]
        },
        {
            "facetId": "POLICY",
            "fields": [
                "id",
                "refNumber",
                "name",
                "parentId",
                "parentName",
                "Chkbox20191121213042"
            ],
            "orderList": [
                {
                    "field": "id",
                    "type": "ASC"
                }
            ],
            "properties": {
                "offset": "0",
                "limit": "500"
            }
        },
        {
            "facetId": "PEOPLE",
            "fields": [
                "id",
                "fullName",
                "firstName",
                "lastName",
                "email",
                "function",
                "employeeType",
                "profileId",
                "profileName",
                "lastLogon",
                "lifecycle"
            ],
            "orderList": [
                {
                    "field": "id",
                    "type": "ASC"
                }
            ],
            "properties": {
                "offset": "0",
                "limit": "500"
            }
        }
    ]
  }
}
```

Primary Policy Facet

Specify the primary facet to create a search group. The important parameters are as follows:

Parameter	Description
`"mainFacet": "POLICY"`	This parameter indicates that you want to retrieve Policy objects.
`"segmentNames": ["RETAIL FINANCE"]`	This parameter indicates that you want to retrieve Policy objects that belong to the Retail Finance segment.
`searchGroups`	In this, the `"facetId": "GLOSSARY"` and `"facetId": "SYSTEM"` parameters indicate that you want to retrieve Glossary and System objects that are related to the primary facet Policy objects.
`"field": "name"`	In the filter criteria for Glossary objects, the `"field": "name"` and `"value": "Party"` parameters indicate that you want to retrieve Glossary objects that contain the word "Party" in the name. In the filter criteria for System objects, the `"field": "name"` and `"value": "KYC"` parameters indicate that you want to retrieve System objects that contain the word "KYC" in the name.
`searchContext`	In this parameter, the `"level": "99"` parameter indicates that you want to retrieve all child objects. The `"applyFilters": "true"` parameter indicates that you want to apply the filter criteria of the parent object to the child objects. For example, you want to retrieve child Glossary objects that contain the word "Party", and you want to retrieve child System objects that contain the word "KYC".

Primary Objects Criteria

Specify the criteria for the Policy objects that you want to retrieve and display. In the `searchScopes` section, the important parameters are as follows:

Parameter	Description
`"facetID": "POLICY"`	This parameter indicates that you want to retrieve Policy objects. Enter the value that you entered in the `mainFacet` parameter.
`fields`	Enter the Axon fields that you want to display for the Policy objects.
`orderList`	Specify the sort order for the results. The `"field": "id"` and `"type": "ASC"` parameters indicate that you want to sort the results by the ID value in ascending order.
`properties`	Specify the display options for the results. The `"offset": "0"` and `"limit": "500"` parameters indicate that you want to display search results from the beginning and you want to display 500 results at a time.

Related System Objects

Specify the criteria for the related System objects that you want to retrieve and display. The important parameters are as follows:

Parameter	Description
`"facetID": "SYSTEM"`	This parameter indicates that you want to retrieve System objects that are related to the Policy objects in the above criteria.
`fields`	Enter the Axon fields that you want to display for the System objects.
`orderList`	Specify the sort order for the results. The `"field": "id"` and `"type": "ASC"` parameters indicate that you want to sort the results by the ID value in ascending order.
`properties`	Specify the display options for the results. The `"offset": "0"` and `"limit": "500"` parameters indicate that you want to display search results from the beginning and you want to display 500 results at a time.
`filters`	Specify the relationship type for the related objects. The `"field": "name"` and `"value": "Policy is regulating System"` parameters indicate that you want to display System objects that are related to the Policy objects by the "Policy is regulating System" relationship type.

Related Policy Objects

Specify the criteria for the related Policy objects that you want to retrieve and display. The important parameters are as follows:

Parameter	Description
`"facetID": "POLICY"`	This parameter indicates that you want to retrieve Policy objects that are related to the Policy objects in the above criteria.
`fields`	Enter the Axon fields that you want to display for the Policy objects.
`orderList`	Specify the sort order for the results. The `"field": "id"` and `"type": "ASC"` parameters indicate that you want to sort the results by the ID value in ascending order.
`properties`	Specify the display options for the results. The `"offset": "0"` and `"limit": "500"` parameters indicate that you want to display search results from the beginning and you want to display 500 results at a time.

Related People Objects

Specify the criteria for the related People objects that you want to retrieve and display. The important parameters are as follows:

Parameter	Description
`"facetID": "PEOPLE"`	This parameter indicates that you want to retrieve People objects that are related to the Policy objects in the above criteria.
`fields`	Enter the Axon fields that you want to display for the People objects.
`orderList`	Specify the sort order for the results. The `"field": "id"` and `"type": "ASC"` parameters indicate that you want to sort the results by the ID value in ascending order.
`properties`	Specify the display options for the results. The `"offset": "0"` and `"limit": "500"` parameters indicate that you want to display search results from the beginning and you want to display 500 results at a time.

Response Parameters

When you pass the search query, the REST client might retrieve and display the following results:

```
{
    "mainObject": {
        "facetId": "POLICY",
        "totalItems": 271,
        "totalHits": 2,
        "fields": [
            "id",
            "refNumber",
            "name",
            "parentId",
            "parentName"
            "segments"
        ],
        "items": [
            {
                "ref": "#135:85",
                "id": "86",
                "values": [
                    "86",
                    "PolicyrefMN01_21-11-2019_01.02.00",
                    "Policy KYC",
                    "",
                    "",
                    "fa4cb173-3684-4803-98ac-97174ccbf3f5"
                ],
                "relationships": [
                    {
                        "toFacet": "SYSTEM",
                        "relationships": [
                            {
                                "id": "64",
                                "relTypeId": 1,
                                "relTypeName": "Policy is regulating System"
                            },
                            {
                                "id": "66",
                                "relTypeId": 1,
                                "relTypeName": "Policy is regulating System"
                            }
```

```
                    ]
                }
            ]
        },
        {
            "ref": "#135:23",
            "id": "24",
            "values": [
                "24",
                "GDPR-CDP",
                "Confidential Data Policy",
                "23",
                "Public Data Policy"
                "fa4cb173-3684-4803-98ac-97174ccbf3f5"
            ],
            "relationships": [
                {
                    "toFacet": "SYSTEM",
                    "relationships": [
                        {
                            "id": "65",
                            "relTypeId": 1,
                            "relTypeName": "Policy is regulating System"
                        }
                    ]
                },
                {
                    "toFacet": "POLICY",
                    "relationships": [
                        {
                            "id": "20",
                            "relTypeId": 1,
                            "relTypeName": "Is related to"
                        },
                        {
                            "id": "21",
                            "relTypeId": 1,
                            "relTypeName": "Is related to"
                        },
                        {
                            "id": "25",
                            "relTypeId": -1
                        }
                    ]
                },
                {
                    "toFacet": "PEOPLE",
                    "relationships": [
                        {
                            "id": "13"
                        }
                    ]
                }
            ]
        }
    ]
},
"relatedObjects": [
    {
        "facetId": "SYSTEM",
        "totalItems": 632,
        "totalHits": 3,
        "fields": [
            "id",
            "name",
            "description",
            "parentId",
            "parentName",
            "type",
            "axonStatus",
```

```
            "lifecycle"
        ],
        "items": [
            {
                "ref": "#16:63",
                "id": "64",
                "values": [
                    "64",
                    "FXM",
                    "Foreign Exchange Management",
                    "",
                    "",
                    "EUC-PowerPoint",
                    "Active",
                    "In Production"
                ]
            },
            {
                "ref": "#16:64",
                "id": "65",
                "values": [
                    "65",
                    "KYC",
                    "Know Your Customer",
                    "64",
                    "FXM",
                    "PDF",
                    "Active",
                    "Being Decommissioned"
                ]
            },
            {
                "ref": "#16:65",
                "id": "66",
                "values": [
                    "66",
                    "CMD",
                    "Customer Management Data",
                    "65",
                    "KYC",
                    "EUC-Other",
                    "Active",
                    "Being Decommissioned"
                ]
            }
        ]
    },
    {
        "facetId": "PEOPLE",
        "totalItems": 385,
        "totalHits": 1,
        "fields": [
            "id",
            "fullName",
            "firstName",
            "lastName",
            "email",
            "function",
            "employeeType",
            "profileId",
            "profileName",
            "lastLogon",
            "lifecycle"
        ],
        "items": [
            {
                "ref": "#53:12",
                "id": "13",
                "values": [
                    "13",
```

```
                        "John Smith",
                        "John",
                        "Smith",
                        "jsmith@yourorganization.com",
                        "Finance",
                        "Internal",
                        "5",
                        "Admin",
                        "",
                        "Working"
                    ]
                }
            ]
        },
        {
            "facetId": "POLICY",
            "totalItems": 271,
            "totalHits": 3,
            "fields": [
                "id",
                "refNumber",
                "name",
                "parentId",
                "parentName",
                "Chkbox20191121213042"
            ],
            "items": [
                {
                    "ref": "#135:19",
                    "id": "20",
                    "values": [
                        "20",
                        "GDPR-CLR",
                        "Classification Rule",
                        "19",
                        "Sensitive Data - Conditions for Processing",
                        ""
                    ]
                },
                {
                    "ref": "#135:20",
                    "id": "21",
                    "values": [
                        "21",
                        "GDPR-CD",
                        "Child's Data",
                        "20",
                        "Classification Rule",
                        ""
                    ]
                },
                {
                    "ref": "#135:24",
                    "id": "25",
                    "values": [
                        "25",
                        "GDPR-SDP",
                        "Secret Data Policy",
                        "24",
                        "Confidential Data Policy",
                        ""
                    ]
                }
            ]
        }
    ]
}
```

Primary Policy Objects

In the response, the `mainObject` section displays the primary objects that match your search criteria. The `"totalHits": 2` parameter indicates that there are 2 Policy objects that meet the search criteria.

For "Policy KYC" policy as the first result, the important parameters are as follows:

Parameter	Description
`"Policy KYC"`	This parameter indicates that the name of the Policy object is "Policy KYC".
`"fa4cb173-3684-4803-98ac-97174ccbf3f5"`	This parameter indicates that the segment ID is "fa4cb173-3684-4803-98ac-97174ccbf3f5". Use the **http(s)://<Axon_host>:<port>/segment/v1/identity/segment** to identify the segment name. For more information, see "Retrieve Segment Names for Segment IDs" on page 152.
`relationships`	This parameter indicates that the API call retrieved two related System objects.
`"id"`	The ID values of the related objects. The `"id": "64"` and `"id": "66"` values indicate that the related System objects have the ID value 64 and 66.

For "Confidential Data Policy" policy as the second result, the important parameters are as follows:

Parameter	Description
`"Confidential Data Policy"`	This parameter indicates that the name of the Policy object is "Confidential Data Policy".
`"fa4cb173-3684-4803-98ac-97174ccbf3f5"`	This parameter indicates that the segment ID is "fa4cb173-3684-4803-98ac-97174ccbf3f5". Use the **http(s)://<Axon_host>:<port>/segment/v1/identity/segment** to identify the segment name. For more information, see "Retrieve Segment Names for Segment IDs" on page 152.
`relationships`	This parameter indicates that the API call retrieved one related System object, three related Policy objects, and one related People object
`"id"`	The ID values of the related objects.

Related System Objects

In the response, the `relatedObjects` section displays the objects that are related to the primary object. The important parameters are as follows:

Parameter	Description
`"totalHits": 3`	This parameter indicates that there are 3 related System objects.
`fields`	This parameter indicates the Axon fields for the objects that are displayed.
`items`	This parameter displays the related System objects and their details. The `"Foreign Exchange Management"`, `"Know Your Customer"`, and `"Customer Management Data"` values show the names of the System objects.

Related People Objects

In the response, the API client displays the People objects that are related to the primary Policy objects that match the search criteria. The important parameters are as follows:

Parameter	Description
`"totalHits": 1`	This parameter indicates that there is 1 related People object.
`fields`	This parameter indicates the Axon fields for the objects that are displayed.
`items`	This parameter displays the related People object and its details. The `"John Smith"` value show the name of the People object.

Related Policy Objects

In the response, the API client displays the Policy objects that are related to the primary Policy objects that match the search criteria. The important parameters are as follows:

Parameter	Description
`"totalHits": 3`	This parameter indicates that there are 3 related Policy objects.
`fields`	This parameter indicates the Axon fields for the objects that are displayed.
`items`	This parameter displays the related Policy objects and their details. The `"Classification Rule"`, `"Child's Data"`, and `"Secret Data Policy"` values show the names of the Policy objects.

List of Facet Values

The following lists specify the exact facet values that you must enter in the API payload to upload or retrieve objects for the facet.

Business & Change objects:

- `Committee`
- `Policy`

- `Process`
- `Project`
- `CHANGE_REQUEST`

Organizational objects:

- `Business Area`
- `Capability`
- `Client`
- `Legal Entity`
- `Org. Unit`
- `People`
- `Product`

Regulatory objects:

- `Geography`
- `Regulation`
- `Regulator`
- `Regulatory Theme`

Data & Technology objects:

- `Attribute`
- `Data Quality Report`
- `Data Quality Rule`
- `Data Set`
- `Glossary`
- `Interface`
- `System`

Data Marketplace objects:

- `Data Collection`

Note: The following guidelines apply when you enter parameters in the API body:

- Enter the facet with the correct capitalization and spacing. For example, enter the Org Unit facet as `Org. Unit`. If you enter `Org Unit` or `OrgUnit`, the upload will fail.
- To specify parameters that correspond to field names in the Axon user interface, enter the field name exactly as it appears in the corresponding bulk upload template file.

  For example, the bulk upload template for Policy objects contains the **Parent Name** column header to specify parent objects. In the API request body, enter `Parent Name` to refer to this parameter.
- You can delete the following facets: Committee, Policy, Process, Project, Business Area, Capability, Client, Legal Entity, Org. Unit, People, Product, Geography, Regulation, Regulator, Regulatory Theme, Attribute, Data Quality Rule, Data Set, Glossary, Interface, and System. For more information about the DELETE method, see "Example: Delete a System Object" on page 56 and "Create, Update, or Delete Multiple Objects" on page 59.

List of Relationship Type Values

The following list specifies the exact relationship type value that you must enter in the API payload to upload or retrieve the relationships. Enter one of the following values:

- `Attribute X Attribute`
- `Attribute X Field`
- `Business Area X Glossary`
- `Business Area X Process`
- `Business Area X System`
- `Capability X Business Area`
- `Capability X Client`
- `Capability X Glossary`
- `Capability X Legal Entity`
- `Capability X Process`
- `Capability X Product`
- `Capability X System`
- `Committee X Capability`
- `Committee X Committee`
- `Data Set X Client`
- `Data Set X Legal Entity`
- `Data Set X Product`
- `Glossary X System`
- `Glossary X Client`
- `Glossary X Glossary`
- `Glossary X Product`
- `Interface X Glossary`
- `Local Data Quality Rule X Attribute`
- `Legal Entity X Geography`
- `People X People`
- `Policy X Attribute`
- `Policy X Business Area`
- `Policy X Client`
- `Policy X Data Set`
- `Policy X Glossary`
- `Policy X Legal Entity`
- `Policy X Policy`
- `Policy X Process`
- `Policy X Product`
- `Policy X Project`
- `Policy X System`

- `Process X Attribute`
- `Process X Client`
- `Process X Data Set`
- `Process X Glossary`
- `Process X Legal Entity`
- `Process X Process`
- `Process X Product`
- `Process X System`
- `Process X System Interface`
- `Project X Attribute`
- `Project X Business Area`
- `Project X Capability`
- `Project X Client`
- `Project X Data Set`
- `Project X Glossary`
- `Project X Process`
- `Project X Product`
- `Project X Project`
- `Project X System`
- `Regulation X Policy`
- `Regulation X Product`
- `Regulation X Project`
- `Regulation X Regulator`
- `Regulation X Regulatory Theme`
- `Regulation X Geography`
- `Segment X Objects`
- `System X Client`
- `System X Glossary`
- `System X Legal Entity`
- `System X Product`
- `System X Resource`

Note: Enter the relationship type with the correct capitalization and spacing. For example, to upload a new relationship between a System object and a Glossary object, enter `System X Glossary`. If you enter `system x glossary` or `System x Glossary`, the upload will fail.

Retrieve Object History

Use a REST API to retrieve the audit history of an object.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/objecthistory/api/v1/retrieve**
Method	POST

Syntax

The following table shows the query parameters that you need to provide for the API:

Parameter	Description
`offset`	Optional. Start index for paginated results. **Note:** Default value is `0`.
`facetName`	Required. The name of the facet for which the information is retrieved. For more information about the facet names that you can enter, see "List of Facet Values" on page 41. **Note:** You cannot use this API to retrieve the audit history for the objects in the following facets: - Change Requests - Active Tasks - People - Catalog - Roles
`objectId`	Optional. The unique identifier of the object whose audit history you want to retrieve. To enter value, use the following format: `["objectId"]` If you want to separate multiple values, use a comma. Ensure that there is no space between each value. **Note:** If you use the `objectId` parameter, you can't use the `parentId` parameter.
`parentId`	Optional. The unique identifier of the dataset whose audit history you want to retrieve. To enter value, use the following format: `["parentId"]` If you want to separate multiple values, use a comma. Ensure that there is no space between each value. **Note:** You can use this parameter only for the **Attribute** facet. This parameter allows you to use the API to retrieve the history of up to 50 attributes of a dataset. To use this parameter, ensure that you enter `attribute` as the value for the `facetName` parameter. If you use the `parentId` parameter, you can't use the `objectId` parameter.

Note: If you do not specify a value for the `objectId` and the `parentId` parameters, the API retrieves the audit history of 50 objects. The `offset` value that you specify determines the objects whose audit history is retrieved. If you specify `0` as the `offset` value, the object history of the first 50 objects in the start index for paginated results is retrieved.

Sample Request

The following example shows how you can use an API to retrieve the audit history of an object:

```
{
    "facetName": "process",
    "objectId": ["426"]
}
```

Response

When you pass the API query parameters in a REST client, the client retrieves and displays Axon objects that match your search query.

The following example shows the response of an API call that was used to retrieve the audit history of an object:

```
[
  {
    "Id": 426,
    "Name": "Process Name 3_test_1",
    "Type": "Process",
    "link": "https://<Axon URL>:<Port>/process/view/id/423",
    "revision": [
      {
        "area": "Details",
        "name": "Process",
        "author": "John Admin",
        "changes": [
          {
            "field": "Name",
            "newValue": "Process Name 3",
            "oldValue": ""
          },
          {
            "field": "Description",
            "newValue": "process desc 3",
            "oldValue": ""
          },
          {
            "field": "Step Type",
            "newValue": "Start Step",
            "oldValue": ""
          },
          {
            "field": "Can Create",
            "newValue": true,
            "oldValue": ""
          },
          {
            "field": "Can Update",
            "newValue": true,
            "oldValue": ""
          },
          {
            "field": "Type",
            "newValue": "Process",
            "oldValue": ""
          },
          {
            "field": "Axon Viewing",
            "newValue": "Public",
            "oldValue": ""
          },
          {
            "field": "Axon Status",
            "newValue": "Active",
            "oldValue": ""
          },
```

```
            {
              "field": "Lifecycle",
              "newValue": "In Production",
              "oldValue": ""
            },
            {
              "field": "Created By",
              "newValue": "John Admin",
              "oldValue": ""
            }
          ],
          "operation": "Inserted",
          "lastupdated": "2023-03-21 05:03:56"
        }
      ]
    }
  ]
```


The following table lists the important parameters in the response:

Parameter	Description
`Id`	The unique identifier of the object whose audit history was retrieved.
`Name`	The name of the object whose audit history was retrieved.
`Type`	The type of object whose audit history was retrieved.
`link`	The unique resource identifier of the object whose audit history was retrieved.
`revision : area`	The name of the section that was modified for the object.
`revision : name`	The updated name of the object.
`revision : author`	The name of the user that last modified the object.
`revision : author : changes : field`	The name of the object field that was modified.
`revision : author : changes : newValue`	The new value of the object after it was modified.
`revision : author : changes : oldValue`	The old value of the object before it was modified.
`revision : operation`	The operation that was used to modify the object. This parameter can have one of the following values: - If the value is `Inserted`, a new value was entered into a previously empty field. - If the value is `Updated`, the existing value of the field was replaced with a new value. - If the value is `Deleted`, the existing value of the field was deleted.
`revision : lastupdated`	The latest date when the object was modified.

Retrieve Object Locks

Use a REST API to verify whether an object is locked or unlocked. If an object is in edit mode or if a change request is in progress, the object appears in locked state, and you cannot modify the object.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object/lockstatus/{facetname}/{objectId}**
Method	GET

Syntax

The following table shows the query parameters that you need to provide for the API:

Parameter	Description
`facetname`	Required. Name of the facet for which you need to know whether the object is in locked or unlocked status.
`objectId`	Required. The unique identifier of the object. **Note:** Open the object to find the unique identifier of the object.

Sample Request

The following example shows how you can use an API to check the object status:

```
{{URL}}/api/v1/object/lockstatus/glossary/1
```

Response

When you pass the API query parameters in a REST client, the client retrieves and displays Axon objects that match your search query.

The following example shows the response of an API call to find the locked or unlocked status of specified object:

```
[
{
    "lockDetails": [
        {
            "id": "1",
            "ObjectName": "JohnAdminUploadGlossary50",
            "lockStatus": True
        }
    ]
}
```

The following table lists the important parameters in the response:

Parameter	Description
`id`	The unique identifier of the object.
`objectName`	Name of the object for which you want to know the locked or unlocked status.
`lockstatus`	Status of the object. If the value of this parameter is `True`, the object is locked. If the value of this parameter is `False`, the object is not locked.

CHAPTER 3

Manage Objects, Roles, and Relationships

If you have a large number of objects, relationships, and roles to enter in Axon, you can use an API to upload the values to Axon. You can also use APIs to delete objects, relationships, and roles from Axon.

Axon provides separate APIs to perform the following upload operations:

- Create or update a single object, create or delete a single relationship, and create or delete a single role.
- Create or update multiple objects
- Create or delete multiple relationships.
- Create or delete multiple roles.
- Upload a template file that contains the list of objects, relationships, and roles that you want to enter.

If the Admin or SuperAdmin user has configured mandatory workflows when you use the Axon interface, Axon will start the same workflows when you work on objects, relationships, and roles using the API interface.

Manage a Single Object, a Single Relationship or a Single Role

Use a REST API to create or update an object in Axon, create or delete a relationship, or create or delete a role.

When you create an object, you must specify the facet and the field values for the object. When you update an object, Axon overwrites the properties of the object with the properties that you specify in the API call.

When you create a relationship, you must specify the facets and the objects for which you want to create the relationship. When you delete a relationship, Axon removes the existing relationship between the objects that you specify in the API call.

When you create a role, you must specify the facets and the objects for which you want to create the role. When you delete a role, Axon removes the existing role assigned to the object stakeholder that you specify in the API call.

When you make the API call, Axon immediately displays the status of the API call in the response body.

Endpoint and Method

Create an Object

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	POST

Update an Object

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	PUT

Delete an Object

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	DELETE

Create a Relationship

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	POST

Delete a Relationship

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	DELETE

Create a Role

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	POST

Delete a Role

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/object**
Method	DELETE

Syntax

In the body of the API query, enter the field properties and the value for each field that you want to upload to Axon.
Enter the values in the following format for POST and PUT methods:

```
{
    "type": "<facet_or_relationship_type_or_role_type>",
    "stopOnWarning": <true_or_false>,
    "Segment":"<segment_name>",
    "object": {
        "<property_1>": "<value_1>",
        "<property_2>": "<value_2>",
        "<property_3>": "<value_3>",
        "<property_4>": "<value_4>",
    }

}
```

Enter the values in the following format for the DELETE method:

```
{
    "type": "<facet_or_relationship_type_or_role_type>",
    "stopOnWarning": <true_or_false>,
    "object": {
        "<property_ID>": <ID>
    }

}
```

The following table lists the important parameters that you can enter in the API query:

Parameter	Description
`type`	Required. Facet that you want to create or update, relationship type that you want to create or delete, or role type you want to create or delete. Enter the facet name, relationship type, or role type with the correct capitalization and spacing. To see the list of permissible values, see the "List of Facet Values" on page 41 , "List of Relationship Type Values" on page 43, and "List of Role Type Values" on page 91 topics.
`stopOnWarning`	Optional. Whether you want to cancel the operation if Axon detects a warning. - To abort the operation, enter the `true` value. - To continue the operation, enter the `false` value.
`segment`	Segment within which you want to create the object. **Note:** This parameter is applicable if the Axon administrator has enabled segmentation in the Admin Panel. You must have access to the segment within which you want to create the object.
`ID`	Required for DELETE method. ID of the Axon object that you want to delete.

For more information about how you can retrieve the `type`, `stopOnWarning` and `segment` values, see "Retrieve Primary Objects and Their Related Objects" on page 16.

The following guidelines apply for the properties in the API body:

- For mandatory properties, if you enter the property names, make sure that you also enter the property values. If you enter the property names but do not enter the property values, the upload will fail. If you do not enter the property names, Axon applies the default values for the properties.
- Enter the properties exactly as they appear in the bulk upload template for the object. To see the property names, refer to the topics in the *Bulk Upload Templates* section of the *Axon Data Governance User Guide*. To download the template file for reference, see "Step 1: Download Template File" on page 75.
- In the `segment` parameter, make sure that you enter the segment name correctly.
- You can enter the properties in any order. For example, to upload a system object, you can enter the `Lifecycle` value before the `Axon Status` value, although the **Axon Status** property appears before the **Lifecycle** property in the System bulk upload template.
- When you upload an object to Axon, make sure that you enter the facet in the URL for the API correctly. To see the list of facet values, refer to "List of Facet Values" on page 41.
- When you upload a relationship to Axon, make sure that you enter the relationship type in the URL for the API correctly. To see the list of relationship type values, refer to "List of Relationship Type Values" on page 43.

Response

When you pass the API query parameters in a REST client, the client retrieves and displays the status of the API call.

The following table lists the important parameters in the response:

Parameter	Description
`warnings`	Warning messages for the operation
`errors`	Error messages for the operation

Parameter	Description
`object`	Details of the object
`object : id`	ID of the object

Example: Create a System Object

The following example shows how to create a System object using the API. Select the API method as POST.

You want to create a CMD System object with the following properties:

Axon Interface Field Name	Template Property	Value
Short Name	System Name	CMD
Long Name	Long Name	Client Master Database
Asset ID	Asset ID	1234
Type dropdown 2	External	Internal
Description	Description	Corporate, wholesale and FI counterparties
Segment	segment	Marketing
URL	System Url	-
Parent	Parent System Name	CRM
Axon Status	Axon Status	Pending Review
Lifecycle	Lifecycle	In Production
Type dropdown 1	System Type	File System
Classification	System Classification	Data Warehouse
CIA Rating C	Confidentiality	1
CIA Rating I	Integrity	1
CIA Rating A	Availability	1
-	User Email	jsmith@yourorganization.com
-	User First Name	John
-	User Last Name	Smith

Axon Interface Field Name	Template Property	Value
-	User Lan ID	-
-	Governance Role	Data Steward

Enter the following values in the API body:

```
{
"type": "System",
"stopOnWarning": true,
"Segment": "Marketing",
"object":
    {
        "Short Name": "CMD",
        "Long Name": "Client Master Database",
        "Asset ID": "1234",
        "External": "FALSE",
        "Description": "Corporate, wholesale and FI counterparties",
        "System Url": "",
        "Parent System Name": "CRM",
        "Axon Status": "Pending Review",
        "Lifecycle": "In Production",
        "System Type": "File System",
        "System Classification": "Data Warehouse",
        "Confidentiality": 1,
        "Integrity": 1,
        "Availability": 1,
        "User Email": "jsmith@yourorganization.com",
        "User First Name": "John",
        "User Last Name": "Smith",
        "User Lan ID": "",
        "Governance Role": "Data Steward"
    }
}
```

Example: Update a System Object

The following example shows how to update a System object using the API. Select the API method as PUT.

You want to update the CMD System object with the following properties:

Axon Interface Field Name	Template Property	Value
-	System ID	-
Short Name	System Name	CMD
Long Name	Long Name	Client Master Database
Asset ID	Asset ID	4325
Type dropdown 2	External	Internal
Description	Description	Corporate, wholesale and FI counterparties
URL	System Url	-
Parent	Parent System Name	CRM

Axon Interface Field Name	Template Property	Value
Axon Viewing	Axon Viewing	Public
Axon Status	Axon Status	Active
Lifecycle	Lifecycle	Decommissioned
Type dropdown 1	"System Type	File System
Classification	System Classification	Data Warehouse
CIA Rating C	Confidentiality	1
CIA Rating I	Integrity	2
CIA Rating A	Availability	1

Enter the following values in the API body:

```
{
"type": "System",
"stopOnWarning": true,
"object":
    {
        "System ID": "",
        "System Name": "CMD",
        "Long Name": "Client Master Database",
        "Asset ID": "4325",
        "External": "FALSE",
        "Description": "Corporate, wholesale and FI counterparties",
        "System Url": "",
        "Parent System Name": "CRM",
        "Axon Viewing": "Public",
        "Axon Status": "Active",
        "Lifecycle": "Decommissioned",
        "System Type": "File System",
        "System Classification": "Data Warehouse",
        "Confidentiality": 1,
        "Integrity": 2,
        "Availability": 1
    }
}
```

Example: Delete a System Object

The following example shows how to delete a System object using the API. Select the API method as DELETE.

You want to update the CMD System object with the following properties:

Axon Interface Field Name	Template Property	Value
System ID	ID	-

Enter the following values in the API body:

```
{
"type": "System",
```

```
"stopOnWarning": false,
"object":
    {
        "ID": 12
        }
}
```

Example: Create a Policy X System Relationship

The following example shows the values that you can enter in the API body to create a Policy X System relationship. Select the API method as POST.

You want to create a relationship between the KYC and CMD policies with the following properties:

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	KYC
-	Policy Parent Name	Customer Interaction
System Name	System Name	CMD
-	Parent System Name	CRM
Relationship Type	Relationship Type	Policy is regulating System

Enter the following values in the API body:

```
{
    "type": "Policy X System",
    "stopOnWarning": true,
    "object":
    {
        "Policy Name": "KYC",
        "Policy Parent Name": "Customer Interaction",
        "System Name": "CMD",
        "Parent System Name": "CRM",
        "Relationship Type": "Policy is regulating System"
    }
}
```

Example: Delete a Policy X System Relationship

The following example shows the values that you can enter in the API body to delete a Policy X System relationship. Select the API method as DELETE.

You want to delete the relationship between the KYC and CMD policies with the following properties:

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	KYC
-	Policy Parent Name	Customer Interaction
System Name	System Name	CMD

Axon Interface Field Name	Relationship Property	Value
-	Parent System Name	CRM
Relationship Type	Relationship Type	Policy is regulating System

Enter the following values in the API body:

```
{
"type": "Policy X System",
"stopOnWarning": true,
"object":
    {
        "Policy Name": "KYC",
        "Policy Parent Name": "Customer Interaction",
        "System Name": "CMD",
        "Parent System Name": "CRM",
        "Relationship Type": "Policy is regulating System"
    }
}
```

Example: Create a Role for a System Object

The following example shows the values that you can enter in the API body to create a role for a system object. Select the API method as POST.

You can create a role for a system object with the following properties:

Axon Interface Field Name	Relationship Property	Value
Short Name	Short Name	CMD
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User Last Name	Adam
-	User Lan ID	APP01
Role Type	Governance Role	System Steward

Enter the following values in the API body:

```
{
    "type": "System Role",
    "stopOnWarning": true,
    "object":
    {
  "Short Name": "CMD",
  "User Email": "johnadam@yourorganization.com",
  "User First Name": "John",
  "User Last Name": "Adam",
  "User Lan ID": "APP01",
  "Governance Role": "System Steward"
}
}
```

Example: Delete a Role for a System Object

The following example shows the values that you can enter in the API body to delete a role for a system object. Select the API method as DELETE.

You can delete the role for the system object with the following properties:

Axon Interface Field Name	Relationship Property	Value
Short Name	Short Name	CMD
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User Last Name	Adam
-	User Lan ID	APP01
Role Type	Governance Role	System Steward

Enter the following values in the API body:

```
{
"type": "System Role",
"stopOnWarning": true,
"object":
    {
    "Short Name": "CMD",
    "User Email": "johnadam@yourorganization.com",
    "User First Name": "John",
    "User Last Name": "Adam",
    "User Lan ID": "APP01",
    "Governance Role": "System Steward"

    }
}
```

Create, Update, or Delete Multiple Objects

Use a REST API to create, update, or delete several objects in Axon. When you create objects, you must specify the facets and the field values for the objects. When you update objects, Axon overwrites the existing properties of the objects with the properties that you specify in the API call.

When you create or update multiple objects, Axon creates a job ID for the upload operation. You can pass an API query and specify the job ID to track the status of the upload operation. For information on how to track the status of an upload operation, see "Track Bulk Upload Status" on page 87.

Endpoint and Method

Create Multiple Objects

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/bulkupload/v1/objects**
Method	POST

Update Multiple Objects

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/bulkupload/v1/objects**
Method	PUT

Delete Multiple Objects

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/bulkupload/v1/objects**
Method	DELETE

Syntax

In the body of the API query, enter the properties and the values for each property that you want to upload to Axon. To upload additional objects, enter the objects one below the other.
Enter the values in the following format for POST and PUT methods:

```
{
    "type": "<facet>",
    "stopOnWarning": <true_or_false>,
    "Segment":"<segment_name_or_multiple>",
    "objects": [
        {
            "<object_1_property_1>":"<object_1_value_1>",
            "<object_1_property_2>":"<object_1_value_2>",
            "<object_1_property_3>":"<object_1_value_3>",
            "<object_1_property_4>":"<object_1_value_4>",
        },
        {
            "<object_2_property_1>":"<object_2_value_1>",
            "<object_2_property_2>":"<object_2_value_2>",
            "<object_2_property_3>":"<object_2_value_3>",
            "<object_2_property_4>":"<object_2_value_4>",
        }
    ]
}
```

Enter the values in the following format for the DELETE method:

```
{
    "type": "<facet>",
    "stopOnWarning": <true_or_false>,
    "objects": [
            <ID_1>, <ID_2>, <ID_3>
        ]
}
```

The following table lists the important parameters that you can enter in the API query:

Parameter	Description
`type`	Required. Facet that you want to create or update. Enter the facet name with the correct capitalization and spacing. To see the list of permissible values, see "List of Facet Values" on page 41.
`stopOnWarning`	Optional. Whether you want to cancel the operation if Axon detects a warning. - To abort the operation, enter the `true` value. - To continue the operation, enter the `false` value.
`segment`	Segments within which you want to create the objects. - If you want to create all the objects within a single segment, enter the segment name in this parameter. - If you want to create the objects within different segments, enter the `Multiple` value for this parameter, and then enter the segment names for each object in the `Segment` parameter. **Note:** The parameter is applicable if the Axon administrator has enabled segmentation in the Admin Panel. You must have access to the segment within which you want to create the object.

For more information about how you can retrieve the `type`, `stopOnWarning` and `segment` values, see "Retrieve Primary Objects and Their Related Objects" on page 16.

The following guidelines apply for the properties in the API body:

- For mandatory properties, if you enter the property names, make sure that you also enter the property values. If you enter the property names but do not enter the property values, the upload will fail. If you do not enter the property names, Axon applies the default values for the properties.
- Enter the properties exactly as they appear in the bulk upload template for the object. To see the property names, refer to the topics in the *Bulk Upload Templates* section of the *Axon Data Governance 7.3.6 User Guide*. To download the template file for reference, see "Step 1: Download Template File" on page 75.
- Enter the same number of properties for each object. For example, to upload several system objects, you can enter seven properties for each object. Do not enter seven properties for some objects and eight properties for other objects.
- For each object, you can enter the properties in any order. For example, to upload a system object, you can enter the `Lifecycle` value before the `Axon Status` value, although the **Axon Status** property appears before the **Lifecycle** property in the System bulk upload template.
- For each object, enter the properties in the same order that you decide. For example, if you choose to enter the `Lifecycle` value before the `Axon Status` value for the first object, you must enter the properties in the same order for every other object.
- When you bulk upload objects to Axon, make sure that you enter the facet in the URL for the API correctly. To see the list of facet values, refer to "List of Facet Values" on page 41.

Track Upload Status

To track the status of the upload, see "Track Bulk Upload Status" on page 87.

Example: Create 2 Policy Objects

The following example shows how to create two Policy objects using the API. Select the API method as POST.

You want to create the Policy objects for Know Your Client (KYC) and Confidentiality with the following properties:

Table 1. Policy Object 1

Axon Interface Field Name	Template Property	Value
Name	Policy Name	KYC
Ref.	Reference	REG-KYC
Segment	Segment	Marketing
Internal	Internal	Yes
URL	URL	www.yourorganization.com/policies/kyc
Description	Description	Due diligence activities for doing business with customers
Effective Date	Effective Date	September 18, 2019
End Date	End Date	September 12, 2030
Parent	Parent Policy Name	Customer Interaction
Axon Viewing	Axon Viewing	Public
Axon Status	Axon Status	Active
Lifecycle	Policy Lifecycle	Draft
Type	Policy Type	Data Standards
-	User Email	jsmith@yourorganization.com
-	User First Name	John
-	User Last Name	Smith

Axon Interface Field Name	Template Property	Value
-	User LAN ID	-
-	Governance Role	Policy Steward

Table 2. Policy Object 2

Axon Interface Field Name	Template Property	Value
Name	Policy Name	Confidentiality
Ref.	Reference	POL-1
Segment	Segment	Human Resources
Internal	Internal	Yes
URL	URL	www.yourorganization.com/policies/confidentiality
Description	Description	Manage confidentiality of information assets
Effective Date	Effective Date	September 18, 2019
End Date	End Date	September 12, 2030
Parent	Parent Policy Name	Data Protection
Axon Viewing	Axon Viewing	Public
Axon Status	Axon Status	Active
Lifecycle	Policy Lifecycle	Draft
Type	Policy Type	Conduct Standards
-	User Email	jsmith@yourorganization.com
-	User First Name	John
-	User Last Name	Smith
-	User LAN ID	-
-	Governance Role	Policy Steward

Enter the following values in the API body:

```
{
        "type": "Policy",
    "stopOnWarning": true,
    "Segment": "Multiple,
    "objects": [
            {
```

```
                "Policy Name":"KYC",
                "Reference":"REG-KYC",
                "Segment":"Marketing",
                "Internal":"TRUE",
                "URL":"www.yourorganization.com/policies/kyc",
                "Description":"Due diligence activities for doing business with
customers",
                "Effective Date":"18/09/2019",
                "End Date":"12/09/2030",
                "Parent Policy Name":"Customer Interaction",
                "Axon Viewing":"Public",
                "Axon Status":"Active",
                "Policy Lifecycle":"Draft",
                "Policy Type":"Data Standards",
                "User Email":"jsmith@yourorganization.com",
                "User First Name":"John",
                "User Last Name":"Smith",
                "User Lan ID":"",
                "Governance Role":"Policy Steward"
        },
        {
                "Policy Name":"Confidentiality",
                "Reference":"POL-1",
                "Segment":"Human Resources",
                "Internal":"TRUE",
                "URL":"www.yourorganization.com/policies/confidentiality",
                "Description":"Manage confidentiality of information assets",
                "Effective Date":"18/09/2019",
                "End Date":"12/09/2030",
                "Parent Policy Name":"Data Protection",
                "Axon Viewing":"Public",
                "Axon Status":"Active",
                "Policy Lifecycle":"Draft",
                "Policy Type":"Conduct Standards",
                "User Email":"jsmith@yourorganization.com",
                "User First Name":"John",
                "User Last Name":"Smith",
                "User Lan ID":"",
                "Governance Role":"Policy Steward"
        }
    ]
}
```


Example: Update 2 Policy Objects

The following example shows how to update two Policy objects using the API. Select the API method as PUT.

You want to update the Policy objects for Know Your Client (KYC) and Confidentiality with the following properties:

Table 3. Policy Object 1

Axon Interface Field Name	Template Property	Value
Name	Policy Name	KYC
Ref.	Reference	REGUL-KYC
Internal	Internal	Yes
URL	URL	www.yourorganization.com/policies/kyc

Axon Interface Field Name	Template Property	Value
Description	Description	Due diligence activities for doing business with customers
Effective Date	Effective Date	September 18, 2019
End Date	End Date	September 12, 2035
Parent	Parent Policy Name	Customer Interaction
Axon Viewing	Axon Viewing	Public
Axon Status	Axon Status	Active
Lifecycle	Policy Lifecycle	Draft
Type	Policy Type	Data Standards
-	User Email	jsmith@yourorganization.com
-	User First Name	John
-	User Last Name	Smith
-	User LAN ID	-
-	Governance Role	Policy Steward

Table 4. Policy Object 2

Axon Interface Field Name	Template Property	Value
Name	Policy Name	Confidentiality
Ref.	Reference	POLIC-1
Internal	Internal	Yes
URL	URL	www.yourorganization.com/policies/confidentiality
Description	Description	Manage confidentiality of information assets
Effective Date	Effective Date	September 18, 2019
End Date	End Date	September 12, 2035
Parent	Parent Policy Name	Data Protection
Axon Viewing	Axon Viewing	Public

Axon Interface Field Name	Template Property	Value
Axon Status	Axon Status	Active
Lifecycle	Policy Lifecycle	Draft
Type	Policy Type	Conduct Standards
-	User Email	jsmith@yourorganization.com
-	User First Name	John
-	User Last Name	Smith
-	User LAN ID	-
-	Governance Role	Policy Steward

Enter the following values in the API body:

```
{
    "type": "Policy",
    "stopOnWarning": true,
    "objects": [
            {
                "Policy Name":"KYC",
                "Reference":"REGUL-KYC",
                "Internal":"TRUE",
                "URL":"www.yourorganization.com/policies/kyc",
                "Description":"Due diligence activities for doing business with
customers",
                "Effective Date":"18/09/2019",
                "End Date":"12/09/2035",
                "Parent Policy Name":"Customer Interaction",
                "Axon Viewing":"Public",
                "Axon Status":"Active",
                "Policy Lifecycle":"Draft",
                "Policy Type":"Data Standards",
                "User Email":"jsmith@yourorganization.com",
                "User First Name":"John",
                "User Last Name":"Smith",
                "User Lan ID":"",
                "Governance Role":"Policy Steward"
            },
            {
                "Policy Name":"Confidentiality",
                "Reference":"POLIC-1",
                "Internal":"TRUE",
                "URL":"www.yourorganization.com/policies/confidentiality",
                "Description":"Manage confidentiality of information assets",
                "Effective Date":"18/09/2019",
                "End Date":"12/09/2035",
                "Parent Policy Name":"Data Protection",
                "Axon Viewing":"Public",
                "Axon Status":"Active",
                "Policy Lifecycle":"Draft",
                "Policy Type":"Conduct Standards",
                "User Email":"jsmith@yourorganization.com",
                "User First Name":"John",
                "User Last Name":"Smith",
                "User Lan ID":"",
                "Governance Role":"Policy Steward"
            }
```

```
    ]
}
```

Example: Delete 2 Policy Objects

The following example shows how to delete two Policy objects using the API. Select the API method as DELETE.

If you want to delete the Policy objects with IDs 1 and 13, provide the value of the object IDs in the API body. Enter the following values in the API body:

```
{
    "type": "Policy",
    "stopOnWarning": true,
    "objects": [

                1,13


    ]
}
```

Create or Delete Multiple Roles and Relationships

Use a REST API to create or delete several roles and relationships in Axon. When you create roles and relationships, you must specify the facets and the objects for the relationships. When you delete roles, Axon removes the existing roles associated with the object that you specify in the API call. When you delete relationships, Axon removes the existing relationships between the objects that you specify in the API call.

When you create or delete multiple roles and relationships, Axon creates a job ID for the upload operation. You can pass an API query and specify the job ID to track the status of the upload operation. For information on how to track the status of an upload operation, see "Track Bulk Upload Status" on page 87.

Endpoint and Method

Create Multiple Relationships or Multiple Roles

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/bulkupload/v1/relationships**
Method	POST

Delete Multiple Relationships or Multiple Roles

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/bulkupload/v1/relationships**
Method	DELETE

Syntax

In the body of the API query, specify the objects for which you want to create or delete the relationships or roles. Enter the relationship values in the following format:

```
{
    "type": "<relationship_type>",
    "stopOnWarning": <true_or_false>,
    "objects": [
        {
            "<rel_1_object_1_property_1>": "<rel_1_object_1_value_1>",
            "<rel_1_object_1_property_2>": "<rel_1_object_1_value_2>",
            "<rel_1_object_2_property_1>": "<rel_1_object_2_value_1>",
            "<rel_1_object_2_property_2>": "<rel_1_object_2_value_2>",
            "<rel_1_rel_type>": "<rel_1_rel_type_value>"
        },
        {
            "<rel_2_object_1_property_1>": "<rel_2_object_1_value_1>",
            "<rel_2_object_1_property_2>": "<rel_2_object_1_value_2>",
            "<rel_2_object_2_property_1>": "<rel_2_object_2_value_1>",
            "<rel_2_object_2_property_2>": "<rel_2_object_2_value_2>",
            "<rel_2_rel_type>": "<rel_2_rel_type_value>"
        }
    ]
}
```

Enter the role values in the following format:

```
{
"type": "<role_type>",
    "stopOnWarning": <true_or_false>,
    "objects": [
        {
            "<role_1_property_1>": "<value_1>",
            "<role_1_property_2>": "<value_2>",
            "<role_1_property_3>": "<value_3>",
            "<role_1_property_4>": "<value_4>",

        },
        {
            "<role_2_property_1>": "<value_1>",
            "<role_2_property_2>": "<value_2>",
            "<role-2_property_3>": "<value_3>",
            "<role_2_property_4>": "<value_4>",
        }
    ]
}
```

The following table lists the important parameters that you can enter in the API query:

Parameter	Description
`type`	Required. Relationship type or role type that you want to create or delete. Enter the facet name with the correct capitalization and spacing. To see the list of permissible values, see "List of Relationship Type Values" on page 43 and "List of Role Type Values" on page 91.
`stopOnWarning`	Optional. Whether you want to cancel the operation if Axon detects a warning. - To abort the operation, enter the `true` value. - To continue the operation, enter the `false` value.

For more information about how you can retrieve the `type` and `stopOnWarning` values, see "Retrieve Primary Objects and Their Related Objects" on page 16.

The following guidelines apply for the values in the API body:

- For mandatory properties, make sure that you enter the property name parameter. If you do not enter the property name parameter, the upload will fail.
- Enter the relationship properties exactly as they appear in the bulk upload template for the relationship. To see the properties, refer to the *Relationship Templates* topic in the *Axon Data Governance 7.3.6 User Guide*. To download the template file for reference, see "Step 1: Download Template File" on page 75.
- Enter the correct object names as they appears in the Axon interface. If you enter an object name that does not appear in Axon, the REST API client will display an error.
- Enter the same number of properties for each relationship. For example, to upload several Policy X System relationships, you can enter five properties for each relationship. Do not enter five properties for some relationships and six properties for other relationships.
- For each relationship, you can enter the facet objects in any order. For example, to upload a relationship between a Policy object and a System object, you can enter the `System Name` value before the `Policy Name` value, although the **Policy Name** field appears before the **System Name** field in the Policy X System bulk upload template.
- For each relationship, enter the properties in the same order that you decide. For example, if you choose to enter the `System Name` value before the `Policy Name` value for the first relationship, you must enter the properties in the same order for every other relationship.
- When you upload a relationship to Axon, make sure that you enter the relationship type in the URL for the API correctly. To see the list of relationship type values, refer to "List of Relationship Type Values" on page 43.

Track Upload Status

To track the status of the upload, see "Track Bulk Upload Status" on page 87.

Example: Create 2 Policy X System Relationships

The following example shows the values that you can enter in the API body to create two Policy X System relationships. Select the API method as POST.

You want to create relationships between the following policies and systems:

- KYC Policy and CMD System

- Confidentiality Policy and Payroll System

Table 5. Relationship 1

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	KYC
-	Policy Parent Name	Customer Interaction
System Name	System Name	CMD
-	Parent System Name	CRM
Relationship Type	Relationship Type	Policy is regulating System

Table 6. Relationship 2

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	Confidentiality
-	Policy Parent Name	Data Protection
System Name	System Name	Payroll
-	Parent System Name	FIN
Relationship Type	Relationship Type	Policy is regulating System

Enter the following values in the API body:

```
{
    "type": "Policy X System",
    "stopOnWarning": true,
    "objects": [
        {
                "Policy Name": "KYC",
                "Policy Parent Name": "Customer Interaction",
                "System Name": "CMD",
                "Parent System Name": "CRM",
                "Relationship Type": "Policy is regulating System"
        },
        {
                "Policy Name": "Confidentiality",
                "Policy Parent Name": "Data Protection",
                "System Name": "Payroll",
                "Parent System Name": "FIN",
                "Relationship Type": "Policy is regulating System"
        }
    ]
}
```

Example: Delete 2 Policy X System Relationships

The following example shows the values that you can enter in the API body to delete two Policy X System relationships. Select the API method as DELETE.

You want to delete the relationships between the following policies and systems:

- KYC Policy and CMD System
- Confidentiality Policy and Payroll System

Table 7. Relationship 1

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	KYC
-	Policy Parent Name	Customer Interaction
System Name	System Name	CMD
-	Parent System Name	CRM
Relationship Type	Relationship Type	Policy is regulating System

Table 8. Relationship 2

Axon Interface Field Name	Relationship Property	Value
-	Policy Name	Confidentiality
-	Policy Parent Name	Data Protection
System Name	System Name	Payroll
-	Parent System Name	FIN
Relationship Type	Relationship Type	Policy is regulating System

Enter the following values in the API body:

```
{
    "type": "Policy X System",
    "stopOnWarning": true,
    "objects": [
        {
                "Policy Name": "KYC",
                "Policy Parent Name": "Customer Interaction",
                "System Name": "CMD",
                "Parent System Name": "CRM",
                "Relationship Type": "Policy is regulating System"
        },
        {
                "Policy Name": "Confidentiality",
                "Policy Parent Name": "Data Protection",
                "System Name": "Payroll",
                "Parent System Name": "FIN",
                "Relationship Type": "Policy is regulating System"
        }
    ]
}
```

Example: Create Two Roles for two System Objects

The following example shows the values that you can enter in the API body to create two roles for two system objects. Select the API method as POST.

Table 9. Role 1

Axon Interface Field Name	Role Property	Value
System Name	System Name	CMD_1
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User last Name	Adam
-	User Lan ID	APP01
Relationship Type	Role Type	System Steward

Table 10. Role 2

Axon Interface Field Name	Role Property	Value
System Name	System Name	CMD_2
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User Last Name	Adam
-	User Lan ID	APP01
Relationship Type	Role Type	System Business Owner

Enter the following values in the API body:

```
{
    "type": "System Role",
    "stopOnWarning": true,
    "objects": [
        {
                "System Name": "CMD_1",
                "User Email": "johnadam@yourorganization.com",
                "User First Name": "John",
                "User Last Name": "Adam",
    "User Lan ID": "APP01",
    "Governance Role": "System Steward"
        },
        {
                "System Name": "CMD_2",
                "User Email": "johnadam@yourorganization.com",
                "User First Name": "John",
                "User Last Name": "Adam",
    "User Lan ID": "APP01",
    "Governance Role": "System Business Owner"
```

```
        }
    ]
}
```

Example: Delete two roles for System Objects

The following example shows the values that you can enter in the API body to delete two roles for system object. Select the API method as DELETE.

Table 11. Role 1

Axon Interface Field Name	Role Property	Value
System Name	System Name	CMD_1
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User last Name	Adam
-	User Lan ID	APP01
Relationship Type	Role Type	System Steward

Table 12. Role 2

Axon Interface Field Name	Role Property	Value
System Name	System Name	CMD_2
-	User Email	johnadam@yourorganization.com
-	User First Name	John
-	User last Name	Adam
-	User Lan ID	APP01
Relationship Type	Role Type	System Business Owner

Enter the following values in the API body:


```
{
    "type": "System Role",
    "stopOnWarning": true,
    "objects": [
        {
                "System Name": "CMD_1",
                "User Email": "johnadam@yourorganization.com",
                "User First Name": "John",
                "User Last Name": "Adam",
    "User Lan ID": "APP01"
                "Governance Role": "System Steward"
        },
        {
```

```
                "System Name": "CMD_2",
                "User Email": "johnadam@yourorganization.com",
                "User First Name": "John",
                "User Last Name": "Adam",
    "User Lan ID": "APP01"
                "Governance Role": "System Business Owner"
            }
        ]
}
```

Upload a Template File

Use a Microsoft Excel template to bulk upload objects, relationships, and roles to Axon. You can download the template from the Axon interface. The specific template file that you need to download from Axon depends on the facet, relationship, or role that you want to upload. After you fill the file with the values that you want to upload, you can upload the file using an API. The API reads the file and creates or updates Axon with the values that you entered. You can also upload the objects to Axon using the Axon interface. The API is an alternate method to upload the objects to Axon.

The following image shows the steps required to bulk upload Axon objects, relationships, and roles to Axon using the API:

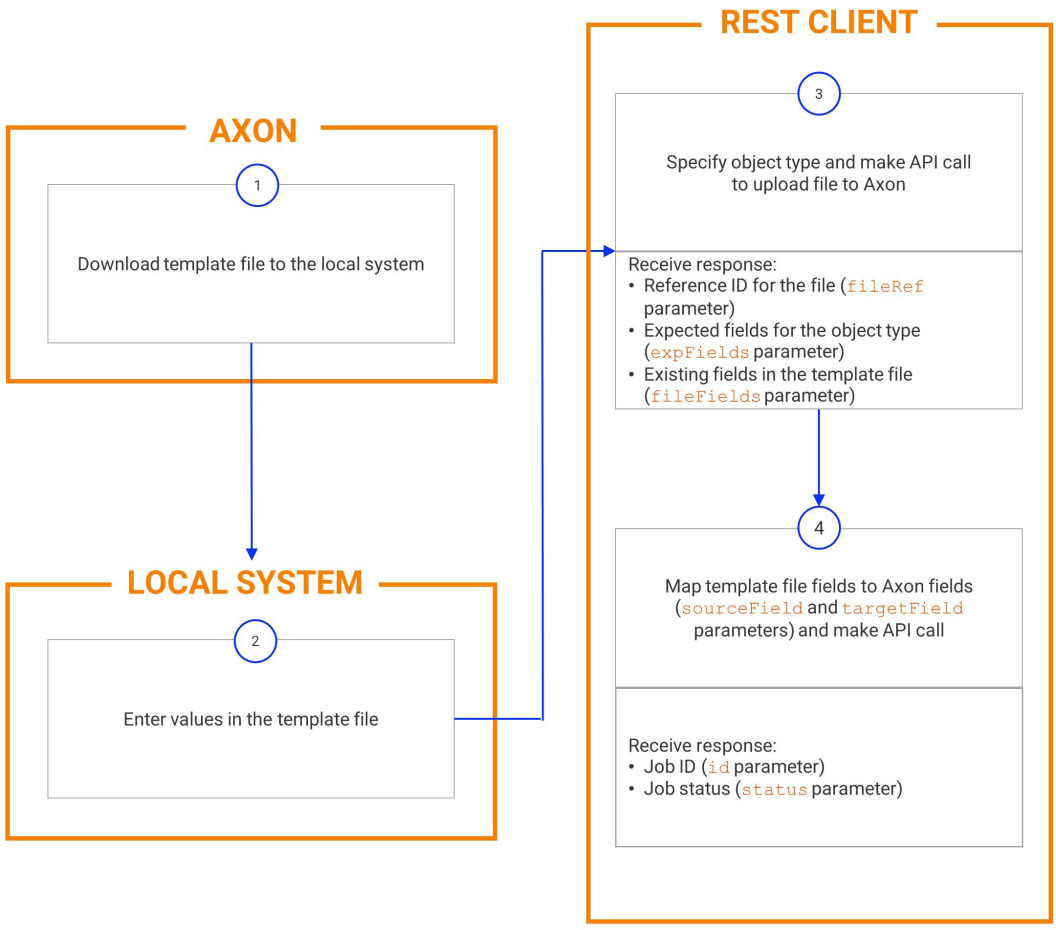

When you upload a template file, Axon creates a job ID for the upload operation. You can pass an API query and specify the job ID to track the status of the upload operation. For information on how to track the status of an upload operation, see "Track Bulk Upload Status" on page 87.

Step 1: Download Template File

Select the object type and download the latest template file from Axon to enter values.

1. In the Axon toolbar, click **Create** and select **Upload from file**.
   Axon displays the **Upload From File** page. Use the wizard to choose options to bulk upload data. The first step of the wizard prompts you to choose a file.
2. From the **Upload Type** list, select the type of item that you want to upload. The type of upload items include Relationships, Objects, and Roles.
3. Based on the type of upload item, select the type of relationship, object, or role in the field to the right of the **Upload Type** list.
   When you start typing a keyword in the search box, Axon suggests the matching object, relationship, or role that you want to upload.
4. Choose whether you want to upload new items or update existing items.
   The options to upload a new item or update an existing item appear based on the type of item that you choose to upload.
5. Click **Download Template**.

Step 2: Enter Values in Template File

After you download the template file, enter the data that you want to add or update in Axon, and then save the file.

Consider the following guidelines when you enter the data in the template:

- Columns with headers in red color are required.
- The template includes columns for custom fields that the Admin or SuperAdmin might have created.
- In the required fields, make sure that you enter a valid value before you save the file.
- If a field in the template requires a date, make sure that you enter the date in the DD/MM/YYYY format.
- If the administrator has defined mandatory workflow approvals for the facet, Axon ignores the values that you enter in the bulk upload file for the **Axon Status** field. Instead, Axon assigns the values that the administrator has configured for these fields in the Admin Panel.
  For more information on workflows, see the *Workflows and Change Requests* chapter in the *Axon Data Governance 7.3.6 User Guide*.

You can upload the file to Axon in Microsoft Excel (XLSX) or Comma-Separated Values (CSV) format. To upload the file in CSV format, save the XLSX template file as a CSV file.

Step 3: Upload File to Axon

After you enter the values in the template file, you must upload the XLSX or CSV file to Axon. Make an API call in the REST client to send the file to Axon. Axon reads the file and creates new entries or updates the existing entries.

Endpoint, Method, and Syntax

The following table lists the connection parameters for the API query:

Property	Description
Endpoint	**/bulkupload/v1/job/file?targetRef=<target_ref_value>** To view the list of possible values for the `targetRef` parameter, refer to "Target Reference Values" on page 76.
Method	POST
Upload file	In the request body, select the **form-data** body type and create a `file` parameter. In the parameter value, enter the fully qualified path to the upload file.

Target Reference Values

Specify the upload object type in the `targetRef` parameter of the API URL.

The following table lists the target reference values for each upload object type:

Upload Object Type	Create Object	Update Object
System X Product	`ProductXSystem_bulkCreate`	-
Project	`Project_bulkCreate`	`Project_bulkUpdate`
Project X System	`ProjectXSystem_bulkCreate`	-
Regulation	`Regulation_bulkCreate`	`Regulation_bulkUpdate`
Regulation X Policy	`RegulationXPolicy_bulkCreate`	-
System	`System_bulkCreate`	`System_bulkUpdate`
System X Legal Entity	`SystemXLegalEntity_bulkCreate`	-
System Role	`SystemXObjectXIP_bulkCreate`	-
Interface	`SystemXSystem_bulkCreate`	`SystemXSystem_bulkUpdate`
Interface X Glossary	`SystemXSystemXCatItemCategory_bulkCreate`	-
Interface Role	`SystemXSystemXObjectXIP_bulkCreate`	-

Upload Object Type	Create Object	Update Object
Business Area	BusinessConnection_bulkCreate	BusinessConnection_bulkUpdate
Business Area X Process	BusinessConnectionXProcess_bulkCreate	-
Capability	Capability_bulkCreate	Capability_bulkUpdate
Capability X Business Area	CapabilityXBusinessConnection_bulkCreate	-
Capability X Legal Entity	CapabilityXLegal_bulkCreate	-
Capability X Process	CapabilityXProcess_bulkCreate	-
Data Set	CatalogueItem_bulkCreate	CatalogueItem_bulkUpdate
Data Set X Legal Entity	CatalogueItemXLegal_bulkCreate	-
Data Set Role	CatalogueItemXObjectXIP_bulkCreate	-
Project X Glossary	CategoryXProject_bulkCreate	-
System X Glossary	CategoryXSystem_bulkCreate	-
Glossary	CatItemCategory_bulkCreate	CatItemCategory_bulkUpdate
Glossary X Glossary	CatItemCategoryXCatItemCategory_bulkCreate	-
Glossary Role	CatItemCategoryXObjectXIP_bulkCreate	-
Attribute	CatItemComponent_bulkCreate	CatItemComponent_bulkUpdate
Attribute X Attribute	CatItemCompXCatItemComp_bulkCreate	-
Process X Glossary	CICategoryXProcess_bulkCreate	-
Data Quality Rule	DQMeasure_bulkCreate	-
Data Quality Report	DQReport_bulkCreate	DQReport_bulkUpdate
People	InvolvedParty_bulkCreate	InvolvedParty_bulkUpdate
People X People	IPXIP_bulkCreate	-
Geography	Jurisdiction_bulkCreate	Jurisdiction_bulkUpdate
Legal Entity	Legal_bulkCreate	Legal_bulkUpdate

Upload Object Type	Create Object	Update Object
Legal Entity X Geography	LegalXJurisdiction_bulkCreate	-
Org Unit	OrgUnit_bulkCreate	OrgUnit_bulkUpdate
Policy	Policy_bulkCreate	Policy_bulkUpdate
Policy X Business Area	PolicyXBusinessConnection_bulkCreate	-
Policy X Glossary	PolicyXCategory_bulkCreate	-
Policy X Process	PolicyXProcess_bulkCreate	-
Policy X Project	PolicyXProject_bulkCreate	-
Process	Process_bulkCreate	Process_bulkUpdate
Process X Legal Entity	ProcessXLegal_bulkCreate	-
Process Role	ProcessXObjectXIP_bulkCreate	-
Process X Process	ProcessXProcess_bulkCreate	-
Process X System	ProcessXSystem_bulkCreate	-
Product	Product_bulkCreate	Product_bulkUpdate

Example

To upload Glossary objects to Axon, enter the following URL and pass a `POST` API query:

```
http(s)://<Axon_URL>/bulkupload/v1/job/file?targetRef=CatItemCategory_bulkCreate
```

The target reference value to create Glossary objects is `CatItemCategory_bulkCreate`.

To view the list of possible values for the `targetRef` parameter, refer to "Target Reference Values" on page 76.

Response

When you pass the API query parameters in the REST client and upload the file to Axon, the client displays a response for the object type that you upload.

Response Parameters

The important response parameters in the output are `fileRef`, `expFields`, and `fileFields`.

The following table describes the response parameters:

Parameter	Description
fileRef	Reference ID for the upload file.
expFields	List of expected fields for the object type in Axon. This parameter also displays related information about the expected fields, such as the field description, data type for the field, and whether the field is required or not.
fileFields	List of fields in the file that you uploaded.

Example

If you upload a file with new Glossary objects, the REST client might display the following response:


```
{
    "fileRef":"0ee50a4dccbc43df8828ec1859b76927",

    "expFields":
        [
            {
                "name":"Glossary ID",
                "description":"ID of the Glossary (Use only for Advanced Bulk Update)",
                "type":"integer",
                "format":"int32",
                "required":false
            },
            {
                "name":"Glossary Name",
                "description":"Unique name of the glossary item.",
                "type":"string",
                "required":true
            },
            {
                "name":"Glossary Definition",
                "description":"Definition of the glossary item.",
                "type":"string",
                "required":true
            },
            {
                "name":"Reference",
                "description":"Reference of the Glossary.",
                "type":"string",
                "required":false
            },
            {
                "name":"Examples",
                "description":"Examples of the glossary item.",
                "type":"string",
                "required":false
            },
            {
                "name":"Business Logic",
                "description":"Description of any business logic relevant to the
glossary item.",
                "type":"string",
                "required":false
            },
            {
                "name":"Format Description",
                "description":"Any description around the format of the glossary item.",
                "type":"string",
                "required":false
            },
            {
                "name":"LDM Reference",
```

```
                "description":"Captures the reference to a logical data model.",
                "type":"string",
                "required":false
            },
            {
                "name":"Parent Glossary Name",
                "description":"Captures the name of the parent glossary item.",
                "type":"string",
                "required":false
            },
            {
                "name":"Lifecycle",
                "description":"Lifecycle Status of the glossary item. Axon supports a
set list of lifecycle status values.",
                "type":"string",
                "required":true
            },
            {
                "name":"Format Type",
                "description":"The format in which the glossary item is expressed e.g.
TEXT, NUMBER etc. Axon supports a set list of Format Types.",
                "type":"string",
                "required":true
            },
            {
                "name":"KDE",
                "description":"Indicates whether the glossary is a key data element or
not. You can add new key data element values in addition to the default values, True and
False, as necessary.",
                "type":"string",
                "required":false
            },
            {
                "name":"Security Classification",
                "description":"Security Classification of the glossary item in terms of
sensitivity of the information. Axon supports a set list of classification values.",
                "type":"string",
                "required":true
            },
            {
                "name":"Glossary Type",
                "description":"Type of glossary item. Axon supports a set list of type
values.",
                "type":"string",
                "required":true
            },
            {
                "name":"Confidentiality",
                "description":"Confidentiality",
                "type":"integer",
                "format":"int32",
                "required":false
            },
            {
                "name":"Integrity",
                "description":"Integrity",
                "type":"integer",
                "format":"int32",
                "required":false
            },
            {
                "name":"Availability",
                "description":"Availability",
                "type":"integer",
                "format":"int32",
                "required":false
            },
            {
                "name":"Glossary Alias Name",
                "description":"Glossary Alias Name",
```

```
                    "type":"string",
                    "required":false
                },
                {
                    "name":"User Email",
                    "description":"User Email",
                    "type":"string",
                    "required":false
                },
                {
                    "name":"User First Name",
                    "description":"User First Name",
                    "type":"string",
                    "required":false
                },
                {
                    "name":"User Last Name",
                    "description":"User Last Name",
                    "type":"string",
                    "required":false
                },
                {
                    "name":"User Lan ID",
                    "description":"User Lan ID",
                    "type":"string",
                    "required":false
                },
                {
                    "name":"Governance Role",
                    "description":"Governance role assigned to the person",
                    "type":"string",
                    "required":false
                },
            ],

        "fileFields":
        [
            "Glossary Name",
            "Glossary Definition",
            "Reference",
            "Examples",
            "Business Logic",
            "Format Description",
            "LDM Reference",
            "Parent Glossary Name",
            "Lifecycle",
            "Format Type",
            "KDE",
            "Security Classification",
            "Glossary Type",
            "Confidentiality",
            "Integrity",
            "Availability",
            "Glossary Alias Name",
            "User Email",
            "User First Name",
            "User Last Name",
            "User Lan ID",
            "Governance Role"
        ]
    }
```


In this response, the REST client retrieved the following information:

- The `"fileRef":"0ee50a4dccbc43df8828ec1859b76927"` value displays the reference ID for the file. The reference ID is a unique identifier for each file that you upload.
- The `"expFields"` section displays the list of fields that are expected for the object type in the Axon installation. The `Glossary ID` field accepts an integer value, and the field is optional. The `Glossary Definition` field accepts a string value, and the field is required.

- The "fileFields" parameter displays the list of fields in the uploaded file. Some of the fields are Glossary Name, Glossary Definition, Reference, Examples, Business Logic, Format Description, LDM Reference, Parent Glossary Name, Lifecycle, and Format Type.

Step 4: Map File Fields to Axon Fields

After you upload the file to Axon, you must map the fields in the file to the fields in Axon. The mapping instructs the API to upload the values from the source fields in the upload file to the target fields in Axon.

To map the fields, you must pass an API query that specifies the source fields in the upload file and the target fields in Axon. You can also specify whether you want to cancel the upload operation if Axon detects a warning.

Endpoint, Method, and Syntax

Endpoint and Method

The following table lists the connection parameters for the API query:

Property	Description
Endpoint	**/bulkupload/v1/job**
Method	POST

Syntax

The following table lists the parameters for the API:

Property	Description
Parameter to specify the upload file reference ID	Specify the upload file reference ID in the fileRef parameter of the API query. **Note:** To get the file reference ID, see the fileRef parameter in the response body that you received when you uploaded the template file.
Parameter to specify if the upload operation must be aborted if Axon detects a warning.	In the options section of the API query, enter a value for the "STOP_ON_WARNING" parameter. - To abort the upload operation when Axon detects a warning, enter the true value. - To continue the upload operation after Axon detects a warning, enter the false value. If you do not enter a value, the REST client assigns the false value by default.
Parameter to specify the upload object type	Specify the upload object type in the targetRef parameter of the API query. The value you enter must be the same value that you entered in the targetRef parameter when you uploaded the template file. To view the list of possible values for the targetRef parameter, refer to "Target Reference Values" on page 76.
Parameter to specify the file fields and the corresponding Axon fields	In the fieldMappings section of the API query, map the fields in the upload file to the fields in Axon: - In the sourceField parameter, enter the field name in the upload file. - In the targetField parameter, enter the matching field name as it appears in Axon. Repeat the entries for the sourceField and targetField parameters for each value that you entered in the upload file.

Field Mapping Guidelines

Some fields in Axon require that you enter a value, and some fields are optional. The following guidelines apply to required and optional fields in the `fieldMappings` section of the API query:

- If you are certain that the fields in the upload file and the fields in Axon are exactly the same, you can choose to leave the `fieldMappings` section empty or not create the `fieldMappings` section. In these situations, the API attempts to map the fields automatically.
- If you create the `fieldMappings` section, you must map the required fields in the upload file with the target fields in Axon. If you do not map the required fields, the API displays an error when you check the status of the upload operation.
- If you create the `fieldMappings` section, you can choose to map the optional fields or ignore them. If you map the optional fields, the API creates the Axon objects and uploads the values for the optional fields to Axon. If you do not map the optional fields, the API creates the Axon objects, but leaves the optional fields as empty in Axon.
- If you choose to map the optional fields, make sure that you enter the field names from the upload file correctly. If the field names are incorrect, the API does not upload the values for the fields to Axon.
- Make sure that you enter the Axon field names correctly. If the field names are incorrect, the API displays an error when you check the status of the upload operation.

Example

If you want to upload several Glossary objects, enter the following parameters in the REST client:

```
{
    "fileRef":"0ee50a4dccbc43df8828ec1859b76927",

    "options":
        {
            "STOP_ON_WARNING":true,
        },

    "targetRef":"CatItemCategory_bulkCreate",

    "fieldMappings":
    [
        {
            "sourceField":"Glossary ID",
            "targetField":"Glossary ID"
        },
        {
            "sourceField":"Glossary Name",
            "targetField":"Glossary Term"
        },
        {
            "sourceField":"Glossary Definition",
            "targetField":"Glossary Meaning"
        },
        {
            "sourceField":"Reference",
            "targetField":"Reference"
        },
        {
            "sourceField":"Parent Glossary Name",
            "targetField":"Parent Glossary Term"
        },
        {
            "sourceField":"Segment",
            "targetField":"Segment"
        },
        {
            "sourceField":"Lifecycle",
            "targetField":"Lifecycle"
```

```
            }
        ]
    }
```

The parameters in this query are as follows:

- The `"fileRef":"0ee50a4dccbc43df8828ec1859b76927"` parameter displays the reference ID for the upload file. This value is retrieved from the API response that you received when you uploaded the template to Axon.
- In the `"options"` section, the `"STOP_ON_WARNING":true` parameter instructs the REST client to abort the upload operation if Axon detects a warning.
- The `"targetRef":"CatItemCategory_bulkCreate"` parameter displays the target reference for the object type for which you are trying to upload values.
  To view the list of possible values for the `targetRef` parameter, refer to "Target Reference Values" on page 76.
- In the `"fieldMappings"` section, the fields in the upload file are mapped with their target fields in Axon. The following table describes the field mapping for this example:

Field in the Upload File	Field in Axon
Glossary ID	Glossary ID
Glossary Name	Glossary Term
Glossary Definition	Glossary Meaning
Reference	Reference
Parent Glossary Name	Parent Glossary Term
Lifecycle	Lifecycle

Note:

1. Enter the field names correctly. If Axon detects a mismatch between a field name that you specify in the parameter and the field name in Axon, the upload operation might display an error.
2. You must specify the field mapping in the parameters even if the fields in the upload file and the fields in Axon are the same.

Response

When you pass the API query parameters in the REST client, the client displays a response for the fields that you mapped.

Response Parameters

The important response parameters in the output are `id`, `type`, `status`, `expectedTicks`, `itemsCount`, and `STOP_ON_WARNING`.

The following table describes the response parameters:

Parameter	Description
`id`	Job ID for the upload operation.
`type`	Upload object type. The `type` parameter in the response is denoted by the `targetRef` parameter. To view the list of possible values for the `targetRef` parameter, refer to "Target Reference Values" on page 76.
`id` parameter in the `progress` section	Job ID for the upload operation.
`status` parameter in the `progress` section	Status of the upload job. For the list of status messages and their descriptions, refer to "Upload Status Messages" on page 86.
`expectedTicks` parameter in the `progress` section	Number of upload entries that have been processed by the upload operation.
`creationTime`	Date and time when the upload job was created.
`createdBy`	Axon user that created the upload job.
`itemsCount`	Total number of entries that must be uploaded to Axon.
`STOP_ON_WARNING` parameter in the `options` section	Indicates whether the REST client will stop the upload operation if Axon detects a warning.

Example

For example, if you mapped the fields for Glossary objects, the REST client might display the following response:

```
{
    "id":"2",
    "type":"CatItemCategory_bulkCreate",
    "progress":
    {
        "id":"2",
        "status":"NEW",
        "expectedTicks":8
    },
    "creationTime": "2019-02-14T15:34:22.416+05:30",
    "createdBy":"3",
    "itemsCount":8,
    "options":
    {
        "STOP_ON_WARNING":"true",
    },

    "fieldMappings":
        [
            {
                "sourceField":"Glossary ID",
                "targetField":"Glossary ID"
            },
            {
                "sourceField":"Glossary Name",
                "targetField":"Glossary Term"
            },
```

```
                {
                    "sourceField":"Glossary Definition",
                    "targetField":"Glossary Meaning"
                },
                {
                    "sourceField":"Reference",
                    "targetField":"Reference"
                },
                {
                    "sourceField":"Parent Glossary Name",
                    "targetField":"Parent Glossary Term"
                },
                {
                    "sourceField":"Lifecycle",
                    "targetField":"Lifecycle"
                },
            ]
    }
```

In this response, the REST client retrieved the following information:

- The `"id":"2"` value indicates that the job ID for the upload operation is 2.
- The `"type":"CatItemCategory_bulkCreate"` value indicates that you want to upload new Glossary objects to Axon.
- In the `progress` section, the `"id":"2"` value indicates that the job ID for the upload operation is 2.
- In the `progress` section, the `"status":"NEW"` value indicates that upload job is created but it is not pre-validated.
- In the `progress` section, the `"expectedTicks":8` value indicates that 8 objects have been uploaded to Axon.
- The `"creationTime": "2019-02-14T15:34:22.416+05:30"` value indicates that the upload job was created on February 14, 2019 at 3:34 p.m. Coordinated Universal Time (UTC).
- The `createdBy":"3"` value indicates that the upload job was created by the user with ID `2` in Axon.
- The `"itemsCount":8` value indicates that the total number of upload objects were 8.
- The `"STOP_ON_WARNING":"true"` value indicates that the REST client is instructed to stop the upload operation if Axon detects a warning.

Upload Status Messages

When you map the fields in the upload file with the fields in Axon and pass the API query, the REST client response displays the status of the upload operation. To see the status, see the `"status"` parameter in the `"progress"` section of the API response.

The following table lists the possible values for the `"status"` parameter and their descriptions:

Status Message	Description
`NEW`	The upload job is created.
`PREVALIDATING`	The API performs a basic check of the upload file and verifies the integrity of the file. For example, at this stage, Axon checks the file for cyclic dependency and duplicate names.
`PENDING VALIDATION`	The API has performed the pre-validation checks, and the file is ready for validation.

Status Message	Description
VALIDATING	The API performs a full validation of the upload file. At this stage, the API checks the values of the file and their requirements in the Axon interface. For example, the API checks for relationships between facets, the prerequisite values in the Axon database, and duplicate values that might already be present in the database.
PENDING COMMIT	The API has performed the validation checks, and the file is ready for validation.
COMMITTING	The API stores the values of the upload file to the Axon database.
COMPLETED	The upload job is completed.
FAILED	The upload job has failed.

Track Bulk Upload Status

If you upload a large number of objects, relationships, or roles to Axon, track the status of the bulk upload operation to know if the values you specified have been entered in Axon as necessary.

Endpoint and Method

The following table lists the syntax of the REST API query:

Property	Description
Endpoint	**/bulkupload/v1/job/<job_ID>**
Method	GET

Note: To track the upload, specify the upload job ID and pass an API query. You need to use the track status API if you have used APIs for the following bulk upload tasks:

- Create or update multiple objects. To see the URL, method, and syntax, refer to "Create, Update, or Delete Multiple Objects" on page 59.
- Create or delete multiple relationships. To see the URL, method, and syntax, refer to "Create or Delete Multiple Roles and Relationships" on page 67.
- Upload a template file. To see the URL, method, and syntax, refer to "Upload a Template File" on page 74.

Syntax

This API does not require any parameter in the query.

Response

When you pass the API query, the client displays a response for the job upload status. The important response parameters in the output are `id`, `type`, `status`, `message`, `expectedTicks`, `itemsCount`, and `STOP_ON_WARNING`.

The following table describes the response parameters:

Parameter	Description
`id`	Job ID for the upload operation.
`type`	Upload object type. The `type` parameter in the response is denoted by the `targetRef` parameter. To view the list of possible values for the `targetRef` parameter, refer to "Target Reference Values" on page 76.
`status` parameter in the `progress` section	Status of the upload job.
`message` parameter in the `progress` section	Description of the upload status.
`expectedTicks` parameter in the `progress` section	Number of upload entries that have been processed by the upload operation.
`itemsCount`	Total number of entries that must be uploaded to Axon.
`STOP_ON_WARNING` parameter in the `options` section	Indicates whether the REST client will stop the upload operation if Axon detects a warning.

Example

Query

To track the upload status for job ID 2, enter the following URL and pass a `GET` API query:

```
http(s)://<Axon_URL>/bulkupload/v1/job/2
```

Response

For example, if you mapped the fields for Glossary objects, the REST client displays the following response:

```
{
    "id":"2",
    "type":"CatItemCategory_bulkCreate",
    "displayName":"Glossary : Upload New Items",
    "progress":
        {
            "id":"2",
            "status":"COMPLETED",
            "message":"Job Completed successfully.",
            "expectedTicks":8
        },
        "creationTime":"2018-10-23T15:33:35.636+05:30",
        "completedTime":"2018-10-23T15:33:48.794+05:30",
        "createdBy":"1",
        "reportSummary":
            {
                "errors":0,
                "warnings":0
            },
        "itemsCount":8,
        "options":
            {
                "STOP_ON_WARNING":"true",
            },
```

```
            "fieldMappings":
                [
                    {
                        "sourceField":"Glossary ID",
                        "targetField":"Glossary ID"
                    },
                    {
                        "sourceField":"Glossary Name",
                        "targetField":"Glossary Term"
                    },
                    {
                        "sourceField":"Glossary Definition",
                        "targetField":"Glossary Meaning"
                    },
                    {
                        "sourceField":"Reference",
                        "targetField":"Reference"
                    },
                    {
                        "sourceField":"Parent Glossary Name",
                        "targetField":"Parent Glossary Term"
                    },
                    {
                        "sourceField":"Lifecycle",
                        "targetField":"Lifecycle"
                    }
                ]
    }
```

Download Error Report

If the bulk upload operation failed, you can pass an API query to download an error report.

Endpoint and Method

The following table lists the syntax of the REST API query:

Property	Description
Endpoint	**/bulkupload/v1/job/report/file/<job_ID>**
Method	GET

Note: To check the status of the bulk upload operation, refer to "Track Bulk Upload Status" on page 87.

Syntax

This API does not require any parameter in the query.

Response

When you pass the API query, the client retrieves and displays the response as a stream. You can save the response in Microsoft Excel (XLSX) format to view the report.

Example

To download the error report for job ID 2, enter the following URL and pass a `GET` API query::

```
http(s)://<Axon_URL>/bulkupload/v1/job/report/file/2
```

List of Facet Values

The following lists specify the exact facet values that you must enter in the API payload to upload or retrieve objects for the facet.

Business & Change objects:

- `Committee`
- `Policy`
- `Process`
- `Project`
- `CHANGE_REQUEST`

Organizational objects:

- `Business Area`
- `Capability`
- `Client`
- `Legal Entity`
- `Org. Unit`
- `People`
- `Product`

Regulatory objects:

- `Geography`
- `Regulation`
- `Regulator`
- `Regulatory Theme`

Data & Technology objects:

- `Attribute`
- `Data Quality Report`
- `Data Quality Rule`
- `Data Set`
- `Glossary`
- `Interface`
- `System`

Data Marketplace objects:

- `Data Collection`

Note: The following guidelines apply when you enter parameters in the API body:

- Enter the facet with the correct capitalization and spacing. For example, enter the Org Unit facet as `Org. Unit`. If you enter `Org Unit` or `OrgUnit`, the upload will fail.
- To specify parameters that correspond to field names in the Axon user interface, enter the field name exactly as it appears in the corresponding bulk upload template file.

For example, the bulk upload template for Policy objects contains the **Parent Name** column header to specify parent objects. In the API request body, enter `Parent Name` to refer to this parameter.

- You can delete the following facets: Committee, Policy, Process, Project, Business Area, Capability, Client, Legal Entity, Org. Unit, People, Product, Geography, Regulation, Regulator, Regulatory Theme, Attribute, Data Quality Rule, Data Set, Glossary, Interface, and System. For more information about the DELETE method, see "Example: Delete a System Object" on page 56 and "Create, Update, or Delete Multiple Objects" on page 59.

List of Role Type Values

When you bulk upload objects to Axon, you must correctly enter the role in the API payload for the following APIs:

- API to create or delete a single role. To see the URL, method, and syntax, refer to "Manage a Single Object, a Single Relationship or a Single Role" on page 50.
- API to create or delete multiple roles. To see the URL, method, and syntax, refer to "Create or Delete Multiple Roles and Relationships" on page 67.

The following lists specify the exact role values that you must enter in the API URL to upload roles for the facet.

Business Area:

- `Business Area Head`

Capability:

- `Capability Owner`

Client:

- `Client Segmentation Owner`

Committee:

- `Committee Chair`

Data Set:

- `Data Steward`
- `Data Owner`

Glossary:

- `Glossary Definition Owner`
- `Glossary Steward`

Interface:

- `Interface Owner`
- `Interface Steward`

Legal:

- `Legal Entity Owner`

Policy:

- `Policy Owner`
- `Policy Steward`

Process:

- `Process Owner`
- `Process Steward`

Product:

- `Product Owner`
- `Product Steward`

Project:

- `Project Manager`
- `Project Steward`

Regulation:

- `Regulation Owner`
- `Regulation SME`

System:

- `System Business Owner`
- `System Steward`

List of Relationship Type Values

The following list specifies the exact relationship type value that you must enter in the API payload to upload or retrieve the relationships. Enter one of the following values:

- `Attribute X Attribute`
- `Attribute X Field`
- `Business Area X Glossary`
- `Business Area X Process`
- `Business Area X System`
- `Capability X Business Area`
- `Capability X Client`
- `Capability X Glossary`
- `Capability X Legal Entity`
- `Capability X Process`
- `Capability X Product`
- `Capability X System`
- `Committee X Capability`
- `Committee X Committee`

- Data Set X Client
- Data Set X Legal Entity
- Data Set X Product
- Glossary X System
- Glossary X Client
- Glossary X Glossary
- Glossary X Product
- Interface X Glossary
- Local Data Quality Rule X Attribute
- Legal Entity X Geography
- People X People
- Policy X Attribute
- Policy X Business Area
- Policy X Client
- Policy X Data Set
- Policy X Glossary
- Policy X Legal Entity
- Policy X Policy
- Policy X Process
- Policy X Product
- Policy X Project
- Policy X System
- Process X Attribute
- Process X Client
- Process X Data Set
- Process X Glossary
- Process X Legal Entity
- Process X Process
- Process X Product
- Process X System
- Process X System Interface
- Project X Attribute
- Project X Business Area
- Project X Capability
- Project X Client
- Project X Data Set
- Project X Glossary
- Project X Process
- Project X Product

- `Project X Project`
- `Project X System`
- `Regulation X Policy`
- `Regulation X Product`
- `Regulation X Project`
- `Regulation X Regulator`
- `Regulation X Regulatory Theme`
- `Regulation X Geography`
- `Segment X Objects`
- `System X Client`
- `System X Glossary`
- `System X Legal Entity`
- `System X Product`
- `System X Resource`

Note: Enter the relationship type with the correct capitalization and spacing. For example, to upload a new relationship between a System object and a Glossary object, enter `System X Glossary`. If you enter `system x glossary` or `System x Glossary`, the upload will fail.

CHAPTER 4

Manage Change Requests

Use REST APIs to create, retrieve, start, update, complete and cancel change requests in Axon Data Governance.

The APIs only support manual change requests. The retrieve change request API is the only API that supports automatic change requests. The behavior of the retrieve change request API remains consistent irrespective of the change request type.

To call change request APIs, use an access token to authenticate yourself and send a payload.

For more information on manual change requests and automatic change requests, refer to the *Use Change Requests* topic in the Axon Data Governance 7.3.6 User Guide

Note: The APIs can function only with the native Axon change request system. You cannot use these APIs for an external change request system.

Create a Change Request

Use a REST API to create change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1**
Method	POST

Syntax

The following syntax shows a sample API to create a change request:

```
{
"Facet Name":"Glossary",
"Object Name" : "GLSRY1",
"Object ID" : "",
"Object Ref." : "",
"Title" : "API CR Test-1 for Glossary",
"Type": "Request For Change",
"Summary" : "API CR Test-1 for Glossary",
"Change Request System": "Native",
"Parent": "" ,
"Severity": "low",
```

```
"Urgency": "High",
"Estimated Benefit": "12",
"Estimated Benefit Currency": "GBP",
"Estimated Cost": "12",
"Estimated Cost Currency": "FTE"
}
```

The following table shows the typical API request parameters that you can provide to create a change request:

Parameter	Description
`Facet Name`	Required. The facet for which you want to create a change request.
`Title`	Required. The name of the change request.
`Summary`	Required. A short description of the change request.
`Change Request System`	Required. The ticketing system used to track the change request. Enter `Native` here.
`Severity`	Required. Severity of the change request. You can provide the following values: - `low` - `medium` - `high`
`Urgency`	Required. The level of urgency for the change request. You can provide the following values: - `low` - `medium` - `high`
`Object Name`	Optional. The name of the facet object.
`Object Ref`	Optional. The facet object reference.
`Object ID`	Optional. The identifier for the facet object.

Note: To successfully call the API, you must enter at least one of the three optional parameters listed above.

The following table lists the parameters in the API response:

Parameter	Description
`Success`	The result of the API call. Display one of the following values: - `true`: The change request was created successfully. - `false`: The change request cannot be created due to an error.
`Message`	Description of the API call result.
`Reference URL`	The reference URL contains the change request ID. The change request ID is a unique identifier used by Axon to reference the change request.

Retrieve Change Requests

Use a REST API to search for existing change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1/<change_request_id>** `change_request_id`: Enter the ID of the change request that you are searching for.
Method	GET

Sample Response

```
{
    "Title": "DefaultWorkflow-2-DataSet - DataSet_01",
    "Summary": "System generated Change Request for Approval Workflow -
DefaultWorkflow-2-DataSet",
    "Type": "Request For Change",
    "Affected Item": "DataSet_01",
    "Parent": "",
    "Analysis": "",
    "Resolution": "",
    "Axon Status": "Running",
    "Severity": "Low",
    "Urgency": "Low",
    "Estimated Benefit": "",
    "Estimated Cost": "",
    "Created By": "John admin",
    "Created": "01-Aug-2023",
    "Last Updated": "01-Aug-2023",
    "Changes to Review": [
        {
            "tab": "Summary",
            "component": "Documents",
            "object": https://invrh91axon01.informatica.com:9443/download_document/
CatalogueItem-120/e3bb1513-5804-4ee2-b51f-68bacf1817a7,
            "operation": "Inserted",
            "author": "Harshada Khalkar",
            "fileName": "A1.png",
            "details": [
                {
                    "fieldName": "File",
                    "oldValue": "",
                    "newValue": "A1.png"
                }
            ]
        },
        {
            "tab": "Summary",
            "component": "Data Set",
            "object": "DataSet_01",
            "operation": "Inserted",
            "author": "John admin",
            "details": [
                {
                    "fieldName": "Name",
                    "oldValue": "",
                    "newValue": "DataSet_01"
                }]
    }
```

The following table shows the typical API response parameters when you search for existing change request:

Parameter	Description
Title	The name of the change request.
Summary	A short description of the change request.
Type	Type of the change request. It can contain one of the following values: - Request for Change - Request for Information
Affected Item	Object to which change request has been created.
Parent	Parent object of the change request.
Analysis	Analysis report of change request, such as impacted area.
Resolution	Resolution status of the change request. It implies the change request implemented successfully, partially, or fix not required.
Axon Status	Status of change request object.
Severity	Severity of the change request. It can contain one of the following values: - low - medium - high
Urgency	The level of urgency for the change request. It can contain one of the following values: - low - medium - high
Estimated Benefit	Anticipated advantage expected from a particular change request.
Estimated Cost	Projected expense associated with a particular change request.
Created By	Axon user that created the change request.
Created	Date when the change request was created.
Last Updated	Date when the change request was last updated.
Ticket Number	External change request ticket number. For example, JIRA or Service Now ticket number.
Ticket URL	URL of the external change request.
tab	The name of the object tab where you can update the fields containing the changes.
component	The name of the updated grid.

Parameter	Description
object	If the component is Document type, object contains the link to the document. For any other component type, the object field displays the object name.
operation	The operation used to update an object.
author	The name of the user who last updated the change request.
fileName	Displays the document name if the component value type is document. For any other component type, the file name field is not present.
fieldName	The name of the updated object field.
oldValue	The old value of the object before the change request.
newValue	The new value of the object after the change request.
Changes to Review	Displays the details of Changes to review grid.
details	Displays the details of Changes to review grid pop up.

Start Change Requests

Use a REST API to start change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1/start**
Method	POST

Syntax

The following syntax shows a sample API to start a change request:

```
{
    "Change Request ID": 101,
    "Workflow Name": "DefaultWorkflow-2-Process"
}
```

The following table shows the typical API request parameters that you can provide to start a change request:

Parameter	Description
`Change Request ID`	Required. The change request identifier.
`Workflow Name`	Required. The name of a workflow that should apply to the change request..

The following table lists the parameters in the API response:

Parameter	Description
`Success`	The result of the API call. Display one of the following values: - `true`: The change request was created successfully. - `false`: The change request cannot be created due to an error.
`Message`	Description of the API call result.
`Reference URL`	The reference URL contains the change request ID. The change request ID is a unique identifier used by Axon to reference the change request.

Update Change Requests

Use a REST API to update change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1**
Method	PUT

Syntax

The following syntax shows a sample API to update a change request:

```
{
"Change Request ID": "1",
"Title" : "Update API CR Test-1 for Glossary",
"Type": "Request For Change",
"Summary" : "Update  API CR Test-1 for Glossary",
"Parent": "" ,
"Severity": "low",
"Urgency": "High",
"Estimated Benefit": "12",
"Estimated Benefit Currency": "FTE",
"Estimated Cost": "12",
"Estimated Cost Currency": "FTE"
}
```

The following table shows the typical API request parameters that you can provide to update a change request:

Parameter	Description
`Change Request ID`	Required. The change request identifier.
`Title`	Required. The name of the change request.
`Summary`	Required. A short description of the change request.
`Severity`	Required. Severity of the change request. You can provide the following values: - `low` - `medium` - `high`
`Urgency`	Required. The level of urgency for the change request. You can provide the following values: - `low` - `medium` - `high`
`Resolution Status`	Optional. The status of the resolution. You can provide the following values: - `Implemented` - `Partially Implemented` - `Not Implemented` - `Cancelled`
`Resolution Description`	Optional. A short summary of the resolution you provide.
`Analysis`	Optional. An excerpt that contains the assessment of the change request and its associated workflows.

The following table lists the parameters in the API response:

Parameter	Description
`Success`	The result of the API call. Display one of the following values: - `true`: The change request was created successfully. - `false`: The change request cannot be created due to an error.
`Message`	Description of the API call result.
`Reference URL`	The reference URL contains the change request ID. The change request ID is a unique identifier used by Axon to reference the change request.

Complete Change Requests

Use a REST API to complete change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1/<change_request_id>/complete** `change_request_id`: Enter the ID of the change request that you want to complete.
Method	PUT

Syntax

The following table lists the parameters in the API response:

Parameter	Description
`Success`	The result of the API call. Display one of the following values: - `true`: The change request was created successfully. - `false`: The change request cannot be created due to an error.
`Message`	Description of the API call result.

Cancel Change Requests

Use a REST API to cancel change requests.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/change-request/api/v1/<change_request_id>/cancel** `change_request_id`: Enter the ID of the change request that you want to cancel.
Method	PUT

Syntax

The following table lists the parameters in the API response:

Parameter	Description
`Success`	The result of the API call. Display one of the following values: - `true`: The change request was created successfully. - `false`: The change request cannot be created due to an error.
`Message`	Description of the API call result.

CHAPTER 5

Manage Value Lists

You can use a REST API to create, update, and delete a value list for Attribute objects in Axon. You can also use a REST API to search and view the value lists for data set attributes.

You must specify the unique identifier for a Data Set objects in which you want to create, update, or delete the value list. To search for a value list, specify the unique identifier for a Data Set object for which you want to retrieve the attribute values.

When you make the API call, Axon displays the status of the API call in the response body.

Create Value Lists

Use a REST API to create a value list for Attribute objects in Axon.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/valuelist/v1/dataset/<datasetID>/values/_bulk?isOverwrite=false**
Method	POST

Syntax

The following table shows the typical query parameters that you can provide for the value list API:

Parameter	Description
`datasetID`	Required. The data set in which you want to create attribute values.
`isOverwrite`	Optional. Whether you want to append to the existing values or override the existing values while you create a value list. You can enter "`true`" or "`false`." The default value is "`false`."

The following syntax shows a sample API request to create a value list:

```
{
  "objects":
  [
    {
```

```
        "<AttributeName1>": "<AttributeValue1>",
        "<AttributeName2>": "<AttributeValue2>",
      }
    ]
}
```

To create a list of values using a REST API, you must provide an attribute name and a value for the attribute.

Example

The following examples show the values that you can enter in the API body to create value lists for attributes.

Consider that you want to create a value list for Country and Language attributes in the data set with identifier "101".
A sample API query might look like this:

```
http://<Axon_host>:<port>/valuelist/v1/dataset/101/values/_bulk?isOverwrite=false
```

A sample API request is as follows:

```
{
  "objects": [
    {
       "Country": "US",
       "Language": "English-US"
    },
    {
       "Country": "UK",
       "Language": "English-UK"
    }
  ]
}
```

Select the API method as POST. In this example for the data set with identifier "101", you can see that the attribute values `US` and `UK` are populated for the `Country` attribute and the values `English-US` and `English-UK` are populated for the `Language` attribute.

Update Value Lists

Use a REST API to update a value list for Attribute objects in Axon.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	/valuelist/v1/dataset/<datasetID>/values/_bulk `datasetID`: Required. The data set in which you want to update attribute values.
Method	PUT

Syntax

The following syntax shows a sample API request to update a value list:

```
[
  {
```

```
    "ref": "<entryRef>",
    "values": [
      {
        "fieldRef": "<fieldRef>",
        "value": "<Updated Value>"
      }
    ]
  }
]
```

The following table shows the API request parameters that you can provide to update a value list:

Parameter	Description
ref	Row identifier for an attribute value.
fieldRef	Unique identifier for an attribute.
value	Value that you want to update for an attribute.

Note: For more information about how you can retrieve the `ref` and `fieldRef` values, see "Retrieve Value Lists" on page 107.

Example

The following examples show the values that you can enter in the API body to update value lists for attributes.

Consider that you want to update the value `English-UK` to `German` for the `Language` attribute in the data set with identifier "101".
A sample API query might look like this:

```
http://<Axon_host>:<port>/valuelist/v1/dataset/101/values/_bulk
```

A sample API request is as follows:

```
[
  {
    "ref": "218",
    "values": [
      {
        "fieldRef": "2",
        "value": "German"
      }
    ]
  }
]
```

Select the API method as PUT. In this example, you can see that the value `English-UK` is replaced with `German`.

Retrieve Value Lists

Use a REST API to search and view the value lists for data set attributes.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/valuelist/v1/dataset/<datasetID>/values**
Method	GET

Syntax

The following table shows the syntax for a typical API query to retrieve value lists:

Parameter	Description
`datasetID`	Required. A unique numeric identifier for the data set that contains attributes and attribute values.
`limit`	Optional. Number of records to be retrieved.
`viewChanges`	Optional. Indicates whether you want to view the original values or changed values for attributes if an automatic change request is triggered. Enter `true` or `false`.

Example

You want to retrieve only the first two entries of original attribute values for the data set with identifier "101". Specify the following parameters in the API query:

- Set `datasetID` to `101` to retrieve the attribute values for the data set.
- Set `limit` to `2` to retrieve up to two entries.
- Set `viewChanges` to `false` to retrieve the original attribute values even if an automatic change request is progress for the data set.

Enter the following sample query:

```
http://<Axon_host>:<port>/valuelist/v1/dataset/101/values?limit=2&viewChanges=false
```

Select the API method as GET.

The REST client retrieves the following sample output:

```
{
    "totalCount": 2,
    "entries": [
        {
            "ref": "206",
            "values": [
                {
                    "fieldRef": "2",
                    "value": "US"
                },
                {
                    "fieldRef": "1",
                    "value": "English-US"
```

```
                }
            ]
        },
        {
            "ref": "207",
            "values": [
                {
                    "fieldRef": "2",
                    "value": "UK"
                },
                {
                    "fieldRef": "1",
                    "value": "English-UK"
                }
            ]
        }
    ]
}
```


The important parameters in this output are `ref`, `fieldRef`, and `value`.

The following table describes the output parameters:

Parameter	Description
`ref`	Row identifier for an attribute value. In this example, the values `206` and `207` indicate row identifiers for which the attribute values are retrieved.
`fieldRef`	Unique identifier for an attribute. In this example, the values `1` and `2` indicate the identifiers of the attributes for which values are retrieved.
`value`	Value for an attribute. In this example, the retrieved attribute values are `US`, `English-US`, `UK`, and `English-UK`.

Delete Value Lists

Use a REST API to delete a value list for Attribute objects in Axon.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/valuelist/v1/dataset/<datasetID>/values/_bulk** `datasetID`: Required. The data set in which you want to delete attribute values.
Method	DELETE

Example

The following examples show the values that you can enter in the API body to delete value lists for attributes.

Consider that you want to delete the value list for attributes in the data set with identifier "101".

A sample API query might look like this:

```
http://<Axon_host>:<port>/valuelist/v1/dataset/101/values/_bulk
```

Select the API method as DELETE.

CHAPTER 6

Data Marketplace APIs

Use APIs to interact with Axon Data Marketplace.

Retrieve Data Collections by Dataset ID

Use a REST API to retrieve the details of data collection using the ID of its associated dataset.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**unison/v1/unison/_search**
Method	POST

Syntax

In the body of the API query, enter the field properties and the values for each field. Enter the values in the following format:

```
"searchScopes": [
 {
  "facetId": "MARKETPLACE_DATACOLLECTION",
  "fields": [
   "id",
   "name",
   "description",
   "categoryName"
  ],
  "orderList": [
   {
    "field": "id",
    "type": "ASC"
   }
  ],
  "properties": {
   "offset": "0",
   "limit": "100",
   "childrenLevel": "0"
  }
 }
],
"searchGroups": [
 {
```

```
  "operator": "START",
  "active": true,
  "searches": [
   {
    "operator": "START",
    "active": true,
    "facetId": "DATASET",
    "filterGroups": [
     {
      "operator": "START",
      "filters": [
       {
        "operator": "START",
        "type": "OPTIONS",
        "properties": {
         "field": "id",
         "value": "2"
        }
       }
      ]
     }
    ]
   }
  ]
 }
}
```

The following table lists the important parameters that you can enter in the API query:

Parameter	Description
`searchScopes : facetid`	Required. The unique identifier of the facet for which search is performed. Enter `MARKETPLACE_DATACOLLECTION` here.
`fields`	Required. Enter the field name to perform the search on the specified fields.
`fields : id`	Required. The unique identifier of the data collection.
`fields : name`	Required. Name of the data collection.
`fields : categoryname`	Required. Name of the category of the data collection.
`orderList`	Required. Sort the search results based on conditions.
`orderList : field`	Required. Sort the search results based on field name.
`orderList : type`	Required. Sorting the search results based on ascending or descending order.
`properties : offset`	Required. The starting index for the paginated results. **Note:** Default value is 0.
`properties : limit`	Required. The maximum number of results. **Note:** Default value is 50.
`preoperties : childrenLevel`	Required. The number of children level of the linked objects to be retrieved.

Parameter	Description
searchGroups : operator	Required. The logical operators in the REST API query. Enter one of the following values: - To retrieve the first instance of results that satisfy the search conditions, enter START. - To retrieve the results that satisfy all of the search conditions, enter AND. - To retrieve the results that satisfy one of the search conditions, enter OR. - To retrieve the results that do not satisfy any of the search conditions, enter NOT.
searchGroups : active	Required. The boolean value to specify whether you want to apply the condition or not. Enter one of the following values: - To apply the condition, enter True. - To not apply the condition, enter False.
searchGroups : searches	Required. Search using several group of conditions to retrieve the data collection.
searchGroups : searches : operator	Required. The logical operators in the REST API query. Enter START here.
searchGroups : search: active	Required. The boolean value to specify whether you want to apply the condition or not. Enter one of the following values: - To apply the condition, enter True. - To not apply the condition, enter False.
searchGroups : searches : facetID	Required. The unique identifier of the facet.
searchGroups : searches : filterGroups	Required. Set of filters that are applied to search and retrieve data collections.
searchGroups : searches : filterGroups : Operator	Required. The logical operators in the REST API query. Enter START here.
searchGroups : searches : filterGroups : filters	Required. Apply set of filters to search and retrieve the data collections.
searchGroups : searches : filterGroups : filters: operator	Required. The logical operators in the REST API query. Enter START here.
searchGroups : searches : filterGroups : filters: type	Required. The type of the parameter. Enter one of the following types: - To search by value passed, enter VALUE. - To search by object internal value, enter ID. - To search by different fields in the Axon database, enter OPTIONS. - To search by the email ID of the user associated with the object, enter USERS.
searchGroups : searches : filterGroups : filters: properties	Required. Set of conditions for the facet fields to retrieve data collection.

Parameter	Description
searchGroups : searches : filterGroups : filters: properties : field	Required. Set the condition to apply the search on a specific field. Enter the field value as ID here.
searchGroups : searches : filterGroups : filters: properties : value	Required. The unique identifier of the dataset.

Response

When you pass the API query parameters in a REST client, the client retrieves and displays the status of the API call.

The following example shows the response of an API call to retrieve data collection details based on the ID of the dataset:


```
[
  {
    "facetId": "MARKETPLACE_DATACOLLECTION",
    "totalItems": 76,
    "totalHits": 2,
    "fields": [
      "id",
      "name",
      "description",
      "categoryName"
    ],
    "items": [
      {
        "ref": "#386:66",
        "id": "c114917f-956b-49ef-98f0-893356cd780e",
        "values": [
          "c114917f-956b-49ef-98f0-893356cd780e",
          "CUSTOMER",
          "This Data Collection is created by UI Automation",
          "Marketing"
        ]
      },
      {
        "ref": "#386:1",
        "id": "e6ad33a2-47c3-4ccb-9733-371d8a92e201",
        "values": [
          "e6ad33a2-47c3-4ccb-9733-371d8a92e201",
          "KKDataset2",
          " This Data Collection is created by UI Automation ",
          "Asset Management"
        ]
      }
    ]
  }
]
```


The following table lists the important parameters in the response:

Parameter	Description
faceId	The unique identifier of the facet for which search is performed.
totalItems	Total number of collection objects.
totalHits	Total number of objects that match the specified condition.

Parameter	Description
items : ref	Reference identifier of the response object stored in the database.
items : id	The unique identifier of the response object displayed in the Axon interface.

Retrieve Datasets Associated With a Data Collection

Use a REST API to retrieve the datasets in Axon Data Governance that are linked to data collections in Axon Data Marketplace.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**unison/v1/unison/_search**
Method	POST

Syntax

In the body of the API query, enter the field properties and the values. Enter the values in the following format:

```
{
 "searchScopes": [
  {
   "facetId": "DATASET",
   "fields": [
    "id",
    "name",
    "definition"
   ],
   "orderList": [
    {
     "field": "id",
     "type": "ASC"
    }
   ],
   "properties": {
    "offset": "0",
    "limit": "100",
    "childrenLevel": "0"
   }
  }
 ],
 "searchGroups": [
  {
   "operator": "START",
   "active": true,
   "searches": [
    {
     "operator": "START",
     "active": true,
     "facetId": "DATASET",
     "filterGroups": [
```

```
        {
         "operator": "START",
         "filters": [
          {
           "operator": "START",
           "type": "OPTIONS",
           "properties": {
            "field": "datasetPublishStatus",
            "value": "Unpublished"
           }
          }
         ]
        }
       ]
      }
     ]
    }
   ]
}
```

The following table lists the important parameters that you can enter in the API query:

Parameter	Description
`searchScopes : facetid`	Required. Name of the facet. Enter `DATASET` here.
`searchScopes : field`	Required. Name of the fields that you want the object to search.
`properties : offset`	Required. The starting index for the paginated results. **Note:** Default value is `0`.
`searchScopes : limit`	Required. The maximum number of results. **Note:** Default value is `50`.
`searchScopes : childrenLevel`	Required. The number of children level of the linked objects to be retrieved.
`searchGroups`	Required. Search using several group of conditions to retrieve the data collection.
`searchGroups : operator`	Required. The logical operators in the REST API query. Enter one of the following values: - To retrieve the first instance of results that satisfy the search conditions, enter `START`. - To retrieve the results that satisfy all of the search conditions, enter `AND`. - To retrieve the results that satisfy one of the search conditions, enter `OR`. - To retrieve the results that do not satisfy any of the search conditions, enter `NOT`. **Note:** Default value is `START`.
`searchGroups : active`	Required. The boolean value to specify whether you want to apply the condition or not. Enter one of the following values: - To apply the condition, enter `True`. - To not apply the condition, enter `False`.
`properties`	Required. The pair of search criteria and it's value.
`properties : field`	Required. The field name based on which the API search is performed.
`properties : value`	Required. The value of the field name that you want to search.

Parameter	Description
objectList	Required. Sort the search result based on conditions.
objectList : field	Required. Sort the search result based on the field name. Enter datasetPublishStatus here.
objectList : type	Required. Sort the search result based on the ascending or descending order.

Response

When you pass the API query parameters in the REST client, the client displays a response for the request query based on the parameters you had mapped with values.

The following example shows the response of an API call to retrieve the datasets based on the status:

```
[
 {
  "facetId": "DATASET",
  "totalItems": 6,
  "totalHits": 1,
  "fields": [
   "id",
   "name",
   "definition"
  ],
  "items": [
   {
    "ref": "#28:5",
    "id": "6",
     "values": [
      "6",
      "KKDataset4",
      "KKDataset4 definition"
     ]
   }
  ]
 }
]
```

The following table lists the important parameters in the response:

Parameter	Description
facetId	The unique identifier of the facet as displayed in the Axon interface.
totalItems	Total number of dataset objects.
totalHits	Number of objects that matches the specific condition.
items : ref	Reference identifier of the response object stored in the database.
items : id	The unique identifier of the response object displayed in the Axon interface.

Retrieve Delivery Target Details

Use a REST API to retrieve all of the delivery targets of a data collection.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/provisioning/provisioned_target/for_data_collection/<data_collection_id>**
Method	GET

Syntax

The following table shows the query parameter that you need to provide for the API:

Parameter	Description
`data_collection_id`	Required. The identifier of the data collection to retrieve all delivery targets.

Manage Orders

Use REST APIs to manage orders in Axon Data Marketplace.

Retrieve Order Details by ID

Use a REST API to retrieve the details of a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/<id>**
Method	GET

Syntax

The following table shows the query parameter that you need to provide for the API:

Parameter	Description
`id`	Required. The identifier of the order for which you want to retrieve the details.

Update Order Status

Use a REST API to update the status of a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/<id>**
Method	PATCH

Update Status of Orders

The following table shows the query parameters that you need to provide for the API:

Parameter	Description
`id`	Required. The identifier of the order for which you want to update the status.
`status`	Required. The status of the order that you want to update.

Retrieve Orders

Use a REST API to retrieve the orders in Axon Data Marketplace.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/inventory**
Method	POST

Syntax

Use APIs to retrieve orders for Data Marketplace administrators, Technical Owners, and Default Technical Owners. The results are refined based on the filter values that you provide. The following syntax shows the typical API request to retrieve orders:

```
{
  "offset": 0,
  "limit": 0,
  "sortField": "string",
  "sortOrder": "string",
  "consumers": [
    "string"
  ],
  "dataCollections": [
    "string"
  ],
  "categories": [
    "string"
  ],
```

```
  "statuses": [
    "string"
  ],
  "creationDateRange": {
    "from": 0,
    "to": 0
  }
}
```

The following table shows the API request parameters that you can provide to retrieve orders:

Parameter	Description
offset	Required. The offset value for pagination. The value "0" indicates that you want to retrieve and display entries from the beginning.
limit	Required. The number of orders that you want to retrieve.
sortField	Required. The field based on which you want to sort the results. For example, if you provide the creationTimestamp field, the order details are sorted based on the created timestamp.
sortOrder	Required. The sorting order for the results. To sort the results in ascending order, enter ASC, and to sort results in descending order, enter DESC.
consumers	Optional. The identifier of the consumer that requested for a data collection.
dataCollections	Optional. The identifier of the data collections in the order.
categories	Optional. The category identifier of the data collection.
statuses	Optional. The status of the order. You can provide the following values: - PENDING - APPROVED - COMPLETE - REJECTED - CANCELLED
creationDateRange	Optional. The created date range for the order. For example, you can provide the following date format: Sat Jan 01 2000 00:00:00 GMT => 946684800000

Create an Order

Use a REST API to create a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order**
Method	POST

Syntax

If you are a data consumer, you can use APIs to create orders. The following syntax shows a sample API request to create an order:

```
{
  "dataCollectionRef": "string",
  "justification": "string",
  "requestedProvisionedTargetRef": "string",
  "customFieldValues": [
    {
      "customFieldMetadataRef": "string",
      "customFieldEnumRef": "string",
      "customFieldValue": "string"
    }
  ],
  "policyAcceptance": {
    "policyRefs": [
      "string"
    ]
  },
  "deliveryRequests": "string",
  "externalTicket": {
    "ticketRef": "string",
    "json": "string"
  }
}
```

The following table shows the typical API request parameters that you can provide to create an order:

Parameter	Description
`dataCollectionRef`	Required. The identifier of the data collection for which you want to create an order.
`justification`	Optional. Brief description about your use of the data collection. The data owner reads this description to decide whether the access request to the data collection is valid.
`requestedProvisionedTargetRef`	Optional. The identifier of the delivery target based on the delivery method and format.
`customFieldValues`	Optional. The custom field values that you want to add to an order.
`policyAcceptance`	Optional. The identifier of policy acceptance for a data collection.
`deliveryRequests`	Optional. Additional notes for the order request.

Create an Order as Another User

As the Data Marketplace Administrator, you can use a REST API to create an order on behalf of a data consumer.

The following guidelines apply to this API:

- To create an order on behalf of a data consumer using REST API, the Data Marketplace Administrator role must be assigned to the user's profile in Axon.
- A Data Marketplace Administrator cannot use this API to create an order on behalf of the Default Technical Owner for Data Marketplace, Data Marketplace Administrators and Axon SuperAdmin Users. The administrator can use this API to create an order only on behalf of data consumers who have not been assigned with the Data Marketplace Administrator role.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/impersonate/<axon_user_id>** In `axon_user_id`, enter the Axon user name of the data consumer on whose behalf the order is being created.
Method	POST

Syntax

The following syntax shows a sample API request:

```
{
  "dataCollectionRef": "01234567-89ab-cdef-0123-4567890abcde",
  "justification": "string",
  "requestedProvisionedTargetRef": "01234567-89ab-cdef-0123-4567890abcde",
  "customFieldValues": [
    {
      "customFieldMetadataRef": "string",
      "customFieldEnumRef": "string",
      "customFieldValue": "string"
    }
  ],
  "policyAcceptance": {
    "policyRefs": [
      "string"
    ]
  },
  "deliveryRequests": "string",
  "externalTicket": {
    "ticketRef": "string",
    "json": "string"
  }
}
```

The following table shows the typical API request parameters that you can provide to create an order:

Parameter	Description
`dataCollectionRef`	Required. The identifier of the data collection for which you want to create an order.
`justification`	Optional. Brief description about your use of the data collection. The data owner reads this description to decide whether the access request to the data collection is valid.
`requestedProvisionedTargetRef`	Optional. The identifier of the delivery target based on the delivery method and format.
`customFieldValues`	Optional. The custom field values that you want to add to an order.
`deliveryRequests`	Optional. Additional notes for the order request.
`policyAcceptance`	Optional. The identifier of policy acceptance for a data collection.

The following table lists the parameters in the API response:

Parameter	Description
id	The order request identifier.

Fulfill an Order

Use a REST API to fulfill a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/<id>/fulfill**
Method	POST

Syntax

A technical owner or default technical owner can use APIs to fulfill order requests. The following table shows the typical query parameters that you can provide for the API to fulfill order requests:

Parameter	Description
id	Required. The identifier of the order request.
comment	Optional. The comment that you want to add to the order request.
grantedProvisionedTargetRef	Required. The identifier of the delivery target that you use to deliver the data. .

Add Comments to an Order

Use a REST API to comment on a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/order/<id>/comment**
Method	POST

Syntax

The following table shows the typical query parameters that you can provide for the API to add comments to an order:

Parameter	Description
`id`	Required. The identifier of the order.
`comment`	Required. The comment that you want to add to the order.

Retrieve Custom Fields of Orders

Use a REST API to retrieve the custom fields of a Axon Data Marketplace order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/customfield/metadata/facet-id/<facetId>**
Method	GET

Syntax

The following table shows the query parameter that you need to provide for the API:

Parameter	Description
`facetId`	Required. The identifier of the custom field for an order.

Manage Consumer Accesses

Use REST APIs to manage consumer accesses in Axon Data Marketplace.

Retrieve Consumer Access by ID

Use a REST API to retrieve the details of a Axon Data Marketplace consumer access using its ID.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/consumeraccess/<id>**
Method	GET

Syntax

The following table shows the query parameter that you need to provide for the API:

Parameter	Description
`id`	Required. The identifier of the consumer access object for which you want to retrieve the details.

Update Status of Consumer Access

Use a REST API to update the status of a Axon Data Marketplace consumer access.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/consumeraccess/<id>**
Method	PATCH

Syntax

The following table shows the query parameters that you need to provide for the API:

Parameter	Description
`id`	Required. The identifier of the consumer access object for which you want to update the status.
`status`	Required. The status of the consumer access object that you want to update.

Retrieve Consumer Access by Order ID

Use a REST API to retrieve the details of a Axon Data Marketplace consumer access using the ID of its associated order.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/consumeraccess/order/<id>**
Method	GET

Syntax

The following table shows the query parameter that you need to provide for the API:

Parameter	Description
id	Required. The identifier of the order to retrieve the consumer access objects.

Retrieve Consumer Access Details

Use a REST API to retrieve the details of a Axon Data Marketplace consumer access.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/consumeraccess/datacollection**
Method	POST

Syntax

Use APIs to retrieve consumer access details for Data Marketplace administrators, Technical Owners, and Default Technical Owners. The results are refined based on the filter values that you provide. The following syntax shows the typical API request to create consumer access:

```
{
  "offset": 0,
  "limit": 0,
  "sortField": "string",
  "sortOrder": "string",
  "consumers": [
    "string"
  ],
  "dataCollections": [
    "string"
  ],
  "categories": [
    "string"
  ],
  "statuses": [
```

```
      "string"
    ],
    "creationDateRange": {
      "from": 0,
      "to": 0
    },
    "updatedDateRange": {
      "from": 0,
      "to": 0
    }
  }
```

The following table shows the API request parameters that you can provide to retrieve consumer access details:

Parameter	Description
offset	Required. The offset value for pagination. The value "0" indicates that you want to retrieve and display entries from the beginning.
limit	Required. The number of consumer access objects that you want to retrieve.
sortField	Required. The field based on which you want to sort the results. For example, if you provide the creationTimestamp field, the consumer access objects are sorted based on the created timestamp.
sortOrder	Required. The sorting order for the results. To sort the results in ascending order, enter ASC, and to sort results in descending order, enter DESC.
consumers	Optional. The identifier of the consumer that requested for a data collection.
dataCollections	Optional. The data collection identifier for the consumer access object.
categories	Optional. The category identifier of the data collection.
statuses	Optional. The statuses of consumer access objects. You can provide the following values: - ACTIVE - PENDING REVOKE - REVOKED
creationDateRange	Optional. The created date range for the consumer access object.
updatedDateRange	Optional. The updated date range for the consumer access object.

Add Comments to Consumer Access

Use a REST API to comment on a Axon Data Marketplace consumer access.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/dmp/consumeraccess/<id>/comment**
Method	POST

Syntax

The following table shows the API query parameters that you can provide to add comments to a consumer access object:

Parameter	Description
`id`	Required. The identifier of the consumer access object.
`comment`	Required. The comment that you want to add to the consumer access.

Examples of Data Marketplace API Usage

You can find examples of using REST APIs to work with Data Marketplace items.

Search for Data Collections

This is an example of using API to search for data collections.

Endpoint: **unison/v2/facet/_search**
Method: POST

Sample payload:

```
{
  "mainFacet": "MARKETPLACE_DATACOLLECTION",
  "searchGroups": [
    {
      "operator": "START",
      "active": true,
      "searches": [
        {
          "operator": "START",
          "active": true,
          "facetId": "MARKETPLACE_DATACOLLECTION",
          "filterGroups": [
            {
              "operator": "START",
              "filters": [
                {
                  "operator": "START",
                  "type": "VALUE",
                  "properties": {
```

```
                    "field": "name",
                    "value": "Inventory Data"
                  }
                }
              ]
            }
          ]
        }
      ]
    }
  ],
  "searchScopes": {
    "mainFacet": {
      "facetId": "MARKETPLACE_DATACOLLECTION",
      "orderList": [
        {
          "field": "id",
          "type": "ASC"
        }
      ]
    }
  }
}
Response:-
Status code-200
{
    "mainObject": {
        "facetId": "MARKETPLACE_DATACOLLECTION",
        "totalItems": 74,
        "totalHits": 1,
        "fields": [
            "id",
            "name",
            "description",
            "custrefid",
            "creationTimestamp",
            "editedTimestamp",
            "status",
            "categoryId",
            "categoryName",
            "categoryStatus",
            "dataSetIds",
            "dataSetNames",
            "dqScore",
            "dqGreenTarget",
            "dqAmberTarget",
            "owners",
            "ownersNames",
            "provisioningFormat",
            "provisioningMethod",
            "provisioningTarget",
            "rating"
        ],
        "items": [
            {
                "ref": "#388:71",
                "id": "fd6454ad-854f-4325-86b1-7dcd9a57b917",
                "values": [
                    "fd6454ad-854f-4325-86b1-7dcd9a57b917",
                    "Inventory Data",
                    "Inventory Data description",
                    "DC-72",
                    "2023-08-18 07:21:26",
                    "2023-08-18 12:49:11",
                    "PUBLISHED",
                    "815445d8-4231-43ad-8dfd-8f5755141cd6",
                    "Marketing",
                    "ACTIVE",
                    "2",
                    "DS_XSSCATEGORY_PAYLOAD",
                    "",
```

```
                    "",
                    "",
                    "[1]",
                    "John Admin",
                    "XML",
                    "FTP",
                    "OTHER, d6c615d8-a8fd-4e84-892c-11c8ed16114a",
                    "0.0"
                ],
                "relationships": [
                    {
                        "toFacet": "DATASET",
                        "relationships": [
                            {
                                "id": "2",
                                "extra": {}
                            }
                        ]
                    },
                    {
                        "toFacet": "PEOPLE",
                        "relationships": [
                            {
                                "id": "1",
                                "extra": {}
                            }
                        ]
                    }
                ]
            }
        ]
    },
    "relatedObjects": [
        {
            "facetId": "ROLE",
            "totalItems": 12,
            "totalHits": 0
        },
        {
            "facetId": "DATAQUALITY",
            "totalItems": 3,
            "totalHits": 0
        },
        {
            "facetId": "SYSTEM",
            "totalItems": 4,
            "totalHits": 0
        },
        {
            "facetId": "GLOSSARY",
            "totalItems": 4,
            "totalHits": 0
        },
        {
            "facetId": "PEOPLE",
            "totalItems": 51,
            "totalHits": 1,
            "fields": [
                "id",
                "fullName",
                "firstName",
                "lastName",
                "email",
                "function",
                "employeeType",
                "orgUnitRef",
                "orgUnitId",
                "orgUnitName",
                "axonStatus",
                "profileId",
                "profileName",
```

```
            "lastLogon",
            "lifecycle",
            "lanID",
            "createdDate",
            "lastUpdatedDate",
            "officeLocation",
            "internalMailCode",
            "officeTelephone",
            "mobileTelephone"
        ],
        "items": [
            {
                "ref": "#69:5",
                "id": "1",
                "values": [
                    "1",
                    "John Admin",
                    "John",
                    "Admin",
                    "admin@informatica.com",
                    "Admin User",
                    "",
                    "GROUP",
                    "1",
                    "Group",
                    "Active",
                    "6",
                    "SuperAdmin",
                    "2023-08-18",
                    "",
                    "",
                    "2023-08-16",
                    "2023-08-18",
                    "",
                    "",
                    "",
                    ""
                ]
            }
        ]
    },
    {
        "facetId": "ATTRIBUTE",
        "totalItems": 10,
        "totalHits": 0
    },
    {
        "facetId": "DATASET",
        "totalItems": 5,
        "totalHits": 1,
        "fields": [
            "id",
            "name",
            "definition",
            "refNumber",
            "type",
            "axonStatus",
            "lifecycle",
            "systemId",
            "systemName",
            "glossaryId",
            "glossaryName",
            "collectionIds",
            "collectionNames",
            "collectionCategoryNames",
            "datasetPublishStatus",
            "createdBy",
            "createdById",
            "createdDate",
            "lastUpdatedDate",
            "accessControl",
```

```
                    "ciUsage",
                    "segments",
                    "segmentsName",
                    "lastApprovedDate",
                    "dqScore",
                    "dqGreenTarget",
                    "dqAmberTarget"
                ],
                "items": [
                    {
                        "ref": "#29:0",
                        "id": "2",
                        "values": [
                            "2",
                            "DS_XSSCATEGORY_PAYLOAD",
                            "DS_XSSCATEGORY_PAYLOAD",
                            "DS-2",
                            "Value List",
                            "Active",
                            "Approved",
                            "1",
                            "MARKETPLACE_SYSTEM",
                            "1",
                            "GLOSSARY_MARKETPLACE",
                            "fd6454ad-854f-4325-86b1-7dcd9a57b917",
                            "Inventory Data",
                            "Marketing",
                            "Published",
                            "John Admin",
                            "1",
                            "2023-08-16",
                            "2023-08-16",
                            "Public",
                            "",
                            "ENTERPRISE",
                            "Enterprise",
                            "",
                            "",
                            "",
                            ""
                        ]
                    }
                ]
            }
        ]
    }
```


Create Data Collections

This is an example of using API to create a data collection.

Endpoint: **bulkupload/v1/objects**
Method: POST

Sample payload:


```
{
  "type": "Data Collection",
  "stopOnWarning": true,
  "Segment": "public",
  "objects": [
    {
      "Name": "Health Data",
      "Description": "Health Data description",
      "Status": "PUBLISHED",
      "Data Set IDs": "1, 2",
      "Owners": "1,10",
      "Technical Owners": "2",
      "Category ID": "Operations",
```

```
      "Policies": "1, 2",
      "Prefix": "API",
      "Delivery Options": "Delivery_Target1_Preferred,Delivery_Target3_Non_Preferred",
      "Custom Fields": "CF_Text:Marketplace, CF_Number:2511"
    }
  ]
}

Sample Response:
Status code-201
{
    "id": "25",
    "type": "DataCollection_bulkCreate",
    "progress": {
        "id": "25",
        "status": "NEW",
        "expectedTicks": 1
    },
    "creationTime": "2023-08-18T13:38:26.069+05:30",
    "createdBy": "1",
    "itemsCount": 1,
    "options": {
        "SEGMENT": "public",
        "STOP_ON_WARNING": "true",
        "ONBOARDING": "false"
    },
    "fieldMappings": [
        {
            "sourceField": "Status",
            "targetField": "Status"
        },
        {
            "sourceField": "Description",
            "targetField": "Description"
        },
        {
            "sourceField": "Policies",
            "targetField": "Policies"
        },
        {
            "sourceField": "Custom Fields",
            "targetField": "Custom Fields"
        },
        {
            "sourceField": "Data Set IDs",
            "targetField": "Data Set IDs"
        },
        {
            "sourceField": "Technical Owners",
            "targetField": "Technical Owners"
        },
        {
            "sourceField": "Prefix",
            "targetField": "Prefix"
        },
        {
            "sourceField": "Category ID",
            "targetField": "Category ID"
        },
        {
            "sourceField": "Delivery Options",
            "targetField": "Delivery Options"
        },
        {
            "sourceField": "Name",
            "targetField": "Name"
        },
        {
            "sourceField": "Owners",
            "targetField": "Owners"
        }
```

```
    ]
}
```

Get Job Status of Creating a Data Collection

This is an example of using API to get the job status when you create a data collection.

Endpoint: **bulkupload/v1/job/<job ID>**
Method: GET

Sample response:


```
{
    "id": "25",
    "type": "DataCollection_bulkCreate",
    "displayName": "Data Collection : Upload New Items",
    "progress": {
        "id": "25",
        "status": "COMPLETED",
        "message": "Job Completed successfully.",
        "expectedTicks": 1
    },
    "creationTime": "2023-08-18T13:38:26.069+05:30",
    "completedTime": "2023-08-18T13:38:37.143+05:30",
    "createdBy": "1",
    "reportSummary": {
        "errors": 0,
        "warnings": 0
    },
    "itemsCount": 1,
    "options": {
        "SEGMENT": "public",
        "STOP_ON_WARNING": "true",
        "ONBOARDING": "false"
    },
    "fieldMappings": [
        {
            "sourceField": "Status",
            "targetField": "Status"
        },
        {
            "sourceField": "Description",
            "targetField": "Description"
        },
        {
            "sourceField": "Policies",
            "targetField": "Policies"
        },
        {
            "sourceField": "Custom Fields",
            "targetField": "Custom Fields"
        },
        {
            "sourceField": "Data Set IDs",
            "targetField": "Data Set IDs"
        },
        {
            "sourceField": "Technical Owners",
            "targetField": "Technical Owners"
        },
        {
            "sourceField": "Prefix",
            "targetField": "Prefix"
        },
        {
            "sourceField": "Category ID",
            "targetField": "Category ID"
        },
        {
```

```
            "sourceField": "Delivery Options",
            "targetField": "Delivery Options"
        },
        {
            "sourceField": "Name",
            "targetField": "Name"
        },
        {
            "sourceField": "Owners",
            "targetField": "Owners"
        }
        ]
}
```

Update Data Collections

This is an example of using API to update a data collection.

Endpoint: **bulkupload/v1/objects**
Method: PUT

Sample payload:

```
{
  "type": "Data Collection",
  "stopOnWarning": true,
  "Segment": "public",
  "objects": [
    {
      "Data Collection Reference":"API-1",
      "Name": "Health Data Updated",
      "Description": "Health Data description updated using bulk update",
      "Status": "PUBLISHED",
      "Data Set IDs": "1,3",
      "Owners": "1,9",
      "Technical Owners": "1",
      "Category ID": "Operations",
      "Policies": "1, 2,3",
      "Prefix": "APIUp",
      "Delivery Options": "Delivery_Target1_Preferred,Delivery_Target4_Non_Preferred",
      "Custom Fields": "CF_Text:Data Marketplace, CF_Number:1995"
    }
  ]
}

Sample Response:
Status code-200
{
    "id": "29",
    "type": "DataCollection_bulkUpdate",
    "progress": {
        "id": "29",
        "status": "NEW",
        "expectedTicks": 1
    },
    "creationTime": "2023-08-18T14:15:22.635+05:30",
    "createdBy": "1",
    "itemsCount": 1,
    "options": {
        "STOP_ON_WARNING": "true",
        "ONBOARDING": "false"
    },
    "fieldMappings": [
        {
            "sourceField": "Status",
            "targetField": "Status"
        },
        {
            "sourceField": "Description",
```

```
            "targetField": "Description"
        },
        {
            "sourceField": "Policies",
            "targetField": "Policies"
        },
        {
            "sourceField": "Data Set IDs",
            "targetField": "Data Set IDs"
        },
        {
            "sourceField": "Prefix",
            "targetField": "Prefix"
        },
        {
            "sourceField": "Category ID",
            "targetField": "Category ID"
        },
        {
            "sourceField": "Name",
            "targetField": "Name"
        },
        {
            "sourceField": "Owners",
            "targetField": "Owners"
        },
        {
            "sourceField": "Custom Fields",
            "targetField": "Custom Fields"
        },
        {
            "sourceField": "Data Collection Reference",
            "targetField": "Data Collection Reference"
        },
        {
            "sourceField": "Technical Owners",
            "targetField": "Technical Owners"
        },
        {
            "sourceField": "Delivery Options",
            "targetField": "Delivery Options"
        }
    ]
}
```

Get Job Status of Updating a Data Collection

This is an example of using API to get the job status when you update a data collection.

Endpoint: **bulkupload/v1/job/<job_id>**
Method: GET

Sample response:

```
{
    "id": "29",
    "type": "DataCollection_bulkUpdate",
    "displayName": "Data Collection : Update New Items",
    "progress": {
        "id": "29",
        "status": "COMPLETED",
        "message": "Job Completed successfully.",
        "expectedTicks": 1
    },
    "creationTime": "2023-08-18T14:15:22.635+05:30",
    "completedTime": "2023-08-18T14:15:32.852+05:30",
    "createdBy": "1",
    "reportSummary": {
        "errors": 0,
```

```
            "warnings": 0
        },
        "itemsCount": 1,
        "options": {
            "STOP_ON_WARNING": "true",
            "ONBOARDING": "false"
        },
        "fieldMappings": [
            {
                "sourceField": "Status",
                "targetField": "Status"
            },
            {
                "sourceField": "Description",
                "targetField": "Description"
            },
            {
                "sourceField": "Policies",
                "targetField": "Policies"
            },
            {
                "sourceField": "Custom Fields",
                "targetField": "Custom Fields"
            },
            {
                "sourceField": "Data Collection Reference",
                "targetField": "Data Collection Reference"
            },
            {
                "sourceField": "Data Set IDs",
                "targetField": "Data Set IDs"
            },
            {
                "sourceField": "Technical Owners",
                "targetField": "Technical Owners"
            },
            {
                "sourceField": "Prefix",
                "targetField": "Prefix"
            },
            {
                "sourceField": "Category ID",
                "targetField": "Category ID"
            },
            {
                "sourceField": "Delivery Options",
                "targetField": "Delivery Options"
            },
            {
                "sourceField": "Name",
                "targetField": "Name"
            },
            {
                "sourceField": "Owners",
                "targetField": "Owners"
            }
        ]
    }
```

CHAPTER 7

Other APIs in Axon

This chapter includes the following topics:

- Retrieve Links Between Axon and External Applications, 137
- Retrieve Data Quality Rules, 143
- Retrieve Data Quality Report, 145
- Add Data Quality Scores, 149
- Update Data Quality Scores, 150
- Delete Data Quality Reports, 152
- Retrieve Segment Names for Segment IDs, 152
- Retrieve Documents, 154

Retrieve Links Between Axon and External Applications

You can use a REST API to retrieve the links between Axon objects and objects in external applications. For example, use a REST API to retrieve the links between Axon objects and Enterprise Data Catalog technical assets.

In an API request, the source object is Axon. The target objects that the API supports are external applications such as Enterprise Data Catalog, Secure@Source, and Informatica Data Quality. You can use the target information to find information about other related sources. If you provide the source information, the API finds the related target information. For example, if you provide information on Axon attributes, you can find the related Enterprise Data Catalog fields using the API.

You can retrieve the following links between Axon and other applications:

- Axon attribute and Enterprise Data Catalog field
- Axon system and Enterprise Data Catalog resource
- Axon data quality rules and Informatica Data Quality rules
- Axon policy and Secure@Source policy

Endpoint, Method and Syntax

Use API requests to retrieve links between Axon objects and objects in other applications. You can provide an API request with source information to retrieve target information. You can also provide an API request with target information to retrieve source information.

Retrieve Links Based on Source Information

If you want to retrieve the target information for external applications, you must provide the source parameters for Axon in the API request.

The following table lists the source parameters for the API to retrieve the linked target information:

Property	Description
Endpoint	**/api/v1/referencelinks?sourceIds[]=<source_identifier>&entityType=<object_classtype>&systemIdentifier=<sourcename>&relationshipNames[]=<relationshipname_for_linkedobjects>**
Method	GET

Retrieve Links Based on Target Information

If you want to retrieve the source information for Axon, you must provide the target parameters in the API request.

Before you pass the target information, you need to retrieve the target identifiers by passing the source identifiers in the API. For example, an Axon system is connected to a single Enterprise Data Catalog resource. The Enterprise Data Catalog resource might be connected to multiple Axon systems. First, you need to provide the Axon system information in the API client to retrieve the linked Enterprise Data Catalog resource information. Then, you can provide the Enterprise Data Catalog resource information to retrieve the linked Axon systems.

The following table lists the target parameters for the API to retrieve the linked source information:

Property	Description
Endpoint	**/api/v1/referencelinks?targetIds[]=<target_identifier>&entityType=<object_classtype>&systemIdentifier=<targetname>&relationshipNames[]=<relationshipname_for_linkedobjects>**
Method	GET

Syntax

The following table lists the important query parameters exposed for this API:

Parameter	Description
`sourceIds`	An array of source identifiers. The source refers to Axon. You need to provide source identifiers if you want to retrieve the linked target objects. For example, to retrieve Enterprise Data Catalog fields that are linked to Axon attributes, you need to pass the attribute identifiers.
`targetIds`	An array of target identifiers. The target refers to external applications such as Enterprise Data Catalog, Informatica Data Quality, and Secure@Source. You need to provide target identifiers if you want to retrieve the linked source objects. For example, to retrieve Axon attributes that are linked to Enterprise Data Catalog fields, you must pass the field identifiers. **Note:** Before you pass the target identifier, you must retrieve the target identifiers by passing the source identifiers in the REST API.
`entityType`	The class type of the object for which you provide the identifiers. Axon objects can have the following values: - System: `Axon\AppBundle\Entity\System` - Attribute: `Axon\AppBundle\Entity\CatItemComponent` - Data Quality Rule: `DQMeasure` - Policy: `Axon\AppBundle\Entity\Policy` Enterprise Data Catalog technical assets can have the following values: - Resource: `core.Resource` - Field: `com.infa.ldm.relational.Column` Informatica Data Quality rules can have the following values: - Rule Mapplet: `RULE_MAPPING` - Rule Specification: `RULE_DEFINITION` - Profile or a Scorecard: `com.infa.profiling.ProfileDefinition` Secure@Source policy can have the following value: - Policy: `policy`

Parameter	Description
systemIdentifier	Unique identifier for the application. You define the parameters for the application in the API and the value for the identifier depends on the source or target identifiers that you provide. You can enter the following values: - If the source is Axon, the value is "Axon". - If the target is Enterprise Data Catalog, the value is "EIC". - If the target is Informatica Data Quality, the value is "DQ". - If the target is Secure@Source, the value is " SATS".
relationshipNames	Optional. An array of relationship names or labels for the relationship between Axon and external application objects. If you want the linked objects for a specific relationship, you can filter by providing the relationship names. If you want to filter based on the relationship between Axon objects and Enterprise Data Catalog assets, enter the following values: - System to Resource: AxonSystemToEICResource - Attribute to Field: AxonAttributeToEICColumn If the link is between Axon and Secure@Source, enter the value AxonPolicyToSATSPolicy. If the link is between Axon and Informatica Data Quality, enter the value AxonProfileRelationship. **Note:** Use the relationshipNames parameter for standard and local data quality rules. You cannot use this parameter for automatically created data quality rules because there are no data quality objects that can be displayed.

Example 1. Retrieve Linked Resources

Consider an Axon system that is linked to an Enterprise Data Catalog resource. To retrieve the linked Enterprise Data Catalog resource information, use the following sample API request with the Axon system information:

http(s)://<Axon_host>:<port>/api/v1/referencelinks?sourceIds[]=1&entityType=Axon\AppBundle\Entity\System&systemIdentifier=Axon&relationshipNames[]=AxonSystemToEICResource

The REST API URL request contains the following information:

Parameter	Description
sourceIds[]=1	This parameter indicates that the identifier for the Axon system is "1."
entityType=Axon\AppBundle\Entity\System	This parameter indicates that the entity type is an Axon system.
systemIdentifier=Axon	This parameter indicates that the identifier for the source is Axon.
relationshipNames[]=AxonSystemToEICResource	The relationship label for the link between an Axon system and Enterprise Data Catalog resource.

The REST API Client displays the following response for the aforementioned sample API request with the linked Enterprise Data Catalog resource information:

```
{
          "results": [
              {
                  "objectIdentifier": "1",
                  "systemIdentifier": "Axon",
                  "entityType": "Axon\AppBundle\Entity\System",
                  "links": [
                      {
                          "relationshipName": "AxonSystemToEICResource"
                          "objectIdentifier": "AmazonS3://AmazonS3"
                          "systemIdentifier": "EIC"
                          "entityType": "core.Resource"
                          "properties": {
                               "ResourceName": " AmazonS3"
                           }
                      }
                   ]
              }
         ]
}
```

The sample response includes the following output information:

Parameter	Description
"results"	An array of elements. Each entry in an array corresponds to a source or target identifier.
"links"	This parameter displays the details of the related object.
"relationshipName": "AxonSystemToEICResource"	The relationship label for the link between an Axon system and Enterprise Data Catalog resource.
"objectIdentifier": "AmazonS3://AmazonS3"	The unique identifier for the linked resource.
"systemIdentifier": "EIC"	This parameter indicates that the entity type is an Enterprise Data Catalog resource.
"entityType": "core.Resource"	This parameter indicates the class type of the Axon attribute.
"properties"	This parameter contains the properties of the inked resource.
"ResourceName": " AmazonS3"	The name of the linked resource.

Example 2. Retrieve Linked Attributes

Consider an Axon attribute that is linked to an Enterprise Data Catalog field. To retrieve the related Axon attribute, use the following sample API request with the Enterprise Data Catalog field information:

http(s)://<Axon_host>:<port>/api/v1/referencelinks?targetIds[]=HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1
&entityType=com.infa.ldm.relational.Column&systemIdentifier=EIC&relationshipNames[]=AxonAttributeToEICColumn

The REST API URL request contains the following information:

Parameter	Description
`targetIds[]=HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1`	The target identifier.
`entityType=com.infa.ldm.relational.Column`	This parameter indicates that the entity type is an Enterprise Data Catalog field.
`systemIdentifier=EIC`	This parameter indicates that the identifier for the target is Enterprise Data Catalog.
`relationshipNames[]=AxonAttributeToEICColumn`	The relationship label for the link between an Axon attribute and Enterprise Data Catalog field.

The REST API Client displays the following response for the aforementioned sample API request with the linked attribute information:

```
{
          "results": [
              {
                  "objectIdentifier": "HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/
ID1",
                  "systemIdentifier": "EIC",
                  "entityType": "com.infa.ldm.relational.Column",
                  "links": [
                      {
                          "relationshipName": "AxonAttributeToEICColumn"
                          "objectIdentifier": "4"
                          "systemIdentifier": "Axon"
                          "entityType": "Axon\AppBundle\Entity\CatItemComponent"
                          "properties": {
                               "ColumnName": "ID1"
                               "ClassType": "com.infa.ldm.file.xml.XMLField"
                           }
                      }
                   ]
              }
         ]
}
```

The sample response includes the following output information:

Parameter	Description
`"results"`	An array of elements. Each entry in an array corresponds to a source or target identifier.
`"links"`	This parameter displays the details of the related object.
`"relationshipName": "AxonAttributeToEICColumn"`	The relationship label for the link between an Axon attribute and Enterprise Data Catalog field.
`"objectIdentifier": "4"`	The unique identifier for the linked attribute. You can use this identifier to find the attribute information, such as attribute name.
`"systemIdentifier": "Axon"`	This parameter indicates that the identifier for the source is Axon.

Parameter	Description
`"entityType": "Axon\AppBundle\Entity\CatItemComponent"`	This parameter indicates the class type of the Axon attribute.
`"properties"`	This parameter contains the properties of the related Enterprise Data Catalog field.
`"ColumnName": "ID1"`	The name of the related Enterprise Data Catalog field.
`"ClassType": "com.infa.ldm.file.xml.XMLField"`	This parameter indicates that the type of the related Enterprise Data Catalog field.

For more examples on retrieving links between Axon objects and objects in external applications, see https://docs.informatica.com/data-quality-and-governance/axon-data-governance/h2l/1260-using-rest-api-to-retrieve-links-between-axon-and-external-/abstract.html.

Retrieve Data Quality Rules

Use a REST API to retrieve data quality rules from Axon. Use this REST API if you do not have Informatica Data Quality. If you use another data quality application, use this API to fetch data quality rules from Axon.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/dqrules**
Method	GET

Syntax

The following table lists the syntax of the REST API query:

Parameter	Description
`limit=<integer>`	Optional. Specify the number of data quality rules that needs to be retrieved. **Note:** By default, endpoint can fetch only 10 data quality rules. Consider the following points while using this parameter: - To retrieve more than 10 rules, enter the integer value in the parameter. - Enter integer value greater than the actual number of data quality rules. For example, if Axon has 50 data quality rules, you should specify the integer value greater than 50.
`offset=<integer>`	Optional. Specify the pagination value to display list of rules. If you do not enter the parameter, 0 is set as the default offset value, and all rules are displayed on screen.

Example

You want to send the Axon data quality rules to your data quality program.

If you want to retrieve only the first 2 entries, specify the following parameters:

- Set limit to 2 to retrieve only 2 entries.
- Set offset to 0 to retrieve entries that start from the beginning.

Your API call might look like this:

```
http://192.0.2.23/api/v1/dqrules?limit=2&offset=0
```

The REST client might retrieve the following 2 entries:


```
Code: 200
Content:{
"total_count": 88,
"results": [
  {
"status": "Active",
"type": "Accuracy",
"systemName": "Finance",
"datasetName": "FX EOD Revenue",
"attributeName": "Fee",
"id": 22,
"referenceNumber": "fin_dqr_8",
"criticality": 3,
"technicalDesc": "Technical description",
"createdDateTime": "2017-09-27T11:41:27+0100",
"lastUpdateDateTime": "2017-09-27T11:41:27+0100",
"dqMeasurePeriodicity": {
"_id": 3,
"_primary_name": "Monthly",
"_description": "Monthly"
},
"primaryName": "Threshold for marketing expenses",
"description": "This is DQ Rule number 22"
  },
  {
"status": "Active",
"type": "Timeliness",
"systemName": "Finance",
"datasetName": "FX EOD Revenue",
"attributeName":
[
   "Cost Center",
   "Expense Type"
]
"id": 23,
"referenceNumber": " fin_dqr_9",
"criticality": 2,
"technicalDesc": "Technical description",
"createdDateTime": "2017-09-27T11:41:27+0100",
"lastUpdateDateTime": "2017-09-27T11:41:27+0100",
"dqMeasurePeriodicity": {
"_id": 3,
"_primary_name": "Monthly",
"_description": "Monthly"
},
"primaryName": "Period for submitting expense report",
"description": "This is DQ Rule number 23"
  }
]}
```


The important parameters in this output are `code`, `total_count`, `primaryName`, `referenceNumber`, `systemName`, `datasetName`, and `attributeName`

The following table describes the output parameters:

Parameter	Description
code	Request status. In this example, the value 200 indicates that the request was successfully sent.
total_count	Number of data quality rules that are present in Axon. In this example, 88 data quality rules are present in Axon.
primaryName	Name of the data quality rule. In this example, the Threshold for marketing expenses and Period for submitting expense report values represent the names of the data quality rules that were retrieved.
referenceNumber	Unique identifier that Axon assigns to each data quality rule. In this example, the rules have the fin_dqr_8 and fin_dqr_9 identifiers.
systemName	System that the data quality rule belongs to. In this example, both rules belong to the Finance system.
datasetName	Data set that the data quality rule applies to. In this example, both rules belong to the FX EOD Revenue data set.
attributeName	Attribute of the data set that the data quality rule applies to. In this example, the data sets have the Fee and Cost Center attributes.

Note: The systemName, datasetName, and attributeName properties are retrieved for local data quality rules. Standard data quality rules do not have these properties associated to them.

Retrieve Data Quality Report

Use a REST API to retrieve data quality report from Axon by data quality rule ID.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**api/v1/dqreports/<DQ_RULE_ID>**
Method	GET

Syntax

The following table lists the syntax of the REST API query:

Parameter	Description
Data quality rule ID	Unique identifier of the data quality rule.

Response

The following table lists the syntax of the API response:

Property	Description
id	Unique identifier of each data quality report.
Reporting Period	Data Quality Report of the data quality rules for a given period in YYYY-MM-DD format.
Threshold	Indicates the threshold value for the data quality score.
Target	Indicates the target value for the data quality score.
Actual	Indicates the actual value of the data quality score.
Volume	Number of observations in the report.
Exceptions	Number of records that did not meet standards.
Link	Data Quality report URL.
Upload Date	Date when the report was uploaded to data quality rule.
Uploaded By	Name of the stakeholder who uploaded the report to data quality rule.
Run Status	Run status indicates the status of the Data Quality jobs.
DQMeasure Ref	Reference ID of the data quality rule.
Dataset	Name of the dataset to which the data quality rule is associated with.
Dataset Ref	Unique reference ID of the dataset.

Example

You want to display the Data Quality Report by data quality rule ID.

Your API call might look like this:

```
http://192.0.2.23/api/v1/dqreports/2
```

The REST client might retrieve the following entries:

```
[
 {
  "id": 1,
  "Reporting Period": "2025-01-19",
  "Threshold": "80.1",
                  "Target": "90.99",
```

```
                    "Actual": "48.32",
                    "Volume": "2",
                    "Exceptions": 40,
                    "Link": "scorecard:/Axomation/
Scorecard_2_MODULES_Oracle12C@MODULE_CODE",
                    "Upload Date": "2025-03-07",
                    "Uploaded By": "John Admin",
                    "Run Status": "Success",
                    "DQMeasure Ref": "Ref1DQRuleAXON_35838",
                    "Dataset": "UploadDatasetForAXON_35838",
                    "Dataset Ref": "DS-1"
   },
   {
   "id": 2,
   "Reporting Period": "2025-03-08",
   "Threshold": "30.67",
                    "Target": "40.27",
                    "Actual": "45.3",
                    "Volume": "2",
                    "Exceptions": 10,
                    "Link": "scorecard:/Axomation/
Scorecard_2_MODULES_Oracle12C@MODULE_CODE",
                    "Last Updated": "2025-02-21",
                    "Uploaded By": "John Admin",
                    "Run Status": "Success",
                    "DQMeasure Ref": "Ref1DQRuleAXON_35838",
                    "Dataset": "UploadDatasetForAXON_35838",
                    "Dataset Ref": "DS-1"
   }
]
```


The following table describes the output parameters:

Parameter	Description
`id`	Unique identifier of each data quality report. In this example, the API call has retrieved the following IDs: - 1 - 2
`Reporting Period`	Data Quality Report of the data quality rules for a given period in YYYY-MM-DD format. In this example, the API call has retrieved the following reporting periods: - 2025-01-19 - 2025-03-08
`Threshold`	Indicates the threshold value for the data quality score. In this example, the API call has retrieved the following threshold values: - 80.1 - 30.67
`Target`	Indicates the target value for the data quality score. In this example, the API call has retrieved the following target values: - 90.99 - 48.32
`Actual`	Indicates the actual value of the data quality score. In this example, the API call has retrieved the following actual values: - 48.32 - 45.3

Parameter	Description
`Volume`	Number of observations in the report. In this example, the API call has retrieved the following volume: `2`

`Exceptions`	Number of records that did not meet standards.
	In this example, the API call has retrieved the following exceptions for each dataset:
	`- 40`
	`- 10`

`Link`	Data Quality report URL. In this example, the API call has retrieved the following URL: `scorecard:/Axomation/Scorecard_2_MODULES_Oracle12C@MODULE_CODE`

`Upload Date`	Date when the report was uploaded to data quality rule.
	In this example, the API call has retrieved the following upload dates:
	`- 2025-03-07`
	`- 2025-02-21`

`Uploaded By`	Name of the stakeholder who uploaded the report to data quality rule. In this example, the API call has retrieved the following upload by value: `John Admin`
`Run Status`	Run status indicates the status of the Data Quality jobs. In this example, the API call has retrieved the following run status: `Success`
`DQMeasure Ref`	Reference ID of the data quality rule. In this example, the API call has retrieved the following DQ Measure Ref: `Ref1DQRuleAXON_35838`
`Dataset`	Name of the dataset to which the data quality rule is associated with. In this example, the API call has retrieved the following dataset: `UploadDatasetForAXON_35838`
`Dataset Ref`	Unique reference ID of the dataset. In this example, the API call has retrieved the following dataset ref: `DS-1`

Add Data Quality Scores

Use a REST API to add the scores in Axon for Data Quality rules. You can use this REST API if you do not have Informatica Data Quality and have not installed the Axon Agent.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/dqscorereport**
Method	POST

Syntax

The following table lists the syntax of the REST API query:

Property	Description

Data parameters for single Data Quality score report	<pre>{"data" : [{
	"executionTime":"2017-09-13",
	"score":73,
	"exceptionCount":4675,
	"identity":"DQ-1",
	"dqReportProvider":"IDQ",
	"rowCount":"14078"
	}
	]}</pre>

Data parameters for multiple Data Quality score reports	<pre>{"data" : [{"executionTime":"2017-09-13","score" : 51, "exceptionCount" : 4444, "identity": "DQ-1","dqReportProvider" : "IDQ","rowCount":"12003"}, {"executionTime":"2017-09-13","score" : 52, "exceptionCount" : 4444, "identity": "DQ-2","dqReportProvider" : "IDQ","rowCount":"10322"}, {"executionTime":"2017-09-13","score" : 53, "exceptionCount" : 3445, "identity": "DQ-3","dqReportProvider" : "IDQ","rowCount":"21096"}, {"executionTime":"2017-09-13","score" : 54, "exceptionCount" : 7844, "identity": "DQ-4","dqReportProvider" : "IDQ","rowCount":"13000"}, {"executionTime":"2017-09-13","score" : 55, "exceptionCount" : 6235, "identity": "DQ-5","dqReportProvider" : "IDQ","rowCount":"12045"}, {"executionTime":"2017-09-13","score" : 56, "exceptionCount" : 6784, "identity": "DQ-6","dqReportProvider" : "IDQ","rowCount":"14004"}, {"executionTime":"2017-09-13","score" : 57, "exceptionCount" : 2345, "identity": "DQ-7","dqReportProvider" : "IDQ","rowCount":"12094"}, {"executionTime":"2017-09-13","score" : 58, "exceptionCount" : 9756, "identity": "DQ-8","dqReportProvider" : "IDQ","rowCount":"11323"}, {"executionTime":"2017-09-13","score" : 59, "exceptionCount" : 1234, "identity": "DQ-10","dqReportProvider" : "IDQ","rowCount":"16056"}, {"executionTime":"2017-09-13","score" : 51, "exceptionCount" : 5678, "identity": "DQ-11","dqReportProvider" : "IDQ","rowCount":"17098"}, {"executionTime":"2017-09-13","score" : 52, "exceptionCount" : 5432, "identity": "DQ-12","dqReportProvider" : "IDQ","rowCount":"18455"}, {"executionTime":"2017-09-13","score" : 53, "exceptionCount" : 8456, "identity": "DQ-13","dqReportProvider" : "IDQ","rowCount":"19454"}, {"executionTime":"2017-09-13","score" : 55, "exceptionCount" : 2345, "identity": "DQ-15","dqReportProvider" : "IDQ","rowCount":"20843"}] }</pre>

Update Data Quality Scores

Use a REST API to update the scores in Axon for Data Quality rules. You can use this REST API if you do not have Informatica Data Quality and have not installed the Axon Agent.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/dqscorereport**
Method	POST

Syntax

The following table lists the syntax of the REST API query:

Property	Description

Data parameters for single Data Quality score report	{"data" : [{
	"executionTime":"2017-09-13",
	"score":73,
	"exceptionCount":4675,
	"identity":"DQ-1",
	"dqReportProvider":"IDQ",
	"rowCount":"14078",
	"dqReportID":1
	}
	]}

Data parameters for multiple Data Quality score reports	{"data" : [{"executionTime":"2017-09-13","score" : 51, "exceptionCount" : 4444, "identity": "DQ-1","dqReportProvider" : "IDQ","rowCount":"12003", "dqReportID" : 2}, {"executionTime":"2017-09-13","score" : 52, "exceptionCount" : 4444, "identity": "DQ-2","dqReportProvider" : "IDQ","rowCount":"10322", "dqReportID" : 3}, {"executionTime":"2017-09-13","score" : 53, "exceptionCount" : 3445, "identity": "DQ-3","dqReportProvider" : "IDQ","rowCount":"21096", "dqReportID" : 4}, {"executionTime":"2017-09-13","score" : 54, "exceptionCount" : 7844, "identity": "DQ-4","dqReportProvider" : "IDQ","rowCount":"13000", "dqReportID" : 5}, {"executionTime":"2017-09-13","score" : 55, "exceptionCount" : 6235, "identity": "DQ-5","dqReportProvider" : "IDQ","rowCount":"12045", "dqReportID" : 6}, {"executionTime":"2017-09-13","score" : 56, "exceptionCount" : 6784, "identity": "DQ-6","dqReportProvider" : "IDQ","rowCount":"14004", "dqReportID" : 7}, {"executionTime":"2017-09-13","score" : 57, "exceptionCount" : 2345, "identity": "DQ-7","dqReportProvider" : "IDQ","rowCount":"12094", "dqReportID" : 8}, {"executionTime":"2017-09-13","score" : 58, "exceptionCount" : 9756, "identity": "DQ-8","dqReportProvider" : "IDQ","rowCount":"11323", "dqReportID" : 9}, {"executionTime":"2017-09-13","score" : 59, "exceptionCount" : 1234, "identity": "DQ-10","dqReportProvider" : "IDQ","rowCount":"16056", "dqReportID" : 10}, {"executionTime":"2017-09-13","score" : 51, "exceptionCount" : 5678, "identity": "DQ-11","dqReportProvider" : "IDQ","rowCount":"17098", "dqReportID" : 11}, {"executionTime":"2017-09-13","score" : 52, "exceptionCount" : 5432, "identity": "DQ-12","dqReportProvider" : "IDQ","rowCount":"18455", "dqReportID" : 12}, {"executionTime":"2017-09-13","score" : 53, "exceptionCount" : 8456, "identity": "DQ-13","dqReportProvider" : "IDQ","rowCount":"19454", "dqReportID" : 13}, {"executionTime":"2017-09-13","score" : 55, "exceptionCount" : 2345, "identity": "DQ-15","dqReportProvider" : "IDQ","rowCount":"20843", "dqReportID" : 14}] }

Delete Data Quality Reports

You can delete Data Quality reports either selectively by specifying report IDs or delete them in bulk by specifying Data Quality rule IDs. To delete specific reports, request an array of Data Quality report IDs in the request payload. To delete all reports associated with particular rules, include an array of rule IDs instead.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/api/v1/dqscorereport**
Method	DELETE

Syntax

The following table lists the syntax of the REST API query:

Property	Description

Data parameters to delete specific reports	{
	"dqReportIds":[<value_1>,<value_2>,<value_3>]
	}

Data parameters to delete reports of a list of Rule IDs	{
	"dqRuleIds":[<value_1>,<value_2>,<value_3>]
	}

Retrieve Segment Names for Segment IDs

Use a REST API to retrieve and display the segment names for segment IDs. Segment IDs are unique reference IDs for segments that are used internally by Axon. The API client retrieves the segments for which you have access. For example, if you have access to three segments, the API client displays the segment ID and segment name of the three segments. If you are an Axon SuperAdmin user, the API client displays the segment ID and segment names of all segments.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**/segment/v1/identity/segment**
Method	GET

Syntax

This API does not require any parameter in the query.

Response

The following table lists the syntax of the API response:

Property	Description
Segment ID	`id`
Segment name	`name`
Segment description	`description`

Example

You want to display the names of the segments for which you have access..

Your API call might look like this:

```
http://192.0.2.23/segment/v1/identity/segment
```

The REST client might retrieve the following 2 entries:

```
[
    {
        "id": "e56bbf89-94b5-4018-a440-6514f04f54f8",
        "name": "Finance",
        "description": "Global Finance Team"
    },
    {
        "id": "b1413265-3955-426a-9fca-aa0970014762",
        "name": "EMEA Ops",
        "description": "EMEA Operations Team"
    }
]
```

The parameters in this output are `id`, `name`, and `description`.

The following table describes the output parameters:

Parameter	Description
`id`	Segment ID. In this example, the API call has retrieved the following segment IDs: - `e56bbf89-94b5-4018-a440-6514f04f54f` - `b1413265-3955-426a-9fca-aa0970014762`
`name`	Segment names. In this example, the API call has retrieved the following segment names: - `Finance` - `EMEA Ops`
`description`	Segment descriptions. In this example, the API call has retrieved the following segment descriptions: - `Global Finance Team` - `EMEA Operations Team`

Retrieve Documents

Use a REST API to retrieve document information related to a particular facet from Axon.

Endpoint and Method

The following table lists the connection parameters for the API:

Property	Description
Endpoint	**retrieve-document/<FACET_NAME>/<OBJECT_ID>**
Method	GET

Syntax

The following table lists the syntax of the REST API query:

Parameter	Description
`viewChanges=<boolean>`	Optional. You can view the information on the changed document associated with the object. If you select true, you can get the latest and changed document information of the object. If you select false, you can view the original document information. Default is false where the endpoint gets the original document information of the object.

Example

You have three documents associated with a dataset with the dataset enabled for a default change request. You want to get the orginal and changed document information from the facet with REST API.

To get the original document information for a dataset with ID as 1, your API call might look like this:

```
https://invrh76axondev001.informatica.com:9443/retrieve-document/Dataset/1
```

The REST client might retrieve the following three original documents:

```
[
{
"Name": "IMG",
"Description": "IMG",
"Document Type": "Data Documentation",
"File Name": "Activity Stream tab.png",
"URL": "https://invrh76axondev001.informatica.com:9443/download_document/
CatalogueItem-1/1"    },

{
"Name": "DOC",
"Description": "DOC",
"Document Type": "Policy Documentation",
"File Name": "Bulk-Upload-Report - 2023-07-10T125817.331.xlsx",
"URL": "https://invrh76axondev001.informatica.com:9443/download_document/
CatalogueItem-1/2"    },

{
"Name": "workflow",
"Description": "workflow",
"Document Type": "Process Documentation",
"File Name": "Bulk-Upload-Report - 2023-07-10T125817.331.xlsx",
"URL": "https://invrh76axondev001.informatica.com:9443/download_document/
```

```
CatalogueItem-1/4"
}]
```

To get the changed document information for a dataset with ID as 1, your API call might look like this:

```
https://invrh76axondev001.informatica.com:9443/retrieve-document/Dataset/1?
viewChanges=true
```

The REST client might retrieve the following changed document:

```
[
{
"Name": "DOC",
"Description": "DOC",
"Document Type": "Policy Documentation",
"File Name": "Bulk-Upload-Report - 2023-07-10T125817.331.xlsx",
"URL": "https://invrh76axondev001.informatica.com:9443/download_document/
CatalogueItem-1/2"    }]
```

The important parameters in this output are `Name`, `Description`, `Document Type`, `File Name`, and `URL`.

The following table describes the output parameters:

Parameter	Description
`Name`	The document name associated with the object.
`Description`	Description of the document associated with the object.
`Document Type`	Type of the document. REST API allows one of the following supported document types: - Data Documentation - Policy Documentation - Process Documentation - Reference Documentation - Sample Report - Project Documentation - System Documentation - Interface Documentation - Data Requirements Documentation - Sample Data - Process Control Documentation - Project Charter - BRD - FSD - System Functional Architecture - System Technical Architecture - Interface Design Documentation - Message Format Specification
`File Name`	Name of the file that you uploaded.
`URL`	Link to download the file.

INDEX

A

access tokens
  generating 11
  timeout period 11
API calls
  authenticating 11
  properties 10
  request body 10
  response body 10
  secure API calls 11
authentication
  access tokens 11
  refresh tokens 12
Axon objects
  retrieve objects 16
  search objects 16

B

bulk upload
  error report 89
  facet values 41, 90
  objects 59
  relationship type values 43, 92
  relationships 67
  role type values 91
  template 74
  track upload status 87
bulk upload template
  downloading 75
  entering values 75
  mapping file fields 82
  updating 75
  uploading 76

C

custom fields
  retrieving 123

D

Data Marketplace API
  consumer access 124
  delivery target 117
  orders 117
data quality report
  retrieve 145
data quality reports
  delete 152
data quality rules
  retrieve 143
data quality rules *(continued)*
  scores 149, 150
delivery target
  retrieve for Data Marketplace 117
documents
  retrieve 154

E

error report
  download 89

P

primary facet
  search criteria 17

Q

query parameters
  output 28

R

refresh tokens
  generating 12
  timeout period 12
response codes
  failure codes 10
  success codes 10

S

search and retrieve objects
  primary facet 17
  segment 17
segment IDs
  displaying 152
  retrieving 152
segment names
  displaying 152
  retrieving 152
source information
  retrieving 138

T

target information
  retrieving 138

template
uploading 74

V

value lists
creating 104
deleting 108
retrieving 107
updating 105