Informatica® Axon Data Governance
7.3.8

Bulk Upload Reference Guide

Informatica Axon Data Governance Bulk Upload Reference Guide
7.3.8
October 2026

© Copyright Informatica LLC 2018, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

This Software may be protected by patents. See https://www.informatica.com/legal/patents.html.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Publication Date: 2026-09-22

Table of Contents

Preface 7

Informatica Resources 7

- Informatica Network 7
- Informatica Knowledge Base 7
- Informatica Documentation 7
- Informatica Product Availability Matrices 8
- Informatica Marketplace 8
- Informatica Global Customer Support 8

Chapter 1: Bulk Upload Data 9

Bulk Upload Data Overview 9

Bulk Uploading Data 10

- Select Template File 10
- Map Columns 11
- Upload Template File 12
- Change Request Guidelines for Bulk Uploading Data 12

Assign Segments 13

- Assigning a Segment 14

Bulk Delete Relationships 15

- Bulk Deleting Relationships 15

Bulk Delete Roles 16

- Bulk Deleting Roles 16

Bulk Delete Objects 17

- Bulk Deleting Objects 17

Chapter 2: Bulk Upload Templates 19

Bulk Upload Templates 19

Template Types 20

- Object Identifier 21

Business & Change Object Templates 21

- Committee 21
- Policy 24
- Process 26
- Project 30

Organizational Object Templates 33

- Business Area 33
- Capability 35
- Client 37
- Legal Entity 39
- Org Unit 41

People. . . . 42
Product. . . . 45
Regulatory Object Templates. . . . 47
Geography. . . . 47
Regulation. . . . 48
Regulator. . . . 52
Regulatory Theme. . . . 53
Data & Technology Object Templates. . . . 54
Attribute. . . . 55
Data Quality Report. . . . 58
Data Quality Rule. . . . 60
Data Set. . . . 67
Glossary. . . . 70
Interface. . . . 76
System. . . . 80
Relationship Templates. . . . 84
Attribute X Attribute. . . . 86
Attribute X Physical Field. . . . 87
Business Area X Glossary. . . . 88
Business Area X Process. . . . 89
Business Area X System. . . . 89
Capability X Business Area. . . . 90
Capability X Client 90
Capability X Glossary. . . . 91
Capability X Legal Entity. . . . 91
Capability X Process. . . . 92
Capability X Product. . . . 92
Capability X System 93
Committee X Capability. . . . 93
Committee X Committee. . . . 94
Data Set X Client 94
Data Set X Legal Entity. . . . 95
Data Set X Product 95
Glossary X Client. . . . 96
Glossary X Glossary. . . . 96
Glossary X Product 97
Glossary x System. . . . 98
Interface X Glossary. . . . 98
Legal Entity X Geography. . . . 99
Local Data Quality Rule X Attribute. . . . 99
Local Data Quality Rule X Technical Reference. . . . 100
People X People. . . . 100

Policy X Attribute . . . 101
Policy X Business Area . . . 102
Policy X Client . . . 102
Policy X Data Set . . . 103
Policy X Glossary . . . 103
Policy X Legal Entity . . . 104
Policy X Policy . . . 104
Policy X Process . . . 105
Policy X Product . . . 106
Policy X Project . . . 106
Policy X System . . . 107
Process X Attribute . . . 107
Process X Client . . . 108
Process X Data Set . . . 108
Process X Glossary . . . 109
Process X Legal Entity . . . 109
Process X Process . . . 110
Process X Product . . . 110
Process X System . . . 111
Process X System Interface . . . 111
Product X Business Area . . . 112
Product X Client . . . 113
Product X Legal Entity . . . 113
Project X Attribute . . . 114
Project X Business Area . . . 114
Project X Capability . . . 115
Project X Client . . . 115
Project X Data Set . . . 116
Project X Glossary . . . 116
Project X Process . . . 117
Project X Product . . . 117
Project X Project . . . 118
Project X System . . . 119
Regulation X Policy . . . 119
Regulation X Product . . . 120
Regulation X Project . . . 120
Regulation X Regulator . . . 121
Regulation X Regulatory Theme . . . 121
Regulator X Geography . . . 122
Segment X Object . . . 122
Standard Data Quality Rule X Technical Reference . . . 122
System X Client . . . 123

System X Data Onboarding Rule. 124
System X Glossary. 124
System X Legal Entity. 125
System X Product. 125
System X Resource. 126
Role Templates. 126
Attribute Role. 127
Business Area Role. 128
Capability Role. 128
Client Role. 129
Committee Role. 129
Data Set Role. 130
Data Quality Role. 131
Glossary Role. 131
Interface Role. 132
Legal Entity Role. 133
Policy Role. 133
Process Role. 134
Product Role. 135
Project Role. 136
Regulation Role. 136
System Role. 137
Data Marketplace Templates. 138
Category. 138
Consumer Access. 139
Data Collection. 140

Index. 143

Preface

Use the *Bulk Upload Reference Guide* to learn how to bulk upload data to Informatica Axon. If you have large amounts of objects, relationships, and roles to enter in Axon, you can use the option to bulk upload data using Microsoft Excel templates. This guide covers the tasks that you can perform using the bulk upload option in the Axon Web interface.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:
https://www.informatica.com/services-and-training/customer-success-services/contact-us.html.

To find online support resources on the Informatica Network, visit https://network.informatica.com and select the Support option.

CHAPTER 1

Bulk Upload Data

This chapter includes the following topics:

- Bulk Upload Data Overview, 9
- Bulk Uploading Data, 10
- Assign Segments, 13
- Bulk Delete Relationships, 15
- Bulk Delete Roles, 16
- Bulk Delete Objects, 17

Bulk Upload Data Overview

If you have large amounts of objects, relationships, and roles to enter in Axon, you can use the option to bulk upload data. You can download a Microsoft Excel template from Axon to bulk upload object, roles, and relationships.

A WebUser with the New or Edit permission, Admin, and SuperAdmin can bulk upload data to Axon. If a web user has the New permission for an object, the user can upload a new file but cannot upload existing items. If a web user has the Edit permission, the user can update existing items but cannot upload a new file. A web user can upload new items or update existing relationships and roles for objects that they can add or edit. When you bulk upload new objects, Axon assigns you as the default stakeholder for the objects. If you have configured default roles for a facet in the Admin Panel, Axon assigns the default roles to the user who bulk uploads data.

Use the bulk upload template when you need to perform the following tasks:

- Add new objects, relationships, and roles to Axon.
- Update existing objects, relationships, and roles to Axon.
- Remove existing relationships from Axon.

After you select the upload type, you can choose the object, relationship, or role. You can also perform a keyword search to find the exact object, relationship, or role that you want to upload.

You can bulk upload objects, such as Attribute, People, Process, and Regulation. You can bulk upload relationships, such as Attribute X Attribute, Policy X Glossary, and System X Product. You can bulk upload roles, such as Data Set Role, Glossary Role, and Interface Role.

You can use a Microsoft Excel template that you have created to upload data to Axon. Informatica recommends that you use the templates that Axon provides.

You can bulk assign objects to a segment. You can specify the segment to which you want to assign the objects, enter the object details in the template, and upload the template to Axon. If you do not provide a segment for an object, Axon assigns the default Enterprise segment to the object. If you enter a segment for a parent object, you must enter the same segment for child objects.


You can use a comma-separated-value (CSV) file format to bulk upload to Axon. You can use a CSV file that you created to upload data to Axon. If you want to use the Axon template, you need to download and save the Microsoft Excel template in the CSV format.

Note: You must have the necessary permission to create or update Axon objects before you can bulk upload data.

Bulk Uploading Data

To bulk upload data, you must use a Microsoft Excel template. Enter the data in the template and upload the filled template to Axon.

The following image shows the tasks that you must perform to upload data to Axon:

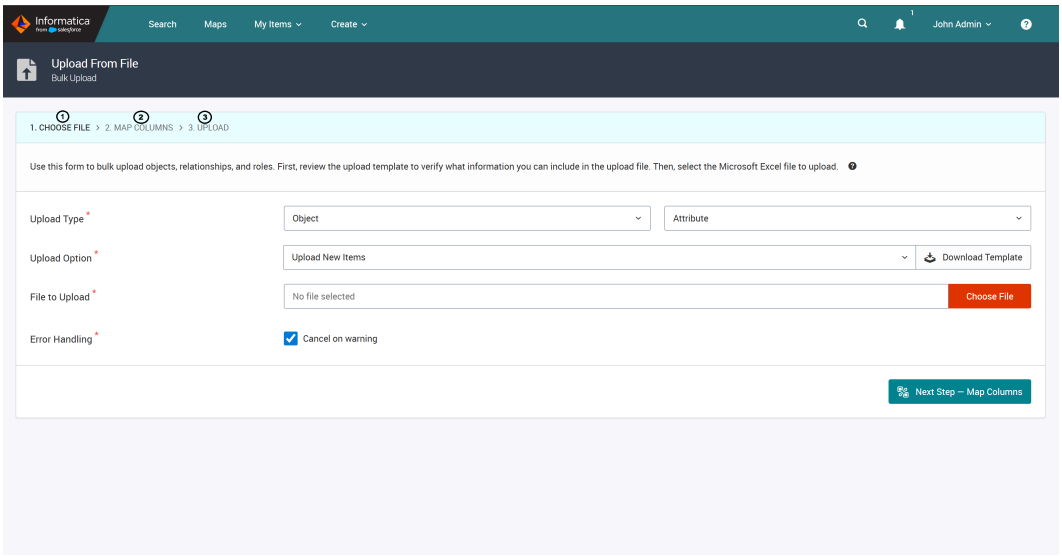

1. Enter data in the Microsoft Excel template and select the template file in Axon.
2. Map the columns in the template to the columns in Axon.
3. Upload the template to Axon.

Select Template File

1. In the Axon toolbar, click **Create** > **Upload from file**.

   Axon displays the **Upload From File** page. Use the wizard to choose options related to bulk uploading of data. The first step of the wizard is **Choose File**.
2. From the **Upload Type** list, select the type of item that you want to upload. The type of upload items include Object, Relationship, and Role.
3. Based on the type of upload item, select the type of a relationship, object, or role in the field to the right of the **Upload Type** list.

When you start typing a keyword in the search box, Axon suggests the matching object, relationship, or role that you want to upload.

4. Choose whether you want to upload new items or update existing items.

   The options to upload a new item or update an existing item appear based on the type of item that you choose to upload.

5. Click **Download Template**.

   A Microsoft Excel template is downloaded to the Downloads folder.

6. In the Microsoft Excel template, add the data that you want to add or update in Axon, and then save the file.

   Note:

   - In the template, columns with headers in red color are required.
   - The template includes columns for custom fields that the Admin or SuperAdmin might have created.
   - If a custom field requires a value, make sure that you enter a supported value before you save the file.
   - If the Admin or SuperAdmin has configured a custom field to accept multiple inputs, enter the supported values into the formula bar in Microsoft Excel. To provide multiple inputs, use commas to separate the values you enter.
   - If a field in the template requires a date, make sure that you enter the date in the DD/MM/YYYY format.
   - If a field in the template requires a time, make sure that you enter the time in the 24 hours format.
   - If the administrator has defined mandatory workflow approvals for the facet, Axon ignores the values that you enter in the bulk upload file for the **Axon Status** field. Instead, Axon assigns the values that the administrator has configured for these fields in the Admin Panel.

     For more information on workflows, see the *Axon Data Governance 7.3.8 User Guide*.

7. Click **Choose File** and select the template file.
8. To cancel the upload when Axon detects a conflict, select **Cancel on warning**.
9. Click **Next — Map Columns**.

The following guidelines apply if the administrator has configured automatic change requests and you select the **Cancel on warning** option when you upload a template file:

- If a WebUser has created an object and specified an admin user as a stakeholder, Axon does not start the change request if the WebUser updates the object. The admin user must update the object to start the change request automatically. Also, if the WebUser specifies a value for the **Lifecycle** and the **Axon Status** fields when updating the object, Axon ignores the value and applies the default value that the admin has configured for the **Lifecycle** and the **Axon Status** fields in the Admin Panel.
- If a WebUser has created an object and specifed the same user as a stakeholder, Axon automatically starts a change request for the object. If the WebUser specify values for the **Lifecycle** and the **Axon Status** fields when updating the object, Axon ignores the values and applies the default values that the admin has configured for the **Lifecycle** and the **Axon Status** fields in the Admin Panel.

Map Columns

After you upload the template, you need to map the template columns with the Axon properties to start the bulk upload process.

1. In the **Map Columns** step of the wizard, map the columns in the Microsoft Excel template to the properties that Axon supports. Double-click a column in the **Column in Uploaded File** column and select the value that corresponds to the value in the **Axon Field** column.

Note:

- The **Axon Status** and **Axon Viewing** columns of the template are not populated automatically. If you want to map these column values to the values in the Axon Field column, ensure that the template file contains values for the **Axon Status** and **Axon Viewing** columns.
- If you want to bulk upload objects with default values for custom fields, you must not map the non-mandatory custom fields with the Axon properties.

2. To continue with the bulk upload wizard steps, click **Next Start Upload**.

Upload Template File

1. In the **Upload** step of the wizard, review the progress of the upload task. If the upload fails, you can download the error report to troubleshoot the upload.

   Axon displays a progress bar and a message to indicate the progress of the upload task.

2. To view the status of the bulk upload job, click **Go to My Jobs**.

   Axon displays the list of pending tasks in the **My Jobs** page of the **Activity Stream** tab. You can open the **My Jobs** page from the **People** object to view the progress of the upload task in the **Status** column at any time.

3. From the **Action** column in the **My Jobs** page, you can upload a fixed file again, or download the original file that you uploaded.
4. Optionally, click the **Notifications** icon on the Axon toolbar and click the **Bulk Upload** tab to see the progress of the pending task.

Change Request Guidelines for Bulk Uploading Data

Note the following guidelines for automatic change requests when you upload data using the bulk upload templates.

Requirements for Automatic Change Requests

To automatically start a change request when a user creates or updates an object using the bulk upload template, the following conditions must be met:

- The administrator has configured automatic change requests in the Axon Admin Panel. For more information, see the *Configure Default Values for Automatic Change Requests* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.
- A user with a data steward role must be specified as stakeholder for the object.

Guidelines for Cancel on Warning Option

If the administrator has configured automatic change requests, and you select the **Cancel on warning** option when you upload a bulk update template file, the upload operation is not cancelled under the following situations. During these situations, Axon updates the objects in the template file and displays warnings in the bulk upload report.

Bulk update objects that specify admin user as stakeholder

If a WebUser or admin user updates the object, Axon does not automatically start a change request. To start a change request automatically, you must edit the object and specify a WebUser with steward role as a stakeholder for the object.

If a WebUser or admin user specify values for the **Lifecycle** and the **Axon Status** fields when updating the object, Axon ignores the values and applies the default values that the admin has configured for the **Lifecycle** and **Axon Status** fields in the **Default Change Requests** section of the Axon Admin Panel .

Bulk update objects that specify WebUser as stakeholder

If a WebUser or admin user updates the object, Axon automatically starts a change request because a WebUser is specified as a stakeholder.

If a WebUser or admin user specify values for the **Lifecycle** and the **Axon Status** fields when updating the object, Axon ignores the values and applies the default values that the admin has configured for the **Lifecycle** and **Axon Status** fields in the **Default Change Requests** section of the Axon Admin Panel.

Note: If you use an API to upload objects, and you specify the `true` value for the `stopOnWarning` parameter, the upload operation is not cancelled when the above conditions apply. To use the API, see the *Create, Update, and Delete Objects and Relationships* chapter in the *Axon Data Governance 7.3.8 REST API Guide*.

Assign Segments


You can choose to assign objects to a single or multiple segments in bulk.

If you want to assign all the objects in a template file to the same segment, you can select the segment in the first step of the bulk upload wizard. If a template file has objects that need to be assigned to more than one segment, you can provide the segment information in the template file.

When you perform a bulk upload task, in the **Segment** field, select a segment to which you want to assign objects. If you want the objects to be available to everyone in the organization, select the **Enterprise** segment. If you want to assign the objects to multiple segments in the template, select the **Multiple** segment.

Note: The segment list appears only if a SuperAdmin user has created segments in the Admin Panel.

The following image shows the first step of the **Bulk Upload** wizard:

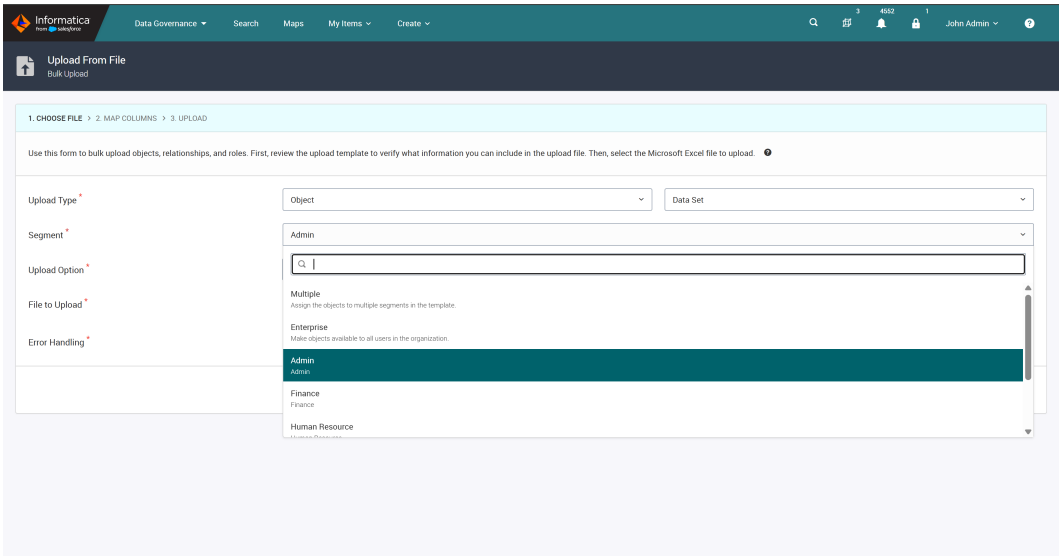

You can assign only a single segment to an object. When you download the bulk upload template for an object, the template contains an additional **Segment** column in which you can specify the segment. If you select a segment in the **Segment** field and select another segment in the **Segment** column of the template, Axon considers the segment that you mentioned in the **Segment** field instead of the segment mentioned in the template.

If you select the **Multiple** segment option, download the bulk template for an object and enter multiple segment names in the **Segment** column of the template. For example, you can assign five glossaries to segment A, five glossaries to segment B, and five glossaries to segment C.

You cannot assign a segment to the following types of objects:

- Attributes
- Org Unit
- People
- Data Quality Rule
- System Interface

When you bulk update the existing items, you cannot view the **Segment** column in the template.

Use the **Segment x Object** relationship template to reassign objects from one segment to another.

Assigning a Segment

Use bulk upload templates to assign objects to a segment or multiple segments.

1. In the Axon toolbar, click **Create** > **Upload from file**.

   Axon displays the **Upload From File** page. Use the wizard to assign segments to objects in bulk. The first step of the wizard is **Choose File**.
2. From the **Upload Type** list, select Object.
3. Based on the type of upload item, select the type of an object in the field to the right of the **Upload Type** list.

   When you start typing a keyword in the search box, Axon suggests the matching object, relationship, or role that you want to upload.
4. In the **Segment** field, select a segment to which you want to assign objects. If you want the objects to be available to everyone in the organization, select the **Enterprise** segment. If you want to assign the objects to multiple segments in the template, select the **Multiple** segment.

   Note: If you select a segment in the **Segment** field and select another segment in the template, Axon considers the segment that you mentioned in the **Segment** field.
5. Choose whether you want to upload new items or update existing items.

   The options to upload a new item or update an existing item appear based on the type of item that you choose to upload.
6. Click **Download Template**.

   A Microsoft Excel template is downloaded to the Downloads folder.
7. In the Microsoft Excel template, add the data that you want to add or update in Axon, and then save the file. Enter the segment names in case you choose to assign multiple segments.
8. Click **Choose File** and select the template file.
9. To cancel the upload when Axon detects a conflict, select **Cancel on warning**.
10. Click **Next — Map Columns**.
11. In the **Map Columns** step of the wizard, map the columns in the Microsoft Excel template to the properties that Axon supports. Double-click a column in the **Column in Uploaded File** column and select the value that corresponds to the value in the **Axon Field** column.

Note: The **Axon Status** and **Axon Viewing** columns of the template are not populated automatically. If you want to map these column values to the values in the Axon Field column, ensure that the template file contains values for the **Axon Status** and **Axon Viewing** columns.

12. To continue with the bulk upload wizard steps, click **Next Start Upload**.
13. In the **Upload** step of the wizard, review the progress of the upload task. If the upload fails, you can download the error report to troubleshoot the upload.

    Axon displays a progress bar and a message to indicate the progress of the upload task.
14. To view the status of the bulk upload job, click **Go to My Jobs**.

    Axon displays the list of pending tasks in the **My Jobs** page of the **Activity Stream** tab. You can open the **My Jobs** page from the **People** object to view the progress of the upload task in the **Status** column at any time.
15. From the **Action** column in the **My Jobs** page, you can upload a fixed file again, or download the original file that you uploaded.
16. Optionally, click the **Notifications** icon on the Axon toolbar and click the **Bulk Upload** tab to see the progress of the pending task.

Bulk Delete Relationships

Use bulk upload templates to delete relationships between the objects. The templates are same as the ones you use to create relationships between object.

When you delete relationships, Axon removes the existing relationships between the objects. You can delete relationships between objects in bulk instead of deleting the relationship for each object from the Axon interface.

To update relationships in bulk, you have to first delete the existing relationships and then create the relationships that you want.

If the Admin or SuperAdmin user has configured mandatory workflow when you delete a relationship from the Axon interface, Axon will start the same workflow when you delete the relationship using the bulk upload template. Axon starts mandatory workflows when you delete relationships for the following facets:

- Glossary
- System
- Data Set
- Process

For more information on workflows, see the *Axon Data Governance 7.3.8 User Guide*.

Bulk Deleting Relationships

When you perform a bulk delete task, use bulk upload templates to remove the relationships between objects.

1. In the Axon toolbar, click **Create** > **Upload from file**.

   Axon displays the **Upload From File** page. Use the wizard to choose options related to bulk deleting of relationships.
2. From the **Upload Type** list, select **Relationship**.

3. Select a relationship in the field next to the **Upload Type** list.

   When you start typing a keyword in the search box, Axon suggests matching relationships from which you can select the relationship that you want to delete.
4. From the **Upload Option** list, choose **Remove Existing Items**.
5. Click **Download Template**.

   A Microsoft Excel template is downloaded to the Downloads folder.
6. In the Microsoft Excel template, enter the details of the objects for which you want to delete the relationships.
7. Click **Choose File** and select the template file.
8. To cancel the upload when Axon detects a conflict, select **Cancel on warning**.
9. Click **Next — Map Columns**.
10. In the **Map Columns** step of the wizard, map the columns in the Microsoft Excel template to the properties that Axon supports. Double-click a column in the **Column in Uploaded File** column and select the value that corresponds to the value in the **Axon Field** column.
11. To continue with the bulk upload wizard steps, click **Next Start Upload**.
12. In the **Upload** step of the wizard, review the progress of the upload task. If the upload fails, you can download the error report to troubleshoot the upload.

    Axon displays a progress bar and a message to indicate the progress of the upload task.
13. To view the status of the bulk upload job, click **Go to My Jobs**.

    Axon displays the list of pending tasks in the **My Jobs** page of the **Activity Stream** tab. You can open the **My Jobs** page from the **People** object to view the progress of the upload task in the **Status** column at any time.

After the bulk delete operation completes, Axon removes the relationships between the objects.

Bulk Delete Roles

Use bulk upload templates to delete roles for the objects. The templates are same as the ones you use to create roles for object.

When you delete roles, Axon removes the existing roles for the objects. You can delete roles for objects in bulk instead of deleting the role for each object from the Axon interface.

To update roles in bulk, you have to first delete the existing roles and then create the roles that you want.

Bulk Deleting Roles

When you perform a bulk delete task, use bulk upload templates to remove the roles for objects.

1. In the Axon toolbar, click **Create** > **Upload from file**.

   Axon displays the **Upload From File** page. Use the wizard to choose options related to bulk deleting of roles.
2. From the **Upload Type** list, select **Role**.
3. Select a role in the field next to the **Upload Type** list.

   When you start typing a keyword in the search box, Axon suggests matching roles from which you can select the role that you want to delete.

4. From the **Upload Option** list, choose **Remove Existing Items**.
5. Click **Download Template**.

   A Microsoft Excel template is downloaded to the Downloads folder.
6. In the Microsoft Excel template, enter the details of the objects for which you want to delete the roles.
7. Click **Choose File** and select the template file.
8. To cancel the upload when Axon detects a conflict, select **Cancel on warning**.
9. Click **Next — Map Columns**.
10. In the **Map Columns** step of the wizard, map the columns in the Microsoft Excel template to the properties that Axon supports. Double-click a column in the **Column in Uploaded File** column and select the value that corresponds to the value in the **Axon Field** column.
11. To continue with the bulk upload wizard steps, click **Next Start Upload**.
12. In the **Upload** step of the wizard, review the progress of the upload task. If the upload fails, you can download the error report to troubleshoot the upload.

    Axon displays a progress bar and a message to indicate the progress of the upload task.
13. To view the status of the bulk upload job, click **Go to My Jobs**.

    Axon displays the list of pending tasks in the **My Jobs** page of the **Activity Stream** tab. You can open the **My Jobs** page from the **People** object to view the progress of the upload task in the **Status** column at any time.

After the bulk delete operation completes, Axon removes the roles for the objects.

Bulk Delete Objects

Use bulk upload templates to delete Axon objects with the SuperAdmin privileges.

Bulk Deleting Objects

When you perform a bulk delete objects, use bulk upload templates to remove the objects of facets.

1. In the Axon toolbar, go to **Create** > **Upload from file**.

   Axon displays the **Upload From File** page.
2. From the **Upload Type** list, select **Object**.
3. Select a facet object in the field next to the **Upload Type** list.

   When you start typing a keyword in the search box, Axon suggests matching facet object from which you can select the facet object that you want to delete.
4. From the **Upload Option** list, choose **Remove Existing Items**.
5. Click **Download Template**.

   A Microsoft Excel template appears in the Downloads folder.
6. In the Microsoft Excel template, update the object IDs for deletion.
7. Click **Choose File** and select the updated template file.
8. To cancel the upload when Axon detects a conflict, select **Cancel on warning**.
9. Click **Next Step — Map Columns**.

10. In the **Map Columns** step of the wizard, map the columns in the Microsoft Excel template to the properties that Axon supports. Double-click a column in the **Column in Uploaded File** column and select the value that corresponds to the value in the **Axon Field** column.
11. To continue with the bulk upload wizard steps, click **Next Step - Start Upload**.
12. In the **Upload** step of the wizard, review the progress of the upload task. If the upload fails, you can download the error report to troubleshoot the upload.

    Axon displays a progress bar and a message to indicate the progress of the upload task.
13. Click **Start Over** to begin the delete process again.
14. To view the status of the bulk upload job, select **Go to My Jobs**.

    Axon displays the list of pending tasks in the **My Jobs** page of the **Activity Stream** tab. You can open the **My Jobs** page from the **People** object to view the progress of the upload task in the **Status** column at any time.

After the bulk delete operation completes, Axon deletes the objects.

CHAPTER 2

Bulk Upload Templates

This chapter includes the following topics:

- Bulk Upload Templates, 19
- Template Types, 20
- Business & Change Object Templates, 21
- Organizational Object Templates, 33
- Regulatory Object Templates, 47
- Data & Technology Object Templates, 54
- Relationship Templates, 84
- Role Templates, 126
- Data Marketplace Templates, 138

Bulk Upload Templates

You can download predefined Microsoft Excel templates to bulk upload in Axon. You can also use custom Microsoft Excel templates to upload data to Axon. Informatica recommends that you use the templates that Axon provides.

You can use a comma-separated-value (CSV) file format to bulk upload data to Axon. You can use a CSV file that you created to upload data to Axon. If you want to use the Axon template, you need to download and save the Microsoft Excel template in the CSV format.

Each facet has some default configuration values, such as lifecycle, classification types, and relationship types, that are predefined in the template. You can configure these values from the Admin panel. If your current Axon instance was upgraded from a previous version, you might see more values in the drop-down configuration list from the previous version. If you perform a fresh install, you can see the latest, shorter list of drop-down configuration values.

You can customize the facet name for English locale and view the facet name changes in the Bulk Upload File Templates. You can customize the facet name in the following location :

```
<Axon_Install_Dir>//axonhome/axon/src/Axon/AppBundle/Resources/translations/messages.en-GB.po
```

For example, when you change the name of the facet from policy to newpolicy in the messages.en-GB.po file, the updated facet name reflects in the Bulk Upload File Templates. The Bulk Upload File template name updates from Axon_SourcingTemplate_policy to Axon_SourcingTemplate_newpolicy.

Use the bulk upload template when you need to perform the following tasks:

- Add new objects, relationships, and roles to Axon.
- Update existing objects, relationships, and roles in Axon.
- Remove existing relationships and roles from Axon.

If you are part of a segment, you can bulk upload data that belongs to the segment that you can access. If you do not provide a segment for an object, Axon assigns the default Enterprise segment to the object. An object and its parent object must be in the same segment. If you enter a segment for a parent object, you need to enter the same segment for child objects.

If an object belongs to a private segment, the related objects can be part of the same private segment or Enterprise segment. If an object belongs to one private segment, the related objects cannot be part of another private segment.

Template Types

You can bulk upload the Object, Relationship, and Role template types to Axon. The Object templates include the following categories:

- Business & Change
- Organizational
- Regulatory
- Data & Technology

After you download a template, you can view that the worksheet name is provided for the template for ease of use and reference. The worksheet name format for the template that you want to bulk upload is `Create <Template Name>`. For example, if you want to upload the System X Client template, the worksheet name is `Create System X Client`. The worksheet name format for the template that you want to bulk update is `Update <Template Name>`. For example, if you want to update the Glossary object, the worksheet name is `Update Glossary`.

If you have created segments in Axon, you can view the **Segment** column in most of the downloaded Object templates. You cannot view the **Segment** column for the following object templates:

- Attributes
- Org Unit
- People
- Data Quality Rule
- System Interface

In the Object and Roles templates, you can see the following optional columns for the user details: User Email, User First Name, User Last Name, and User LAN ID. When you bulk upload objects and roles, you must enter at least one of the user details so that it becomes easier to identify an object and role. You can enter an email address, LAN ID, or a combination of first and last name.

Most of the templates contain the reference identifier column that is optional. If you leave the column empty and map the empty column during the bulk upload process, the operation fails because the Reference column cannot have null values. If you want to map the Reference column, ensure that you enter a value in the template.

Object Identifier

An object identifier (ID) is a unique integer that you can use while you update existing objects using bulk upload templates.

When an object is created, Axon automatically generates a unique numeric value for the ID column. Axon uses the ID value for its internal logic. You cannot configure the ID value. The ID column is hidden by default in Unison search. When you bulk update existing items, you can specify the IDs in the template to uniquely identify the objects. You can view the ID column only in bulk update templates. The ID column in the template is in the following format: <Facet Name> ID. For example, when you bulk update the Policy template, you can enter the Policy ID values to uniquely identify Policy objects.

The ID column is different from the Ref. column that is present in both bulk upload and bulk update templates. You can configure the value in the Ref. column. If you do not specify a value in the Ref. column, Axon automatically assigns a reference identifier to an Axon object. The Ref. column can have alphanumeric values. You can provide external source references in the Ref. column in Axon. For example, in a process diagram, you can configure reference identifiers for each step in a process for better clarity and understanding.

Business & Change Object Templates

Use Business and Change object templates to explain different business functions and changes to objects in an organization. Download templates for Business and Change objects from Axon to perform a bulk upload.

You can bulk upload the following types of objects:

- Committee
- Policy
- Process
- Project

Committee

Download the Committee template to bulk upload committees to Axon. You can choose to upload a new committee or update an existing committee.

Upload New Items

The following table describes the fields of the Committee template that you can use to upload new items:

Field	Description
Reference	Optional. Reference identifier for the committee. If you leave this field empty, Axon automatically assigns a new reference identifier.
Committee Name	Required. Name of the committee. Enter a name that other Axon users can recognize easily.
Description	Required. Description of the committee.
Parent Committee Name	Optional. Parent name of the committee that you want to create.

Field	Description
Parent Ref.	Optional. A unique reference identifier for the parent committee.
Axon Viewing	Optional. Whether the committee is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Classification	Required. Classification of the committee. You can classify the committee as **Core Governance Entity**.
Axon Status	Optional. Status of the committee in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the committee in the production lifecycle. Select one of the following stages: - In Effect - Obsolete
Committee Type	Required. Type of the committee. Select one of the following types: - Committee - Working Group
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. Select **Committee Chair**.
Segment	Optional. The segment to which you want to assign the committee to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Committee template that you can use to update existing items:

Field	Description
Committee ID	Optional. A unique integer that identifies the committee. When you create a committee, Axon automatically generates an ID for the committee.
Reference	Optional. Reference identifier for the committee. If you leave this field empty, Axon automatically assigns a new reference identifier.
Committee Name	Required. Name of the committee. Enter a name that other Axon users can recognize easily.
Description	Required. Description of the committee.
Parent Committee Name	Optional. Parent name of the committee that you want to create.
Parent Ref.	Optional. A unique reference identifier for the parent committee.
Axon Viewing	Optional. Whether the committee is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Classification	Required. Classification of the committee. You can classify the committee as **Core Governance Entity**.
Axon Status	Optional. Status of the committee in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the committee in the production lifecycle. Select one of the following stages: - In Effect - Obsolete
Committee Type	Required. Type of the committee. Select one of the following types: - Committee - Working Group

Policy

Download the Policy template to bulk upload policies to Axon. You can choose to upload a new policy or update an existing policy.

Upload New Items

The following table describes the fields of the Policy template that you can use to upload new items:

Field	Description
Name	Required. Name of the policy. Enter a name that other Axon users can recognize easily.
Ref.	Optional. Reference identifier for the policy. If you leave this field empty, Axon assigns a new reference automatically.
Internal	Required. Indicates whether the policy is internal or external.
URL	Optional. Link to another page where the policy is mentioned in detail. Include the network protocol in the link. For example, enter `https://www.website.com`.
Description	Required. Description of the policy.
Effective Date	Optional. The date from which the policy is effective. The effective date must be in the DD/MM/YYYY format.
End Date	Optional. The date after which the policy ceases to be effective. The end date must be in the DD/MM/YYYY format.
Parent Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Parent Ref.	Optional. A unique reference identifier for the parent policy.
Axon Viewing	Optional. Whether the policy is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the policy in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the policy in the approval lifecycle. You can select the following default stages: - Draft - Enforced - Obsolete You can also create policy lifecycle stages.

Field	Description
Type	Required. Category that best describes the policy. You can select the following default policy types: - Conduct Standards - Data Standards You can also create policy types.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Policy Owner - Policy Steward
Segment	Optional. The segment to which you want to assign the policy to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Policy template that you can use to update existing items:

Field	Description
ID	Optional. A unique integer that identifies the policy. When you create a policy, Axon automatically generates an ID for the policy.
Name	Required. Name of the policy. Enter a name that other Axon users can recognize easily.
Ref.	Optional. Reference identifier for the policy. If you leave this field empty, Axon assigns a new reference identifier automatically.
Internal	Required. Indicates whether the policy is internal or external.
URL	Optional. Link to another page where the policy is mentioned in detail. Include the network protocol in the link. For example, enter `https://www.website.com`.
Description	Required. Description of the policy.
Effective Date	Optional. The date from which the policy is effective. The effective date must be in the DD/MM/YYYY format.
End Date	Optional. The date after which the policy ceases to be effective. The end date must be in the DD/MM/YYYY format.

Field	Description
Parent Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Parent Ref.	Optional. A unique reference identifier for the parent policy.
Axon Viewing	Optional. Whether the policy is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the policy in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the policy in the approval lifecycle. You can select the following default stages: - Draft - Enforced - Obsolete You can also create policy lifecycle stages.
Type	Required. Category that best describes the policy. You can select the following default policy types: - Conduct Standards - Data Standards You can also create policy types.

Process

Download the Process template to bulk upload processes to Axon. You can choose to upload a new process or update an existing process.

Upload New Items

The following table describes the fields of the Process template that you can use to upload new items:

Field	Description
Name	Required. Name of the process.
Ref.	Optional. Reference identifier for the process. If you leave this field empty, Axon assigns a new reference automatically.
Description	Required. Description of the process.
Input Description	Optional. Description of relevant inputs to the process.
Output Description	Optional. Description of relevant outputs from the process.

Field	Description
Step Type	Required. Specify whether you are creating the starting step of a process, the ending step of a process, or a common step across the process.
Create Permission	Optional. Permission to create a process. (*)
Read Permission	Optional. Permission to read a process. (*)
Update Permission	Optional. Permission to update a process. (*)
Delete Permission	Optional. Permission to delete a process. (*)
Archive Permission	Optional. Permission to archive a process. (*)
Duration	Optional. The time duration for the process that you create.
Parent Name	Optional. Parent of the process.
Parent Ref.	Optional. A unique reference identifier for the parent process.
Axon Viewing	Optional. Whether the process is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the process in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Type	Required. The type of process that you create. You can select the following process types: - Process - Step - Control You can also add other process types.
Duration Type	Optional. The unit of time duration for the process that you create. Choose hours or days as the unit of time.
Lifecycle	Required. Stage of the process in the approval lifecycle. You can select the following default stages: - In Production - Draft - Obsolete You can also create process lifecycle stages.
Classification	Optional. Classification of the process. You can select the Execution Process, or create other processes.

Field	Description
Automation	Optional. Level of automation. - Manual. The process requires human intervention at every stage of the workflow. - Partially Automated. The process requires human intervention at some, but not all, stages of the workflow. - Fully Automated. The process requires no human intervention at any stage of the workflow. You can also add other automation options.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Process Owner - Process Steward
Segment	Optional. The segment to which you want to assign the process to. This column appears if a SuperAdmin user has created segments in the Admin Panel.
(*) You need to select the values if you want to map the template column to an Axon field. If you map an empty column to the Axon field, Axon does not assign the default values and the bulk upload fails. If you remove the field mapping for the empty column, Axon assigns the default values for the column.	

Update Existing Items

The following table describes the fields of the Process template that you can use to update existing items:

Field	Description
ID	Optional. A unique integer that identifies the process. When you create a process, Axon automatically generates an ID for the process.
Name	Required. Name of the process.
Ref.	Optional. Reference identifier for the process. If you leave this field empty, Axon assigns a new reference automatically.
Description	Required. Description of the process.
Input Description	Optional. Description of relevant inputs to the process.
Output Description	Optional. Description of relevant outputs from the process.
Step Type	Required. Specify whether you are creating the starting step of a process, the ending step of a process, or a common step across the process.

Field	Description
Create Permission	Optional. Permission to create a process. (*)
Read Permission	Optional. Permission to read a process. (*)
Update Permission	Optional. Permission to update a process. (*)
Delete Permission	Optional. Permission to delete a process. (*)
Archive Permission	Optional. Permission to archive a process. (*)
Duration	Optional. The time duration for the process that you create.
Parent Name	Optional. Parent of the process.
Parent Ref.	Optional. A unique reference identifier for the parent process.
Axon Viewing	Optional. Whether the process is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the process in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Type	Required. The type of process that you create. You can select the following process types: - Process - Step - Control You can also add other process types.
Duration Type	Optional. The unit of time duration for the process that you create. Choose hours or days as the unit of time.
Lifecycle	Required. Stage of the process in the approval lifecycle. You can select the following default stages: - In Production - Draft - Obsolete You can also create process lifecycle stages.
Classification	Optional. Classification of the process. You can select the Execution Process, or create other processes.

Field	Description
Automation	Optional. Level of automation. - Manual. The process requires human intervention at every stage of the workflow. - Partially Automated. The process requires human intervention at some, but not all, stages of the workflow. - Fully Automated. The process requires no human intervention at any stage of the workflow. You can also add other automation options.
(*) You need to select the values if you want to map the template column to an Axon field. If you map an empty column to the Axon field, Axon does not assign the default values and the bulk upload fails. If you remove the field mapping for the empty column, Axon assigns the default values for the column.	

Project

Download the Project template to bulk upload projects to Axon. You can choose to upload a new project or update an existing project.

Upload New Items

The following table describes the fields of the Project template that you can use to upload new items:

Field	Description
Reference	Optional. Reference identifier for the project. If you leave this field empty, Axon assigns a new reference automatically.
Project Name	Required. Name of the project. Enter a name that other Axon users can recognize easily.
Project Description	Required. Description of the project.
Start Date	Required. Start date of the project. The start date must be in the DD/MM/YYYY format.
End Date	Required. End date of the project. The end date must be in the DD/MM/YYYY format.
Parent Project Name	Optional. Parent of the project that you create.
Parent Ref.	Optional. A unique reference identifier for the parent project.
Axon Viewing	Optional. Whether the project is available for public viewing or not. You can select one of the following options: - Public - Non-Public
RAG	Required. Status of the project in the project management lifecycle. Select Red, Amber, or Green.

Field	Description
Classification	Optional. Classification of the project. You can select from the following classification options: - Mandatory - Discretionary You can also create other classification options.
Axon Status	Optional. Status of the project in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Project Lifecycle	Required. Stage of the project in the project management lifecycle. You can select the following default stages: - Initiation - Execution - Closed You can also create project lifecycle stages.
Project Type	Required. Indicates the type of the project. You can select the following default projects: - Program - Project You can also create other project types.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Project Manager - Project Steward
Segment	Optional. The segment to which you want to assign the project to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Project template that you can use to update existing items:

Field	Description
Project ID	Optional. A unique integer that identifies the project. When you create a project, Axon automatically generates an ID for the project.
Reference	Optional. Reference identifier for the project. If you leave this field empty, Axon assigns a new reference automatically.
Project Name	Required. Name of the project. Enter a name that other Axon users can recognize easily.
Project Description	Required. Description of the project.
Start Date	Required. Start date of the project. The start date must be in the DD/MM/YYYY format.
End Date	Required. End date of the project. The end date must be in the DD/MM/YYYY format.
Parent Project Name	Optional. Parent of the project that you create.
Parent Ref.	Optional. A unique reference identifier for the parent project.
Axon Viewing	Optional. Whether the project is available for public viewing or not. You can select one of the following options: - Public - Non-Public
RAG	Required. Status of the project in the project management lifecycle. Select Red, Amber, or Green.
Classification	Optional. Classification of the project. You can select from the following classification options: - Mandatory - Discretionary You can also create other classification options.
Axon Status	Optional. Status of the project in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted

Field	Description
Project Lifecycle	Required. Stage of the project in the project management lifecycle. You can select the following default stages: - Initiation - Execution - Closed You can also create project lifecycle stages.
Project Type	Required. Indicates the type of the project. You can select the following default projects: - Program - Project You can also create other project types.

Organizational Object Templates

Use Organizational object templates to explain the different functions of an organization. Download templates for Organizational objects from Axon to perform a bulk upload.

You can bulk upload the following types of objects:

- Business Area
- Client
- Capability
- Legal Entity
- Product
- People
- Org Unit

Business Area

Download the Business Area template to bulk upload business area data to Axon. You can choose to upload a new business area object or update an existing business area object.

Upload New Items

The following table describes the fields of the Business Area template that you can use to upload new items:

Field	Description
Business Area Name	Required. Name of the business area.
Description	Required. Description of the business area.
Parent Business Area	Optional. Parent name of the business area if the business area belongs to a hierarchy.

Field	Description
Axon Viewing	Optional. Whether the business area is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the business area in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the business area in the governance lifecycle. You can select the following default stages: - Operating - Obsolete You can also create the lifecycle stages.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the **Business Area Head** role.
Segment	Optional. The segment to which you want to assign the business area to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Business Area template that you can use to update existing items:

Field	Description
Business Area ID	Optional. A unique integer that identifies the business area. When you create a business area, Axon automatically generates an ID for the business area.
Business Area Name	Required. Name of the business area.
Description	Required. Description of the business area.
Parent Business Area	Optional. Parent name of the business area if the business area belongs to a hierarchy.

Field	Description
Axon Viewing	Optional. Whether the business area is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the business area in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the business area in the governance lifecycle. You can select the following default stages: - Operating - Obsolete You can also create the lifecycle stages.

Capability

Download the Capability template to bulk upload capabilities to Axon. You can choose to upload a new capability or update an existing capability.

Upload New Items

The following table describes the fields of the Capability template that you can use to upload new items:

Field	Description
Reference	Optional. A unique identifier for the capability.
Capability Name	Required. Name of the capability.
Capability Definition	Required. Description of the capability.
Parent Capability	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Parent Ref.	Optional. A unique reference identifier for the parent capability.
Axon Viewing	Optional. Whether the capability is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Classification	Required. Classification of the capability that best describes its purpose. You can classify the capability as **Organizational Capability**. You can also create classification types.

Field	Description
Axon Status	Optional. Status of the capability in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the capability in the approval lifecycle. You can select one of the following default stages: - In Effect - Obsolete You can also create lifecycle stages.
Capability Type	Required. Type of capability that best describes the object. Specify whether the object is a capability or responsibility.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the **Capability Owner** role.
Segment	Optional. The segment to which you want to assign the capability to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Capability template that you can use to update existing items:

Field	Description
Capability ID	Optional. A unique integer that identifies the capability. When you create a capability, Axon automatically generates an ID for the capability.
Reference	Optional. A unique identifier for the capability.
Capability Name	Required. Name of the capability.
Capability Definition	Required. Description of the capability.
Parent Capability	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Parent Ref.	Optional. A unique reference identifier for the parent capability.

Field	Description
Axon Viewing	Optional. Whether the capability is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Classification	Required. Classification of the capability that best describes its purpose. You can classify the capability as **Organizational Capability**. You can also create classification types.
Axon Status	Optional. Status of the capability in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the capability in the approval lifecycle. You can select one of the following default stages: - In Effect - Obsolete You can also create lifecycle stages.
Capability Type	Required. Type of capability that best describes the object. Specify whether the object is a capability or responsibility.

Client

Download the Client template to bulk upload client objects to Axon. You can choose to upload a new client object or update an existing client object.

Upload New Items

The following table describes the fields of the Client template that you can use to upload new items:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name of the client.
Description	Required. Description of the client.
Parent Client Name	Optional. Parent name of the client that you want to create.
Lifecycle	Required. Stage of the client in the production lifecycle. You can select the following stages: - In Production - Obsolete

Field	Description
Axon Status	Optional. Status of the client in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the client is available for public viewing or not. You can select one of the following options: - Public - Non-Public
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. Select **Client Segmentation Owner**.
Segment	Optional. The segment to which you want to assign the client to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Client template that you can use to update existing items:

Field	Description
Client ID	Optional. A unique integer that identifies the client. When you create a client, Axon automatically generates an ID for the client.
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name of the client.
Description	Required. Description of the client.
Parent Client Name	Optional. Parent name of the client that you want to create.
Lifecycle	Required. Stage of the client in the production lifecycle. You can select the following stages: - In Production - Obsolete

Field	Description
Axon Status	Optional. Status of the client in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the client is available for public viewing or not. You can select one of the following options: - Public - Non-Public

Legal Entity

Download the Legal Entity template to bulk upload legal entity data to Axon. You can choose to upload a new legal entity object or update an existing legal entity object.

Upload New Items

The following table describes the fields of the Legal Entity template that you can use to upload new items:

Field	Description
Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Long Name	Required. Full name of the legal entity.
Description	Optional. Description of the legal entity.
Parent Short Name	Optional. Short name of the parent of the legal entity.
Axon Status	Optional. Status of the legal entity in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the legal entity is available for public viewing or not. You can select one of the following options: - Public - Non-Public
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.

Field	Description
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the **Legal Entity Owner** role.
Segment	Optional. The segment to which you want to assign the legal entity to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Legal Entity template that you can use to update existing items:

Field	Description
Legal ID	Optional. A unique integer that identifies the legal entity. When you create a legal entity, Axon automatically generates an ID for the legal entity.
Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Long Name	Required. Full name of the legal entity.
Description	Optional. Description of the legal entity.
Parent Short Name	Optional. Short name of the parent of the legal entity.
Axon Status	Optional. Status of the legal entity in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the legal entity is available for public viewing or not. You can select one of the following options: - Public - Non-Public

Org Unit

Download the Org Unit template to bulk upload organizational units to Axon. You can choose to upload a organizational unit or update an organizational unit.

Upload New Items

The following table describes the fields of the Org Unit template that you can use to upload new items:

Field	Description
Org Unit Name	Required. Name of the local department, team, or unit.
Description	Optional. Relevant description about the organizational unit.
Reference	Required. Reference identifier for the organizational unit. The reference ID must be a string data type. If you enter a number, you must format the column to Text type. Otherwise, Microsoft Excel alters the reference ID by deleting trailing zeros.
Parent Org Unit Reference	Optional. Parent of the organizational unit if the organization belongs to a hierarchy. The parent record must exist in Axon.
Axon Status	Optional. The status of the org unit. You can select the following default values: - Active - Inactive - Pending - Review - Obsolete - Deleted You can customize the values if required.

Update Existing Items

The following table describes the fields of the Org Unit template that you can use to update existing items:

Field	Description
Org Unit ID	Optional. A unique integer that identifies the organizational unit. When you create an organizational unit, Axon automatically generates an ID for the organizational unit.
Org Unit Name	Required. Name of the local department, team, or unit.
Description	Optional. Relevant description about the organizational unit.
Reference	Required. Reference identifier for the organizational unit. The reference ID must be a string data type. If you enter a number, you must format the column to Text type. Otherwise, Microsoft Excel alters the reference ID by deleting trailing zeros.

Field	Description
Parent Org Unit Reference	Optional. Parent of the organizational unit if the organization belongs to a hierarchy. The parent record must exist in Axon.
Axon Status	Optional. The status of the org unit. You can select the following default values: - Active - Inactive - Pending - Review - Obsolete - Deleted You can customize the values if required.

People

Download the People template to bulk upload people data to Axon. Before you can create People objects, you must create the necessary Org Unit objects.

Upload New Items

The following table describes the fields of the People template that you can use to upload new items:

Field	Description
First Name	Required. First name or the full name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Last Name	Optional. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Function	Optional. Job title or role of the user.
Function Description	Optional. Job description of the role of the user.
Description	Optional. Description about the user.
Email	Required. Email address of the user. Must be unique. Axon sends emails to this address.
Password	Optional. A password to provide access to the user. The user can change the password later. Not required if you enable Single Sign-On authentication. The password must be at least eight characters long and contain at least one lowercase character, one uppercase character, one numeric digit, and one special character.
Axon Status	Optional. The status of the user in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted

Field	Description
Org Unit Reference	Optional. The reference identifier of the organizational unit that the user is associated with. Ensure that you enter a value in the **Org Unit Reference** or **Org Unit Name** column though both the columns are optional.
Org Unit Name	Optional. The name of the organizational unit that the user is associated with. Ensure that you enter a value in the **Org Unit Reference** or **Org Unit Name** column though both the columns are optional.
Profile	Required. A user profile that controls the tasks that the user can perform and the objects that the user can view. Select one of the following user profiles: - WebUser - Admin - SuperAdmin
Office Location	Optional. Office location of the user.
Internal Mail Code	Optional. Internal office mail code of the user.
Office Telephone	Optional. Office phone number of the user.
Mobile/Cell	Optional. Mobile phone number of the user.
LAN ID	Optional. Network ID of the user. LAN ID might be required if you want to enable Single Sign-On authentication. If the LAN ID column is empty, you must not map the LAN ID column of the template to any field in the Axon Field column when you perform a bulk upload.
Employment Type	Required. The type of employment of the user. Specify whether the employment of the user is external or internal.
LinkedIn URL	Optional. Public URL of the user's LinkedIn profile. When you enter a valid URL, a clickable LinkedIn icon appears on the user profile page. For example, https://www.linkedin.com/in/<username>
Lifecycle	Required. The status of the employment of the user. You can select one of the following default statuses: - Working - Temporarily Inactive - Pending Deactivation - Left the Company You can also create statuses.

Update Existing Items

The following table describes the fields of the People template that you can use to update existing items:

Field	Description
People ID	Optional. A unique integer that identifies the user. When you create a People object, Axon automatically generates an ID for the People object.
First Name	Required. First name or the full name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Last Name	Optional. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Function	Optional. Job title or role of the user.
Function Description	Optional. Job description of the role of the user.
Description	Optional. Description about the user.
Email	Required. Email address of the user. Must be unique. Axon sends emails to this address.
Password	Optional. A password to provide access to the user. The user can change the password later. Not required if you enable Single Sign-On authentication. The password must be at least eight characters long and contain at least one lowercase character, one uppercase character, one numeric digit, and one special character.
Axon Status	Optional. The status of the user in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Org Unit Reference	Optional. The reference identifier of the organizational unit that the user is associated with.
Org Unit Name	Optional. The name of the organizational unit that the user is associated with.
Profile	Required. A user profile that controls the tasks that the user can perform and the objects that the user can view. Select one of the following user profiles: - WebUser - Admin - SuperAdmin
Office Location	Optional. Office location of the user.
Internal Mail Code	Optional. Internal office mail code of the user.
Office Telephone	Optional. Office phone number of the user.
Mobile/Cell	Optional. Mobile phone number of the user.

Field	Description
LAN ID	Optional. Network ID of the user. LAN ID might be required if you want to enable Single Sign-On authentication. If the LAN ID column is empty, you must not map the LAN ID column of the template to any field in the Axon Field column when you perform a bulk upload.
Employment Type	Required. The type of employment of the user. Specify whether the employment of the user is external or internal.
LinkedIn URL	Optional. Public URL of the user's LinkedIn profile. When you enter a valid URL, a clickable LinkedIn icon appears on the user profile page. For example, https://www.linkedin.com/in/<username>
Lifecycle	Required. The status of the employment of the user. You can select one of the following default statuses: - Working - Temporarily Inactive - Pending Deactivation - Left the Company You can also create statuses.

Product

Download the Product template to bulk upload products to Axon. You can choose to upload a new product or update an existing product.

Upload New Items

The following table describes the fields of the Product template that you can use to upload new items:

Field	Description
Reference	Optional. A unique reference identifier for the product.
Product Name	Required. Short name of the product. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name of the product.
Product Description	Required. Description of the product.
Parent Product	Optional. Short name of the parent product if the product belongs to a hierarchy.
Lifecycle	Required. Stage of the product in the governance lifecycle. Select one of the following default stages: - In Production - Obsolete You can also create lifecycle stages.

Field	Description
Axon Status	Optional. Status of the product in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the product is available for public viewing or not. You can select one of the following options: - Public - Non-Public
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Product Owner - Product Steward
Segment	Optional. The segment to which you want to assign the product to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Product template that you can use to update existing items:

Field	Description
Product ID	Optional. A unique integer that identifies the product. When you create a product, Axon automatically generates an ID for the product.
Reference	Optional. A unique reference identifier for the product.
Product Name	Required. Short name of the product. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name of the product.
Product Description	Required. Description of the product.
Parent Product	Optional. Short name of the parent product if the product belongs to a hierarchy.

Field	Description
Lifecycle	Required. Stage of the product in the governance lifecycle. Select one of the following default stages: - In Production - Obsolete You can also create lifecycle stages.
Axon Status	Optional. Status of the product in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Optional. Whether the product is available for public viewing or not. You can select one of the following options: - Public - Non-Public

Regulatory Object Templates

Use Regulatory object templates to describe the regulations that you employ in an organization and the geographical areas to which the regulation applies. Download templates for Regulatory objects from Axon to perform a bulk upload.

You can bulk upload the following types of objects:

- Geography
- Regulation
- Regulator
- Regulatory Theme

Geography

Download the Geography template to bulk upload geographical regions to Axon. You can choose to upload a new geography or update an existing geography.

Upload New Items

The following table describes the fields of the Geography template that you can use to upload new items:

Field	Description
Geography Name	Required. Name of the geographical region or country in which you want to enforce a regulation.
Geography Definition	Optional. Description of the geographical region.

Field	Description
Parent Geography Name	Optional. Name of the parent geographical region. You can select **US** or **EU**.
Segment	Optional. The segment to which you want to assign the geography to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Geography template that you can use to update existing items:

Field	Description
Geography ID	Optional. A unique integer that identifies the geographical region. When you create a geographical region, Axon automatically generates an ID for the geographical region.
Geography Name	Required. Name of the geographical region or country in which you want to enforce a regulation.
Geography Definition	Optional. Description of the geographical region.
Parent Geography Name	Optional. Name of the parent geographical region. You can select **US** or **EU**.

Regulation

Download the Regulation template to bulk upload regulations to Axon. You can choose to upload a new regulation or update an existing regulation.

Upload New Items

The following table describes the fields of the Regulation template that you can use to upload new items:

Field	Description
Reference	Optional. Reference identifier for the regulation.
Short Name	Optional. Short name of the regulation. The most commonly used name or an acronym for the regulation, such as GDPR. Enter a name that users can recognize easily.
Regulation Long Name	Required. Full name of the regulation. For example, General Data Protection Regulation.
Description	Required. Description of the regulation.
Additional Info	Optional. Any additional information that provides more context to the regulation.
Publication Date	Required. The date of the original publication of the regulation.
Comments Date	Optional. The date by when you want the stakeholders of an organization to provide comments or opinions on the draft regulation.

Field	Description
Finalization Date	Optional. The date by when you want the stakeholders to submit comments and finalize the regulation.
Compliance Date	Required. The date by when you want to enforce the regulation. For example, 25th May 2018 for GDPR.
Legal Advice	Optional. A description of the legal advice.
Parent Regulation Name	Optional. Long name of the parent regulation.
Parent Ref.	Optional. A unique reference identifier for the parent regulation.
Regulation Maturity	Required. The level of maturity in understanding and interpreting the regulation. Select one of the following maturity stages: - Initial Draft - Open for Comments - Comments Incorporated - Finalizing - Finalized
Regulation Probability	Required. The extent to which a regulation is probable. Select **Confirmed**.
Axon Status	Optional. Status of the regulation in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Legal Advice Type	Optional. The type of legal advice. Select one of the following legal advice types: - Comment - Guideline - Legal Requirement
Regulation Stage	Required. The stage of the organization when a regulation is created or updated. Select one of the following stages: - Interpretation - Impact Assessment - Completed
Compliance Level	Required. The current state of the response of the organization to the regulation. Select one of the following compliance levels: - Unknown - Fully Compliant - Compliant with Exceptions - Materially Not Compliant
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.

Field	Description
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Lan ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. Select one of the following roles: - Regulation Owner - Regulation SME
Segment	Optional. The segment to which you want to assign the regulation to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Regulation template that you can use to update existing items:

Field	Description
Regulation ID	Optional. A unique integer that identifies the regulation. When you create a regulation, Axon automatically generates an ID for the regulation.
Reference	Required. Reference identifier for the regulation.
Short Name	Optional. Short name of the regulation. The most commonly used name or an acronym for the regulation, such as GDPR. Enter a name that users can recognize easily.
Regulation Long Name	Required. Full name of the regulation. For example, General Data Protection Regulation.
Description	Required. Description of the regulation.
Additional Info	Optional. Any additional information that provides more context to the regulation.
Publication Date	Required. The date of the original publication of the regulation.
Comments Date	Optional. The date by when you want the stakeholders of an organization to provide comments or opinions on the draft regulation.
Finalization Date	Optional. The date by when you want the stakeholders to submit comments and finalize the regulation.
Compliance Date	Required. The date by when you want to enforce the regulation. For example, 25th May 2018 for GDPR.
Legal Advice	Optional. A description of the legal advice.
Parent Regulation Name	Optional. Long name of the parent regulation.

Field	Description
Parent Ref.	Optional. A unique reference identifier for the parent regulation.
Regulation Maturity	Required. The level of maturity in understanding and interpreting the regulation. Select one of the following maturity stages: - Initial Draft - Open for Comments - Comments Incorporated - Finalizing - Finalized
Regulation Probability	Required. The extent to which a regulation is probable. Select **Confirmed**.
Axon Status	Optional. Status of the regulation in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Legal Advice Type	Optional. The type of legal advice. Select one of the following legal advice types: - Comment - Guideline - Legal Requirement
Regulation Stage	Required. The stage of the organization when a regulation is created or updated. Select one of the following stages: - Interpretation - Impact Assessment - Completed
Compliance Level	Required. The current state of the response of the organization to the regulation. Select one of the following compliance levels: - Unknown - Fully Compliant - Compliant with Exceptions - Materially Not Compliant

Regulator

Download the Regulator template to bulk upload regulator objects to Axon. You can choose to upload a new regulator object or update an existing regulator object.

Upload New Items

The following table describes the fields of the Regulator template that you can use to upload new items:

Field	Description
Regulator Name	Required. Full name of the regulator.
Short Name	Required. Short name of the regulator. The most commonly used name or an acronym for the regulator. Enter a name that users can recognize easily.
Description	Optional. Description of the regulator.
Segment	Optional. The segment to which you want to assign the regulator to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Regulator template that you can use to update existing items:

Field	Description
Regulator ID	Optional. A unique integer that identifies the regulator. When you create a regulator, Axon automatically generates an ID for the regulator.
Regulator Name	Required. Full name of the regulator.
Short Name	Required. Short name of the regulator. The most commonly used name or an acronym for the regulator. Enter a name that users can recognize easily.
Description	Optional. Description of the regulator.

Regulatory Theme

Download the Regulatory Theme template to bulk upload regulatory themes to Axon. You can choose to upload a new regulatory theme or update an existing regulatory theme.

Upload New Items

The following table describes the fields of the Regulatory Theme template that you can use to upload new items:

Field	Description
Reference	Optional. Reference identifier for the regulatory theme. You can enter a reference identifier to provide content and uniquely identify the regulatory theme. If you leave this field empty, Axon assigns a new reference automatically.
Short Name	Optional. Short name of the regulatory theme. The most commonly used name or an acronym for the regulatory theme. Enter a name that users can recognize easily.
Regulatory Theme Long Name	Required. Full name of the regulatory theme.
Description	Required. Description of the regulatory theme.
Parent Regulatory Theme Name	Optional. Long name of the parent regulatory theme.
Parent Ref.	Optional. A unique reference identifier for the parent regulatory theme.
Axon Status	Optional. Status of the regulatory theme in Axon. Select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Segment	Optional. The segment to which you want to assign the regulatory theme to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Regulatory Theme template that you can use to update existing items:

Field	Description
Regulatory Theme ID	Optional. A unique integer that identifies the regulatory theme. When you create a regulatory theme, Axon automatically generates an ID for the regulatory theme.
Reference	Required. Reference identifier for the regulatory theme. You can enter a reference identifier to provide content and uniquely identify the regulatory theme. If you leave this field empty, Axon assigns a new reference automatically.

Field	Description
Short Name	Optional. Short name of the regulatory theme. The most commonly used name or an acronym for the regulatory theme. Enter a name that users can recognize easily.
Regulatory Theme Long Name	Required. Full name of the regulatory theme.
Description	Required. Description of the regulatory theme.
Parent Regulatory Theme Name	Optional. Long name of the parent regulatory theme.
Parent Ref.	Optional. A unique reference identifier for the parent regulatory theme.
Axon Status	Optional. Status of the regulatory theme in Axon. Select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted

Data & Technology Object Templates

The Data & Technology Object templates contain the main Axon components that identify the systems and data present in an organization and how the systems relate to each other. You can use the data quality objects to control and measure the quality of customer data. Download templates for Data and Technology objects from Axon to perform a bulk upload.

You can bulk upload the following types of objects:

- Attribute
- Data Quality Report
- Data Quality Rule
- Data Set
- Glossary
- Interface
- System

Attribute

Download the Attribute template to bulk upload attributes to Axon. You can choose to upload a new attribute or update an existing attribute.

Upload New Items

The following table describes the fields of the Attribute template that you can use to upload new items:

Field	Description
Reference Number	Optional. The unique reference ID of the attribute. If the Reference Number column is empty, you need to remove the column mapping to the Reference Number field when you perform a bulk upload. Alternatively, you can choose to delete the Reference Number column from the template before you perform a bulk upload.
Attribute Name	Required. Name of the attribute as known in the business.
Attribute Definition	Required. Definition of the attribute.
Data Type	Required if you specify a value list for the data set. Data type of the attribute. Maximum number of characters is 255.
Data Length	Required if you specify the Data Type. Specify a non-zero and numeric value.
Key	Optional. Indicates whether the attribute is a primary key.
Business Logic	Optional. Describes the relevant business logic for the attribute.
Attribute Requirement	Optional. Indicates if the field is mandatory, optional or conditional when a new row is created.
Data Set Ref.	Required if you do not specify the Data Set Name. The unique reference identifier for the data set that contains the attribute.
Data Set Name	Required if you do not specify the Data Set Ref. Name of the data set that contains the attribute.
System Short Name	Optional. Short name of the system that contains the data set and the attribute.
Glossary Ref.	Optional. A unique reference identifier of the glossary that captures the attribute name.
Glossary Name	Optional. Name of the glossary that captures the attribute name.
Parent Glossary Name	Optional. Parent of the glossary that captures the attribute in the glossary hierarchy. The parent glossary term must exist in Axon.
Origin	Optional. The origin of the attribute. You can select one of the following types: Created/Set Here, Sourced, Unknown, or Enterprise Catalog.

Field	Description
Editability	Optional. Describes whether you can edit the attribute. You can select from the following editability options: - Read Only - Editable - Unknown You can also create other editability options.
Editability Role	Optional. The role of the user who can edit the attribute. You can select from the following editability roles: - Admin Only - Restricted User Groups - Most Users You can also create other editability roles.
DB Field Name	Optional. The name of the field in the database that stores the data. Can be an encoded string. For example, database.table.fieldname.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Data Attribute Owner - Data Attribute Steward

Update Existing Items

The following table describes the fields of the Attribute template that you can use to update existing items:

Field	Description
Attribute ID	Optional. A unique integer that identifies the attribute. When you create an attribute, Axon automatically generates an ID for the attribute.
Reference Number	Optional. The unique reference ID of the attribute. If the Reference Number column is empty, you need to remove the column mapping to the Reference Number field when you perform a bulk upload. Or, you can choose to delete the Reference Number column from the template before you perform a bulk upload.
Attribute Name	Required. Name of the attribute as known in the business.
Attribute Definition	Required. Definition of the attribute.

Field	Description
Data Type	Required if you specify a value list for the data set. Data type of the attribute. Maximum number of characters is 255.
Data Length	Required if you specify the Data Type. Specify a non-zero and numeric value.
Key	Optional. Indicates whether the attribute is a primary key.
Business Logic	Optional. Describes the relevant business logic for the attribute.
Attribute Requirement	Optional. Indicates if the field is mandatory, optional or conditional when a new row is created.
Data Set Ref.	Required if you do not specify the Data Set Name. The unique reference identifier for the data set that contains the attribute.
Data Set Name	Required if you do not specify the Data Set Ref. Name of the data set that contains the attribute.
System Short Name	Optional. Short name of the system that contains the data set and the attribute.
Glossary Ref.	Optional. A unique reference identifier of the glossary that captures the attribute name.
Glossary Name	Optional. Name of the glossary that captures the attribute name.
Parent Glossary Name	Optional. Parent of the glossary that captures the attribute in the glossary hierarchy. The parent glossary term must exist in Axon.
Origin	Optional. The origin of the attribute. You can select one of the following types: Created/Set Here, Sourced, Unknown, or Enterprise Catalog.
Editability	Optional. Describes whether you can edit the attribute. You can select from the following editability options: - Read Only - Editable - Unknown You can also create other editability options.
Editability Role	Optional. The role of the user who can edit the attribute. You can select from the following editability roles: - Admin Only - Restricted User Groups - Most Users You can also create other editability roles.

Note:

- Make sure that the attributes you update already exist in Axon.
- In the template, enter the values in the correct format that is required by the fields. When you upload the template, Axon validates your entries and displays an error if the formats are incorrectly entered.

- Ensure that you enter a value in the **Attribute Data Set Ref.** or **Attribute Data Set Name** column though both the column are optional.
- Ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column though both the columns are optional.

Data Quality Report

Download the Data Quality Report template to bulk upload data quality reports to Axon. You can choose to upload a new Data Quality report or update an existing Data Quality report.

Upload New Items

The following table describes the fields of the Data Quality Report template that you can use to upload new items:

Field	Description
Report Date	Required .The date when the evaluation of the data was performed in the Data Quality system. The date of the Data Quality report must be in the DD/MM/YYYY format. Do not enter the date when the reports are uploaded to Axon. You can upload multiple reports for the same item and multiple items at the same time.
Data Quality Result	Required. The score, expressed as a number between 0 and 100, of items that meet the expectations of the quality rule. Axon displays this number as a percentage. Do not use a % sign when entering data. You can enter scores expressed with decimal places. Most Axon screens round off the score with a decimal value.
Data Quality Report URL	Optional. Link to the full report generated by the Data Quality system.
Exception Count	Optional. The number of records that did not meet standards based on some Data Quality system reports. Specify the exception information.
Volume	Optional. Number of observations in the report.
Threshold	Required. Enter a value between 0 to 100. Indicates the threshold value for the Data Quality score. Enter a value between 0 to 100. Data Quality scores below the threshold value are highlighted in red in the Data Quality report. Data Quality scores between the threshold and target value are highlighted in amber in the Data Quality report.
Target	Required. Enter a value between 0 to 100. Indicates the target value for the Data Quality score. Data Quality scores above the target value are highlighted in green in the report. Special characters such as % are not valid. You can enter decimal numbers based on which the results are rounded off. Few Data Quality measurement systems indicate deviation from a perfect score instead of providing the actual score. If the deviation is 5 %, enter '95' instead of the deviation percentage.
Data Quality Rule Reference	Required. The unique reference number of the local data quality rule.

Update Existing Items

The following table describes the fields of the Data Quality Report template that you can use to update existing items:

Field	Description
Data Quality Report ID	Optional. A unique integer that identifies the Data Quality report. When you create a Data Quality report, Axon automatically generates an ID for the Data Quality report. When you update a Data Quality report, it is recommended that you enter the ID though this field is optional.
Report Date	Required. The date when the evaluation of the data was performed in the Data Quality system. The date of the Data Quality report must be in the DD/MM/YYYY format. Do not enter the date when the reports are uploaded to Axon. You can upload multiple reports for the same item and multiple items at the same time.
Data Quality Result	Required. The score, expressed as a number between 0 and 100, of items that meet the expectations of the quality rule. Axon displays this number as a percentage. Do not use a % sign when entering data. You can enter scores expressed with decimal places. Most Axon screens round off the score with a decimal value.
Data Quality Report URL	Optional. Link to the full report generated by the Data Quality system.
Exception Count	Optional. The number of records that did not meet standards based on some Data Quality system reports. Specify the exception information.
Volume	Optional. Number of observations in the report.
Threshold	Required. Enter a value between 0 to 100. Indicates the threshold value for the Data Quality score. Enter a value between 0 to 100. Data Quality scores below the threshold value are highlighted in red in the Data Quality report. Data Quality scores between the threshold and target value are highlighted in amber in the Data Quality report.
Target	Required. Enter a value between 0 to 100. Indicates the target value for the Data Quality score. Data Quality scores above the target value are highlighted in green in the report. Special characters such as % are not valid. You can enter decimal numbers based on which the results are rounded off. Few Data Quality measurement systems indicate deviation from a perfect score instead of providing the actual score. If the deviation is 5 %, enter '95' instead of the deviation percentage.
Data Quality Rule Reference	Required. The unique reference number of the local data quality rule.

Data Quality Rule

Download the Data Quality Rule template to bulk upload standard or local data quality rules to Axon. You can upload new items for a data quality rule object. When you bulk upload data quality rules, a template must contain either the Standard or Local data quality rules.

Upload New Items

The following table describes the fields of the Data Quality Rule template that you can use to upload new items:

Field	Description
Rule Name	Required. Name of the rule. Bulk upload fails if rules with the same names exists for different data sets or attributes.
Rule Description	Required. Description of the logic for the rule.
Reference	Optional. A unique reference number for a data quality rule. Based on this reference number, Axon loads the scores in the Data Quality report.
Technical Description	Optional. A technical description of the rule logic. Can include SQL or pseudo SQL.
Population Description	Optional. Describes the population in scope for the rule.
Measuring Method Description	Optional. The relevant information about the measurement process.
Amber Target	Required. A number from 0 to 100 that indicates the threshold value for the amber color.
Green Target	Required. A number that indicates the threshold value for the green color. Reflects the proportion of the measured data that achieved the performance level for the green target. Enter a number from 0 to 100. Do not enter characters such as %. Decimal Points are acceptable, although results are rounded. Some Data Quality measurement systems report deviation from a perfect score rather than stating the actual score. Do not enter the deviation percentage. If 5% deviation is reported, enter "95".
Axon Viewing	Optional. Whether the data quality rule is available for public viewing or not. You can select one of the following options: - Public - Non-Public
System Measured In	Optional. Name of the system in which the rule is measured. This is the name of the Data Quality profiling or measurement system used for the given data set. This field is required if you choose a local data quality rule. System Measured In and Dataset are used together to distinctly identify a Dataset.

Field	Description
Rule Type	Required. The type of rule that Axon supports. You can select one of the following types: - Completeness - Accuracy - Consistency - Validity - Timeliness You can also create other rule types.
Frequency	Required. Specifies how often the rule is measured. Select one of the following values: - Daily - Weekly - Monthly - Quarterly - AdHoc - Bi-Weekly
Lifecycle	Required. Stage of the data quality rule in the approval lifecycle. You can select the following default stages: - Active - Draft - Obsolete You can also create data quality rule lifecycle stages.
Axon Status	Optional. Status of the data quality rule in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Measuring Method	Optional. Specifies how the data quality rule is evaluated. You can specify one of the following options: - System Function - Technical Script - Business Extract You can also create other measuring methods.
Criticality	Required. Level of criticality. Select from one of the following options: - Low - Medium - High
Automation Level	Optional. Specifies how automated the Data Quality measurement process is. Select one of the following options: - Fully Automated - Partially Automated - Manual - Unknown You can also create other automation levels.
Standard Data Quality Rule Reference	Optional. The reference to the standard data quality rule that is attached to a glossary term and specifies how to validate the data related to the glossary.

Field	Description
Data Quality Rule Type	Optional. The type of data quality rule. Specify whether it is a local or standard data quality rule. If you leave the field empty, Axon considers the rule as a local data quality rule. **Note:** 1. You need to have Data Set edit permissions to bulk upload local data quality rules. 2. You need to have Glossary edit permissions to bulk upload standard data quality rules.
Hour	Optional. The scheduled time duration in the 24 hours format to run the Data Quality rule. Enter a value from 0-23. You can configure **Hour** field if you select one of the following options in the **Frequency** field: - `Ad-hoc` - `Daily` - `Weekly` - `Monthly` - `Quarterly` - `Bi-Weekly`
Day	Optional. The scheduled time duration in the days format to run the Data Quality rule. Enter a value from 1-7. For example, if you enter 1, Axon runs the Data Quality rule on every Sunday. You can configure **Day** field if you select one of the following options in the **Frequency** field: - `Weekly` - `Bi-Weekly`
Month	Optional. The scheduled time duration in the months format to run the Data Quality rule. Enter a value from 1-12. For example, if you enter 1, Axon runs the Data Quality rule on every January. You can configure **Month** field if you select `Quarterly` option in the **Frequency** field.
Date	Optional. The scheduled time duration in the dates format to run the Data Quality rule. Enter the value from 1-31. You can configure **Date** field if you select one of the following options in the **Frequency** field: - `Quarterly` - `Bi-Weekly`
Start Date	Optional. The scheduled start date in the `DD/MM/YYYY` format to run the Data Quality rule. You can configure **Start Date** field if you select `Ad-hoc` in the **Frequency** field.
Execute Rule	Optional. The option to enable or disable execution of the local data quality rule. Select one of the following values: - True. Enables execution of the local data quality rule. - False. Disables execution of the local data quality rule. The default value is `False`.

Field	Description
Attribute Ref.	Optional. A unique reference identifier for the attribute that the rule measures. Ensure that you enter a value in the **Attribute Ref.** or **Attribute Name** column though both the columns are optional.
Attribute Name	Optional. Name of the attribute that the rule measures. Ensure that you enter a value in the **Attribute Ref.** or **Attribute Name** column though both the columns are optional.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute.
Attribute Data Set Ref.	Required. A unique reference identifier for data set that contains the attribute.
Glossary Ref.	Optional. A unique reference identifier for the glossary that is associated with the standard data quality rule. If you choose a standard data quality rule type, ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column.
Glossary Name	Optional. Name of the glossary that is associated with the standard data quality rule. If you choose a standard data quality rule type, ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column.
Parent Glossary Name	Optional. Parent name of the glossary that is associated with the standard data quality rule.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the **DQ Steward** role.

Update Existing Items

The following table describes the fields of the Data Quality Rule template that you can use to update existing items:

Field	Description
Data Quality Rule ID	Optional. A unique integer that identifies the data quality rule. When you create a data quality rule, Axon automatically generates an ID for the data quality rule.
Rule Name	Required. Name of the rule.
Rule Description	Required. Description of the logic for the rule.

Field	Description
Reference	Optional. A unique reference number for a data quality rule. Based on this reference number, Axon loads the scores in the Data Quality report.
Technical Description	Optional. A technical description of the rule logic. Can include SQL or pseudo SQL.
Population Description	Optional. Describes the population in scope for the rule.
Measuring Method Description	Optional. The relevant information about the measurement process.
Amber Target	Required. A number from 0 to 100 that indicates the threshold value for the amber color.
Green Target	Required. A number that indicates the threshold value for the green color. Reflects the proportion of the measured data that achieved the performance level for the green target. Enter a number from 0 to 100. Do not enter characters such as %. Decimal Points are acceptable, although results are rounded. Some Data Quality measurement systems report deviation from a perfect score rather than stating the actual score. Do not enter the deviation percentage. If 5% deviation is reported, enter "95".
Axon Viewing	Optional. Whether the data quality rule is available for public viewing or not. You can select one of the following options: - Public - Non-Public
System Measured In	Optional. Name of the system in which the rule is measured. This is often the name of the Data Quality profiling or measurement system used for the given data set. This field is required if you choose a local data quality rule.
Rule Type	Required. The type of rule that Axon supports. You can select one of the following types: - Completeness - Accuracy - Consistency - Validity - Timeliness You can also create other rule types.
Frequency	Required. Specifies how often the rule is measured. Select one of the following values: - Daily - Weekly - Monthly - Quarterly - AdHoc - Bi-Weekly

Field	Description
Hour	Optional. The scheduled time duration in the 24 hours format to run the Data Quality rule. Enter a value from 0-23. Make sure that you configure the **Hour** field if you select one of the following options in the **Frequency** field: - `Ad-hoc` - `Daily` - `Weekly` - `Monthly` - `Quarterly` - `Bi-Weekly`
Day	Optional. The scheduled time duration in the days format to run the Data Quality rule. Enter a value from 1-7. For example, if you enter 1, Axon runs the Data Quality rule on every Sunday. You can configure **Day** field if you select one of the following options in the **Frequency** field: - `Weekly` - `Bi-Weekly`
Month	Optional. The scheduled time duration in the months format to run the Data Quality rule. Enter a value from 1-12. For example, if you enter 1, Axon runs the Data Quality rule on every January. Make sure that you configure the **Month** field if you select `Quarterly` option in the **Frequency** field.
Date	Optional. The scheduled time duration in the dates format to run the Data Quality rule. Enter the value from 1-31. You can configure **Date** field if you select one of the following options in the **Frequency** field: - `Quarterly` - `Bi-Weekly`
Start Date	Optional. The scheduled start date in the `DD/MM/YYYY` format to run the Data Quality rule. You can configure **Start Date** field if you select `Ad-hoc` in the **Frequency** field.
Execute Rule	Optional. The option to enable or disable execution of the local data quality rule. Select one of the following values: - True. Enables execution of the local data quality rule. - False. Disables execution of the local data quality rule. The default value is `False`.
Lifecycle	Required. Stage of the data quality rule in the approval lifecycle. You can select the following default stages: - Active - Draft - Obsolete You can also create data quality rule lifecycle stages.

Field	Description
Axon Status	Optional. Status of the data quality rule in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Measuring Method	Optional. Specifies how the data quality rule is evaluated. You can specify one of the following options: - System Function - Technical Script - Business Extract You can also create other measuring methods.
Criticality	Required. Level of criticality. Select from one of the following options: - Low - Medium - High
Automation Level	Optional. Specifies how automated the Data Quality measurement process is. Select one of the following options: - Fully Automated - Partially Automated - Manual - Unknown You can also create other automation levels.
Standard Data Quality Rule Reference	Optional. The reference to the standard data quality rule that is attached to a glossary term and specifies how to validate the data related to the glossary.
Data Quality Rule Type	Optional. The type of data quality rule. Specify whether it is a local or standard data quality rule. If you leave the field empty, Axon considers the rule as a local data quality rule. **Note:** 1. You need to have Data Set edit permissions to bulk upload local data quality rules. 2. You need to have Glossary edit permissions to bulk upload standard data quality rules.

Note: When you update an automatically created local data quality rule, you must update only the following fields: Amber Target, Green Target, and Frequency.

Data Set

Download the Data Set template to bulk upload data sets to Axon. You can choose to upload a new data set or update an existing data set.

Upload New Items

The following table describes the fields of the Data Set template that you can use to upload new items:

Field	Description
Ref.	Optional. The unique identifier for the data set.
Name	Required. Name of the data set as known in the business.
Definition	Required. Description of the data set.
Usage	Optional. Additional information about the data set.
Axon Viewing	Optional. Whether the data set is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Type	Required. Type of the data set. You can select the following data set types: - Value List - Data Set - Report Default is Data Set. You can also create other data set types.
System ID	Required if you do not specify the System Short Name. A unique integer that identifies the system. Required during automated onboarding of data sets and attributes from Enterprise Data Catalog into Axon. When you create a system, Axon automatically generates an ID for the system. During automated onboarding, Axon uses the System ID value to lookup and identify the unique system if there are duplicate system names. You can view the ID column from the System facet on Unison search.
System Short Name	Required if you do not specify the System ID. Short name of the system that contains the data set.
Parent System Short Name	Optional. Short name of the parent of the system that contains the data set.
Lifecycle	Required. Stage of the data set in the governance lifecycle. You can select the following default stages: - Draft - Approved - Obsolete You can also create other lifecycle stages.

Field	Description
Axon Status	Optional. Status of the data set in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Glossary Ref.	Optional. Reference identifier for the glossary that the data set is associated with. Ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column though both the columns are optional.
Glossary Name	Optional. The glossary that the data set is associated with. Ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column though both the columns are optional.
Parent Glossary Name	Optional. Parent of the glossary in the glossary hierarchy. The parent glossary term must exist in Axon.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles. - Data Steward - Data Owner
Segment	Optional. The segment to which you want to assign the data set to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Data Set template that you can use to update existing items:

Field	Description
ID	Optional. A unique integer that identifies the data set. When you create a data set, Axon automatically generates an ID for the data set.
Ref.	Optional. The unique identifier for the data set.
Name	Required. Name of the data set as known in the business.

Field	Description
Definition	Required. Description of the data set.
Usage	Optional. Additional information about the data set.
Axon Viewing	Optional. Whether the data set is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Type	Required. Type of the data set. You can select the following data set types: - Value List - Data Set - Report Default is Data Set. You can also create other data set types.
System ID	Required if you do not specify the System Short Name. A unique integer that identifies the system. Required during automated onboarding of data sets and attributes from Enterprise Data Catalog into Axon. When you create a system, Axon automatically generates an ID for the system. During automated onboarding, Axon uses the System ID value to lookup and identify the unique system if there are duplicate system names.
System Short Name	Required if you do not specify the System ID. Short name of the system that contains the data set.
Parent System Short Name	Optional. Short name of the parent of the system that contains the data set.
Lifecycle	Required. Stage of the data set in the governance lifecycle. You can select the following default stages: - Draft - Approved - Obsolete You can also create other lifecycle stages.
Axon Status	Optional. Status of the data set in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Glossary Ref.	Optional. Reference identifier for the glossary that the data set is associated with. Ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column though both the columns are optional.

Field	Description
Glossary Name	Optional. The glossary that the data set is associated with. Ensure that you enter a value in the **Glossary Ref.** or **Glossary Name** column though both the columns are optional.
Parent Glossary Name	Optional. Parent of the glossary in the glossary hierarchy. The parent glossary term must exist in Axon.

Glossary

Download the Glossary template to bulk upload glossaries to Axon. You can choose to upload a new glossary or update an existing glossary.

Upload New Items

The following table describes the fields of the Glossary template that you can use to upload new items:

Field	Description
Name	Required. Name of the glossary.
Definition	Required. Definition of the glossary.
Ref.	Optional. A unique reference identifier for the glossary. If you leave this field empty, Axon automatically assigns a reference identifier.
Examples	Optional. Contextual examples of the glossary.
Business Logic	Optional. Business context in which the glossary is used.
Format Description	Optional. Description of the glossary format.
LDM Reference	Optional. Place of the glossary in the Logical Data Model.
Parent Name	Optional. Parent of the glossary in the glossary hierarchy. The parent glossary term must exist in Axon.
Parent Ref.	Optional. A unique reference identifier for the parent glossary.
Axon Viewing	Optional. Whether the glossary is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the glossary in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted

Field	Description
Lifecycle	Required. Stage of the glossary in the approval lifecycle. You can select the following default stages: - Draft - Being validated - Approved - Obsolete You can also create lifecycle stages.
Format Type	Required. Format in which the glossary is expressed. You can select the following data types: - Text - Number - Decimal - Percentage - Fraction - Date - Time - Datetime You can also create other data types.
KDE	Optional. Indicates whether or not the glossary is a key data element. You can add new key data element values from the Admin panel in addition to the default values, True and False, as necessary.
Security Classification	Required. Security classification of the glossary. You can select the following security classification options: - Public - Internal - Confidential - Secret You can also create other security classification options.
Type	Required. The type of glossary. You can select one of the following glossary types: - Domain. A domain describes a broad category of data concepts, for example, customer domain or transaction data domain. - Subdomain. A subdomain is a division within a domain that facilitates a separation of definitions across relevant themes, for example, client or transaction. - Term. A business term corresponds to a single concept, for example, Maturity Date. - Metric. A metric is a measurement of a specific business activity that may be a combination of other glossary concepts for the measurement. If you create additional glossary types from the Admin Panel, you can see the list in this field.

Field	Description
Confidentiality	Optional. The Confidentiality rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Confidentiality rating indicates the ability of a glossary to show the right information to the right users who have the right credentials. Confidentiality, Integrity, and Availability are crucial elements of security for a glossary. The default Confidentiality rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Confidentiality rating is 2, the glossary is moderately secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Integrity	Optional. The Integrity rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Integrity rating indicates the ability of a glossary to ensure that the information shown to the users have not been compromised. Confidentiality, Integrity and Availability are crucial elements of security for a glossary. The default Integrity rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Integrity rating is 1, the glossary is less secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Availability	Optional. The Availability rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Availability rating indicates the ability of a glossary to show the right information to the right users at the right time. Confidentiality, Integrity and Availability are crucial elements of security for a glossary. The default Availability rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Availability rating is 3, the glossary is most secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Alias Names	Optional. Alternate name for a glossary. Use synonyms for the glossary that is commonly used in your organization. You can add multiple alias names for a glossary by adding a comma (,) as a delimiter. If you use the CSV file format to bulk upload data, you must enter the comma separated alias names in double quotes (" ".) If you want to add a comma in a single alias name, you must create or edit a glossary manually and add the alias name.

Field	Description
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles: - Glossary Definition Owner - Glossary Steward
Segment	Optional. The segment to which you want to assign the glossary to. This column appears if a SuperAdmin user has created segments in the Admin Panel.

Update Existing Items

The following table describes the fields of the Glossary template that you can use to update existing items:

Field	Description
ID	Optional. A unique integer that identifies the glossary. When you create a glossary, Axon automatically generates an ID for the glossary.
Name	Required. Name of the glossary.
Definition	Required. Definition of the glossary.
Ref.	Optional. A unique reference identifier for the glossary. If you leave this field empty, Axon automatically assigns a reference identifier.
Examples	Optional. Contextual examples of the glossary.
Business Logic	Optional. Business context in which the glossary is used.
Format Description	Optional. Description of the glossary format.
LDM Reference	Optional. Place of the glossary in the Logical Data Model.
Parent Name	Optional. Parent of the glossary in the glossary hierarchy. The parent glossary term must exist in Axon.
Parent Ref.	Optional. A unique reference identifier for the parent glossary.
Axon Viewing	Optional. Whether the glossary is available for public viewing or not. You can select one of the following options: - Public - Non-Public

Field	Description
Axon Status	Optional. Status of the glossary in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the glossary in the approval lifecycle. You can select the following default stages: - Draft - Being validated - Approved - Obsolete You can also create lifecycle stages.
Format Type	Required. Format in which the glossary is expressed. You can select the following data types: - Text - Number - Decimal - Percentage - Fraction - Date - Time - Datetime You can also create other data types.
KDE	Optional. Indicates whether or not the glossary is a key data element. You can add new key data element values from the Admin panel in addition to the default values, True and False, as necessary.
Security Classification	Required. Security classification of the glossary. You can select the following security classification options: - Public - Internal - Confidential - Secret You can also create other security classification options.
Type	Required. The type of glossary. You can select one of the following glossary types: - Domain. A domain describes a broad category of data concepts, for example, customer domain or transaction data domain. - Subdomain. A subdomain is a division within a domain that facilitates a separation of definitions across relevant themes, for example, client or transaction. - Term. A business term corresponds to a single concept, for example, Maturity Date. - Metric. A metric is a measurement of a specific business activity that may be a combination of other glossary concepts for the measurement. If you create additional glossary types from the Admin Panel, you can see the list in this field.

Field	Description
Confidentiality	Optional. The Confidentiality rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Confidentiality rating indicates the ability of a glossary to show the right information to the right users who have the right credentials. Confidentiality, Integrity, and Availability are crucial elements of security for a glossary. The default Confidentiality rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Confidentiality rating is 2, the glossary is moderately secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Integrity	Optional. The Integrity rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Integrity rating indicates the ability of a glossary to ensure that the information shown to the users have not been compromised. Confidentiality, Integrity and Availability are crucial elements of security for a glossary. The default Integrity rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Integrity rating is 1, the glossary is less secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Availability	Optional. The Availability rating from the Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Availability rating indicates the ability of a glossary to show the right information to the right users at the right time. Confidentiality, Integrity and Availability are crucial elements of security for a glossary. The default Availability rating ranges from 1 to 3. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, if the Availability rating is 3, the glossary is most secure. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel.
Alias Names	Optional. Alternate name for a glossary. Use synonyms for the glossary that is commonly used in your organization. You can add multiple alias names for a glossary by adding a comma (,) as a delimiter. If you use the CSV file format to bulk upload data, you must enter the comma separated alias names in double quotes (" ".) If you want to add a comma in a single alias name, you must create or edit a glossary manually and add the alias name.

Interface

Download the Interface template to bulk upload interfaces to Axon. You can choose to upload a new interface object or update an existing interface object.

Upload New Items

The following table describes the fields of the Interface template that you can use to upload new items:

Field	Description
Interface Name	Required. Name of the interface.
Reference	Optional. Reference ID for the interface. The reference ID must be a string data type. If you enter a number, you must format the column to Text type. Otherwise, Microsoft Excel alters the reference ID by deleting trailing zeros.
Asset ID	Optional. A unique identifier or a serial number for a system or an interface that the IT or Property department assigns.
Synchronisation Control	Optional. Description of the rules that control the synchronization of information between the two connected interfaces.
Interface Description	Required. Description of the system interface.
Transfer Method	Optional. Protocol or medium used to move information between the source and target system. You can select the following methods: - FTP - SFTP - SCP - HTTP - HTTPS - SOAP - MQSERIES - EMAIL You can also create other transfer methods.
Transfer Format	Optional. Format or file type used to flow information between the source and target system. You can select the following formats: - XML - XBRL - JSON - DELIMITED - XLS You can also create other transfer formats.
Interface Classification	Optional. Classification of the system interface that best describes its purpose. You can select the following default interfaces: - BAU - Reconciliation - Ref Data Distribution - Migration You can also create interface classifications.

Field	Description
Lifecycle	Required. Stage of the system interface in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned You can also create lifecycle stages.
Axon Status	Optional. Status of the system interface in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Source System Short Name	Required. Short name of the system from which the information flows out.
Target System Short Name	Required. Short name of the system to which the information flows in.
Automation Level	Required. Level of automation of the interface. You can select the following the automation levels: - Manual - File based - Manual - Re-keyed - Partially Automated - Fully Automated - Unknown Default is Unknown.
Frequency	Optional. Frequency at which data flows between the source and target system. You can select the following frequencies: - Ad-Hoc - Monthly - Weekly - Daily - Realtime - Unknown You can also create other frequency options.
Axon Viewing	Optional. Whether the system interface is available for public viewing or not. You can select one of the following options: - Public - Non-Public
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.

Field	Description
User LAN ID	Optional. Network ID of the user.
Governance Role	Optional. The role of the user. You can select the following roles. - Interface Owner - Interface Steward

Update Existing Items

The following table describes the fields of the Interface template that you can use to update existing items:

Field	Description
Interface ID	Optional. A unique integer that identifies the interface. When you create a interface, Axon automatically generates an ID for the interface.
Interface Name	Required. Name of the interface.
Reference	Optional. Reference ID for the interface. The reference ID must be a string data type. If you enter a number, you must format the column to Text type. Otherwise, Microsoft Excel alters the reference ID by deleting trailing zeros.
Asset ID	Optional. A unique identifier or a serial number for a system or an interface that the IT or Property department assigns.
Synchronisation Control	Optional. Description of the rules that control the synchronization of information between the two connected interfaces.
Interface Description	Required. Description of the system interface.
Transfer Method	Optional. Protocol or medium used to move information between the source and target system. You can select the following methods: - FTP - SFTP - SCP - HTTP - HTTPS - SOAP - MQSERIES - EMAIL You can also create other transfer methods.
Transfer Format	Optional. Format or file type used to flow information between the source and target system. You can select the following formats: - XML - XBRL - JSON - DELIMITED - XLS You can also create other transfer formats.

Field	Description
Interface Classification	Optional. Classification of the system interface that best describes its purpose. You can select the following default interfaces: - BAU - Reconciliation - Ref Data Distribution - Migration You can also create interface classifications.
Lifecycle	Required. Stage of the system interface in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned You can also create lifecycle stages.
Axon Status	Optional. Status of the system interface in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Source System Short Name	Required. Short name of the system from which the information flows out.
Target System Short Name	Required. Short name of the system to which the information flows in.
Automation Level	Required. Level of automation of the interface. You can select the following the automation levels: - Manual - File based - Manual - Re-keyed - Partially Automated - Fully Automated - Unknown Default is Unknown.
Frequency	Optional. Frequency at which data flows between the source and target system. You can select the following frequencies: - Ad-Hoc - Monthly - Weekly - Daily - Realtime - Unknown You can also create other frequency options.
Axon Viewing	Optional. Whether the system interface is available for public viewing or not. You can select one of the following options: - Public - Non-Public

System

Download the System template to bulk upload systems to Axon. You can choose to upload a new system or update an existing system.

Upload New Items

The following table describes the fields of the System template that you can use to upload new items:

Field	Description
Short Name	Required. Short name of the system. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name or long name of the system.
Asset ID	Optional. A unique identifier for the system or the interface. The IT or Property department designates the Asset ID.
External	Required. A flag for systems that are not owned or controlled by the client organization from which a data feed is taken. Select True or False.
Description	Required. Description of the system and the business purpose.
URL	Optional. Link to another page where related information is mentioned. Include the network protocol in the link. For example, enter `https://www.website.com`.
Parent Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Axon Viewing	Optional. Whether the system is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the system in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Required. Stage of the system in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned You can also create lifecycle stages.
Type	Required. Whether the system is a software application or one of several file types. You also need to specify whether the system is hosted internally inside your organization or externally outside your organization.
Classification	Optional. Classification of the system that best describes its function. You can select the Data Warehouse classification, or create your own classification options.

Field	Description
Confidentiality	Optional. The Confidentiality rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Confidentiality rating indicates the ability of a system to show the right information to the right users who have the right credentials. Confidentiality, Integrity, and Availability are crucial elements of security for a system. The default Confidentiality rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Confidentiality rating is 2, the system is moderately secure.
Integrity	Optional. The Integrity rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Integrity rating indicates the ability of a system to ensure that the information shown to the users have not been compromised. Confidentiality, Integrity and Availability are crucial elements of security for a system. The default Integrity rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Integrity rating is 1, the system is less secure.
Availability	Optional. The Availability rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Availability rating indicates the ability of a system to show the right information to the right users at the right time. Confidentiality, Integrity and Availability are crucial elements of security for a system. The default Availability rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Availability rating is 3, the system is most secure.
User Email	Optional. Email address of the user. Must be unique. Axon sends emails to this email address.
User First Name	Optional. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Optional. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Optional. Network ID of the user.

Field	Description
Governance Role	Optional. The role of the user. You can select the following roles: - System Business Owner - System Steward
Segment	Optional. The segment to which you want to assign the system to. This column appears if a SuperAdmin user has created segments in the Admin Panel.
Data Quality Automation	Optional. Creates local Data Quality rules and runs the rules for the system attributes. Supported values are true or false.

Update Existing Items

The following table describes the fields of the System template that you can use to update existing items:

Field	Description
ID	Optional. A unique integer that identifies the system. When you create a system, Axon automatically generates an ID for the system.
Short Name	Required. Short name of the system. Enter a name that other Axon users can recognize easily.
Long Name	Optional. Full name or long name of the system.
Asset ID	Optional. A unique identifier for the system or the interface. The IT or Property department designates the Asset ID.
External	Required. A flag for systems that are not owned or controlled by the client organization from which a data feed is taken. Select True or False.
Description	Required. Description of the system and the business purpose.
URL	Optional. Link to another page where related information is mentioned. Include the network protocol in the link. For example, enter `https://www.website.com`.
Parent Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Axon Viewing	Optional. Whether the system is available for public viewing or not. You can select one of the following options: - Public - Non-Public
Axon Status	Optional. Status of the system in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted

Field	Description
Lifecycle	Required. Stage of the system in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned You can also create lifecycle stages.
Type	Required. Whether the system is a software application or one of several file types. You also need to specify whether the system is hosted internally inside your organization or externally outside your organization.
Classification	Optional. Classification of the system that best describes its function. You can select the Data Warehouse classification, or create your own classification options.
Confidentiality	Optional. The Confidentiality rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Confidentiality rating indicates the ability of a system to show the right information to the right users who have the right credentials. Confidentiality, Integrity, and Availability are crucial elements of security for a system. The default Confidentiality rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Confidentiality rating is 2, the system is moderately secure.
Integrity	Optional. The Integrity rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Integrity rating indicates the ability of a system to ensure that the information shown to the users have not been compromised. Confidentiality, Integrity and Availability are crucial elements of security for a system. The default Integrity rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Integrity rating is 1, the system is less secure.

Field	Description
Availability	Optional. The Availability rating from the Confidentiality, Integrity, and Availability (CIA) rating of a system. Availability rating indicates the ability of a system to show the right information to the right users at the right time. Confidentiality, Integrity and Availability are crucial elements of security for a system. The default Availability rating ranges from 1 to 3. You can add a maximum of nine ratings from the Admin panel. Each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure. For example, if the Availability rating is 3, the system is most secure.
Data Quality Automation	Optional. Creates local Data Quality rules and runs the rules for the system attributes. Supported values are true or false.

Relationship Templates

Use Relationship templates to explain how one object is linked to the other object. Download templates for Relationships from Axon to perform a bulk upload.

If an object in a relationship template contains a reference identifier column, the object name column becomes optional. When you perform a bulk upload, you must provide a value either in the name or reference identifier column even though both the columns are optional. For example, in the Business Area X Glossary template, the Glossary object has **Glossary Ref.** and **Glossary Name** columns that are optional. You need to fill in the **Glossary Ref.** or **Glossary Name** column before you upload the Business Area X Glossary template.

You can bulk upload the following types of relationships:

- Attribute X Attribute
- Attribute X Physical Field
- Business Area X Glossary
- Business Area X Process
- Business Area X System
- Capability X Business Area
- Capability X Client
- Capability X Glossary
- Capability X Legal Entity
- Capability X Process
- Capability X Product
- Capability X System
- Committee X Capability
- Committee X Committee

- Data Set X Client
- Data Set X Legal Entity
- Data Set X Product
- Glossary X Client
- Glossary X Glossary
- Glossary X Product
- Interface X Glossary
- Legal Entity X Geography
- Local Data Quality Rule X Attribute
- Local Data Quality Rule X Technical Reference
- People X People
- Policy X Attribute
- Policy X Business Area
- Policy X Client
- Policy X Data Set
- Policy X Glossary
- Policy X Legal Entity
- Policy X Policy
- Policy X Process
- Policy X Product
- Policy X Project
- Policy X System
- Process X Attribute
- Process X Client
- Process X Data Set
- Process X Glossary
- Process X Legal Entity
- Process X Process
- Process X Product
- Process X System
- Process X System Interface
- Product X Business Area
- Product X Client
- Product X Legal Entity
- Project X Attribute
- Project X Business Area
- Project X Capability
- Project X Client
- Project X Data Set

- Project X Glossary
- Project X Process
- Project X Product
- Project X Project
- Project X System
- Regulation X Policy
- Regulation X Product
- Regulation X Project
- Regulation X Regulator
- Regulation X Regulatory Theme
- Regulator X Geography
- Segment X Object
- System X Client
- System X Data Onboarding Rule
- System X Glossary
- System X Legal Entity
- System X Product
- System X Resource

Attribute X Attribute

Download the Attribute X Attribute relationship template to bulk upload the relationships between attributes.

The following table describes the fields of the Attribute X Attribute relationship template:

Field	Description
Sourcing Logic	Optional. Indicates the logic that is applied to the flow of data. For example, selections or transformations performed.
Sourcing Type	Required. The type of sourcing for the attribute. Specify whether the sourcing type is enforced lookup, unenforced lookup, or sourced from.
Target Attribute Ref.	Required if you do not specify Target Attribute Name. A unique reference identifier for the target attribute.
Target Attribute Name	Required if you do not specify Target Attribute Ref. Name of the target attribute.
Target Data Set Name	Optional. Name of the target data set that contains the attribute.
Target System Short Name	Optional. Short name of the target system that contains the data set and the attribute.
Source Attribute Ref.	Required if you do not specify Source Attribute Name. A unique reference identifier for the source attribute.
Source Attribute Name	Required if you do not specify Source Attribute Ref. Name of the source attribute.

Field	Description
Source Data Set Name	Optional. Name of the source data set that contains the attribute.
Source System Short Name	Optional. Short name of the source system that contains the data set and the attribute.
Scope of Data	Optional. The actual scope of data. Specify if you want all the data or a subset of data.
Interface Name	Optional. Name of the system interface. If you specify the Interface Name field, you need to fill in the Interface Source System and Interface Target System fields.
Interface Source System Short Name	Optional. System from which the information flows out.
Interface Target System Short Name	Optional. System to which the information flows in.

Attribute X Physical Field

Download the Attribute X Physical Field relationship template to bulk upload the relationships between Axon attributes and Enterprise Data Catalog fields.

When you bulk upload the Attribute X Physical Field relationship template, Axon validates the operation based on the following details:

- The Enterprise Data Catalog instance is configured, available, and running.
- The field name, field identifier, and field type are present in Enterprise Data Catalog.
- You have the required permissions to access the physical fields in Enterprise Data Catalog.

To know the list of values that you can enter in certain fields in the bulk upload template, download the list of Enterprise Data Catalog physical fields as a CSV file, and refer to the corresponding columns. To download the list of fields, click **Create** > **Manage Catalog Links**, go to the **Physical Fields** tab, click the  icon next to the **Search** option, and select **Export to CSV**.

The following table describes the fields of the Attribute X Physical Field relationship template:

Field	Description
Attribute Ref.	Required if you do not specify Attribute Name. A unique reference identifier for the attribute.
Attribute Name	Required if you do not specify Attribute Ref. Name of the attribute. Enter a name that other Axon users can recognize easily.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute. If you provide a duplicate attribute name, you must provide the data set name.
Attribute System Short Name	Optional. Short name of the system that contains the data set and attribute. If you provide a duplicate attribute name, you must provide the system name.

Field	Description
Name	Required. Name of the Enterprise Data Catalog field. To know the list of values that you can enter in this field, see the **Physical Field Name** column in the CSV file that contains the list of Enterprise Data Catalog physical fields. **Note:** If you link an Axon attribute with an Enterprise Data Catalog field that contains the $ symbol in the field name, the field will not appear in Unison Search.
Field ID	Required. Identifier for the Enterprise Data Catalog field. To know the list of values that you can enter in this field, see the **Physical Field ID** column in the CSV file that contains the list of Enterprise Data Catalog physical fields.
Field Type	Required. Type of the Enterprise Data Catalog field. To know the list of values that you can enter in this field, see the **Class Type** column in the CSV file that contains the list of Enterprise Data Catalog physical fields.

Business Area X Glossary

Download the Business Area X Glossary relationship template to bulk upload the relationships between a business area and glossary.

The following table describes the fields of the Business Area X Glossary relationship template:

Field	Description
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Parent Business Area Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the business area and glossary. Select **Is related to**.

Business Area X Process

Download the Business Area X Process relationship template to bulk upload the relationships between a business area and process.

The following table describes the fields of the Business Area X Process relationship template:

Field	Description
Description	Optional. Description of the relationship between the business area and process.
Process Ref.	Required if you do not specify Process Name. A unique identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Business Area Parent Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the business area and process. Select **Process is related to Business Area**.

Business Area X System

Download the Business Area X System relationship template to bulk upload the relationships between a business area and system.

The following table describes the fields of the Business Area X System relationship template:

Field	Description
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Parent System Short Name	Optional. Name of the parent system if the system belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Business Area Parent Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the business area and system. Select **Is related to**.

Capability X Business Area

Download the Capability X Business Area relationship template to bulk upload the relationships between a capability and business area.

The following table describes the fields of the Capability X Business Area relationship template:

Field	Description
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Business Parent Area Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the capability and business area. Select **Capability is related to Business Area**.

Capability X Client

Download the Capability X Client relationship template to bulk upload the relationships between a capability and client.

The following table describes the fields of the Capability X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client that you want to create.
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the capability and client. Select **Is related to**.

Capability X Glossary

Download the Capability X Glossary relationship template to bulk upload the relationships between a capability and glossary.

The following table describes the fields of the Capability X Glossary relationship template:

Field	Description
Glossary Ref.	Required if you do not specify Glossary Name. A unique identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Parent Capability Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the capability and glossary. Select **Is related to**.

Capability X Legal Entity

Download the Capability X Legal Entity relationship template to bulk upload the relationships between a capability and legal entity.

The following table describes the fields of the Capability X Legal Entity relationship template:

Field	Description
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Legal Short Name	Required. Name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Short Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the capability and legal entity. Select **Capability is related to Legal Entity**.

Capability X Process

Download the Capability X Process relationship template to bulk upload the relationships between a capability and process.

The following table describes the fields of the Capability X Process relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Parent of the capability. The capability parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the capability and process. Select **Is related to**.

Capability X Product

Download the Capability X Product relationship template to bulk upload the relationships between a capability and process.

The following table describes the fields of the Capability X Product relationship template:

Field	Description
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability. The parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the capability and product. Select **Is related to**.

Capability X System

Download the Capability X System relationship template to bulk upload the relationships between a capability and system.

The following table describes the fields of the Capability X System relationship template:

Field	Description
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Parent System Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Capability Ref.	Required if you do not specify Capability Name. A unique identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability. The capability parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the capability and system. Select **Capability is supported by System**.

Committee X Capability

Download the Committee X Capability relationship template to bulk upload the relationships between a committee and capability.

The following table describes the fields of the Committee X Capability relationship template:

Field	Description
Committee Ref.	Required if you do not specify Committee Name. A unique reference identifier for the committee.
Committee Name	Required if you do not specify Committee Ref. Name of the committee. Enter a name that users can recognize easily.
Committee Parent Name	Optional. Name of the parent committee that you want to create.
Capability Ref.	Required if you do not specify Capability Name. A unique reference identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the committee and capability. Select **Is related to**.

Committee X Committee

Download the Committee X Committee relationship template to bulk upload the relationships between committees.

The following table describes the fields of the Committee X Committee Area relationship template:

Field	Description
Source Committee Ref.	Required if you do not specify Source Committee Name. A unique identifier for the source committee.
Source Committee Name	Required if you do not specify Source Committee Ref. Name of the source committee. Enter a name that other Axon users can recognize easily.
Source Committee Parent Name	Optional. Name of the parent source committee if the committee belongs to a hierarchy.
Target Committee Ref.	Required if you do not specify Target Committee Name. A unique identifier for the target committee.
Target Committee Name	Required if you do not specify Target Committee Ref. Name of the target committee. Enter a name that other Axon users can recognize easily.
Target Parent Committee Name	Optional. Name of the parent target committee if the committee belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the source and target committees. Select **Rolls up into**.

Data Set X Client

Download the Data Set X Client relationship template to bulk upload the relationships between a data set and client.

The following table describes the fields of the Data Set X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client that you want to create.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set as known in the business organization.
Data Set System Short Name	Optional. Short name of the system that contains the data set.

Field	Description
Data Set Parent System Short Name	Optional. Short name of the parent of the system that contains the data set.
Relationship Type	Required. The type of relationship between the data set and client. Select **Is related to**.

Data Set X Legal Entity

Download the Data Set X Legal Entity relationship template to bulk upload the relationships between a data set and legal entity.

The following table describes the fields of the Data Set X Legal Entity relationship template:

Field	Description
Legal Entity Short Name	Required. Name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Entity Short Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set as known in the business organization.
Data Set System Short Name	Optional. Short name of the system that contains the data set.
Data Set Parent System Short Name	Optional. Short name of the parent of the system that contains the data set.
Relationship Type	Required. The type of relationship between the data set and legal entity. Select **Is related to**.

Data Set X Product

Download the Data Set X Product relationship template to bulk upload the relationships between a data set and product.

The following table describes the fields of the Data Set X Product relationship template:

Field	Description
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.

Field	Description
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set as known in the business organization.
Data Set System Short Name	Optional. Short name of the system that contains the data set.
Data Set Parent System Short Name	Optional. Short name of the parent of the system that contains the data set.
Relationship Type	Required. The type of relationship between the data set and product. Select **Is related to**.

Glossary X Client

Download the Glossary X Client relationship template to bulk upload the relationships between a glossary and client.

The following table describes the fields of the Glossary X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Parent Client Name	Optional. Name of the parent client that you want to create.
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the glossary and client. Select **Is Related to**.

Glossary X Glossary

Download the Glossary X Glossary relationship template to bulk upload the relationships between glossaries.

The following table describes the fields of the Glossary X Glossary relationship template:

Field	Description
Source Glossary Ref.	Required if you do not specify Source Glossary Name. A unique identifier for the source glossary.
Source Glossary Name	Required if you do not specify Source Glossary Ref. Name of the source glossary.
Source Parent Glossary Name	Optional. Name of the parent source glossary. The source glossary parent name must exist in Axon.

Field	Description
Target Glossary Ref.	Required if you do not specify Target Glossary Name. A unique identifier for the target glossary.
Target Glossary Name	Required if you do not specify Target Glossary Ref. Name of the target glossary.
Target Parent Glossary Name	Optional. Name of the parent target glossary. The target glossary parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the source and target glossaries. Select **Is Related to**. You can also create relationship types if required.

Glossary X Product

Download the Glossary X Product relationship template to bulk upload the relationships between a glossary and product.

The following table describes the fields of the Glossary X Product relationship template:

Field	Description
Product Ref.	Required if you do not specify Product Name. A unique identifier for the product.
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Glossary Ref.	Required if you do not specify Glossary Name. A unique identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the glossary and product. Select **Is Related to**.

Glossary x System

Download the Glossary X System relationship template to bulk upload the relationships between a glossary and system.

The following table describes the fields of the Glossary X System relationship template:

Field	Description
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Parent of the glossary term. The glossary parent name must exist in Axon.
System short Name	Required. Short name of a system that other Axon users can recognize easily.
Strategic Data Set Name	Optional. Name of the data set that acts as a strategic data set.
Relationship Type	Required. The type of relationship between the glossary and system Select one of the following type: - Strategic Master Source for

Interface X Glossary

Download the Interface X Glossary relationship template to bulk upload the relationships between an interface and a glossary.

The following table describes the fields of the Interface X Glossary relationship template:

Field	Description
Relationship Type	Required. The type of relationship between the interface and the glossary. Select **Expected glossary item coverage**.
Interface Ref.	Required if you do not specify Interface Name. A unique identifier for the system interface.
Interface Name	Required if you do not specify Interface Ref. Name of the system interface.
Interface Source System Short Name	Required if you do not specify Interface Target System Short Name. Short name of the system from which the information flows out.
Interface Target System Short Name	Required if you do not specify Interface Source System Short Name. Short name of the system to which the information flows in.
Glossary Ref.	Required if you do not specify Glossary Name. A unique identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Parent of the glossary term. The glossary parent name must exist in Axon.

Legal Entity X Geography

Download the Legal Entity X Geography relationship template to bulk upload the relationships between a legal entity and geography.

The following table describes the fields of the Legal Entity X Geography relationship template:

Field	Description
Geography	Required. Name of the geography. Enter a name that other Axon users can recognize easily.
Parent Geography	Optional. Name of the parent geography.
Legal Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Short Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the geography and legal entity. Select **Is related to**.

Local Data Quality Rule X Attribute

Download the Attribute X Attribute relationship template to bulk upload the relationships between a local data quality rule and attribute.

The following table describes the fields of the Local Data Quality Rule X Attribute relationship template:

Field	Description
Ref.	Required if you do not specify Rule Name. The unique identifier for the local data quality rule.
Rule Name	Required if you do not specify Ref. Name of the local data quality rule.
Attribute Ref.	Required if you do not specify Attribute Name. A unique reference identifier for the attribute.
Attribute Name	Required if you do not specify Attribute Ref. Name of the attribute. Enter a name that other Axon users can recognize easily.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute. If you provide a duplicate attribute name, you must provide the data set name.
Attribute System Short Name	Optional. Short name of the system that contains the data set and attribute. If you provide a duplicate attribute name, you must provide the system name.
Measured Against Attribute Name	Optional. Name of the attribute. Enter a name that other Axon users can recognize easily. Ensure that you enter a value in the Attribute Ref. or Attribute Name column though both the columns are optional.

Field	Description
Measured Against Attribute Data Set Name	Optional. Name of the data set that contains the attribute. If you provide a duplicate attribute name, you must provide the data set name.
Measured Against Attribute Data Set System Name	Optional. Short name of the system that contains the data set and attribute. If you provide a duplicate attribute name, you must provide the system name.

Local Data Quality Rule X Technical Reference

Download the Local Data Quality Rule X Technical Reference relationship template to bulk upload the relationships between a local data quality rule and technical reference.

The following table describes the fields of the Local Data Quality Rule X Technical Reference relationship template:

Field	Description
Ref.	Required if you do not specify Rule Name. The unique identifier for the local data quality rule.
Rule Name	Required if you do not specify Ref. Name of the local data quality rule.
Technical Rule Reference	Required. Reference link to a rule in Informatica Data Quality that you can associate with the local data quality rule. Informatica Data Quality runs either a profile or scorecard that you define against the data in a column or metric. Enter the details in the following format: - **Profile**: `profile:/profilepath@profilename` - **Scorecard**: `scorecard:/scorecardpath@scorecardname` For more information, refer to *Linking Profiles and Scorecards to Local Data Quality Rules* topic in the Axon Data Governance 7.3.8 User Guide.

People X People

Download the People X People relationship template to bulk upload the relationships between an employee and manager.

The following table describes the fields of the People X People relationship template:

Field	Description
Manager Email	Required if you do not specify Manager First Name, Manager Last Name, or Manager LAN ID. Email address of the manager of the employee.
Manager First Name	Required if you do not specify Manager Email, Manager Last Name, or Manager LAN ID. First name of the manager of the employee.
Manager Last Name	Required if you do not specify Manager Email, Manager First Name, or Manager LAN ID. Last name of the manager of the employee.

Field	Description
Manager LAN ID	Required if you do not specify Manager Email, Manager First Name, or Manager Last Name. Network ID of the manager of the employee.
Employee Email	Required if you do not specify Employee First Name, Employee Last Name, or Employee LAN ID. A unique email address of the employee. Axon sends emails to this address.
Employee First Name	Required if you do not specify Employee Email, Employee Last Name, or Employee LAN ID. First name of the employee. Specify the name as it is recorded in the LDAP directory server of your organization.
Employee Last Name	Required if you do not specify Employee Email, Employee First Name, or Employee LAN ID. Last name of the employee. Specify the name as it is recorded in the LDAP directory server of your organization.
Employee LAN ID	Required if you do not specify Employee Email, Employee First Name, or Employee Last Name. Network ID of the employee. LAN ID might be required if you want to enable Single Sign-On authentication. If the LAN ID column is empty, you must not map the LAN ID column of the template to any field in the Axon Field column when you perform a bulk upload.
Relationship Type	Required. The type of relationship between the employee and manager. Specify one of the following relationship types: - Direct report - Dotted line

Policy X Attribute

Download the Policy X Attribute relationship template to bulk upload the relationships between a policy and attribute.

The following table describes the fields of the Policy X Attribute relationship template:

Field	Description
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Attribute Ref.	Required if you do not specify Attribute Name. A unique reference identifier for the attribute.
Attribute Name	Required if you do not specify Attribute Ref. Name of the attribute. Enter a name that other Axon users can recognize easily.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute.

Field	Description
Attribute System Short Name	Optional. Short name of the system that contains the data set and attribute.
Relationship Type	Required. The type of relationship between the policy and attribute. Select **Is related to**.

Policy X Business Area

Download the Policy X Business Area relationship template to bulk upload the relationships between a policy and business area.

The following table describes the fields of the Policy X Business Area relationship template:

Field	Description
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Parent Business Area Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and business area. Specify whether the policy is owned by the business area or the policy is a training requirement for the business area.

Policy X Client

Download the Policy X Client relationship template to bulk upload the relationships between a policy and client.

The following table describes the fields of the Policy X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client that you want to create.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.

Field	Description
Parent Policy Name	Optional. Parent of the policy if the policy belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and client. Select **Is Related to**.

Policy X Data Set

Download the Policy X Data Set relationship template to bulk upload the relationships between a policy and data set.

The following table describes the fields of the Policy X Data Set relationship template:

Field	Description
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set. Enter a name that other Axon users can recognize easily.
Data Set System Short Name	Optional. Short name of the system that contains the data set.
Relationship Type	Required. The type of relationship between the policy and data set. Select **Is related to**.

Policy X Glossary

Download the Policy X Glossary relationship template to bulk upload the relationships between a policy and glossary.

The following table describes the fields of the Policy X Glossary relationship template:

Field	Description
Description	Optional. Description about the relationship between the policy and glossary.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.

Field	Description
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the policy and glossary. Select **Policy is regulating Glossary**.

Policy X Legal Entity

Download the Policy X Legal Entity relationship template to bulk upload the relationships between a policy and legal entity.

The following table describes the fields of the Policy X Legal Entity relationship template:

Field	Description
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Legal Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Short Name	Optional. Short name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and legal entity. Select **Policy is related to Legal Entity**.

Policy X Policy

Download the Policy X Policy relationship template to bulk upload the relationships between policies.

The following table describes the fields of the Policy X Policy relationship template:

Field	Description
Description	Optional. Description about the relationship between source and target policies.
Source Policy Ref.	Required if you do not specify Source Policy Name. A unique reference identifier for the source policy.
Source Policy Name	Required if you do not specify Source Policy Ref. Name of the source policy.

Field	Description
Source Parent Policy Name	Optional. Name of the parent of source policy. The parent name must exist in Axon.
Target Policy Ref.	Required if you do not specify Target Policy Name. A unique reference identifier for the target policy.
Target Policy Name	Required if you do not specify Target Policy Ref. Name of the target policy.
Target Parent Policy Name	Optional. Name of the parent of target policy. The parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the source and target policies. Select **Is Related to**.

Policy X Process

Download the Policy X Process relationship template to bulk upload the relationships between a policy and process.

The following table describes the fields of the Policy X Process relationship template:

Field	Description
Description	Optional. Description about the relationship between the policy and process.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and process. Select **Policy is regulating Process**.

Policy X Product

Download the Policy X Product relationship template to bulk upload the relationships between a policy and product.

The following table describes the fields of the Policy X Product relationship template:

Field	Description
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and product. Select **Is Related to**.

Policy X Project

Download the Policy X Project relationship template to bulk upload the relationships between a policy and project.

The following table describes the fields of the Policy X Project relationship template:

Field	Description
Description	Optional. Description about the relationship between the policy and project.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Parent of the policy if the policy belongs to a hierarchy.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that users can recognize easily.
Parent Project Name	Optional. Parent of the project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and project. Select **Is related to**.

Policy X System

Download the Policy X System relationship template to bulk upload the relationships between a policy and system.

The following table describes the fields of the Policy X System relationship template:

Field	Description
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Parent System Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the policy and system. Select **Policy is regulating System**.

Process X Attribute

Download the Process X Attribute relationship template to bulk upload the relationships between a process and attribute.

The following table describes the fields of the Process X Attribute relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Attribute Ref.	Required if you do not specify Attribute Name. A unique reference identifier for the attribute.
Attribute Name	Required if you do not specify Attribute Ref. Name of the attribute. Enter a name that other Axon users can recognize easily.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute.
Attribute System Short Name	Optional. Short name of the system that contains the data set and attribute.
Relationship Type	Required. The type of relationship between the process and attribute. Select **Is related to**.

Process X Client

Download the Process X Client relationship template to bulk upload the relationships between a process and client.

The following table describes the fields of the Process X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client that you want to create.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the process and client. Select **Is related to**.

Process X Data Set

Download the Process X Data Set relationship template to bulk upload the relationships between a process and data set.

The following table describes the fields of the Process X Data Set relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set. Enter a name that other Axon users can recognize easily.
Data Set System Short Name	Optional. Short name of the system that contains the data set.
Relationship Type	Required. The type of relationship between the process and data set. Select **Is related to**.

Process X Glossary

Download the Process X Glossary relationship template to bulk upload the relationships between a process and glossary.

The following table describes the fields of the Process X Glossary relationship template:

Field	Description
Description	Optional. Description of relationship between the process and glossary.
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Optional. Name of the parent glossary term. The glossary parent name must exist in Axon.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the process and glossary. Select one of the following types: - Is used for Process - Is KDE for Process

Process X Legal Entity

Download the Process X Legal Entity relationship template to bulk upload the relationships between a process and legal entity.

The following table describes the fields of the Process X Legal Entity relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Legal Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.

Field	Description
Parent Legal Short Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the process and legal entity. Select one of the following types: - Legal Entity is Data Controller - Legal Entity is Data Processor

Process X Process

Download the Process X Process relationship template to bulk upload the relationships between processes.

The following table describes the fields of the Process X Process relationship template:

Field	Description
Condition	Optional. The condition that you can specify only for a Control type process. The condition that you enter appears as annotation text on the output in Process maps when the predecessor is a Control type process.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Parent of the process.
Predecessor Process Ref.	Optional. A unique reference identifier for the predecessor process.
Predecessor Process Name	Optional. Name of the predecessor process.
Predecessor Parent Process Name	Optional. Parent of the predecessor process.

Process X Product

Download the Process X Product relationship template to bulk upload the relationships between a process and product.

The following table describes the fields of the Process X Product relationship template:

Field	Description
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.

Field	Description
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the process and product. Select **Is related to**.

Process X System

Download the Process X System relationship template to bulk upload the relationships between a process and system.

The following table describes the fields of the Process X System relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Parent System Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the process and system. Select **Process is applicable to System**.
Interface Reference	Optional. Reference ID for the interface. The reference ID must be a string data type. If you enter a number, you must format the column to Text type.

Process X System Interface

Download the Process X System Interface relationship template to bulk upload the relationships between a process and system interface.

The following table describes the fields of the Process X System Interface relationship template:

Field	Description
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Interface Name	Optional. Name of the system interface.

Field	Description
Interface Source System Short Name	Optional. Short name of the system from which the information flows out.
Interface Target System Short Name	Optional. Short name of the system to which the information flows in.
Relationship Type	Required. The type of relationship between the process and system interface. Select **Process supports Interface**.
Interface Reference	Optional. Reference ID for the interface. The reference ID must be a string data type. If you enter a number, you must format the column to Text type.

Product X Business Area

Download the Product X Business Area relationship template to bulk upload the relationships between a product and business area.

The following table describes the fields of the Product X Business Area relationship template:

Field	Description
Product Ref.	Required if you do not specify Product Name. A unique reference identifier for the product.
Product Name	Required if you do not specify Product Ref. Name of the product. Enter a name that other Axon users can recognize easily.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Business Area Parent Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the product and business area. Select **Is related to**.

Product X Client

Download the Product X Client relationship template to bulk upload the relationships between a product and client.

The following table describes the fields of the Product X Client relationship template:

Field	Description
Product Ref.	Required if you do not specify Product Name. A unique reference identifier for the product.
Product Name	Required if you do not specify Product Ref. Name of the product. Enter a name that other Axon users can recognize easily.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Parent Client Name	Optional. Name of the parent client that you want to create.
Relationship Type	Required. The type of relationship between the product and client. Select **Is related to**.

Product X Legal Entity

Download the Product X Legal Entity relationship template to bulk upload the relationships between a product and legal entity.

The following table describes the fields of the Product X Legal Entity relationship template:

Field	Description
Product Ref.	Required if you do not specify Product Name. A unique reference identifier for the product.
Product Name	Required if you do not specify Product Ref. Name of the product. Enter a name that other Axon users can recognize easily.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Legal Short Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Short Name	Optional. Short name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the product and legal entity. Select **Is related to**.

Project X Attribute

Download the Project X Attribute relationship template to bulk upload the relationships between a project and attribute.

The following table describes the fields of the Project X Attribute relationship template:

Field	Description
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Attribute Ref.	Required if you do not specify Attribute Name. A unique reference identifier for the attribute.
Attribute Name	Required if you do not specify Attribute Ref. Name of the attribute. Enter a name that other Axon users can recognize easily.
Attribute Data Set Name	Optional. Name of the data set that contains the attribute.
Attribute System Short Name	Optional. Name of the system that contains the data set and attribute.
Relationship Type	Required. The type of relationship between the project and attribute. Select **Is related to**.

Project X Business Area

Download the Project X Business Area relationship template to bulk upload the relationships between a project and business area.

The following table describes the fields of the Project X Business Area relationship template:

Field	Description
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Business Area Name	Required. Name of the business area. Enter a name that other Axon users can recognize easily.
Business Area Parent Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the project and business area. Select **Project is related to Business Area**.

Project X Capability

Download the Project X Capability relationship template to bulk upload the relationships between a project and capability.

The following table describes the fields of the Project X Capability relationship template:

Field	Description
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Capability Ref.	Required if you do not specify Capability Name. A unique reference identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability. Enter a name that other Axon users can recognize easily.
Capability Parent Name	Optional. Name of the parent capability if the capability belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the project and capability. Select **Is related to**.

Project X Client

Download the Project X Client relationship template to bulk upload the relationships between a project and client.

The following table describes the fields of the Project X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client that you want to create.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the project and client. Select **Is related to**.

Project X Data Set

Download the Project X Data Set relationship template to bulk upload the relationships between a project and data set.

The following table describes the fields of the Project X Data Set relationship template:

Field	Description
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Data Set Ref.	Required if you do not specify Data Set Name. A unique reference identifier for the data set.
Data Set Name	Required if you do not specify Data Set Ref. Name of the data set as known in the business organization.
Data Set System Short Name	Optional. Short name of the system that contains the data set.
Relationship Type	Required. The type of relationship between the process and data set. Select **Is related to**.

Project X Glossary

Download the Project X Glossary relationship template to bulk upload the relationships between a glossary and project.

The following table describes the fields of the Project X Glossary relationship template:

Field	Description
Description	Optional. The description about the relationship between the glossary and project.
Glossary Ref.	Required if you do not specify Glossary Name. A unique identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary.
Parent Glossary Name	Name of the parent glossary term. The glossary parent name must exist in Axon.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.

Field	Description
Parent Project Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the glossary and project. Select **Glossary is used by Project**.

Project X Process

Download the Project X Process relationship template to bulk upload the relationships between a project and process.

The following table describes the fields of the Project X Process relationship template:

Field	Description
Description	Optional. The description about the relationship between the project and process.
Process Ref.	Required if you do not specify Process Name. A unique reference identifier for the process.
Process Name	Required if you do not specify Process Ref. Name of the process. Enter a name that other Axon users can recognize easily.
Parent Process Name	Optional. Name of the parent process if the process belongs to a hierarchy.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the project and process. Select **Project is affecting Process**.

Project X Product

Download the Project X Product relationship template to bulk upload the relationships between a project and product.

The following table describes the fields of the Project X Product relationship template:

Field	Description
Description	Optional. The description about the relationship between the project and product.
Product Name	Required. Name of the product. Enter a name that other Axon users can recognize easily.

Field	Description
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the project and product. Select **Is related to** to indicate that the project is related to product.

Project X Project

Download the Project X Project relationship template to bulk upload the relationships between projects.

The following table describes the fields of the Project X Project relationship template:

Field	Description
Rel. Description	Optional. Description about the relationship between source and target projects.
Source Project Ref.	Required if you do not specify Source Project Name. A unique reference identifier for the source project.
Source Project Name	Required if you do not specify Source Project Ref. Name of the source project.
Source Project Parent Name	Optional. Name of the parent of source project. The parent name must exist in Axon.
Target Project Ref.	Required if you do not specify Target Project Name. A unique reference identifier for the target project.
Target Project Name	Required if you do not specify Target Project Ref. Name of the target project.
Target Project Parent Name	Optional. Name of the parent of target project. The parent name must exist in Axon.
Relationship Type	Required. The type of relationship between the source and target projects. Select one of the following values: - Is related to - Is predecessor to - Is dependent on

Project X System

Download the Project X System relationship template to bulk upload the relationships between a project and system.

The following table describes the fields of the Project X System relationship template:

Field	Description
Description	Optional. Description about the relationship between the project and system.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Relationship Type	Required. The type of relationship between the project and system. Select one of the following values: - Project is affecting System - Project is sourcing from System

Regulation X Policy

Download the Regulation X Policy relationship template to bulk upload the relationships between a regulation and policy.

The following table describes the fields of the Regulation X Policy relationship template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Name of the regulation. Enter a name that other Axon users can recognize easily.
Parent Regulation Name	Optional. Name of the parent regulation if the regulation belongs to a hierarchy.
Policy Ref.	Required if you do not specify Policy Name. A unique reference identifier for the policy.
Policy Name	Required if you do not specify Policy Ref. Name of the policy. Enter a name that other Axon users can recognize easily.
Parent Policy Name	Optional. Name of the parent policy if the policy belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the regulation and policy. Select **Regulation affects Policy**.

Regulation X Product

Download the Regulation X Product relationship template to bulk upload the relationships between a regulation and product.

The following table describes the fields of the Regulation X Product relationship template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Name of the regulation. Enter a name that other Axon users can recognize easily.
Parent Regulation Name	Optional. Name of the parent regulation if the regulation belongs to a hierarchy.
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the regulation and product. Select **Is related to**.

Regulation X Project

Download the Regulation X Project relationship template to bulk upload the relationships between a regulation and project.

The following table describes the fields of the Regulation X Project relationship template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Name of the regulation. Enter a name that other Axon users can recognize easily.
Parent Regulation Name	Optional. Name of the parent regulation if the regulation belongs to a hierarchy.
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that users can recognize easily.
Project Parent Name	Optional. Name of the parent project if the project belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the regulation and project. Select **Project is implementing Regulation**.

Regulation X Regulator

Download the Regulation X Regulator relationship template to bulk upload the relationships between a regulation and regulator.

The following table describes the fields of the Regulation X Regulator relationship template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Name of the regulation. Enter a name that other Axon users can recognize easily.
Parent Regulation Name	Optional. Name of the parent regulation if the regulation belongs to a hierarchy.
Regulator Name	Required. Full name of the regulator.
Relationship Type	Required. The type of relationship between the regulation and regulator. Select **Regulator is implementing Regulation**.

Regulation X Regulatory Theme

Download the Regulation X Regulatory Theme relationship template to bulk upload the relationships between a regulation and regulatory theme.

The following table describes the fields of the Regulation X Regulatory Theme relationship template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Name of the regulation. Enter a name that other Axon users can recognize easily.
Parent Regulation Name	Optional. Name of the parent regulation if the regulation belongs to a hierarchy.
Regulatory Theme Ref.	Optional. A unique reference identifier for the regulatory theme.
Regulatory Theme Name	Optional. Full name of the regulatory theme.
Parent Regulatory Theme Name	Optional. Parent object of the regulatory theme.
Relationship Type	Required. The type of relationship between the regulation and regulatory theme. Select **Is related to**.

Regulator X Geography

Download the Regulator X Geography relationship template to bulk upload the relationships between a regulator and geography.

The following table describes the fields of the Regulator X Geography relationship template:

Field	Description
Rel. Description	Optional. Description about the relationship between the regulator and geography.
Regulator Name	Required. Name of the regulator.
Geography Name	Required. Name of the geography.
Parent Geography Name	Optional. Name of the parent geography if the geography belongs to a hierarchy.

Segment X Object

Download the Segment X Object relationship template to move objects in bulk to target segments.

The following table describes the fields of the Segment X Object relationship template:

Field	Description
Object ID	Required. The unique identifier for the object that you want to move to a target segment.
Object Type	Required. The type for the object that you want to move to a target segment.
Target Segment	Required. The target segment to which you want to move all the objects to.

Standard Data Quality Rule X Technical Reference

Download the Standard Data Quality Rule X Technical Reference relationship template to bulk upload the relationships between a standard data quality rule and technical reference.

The following table describes the fields of the Standard Data Quality Rule X Technical Reference relationship template:

Field	Description
Ref.	Required if you do not specify Rule Name. The unique reference number for the standard data quality rule.
Automation	Optional. The option to automatically generate a local data quality rule. Select one of the following values: - True. Generates local data quality rules automatically. - False. Does not generate local data quality rules automatically.
Rule Name	Required if you do not specify Ref. Name of the standard data quality rule.

Field	Description
Technical Rule reference	Required. Reference link to a rule in Informatica Data Quality that you can associate with the standard data quality rule. Enter the input in the below format: `rulespecification:<folder name in Informatica Data Quality>/<rule specification name>` For more information, refer to the *Link Standard Data Quality Rule to a Rule in Informatica Data Quality* topic in the Axon Data Governance 7.3.8 User Guide.
Glossary Reference List	Optional. A comma-separated list that contains unique reference values for the glossary. **Note:** - If technical rule reference has multiple input parameters, you must enter all the Glossary reference values. - If the technical rule reference has a single input parameter, Axon updates reference value for the glossary that is associated with the standard data quality rule. - The bulk upload fails, if the Glossary reference values contains special character , .

System X Client

Download the System X Client relationship template to bulk upload the relationships between a system and client.

The following table describes the fields of the System X Client relationship template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that other Axon users can recognize easily.
Client Parent Name	Optional. Name of the parent client if the client belongs to a hierarchy.
System Short Name	Required. Short name of a system or an acronym that other Axon users can recognize easily for a system.
Parent System Short Name	Optional. Name of the parent system if the system belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the system and client. Select **Is related to**.

System X Data Onboarding Rule

Download the System X Data Onboarding Rule relationship template to bulk upload the relationships between a system and a data onboarding rule.

The following table describes the fields of the System X Data Onboarding Rule relationship template:

Field	Description
Enable Automated Onboarding	Optional. Enable automated onboarding of objects from Enterprise Data Catalog to Axon. Select one of the following values: - `TRUE`. Onboards objects from Enterprise Data Catalog to Axon automatically. - `FALSE`. Does not onboard objects from Enterprise Data Catalog to Axon automatically.
Accept Onboarded Objects	Optional. Automatically accept onboarded objects. Select one of the following values: - `TRUE`. Automatically accepts objects onboarded from Enterprise Data Catalog to Axon. - `FALSE`. Does not automatically accept objects onboarded from Enterprise Data Catalog to Axon.
System ID	Required if you do not specify System Short Name. The unique identifier for the system.
System Short Name	Required if you do not specify System ID. Short name of the system.
Parent System Short Name	Optional. Short name of the parent system.
Data Onboarding Rule Name	Required. Name of the data onboarding rule.
Data Set	Optional. Status of the data set that contains the attribute. You can select one of the following status: Active, Inactive, Pending Review, Obsolete, or Deleted.
Data Set Lifecycle	Optional. Stage of the system interface in the production lifecycle. You can select one of the following default stages: Draft, Approved, or Obsolete. You can also create lifecycle stages. Default is false.

System X Glossary

Download the System X Glossary relationship template to bulk upload the relationships between a system and glossary.

The following table describes the fields of the System X Glossary relationship template:

Field	Description
Glossary Ref.	Required if you do not specify Glossary Name. A unique reference identifier for the glossary.
Glossary Name	Required if you do not specify Glossary Ref. Name of the glossary. **Note:** If duplicate Glossary Name is available, the Glossary Ref. field values should be entered.

Field	Description
Parent Glossary Name	Optional. Parent of the glossary term. The glossary parent name must exist in Axon.
System Short Name	Required. Short name of a system that other Axon users can recognize easily.
Relationship Type	Required. The type of relationship between the system and glossary. Select one of the following type: - Expected glossary item coverage

System X Legal Entity

Download the System X Legal Entity relationship template to bulk upload the relationships between a system and legal entity.

The following table describes the fields of the System X Legal Entity relationship template:

Field	Description
System Short Name	Required. Name of the system. Enter a name that other Axon users can recognize easily.
Parent System Short Name	Optional. Name of the parent system if the system belongs to a hierarchy.
Legal Entity Short Name	Required. Name of the legal entity. Enter a name that other Axon users can recognize easily.
Parent Legal Entity Short Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.
Relationship Type	Required. The type of relationship between the system and legal entity. You can select one of the following values: - Is Supported By - Is Used By - License is Owned by

System X Product

Download the System X Product relationship template to bulk upload the relationships between a system and product.

The following table describes the fields of the System X Product relationship template:

Field	Description
Product Name	Required. Name of the product.
Product Parent Name	Optional. Name of the parent product if the product belongs to a hierarchy.
System Short Name	Required. Short name of a system that other Axon users can recognize easily.

Field	Description
Relationship Type	Required. The type of relationship between the system and product. Select **Is related to**.
Product x Legal Entity Rel Type	Optional. The type of relationship between the product and the legal entity. Select **Risk Owning Entity** or **Booking Entity**.
Legal Entity Short Name	Optional. Short name of the legal entity.
Legal Entity Parent Name	Optional. Name of the parent legal entity if the legal entity belongs to a hierarchy.

System X Resource

Download the System X Resource relationship template to bulk upload the relationships between an Axon system and Enterprise Data Catalog resource.

When you bulk upload the System X Resource relationship template, Axon validates the operation based on the following details:

- The Enterprise Data Catalog instance is configured, available, and running.
- The resource name and resource identifier are present in Enterprise Data Catalog.
- You have the required permissions to access the resources in Enterprise Data Catalog.

The following table describes the fields of the System X Resource relationship template:

Field	Description
System Short Name	Required. Short name of a system that other Axon users can recognize easily.
Parent System Short Name	Optional. Short name of the parent system if the system belongs to a hierarchy.
Name	Required. Name of the Enterprise Data Catalog resource.
Resource ID	Required. Identifier for the Enterprise Data Catalog resource.

Role Templates

Use Role templates to explain how you can assign different stakeholder roles for an object. Download templates for Roles from Axon to perform a bulk upload.

If an object in a role template contains a reference identifier column, the object name column becomes optional. When you perform a bulk upload, you must provide a value either in the name or reference identifier column even though both the columns are optional. For example, in the Capability Role template, the **Capability Ref.** and **Capability Name** columns are optional. You need to fill in the **Glossary Ref.** or **Glossary Name** column before you bulk upload the Capability role template.

If a role assignment is configured for a facet in the Admin Panel, enter the email address of the user that is assigned to a role from the predefined list.

You can bulk upload the following types of roles:

- Attribute
- Business Area
- Capability
- Client
- Committee
- Data Set
- Glossary
- Interface
- Legal Entity
- Policy
- Process
- Product
- Project
- Regulation
- System

Attribute Role

Download the Attribute Role template to bulk upload attribute roles to Axon.

The following table describes the fields of the Attribute Role template:

Field	Description
Ref	Optional. A unique reference ID for the attribute.
Attribute Name	Required. Name of the attribute.
User First Name	Required if you do not specify User Last Name or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User First Name or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User First Name or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Data Attribute Owner - Data Attribute Steward

Business Area Role

Download the Business Area Role template to bulk upload business area roles to Axon.

The following table describes the fields of the Business Area Role template:

Field	Description
Business Area Name	Required. Name of the business area.
Business Area Parent Name	Optional. Name of the parent business area if the business area belongs to a hierarchy.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the **Business Area Head** role.

Capability Role

Download the Capability Role template to bulk upload capability roles to Axon.

The following table describes the fields of the Capability Role template:

Field	Description
Capability Ref.	Required if you do not specify Capability Name. A unique reference identifier for the capability.
Capability Name	Required if you do not specify Capability Ref. Name of the capability.
Parent Capability Name	Optional. Parent name of the capability if the capability belongs to a hierarchy.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.

Field	Description
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the **Capability Owner** role.

Client Role

Download the Client Role template to bulk upload client roles to Axon.

The following table describes the fields of the Client Role template:

Field	Description
Client Name	Required. Short name of the client. Enter a name that users can recognize easily.
Client Parent Name	Optional. Parent name of the client that you want to create.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the **Client Segmentation Owner** role.

Committee Role

Download the Committee Role template to bulk upload committee roles to Axon.

The following table describes the fields of the Committee Role template:

Field	Description
Committee Ref.	Required if you do not specify Committee Name. A unique reference identifier for the committee.
Committee Name	Required if you do not specify Committee Ref. Name of the committee. Enter a name that users can recognize easily.
Committee Parent Name	Optional. Parent name of the committee that you want to create.

Field	Description
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the **Committee Chair** role.

Data Set Role

Download the Data Set Role template to bulk upload data set roles to Axon.

The following table describes the fields of the Data Set Role template:

Field	Description
Ref.	Required if you do not specify Name. A unique reference identifier for the data set.
Name	Required if you do not specify Ref. Name of the data set.
System Short Name	Optional. Name of the system that the data set belongs to.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles. - Data Steward - Data Owner

Data Quality Role

Download the Data Quality Role template to assign stakeholder roles to local data quality rules and to standard data quality rules in Axon.

The following table describes the fields of the Data Quality Role template that you can use to upload new items or remove existing items:

Field	Description
Ref.	Required if you do not specify Rule Name. A unique reference number for a data quality rule. Based on this reference number, Axon loads the scores in the Data Quality report.
Rule Name	Required if you do not specify Ref. Name of the rule. Bulk upload fails if rules with the same names exist for different data sets or attributes.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Enter an unique email address. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last Name of the user. Specify the name as it is recorded in the LDAP directory of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following role: - `DQ Steward` - Custom roles as defined in the Admin Panel

Glossary Role

Download the Glossary Role template to bulk upload glossary roles to Axon.

The following table describes the fields of the Glossary Role template:

Field	Description
Ref.	Optional. A unique reference identifier for the glossary.
Name	Optional. Name of the glossary.
Parent Name	Optional. Parent name of the glossary term. The glossary parent name must exist in Axon.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.

Field	Description
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Glossary Definition Owner - Glossary Steward

Interface Role

Download the Interface Role template to bulk upload interface roles to Axon.

The following table describes the fields of the Interface Role template:

Field	Description
Interface Ref.	Required if you do not specify Interface Name, Interface Source System Short Name, or Interface Target System Short Name. A unique reference identifier for the system interface.
Interface Name	Required if you do not specify Interface Ref, Interface Source System Short Name, or Interface Target System Short Name. Name of the system interface.
Interface Source System Short Name	Required if you do not specify Interface Ref, Interface Name, or Interface Target System Short Name. System from which the information flows out.
Interface Target System Short Name	Required if you do not specify Interface Ref, Interface Name, or Interface Source System Short Name. System to which the information flows in.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.

Field	Description
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles. - Interface Owner - Interface Steward

Legal Entity Role

Download the Legal Entity Role template to bulk upload legal entity roles to Axon.

The following table describes the fields of the Legal Entity Role template:

Field	Description
Legal Entity Name	Required. Short name of the legal entity. Enter a name that other Axon users can recognize easily.
Legal Entity Parent Name	Optional. Parent name of the legal entity that you want to create.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the **Legal Entity Owner** role.

Policy Role

Download the Policy Role template to bulk upload policy roles to Axon.

The following table describes the fields of the Policy Role template:

Field	Description
Ref.	Required if you do not specify Name. A unique reference identifier for the policy.
Name	Required if you do not specify Ref. Short name of the policy. Enter a name that users can recognize easily.

Field	Description
Parent Name	Optional. Parent name of the policy that you want to create.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Policy Owner - Policy Steward

Process Role

Download the Process Role template to bulk upload process roles to Axon.

The following table describes the fields of the Process Role template:

Field	Description
Ref.	Required if you do not specify Name. A unique reference identifier for the process.
Name	Required if you do not specify Ref. Name of the process.
Parent Name	Optional. Parent name of the process.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.

Field	Description
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select one the following roles: - Process Owner - Process Steward

Product Role

Download the Product Role template to bulk upload product roles to Axon.

The following table describes the fields of the Product Role template:

Field	Description
Product Name	Required. Short name of the product. Enter a name that users can recognize easily.
Product Parent Name	Optional. Parent name of the product if the product belongs to a hierarchy.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Product Owner - Product Steward

Project Role

Download the Project Role template to bulk upload project roles to Axon.

The following table describes the fields of the Project Role template:

Field	Description
Project Ref.	Required if you do not specify Project Name. A unique reference identifier for the project.
Project Name	Required if you do not specify Project Ref. Name of the project. Enter a name that other Axon users can recognize easily.
Project Parent Name	Optional. Parent name of the project that you want to create.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Project Manager - Project Steward

Regulation Role

Download the Regulation Role template to bulk upload regulation roles to Axon.

The following table describes the fields of the Regulation Role template:

Field	Description
Regulation Ref.	Required if you do not specify Regulation Name. A unique reference identifier for the regulation.
Regulation Name	Required if you do not specify Regulation Ref. Short name for the regulation. The most commonly used name or an acronym for the regulation, such as GDPR. Enter a name that users can recognize easily.
Parent Regulation Name	Optional. Parent name of the regulation that you want to create.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.

Field	Description
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - Regulation Owner - Regulation SME

System Role

Download the System Role template to bulk upload system roles to Axon.

The following table describes the fields of the System Role template:

Field	Description
Short Name	Required. Short name of a system that other Axon users can recognize easily.
User Email	Required if you do not specify User First Name, User Last Name, or User LAN ID. Unique email address of the user. Axon sends emails to this email address.
User First Name	Required if you do not specify User Email, User Last Name, or User LAN ID. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User Last Name	Required if you do not specify User Email, User First Name, or User LAN ID. Last Name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
User LAN ID	Required if you do not specify User Email, User First Name, or User Last Name. Network ID of the user.
Governance Role	Required. The role of the user. You can select the following roles: - System Business Owner - System Steward

Data Marketplace Templates

The Data Marketplace template allows you to create, delete, or update categories and data collections in Axon Data Marketplace. Download templates for Data Marketplace objects from Axon to perform a bulk upload, update, or delete.

Category

Download the Category template to bulk upload data collection categories to Axon Data Marketplace. You can create a new category or choose to delete or update an existing category.

Upload New Items

The following table describes the fields of the Category template that you can use to upload new items:

Field	Description
ID	Required. A unique reference identifier for the category.
Name	Required. Name of the category
Status	Required. Status of the category. You can select one of the following statuses: - Active - Inactive
Description	Optional. Description of the category.
Parent ID	Optional. Parent ID of the category in the category hierarchy.
Owners	Optional. A comma-separated list of the category owners responsible for approving or rejecting access requests.

Update Existing Items

The following table describes the fields of the Category template that you can use to update items:

Field	Description
ID	Required. A unique reference identifier for the category. **Note:** Do not modify the value when you update a category.
Name	Required. Name of the category
Status	Required. Status of the category. You can select one of the following statuses: - Active - Inactive
Description	Optional. Description of the category.

Field	Description
Parent ID	Optional. Parent ID of the category in the category hierarchy.
Owners	Optional. A comma-separated list of the category owners responsible for approving or rejecting access requests.

Remove Existing Items

The following table describes the fields of the Category template that you can use to remove items:

Field	Description
Category ID	Required. A unique reference identifier for the category.

Consumer Access

Download the Consumer Access template to bulk upload consumer access details to Axon Data Marketplace. You can create a new consumer access template.

Upload New Items

The following table describes the fields of the Consumer Access template that you can use to upload new items:

Field	Description
Data Collection Customer Facing ID Reference	Required. A unique reference identifier for the data collection.
Consumer	Required. A consumer user reference identifier.
Status	Required. Status of the data collection. The status must be active.
Target Name	Required. Name of the delivery target for the data collection .
Target Location	Required. Name of the delivery location for the data collection.
Format	Required. Name of the delivery format for the data collection.
Method	Required. Name of the delivery method for the data collection.
Approver	Optional. An approver user reference identifier.

Data Collection

Download the Data Collection template to bulk upload data collections to Axon Data Marketplace. You can create a new data collection or choose to delete or update an existing data collection.

Upload New Items

The following table describes the fields of the Data Collection template that you can use to upload new items:

Field	Description
Name	Required. Name of the data collection.
Description	Optional. Description of the data collection.
Status	Optional. Status of the data collection. You can select one of the following options: - Published - Unpublished
Data Set ID	Optional. A comma-separated list of the data sets.
Owner	Optional. A comma-separated list of the data collection owners.
Technical Owner	Optional. A comma-separated list of the data collection technical owners.
Category ID	Required. The reference ID for the category to assign to the data collection.
Policies	Optional. A comma-separated list of policies to link to the data collection.
Prefix	Optional. The prefix that you want to assign to the data collection reference identifiers.

Field	Description
Delivery Options	Optional. A comma-separated list of delivery options for the data collection.

Custom Fields	Optional. Appears if a SuperAdmin or Data Marketplace Administrator has configured custom fields for data collections.
	If you configure custom fields to accept a single input, enter the values in the following format:
	- <CustomFieldName1> :
	`<CustomFieldValue1>`
	- <CustomFieldName2> :
	`<CustomFieldValue2>`
	If you configure custom fields to accept multiple inputs, enter comma-separated values in the following format:
	- <CustomFieldName1> :
	`<CustomFieldValue1.1>, <CustomFieldValue1.2>`
	- <CustomFieldName2> :
	`<CustomFieldValue2.1>, <CustomFieldValue2.2>`
	When specifying custom fields, provide the value for each custom field as a single entry. If your custom field's value contains a comma (,), enclose the entire value in square brackets `[ ]` to avoid parsing errors. This ensures the value is treated as a single string rather than multiple values separated by commas. For example, when you have a single custom field and have comma in value, use the following format:
	`cf1: [value, with, comma]`
	Note: If the administrator has configured mandatary custom fields and if these fields are empty, Axon populates default values for the mandatory custom fields. If the administrator has configured non-mandatory custom fields and if these fields are empty, the existing custom field values are removed.

Update Existing Items

The following table describes the fields of the Data Collection template that you can use to update items:

Field	Description
Name	Required. Name of the data collection.
Data Collection Reference	Required. The reference ID for the data collection.
Description	Optional. Description of the data collection.
Status	Optional. Status of the data collection. You can select one of the following options: - Published - Unpublished
Data Set ID	Optional. A comma-separated list of the data sets.
Owner	Optional. A comma-separated list of the data collection owners.
Technical Owner	Optional. A comma-separated list of the data collection technical owners.
Category ID	Required. The reference ID for the category to assign to the data collection.
Policies	Optional. A comma-separated list of policies to link to the data collection.

Field	Description
Prefix	Optional. The prefix that you want to assign to the data collection reference identifiers.
Delivery Options	Optional. A comma-separated list of delivery options for the data collection.
Custom Fields	Optional. Appears if a SuperAdmin or Data Marketplace Administrator has configured custom fields for data collections. If you configure custom fields to accept a single input, enter the values in the following format: - <CustomFieldName1> : `<CustomFieldValue1>` - <CustomFieldName2> : `<CustomFieldValue2>` If you configure custom fields to accept multiple inputs, enter comma-separated values in the following format: - <CustomFieldName1> : `<CustomFieldValue1.1>, <CustomFieldValue1.2>` - <CustomFieldName2> : `<CustomFieldValue2.1>, <CustomFieldValue2.2>` When specifying custom fields, provide the value for each custom field as a single entry. If your custom field's value contains a comma (,), enclose the entire value in square brackets `[ ]` to avoid parsing errors. This ensures the value is treated as a single string rather than multiple values separated by commas. For example, when you have a single custom field and have comma in value, use the following format: `cf1: [value, with, comma]` **Note:** If the administrator has configured mandatary custom fields and if these fields are empty, Axon populates default values for the mandatory custom fields. If the administrator has configured non-mandatory custom fields and if these fields are empty, the existing custom field values are removed.

Remove Existing Items

The following table describes the fields of the Data Collection template that you can use to remove items:

Field	Description
Dataset ID	Required. A unique reference identifier for the dataset.

INDEX

A

assign segment
  bulk upload 14

B

bulk delete
  objects 17
  relationships 15
  roles 16
bulk update template
  ID 21
bulk upload
  object 9
  relationship 9
  role 9
  segment 13, 14
  templates 10, 19
bulk upload templates
  object templates 21, 33, 47, 54, 138
  relationship templates 84
  role templates 126

O

object templates
  business and change 21
  data and technology 54
  Data Marketplace 138
  organizational 33
  regulatory 47
objects
  bulk delete 17

R

relationships
  bulk delete 15
roles
  bulk delete 16

S

segment
  bulk upload 13