Informatica® Axon Data Governance
7.3.8

Data Governance User Guide

Informatica Axon Data Governance Data Governance User Guide
7.3.8
September 2026

© Copyright Informatica LLC 2017, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

This Software may be protected by patents. See https://www.informatica.com/legal/patents.html.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Publication Date: 2026-09-22

Table of Contents

Preface 10

Informatica Resources 10

- Informatica Network 10
- Informatica Knowledge Base 10
- Informatica Documentation 11
- Informatica Product Availability Matrices 11
- Informatica Marketplace 11
- Informatica Global Customer Support 11

Chapter 1: Getting Started with Axon 12

Introduction to Axon Data Governance 12

- Inventorize 13
- Connect 14
- Control 14
- Access 14
- Authorize 14

Users in Axon 15

- User Profiles in Axon Data Governance 15
- User Profiles in Axon Data Marketplace 17

Logging In to Axon 17

The Axon Interface 18

- Axon Data Governance 18
- Axon Data Marketplace 24

Segmentation 24

Interface Language 27

Chapter 2: Search and View Objects 28

Search and View Objects Overview 28

View and Select Segments 29

Searching for Objects 29

- Unison Search 30
- Unison Search Filter Options 31
- Unison Search Operations 32
- Unison Search Operators 33
- Unison Search Options 34
- Quick Search 35
- Fuzzy Search 35
- Quick Links 36

Working with the Search Results 36

- Add Grid Items to Unison Search 36

Searching in Hierarchical Facets. . . . 38
Searching with Direct and Indirect Relationships Filters. . . . 40
Saving and Sharing Searches. . . . 43
Exporting Search Results. . . . 47
Sort the Objects in a Facet. . . . 48
Viewing Object Details. . . . 48
Summary. . . . 48
Interfaces. . . . 50
Attributes. . . . 51
Relationships. . . . 53
Stakeholders. . . . 54
Values. . . . 55
Data Quality. . . . 56
Enterprise Catalog. . . . 58
Data. . . . 58
Components. . . . 59
People. . . . 59
Report. . . . 59
Regulations. . . . 59
Impact. . . . 59
History. . . . 60
Change. . . . 60
Viewing People Objects. . . . 61
About Me. . . . 61
Team. . . . 62
Responsibilities. . . . 62
Following. . . . 62
Activity Stream. . . . 62
Change Request. . . . 62
Assigned Segments. . . . 63
Viewing Glossary Hierarchy. . . . 63
Viewing My Items. . . . 64
Following Objects. . . . 64
Viewing Notifications. . . . 64
Notifications in Axon. . . . 65
Notifications via Email. . . . 66
Managing Locks. . . . 66
Viewing Object Dashboards. . . . 66
Data Quality View. . . . 67
Process View. . . . 68
Role View. . . . 69
Change Requests View. . . . 69

Viewing Data Privacy Metrics. . . . 69
Risk Score. . . . 70
Risk Cost. . . . 71
Protection Status. . . . 71
Sensitivity Levels. . . . 71
Policy Violations. . . . 71
Severity Level. . . . 72
Viewing Data Privacy Dashboard. . . . 72
Viewing Insight Maps. . . . 72
Interpreting and Interacting with the Map. . . . 73
Insight Maps Palette. . . . 74
Viewing Local Maps. . . . 77
Viewing Process Maps. . . . 78
Viewing Data Quality Reports. . . . 80
Viewing Custom Fields. . . . 80

Chapter 3: Create and Edit Objects. . . . 81

Create and Edit Objects Overview. . . . 81
Creating an Object. . . . 82
Business Area Properties. . . . 83
Capability Properties. . . . 84
Client Properties. . . . 85
Committee Properties. . . . 86
Data Set Properties. . . . 87
Geography Properties. . . . 89
Glossary Properties. . . . 89
Legal Entity Properties. . . . 92
Org Unit Properties. . . . 93
Policy Properties. . . . 94
Process Properties. . . . 95
Product Properties. . . . 98
Project Properties. . . . 98
Regulation Properties. . . . 100
Regulator Properties. . . . 102
Regulatory Theme Properties. . . . 102
System Interface Properties. . . . 103
System Properties. . . . 105
Add Users. . . . 106
Bulk Upload Users to the People Facet. . . . 106
Manually Add Users to the People Facet. . . . 108
Edit Objects. . . . 109
Editing an Object. . . . 109
Tag Axon Objects. . . . 110

Assign a Delegate to an Object. . . . 111
Edit Glossary. . . . 112
Glossary Relationships. . . . 112
Glossary Rollup View. . . . 112
Data Discovery. . . . 113
Clone Data Set. . . . 117
Cloning a Data Set. . . . 117
Adding Attribute Values to a Data Set. . . . 118
Connect Objects. . . . 119
View and Edit Modes. . . . 119
Create Connections. . . . 119
Search and Add Connections. . . . 120
Search Related Objects in Unison. . . . 120
Bulk Accept Roles. . . . 124
Accepting Roles in Bulk. . . . 125
Bulk Update. . . . 125
Delete Objects. . . . 127
Troubleshooting. . . . 131
Data Quality Rules. . . . 133
Local Data Quality Rules. . . . 134
Standard Data Quality Rules. . . . 134
Creating Local Data Quality Rules. . . . 134
Linking Profiles and Scorecards to Local Data Quality Rules. . . . 137
Enhance Local Data Quality Rules. . . . 137
Create a Standard Data Quality Rule. . . . 138
Associating Local Data Quality Rules to a Standard Data Quality Rule. . . . 139
Manually Add Data Quality Report Data. . . . 139
Data Migration. . . . 140
Bulk Migrate Objects. . . . 141
Guidelines for Data Migration. . . . 141
Exported Data. . . . 142
Limitations on Data Migration. . . . 142

Chapter 4: Workflows and Change Requests. . . . 143

Workflows and Change Requests Overview. . . . 143
Use Workflows. . . . 143
Stakeholders in a Workflow. . . . 144
Use Change Requests. . . . 145
Change Request Statuses. . . . 145
Example of Using Workflows and Change Requests. . . . 146
Create a Default Workflow. . . . 147
Automatic Change Requests. . . . 147
Facets that Support Automatic Change Requests. . . . 147

Create a Change Request Manually. . . . 149
Assign a Workflow to a Manual Change Request. . . . 150
Review a Change Request. . . . 150
Assign a Delegate in a Workflow. . . . 152
View Audit Trail of a Change Request. . . . 152
Periodic Review of Objects. . . . 152
View Active Tasks of Change Requests. . . . 153
Create a Custom Workflow. . . . 154
Workflow Designer. . . . 155
Workflow Diagram Example. . . . 157

Chapter 5: Dashboards and Widgets. . . . 162

Dashboards and Widgets Overview. . . . 162
Add or Clone a Dashboard. . . . 163
Edit a Dashboard. . . . 163
Delete a Dashboard. . . . 164
Set Dashboard Display Options. . . . 164
View Default Widgets. . . . 165
Saved Searches. . . . 165
Roles Not Accepted. . . . 166
Change Requests. . . . 166
Stakeholdership. . . . 166
Team. . . . 166
Object Counts. . . . 166
Pending Tasks. . . . 167
Add a Widget. . . . 167
Choose, Reorder, or Hide a Widget. . . . 169
Edit or Delete a Widget. . . . 169
Sharing Dashboards. . . . 170
Share Dashboard with Other Users. . . . 170
Receive Dashboard Shared by Other Users. . . . 172
Edit a Shared Dashboard. . . . 173
Delete a Shared Dashboard. . . . 173
Download Dashboard and Widgets. . . . 173
Dashboard Tab Icons. . . . 174

Chapter 6: Linking to Enterprise Metadata. . . . 175

Linking to Enterprise Metadata Overview. . . . 175
User Tasks. . . . 176
Enterprise Data Catalog Objects. . . . 176
Resources. . . . 177
Export Resources. . . . 179
Physical Fields. . . . 180

Physical Field Details. . . . 184
Export Physical Fields. . . . 186
Physical Fields in Unison Search. . . . 187
Linking Resources with Systems Manually. . . . 188
Linking Physical Fields with Attributes Manually. . . . 189
Onboarding Parent of Physical Fields as Data Set. . . . 190
View Enterprise Catalog in Data Set. . . . 192
View Enterprise Catalog in Glossary . . . 192
View Enterprise Catalog in System. . . . 193
Export Resources in System. . . . 194
Export Physical Fields in System. . . . 195
Data Onboarding Rules for a System. . . . 196
Automate Object Onboarding from Enterprise Data Catalog. . . . 199
Prerequisites. . . . 200
Automated Onboarding Process. . . . 201
Configure and Apply Data Onboarding Rules. . . . 204
Onboarding Scheduler. . . . 204
Common Onboarding Conditions. . . . 204
Data Onboarding Rule Conditions. . . . 205
Objects Onboarding Scenarios. . . . 206
Onboarding Objects from Different Schemas in a Resource. . . . 209
Automatic Change Requests for Data Sets and Attributes. . . . 212
Notify Stakeholders. . . . 212
View Discovered Objects. . . . 213
Curate Discovered Attributes. . . . 214
View Automated Lineage from Enterprise Data Catalog. . . . 215
Link Removal Notifications. . . . 219

Chapter 7: Automate Data Quality Rules. . . . 220

Automate Data Quality Rules Overview. . . . 220
Understanding Terms. . . . 221
Automating Data Quality Rules Process. . . . 223
Prerequisites. . . . 225
Setting Up Data Quality Rule Automation. . . . 227
Create Enterprise Data Catalog and Axon Objects. . . . 227
Create a Standard Data Quality Rule. . . . 227
Linking Objects. . . . 229
Linking Glossaries. . . . 230
Link Standard Data Quality Rule to a Rule in Informatica Data Quality. . . . 231
Create Local Data Quality Rules Automatically. . . . 237
Onboarding Objects. . . . 237
Running Rules. . . . 238
Conditions for Automatically Generating Local Data Quality Rules. . . . 239

Scheduling Local Data Quality Rules. 239
View Automatically Created Local Data Quality Rules. 239
View Data Quality Scores. 240
Managing Data Quality Rules. 241
Modify or Delete Standard Data Quality Rules in Axon. 241
Modify or Delete Local Data Quality Rules in Axon. 242
Modify or Delete Rules in Informatica Data Quality. 243

Chapter 8: Accessibility. 245

Overview. 245
Keyboard Shortcuts for Axon Controls. 245
Accessibility Tips. 247

Appendix A: Glossary. 248

Index. 251

Preface

Use the *Axon Data Governance User Guide* to learn how to use Informatica Axon Data Governance. Axon Data Governance is a knowledge repository tool that you can use to document the data items that require governance. Data owners, data stewards, subject matter experts, and other responsible stakeholders collaborate across the organization to progressively chart the business reality of data, its lineage, and usage across processes, policies, projects, and regulation. This guide covers the tasks that you can perform using the Axon Web interface.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:
https://www.informatica.com/services-and-training/customer-success-services/contact-us.html.

To find online support resources on the Informatica Network, visit https://network.informatica.com and select the Support option.

CHAPTER 1

Getting Started with Axon

This chapter includes the following topics:

- Introduction to Axon Data Governance, 12
- Users in Axon, 15
- Logging In to Axon, 17
- The Axon Interface, 18
- Segmentation, 24
- Interface Language, 27

Introduction to Axon Data Governance

Axon Data Governance is a knowledge repository tool that you can use to document the data objects that require governance. Data owners, data stewards, subject matter experts, and other responsible stakeholders collaborate across the organization to progressively chart the business reality of data, its lineage, and usage across processes, policies, projects, and regulation.

Use Axon to inventorize the objects in your organization. You can connect an object to another object within the inventory, and view the details on dashboards, maps, and search results. You can control the access to objects by creating roles and responsibilities.

You can decide whether you want to make the data available to everyone or restrict access to a particular set of users in Axon. You can create segments based on rules, regulations, or geography to authorize data access to users.

After you govern the data, you can publish the data to the Axon Data Marketplace. In the Data Marketplace, you can search for data that other users in your organization have published. Users from various departments in the organization can find data that can be used to make decisions that impact the business. Users can request access to the data and place the order from the Data Marketplace on a self-service basis. To administer the Axon Data Marketplace, see the *Axon Data Governance Data Marketplace Administrator Guide* on the Informatica Documentation Portal.

Inventorize

To effectively use Axon, you must inventorize the important data assets of your organization. Axon is a central repository for the frequent tasks performed by any department and the data assets used in the department.

Axon does not store any source data. Axon maintains an inventory of metadata such as systems, data sets, attributes, definitions, and projects. Content managers can manually create data objects or bulk upload them to Axon. Administrators can assign stakeholders to objects and establish ownership of data.

You can create the following types of data and technology related data objects:

- Attributes
- Data Sets
- Data Quality
- Glossary
- System Interface
- System

You can create the following types of business and change related data objects:

- Business Area
- Change Request
- Committee
- Policy
- Process
- Project
- Role

You can create the following types of organizational data objects:

- Business Area
- Capability
- Client
- Legal Entity
- Org Unit
- People
- Product

You can create the following types of regulatory data objects:

- Geography
- Regulation
- Regulator
- Regulatory Theme

Connect

Axon connects data in the inventory and displays the connected data in dashboards, maps, and advanced search results. Content managers can manually define connections between objects. Axon consumers can view these connections after they open the object.

Axon displays lineage connections between objects as maps. You can view two types of map. You can view a local map when you open an object, or a system wide Insight map from the toolbar. You can narrow down the scope of the Insight map when you perform a Unison search. Unison search is a powerful search function that searches for the objects and the linked objects in all the available facets.

Axon displays dashboards to represent the health of your data. Axon displays local dashboards and system-wide dashboards. The local dashboard displays the data quality of the active object, including a roll-up of the data quality scores of linked objects. You can configure the information that Axon displays in the system-wide dashboard.

Control

Axon provides an integrated view of roles and responsibilities. Consumers of data can view object information from the Axon interface without logging in. Axon ensures that content is managed responsibly by permitting only assigned users to edit objects.

You can manage users in Axon with profiles and roles. Profiles control the level of access that a user has while working with Axon.

Content managers can assign stakeholders to objects. Administrators assign stakeholder roles to users. Every object displays a list of stakeholders. Stakeholders establish who in the organization has knowledge pertinent to the object. This allows all users to communicate with the right people when considering definitions and understanding the effects of changes.

Access

When you add governance metadata to the data, you create a context to use the data meaningfully. The context indicates whether the data is relevant, timely, authorized, and reliable. You can now make the data available to other users in your organization to make business decisions. Users can find the governed data and request access to the data assets.

The Axon Data Marketplace interface provides a controlled environment where users can browse, view details, and get access to data assets on a self-service basis. To know more about the Axon Data Marketplace, see the *Axon Data Governance 7.3.8 Data Marketplace User Guide*.

Authorize

You can create segments to make data available to users for simplicity, security, or regulatory reasons. You can authorize users to access objects based on the segments that you define.

You can allow information access to everyone. But there might be cases where the information might be restricted to a certain group of employees or geographical areas based on rules and regulations.

You can create segments for the following object types:

- Data Sets
- Glossary
- System
- Business Area

- Committee
- Policy
- Process
- Project
- Capability
- Client
- Legal Entity
- Product
- Geography
- Regulation
- Regulator
- Regulatory Theme

Users in Axon

You can view and search for Axon objects without logging in. After logging in, you can perform tasks on objects based on the user profile that the administrator has associated with your account.

Users in Axon Data Governance can search for objects, create and modify objects, and view maps that depict the governance status of objects as the objects move from one system to another in the organization. Admin and SuperAdmin users can configure the application and perform administrative tasks.

Users in Axon Data Marketplace can publish data assets so that other users in the organization can find and use the data.

User Profiles in Axon Data Governance

Every Axon Data Governance user has a user profile. The type of profile decides the tasks that a user can perform in Axon. An administrator associates user profiles to user accounts.

Users can have one of the following profiles associated with their account:

WebUser

A WebUser is the most basic user profile in Axon. WebUsers have permission to view content.

An administrator can provide advanced permissions to a WebUser on a facet by assigning a role. SuperAdmin users can adjust the permissions applicable to a role. Any user with the Edit privileges for an object can assign roles to WebUsers. The WebUser then becomes a stakeholder for the facet and can perform other tasks to create or manage content for the facet. Stakeholder roles can provide New permissions for a facet and Edit permissions for individual objects. For example, a WebUser with the relevant role and permission can bulk upload data to Axon. A WebUser with the New permission on a Glossary facet can create Glossary objects.

If a SuperAdmin user hides non-public objects from Unison search, the non-public objects do not appear in Unison search results for a WebUser that has no stakeholder role on any object of the facet type.

Admin

Users can perform administrative tasks on facets if they are assigned the Admin profile. Users with the admin profile have access to the Admin Panel.

Users with the Admin profile can perform the following tasks from the Admin Panel:

- Automate data quality rules
- Bulk update objects from the Unison grid
- Bulk upload objects
- Configure default values for mandatory change requests
- Configure saved searches
- Create custom fields for facet objects
- Download logs
- Link Enterprise Data Catalog resources to systems and fields to attributes
- Manage locks
- Send Axon diagnostic information to Informatica Global Customer Support
- View licensed users
- View non-public and deleted objects
- View roles and permissions
- Import migrated data
- Use the static page editor

SuperAdmin

Users with the SuperAdmin profile can perform all administrative tasks in Axon. In addition to the tasks that a user with the Admin profile can perform, a user with a SuperAdmin profile can perform the following tasks:

- Assign roles and permissions
- Create segments and assign users to the segments
- Change the organization logo in the toolbar and the colors of the Axon interface
- Configure access control for users
- Configure audit history period
- Configure automatic glossary assignment
- Configure Axon access to other systems
- Configure change request options
- Configure default values for mandatory change requests
- Configure default facets
- Configure dropdown values
- Configure email delivery options
- Configure regional settings
- Configure threshold for map objects
- Create default workflows for facet objects
- Create or edit roles and permissions
- Delete Axon objects
- Edit the glossary rules engine
- Enable fuzzy search

- Hide non-public objects from Unison search
- Enable data migration
- Enable or disable the dashboard
- Hide fields with empty values
- Import data
- Specify prefix for object reference numbers
- Specify support email address
- Use the static page editor
- View content of log files
- Transfer the ownership of dashboards and shared searches

User Profiles in Axon Data Marketplace

Axon Data Marketplace users have specific user profiles according to their roles. The type of profile decides the tasks that a user can perform in the Data Marketplace. A SuperAdmin user associates user profiles to Data Marketplace user accounts.

Users can have one or more of the following user profiles associated with their account:

- Data consumer
- Data owner
- Technical owner
- Administrator
- SuperAdmin

For more information on the user profiles, see the *Axon Data Governance 7.3.8 Data Marketplace User Guide*.

Note: You can access Axon Data Marketplace only if the administrator has enabled the Data Marketplace option in the Admin Panel.

Logging In to Axon

Axon is a Web-based application that you can access from an Internet browser. Contact the IT department of your organization to obtain the Axon URL and your login credentials.

1. Open a browser.

   You can open the Axon application in the following browsers:

   - Google Chrome 60.0 and later.
   - Microsoft Edge 16.0 and later.

   The minimum recommended resolution for the browser is 1280 x 800.
2. In the address field, type the Axon URL.
3. Enter your login credentials.

   Note: If Axon is configured to use Single Sign-On (SSO), you can log in to Axon using your SSO credentials.

Axon refreshes the page and displays your username in the toolbar. This indicates that you have successfully logged in.

4. After you log in to Axon, you can view the **Home** page.

   The following image shows the **Home** page of Axon Data Governance:

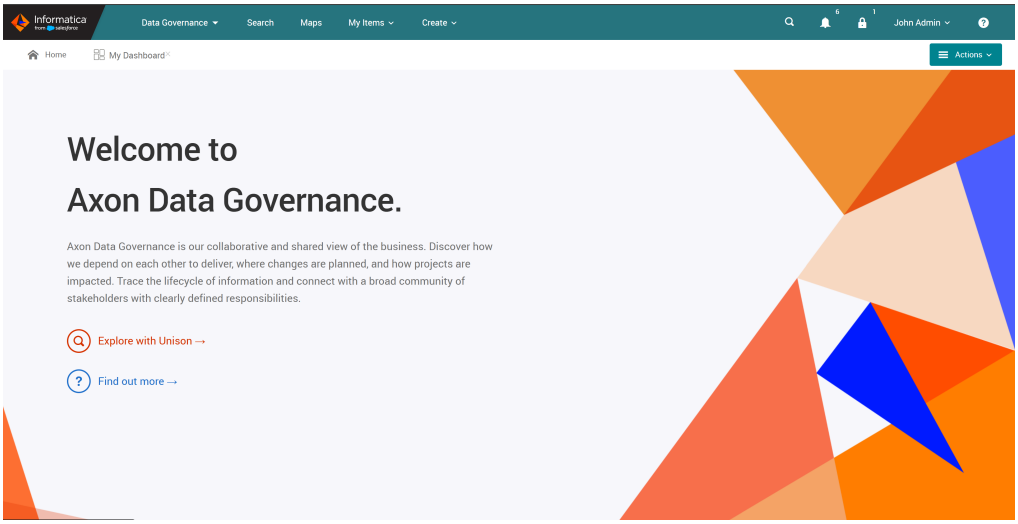

When you log in to Axon for the first time, Informatica recommends that you modify your login password for security purposes. The password must be at least eight characters long and contain at least one lowercase character, one uppercase character, one numeric digit, and one special character.

Note: When you log in to Axon after your browsing session times out, Axon opens the last page that you were browsing before your session timed out.

The Axon Interface

After you log in, the Axon interface displays the Data Governance **Home** page and dashboards tabs. You can access Unison Search and Quick Search from the landing page and Unison search toolbar. From the Unison search interface, you can view the Axon objects and their relationships across facets. You can also create objects and configure Axon parameters.

If the administrator has enabled the Data Marketplace option in the Admin Panel, you can access Axon Data Marketplace from the browser window. Choose **Data Governance** or **Data Marketplace** in the Axon toolbar to switch between governance and marketplace.

Axon Data Governance

In Axon Data Governance, you can create an inventory of your data assets, tag them with governance metadata, connect data assets to each other, see data lineage, and control creating and updating of data using change requests.

Click the **Data Governance** menu in the Axon toolbar to perform governance tasks in Axon. The administrator must enable the Data Marketplace option in the Admin Panel to display this menu option.

Dashboards and Widgets

When you log in to Axon, you can see the dashboards that you have created or have been shared with you. A dashboard presents a personalized interface that you can use to quickly access Axon items that are relevant to you. Within each dashboard, you can create widgets that contain useful, collective, and personalized content with drill-down capabilities. For example, you can create a widget to quickly view a pending task that you need to validate and approve to complete a workflow.

To view the dashboard when you log in to Axon, your Axon administrator must enable the dashboard from the Admin Panel.

You can also create your own dashboards and add your own widgets. For example, you can create a dashboard with several widgets that are relevant to a specific data governance requirement in your organization. You can use this dashboard to see the overall status of the data governance program in your organization, and drill down into specific governance items as necessary.

The following image shows a sample dashboard that you can create to see the overall status of the GDPR governance requirement in your organization:

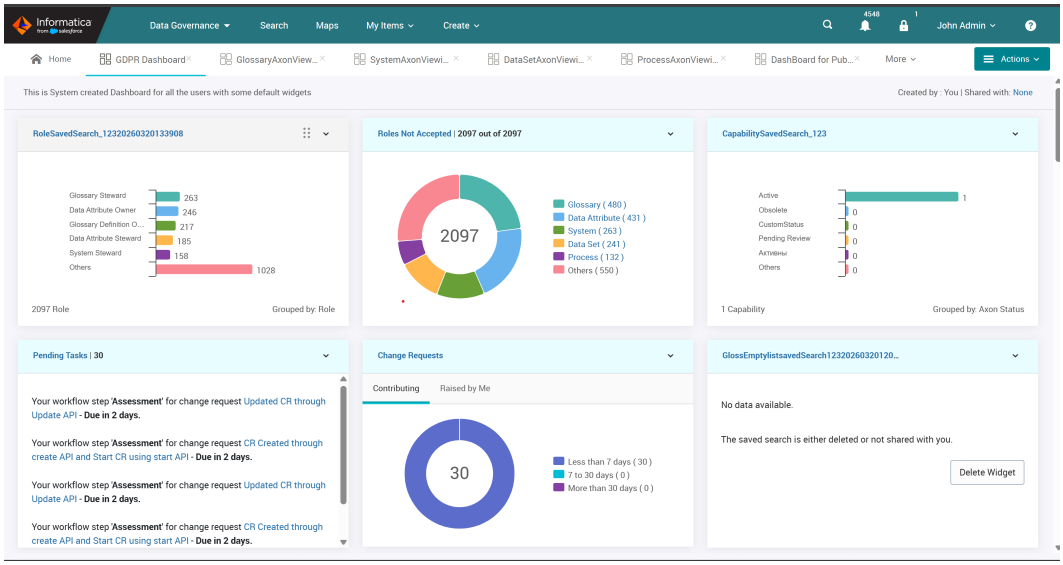

Search Interface

Search and view objects from the Axon search interface. You can access Unison and Quick searches, and view Axon toolbar, facets, and grid.

After you run a Unison search, you can view the objects in the search results.

The following image shows the Axon search interface:

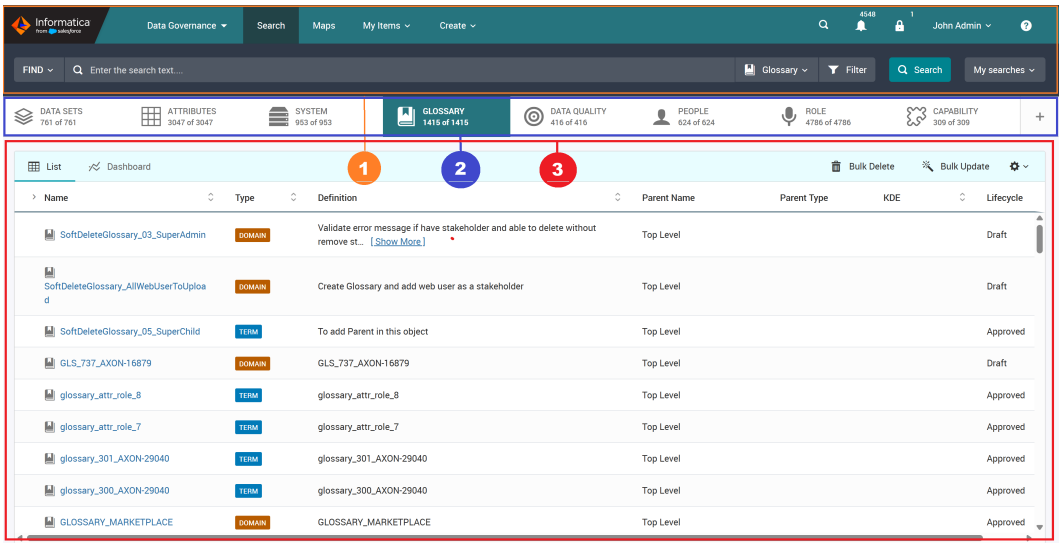

1. Toolbar. Visible from the landing page and Unison.
2. Facets. Visible in Unison.
3. Grid. Visible in Unison.

Toolbar

Axon displays a toolbar at the top of the Unison search interface. The toolbar has menus that you use to view more options to perform specific actions. The menu items in the toolbar change based on the Axon page that you are accessing and whether you are logged in or not.

The following table lists the menu items visible in the Axon toolbar and the login criteria to see the options:

Toolbar Option	Login Required?	Description
Data Governance or Data Marketplace	Yes	Switch between governance and marketplace view in Axon. **Note:** This menu option is available only if the administrator has enabled the Data Marketplace option in the Admin Panel.
Search	No	Search for Axon objects in the catalog using Unison search. **Note:** This menu option is available only if the administrator has enabled the Data Marketplace option in the Admin Panel.
Quick Search	No	Search for Axon objects and directly open the object from the list of results. **Note:** If the administrator has restricted guest users from viewing Axon objects, you must log in to Axon using your Single Sign-On (SSO) credentials to search and browse Axon objects.
Login	No	Log in to Axon.

Toolbar Option	Login Required?	Description
Help	No	Perform the following actions from the Help menu: - Access the online help for Axon. - View tutorial walkthroughs. - See more information about your Axon instance, such as the current version and copyright. - Contact support team for questions or complaints. - Access Axon Community page.
My Items	Yes	View the recently visited objects, the objects that you are following, and the objects in which you have a stakeholder role.
Create	Yes	Create new objects based on your role.
Segments	Yes	View the list of segments that you can access. **Note:** This option appears if a SuperAdmin user has created and enabled access to segments from the Admin Panel.
Notifications	Yes	View your Axon notifications and actions that you need to perform.
Locks	Yes	Prevent users from editing an object. You can view objects that you have locked and manage locks from the **My Locked Items** pop-up.
User Menu	Yes	Perform the following actions from the user menu: - Access your page in the people facet and manage objects that you are following. - Access the Admin Panel if you have an administrator account. - Log out of Axon.
Maps	No	View search results as an interactive diagram using Insight Maps.

Facets

Axon displays objects in the Unison page categorized by facets. Axon uses facets to describe different aspects of an organization.

Unison does not display all the facets by default. Axon contains a large number of facets and not all of them might be relevant to your organization. If you want to show or hide a facet, click the **+** icon to the right of the Unison page and select the checkbox against the facet from the list. You can choose to save the layout so that you can view the facets that you want whenever you log in. When you save the layout, Axon saves the grid columns along with the facet. When you switch from one facet to another, Axon automatically changes the facet on the Unison search toolbar. Each facet has a counter that displays the number of objects in the facet and how many of them are currently visible. Axon filters the objects in a facet based on the search keyword in the Unison search.

If a SuperAdmin user has configured default active facets and their order for all users in the organization, you can view those default facets after you log in to Unison for the first time. You can change the default active

facets and their order. After you save the layout, Axon overrides the default settings configured by the SuperAdmin user.

Grid

Axon displays objects in a grid below the facets. The grid consists of **List** and **Dashboard** tabs. If you open Unison without searching for any keyword, Axon displays all the objects from the catalog in the grid.

List

Axon displays objects on the **List** tab of the grid based on the search criteria. The **List** tab consists of grid columns, such as Name, Definition, and Lifecycle. If you want to view more columns, you can click the gear icon ( ) and choose from the list of columns. If you have configured custom fields for a facet from the Admin Panel, you can view them in the list of columns. You can choose to display the custom fields as columns in the search results. The grid columns vary based on a facet. Some columns are hidden by default. For example, if you want to view the segment to which an object belongs, you can select the **Segments** option from the list of columns.

The number of rows in the grid increases dynamically as you scroll down. The objects in the grid are not sorted. You can choose to sort objects based on the columns that contain the sort arrow icon next to it. You can resize the grid columns to increase or decrease the width of columns. To resize a column, you can hover the cursor next to the column header, and click and drag along the bidirectional arrow that appears between the columns.

You can choose to save the grid-level settings, such as additional columns and column size, for a facet. After you click the gear icon ( ), you can use the following options:

Save Default Layout

Configure and save the default grid layout preferences for a facet for all users. You need to be a SuperAdmin user to view and configure this setting. The grid layout preferences is saved for all users.

Save Layout

Save your preferences for the grid layout for a facet. If a SuperAdmin user has configured a default layout, you can choose to override the default layout to your preferences by clicking **Save Layout**.

Reset Layout

Reset your grid layout preferences for a facet to the default settings. If a SuperAdmin user has configured a default layout, the layout resets to the default setting. If a SuperAdmin user has not configured a default layout setting, the layout resets to the predefined Axon setting.

The following image shows the List tab with the grid column settings:

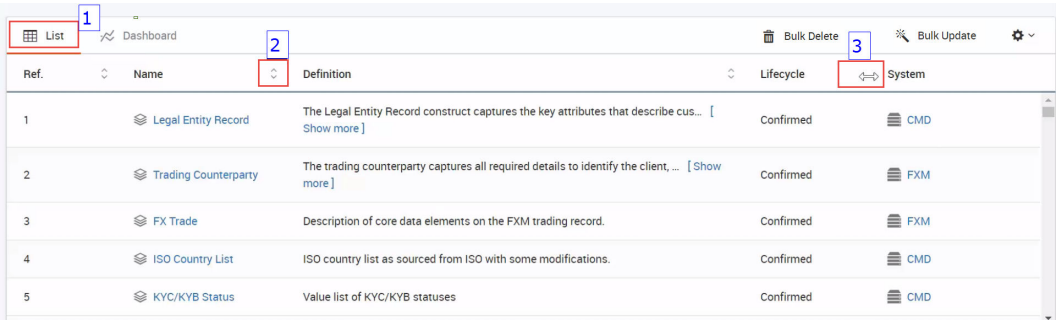

1. The **List** tab

2. The **Sort** option
3. The **Resize** option

The following table describes sample grid columns:

Column Name	Description
Name	Name of the object.
Description	Description of the object.
Type	Type of the object. For example, a glossary object type can be a term, entity, or domain, or a system object type can be a software application or other file types. A SuperAdmin user can customize the type of an object.
Axon Status	Status of the object. The values are Active, Inactive, Pending Review, Obsolete, and Deleted.
Long Name	Full name of the object.
Lifecycle	Lifecycle of the object. The lifecycle values are based on the object type. An administrator can customize these values.
Classification	Classification of the object. The classification values are based on the object type. An administrator can customize these values.

Dashboard

Axon displays search results as a dashboard for each facet. The dashboard provides a visual representation of data based on the search results that you view in the **List** tab.

If you click the **Dashboard** tab from the grid without performing a Unison search, Axon uses data available for all the objects in the facet to calculate the dashboard results. After you perform a Unison search, Axon calculates and displays graphs based on the search results for each facet on the **Dashboard** tab.

The dashboard items differ based on each facet. For example, when you view the dashboard for a Data Set facet, Axon displays graphs for parameters, such as Status, Lifecycle, and Type. When you view the dashboard for a Process facet, Axon displays graph parameters, such as Type, Lifecycle, Status, Classification, Automation, and Level.

Hover the mouse over a graph to see the breakdown of a parameter. Click a color in the legend below the graph to add or remove a value from the graph. Axon redraws the dashboard to display graphs based on the remaining values.

The following image shows a sample dashboard for a **Data Set** facet:

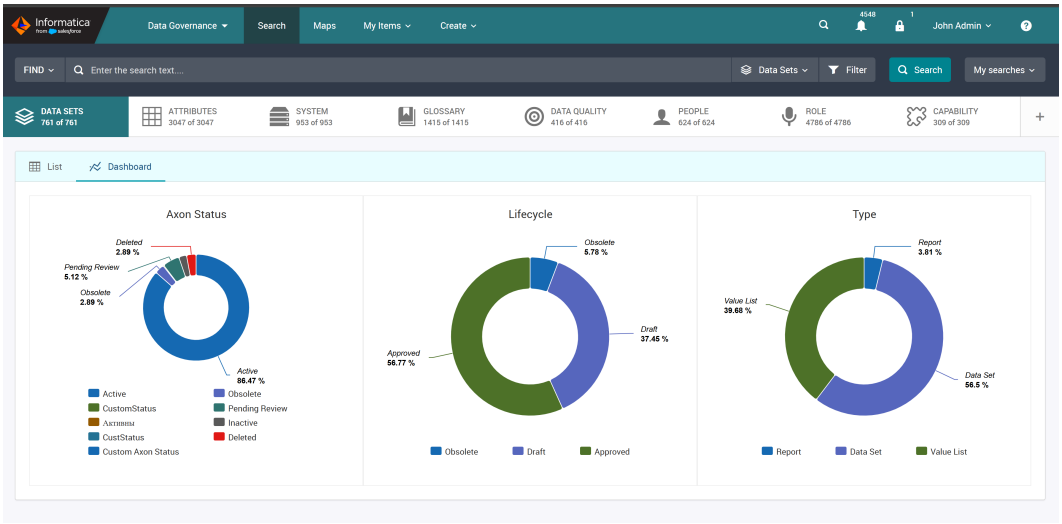

Axon Data Marketplace

In Axon Data Marketplace, you can browse for data sets that others users have uploaded as data collections. A data collection refers to a data set that has a meaningful name and description in the Data Marketplace. You can see the details of the data collections to determine whether you need the data to make business decisions. When you request access to specific data collections, the data owner permits access, and the technical owner delivers the data to you.

Click the **Data Marketplace** menu in the Axon toolbar to perform marketplace tasks in Axon.

For more information on using Axon Data Marketplace, see the *Axon Data Governance 7.3.8 Data Marketplace User Guide*.

Segmentation

Segmentation is the capability to restrict information access to a limited set of users based on their location, business area, and function within an organization. Create and use segments to control access to the content that might be sensitive or requires to be granted limited access due to regulatory needs. Create segments based on your organization requirements such as geography, business area, business function, and legal entity.

In an organization, you can make information available to users for simplicity, security, or regulatory reasons. Some Axon objects are made available to everyone, while some objects are restricted based on the work profile or location of an individual user. For example, a bank in Singapore with offices in Malaysia wants a common platform for data governance, but the regulations might not allow the information from Singapore to be shared with the employees of Malaysia. Similarly, two business areas might want to maintain their own content without sharing it to others for security reasons.

You can restrict access to sensitive information based on rules and regulations. You can update access control capabilities to allow information access based on the role type, profile, and organization structure. You can restrict the data access for the some of the following reasons:

- To prevent access to sensitive information.
- To ensure compliance with country-specific regulations.
- To provide a way of driving multitenancy.

The following image describes different segments and users that are part of the segments:

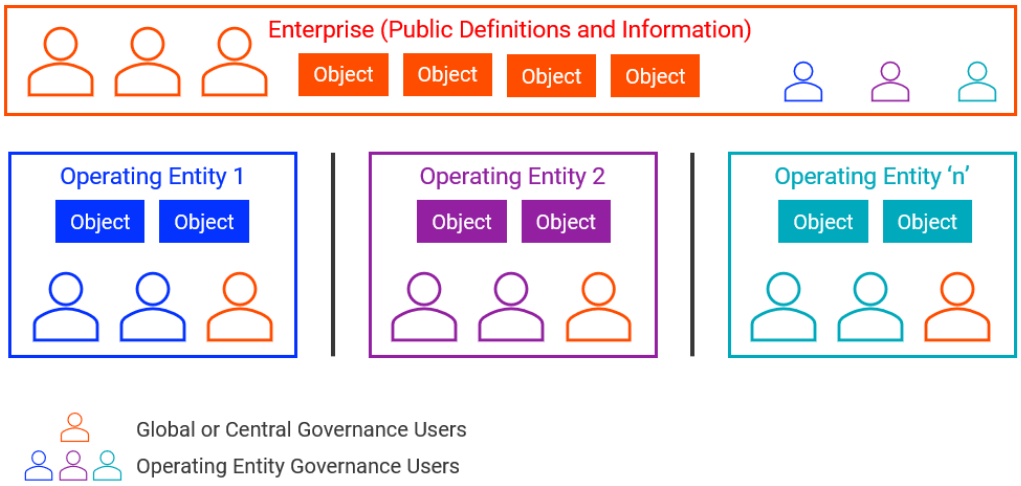

You can assign an object to the Enterprise segment or a specific restricted segment that you create. An Enterprise segment is a public segment that all users can access. In the example, you can see that the operating entities are defined as segments. Each segment has assigned users and contains Axon objects. Though the operating entity governance users belong to different segments, they can access the Enterprise segment.

You can create multiple segments as per your requirements. You can assign a user to a single segment or multiple segments. You can associate an object to a segment. An object and its parent object must belong to the same segment. Only the users with access to a segment can view the objects that belong to the segment.

If an object belongs to a private segment, the related objects can be part of the same private segment or Enterprise segment. For example, if a Process object belongs to a private segment and a Policy object belongs to Enterprise segment, you can create Policy X Process relationships.

If an object belongs to one private segment, the related objects cannot be part of another private segment. For example, if two Process objects belong to separate private segments, you cannot create the Process X Process relationships.

For a parent-child relationship, the entire hierarchy must be part of the same segment. For example, glossary G1 has parent glossary G2, and glossary G2 has parent glossary G3. If glossary G3 belongs to segment HR, the entire hierarchy of glossaries G3 > G2 > G1 must belong to the same segment HR.

If a system belongs to a Private segment, the data set within the system must belong to the same private segment. If a system belongs to the Enterprise segment, the data set within in the system can belong to the Enterprise segment or any private segment.

A SuperAdmin user can create a segment and assign a Segment Admin user to the segment. You can assign only Admin users as a Segment Admin. Segment Admin users are responsible to manage access to segments. A segment can have one or more Segment Admin users.

A SuperAdmin or Segment Admin user can associate users to the segments in the following ways:

- Assign individual users to a segment.
- Assign an org unit to a segment. All members of the org unit can access the segment.
- Assign users to a segment via Single Sign-on (SSO).

Segmentation Example

Consider a car manufacturing company that has several subsidiaries, such as Car ABC, Car PQR, and Car XYZ. Each unit manages their own finance data. To restrict information access, you can create a segment for each car subsidiary.

The following image shows an example of different segments for a car company:

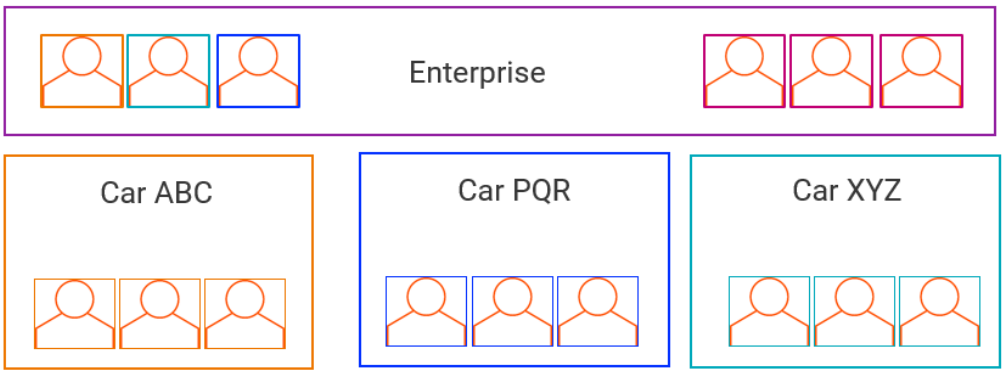

All users of each segment can access the Enterprise segment. Assign Segment Admin users and other users for each segment.

The following image shows a segment that is associated to different users and objects:

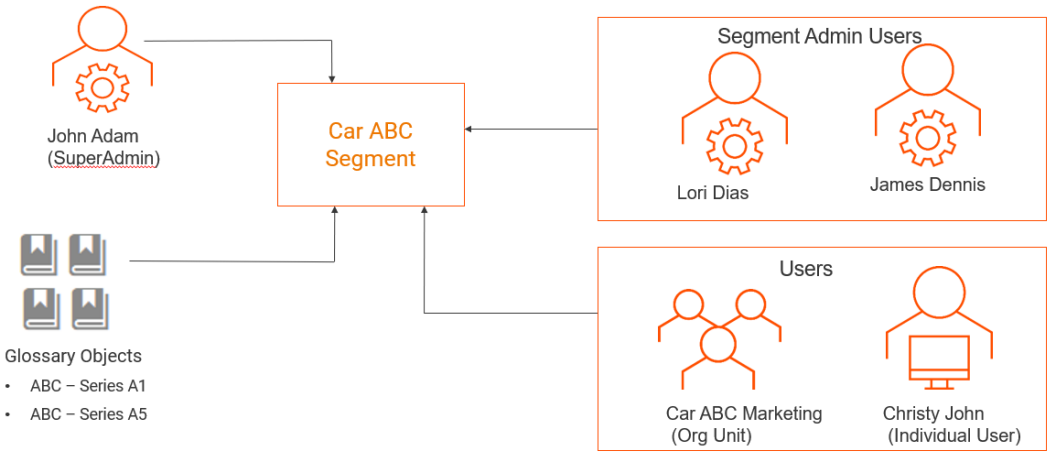

In the example, a SuperAdmin user creates a segment for the subsidiary Car ABC and adds Segment Admin users. You can add an org unit and individual users to the segment. Create glossaries for the Car ABC subsidiary and add the glossaries to the Car ABC segment. When you access the ABC - Series A1 and ABC - Series A5 glossaries from the Unison search, you can see that the glossaries belong the Car ABC segment.

Interface Language

You can change the language of the Axon interface.

The following languages are available in Axon:

- Chinese (Simplified)
- Dutch (Netherlands)
- English (British)
- French
- German
- Japanese
- Korean
- Portugese (Brazilian)
- Russian
- Spanish

To choose a language, log in to Axon, click your user name in the toolbar, hover the mouse over **Language**, and select a language. If you change a language locale and log out of Axon, the same selected locale persists after you log in again.

CHAPTER 2

Search and View Objects

This chapter includes the following topics:

- Search and View Objects Overview, 28
- View and Select Segments, 29
- Searching for Objects, 29
- Working with the Search Results, 36
- Viewing Object Details, 48
- Viewing People Objects, 61
- Viewing Glossary Hierarchy, 63
- Viewing My Items, 64
- Following Objects, 64
- Viewing Notifications, 64
- Managing Locks, 66
- Viewing Object Dashboards, 66
- Viewing Data Privacy Metrics, 69
- Viewing Insight Maps, 72
- Viewing Local Maps, 77
- Viewing Process Maps, 78
- Viewing Data Quality Reports, 80
- Viewing Custom Fields, 80

Search and View Objects Overview

You can access Axon using a web browser. After you open Axon, you can search for objects, manage notifications, and view maps and dashboards. To look up objects, you do not need to be logged in.

From the Axon home page, you can log in using your username and password. Once you log in, you can create objects, view notifications and other personalized items.

If the administrator has enabled the Data Marketplace option in the Admin Panel, you must be in the **Data Governance** view of Axon to view objects, maps, assigned segments, and notifications.

View and Select Segments

You can view the assigned segments from the Unison search page.

You can choose to view the objects that belong to different segments. Click the **Segment** icon from the toolbar and select the segments for which you want to view the objects.

If either the Enterprise segment or private assigned segment is configured as default segment in the Admin Panel, the segments list shows the default segment that is assigned to you when you log in to Axon for the first time. If you update the segments selection list, you can see the list of your selected segments the next time you login. If the default segments are not configured or both Enterprise and Assigned segments are in the Admin Panel, you can see that the **All** option is selected by default when you log in.

The number of facet objects vary based on the segments that you select. An object and its parent object must be in the same segment. If an object belongs to a private segment, the related objects can be part of the same private segment or Enterprise segment. If an object belongs to one private segment, the related objects cannot be part of another private segment.

The following image shows a sample list of segments that a user can access:

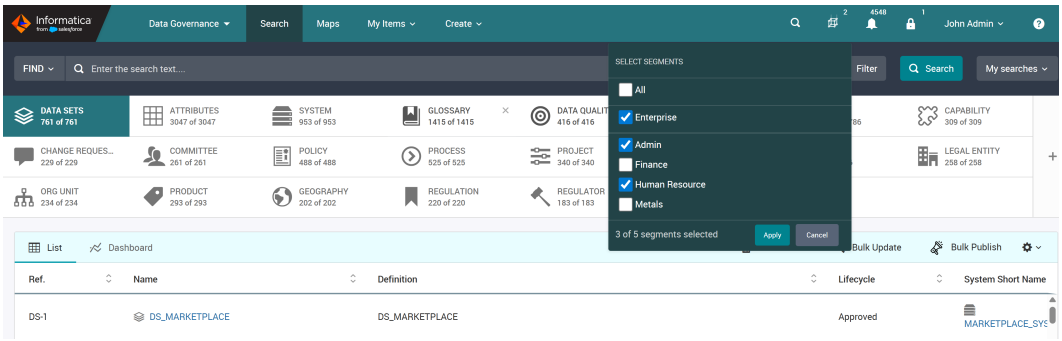

All users can access the objects in the **Enterprise** segment. If you want to view objects from a specific segment, click the **Only** option that appears when hover over the segment. To view all the objects from the Enterprise segment and other segments, select **All**. After you select the segments, you need to click **Apply** to save the changes and close the list.

The objects that you view on the Unison search might change based on the org units as well. Consider that org unit Finance is a parent of org unit Payroll. The parent org unit Finance is assigned to segment Fin, and the org unit Payroll is assigned to segment Pay. If you are part of the org unit Payroll, you can view all the objects that belong to segments Fin and Pay.

Searching for Objects

Use Unison and Quick searches to search for objects in Axon. Searching for an object is the quickest way to view the object properties.

You can search and view the objects that belong to a segment. The objects that appear in the search results are based on the selected segments. An object and its parent object must be in the same segment. If an object belongs to a private segment, the related objects can be part of the same private segment or Enterprise segment. If an object belongs to a private segment, the related objects cannot be part of another private segment.

If you update the segment selection on Unison search, you can see that objects change in the **List** and **Dashboard** views of a facet.

If the SuperAdmin user has configured Axon Data Marketplace for your organization's Axon instance, Axon displays the data collections associated with a data set under the **Data Sets** facet in Unison. To view the data collections, select **Data Collections** from the **Choose Columns** sub-menu in Unison.

Unison Search

Unison search is a powerful search function that is central to Axon. When you run a Unison search, Axon searches for the objects and the linked objects in all the available facets. Axon searches for objects in all facets during each Unison Search, regardless of whether or not the facets are hidden. For example, consider that a Process object is related to a Glossary object and the Glossary object is related to a System object via Data Set and Attribute objects. If you perform a Unison search on the Process object, Axon displays the related Glossary, Attribute, Data Set, and Systems objects.

Axon filters the objects in the facets based on the keyword that you searched. You can select a facet in which you want to perform the search. When you click the menu to select a facet, you can view the active and hidden facets. If you select another active facet, Axon automatically switches to the facet that you selected in the **Facets** layout. If you click a hidden facet, the facet is added to the active facets and appears in the **Facets** layout.

The following image shows a sample Unison search criteria:

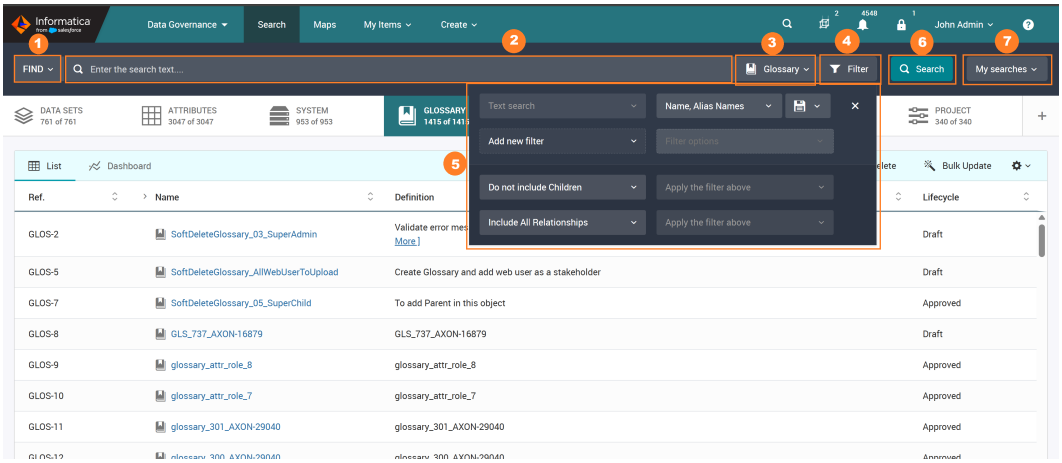

1. Select a search operator.
2. Select search criteria.
3. Select a facet.
4. Select the filter.
5. Configure the filter options.
6. Perform a Unison search.
7. View saved searches.

When Axon applies an active filter to a facet based on the search keyword, the color of the facet changes to orange. You can see a count of the number of objects in a facet next to the facet name. After you search for an object, Axon updates the counter in each facet to show the number of assets that are linked to the search keyword and filters the objects in the facets to display only those that are linked. After you search for the first time, Axon creates and displays a search counter with a numeric digit dropdown. The search counter increases when you select a logical operator and perform a search. You can view the current active search that you performed from the search counter dropdown. You can view all the saved searches from the **My searches** list.

When you open maps, Axon displays objects linked to the keyword that you searched for. You can see how objects in one facet are connected to items in other facets. Unison search uses both direct and indirect connections to display the items that are most relevant to the search.

Unison Search Filter Options

You can configure the filter options to refine the search. The filter options appear based on the facet that you select. For example, you want to search the glossary term CMD-ID that has an approved lifecycle and active status. You enter the keyword as `CMD-ID` and select the **Glossary** facet. Configure the filter options such as Text search, Lifecycle, and Status, and then perform a search to find accurate results.

You can find all the objects that a user has created or updated within a date range. For example, you want to find all the glossaries that are created by John Smith and Jim Adams in the last couple of months. Select the Glossary facet and choose the **Created By** filter. Search and add "John Smith" and "Jim Adams" from the list of users. Choose the **Created Date** filter and select the date range from the **From** and **To** fields. Alternatively, you can enter a numeric value in the **Last____Days** field.

Note: If the **Axon Status** field for a user is "Deleted," the **Created By** field appears empty. You cannot filter objects based on users who created or updated the objects. The **History** tab does not show the **Created By** details after the user is deleted.

If you require to use the date filter to focus the scope of the search between specific dates, apply the date range filters within a single search query. If a previously saved search contains separate search queries for a single date range, edit the search to include the date range in a single query, and save the search. For example, consider that you had previously created the following two separate queries with the AND condition:

1. Find data sets with the created from "01-01-2021".
2. Find data sets with the created till "31-01-2021".

Apply the date range filter by combining the search query as follows:

- Find data sets with the **Created Date** filter with **From** value "01-01-2021" and **To** value "31-01-2021".

To search the records belonging to a specific period using the date filter, you can enter a numeric value in the **Last____Days** field. Your current date is included in the search criteria. For example, if you set the date filter to search for **Last 4 Days** records, and the date in your local system is January 08, 2021, then the filter displays records from January 04, 2021 to January 08, 2021.

You can apply filters to custom fields when you perform a Unison search. Custom fields capture specific additional data to meet your business requirements. The filters vary based on the type of custom field. For example, if the custom field is of type "Number," you can apply a filter based on the range. If the custom field is of type "Date," you can apply a filter based on start and end dates.

You can perform a Unison search for text and dropdown options for non-mandatory and custom fields that have empty values. For example, if the field is of type **Availability** and you have not assigned any value to the field, you can select the "Not defined" filter to search for the object. You can also enter double quotes ("") in the text search option to search for such objects.

You can use the Unison filters to search objects based on the status of data quality scores. For example, you can select the **Data Quality** facet, select the **Result** filter, and choose the **Red**, **Amber**, or **Green** target to view the local data quality rules based on the status of scores. If the objects in the search results are below the target level, you can view that the **Result** column in **Red** color and take the necessary steps to improve data quality scores.

You can apply filters to the following types of custom fields:

- Text
- Number

- Percentage
- Decimal
- Single Selection Dropdown
- Multiple Selection Dropdown
- Checkbox
- Date
- Time

If the custom field is of Text type, select the field in the **Name** list of the **Filters** dropdown before you enter the search terms.

You can use the `Me(current user)` filter in the Unison filter options to search for results relevant to the current logged in user. If you create a saved search using the `Me(current user)` filter, Axon curates the search results relevant to the current logged in user that is utilizing the saved search. The results that appear are not influenced by the creator of the saved search.

If the SuperAdmin user has configured Axon Data Marketplace for your organization's Axon instance, you can use the **Data Sets | Data Set in Data Marketplace** filter in Unison to curate the search results to display objects that relate to data sets that you have either published in Axon Data Marketplace or not published in Axon Data Marketplace. For more information on configuring Axon Data Marketplace, see the Axon Data Governance 7.3.8 Administrator Guide.

Save Text Search Preferences

You can save the text search preferences for a facet. For example, if you select the **Data Set** facet, you can see that **Name** and **Definition** fields are selected by default. Additionally, you can select **Ref.** and **Usage** fields and click **Save** > **Save Text Search Filters** to save the text search preferences.

When you choose to save the text search preferences, you can perform the following actions:

Save Text Search Filters

Configure and save your text search filters.

Reset Text Search Filters

Reset your text search filters to the default settings.

Save Default Text Search Filters

Configure and save the default text search filters for all users. You must be a SuperAdmin user to view and configure this setting.

Reset Default Text Search Filters

Reset the text search filters to default settings for all users. You must be a SuperAdmin user to view and configure this setting.

Unison Search Operations

Axon filters the objects in the facets based on the keyword that you searched. You can select a facet in which you want to perform the search. When you click the menu to select a facet, you can view the active and hidden facets. If you select another active facet, Axon automatically switches to the facet that you selected in the **Facets** layout. If you click a hidden facet, the facet is added to the active facets and appears in the **Facets** layout.

You can perform the following types of search operations using the Unison search:

Perform New Searches

You can enter a keyword to perform a search. Axon uses the default **FIND** operation to search for a keyword. When you search a keyword for the first time after you log in, the **FIND** option is disabled. After you perform the first search, the **FIND** operation is enabled. Whenever you perform a new search, the search counter does not change.

Add to Searches

You can add a keyword to an existing search by selecting the logical **AND**, **OR**, and **NOT** operators. When you select a logical operator, you can view the **Add to search** button. When you select a logical operator and add a keyword to a search, Axon filters the search results further to only items that match the filter in each facet with an active search. Enter another keyword and click **Add to Search** to add the keyword to an existing search. For example, you first search for the Party Data glossary term. Select the **AND** operator and enter the name "John" in the keyword, select the **People** facet, and click **Add to search**. Axon refines the search and filters the Party Data glossary term for which the stakeholder is "John."

Clear Searches

To clear all the previous searches that you performed, click **Clear**.

Unison Search Operators

You can include logical operators in a search query to refine the search results. Apply the logical operators such as AND, OR, and NOT to filter to the search results.

Use the following operators to refine the Unison search results:

Find

The default operator that you always apply when you perform a search. After you log in and search for the first time, you can view that the FIND option next to the search field is enabled.

And

The operator adds additional search options to a simple search that you already performed. For example, you want to search for an attribute that is part of a data set and the data set needs to be part of a particular system. When you use the **AND** operator, objects that match both criteria appear in the search results. The **AND** operator has a blue background color.

Or

The operator helps search based on any one of the multiple search criteria. For example, you want to search for a data set with the name "Trading" or a system with a "Trading Platform" classification. The search results include all the data sets that start with the name "Trading" and the systems that are classified as "Trading Platform". The **OR** operator has a green background color.

Not

The operator that excludes a specific item from a search. For example, you want to search for a system with the name "Enterprise" excluding the associated glossary "CMD-ID". The **NOT** operator has a red background color.

Unison Search Options

Every time you select a logical operator and perform a search, Axon adds the search criteria for reuse. Click the count dropdown to view the search options for the search operation that you performed.

The following image shows the various search options that you can use in a Unison search:

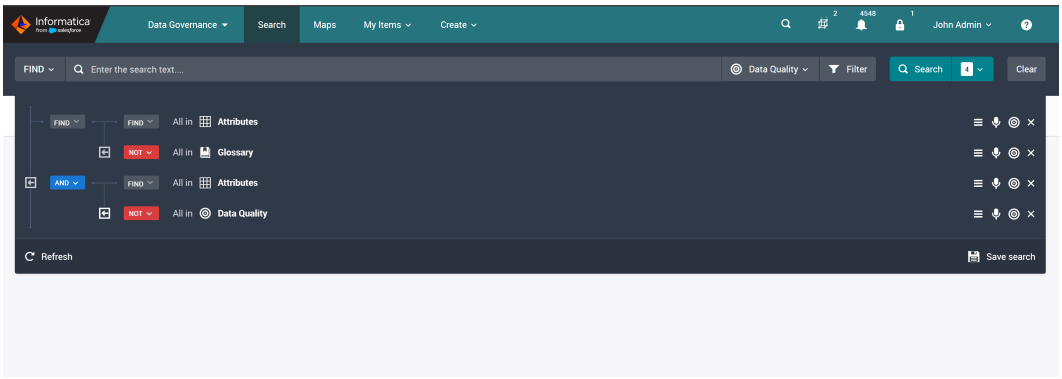

You can perform the following operations for a Unison search:

Edit

You can choose to update a search. Click **Edit** and update the keyword and search filter.

Reorder this search

You can choose to perform a specific search operation prior to another search operation from a list of multiple searches. Click the **Reorder this search** icon and drag it upwards or downwards to change the order of search.

Mute this search

You can choose not to run a specific search from a list of multiple searches. Click the **Mute this search** icon to disable the search. Later, if you want to use any other option for the search, you need to click the **Unmute this search** icon.

Run only this search

You can choose to run a particular search from a list of searches. Click the **Run only this search** icon to run a specific search.

Clear this search

If you want to delete a particular search, click the **Clear this search** icon.

Add to group

If you have multiple complex searches, you might want to group specific searches and run them before the rest of the searches. To group searches, click the **Add to group** icon. Axon adds the search to a group. When you run a search, Axon first applies search criteria based on the combination of the group and then based on the rest of the searches. For example, you want to search the attributes that do not contain any glossary or data quality rule. First, you group the search for all the attributes that do not contain any glossary. Next, group the search for all the attributes that do not contain any data quality rule. When you apply the **AND** operator to both the groups, objects that match both criteria appear in the search results.

If you choose to reorder, mute, run, or clear a search that is part of a group, the action applies to all the searches within the group. If you want to separate a group, click the **Remove from group** icon.

Save search

You can choose to save the searches for reuse. Click the **Save search** icon to save the searches. You need to provide a name and description for the search criteria. You can edit a saved search to add more filters. You can save the edited search as an update to the existing search or as a new search.

Refresh

If you want to refresh the search results, click the **Refresh** icon.

Quick Search

Quick Search makes it easy to find objects in Axon across all facets directly. The Quick Search bar is located in the toolbar and is visible from the landing page and Unison. Quick Search searches every item in Axon for a match.

To perform a quick search, click the search icon to expand the menu and type a search keyword. Axon displays a list of terms that match your keyword in a window that opens below the search menu. The search results display the most relevant result on the top of the list of terms. If you click the name of any object displayed in the Quick Search results, Axon opens the object page.

Quick search looks for the following matches:

- Object names
- Alias name (Glossary facet only)
- Reference ID (for those facets that have one)

As Quick Search allows partial matches, it starts searching as soon as you start typing. Normally you do not need to enter many characters before you are offered results. The search refines itself based on your search keyword.

Quick Search also searches for any glossary item alias names. If any matches are found on the alias term, Axon displays the object's standard name (not the alias) in the results pop-up.

Quick Search may find matches across many facets. When this happens, Axon displays the results ordered by facet. Axon displays only the first three matches per facet in the search window. You can use the scroll bar to see more results in the pop-up.

You can re-order the facets that Axon displays in the search window to move the results that you are interested in. Click the dropdown arrow next to the gear icon in the **Quick Search** menu. Axon displays a list of facets in the **Order Search Results** window. Select the facet that you wish to re-order and click and drag it up or down the list. Axon will remember your preference for the rest of the login session, or until you clear cookies on the page.

Fuzzy Search

A fuzzy search finds matching results even when you misspell, interchange, or miss one of the keywords.

When you perform a search, Axon implements fuzzy search and displays matching results. For example, if you type "logal" instead of "legal," "legal record" instead of "legal entity record," or "Data Party" instead of "Party Data," Axon displays matching results by ignoring the typographical error.

Axon provides matching results if the two characters of the keyword are interchanged. For example, if you type "Cutsomer" instead of "Customer", Axon ignores the error and displays the matching results.

You can implement fuzzy search across all English and non-English languages and characters. Axon finds matching results if a keyword sounds similar but has a different meaning in multiple languages. For example, if you search with the keyword "acao", Axon displays matching results with "acao" in English and "Ação" in Portugese.

If fuzzy search is enabled, you can also use the wildcard character * at the beginning or end of the keyword in the search box to find matching entries.

An Admin or SuperAdmin profile user can choose to enable the fuzzy search behavior from the Admin Panel. The fuzzy search applies to both Unison and Quick searches.

Quick Links

You can use a quick link to view the search results for a predefined search. You can view the quick link even without logging in to Axon.

An Admin or SuperAdmin user can select a saved search to access it as a quick link from the Unison search page. Axon displays the name of the selected search as a quick link button next to the **My searches** list. For example, if the name of a saved search is CMD Search, the name of the quick link button is CMD Search. When you click the CMD Search button, you can view the list of glossaries based on the search criteria.

The following image shows a sample quick link search results for a glossary:

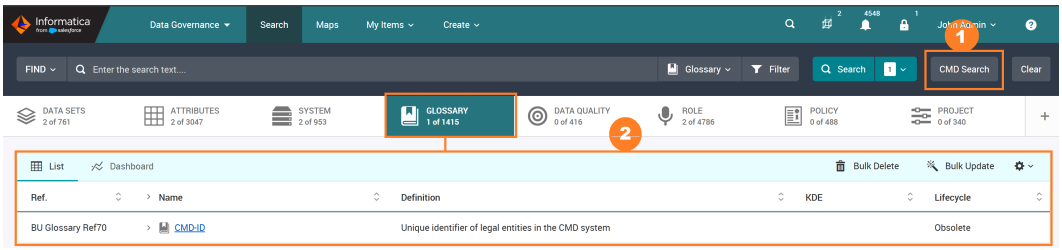

1. Quick link that searches for a glossary with the name "CMD"
2. Search result with the glossary name that contains "CMD"

You can change the name of the quick link button from the **Manage Searches** page and the **Quick Links Configuration** option under **Customize & Configure** | **System Settings**.

Working with the Search Results

You can filter the objects, search within hierarchical facets, and save and share search results after Axon displays the Unison search results.

You can filter the search results based on one or more items shown in any of the grids. Each facet has one or more filters. The filters vary based on the facet. Some facets, including the glossary facet, have options to include items within the same facet that are hierarchically linked to the search term. Any facet that provides the ability to associate an object to a parent is a hierarchical facet. You can apply separate filters to view child objects of a parent. You can also share the saved search results with other Axon users.

Add Grid Items to Unison Search

You can manually add items from the grid to the current search to refine the search results. To add items to the current search, you need to select one or more rows that you want to include from the grid. To select multiple items, use the **Shift** or **Control** keys when you click the items.

You can create filters for the items that appear in any grid. Select one or more rows and then click **Search** to apply the filter.

The following image shows the grid items that you can search:

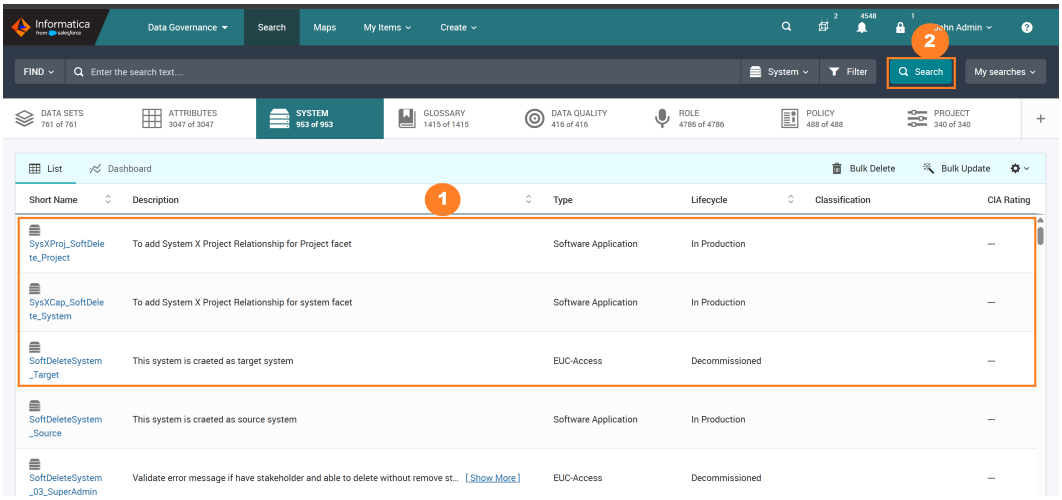

1. Select the grid items.
2. Perform a search.

If you select multiple rows and select a logical operator, you can click the **Add to search** button. Axon includes the selected items in the current search and refines search results based on the selected grid items. After you run the search, Axon updates the search counter.

The following image shows the additional grid items that you can add to search:

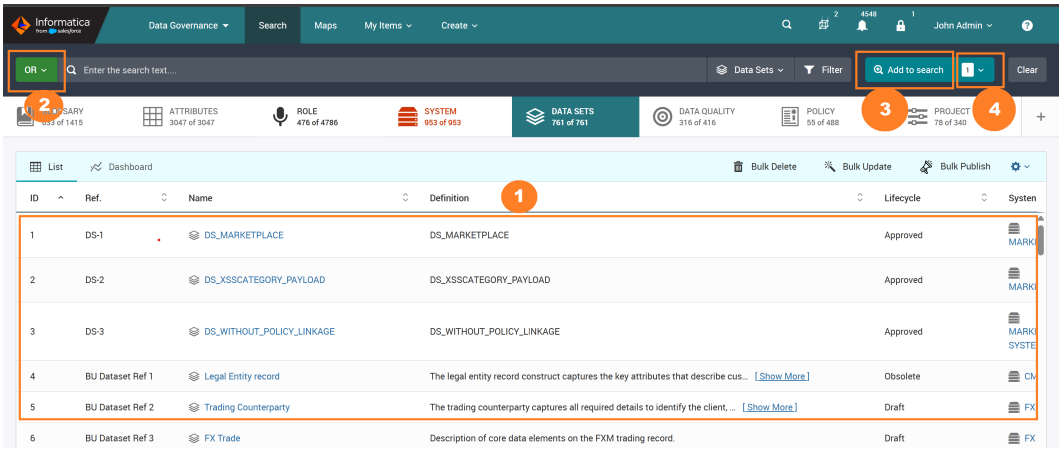

1. Select more grid items.
2. Select a logical operator.
3. Add to search.
4. View the search counter.

When you click the search counter dropdown, you can view that the grid items are added to the search operations. You cannot edit the grid items search criteria. You can edit the search operators and use other search options, such as reorder the search and mute the search.

Searching in Hierarchical Facets

In some Axon facets, you can organize objects in a logical hierarchy that contains a nested series of parent-child relationships. A few examples of these facets include Glossary, Process, Capability, and Policy. Any facet that provides the ability to associate an object to a parent is a hierarchical facet.

When you search in hierarchical facets, you can apply specific filters in Unison search. The filters help you explore parent-child object relationships in a facet.

The following image shows the filters that you can apply for child objects:

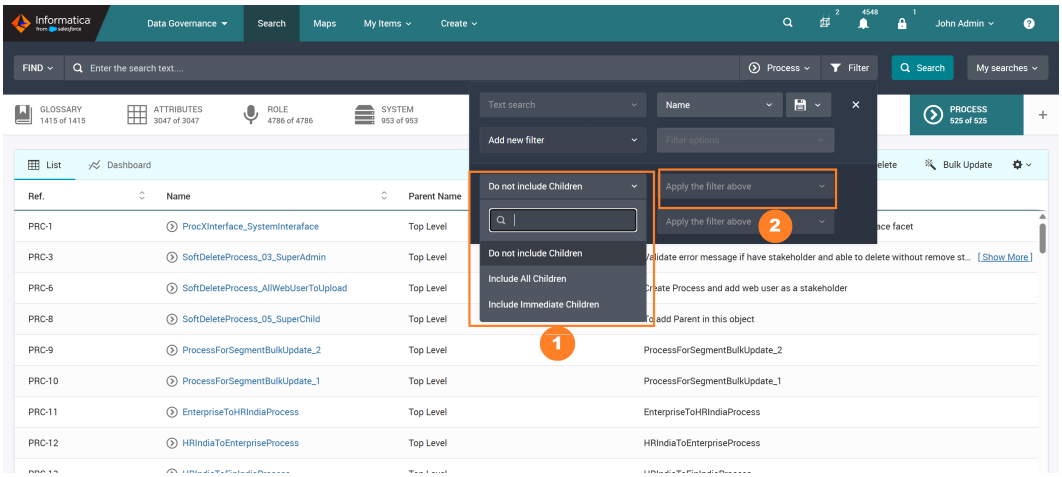

1. Include or exclude child objects
2. Filters for child objects

You can use the following filters to search within hierarchical facets:

Hierarchical Objects

You can quickly find objects that are in the top- level, first-level, or second-level of hierarchy. A top-level object is any term that does not have a parent object. A first-level object is the immediate child of a top-level object. A second-level object is the immediate child of the first-level object and grand child of the top-level object. For example, a GDPR Policy can be a top-level policy object. Within the GDPR Policy object, you can have immediate child policies such as GDPR Principles and General Provisions. Within the General Provisions policy, you can immediate child policies such as Material Scope, Territorial Scope, and Definitions.

You can set multiple levels of object hierarchy within filters in Axon, but you can search for objects only within the first five levels of the hierarchy. When you find a term with child objects, you can choose to add either the immediate child objects or all child objects to the current search. You can also choose not to include child objects when you perform a search.

Child Object Filters

You can choose to apply the same filter on both parent and child objects in the search results. For example, if you choose to include all child objects in a search, select **Apply the filters above** and add new filters, such as Lifecycle and Status, at the parent level. When you perform a search, Axon applies the same filters for the parent and child. You can also choose not to apply any filter on the child objects that are included in the search.

If you choose to apply filters for the child objects, Axon applies the filters for both parent and child objects. If you want to include child objects without applying any filter to child objects, Axon applies filter to the parent object and then includes parent and child objects in the search results.

Searching for Parent-Child Objects

You can select a parent-level object from the grid and search for its child objects to view the hierarchy. You can also view the entire hierarchy in the search results that include the parent object, child objects, and grandchild objects. For example, you want to view the child objects for the parent glossary term "Party Data". Select the **Party Data** grid item, select **Include Immediate Children** from the filter options, and click **Search**. You can view the Party Data parent object and the immediate child objects, such as Party Classifications and Party Risk Data.

The following image shows sample search results with the hierarchy for a glossary object:

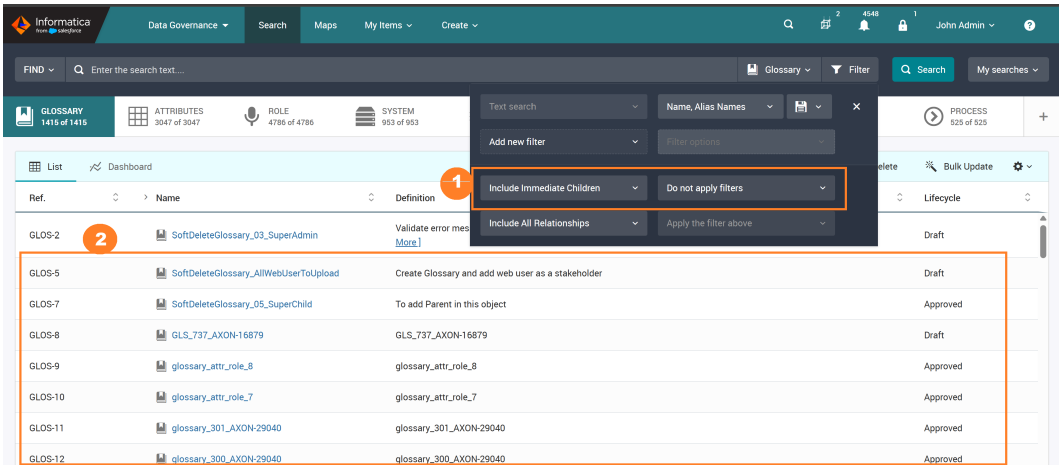

1. Filter options to find immediate child objects for a parent object
2. Search results that shows the glossary parent object and its child objects

Applying Filters on Child Objects

You can perform a Unison search to apply filters for child objects. For example, you find out if a parent object has child objects with the **Deleted** status, the **Approved** lifecycle, or the date when they were last updated. Consider a parent process with the name "Lead to Opportunity". From the Unison grid, select the parent process name, click the **Filter** option. To view all the child objects, select **Include All Children** without applying any child filter and click **Search**. You can view the Lead to Opportunity parent process and all the child processes such as Generate Lead, Assign Lead, Contact Lead, and Determine Product Interest.

The following image shows the hierarchical objects for the Lead to Opportunity parent process:

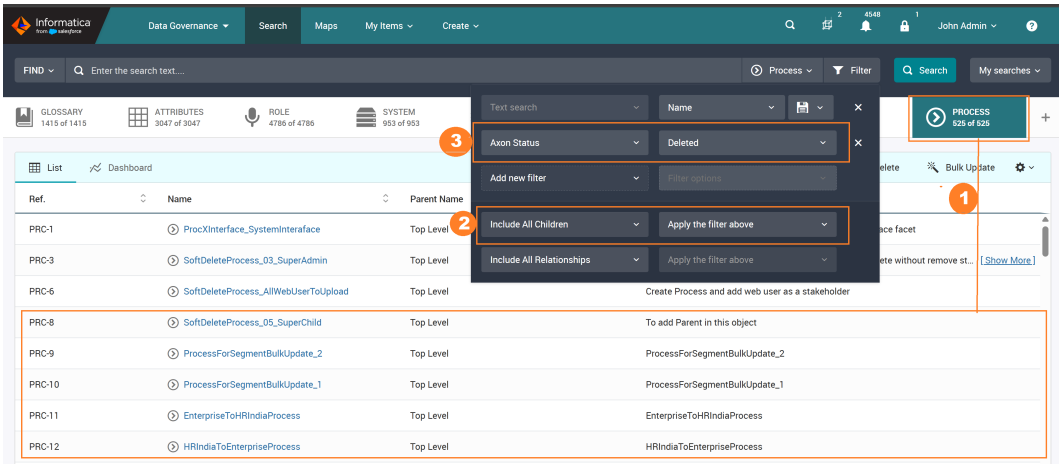

1. Lead to Opportunity parent process along with the child processes

2. Include all child objects in the search and apply the filters
3. Search for objects with the Deleted status

You can perform a specific search to find the child processes with the Deleted status, Approved lifecycle, or the date when they were last updated. To search for the deleted child processes, select **Include All Children** and select **Apply the filters above**. In the parent-level filter, select **Status** and then choose **Deleted**. To view all the deleted process, click **Search**.

The following image shows sample deleted processes for the Lead to Opportunity parent process:

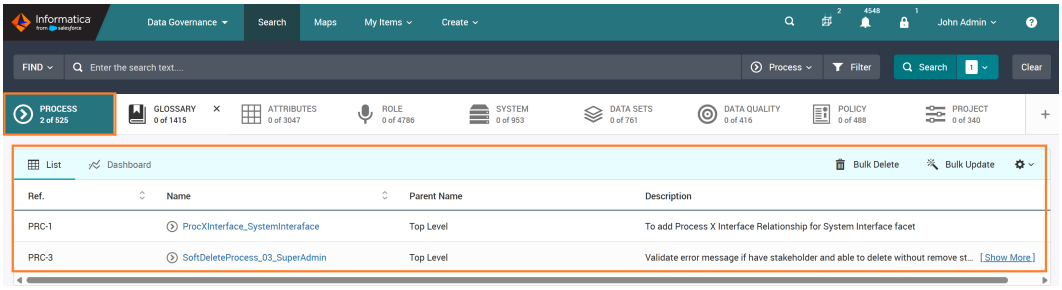

Searching with Direct and Indirect Relationships Filters

In Axon facets, you can search facets with either direct or indirect related object separately by selecting the filter.

When you search any facets, you can apply specific filters in Unison search. The filters help you explore direct and indirect related objects in a facet.

Note: Unison Search may not provide expected results on performing complex search queries (performing AND/OR/NOT operation) with filter of direct and Indirect relationships. Unison map overlay results may not be in sync with the Unison searched results after applying direct or indirect relationship filters.

The following image shows the direct and indirect filters that you can apply for any objects:

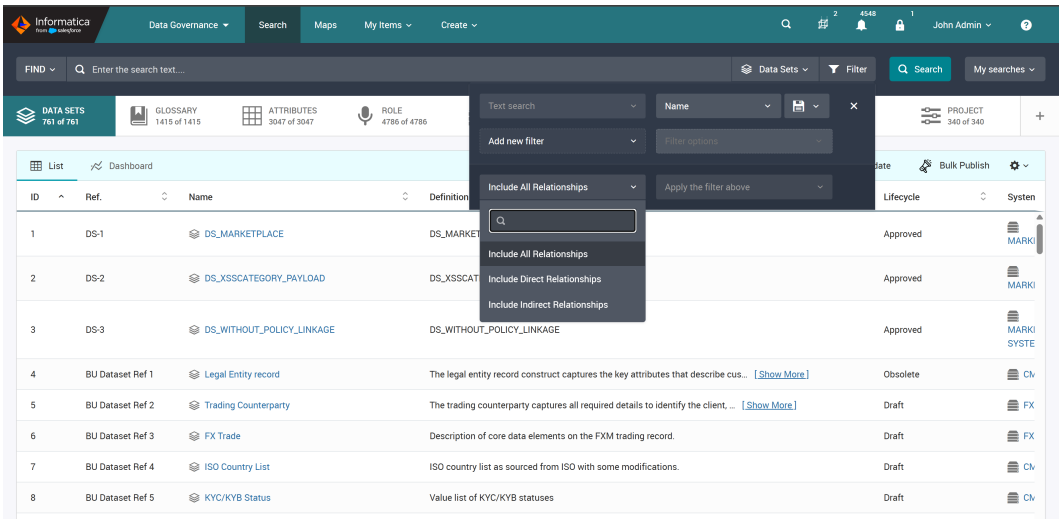

- Include All Relationships
- Include Direct Relationships

- Include Indirect Relationships

You can use the following filters to search within any facets:

All Related Objects

You can find all objects that are related with the searched objects.

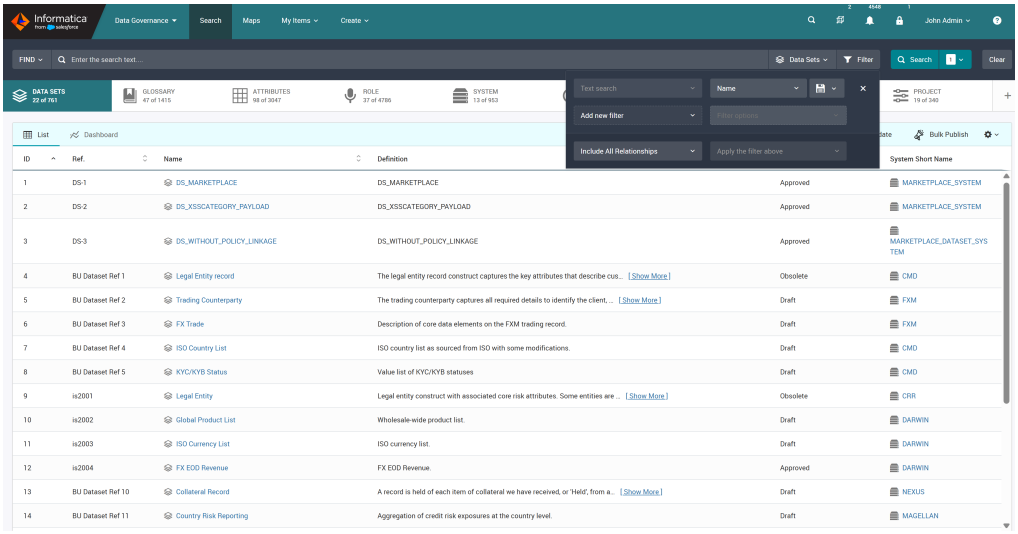

For example, if you search for a data set with **Include All Relationships** filter, you will get all the objects of other facets that are either directly or indirectly related to the searched data set objects.

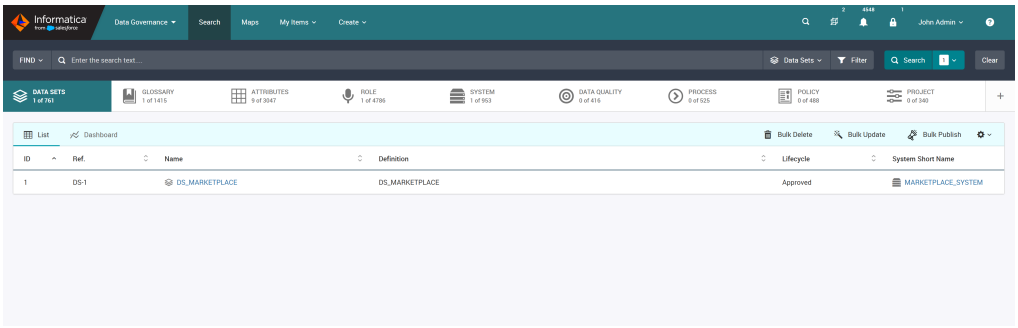

Note: By default, the filter option gets selected.

Direct Related Objects

You can quickly find objects that are directly related with the searched objects.

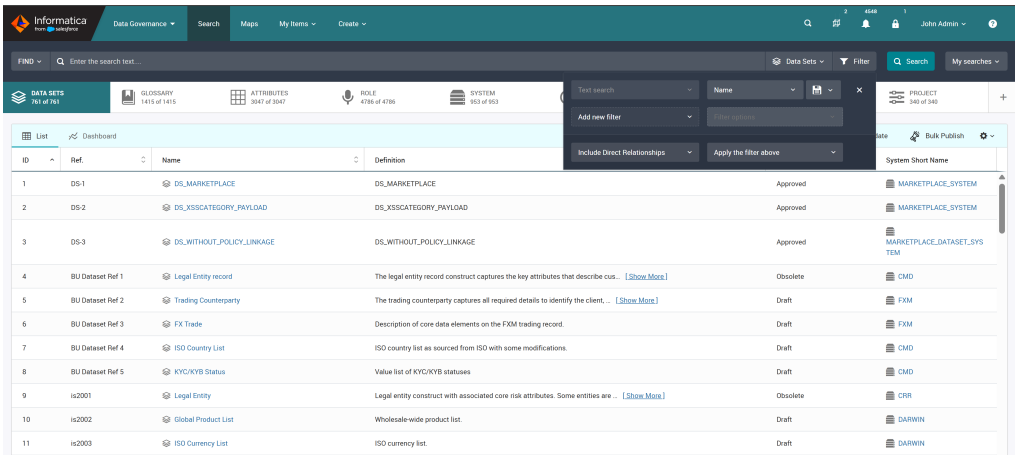

For example, if you search for a data set with **Include Direct Relationships** filter, you will get the objects of other facets that are directly related to the searched data set objects.

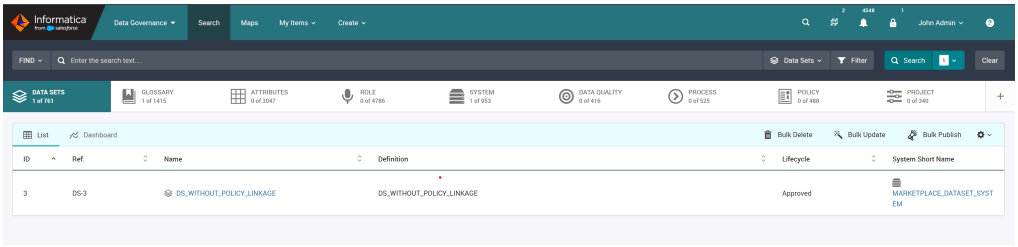

Indirect Related Objects

You can quickly find objects that are indirectly related with the searched objects.

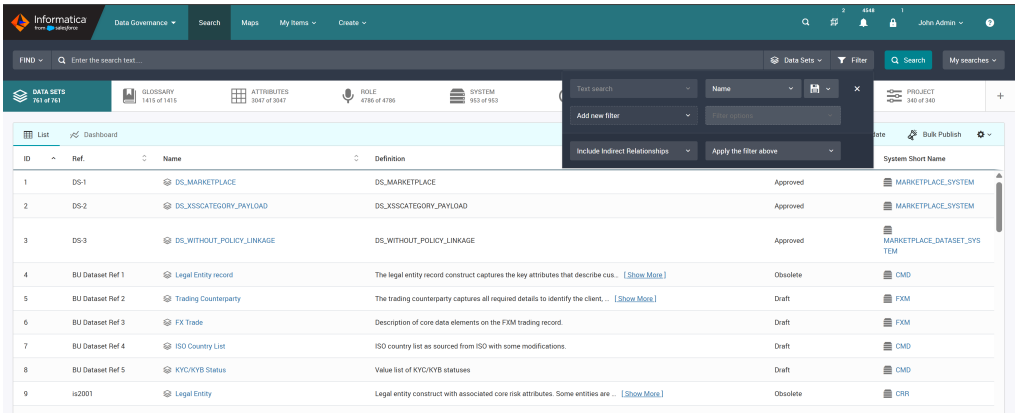

For example, if you search for a data set with **Include Indirect Relationships** filter, you will get the objects of other facets that are indirectly related to the searched data set objects.

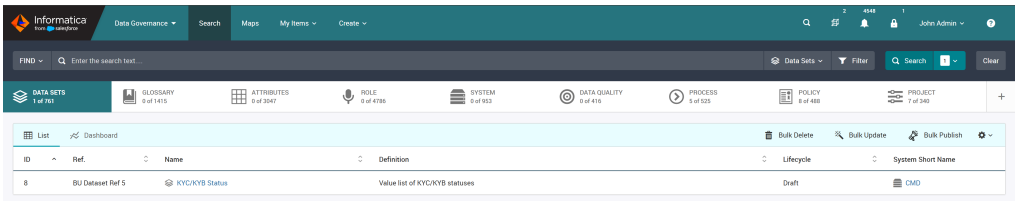

Saving and Sharing Searches

You can save and manage frequent searches to easily recreate a specific search results view. You can choose to share search results with other users so that they can view the same search results. The shared search results vary based on the user permissions.

Before you perform a search, click the **My searches** button to view previous searches. After you perform a search, you cannot view the **My searches** button. To view the **My searches** button again, you need to clear the searches.

The following image shows sample searches that you can save:

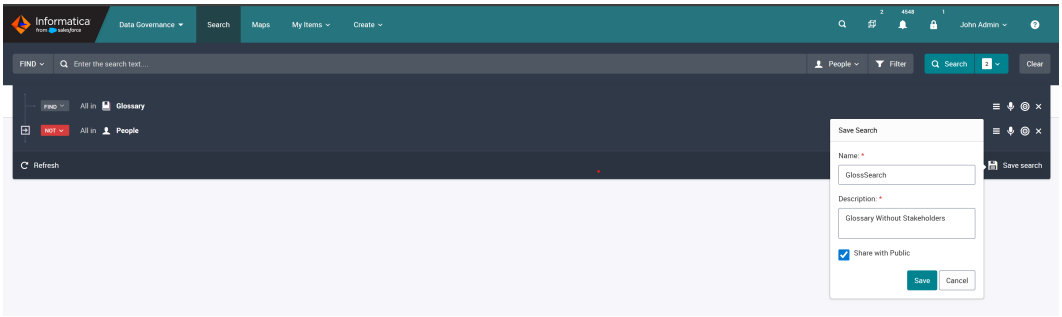

To save searches, perform a Unison search in as many facets as required. Every time you select a logical operator and perform a search, Axon adds the search criteria and displays the search count next to the **Add to search** button. When you perform a new search, Axon displays the latest search criteria in the count drop-down. Click the count drop-down to view and save the list of searches. Provide a name and description, and save the search.

You can share the search with all users, including users who are not logged in. The shared search contains the search criteria and search results. To make it public, choose **Share with public** and save the search. The search is immediately shared with all the users who are logged in.

To manage your saved searches, click **Manage searches** from the **My searches** drop-down.

The following image shows the **My searches** drop-down:

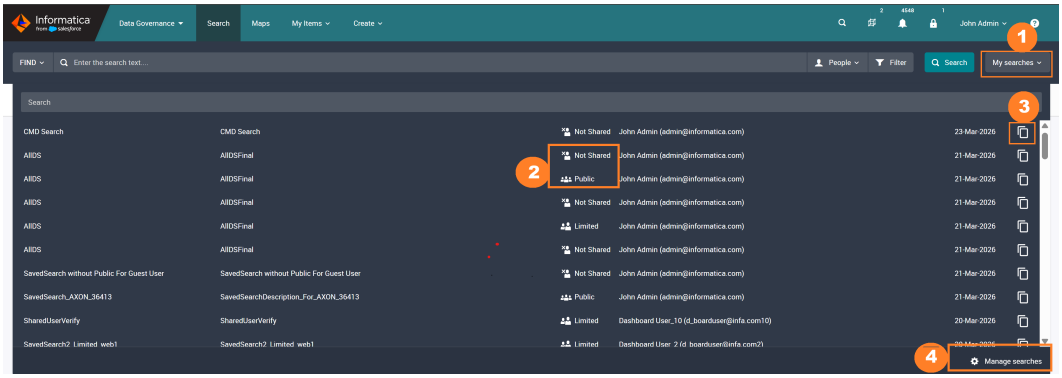

1. My searches drop-down list.
2. Sharing status of saved searches.
3. Copy search link.
4. Access the **Manage Searches** page.

From the **My Searches** drop-down, you can view the sharing status of a search. Use the ( ) icon to copy the search link and share with the users, who are not logged in, through an external application. A user can click the shared link and view the search results based on the user permissions.

On the **Manage Searches** page, you can perform the following tasks to manage a search:

- Update the name of the saved search.
- Update the description of what the search does.
- Delete searches that you no longer require.
- Copy the search link so that you can share it with the users who are not logged in.
- Manage sharing of the search. You can choose to share with public, limited users, or remove sharing.
- Access saved searches that are shared with you. If you run a shared search, the search overrides any active search that you have in Axon.

Saved Searches

You can view all the saved searches from the **Saved Searches** tab. The following image shows the **Saved Searches** tab:

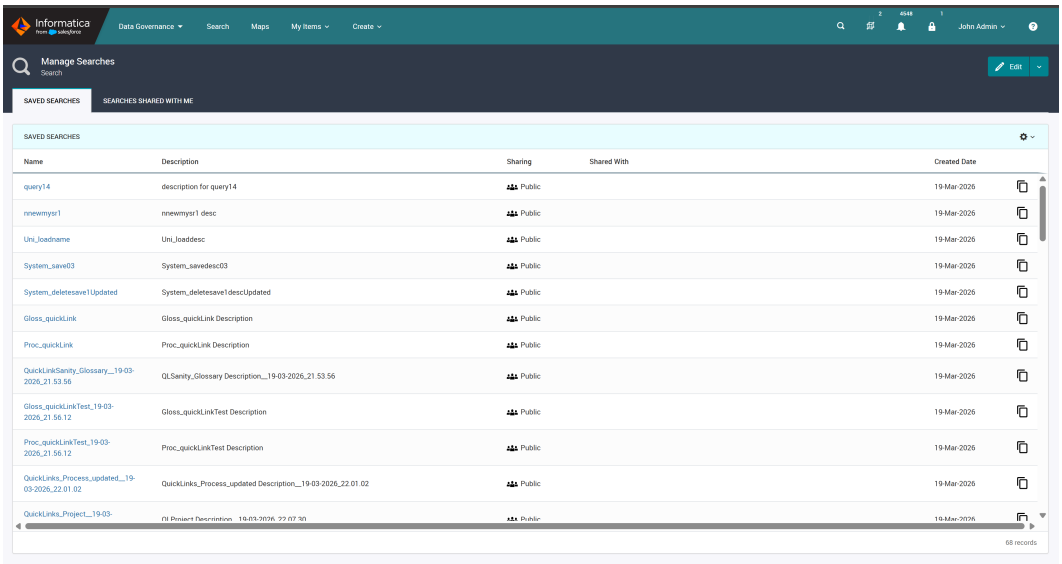

You can view the following search information: Name, Description, Sharing, Shared With, Created Date, and Copy Search Link. The Name column contains a hyperlink to the shared search results. If the sharing status is "Limited," the Shared With column shows the list of users with whom the search is shared. If the sharing status is "Public" or "Not Shared," the Shared With column is empty.

Click the ( ) icon to copy the search hyperlink and share with the users, who are not logged in, via an external application. If the sharing status of a search is "Public," a user can click the shared link and view the search results based on the user permissions.

You can modify the status of a shared search. To modify the sharing status of a search, click **Edit** > **Modify Search**. You can choose one of the following options:

Share with public

Share the search with all users in your organization. Once you make it public, you can copy the search link to share it with the users who are not logged in. The **Sharing** column shows "Public."

Share with selected users

Specify the users with whom you want to share the search. The **Sharing** column shows "Limited."

Stop sharing

Do not share the search with anyone. If you choose this option for an existing public or limited search, the search is removed from the view of all users. The **Sharing** column shows "Not Shared."

When a user clicks a search that is public, Axon displays the shared search results based on the user permissions. When a non-logged-in user clicks a search that is limited or not shared, Axon redirects you to the login page. When a logged-in user clicks a search that is limited or not shared, Axon generates an exception if the user does not have permissions.

In the Edit mode, you can update the name and description of a search. You can also delete a saved search.

Searches Shared With Me

To view a search that is shared with you, click the **Searches Shared With Me** tab. You can modify the sharing of the searches on the **Searches Shared With Me** tab with the SuperAdmin privilege. The search owner gets an email notification when the SuperAdmin modifies the shared search.

The following image shows sample searches that are shared with the SuperAdmin:

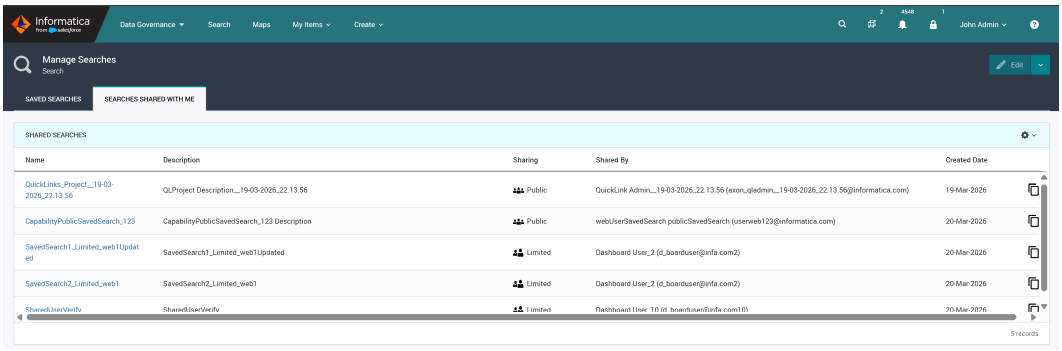

You can view the name, description, sharing status, owner who shared the search, timestamp, and the search link.

The following image shows the Modify Sharing section for the SuperAdmin to modify the sharing of the search:

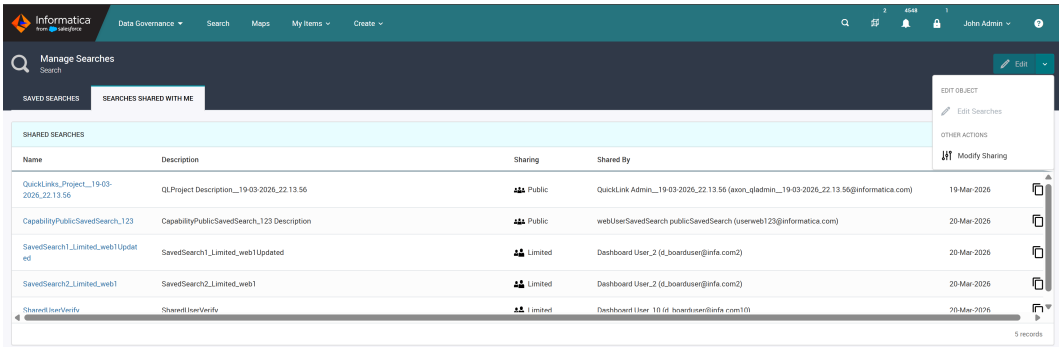

The following image shows the available options for the SuperAdmin within the Modify Sharing options to share the searches with public, selected users, or to stop share altogether:

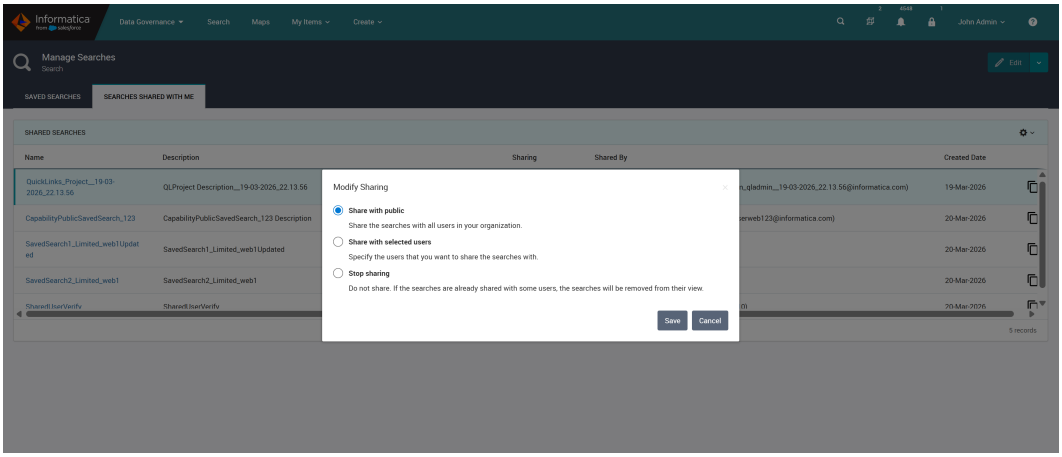

Save as a New Search

To run a search, click the name of a search. When you click the name hyperlink, Axon automatically runs the search. This search overrides any active search that you started in Axon. After you run a saved search for the first time, you can modify the search criteria and save the search as a separate search.

The following image shows options to modify the saved searches:

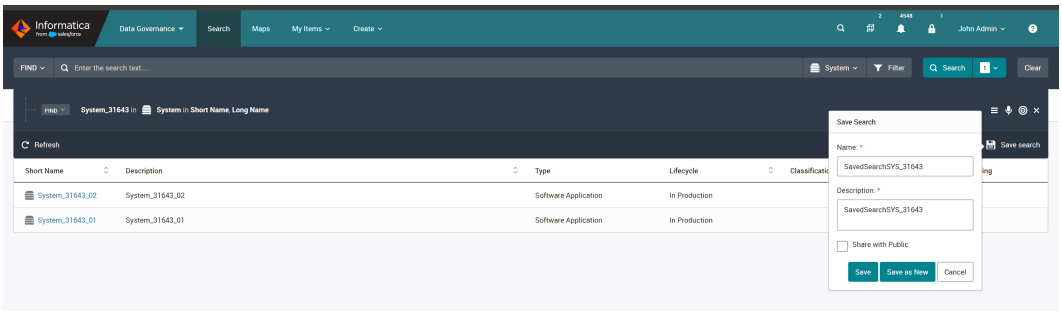

Click the count drop-down next to the **Search** button, edit the search criteria and click **Save search**. In the **Save Search** dialog box, you can edit the properties and click **Save as New**.

Exporting Search Results

You can export Unison search results to PDF, Microsoft Excel, and CSV file formats. From the Unison grid, click the **Settings** icon. Click **Export** and choose the **PDF**, **Excel**, or **CSV** option. To export the stakeholder information of a facet, choose the **PDF (with stakeholders)**, **Excel (with stakeholders)**, or **CSV (with stakeholders)** option.

Note: You can view the Exceptions and Volume fields of Data Quality rules in the Unison grid page. When you export Data Quality rules from the Unison grid page, the exported file contains the Exceptions and Volume field values.

The following image shows the options to export Unison results:

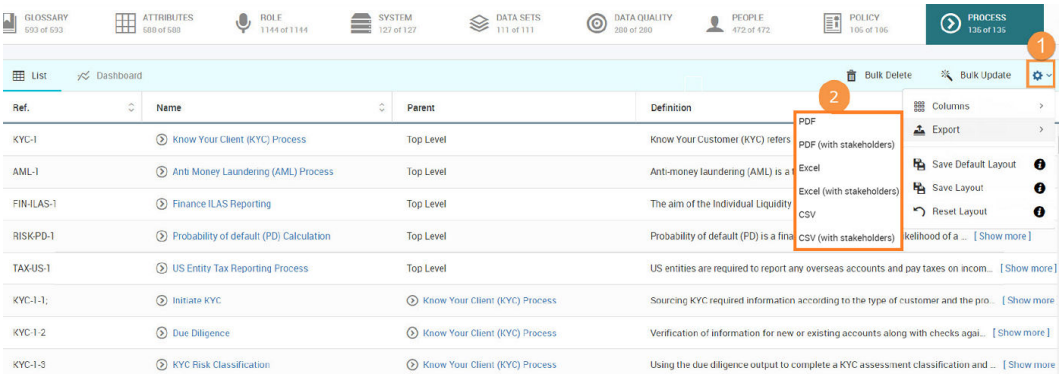

1. The Settings icon
2. The Export options

Note: If you do not see the **Export** option for People objects, the administrator might have disabled export for the People facet. For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.

The exported stakeholder information is in read only format so do not consider it as bulk upload template.

After you export the stakeholder information in CSV or Excel format, select the stakeholder column and apply Wrap Text to view the correct format.

Sort the Objects in a Facet

The objects in a facet are sorted in a specific order based on object IDs, created date, last updated date, or alphabetical order. Users with a SuperAdmin profile can define the sort order of objects that a WebUser or Admin see in Unison. Click the gear icon ( ) and select **Save Default Layout** to save the column as a default layout. When the WebUser or Admin navigates to the facet, Unison displays the default layout set by the SuperAdmin.

For example, if the SuperAdmin sort the objects based on ID as ascending or descending order and clicks **Save Default Layout**, the default column layout appears on the facet for all the users.

The following image shows the options to save the default layout:

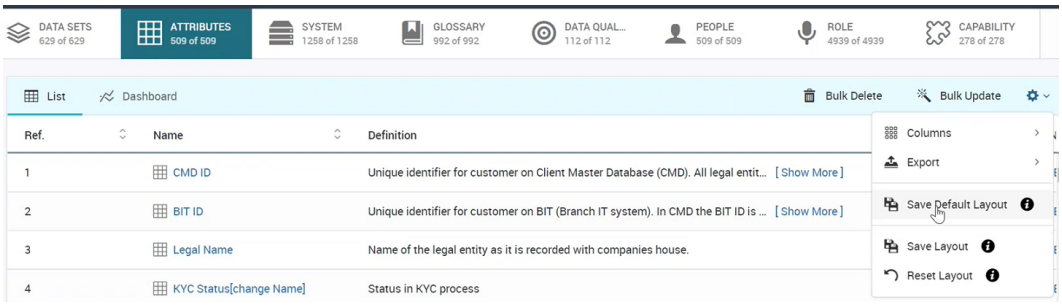

Reset Layout: If the SuperAdmin clicks **Reset Layout**, the sorting order of the object layout is reset to the default layout. This reset option applies only to the logged in user and does not impact other users.

Save Layout: If the SuperAdmin clicks **Save Layout** , the sorting order of the object layout is saved only for the user. This save option applies only to the logged in user and does not impact other users.

Viewing Object Details

Axon displays information about an object in different tabs. You can open an object and click the tabs to view the object properties. The tabs that appear for an object depend on the facet.

Summary

On the **Summary** tab, you can view the summary information of an object.

The following image shows the **Summary** tab of a project:

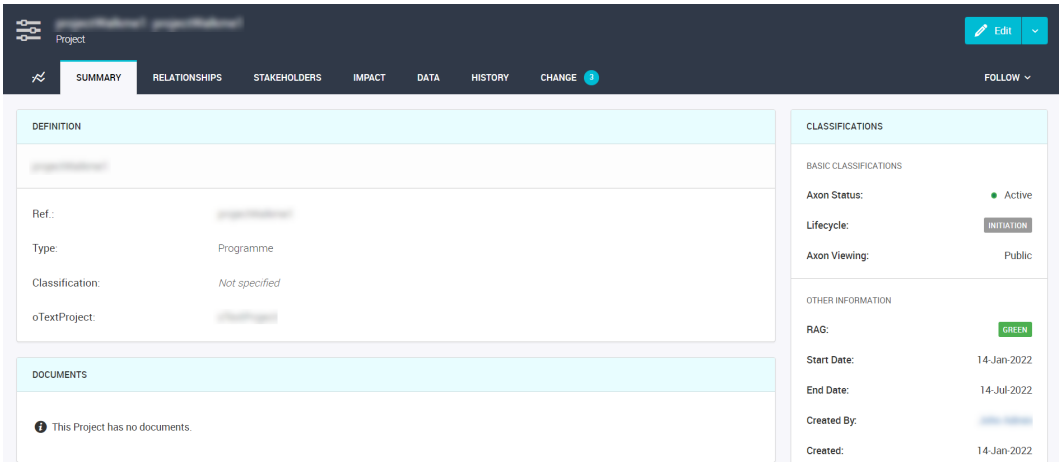

You can view the object summary in the following sections:

Definition

Object description and any key descriptors that support the description.

May contain one or more of the following properties:

- System
- Usage
- Glossary

Classifications

Describes the main classification of the object, for example, Axon Status and Lifecycle.

You can view the name of the user who created the object. You can click the user name to open the user profile page. The field does not appear if the user name is deleted from Axon.

Scorecard

Displays key information on how comprehensive the stewarding of the object is. You can view the scorecard for glossary and data set objects.

Documents

Displays supporting files that a stakeholder uploaded to the object.

If an object belongs to a private segment that you cannot access, you can see that the object is masked on the **Summary** tab.

If you choose to hide fields from the Admin Panel, Axon hides the fields that have empty values from the **Summary** tab of Policy, Process, Data Set, System, and Glossary objects.

Data Content Summary

Displays the **System X Glossary** relationship of the objects for the System facet only. The **Data Content Summary** section display the relationship types and statuses.

The following image shows the **Data Content Summary** section of a system object:

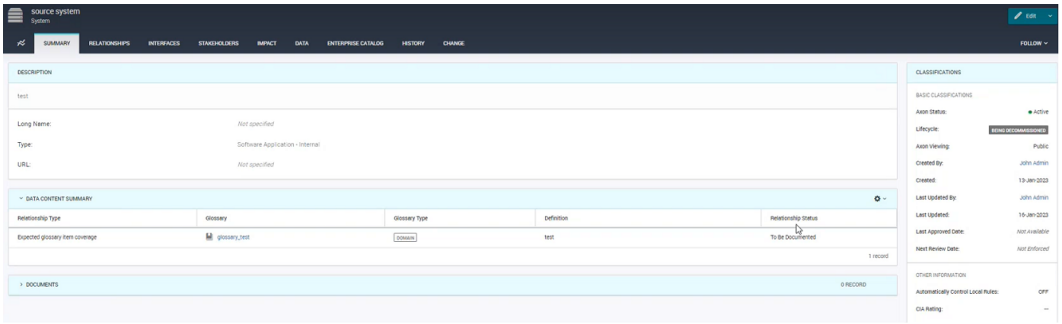

You cannot edit the values of the **Relationship Status** field as they are predefined in Axon. The following predefined values for the **Relationship Status** field are predefined in Axon:

- **Documented**: If glossary is linked to any data set under a system object, the **Relationship Status** field displays the status as 'Documented'.
- **To be Documented**: If glossary is not linked to any data set under a system object, the relationship status appears as 'To be Documented'.
- **Undocumented**: If the glossary is linked to any interface of a system object, the status appears as 'Undocumented'.

Interfaces

On the **Interfaces** tab, you can view information about other systems connected to the current system.

The following image shows the **Interfaces** tab of a system:

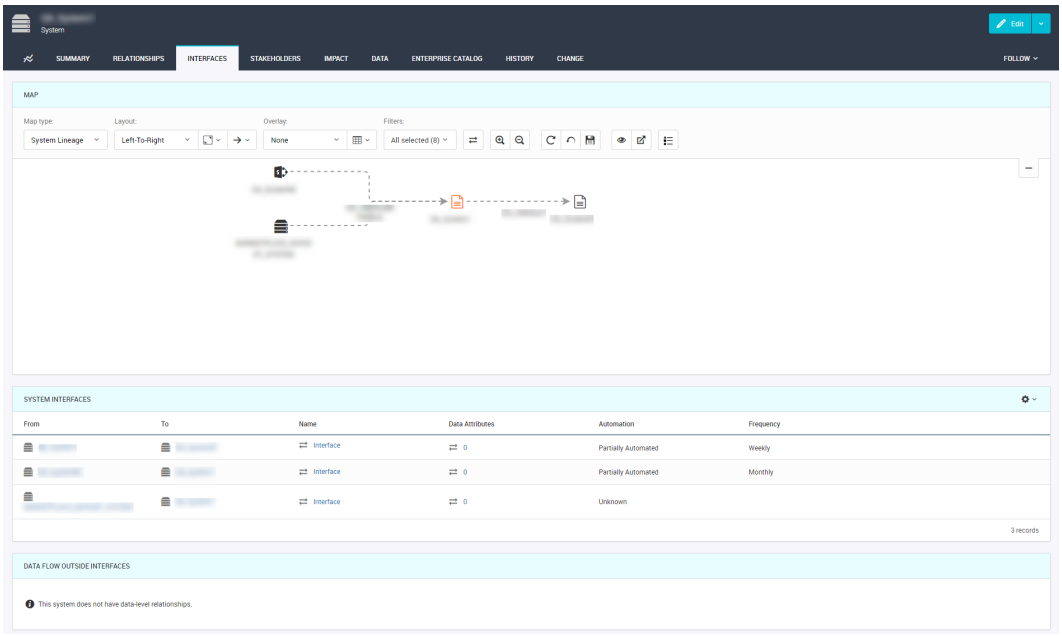

The **Interfaces** tab contains properties in the following sections:

Maps

Displays a visual representation of the relationships between objects across different facets.

System Interfaces

Shows the other systems that are connected to the current system. You can edit a system interface to describe details about which data flows through the interface.

Data Flow Outside The Interfaces

Displays any attribute flow described elsewhere affecting the current system, but which has not been linked to an interface. If you see information in this section, you should explore why this data is not described within an interface, and if required, create a link to an interface.

Attributes

The **Attributes** tab displays information about each attribute that belong to a data set.

The follow image shows the attributes of a data set:

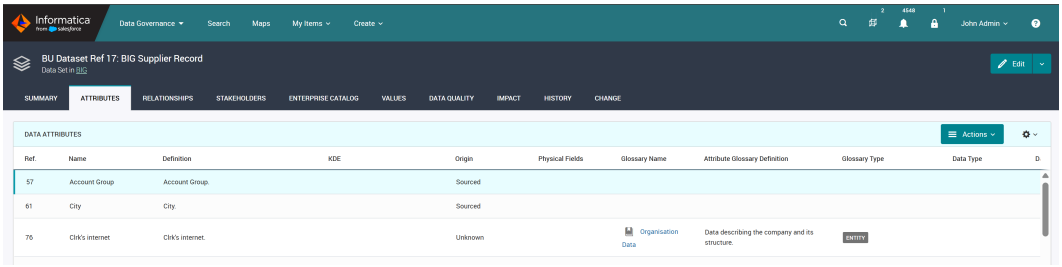

Axon displays the following information by default in the **Structure** section:

Name	Description
KDE	Displays the name of the Glossary objects that have indicated an attribute as a key data element to them.
Name	Name of the attribute as known in the business.
Definition	Definition of the item.
Glossary Name	The glossary that is linked to an attribute. Recommended to facilitate finding data concepts across systems irrespective of their system specific naming.
Glossary Type	The type of glossary. The glossary types include Domain, Subdomain, Metric, and Term.
Origin	Describes the origin of an attribute. You can select one of the following values: Created/Set Here, Sourced, Unknown, or Enterprise Catalog.

Axon displays the following information when you choose to display extra columns from the **Attribute Core** option:

Name	Description
Attribute Glossary Definition	The definition for a glossary that is linked to an attribute.
Business Logic	Optional field to describe the context of the business logic.
Created By	Name of the user who created the object. The name is a link that opens the user profile page. The column appears as an empty field if the user name is deleted from Axon.
Created Date	The date when the object was created.
DB Format	The format of the attribute that is expressed in the following format: `<data_type>(<data_length>)` For example, to specify that the attribute is of the date data type that is 10 characters long, enter the following: `DATE(10)` **Note:** This field is required if you provide a value list for a data set.
Editability	Options: Read Only, Unknown or Editable - Restricted to List / List with Free Text Override / Free Text
Editability Role	Role of the user who can make edits. Permitted values: Admin Only / Most Users / Restricted User Group.
Interface	Populated if the Attribute Link is described via an Interface.
Key	Indicates if the attribute is a primary key in the data set.
Related To	Concatenation of the related Data Set & Attribute
Relationship Type	Describes attribute linking which indicates the nature of the sourcing. You can select one of the following values: - Enforced Lookup. - Unenforced Lookup - Sourced From. The attribute can be sourced from an exact copy of the source, filtered subset of the source, or from a combination of sources.
Requirement	Indicates if the field is mandatory, optional, or conditional when a row is created.
Sourcing Logic	Captures any logic applied to the flow of data. For example, selections or transformations performed.

If you integrate Axon with Enterprise Data Catalog, Axon displays the following information when you choose to display extra columns from the **Attribute Technical** option:

Name	Description
Confidence Score(%)	The percentage of conformance of the attributes onboarded from Enterprise Data Catalog.
Data Length	Technical metadata field. Captures the field length in the underlying database.

Name	Description
Data Type	Technical metadata field. Captures the data type of the attribute in the underlying database as per the SQL92 ISO standard.
DB Field Name	The name of the field in the database that contains the data. Can be an encoded string. For example, `database.table.fieldname`.
Physical Fields	The Enterprise Data Catalog physical field that is linked to the attribute. The **Physical Fields** column shows the names in orange color. You can click the hyperlink on the linked physical field to view the details of the field, such as Primary Key Column, Datatype, Datatype Length, Last Updated, Field Type, Resource, Table, Schema, Data Domains, and Data Domain Groups.
Ref.	A unique reference assigned automatically to each attribute by Axon.
Review Status	The status of the onboarded attributes from Enterprise Data Catalog. You can see the "Accepted" or "Discovered" status.

For more information about attributes that are onboarded from Enterprise Data Catalog, see "View Discovered Objects" on page 213.

Relationships

The **Relationships** tab shows where the object is placed in a hierarchy of related objects. You can view information about how individual attributes in a data set link to other attributes in other data sets and systems. The data flow shows the lineage through the systems of your organization.

On the **Relationships** tab of a glossary, you can view the **Hierarchy** and **Relationships** sub-tabs.

The following image shows the **Hierarchy** sub-tab of a glossary:

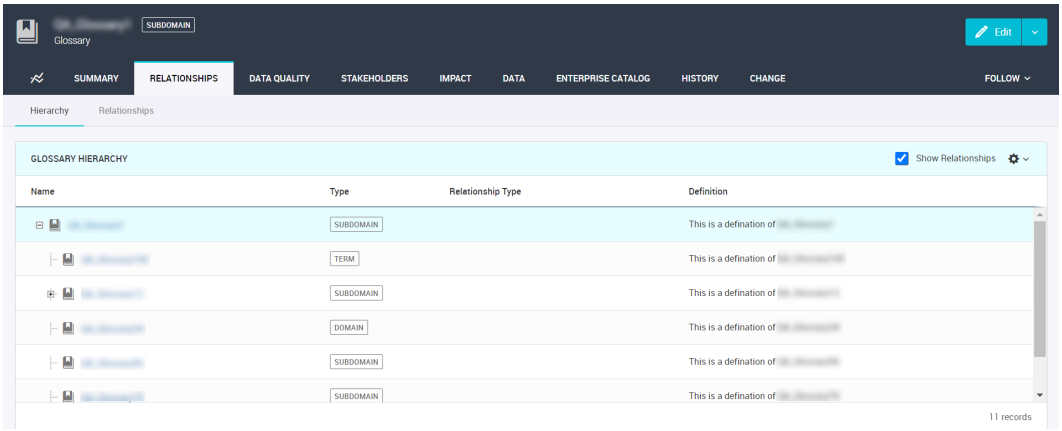

The **Hierarchy** sub-tab provides a single view of all the relationships between glossaries. You can view the hierarchical parent-child relationships for a Glossary object. You can also view the type of relationship between objects. Axon displays the following types of relationships between objects:

- is identified by
- is related to
- is specialism of
- is classified by

- is described by
- is part of
- is made up of

For example, the types of glossary relationships that are mentioned above can include relationships, such as "Customer is part of a Legal Entity" and "Employee is identified by Employee ID." Axon displays these glossary relationships in a dark orange color.

Axon displays all glossary relationships by default. If you do not want to view the relationships listed above, clear **Show Relationships**. Axon sorts the relationships in alphabetically ascending order. To change the sorting order, click the grid header.

The following image shows the **Relationships** sub-tab of a glossary:

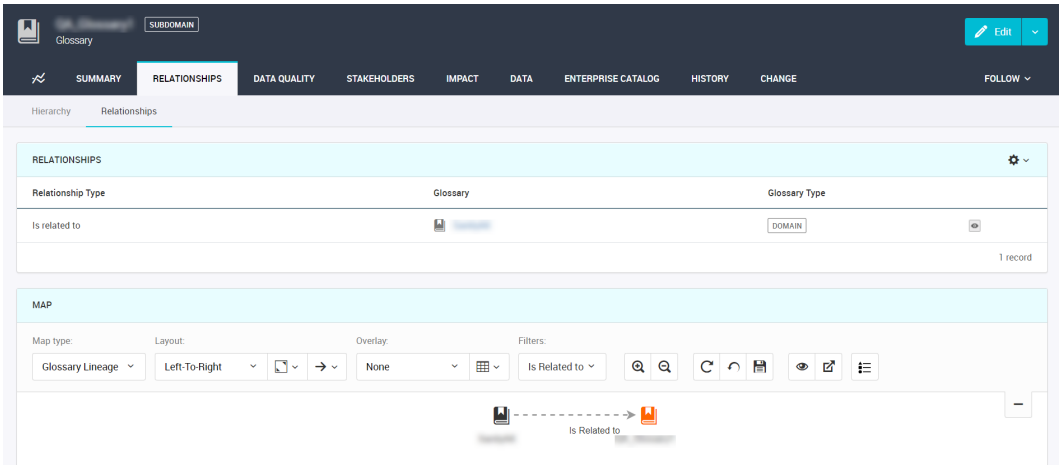

The **Relationships** sub-tab shows the object's relationship with other objects. This sub-tab also displays a visual representation of the object and the relationships with the other objects. The **Relationships** sub-tab does not show the parent-child relationships of an object.

Stakeholders

On the **Stakeholders** tab, you can define the stakeholders of an object. When you assign stakeholders, users know whom to communicate with when they are considering definitions of an object and understanding the effects of changes to an object.

You can add, remove, and set delegates that can act on behalf of stakeholders. If a role assignment is configured the Admin Panel, select the user that is assigned to a role from a predefined list of stakeholders. If a user is not a stakeholder, you cannot set the user as a delegate.

For more information about how to assign a delegate to an object, see "Assign a Delegate to an Object" on page 111.

The following image shows the **Stakeholders** tab of a data set:

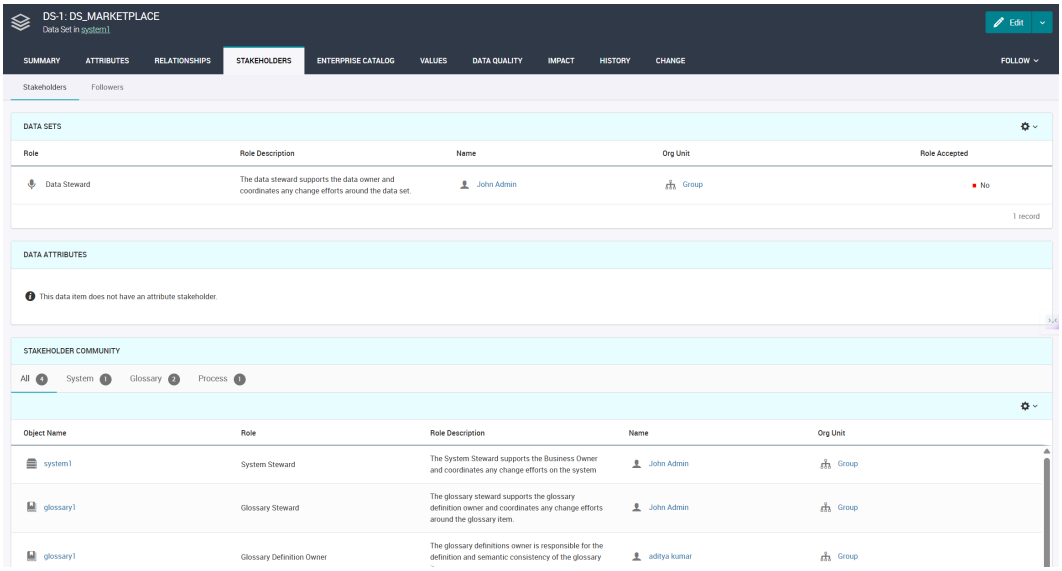

The **Stakeholders** tab of a data set shows the object properties in the following sections:

Data Sets

Displays names of the stakeholders, roles, role descriptions, and the org unit that they belong to. You can also check whether each user has accepted the role.

Data Attributes

Displays roles of the stakeholders at the attribute level. You can assign one owner and one steward to each attribute.

Stakeholder Community

Displays the stakeholder community. If the current active object is connected to any other object in Axon, the stakeholders of those connected items collectively form the stakeholder community.

Axon displays information about users who follow the object in the **Followers** sub-tab. You can see the names of the followers, the organizational unit that they belong to, their function, and the date they began to follow the object.

Values

The **Values** tab shows the values for each attribute that belongs to a data set. You can upload several values for each attribute that you enter in the **Attributes** tab.

The following image shows the **Values** tab of a data set:

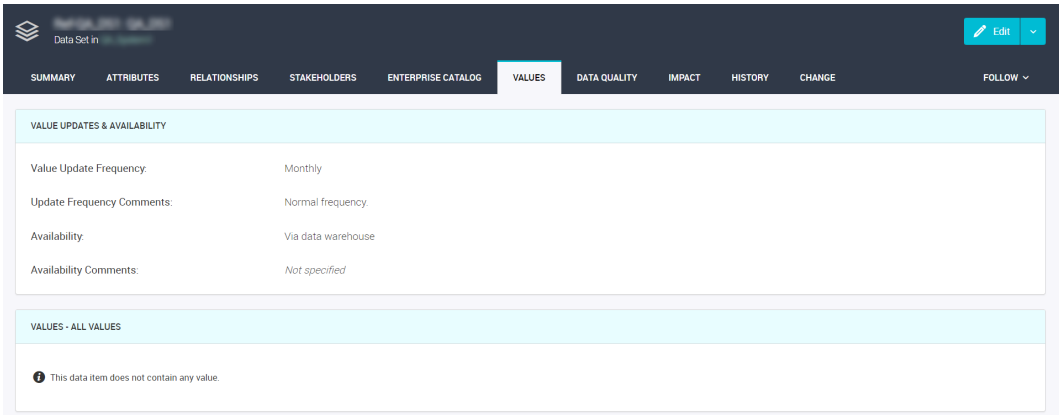

Axon displays the following information in the **Value Updates and Availability** section:

Name	Description
Value Update Frequency	The frequency at which you plan to update the list of values.
Update Frequency Comments	Notes or comments about the frequency at which you plan to update the list of values.
Availability	The method by which you plan to make the list of values available to other applications.
Availability Comments	Notes or comments about the availability of the list of values.

The **Values - Full List** or **Values - Sample Set** section shows the list of values for the Data Set that you have opened. The columns you see depend on the entries that you have made in the **Structure** section of the **Attributes** tab.

To add a new column to the list of values, go to the **Attributes** tab and add the column as a new attribute. After you have added the new attribute entry, select the **Values** tab and click **Edit**. When you download the template file to upload values, you will see the new column that you have added in the **Attributes** tab.

Data Quality

On the **Data Quality** tab of a data set, you can view the **Dashboard** and **Rules** sub-tabs. The **Dashboard** sub-tab shows a dashboard that shows data quality results against the data set. The local Data Quality rules that have attributes are visible in the **Dashboard** sub-tab. The **Rules** sub-tab lists the data quality rules for all attributes in the data set. The local Data Quality rules associated with the data set are visible in the **Rules** sub-tab.

The **Dashboard** sub-tab shows data quality scores from the data quality rules that you have created for the data set. The following image shows the **Dashboard** sub-tab of a data set:

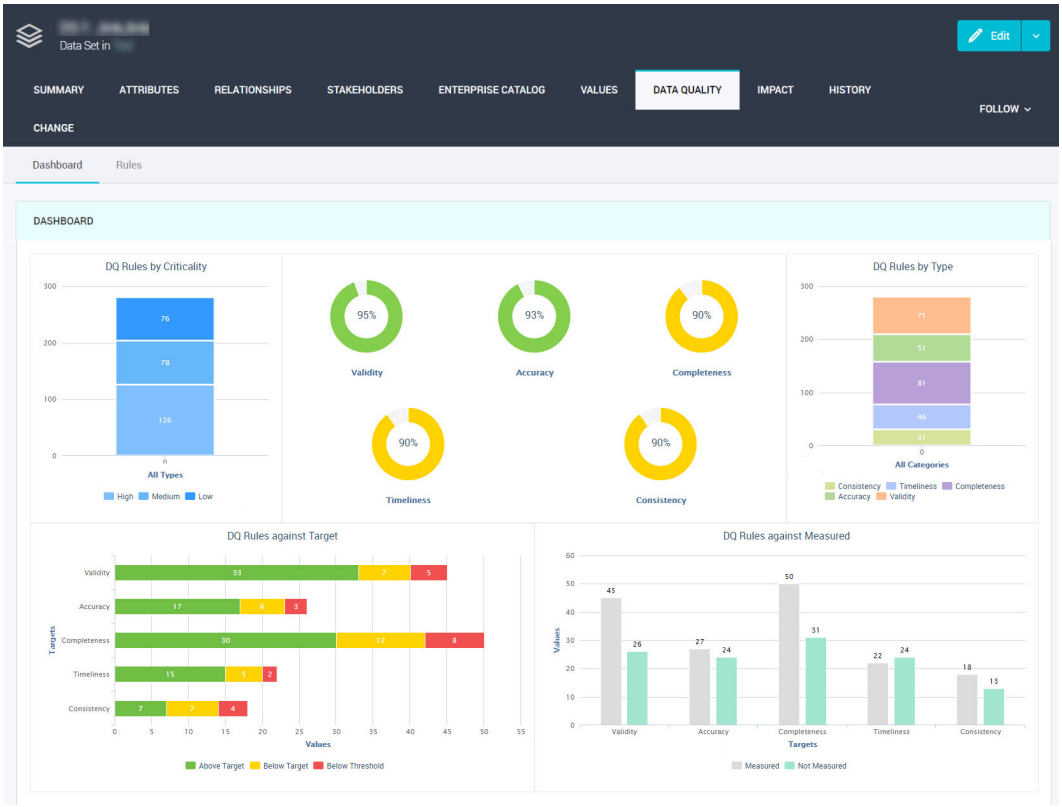

The **Rules** sub-tab shows a list of data quality rules for all attributes in the data set. The following image shows the **Rules** sub-tab of a data set:

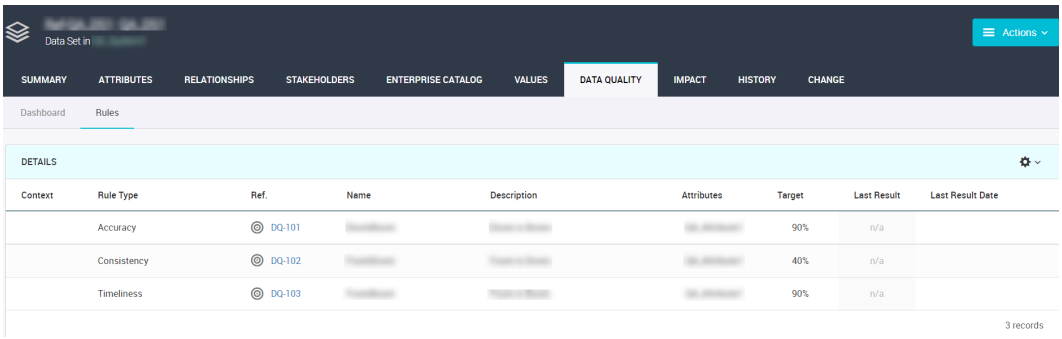

If the attributes within the data set do not contain data quality rules, Axon displays the data quality rules from the upstream data sets in the lineage. Axon checks for the upstream data sets in the lineage till it finds an associated data quality rule for the linked attributes. Axon inherits and displays the first occurrence of all data quality rules from the linked attributes. You can also view the related data set and system information for a data quality rule that is inherited from the upstream data sets.

The local data quality rules created before 7.3.1 without any attributes belong to the segment of the system. The local data quality rules created after 7.3.1 belong to the segment of the dataset.

Enterprise Catalog

On the **Enterprise Catalog** tab, you can view Enterprise Data Catalog information in a system, a data set, or a glossary.

On the **Enterprise Catalog** tab of a system, you can view the **Resources**, **Physical Fields**, and **Data Onboarding Rules** sub-tabs. The following image shows the **Enterprise Catalog** tab of a system:

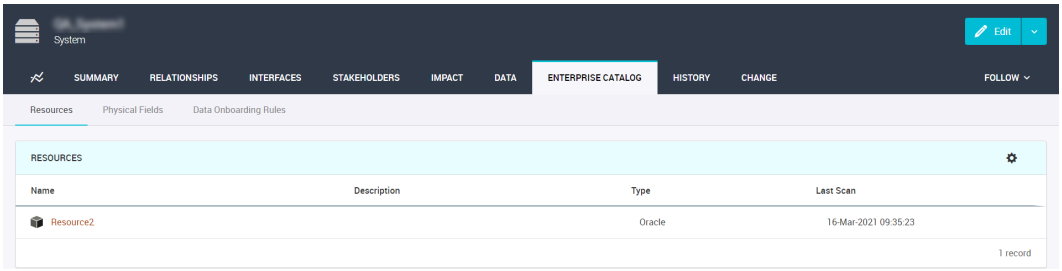

On the **Enterprise Catalog** tab of a data set or a glossary, you can view the **Physical Fields** sub-tab.

For more information about resources, physical fields and data onboarding rules, see "Understanding Terms" on page 221.

Data

The **Data** tab describes the object at a glossary level. Axon displays the data sets that are associated with a glossary or attributes with the appropriate glossary link in separate grids.

The sub-tabs of the **Data** tab vary based on the type of facet. The following image shows the **Data** tab of a system:

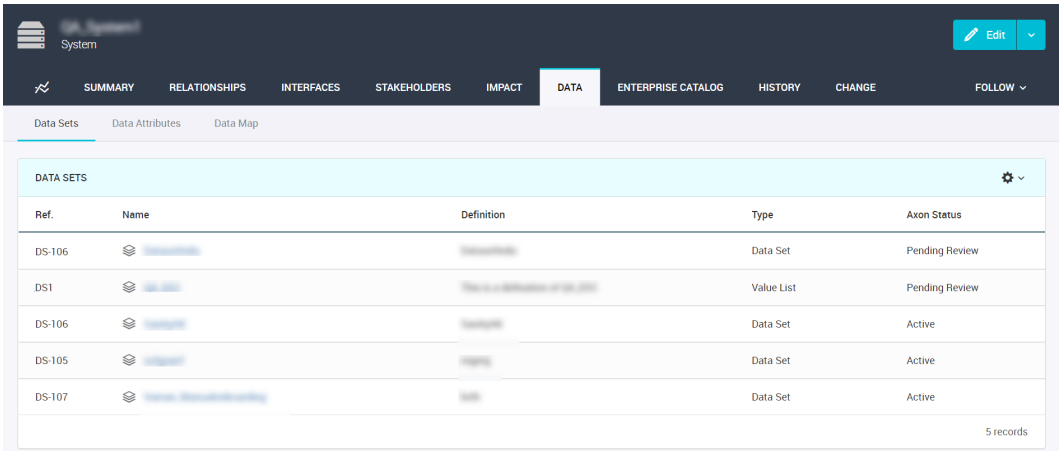

Components

The **Components** tab shows the level of an object in a hierarchy of related objects.

The following image shows the **Components** tab of process:

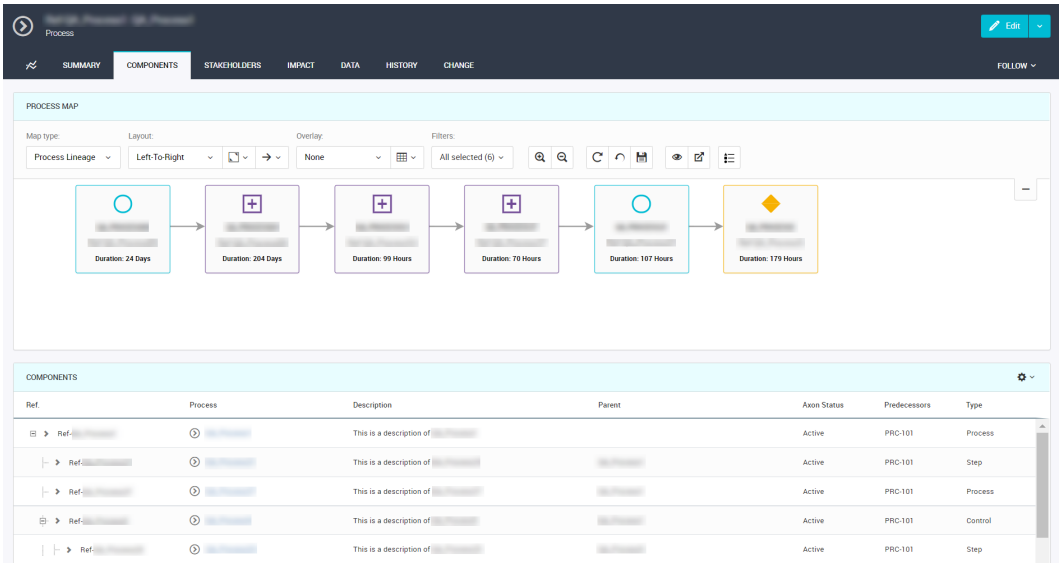

The **Components** tab of a process shows the immediate child objects of the process and the flow between the child processes.

Axon sorts the related objects in alphabetically ascending order. To change the sorting order, click the grid header.

People

The **People** tab shows a list of users that belong to an Org Unit object.

Report

The **Report** tab shows the Data Quality report of an object.

You can view the run status in Unison and in the **Report** tab of the Data Quality Rule page. The run status indicates the status of the Data Quality jobs. If the job fails to run, the status appears as failed. Else, it appears as completed. If a rule fails to run while using the **Run Rule and Retrieve Data** option, Axon sends an email notification to the rule's stakeholders. The alert includes the name of the failed rule and a direct link to its details page for immediate troubleshooting.

Note: While fetching reports using profile and scorecards and if the run job fails, Axon fetches the previous successful results with the status as failed.

Regulations

The **Regulations** tab shows a list of regulations that a regulatory theme classifies.

Impact

A key part of Axon is to explain the context of an object. The **Impact** tab of an object shows the connection of the object across many other facets.

History

The **History** tab shows a record of all edits that have been made to an object. This shows what was changed, when and by whom. Axon does not delete the history, so there is a full history of the object allowing full traceability.

Change

The **Change** tab displays the change requests and the custom workflows that are associated with an object.

On the **Change** tab of an object, you can view the **Change Requests** and **Workflow** sub-tabs.

You can use Axon to communicate about changes that you want to make to objects using change requests. A change request can also be used to notify stakeholders of missing information. Any user who has logged in can create a change request. The following image shows the **Change Requests** sub-tab of a project:

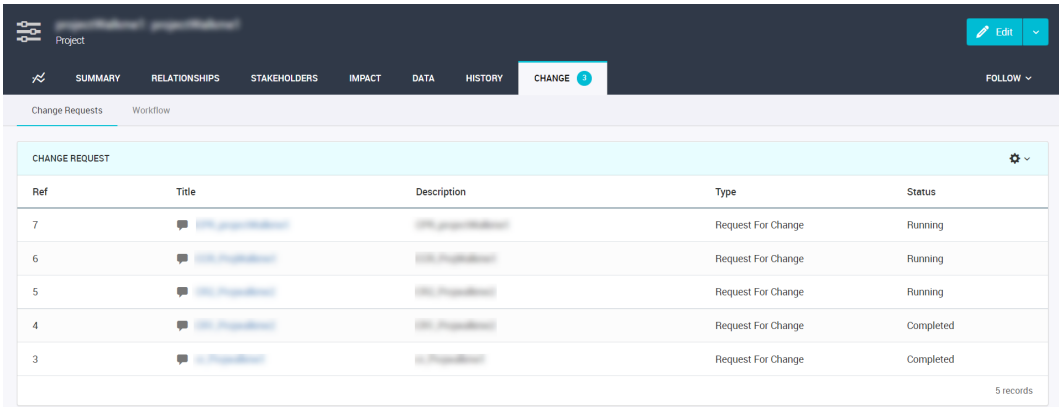

Axon creates a workflow based on the change request. Stakeholders review the workflow and act on it. The following image shows the **Workflow** sub-tab of a project:

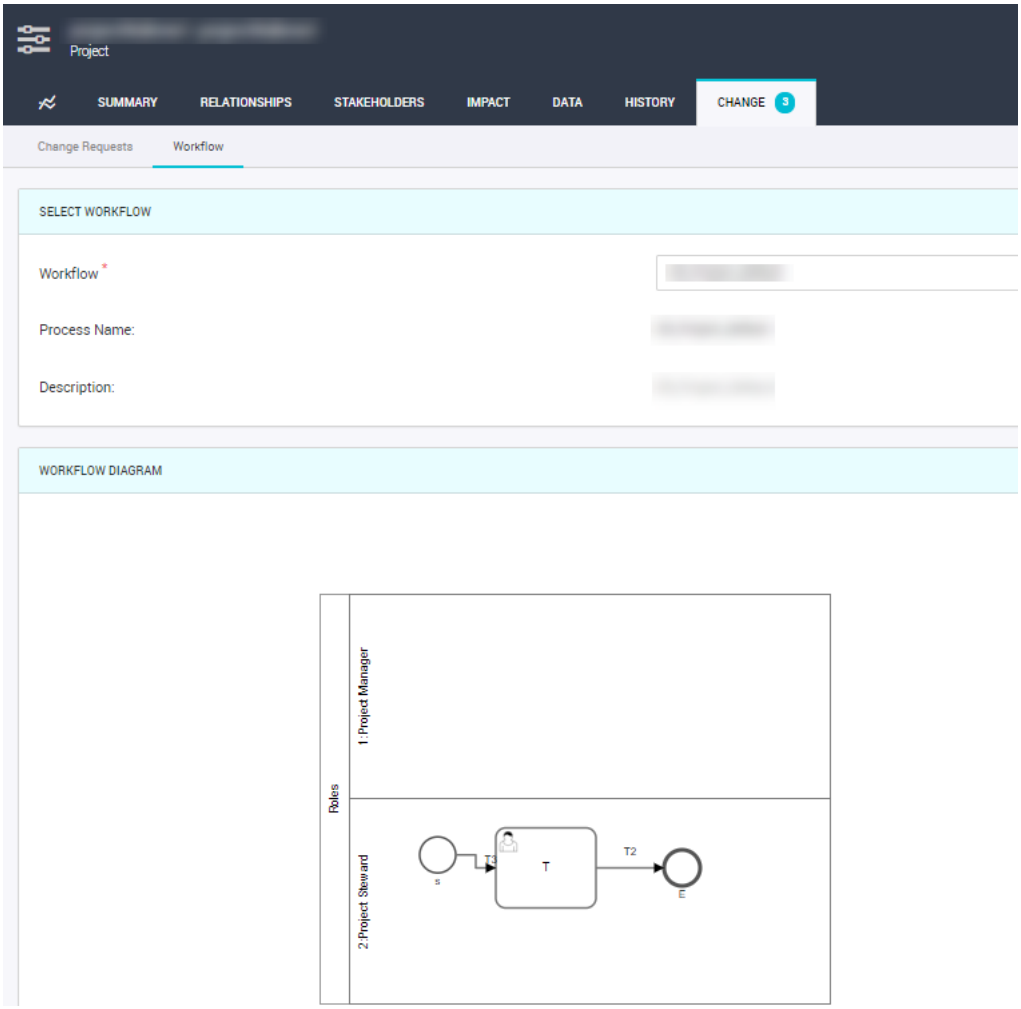

Viewing People Objects

You can view and edit your own account details after you log in to Axon. A SuperAdmin user can edit the details of all users. View the personal details, management information, roles and responsibilities, objects that you follow, activities, and change requests.

About Me

You can view a summary of the user profile. The **About Me** tab contains the following sections:

- Axon Details. Displays the email address, Axon status, type of profile, lifecycle, and the recent date when the user logged in.
- Personal Details. Displays personal details of the user, such as name, organizational unit, function, and telephone number.
- Team Summary. Displays a summary of line managers, direct and total reports, and assistants.

Team

Describes the details of the team that a user belongs to. The Team tab has the following sections:

- Management. Displays the details of the managers that the user reports to.
- Peers. Displays the other people report to the same line managers. You cannot edit the Peers section.
- Reports. Displays who all reports to the user.

Responsibilities

Describes the roles and responsibilities of the user. A user can have multiple roles across different facets. You can view the total roles, roles per facet, and accept the roles in bulk.

Following

Shows all the items that you follow. If you are interested in any item and you want to be notified of the updates, you can choose to follow the item.

Activity Stream

Provides a record of changes to the items that you follow. Whenever a change is made to an item that you follow, you receive notifications via email. You can configure the frequency of the notification emails. If you do not set the notification email frequency, Axon utilizes the default notification frequency configured by the SuperAdmin user. View the date filters that you applied to receive notifications for a certain time period. The **Activity Stream** section provides a complete list of details as to what has changed.

Change Request

Displays the list of change requests in the user's name, and the current status of the requests.

The following items appear on the page:

- Change requests that you have raised
- Change requests that other users have raised and assigned to you
- Workflow tasks where you must provide your inputs about an object

You can select multiple items from a list and click on an action button to provide inputs about several objects.

For example, in the **Workflow Tasks** section, select multiple tasks, and click **Complete Task** to provide your inputs on several tasks for the workflows in which you are a stakeholder. The following image shows the **Complete Workflow Tasks** dialog box when you select four tasks and click the **Complete Task** button:

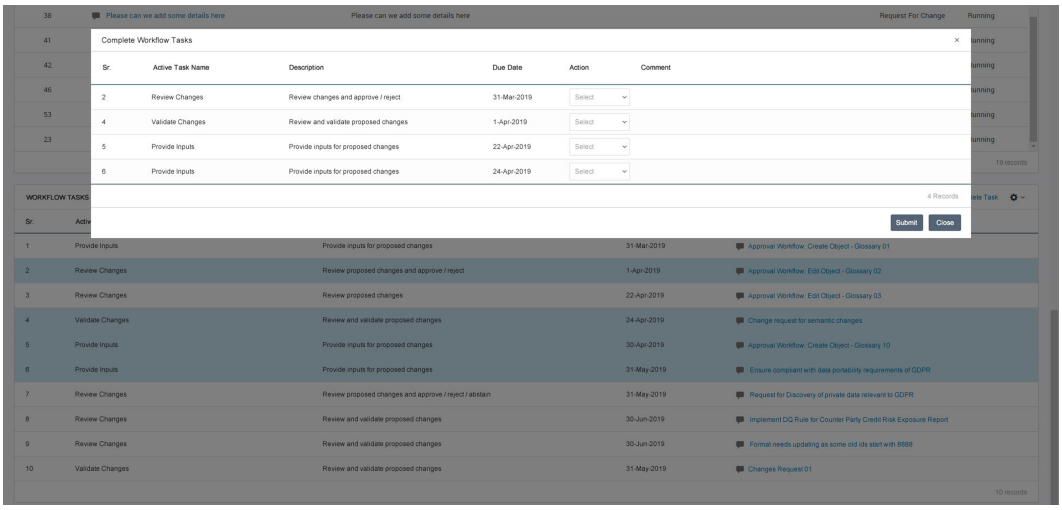

Assigned Segments

View the segments that are assigned to you. You can also view the segments for which you are a Segment Admin.

Viewing Glossary Hierarchy

In the **Glossary** facet on Unison search, you can view the hierarchy for a single object or all objects.

To view the hierarchy for all Glossary objects, click the Expand (›) icon next to the **Name** column of the grid.

The view the hierarchy for a single glossary, click the Expand (›) icon next to the Glossary object. You can view the complete preceding hierarchy till the Glossary object.

The following image shows the expanded hierarchy for all glossaries:

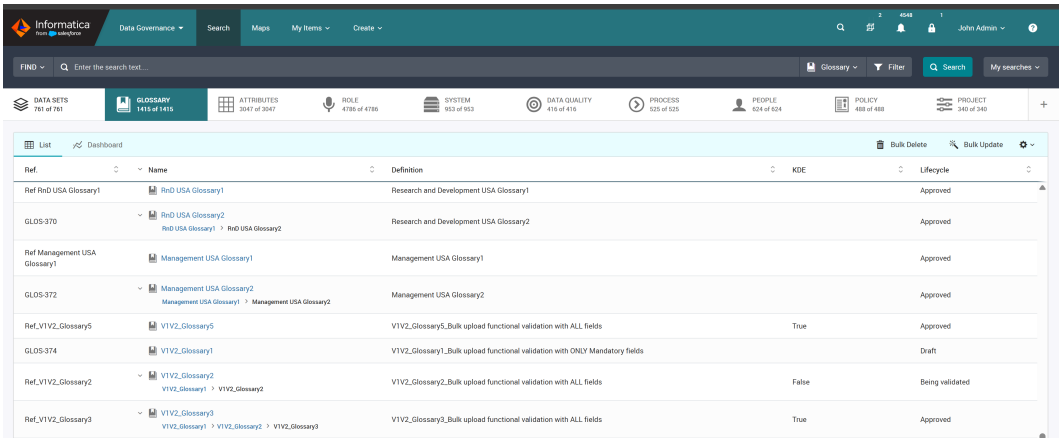

Note: When you export glossaries, the exported file contains the **Hierarchy** column only if you choose to view the hierarchy for all Glossary objects.

Viewing My Items

The **My Items** menu allows you to see personalised information on how you have used Axon.

You can perform the following tasks from the **My Items** menu:

- View objects you have visited recently. If the objects belong to a segment that you cannot access, you cannot see the objects in the recently visited objects list.
- View objects you are following.
- View objects in which you have a Stakeholder role.

Axon displays the following tabs in the **My Items** menu:

- Recent
- Following
- Roles

You can search for objects that Axon displays in any of these tabs. You can narrow down your search by object type.

Following Objects

You can follow an object to get notified when changes are made to the object. As a follower, you are not a direct stakeholder, and you are not included in workflows and change requests. You can be part of a workflow or change request by becoming a part of the discussion.

In the **Activity Stream** tab of your **My Account** page, Axon displays updates about the objects that you follow. If you have set a frequency for activity emails, Axon sends email updates about the object that you are following. If you have not set a frequency for activity emails, Axon will utilize the default value that the SuperAdmin configures for the entire organization.

Open an object and click **Follow** in the top right hand corner to follow the object. When you click **Follow**, your name appears in the **Following** sub-tab of the page.

Viewing Notifications

You can view notifications in Axon or receive emails at a regular intervals.

Notifications in Axon

Axon displays notifications in the notification center after you log in. The notification center displays the number of unread notifications on the toolbar. Click the bell icon ( ) on the toolbar to view both new and earlier notifications. The notification center displays information on the **Catalog**, **Roles**, **Workflow**, and **Bulk Upload** tabs.

The following types of notifications appear in the notification center:

Catalog

Axon displays notifications on discovered data sets and attributes, recommendations on attribute relationships, creation of attribute relationships, and removal of deleted links. For example, if data sets and attributes are discovered, the notification contains a link to the related glossary. You can click the glossary name to navigate to the glossary object and view the discovered objects.

For attribute relationship recommendations, Axon sends notifications to the data set stakeholders only with the Stewardship Role type.

To dismiss a single notification, click the **x** button next to the notification. To clear all notifications, click **Clear All**.

Roles

You see a notification for all the objects for which you have been assigned a stakeholder role. Click the role title to open the object. You can then click **Yes** or **No** to accept or reject the role assignment. You cannot dismiss notifications in the **Roles** tab.

To accept all roles and clear notifications, click **Accept and Clear All**.

To view all roles and responsibilities tab for a user, click **All Roles**.

Workflow

Axon displays a notification when someone raises a change request for an object where you are a stakeholder. You can open the object or the change request from the notification. If the Data Marketplace option is enabled, you can view the Data Marketplace notifications.

To dismiss a single notification, click the **x** button next to the notification. To clear all notifications, click **Clear All**.

Bulk Upload

You can see the status of bulk upload tasks.

To dismiss a single notification, click the **x** button next to the notification. To clear all notifications, click **Clear All**.

To view all jobs for a user, click **All Jobs**.

Enabling and Disabling Notifications

To stop receiving in-product alerts, you can disable application notifications. The setting controls the notification bell icon and the unread count.

To manage the application notifications setting, go to the **Activity Stream** tab of the **My Account** page. From the **Application Notification** list, select `Enable` or `Disable`. Default is enabled.

Axon saves notifications that arrive during the disabled state and displays the notifications after you enable notifications again.

Notifications via Email

You can choose to receive email notifications if Axon is configured to work with the email system of your organization. You can receive either automated emails based on specific events or on a regular basis. Axon sends instant email notifications to stakeholders when a data quality score for a data quality rule goes down.

You can choose to receive regular emails that inform what is happening in your Axon account. To manage the emails, open the object in the People facet and go to the **Activity Stream** tab. The default value of the **Notification Frequency** field is `Not specified`.

A SuperAdmin user can configure Axon to send email notifications whenever a task is assigned to the users. A SuperAdmin user can also configure the default notification frequency for all the users in the organization. The notification frequency that you specify takes precedence over the default value configured by the SuperAdmin.

Axon displays the following information in the notification emails:

- Updates about removal of links from Enterprise Data Catalog.
- Role acceptances that await approval.
- Pending workflow actions. Includes discussions that you are part of and you have not yet contributed to.
- A summary of changes that a user has made to an object where you are either the stakeholder or a follower. If you are part of a change request where you have been assigned a role, the content of the notification email can vary based on whether the role is included in the underlying workflow.
- If another Axon user shares a search with you, you are automatically informed of the shared search by email.

Managing Locks

You can lock an object to prevent other users from editing the object. You can manage locks from the toolbar.

If there is a lock on an object, Axon displays an orange padlock icon beside the **Edit** button. Hovering over this padlock will trigger a message with the name of the user who locked the object. An edit lock prevents more than one user from editing an object concurrently. This lock does not persist after the user has saved and closed the object. The user who applied the edit lock or an administrator can remove this type of lock.

Viewing Object Dashboards

View a dashboard for each object within a facet. Use the information in the dashboard to get a visual representation about the data quality rules, processes, roles, change requests, and data privacy in Axon.

You can view object dashboard results for the following areas:

- Data Quality
- Process
- Role
- Change Requests
- Data Privacy

Each view has a default predefined view and shows data if the required information is available. You can use filters to change the views. Click the legends on each of the charts to change the display. After each change, Axon revises and reloads the dashboard.

You can view the Data Privacy option only for System and Policy objects.

Data Quality View

Open the **Dashboard** tab of an object to view data quality scores from the data quality rules that you have created.

The following image shows the **Dashboard** page:

1. Axon displays the overall score for each data quality rule type. The default data quality rule types are completeness, accuracy, consistency, validity, and timeliness. Displays scores based on the arithmetic average of the rules in the scope of your Unison search. Takes into consideration the most recently uploaded score for each rule, or the most recently measured value in Informatica Data Quality. Determines the chart color based on the average value of the respective thresholds.
2. The number of rules by type. Filter scores based on types that you want to exclude.
3. The number of rules by criticality. Filter scores based on the criticality that you want to exclude.
4. The number of rules by target. Filter the scores based on the target threshold results.
5. The number of data quality rules that are measured and not measured.

Axon displays the following sections in the dashboard:

Data Quality Rules by Criticality

Displays the results of the data quality rules by criticality. Click any of the colors in the legend below the graph to remove the rules that have the threshold value that you want to hide. For example, if you click the amber color to hide all the data quality rules that have a low criticality, Axon redraws the dashboard to display the scores based on the data quality rules that have medium and high criticality.

Hover your mouse over the graph to see the breakdown of rules that meet the criticality criteria.

Data Quality Rules by Type

Displays the number of data quality rules based on the rule type. You can view information about the following rule types:

- Accuracy
- Timeliness
- Completeness
- Validity
- Consistency

Hover your mouse over the graph to see a breakdown of the rules by data quality rule type. Click a color in the legend below the graph to remove a rule type from the score chart. Axon redraws the dashboard to display the scores based on the remaining rule types.

Data Quality Rules Against Target

Displays the number of rules for each rule type by target threshold values and represents the threshold results by color. Axon uses the following criteria to displays the colors:

1. Above target - displayed in green color.
2. Below threshold - displayed in amber color.
3. Below threshold - displayed in red color.

Hover your mouse over any of the rule types to see the number of rules that meet the measured threshold values.

Data Quality Rules Against Measured

Displays the count of the data quality rules that are measured or not measured against the default data quality rule types that are available in Axon. The orange bars display the total number of data quality rules for a particular rule type measured. The blue bars display the total number of data quality rules for a particular rule type that are not measured. Hover your mouse over the graph to see a breakdown of the data quality rules that are measured and not measured.

Process View

To view a dashboard of the process status for an object, go to the **Process** view.

Axon displays the status of a process in the following sections:

Type

Displays a pie chart of the process based on the type. Displays whether it is a control, process, or step-type process. Click a color in the legend to exclude a process type.

Lifecycle

Displays a pie chart of the process based on the lifecycle. Displays whether the process is in draft, production, or obsolete. Click a color in the legend to exclude a specific stage in the process lifecycle.

Status

Displays a pie chart of the process based on the Axon Status. Axon Status can have Active, Obsolete, Pending Review, Inactive, and Deleted values. Click a color in the legend to exclude a status.

Role View

To view a dashboard of the roles for an object, go to the **Role** view.

Axon displays the roles information in the following sections:

Role Type

Displays a pie chart of roles based on the type. The role type includes knowledge, stewardship, ownership, and authority. Hover your mouse over the graph to see a breakdown by the role type. Click a color in the legend below the graph to exclude a role type.

Object Type

Displays the type of object in which you are viewing the assigned roles. For example, if you are viewing the **Role** dashboard in a Glossary object, the object type is Glossary.

Role Accepted

Displays a pie chart that specifies whether the roles are accepted for the object. The values include "Yes" and "No."

Change Requests View

To view a dashboard of the change requests for an object, go to the **Change Requests** view.

Axon displays the change requests information in the following sections:

Object Type

Displays the type of object in which you are viewing the raised change requests. For example, if you are viewing the **Change Requests** dashboard in a System object, the object type is System.

By Created Date

Displays a graph of the change requests created over a period of time. You can view the change requests that are created over the previous years, current year, current quarter, and current month. Click the colors in the legend below the graph to exclude different periods of time.

By Updated Date

Displays a graph of the change request updated over a period of time. You can view the change requests that are updated over the previous years, current year, current quarter, and current month. Click the colors in the legend below the graph to exclude different periods of time.

Viewing Data Privacy Metrics

If you have access to Data Privacy Management, you can view the data privacy metrics extracted from Data Privacy Management in the System and Policy facets of Axon. The data privacy metrics helps you determine whether your organization is compliant with statutory regulations, such as General Data Protection Regulation (GDPR) policy.

Axon displays data privacy metrics, such as risk score, risk cost, protection status, and sensitivity levels, sourced from Data Privacy Management on the Data Privacy dashboard. For example, you want to review if the current status of data privacy supports GDPR compliance. You can view the Data Privacy dashboard to identify the amount of sensitive data that is protected, risk costs, and the policy violations. Based on the current aggregate state of the privacy metrics, you can take necessary actions to identify and protect sensitive data.

In Data Privacy Management, data privacy metrics are measured for a data store. A data store is a repository object that connects to the data source that you want to analyze. You add data stores to scan jobs. The scan job connects to and identifies sensitive data in the data source.

You can link a security or classification policy from Data Privacy Management to an Axon policy. A security policy is a rule-based policy designed to detect violations. A security policy contains the severity level of a violation and a rule that defines the violation. Classification policies cater to specific data security standards, such as PCI, PHI, PII, that are available by default. A classification policy defines the rules that Data Privacy Management uses to identify sensitive data and classify a data store based on industry or organization data security standards.

Axon displays the following data privacy metrics for system and classification policies:

- Risk score
- Risk cost
- Protection status
- Sensitivity levels

Axon displays the following data privacy metrics for security policies:

- Policy violations
- Severity level

The following image shows a sample data privacy dashboard for a system:

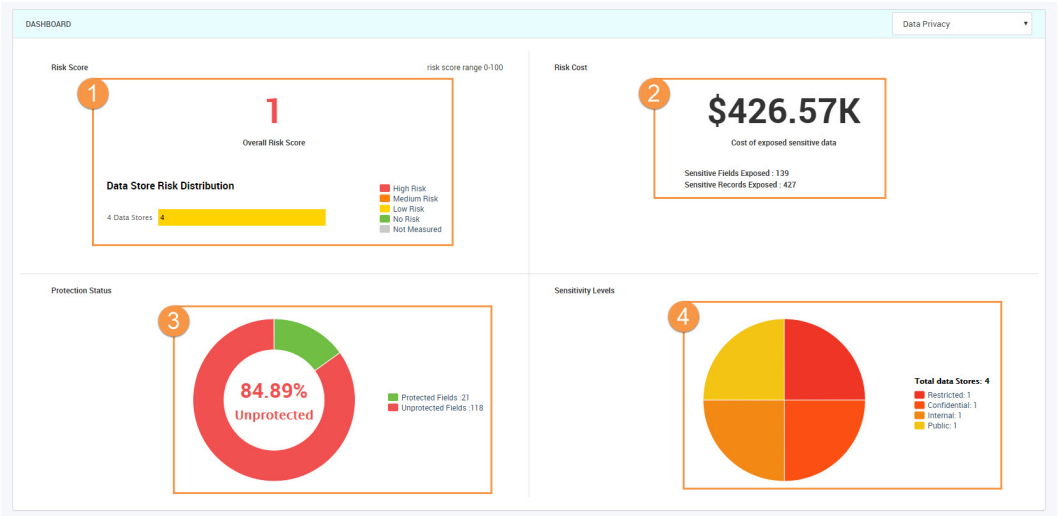

1. The overall risk score for the scanned data stores that are associated to a system. Axon displays a distribution chart with the total number of data stores and the level of risk based on the different color codes.
2. The total cost of exposed sensitive data. View the number of sensitive fields and records that are exposed.
3. The percentage of unprotected data. View the number of protected and unprotected sensitive fields.
4. The sensitivity levels of data in the data stores.

Risk Score

Displays a number that summarizes the overall risk score of the scanned data stores that are associated to a system or classification policy. The higher the number, the greater the risk to sensitive data. The risk score value ranges from 0-100. View the total number of data stores that are at risk along with data store

distribution chart based on the severity level of the risk. The data store risk chart shows the distribution of risk based on the following levels:

- High Risk
- Medium Risk
- Low Risk
- No Risk
- Not Measured

Risk Cost

Displays the cost that the business might incur if the sensitive data in the data store is exposed. The data risk cost of a data store is the product of the cost for each occurrence of sensitive data and the number of records of sensitive data. You can view the following details:

- The number of sensitive fields that are exposed. The Sensitive Fields Exposed value includes both sensitive files count and sensitive fields count from Data Privacy Management.
- The number of sensitive records that are exposed. The Sensitive Records Exposed value indicates the policy impressions from Data Privacy Management.

Protection Status

Displays the percentage of unprotected sensitive data in the data store that is associated with a system or classification policy. A field is protected if a PowerCenter mapping includes a data masking transformation for the column. The Protection Status indicator shows the number of sensitive fields that are protected and unprotected.

Sensitivity Levels

The level of data sensitivity of a data store that is associated to a system or classification policy. You can view the following default sensitivity levels:

- Public
- Internal
- Confidential
- Restricted

The sensitivity level for a system contains a pie chart that includes distribution of data stores based on the sensitivity level. You can also view the total number of data stores.

The sensitivity level for a classification policy shows only one sensitivity level. If a data store matches a classification policy, the scan job in Data Privacy Management updates the data store with the sensitivity level of the classification policy. When you click on the Data Privacy Management link to view the sensitivity level, you might find a different sensitivity level for the classification policy because Axon displays the aggregate sensitivity value at the data store level.

Policy Violations

Displays the total number of violations that Data Privacy Management detected for a security policy associated with an Axon business policy. Axon displays the total number of violations measured over the last 30 days. You can see the aggregate number of data stores associated with the violations for the security policy. You can also view the number of violations in each data store.

A security policy violation occurs when one or more properties in an anomaly, data store, or user activity event match the rule specified in a security policy. The count only includes the data stores to which you have access. To view more details about the security policy in Data Privacy Management, you can click the link that displays the associated security policy name on the dashboard.

The following image shows a sample data privacy dashboard for an Axon policy that is associated with a security policy:

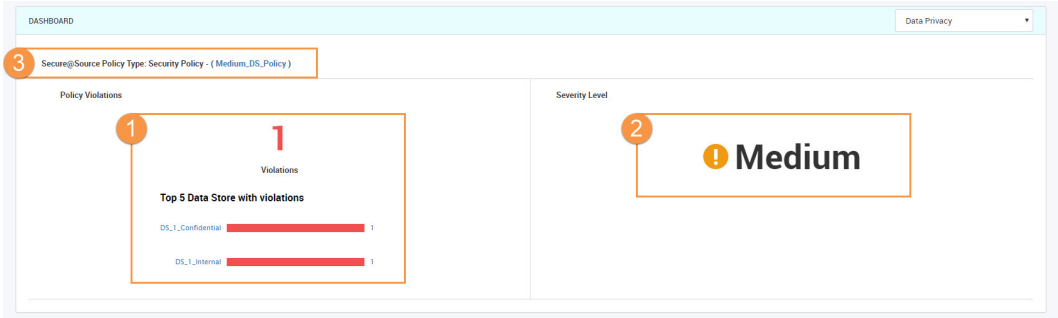

1. The total number of security policy violations. Axon lists the top five data stores with the corresponding number of violations.
2. The severity level of the policy violation.
3. The Data Privacy Management link to the associated security policy.

Severity Level

Displays the severity level of violation of a security policy that is associated with the Axon policy. A violation can only have one severity level. The severity level can have one of the following values:

- Critical
- High
- Medium
- Low
- Informational

Viewing Data Privacy Dashboard

You can view the data privacy metrics extracted from Data Privacy Management in System and Policy facets.

1. Click an object from a System or Policy facet.
2. Click the **Dashboard** tab.
3. Select the **Data Privacy** view from the list.

   The dashboard appears with the data privacy metrics.

Viewing Insight Maps

Axon can display Unison search results as an interactive map. Maps are a graphical representation of the relationships between objects across different facets. You can apply different overlays, exclude nodes and

group nodes to view more or less information on the map. Insight maps are not limited in scope to any particular facet or object type.

You can view the following types of maps in Axon:

System Lineage

Displays system objects and how information flows across them. The solid lines between systems represent the linking attributes. The dotted lines between systems represent a system interface. Axon displays the system interface information along the dotted lines. To hide the interface information,

locate and click the **Show or Hide Interface** (

) icon in the top pane.

The system interface information is only partially visible if you place too many systems together without providing them with adequate spacing in a map. To reveal the complete the system interface information, hover your cursor over a dotted line.

If a system is assigned to a segment that you cannot access, the lineage displays a lock sign for the system. Although Axon does not show the system details, the lineage shows that a hop exists in between the objects.

Data Lineage

Displays data set objects and how information flows across them. Axon displays the Data Set Lineage view only when you have described Linking Attributes. Axon displays labels for both system names and the Data Set Name, with searchable data set reference number.

If a data set is assigned to a segment that you cannot access, you can see a lock sign for the data set. Though you cannot see the data set details, you can see that a hop exists in between the objects.

Multi-Node

Each node is an object type from a limited range of facets such as system, process, project, and all the stakeholders. You can view the multi-node map with only the System and Stakeholder filters applied and for the Project and Process facets. Axon displays connections between these objects in the map. You can modify the map by controlling the Information menu that appears upon mouseover.

When you click the information bar, you can add in objects that are connected to the current which are not in scope of the original map. This is limited to the four facets available in the filter, but you can expand the map to see a collection of connected objects.

Interpreting and Interacting with the Map

You can interact with an Insight map to obtain the information that you need. The colour of the node shows whether they are in scope of the active search.

The lines connecting items on the map represent connections between items. Clicking on any item that is connected to any other item highlights the inbound and outbound paths. A dotted line between objects means that one or more interfaces exist between two objects. A solid line means that a flow of data lineage is available described between data sets held in systems.

You can perform the following tasks on the map:

Highlight a Node

Click on a node and see the information flow. Axon highlights the lines to show information flowing in and out of an object. This works when you have created system interfaces or linking attribute relationships.

Moving Objects

Left click and drag an object to move it around the map. To move more than one object, draw a rectangle around the objects using a left click and highlight multiple items. For larger maps that exceed the viewable area, right click and drag the map canvas to move around.

Open the Information Menu

You can hover your cursor over an object to see the information menu. Some of the actions that you perform in the information menu will temporarily change the look of the map without refocusing the search in Unison Search.

You can perform the following tasks from the information menu:

- Go to object. Open the object in a new browser tab.
- Hide the object. Temporarily remove the item and the interface lines that connect it to other systems from the map.
- Focus object. Limit the map view to items directly connected to one object. An object in focus is highlighted in green color
- Hide upstream or Hide downstream. View information that flows into or out of a given system. Hide upstream will suppress the flow into the object and Hide downstream will suppress the flow from the object.

Open the Legend

You access the legend by locating and clicking on the map legend ( ) icon in the top pane. You can refer to the legend to identify the symbols used in the map.

Insight Maps Palette

After you open an Insight Map, you can use the palette to change the way Axon displays the map. Click the **-** icon on the right hand side of the Axon map screen to hide the palette and the **+** icon to show the palette if it is hidden.

You can perform the following tasks from the Insight Map palette:

Change the Map Type

Select a map type from the drop-down list. Axon redraws the map based on the map type that you selected.

The following options are available from the drop-down list:

- System Lineage
- Data Set Lineage
- Multi Node Lineage

Change the Map Layout

You can change the direction of the lineage flow by changing the map layout. Select a layout from the drop-down list to change the map layout.

The following options are available from the drop-down list:

- Left to Right. Use this layout for small to medium sized maps.
- Top to Bottom. Use this layout to represent information flows that aggregate into a central point.
- Organic. Use this layout for larger maps or maps with no overriding direction in the information flow.

Change the Overlay

Axon can place additional information on the map in the form of an information box above each object by changing the overlay. Adding an overlay increases the space required on the screen to display the map. Overlays are therefore limited by default to show a maximum of 10 items in an overlay, with multiple pages to hold extra information. The grey box at the bottom of each overlay shows users how many pages of information each overlay contains.

A System Lineage map has the following overlay types:

Group	Overlay
Data	- Description. Description of the systems. - Glossary. Glossary terms that are associated with the systems. - Data Sets. Data sets that are part of the system. - Attributes. Data set attributes that are part of the system. - Linking Attributes. Attributes that connect systems and data sets. - Data Quality. Data quality scores for the systems. - Data Privacy. If Axon is integrated with Informatica Data Privacy Management, you can see the risk score, protection status, and sensitivity level for each system.
Business	- Stakeholders. Stakeholders for the systems and their roles. - Processes. Processes that are linked to the systems. - Projects. Projects that are linked to the systems. - Policies. Policies that are associated with the systems. **Note:** You can see the violations count for a policy if the policy is linked with a security policy in Informatica Data Privacy Management. The violations count displays *N/A* if the policy is linked with a classification policy in Informatica Data Privacy Management.
Organizational	- Business Area. Business areas that govern the systems. - Products. Products that are associated with the systems. - Legal Entities. Legal entities that exercise jurisdiction over the systems.
Regulatory	- Geography. Geographical regions to which the systems belong.

A Data Set Lineage map has the following overlay types:

Group	Overlay
Data	- Description. Description of the data sets. - Glossary. Glossary terms that are associated with the data sets. - Attributes. Attributes that are part of the data sets. - Linking Attributes. Attributes that connect systems and data sets. - Data Quality. Data quality scores for the data sets.
Business	- Stakeholders. Stakeholders for the data sets and their roles. - Processes. Processes that are linked to the data sets. - Projects. Projects that are linked to the data sets. - Policies. Policies that are linked to the data sets.

You can view the common dependencies in an overlay by using the following types of highlighting:

- Simple Highlighting. Click on an item in an Overlay, and it will turn dark blue. If the same item is relevant to other objects, it will be highlighted in a lighter blue.
- Advanced Highlighting. Some Overlays can show how the information of interest flows between objects by colouring the interface lines red. This is particularly useful for looking at Linking Attributes, where connected objects may have different names in connected systems and data sets.

Click **Clear Overlays** from the **Overlay** drop-down menu to remove any overlay that Axon displays on the map.

Apply Filters

Filters allow you to show hide objects or connections that are described based on certain characteristics. The filters available depend on the map type that you are using.

You can set the following types of filters:

- Links. Differentiate between Interface and Data Attribute links by selecting or removing the checkbox.
- System Classification. Include or exclude systems by selecting or removing the checkbox.
- Interface automation.

Save and Reset Settings

When you configure the map settings, logged-in users can save the settings or reset the settings to default with the preferences option.

Note: The Preferences option is not available for guest users.

When you choose to save preferences, Axon preserves the current settings that appear each time the map opens. When you choose to clear preferences, Axon restores default configurations that display whenever the map opens.

Hops Count

When you select the System Lineage or Data Lineage map type, Axon displays the Hops Count field.

Hops count refers to the number of upstream and downstream lineages associated with a selected object. When the map view displays multiple lineages, the map becomes complex and difficult to navigate. With hops count, you can restrict the number of lineages to view within the map. Axon allows hop counts between 1 to 99. However, Axon recommends you to restrict the view to 15 lineages for selected objects.

After Axon displays a map, you can perform tasks such as zooming in and out to change the map display. These actions do not change the information displayed in the map but change the way Axon displays the map.

You can perform the following additional tasks on a map that Axon displays:

- Zoom in to the map.
- Zoom out of the map.
- Redraw the map.
- Reset the map.
- Export the map.
- Save settings of the map.
- Reset settings of the map.
- Use the map navigator to scroll and view the sections of a large map.
- View the map in a new full screen browser tab.
- Use the legend to identify a symbol used in the map.

Viewing Local Maps

You can view a local map from one of the tabs after you open an object from Unison. Local maps display the immediate relationships of the object that you have currently opened.

The following table describes the different Axon facets that have local maps and how to view the map:

Facet	Section	Description
Data Set	Relationship	Displays a graphical representation of the Inbound and Outbound relationships described in the two tables immediately above the map. The map is therefore scoped to show only these connections, although it will show the full lineage relevant the active data sets' attributes.
System	Interfaces	System lineage map relevant to the active system. Shows immediate interface connections, and full linking attribute lineage relevant to the attributes held in the active system. It displays the system interface information along the dotted lines.
System	Data Map sub-tab under the Data tab	Data Lineage map scoped to the lineage of Data Sets and Attributes belonging to the active system
Glossary	Relationships under the Relationships tab	Glossary, System and Data Set Lineage maps scoped to the items connected to the active glossary object.
Glossary	Data Map sub-tab under the Data Tab	Full set of locally scoped Insight Maps focused showing lineage on objects linked to the active glossary object.
Data Quality Rule	Relationships sub-tab under the Standardised Data Quality Rules	System and Data Set Lineage maps.
Process	Context map in the Summary tab and Process map in the Components tab	A context map shows the dependencies, such as predecessors and successors, for a process. A process map shows the process flow between the immediate child objects of a process object.
Capability	Map under the Relationship tab	Capability lineage map is a feature in beta. It currently shows all capability child objects.
Project	Data Map sub-tab under the Data Tab	System lineage map scoped to any systems linked to the active project.

Viewing Process Maps

You can view context and process maps in a Process object. A context map within a process provides a visual representation of the process dependencies. A process map within a process provides a visual representation of the process flow.

In a Process object map, the plus symbol ( ) indicates a process of Process type. Within a map, you can see the following step types:

- Start. A green circle ( ) indicates the start step for a process.
- End. A blue circle indicates ( ) the end step for a process.
- Control. An orange decision box ( ) indicates the decision control step for a process.

A Process map has the following overlay types:

Group	Overlay
Data	- Description. Description of the processes. - Glossary. Glossary terms that are associated with the processes. - Systems. Systems that are associated with the processes. If Axon is integrated with Informatica Data Privacy Management, you can see the risk score, protection status, and sensitivity levels for each system that is linked with a process. - Data Quality. Data quality scores of the process objects.
Business	- Stakeholders. Stakeholders of the processes and their roles. - Policies. Policies that are linked to the processes. **Note:** You can see the violations count for a policy if the policy is linked with a security policy in Informatica Data Privacy Management. The violations count displays *N/A* if the policy is linked with a classification policy in Informatica Data Privacy Management.
Organizational	- Business Area. Business areas that govern the processes. - Legal Entities. Legal entities that exercise jurisdiction over the processes.
Regulatory	- Geography. Geographical regions to which the processes belong.

Context Maps

A context map shows the dependencies, such as predecessors and successors, for a process. A predecessor for a process indicates the steps that you need to follow before the process. A successor for a process indicates the steps that you need to follow after the process. View the context map from the **Summary** tab. You can edit and add predecessors for a process. If you add a process of Control type as a predecessor, you can specify a condition that appears as annotation text on the map. A context map provides a complete view of the dependencies for a process.

For example, you run a Know Your Client (KYC) compliance process. After completing the KYC process, you need to run the Anti-Money Laundering (AML) process. The AML process is a dependency for the KYC process.

The following image shows a sample context map for a KYC compliance process:

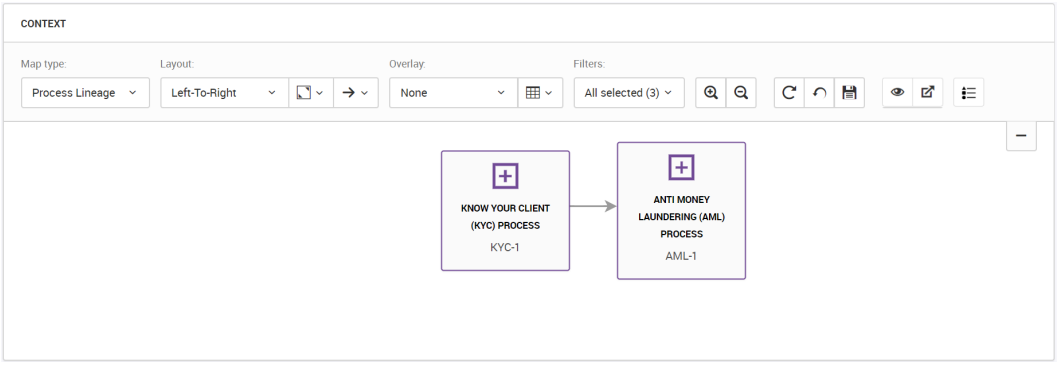

You can go to each object in the map to view further details. If you select a predecessor object, you can view the process object and all the successor objects. If you choose to view a successor object, you can see all the predecessor and process objects.

You can also see the violations count for a policy if the policy is linked with a security policy in Informatica Data Privacy Management. The violations count displays *N/A* if the policy is linked with a classification policy in Informatica Data Privacy Management.

Process Maps

A process map shows the process flow between the immediate child object of a process object. View the process map from the **Components** tab. A process map shows the flow of a process. If the preceding process is of Control type for a process, you can edit the process to add conditions to provide more context to enable better decision-making. The conditions that you enter appear as annotation text on the map.

For example, you want to view the flow of a KYC compliance process. You need to initiate the KYC process, analyze the risks, and decide whether to escalate, monitor, or activate the customer account. To provide more context for the "Decision" control type process, you can add condition text, such as Approved, Escalate, and Monitor.

The following image shows a sample process map for a KYC compliance process:

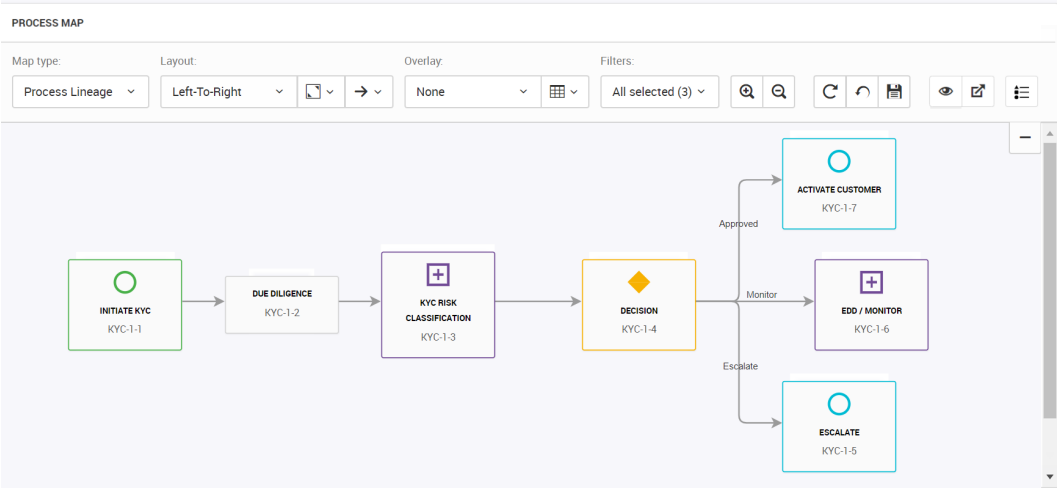

You can go to each object in the map to view details of each step.

You can also see the violations count for a policy if the policy is linked with a security policy in Informatica Data Privacy Management. The violations count displays *N/A* if the policy is linked with a classification policy in Informatica Data Privacy Management.

Viewing Data Quality Reports

Axon displays data quality reports based on data quality rules that you configure. Axon supports local data quality rules and standard data quality rules. Local data quality rules are assigned against attributes upon which scores are recorded. Standard data quality rules are assigned at the glossary level and give guidance on how attributes linked to a glossary term should be measured.

Axon does not replace your existing data quality measuring and profiling systems, but it can take inputs from them. You can do this by a technical linking of systems, or uploading extracts to Axon as a bulk upload.

You can view dashboards when you open certain object types. The **Summary** tab of such objects display the dashboard. Local dashboards show a roll up of data quality scores linked to the object.

Viewing Custom Fields

If a user with the Admin or Super Admin profile creates custom fields in the Admin Panel, the fields appear in the Axon interface when you create, edit, or view an object.

When you open an Axon object in the view mode, the **Summary** tab of the object displays the custom fields.

Note: If you create custom fields for a facet and specify some default values for the fields, the default values will not appear for existing Axon objects. To edit an Axon object, refer the *Editing an Object* topic in the *Axon Data Governance 7.3.8 User Guide*.

CHAPTER 3

Create and Edit Objects

This chapter includes the following topics:

- Create and Edit Objects Overview, 81
- Creating an Object, 82
- Add Users, 106
- Edit Objects, 109
- Tag Axon Objects, 110
- Assign a Delegate to an Object, 111
- Edit Glossary, 112
- Clone Data Set, 117
- Adding Attribute Values to a Data Set, 118
- Connect Objects, 119
- Bulk Accept Roles, 124
- Bulk Update, 125
- Delete Objects, 127
- Data Quality Rules, 133
- Data Migration, 140

Create and Edit Objects Overview

You can create several types of objects in Axon. Objects are data assets that belong to one of the various areas of data governance, such as Regulatory, Organizational, Business and Change, and Data and Technology.

Verify the following prerequisites before you create an object:

- You must have the New permission to create an object. Contact your administrator for this permission.
- Some objects require that other associated objects are already present in Axon. For example, if you want to create a data set, its associated system must already be present in Axon.

Each facet has some default configuration values, such as lifecycle, classification types, and relationship types, that are predefined in Axon. You can configure these values from the Admin panel. If your current Axon instance was upgraded from a previous version, you might see more values in the drop-down configuration list from the previous version. When you perform a fresh install, you can see the latest, shorter list of dropdown configuration values.

When you create an Axon object or edit an existing object, the **Summary** tab of the object displays the custom fields if an Admin or SuperAdmin user has configured custom fields in the Admin Panel. If default values are specified for the custom fields in the Admin Panel, you can see the default values when you create an object.

If a SuperAdmin user has created segments, you can view the list of segments in Unison search. When you create an object, select a segment in the **Segment** field to assign the object to the segment. You can view and change the segment when you edit the object. If the object has a dependent parent object, you cannot change the segment for the object. For example, the segment of a data set depends on the segment of the system on which the data set resides.

An object can be a part of only one segment at a time. You can assign a user as a stakeholder to an object if the user has access to the segment to which the object belongs.

You cannot view the **Segment** field when you create the following objects:

- Attributes
- Org Unit
- People
- Data Quality Rule
- Change Request
- System Interface

If the administrator has enabled the Data Marketplace option in the Admin Panel, you must be in the **Data Governance** view of Axon to create and manage objects.

Consider the following guidelines when you create an object:

- When you create an object, update the **Stakeholder** tab with the appropriate stakeholder information. After you create an object, Axon assigns you as the default stakeholder. If role assignments configured for facets in the Admin Panel, you can enter the stakeholders based on the predefined list of users.
- To create a large number of objects, use the bulk upload templates. Axon assigns you as the default stakeholder for the bulk created objects. If role assignments configured for facets in the Admin Panel, you can enter the stakeholders based on the predefined list of users.
- If the Axon Admin or SuperAdmin has defined a workflow for the object that you want to create, the object moves through the workflow lifecycle. At each stage of the workflow, the stakeholders must make a decision on the object before the object moves to the next phase defined in the workflow. For more information on workflows for creating Axon objects, see "Use Workflows" on page 143.

Creating an Object

You can create objects in Axon and configure the properties.

1. Log in to Axon.
2. In the Axon toolbar, click the **Create** menu, move your mouse over a governance area, and click on the object type that you want to create.

   The **Summary** tab appears where you can enter the basic properties of the object..
3. In the **Definition** and **Classifications** section, enter the properties of the object.

4. If segments are created in the Admin Panel, select a segment for the object.

   The default segment is Enterprise.

5. Click **Save** to save the object and add additional properties.

   The page displays additional tabs for the object.

6. If the facet supports document upload, you can upload related documents for the object in the **Documents** section of the **Summary** tab. You can upload documents in the following formats: `.JPG`, `.GIF`, `.PNG` `.TXT`, `.DOC`, `.DOCX`, `.RTF`, `.PDF`, `.XLS`, `.XLSX`, `.PPT`, and `.PPTX`

   Note: To prevent malicious files or security vulnerabilities, ensure you sanitize your files before uploading them to the Axon application. For example, customers can sanitize content before storing it, such as during image uploads or when filling out form fields during facet creation and updation.

   You can upload documents to the Data Quality facet.

7. Enter the associated properties of the object in the additional tabs.
8. Click **Save and Close** to finish creating the object.
9. If the Axon Admin or SuperAdmin has defined an automatic workflow for the object, go to the **Summary** tab, and click **Save & Submit**. Axon starts a workflow for the object, creates a change request, and notifies the stakeholders defined in the workflow.

Business Area Properties

A business area is a department or team with certain assigned responsibilities in a wider organization. Business areas are different from Org Units that contain the official structure from the Human Resources department. Business areas are flexible and in line with how you run the business on a daily basis. For example, the Sales department has a Client Onboarding business area that is responsible for onboarding new clients into your organization. You can connect the Business Area facet to many other facets, but you can connect the Org Unit facet only to the People facet. The Org Units need to follow the rigid view and structure of an organization. The structure and naming convention might not be easily recognized by the business users. With the Business Area facet, you can express a realistic, simpler view of the organization, and use names that business users can understand easily.

Definition

The following table describes the properties that you can provide to create a business area:

Field	Description
Primary Name	Name of the business area. Enter a name that users can recognize easily.
Parent	Parent name of the business area that you want to create.
Description	Description of the business area.

Classifications

The following table describes the properties that you can select to classify a business area:

Field	Description
Axon Status	Status of the business area in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Stage of the business area in the production lifecycle. The stages are **Operating** and **Obsolete**.
Axon Viewing	Whether the business area is available for public viewing or not.
Segment	The segment to which you want to assign the business area to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Capability Properties

A capability refers to a list of activities, deliverables, or skills that is available in your organization. The Capability facet provides a high-level overview of an organizational capacity. For example, a capability can be the ability to onboard clients, fulfill orders, capture or settle trades, or submit a regulatory submission. A capability might cross departmental boundaries. Axon users can see the resources that are brought together to deliver a capability in a particular context. A typical example for the use of the Capability facet is regulatory reporting, often termed as Business Outcomes by the Financial Services firms. A collection of regulatory reports and the processes that deliver the reports combine together to deliver a capability.

Definition

The following table describes the properties for creating a capability:

Field	Description
Primary Name	Name of the capability.
Parent	Parent of the capability if the capability belongs to a hierarchy.
Ref.	ID for the capability. If you leave this field empty, Axon assigns a new reference automatically.
Description	Description of the capability.

Classifications

The following table describes the properties for classifying a capability:

Field	Description
Axon Status	Status of the capability in Axon.
Axon Viewing	Whether the capability is available for public viewing or not.

Field	Description
Lifecycle	Stage of the capability in the approval lifecycle.
Classification	Classification of the capability that best describes its purpose, for example, Regulatory Capability. The options you see here are predefined in your Axon installation.
Capability Type	Type of capability that best describes the object.
Segment	The segment to which you want to assign the capability to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Client Properties

The Client facet classifies the use of client information and links them to the data, system, and business resources that support the client segments. Use the Client facet where an organization wants to segment the client types into different groups. For example, the client types can be Retail, Wholesale, and Commercial. The Client facet provides a top-level view on how the data, IT assets, and business resources of an organization support the client segments. For example, one bank is a trading party and another bank is the counter party. You can differentiate between corporate and personal banking based on the use of client data. If there is a Client X System relationship in Axon, you can see all the systems that have commercial and personal client data. You can also view all the related facets and the additional information on business activities.

Definition

The following table describes the properties that you can provide to create a client:

Field	Description
Name	Short name of the client. Enter a name that users can recognize easily.
Parent	Parent name of the client that you want to create.
Description	Description of the client.
Long Name	Full name of the client.

Classifications

The following table describes the properties that you can select to classify a client:

Field	Description
Axon Status	Status of the client in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Lifecycle	Stage of the client in the production lifecycle. The stages are **In Production** and **Obsolete**.

Field	Description
Axon Viewing	Whether the client is available for public viewing or not.
Segment	The segment to which you want to assign the client to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Committee Properties

A committee is a group or forum that is entrusted with a set of responsibilities, such as making decisions and providing approvals. For example, if you identify a few new glossary definition terms, the Data Standards committee can review and approve the terms.

Definition

The following table describes the properties that you can provide to create a committee:

Field	Description
Primary Name	Name of the committee. Enter a name that users can recognize easily.
Parent	Parent name of the committee that you want to create.
Ref	ID for the committee. If you leave this field empty, Axon automatically assigns a new reference identifier.
Description	Description of the committee.

Classifications

The following table describes the properties that you can select to classify a committee:

Field	Description
Axon Status	Status of the committee in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Axon Viewing	Whether the committee is available for public viewing or not.
Lifecycle	Stage of the committee in the production lifecycle. The stages are **In Effect** and **Obsolete**.
Classification	Classification of the committee. You can classify a committee as a **Core Governance Entity**.

Field	Description
Committee Type	Type of the committee. Select one of the following types: - Committee - Working Group
Segment	The segment to which you want to assign the committee to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Data Set Properties

A data set refers to any identifiable collection of data. A typical example is tables of data that reside in systems. Data sets describe reports, value lists, records, data attributes, and other data structures. In Unison search, Data Sets and Attributes are displayed as separate facets. However, the attributes of a data object exist only within the context of a data set. You create a data set and then add the attributes. A data set needs to be linked to a system in which the data set resides to give a proper context. A glossary has to closely describe the business purpose that a data set supports. You need to create System and Glossary objects before you create a Data Set object.

To create a Data Set object, a web user must have a stakeholder role with the New or Edit permission in a System object. If a web user is a stakeholder with the New or Edit permission for a system, the system name is automatically populated when you create a data set.

Definition

The following table describes the properties for creating a data set:

Field	Description
Name	Name of the data set. You can create several data sets with the same name, if they belong to different systems.
Definition	Description of the data set.
Ref.	Unique identifier for the data set. If you leave this field empty, Axon automatically assigns a reference identifier.
System Short Name	Short name of the system that the data set belongs to.
Usage	Additional information about the data set.
Glossary Name	Glossary that the data set is associated with.
Data Collections	The associated data collections in Axon Data Marketplace.

Classifications

The following table describes the properties for classifying a data set:

Field	Description
Axon Status	Status of the data set asset in Axon.
Type	Type of the data set. You can select the following data set types: - Value List - Data Set - Report The options you see here are predefined in your Axon installation.
Axon Viewing	Whether the data set should be available for public viewing or not.
Lifecycle	Stage of the data set in the governance lifecycle. You can select the following default stages: - Draft - Approved - Obsolete
Segment	The segment to which you want to assign the data set to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Attribute Values

The following table describes the properties for the values of a data set attribute:

Field	Description
Value Update Frequency	The frequency at which you plan to update the list of values. Select one of the following frequencies: - Daily - Weekly - Monthly - Quarterly - Yearly - Ad-hoc - Other - Unknown
Update Frequency Comments	Notes or comments about the frequency at which you plan to update the list of values
Availability	The method by which you plan to make the list of values available to other applications. Select one of the following methods: - Other applications can retrieve and display the values one object at a time. - Other applications can retrieve the values using batch operation. - The IT system administrator for other applications can retrieve the values using batch operation. - The values are available for data warehousing.

Field	Description
Availability Comments	Notes or comments about the availability of the list of values.
Values in Axon	Select whether the value is part of a complete list of values or a sample representation of values.

Geography Properties

Geography refers to a region or country in which you want to enforce a regulation. For example, you create a regulation that applies to only the offices in the United States. You can specify the geography when you edit a Regulation or Regulator facet.

Definition

The following table describes the properties that you can provide to create a geography:

Field	Description
Name	Name of the geographical region or country in which you want to enforce a regulation.
Parent	Name of the parent geographical region.
Description	Description of the geographical region.
Segment	The segment to which you want to assign the geography to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Glossary Properties

The Glossary captures agreed definitions for data, activities, business terms, and other objects for an organization. A set of well-described glossary terms allows users from different business functions to link their data and activities to definitions that everyone within the organization can understand. In a glossary, you can organize terms in logical hierarchies. A good glossary unifies the meanings of terms for use by a wide group of people, and facilitates search and addition of terms. After you create a glossary object, you can edit and configure relationships between glossaries.

Definition

The following table describes the properties that you can enter to create a glossary:

Field	Description
Name	Name of the glossary.
Parent Name	Parent name of the glossary in the glossary hierarchy.
Definition	Definition of the glossary.

Field	Description
Ref.	A unique reference identifier for the glossary. If you leave this field empty, Axon automatically assigns a reference identifier.
Format Type	Format in which the glossary is expressed. You can select the following data types: - Text - Number - Decimal - Percentage - Fraction - Date - Time - Datetime
Alias Names	Alternate names for the glossary. Enter synonyms of the glossary that are commonly used in your organization.
Format Description	Description of the glossary format.
LDM Reference	Place of the glossary in a Logical Data Model.
Business Logic	Business context in which the glossary is used.
Examples	Contextual examples of the business logic.

Classifications

The following table describes the properties that you can enter to classify a glossary:

Field	Description
Axon Status	Status of the glossary in Axon.
Lifecycle	Stage of the glossary in the approval lifecycle. You can select the following default stages: - Draft - Being validated - Approved - Obsolete
Axon Viewing	Whether the glossary is available for public viewing or not.

Field	Description
Type	The type of a glossary. You can specify the following types for a glossary: - Domain. A domain describes a broad category of data concepts, for example, customer domain or transaction data domain. - Subdomain. A subdomain is a division within a domain that facilitates a separation of definitions across relevant themes, for example, client or transaction. - Term. A business term corresponds to a single concept, for example, Maturity Date. - Metric. A metric is a measurement of a specific business activity that may be a combination of other glossary concepts for the measurement. You can view the type of a glossary in the following areas: - Glossary object and the associated grids view - The **My Items** menu - Data Set, Attributes, and System objects - Unison grid view - The **Impact** tab of all the facets that have associated glossaries - Unison search and Quick search suggestions
Security Classification	Security classification of the glossary. You can select the following security classification options: - Public - Internal - Confidential - Secret The options you see here are predefined in your Axon installation.

Field	Description
CIA Rating	Confidentiality, Integrity, and Availability (CIA) rating of a glossary. Confidentiality, Integrity, and Availability are crucial elements of security for a glossary. - Confidentiality: The ability of a glossary to show the right information to the right users who have the right credentials. - Integrity: The ability of a glossary to ensure that the information shown to the users have not been compromised. - Availability: The ability of a glossary to show the right information to the right users at the right time. The CIA rating indicates the security assessment of a glossary. Each of the CIA elements is rated from 1 to 3. You can add a maximum of nine ratings for each element from the Admin panel. The value you select here is a composite rating of all three elements. The CIA Rating list values defined in the Admin panel apply to Glossary and System objects. If the CIA rating ranges from 1 to 3, each digit in the rating has the following indicators: - 1 - Indicates weak security of a glossary that is less secure. - 2 - Indicates average security of a glossary that is moderately secure. - 3 - Indicates strong security of a glossary that is the most secure. For example, a rating of 213 has the following indicators: - Confidentiality is rated at 2 and the glossary is moderately secure. - Integrity is rated at 1 and the glossary is less secure. - Availability is rated at 3 and the glossary is most secure.
KDE	Indicates whether or not the glossary is a key data element. You can add new key data element values from the Admin panel in addition to the default values, True and False, as necessary. Configure the **Glossary KDE** settings from **Meta-Model Administration** > **Dropdown Configuration**.
Segment	The segment to which you want to assign the glossary to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Legal Entity Properties

A legal entity describes the legal structure of an organization and its business partners. An organization might be made of distinct corporate entities that share resources as a result of acquisitions, mergers, or divisions. Legal entity primarily identifies the ownership of different assets within a company by linking systems to specific legal entities. For example, a bank in New York wants to discontinue the Singapore office operations. The bank uses Axon to identify the mapping between the systems, infrastructure, legal entities, and IT support. The legal entities describe that the Singapore office owns the licenses for the databases, the Texas office has IT support, and the main office is physically located in New York. So, one of the reasons that

the New York office cannot discontinue the Singapore office is because they might not allow access to the databases.

Definition

The following table describes the properties that you can provide to create a legal entity:

Field	Description
Long Name	Full name of the legal entity.
Short Name	Short name of the legal entity. Enter a name that users can recognize easily.
Parent	Parent name of the legal entity that you want to create.
Description	Description of the legal entity.

Classifications

The following table describes the properties that you can select to classify a legal entity:

Field	Description
Axon Status	Status of the legal entity in Axon.
Axon Viewing	Whether the legal entity is available for public viewing or not.
Segment	The segment to which you want to assign the legal entity to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Org Unit Properties

An organizational unit describes the complex hierarchical structure of an organization. The Org Unit facet records the Human Resources view of a company. An org unit is required to add context to all employees and can be used for Single Sign-On authentication. If your organization uses Single Sign-On authentication, you can link the Org Unit facet to an HR view. You must have an Admin profile to create an org unit. You must create an org unit before you create the People object.

Definition

The following table describes the properties that you need to specify when you create an org unit:

Field	Description
Primary Name	Name of the local department, team, or unit.
Parent	Parent of the org unit. The parent record must exist in Axon before you create an org unit asset.
Ref.	Reference identifier for the org unit. The reference ID must be a string data type. If you enter a number, you must format the column to Text type. Otherwise, when you bulk upload org unit assets using a template, Microsoft Excel alters the reference ID by deleting trailing zeros.

Field	Description
Description	Relevant description about the org unit.
Axon Status	Status of the org unit object in Axon.

Policy Properties

A policy is a statement of plans or principles that addresses the needs of a particular situation. For example, to meet a regulatory requirement, a policy describes the agreed method in which the requirement is met. A policy is a set of standards that provide the direction for a business requirement or any restriction placed upon its use. Often, a policy describes the response of an organization to an external regulation. A policy can also relate to the contractual limitations placed on the organization. You can divide one policy into multiple parts that can be more accurately related to the other Axon facets to provide clear context and applicability. In Axon, you can see how policies interact with the other objects and activities.

Definition

The following table describes the properties for creating a policy:

Field	Description
Name	Name of the policy. Enter a name that users can recognize easily.
Parent Name	Parent name of the policy if the policy belongs to a hierarchy.
Ref.	ID for the policy. If you leave this field empty, Axon assigns a new reference automatically.
Description	Description of the policy.
Type	Category that best describes the policy. The options you see here are predefined in your Axon installation. If the Axon SuperAdmin has enabled Data Marketplace in the Axon Admin Panel, Policy objects that are related to Data Set objects appear in the Marketplace data collections. For more information, see the *Axon Data Governance 7.3.8 Data Marketplace User Guide*. **Note:** To specify a Policy object as a data collection usage guide, create a policy with the `EULA_Information` or `EULA_Confirmation` type. If the **Type** field does not display the `EULA_Information` or `EULA_Confirmation` value, contact the Axon SuperAdmin to create new dropdown values. For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.
Internal	Whether the policy is internal or external.
URL	Link to another page where the policy is mentioned in detail. Include the network protocol in the link. For example, enter `https://www.website.com`.
Security or Classification Policy Reference	The name of the Data Privacy Management policy that you want to link to the Axon policy. You can select a security or classification policy.

Classifications

The following table describes the properties for classifying a policy:

Field	Description
Effective Date	Date from which the policy is effective. When you bulk upload policy assets from a Microsoft Excel file, sometimes, Microsoft Excel converts the date into number of days. To prevent this, enter a single quote before the date. For example, enter March 20, 2017 as '20-03-2017 in Microsoft Excel.
End Date	Date after which the policy ceases to be effective. When you bulk upload policy assets from a Microsoft Excel file, sometimes, Microsoft Excel converts the date into number of days. To prevent this, enter a single quote before the date. For example, enter March 20, 2017 as '20-03-2017 in Microsoft Excel.
Axon Status	Status of the policy asset in Axon.
Lifecycle	Stage of the policy in the approval lifecycle.
Axon Viewing	Whether the policy should be available for public viewing or not.
Segment	The segment to which you want to assign the policy to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Process Properties

A process is a series of actions performed in a logical order to achieve a particular task or objective. Axon is not a process mapping tool, but Informatica recommends users to inventorize the key aspects of each process in Axon. Using Axon, you can link processes to their dependencies and view how data and business tasks interact with each other.

Definition

The following table describes the properties for creating a process:

Field	Description
Name	Name of the process.
Parent Name	Parent process of the process that you create. After you create a process, you can view the parent name of the process when you hover over the process name regardless of the tab that you are in.
Ref.	ID for the process. If you leave this field empty, Axon assigns a new reference automatically.
Description	Description of the process.
Input Description	Description of relevant inputs to the process.
Output Description	Description of relevant outputs from the process.
Class	Classification of the process. You can select the Execution Process. The options you see here are predefined in your Axon installation.

Field	Description
Automation	Level of automation. - Manual. The process requires human intervention at every stage of the workflow. - Partially Automated. The process requires human intervention at some, but not all, stages of the workflow. - Fully Automated. The process requires no human intervention at any stage of the workflow.
Permissions	Default permission granted to the user for working with the process.
Duration	The time duration for the process that you create. Choose hours or days as the unit of time. If you want to enter the unit of time in weeks or week days, you can configure the **Process Duration Type** property from **Meta-Model Administration** | **Dropdown Configurations** in the Admin Panel. You can view the specified process duration in a process or context map.

Classifications

The following table describes the properties for classifying a process:

Field	Description
Axon Status	Status of the process asset in Axon.
Lifecycle	Stage of the process in the approval lifecycle.
Type	Indicates whether you create a complete process, a step within a process, or a control within a process. In the Edit mode of a Process object, you can enter a condition text in the **Condition** column for the Control type processes. The annotation text appears on the output of the Control type process in process maps.
Step Type	Whether you are creating the starting step of a process, the ending step of a process, or a common step across the process.
Axon Viewing	Whether the process should be available for public viewing or not.
Segment	The segment to which you want to assign the process to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Process Map Guidelines

When you create a process in Axon, you need to select appropriate values for the **Type** and **Step Type** fields. Based on these field values, Axon creates a map for Process objects.

Use the following guidelines to create process maps:

Type	Step Type	Notation in Map	Example
Step	Starting Step	A block with a green circle ( ) indicates the starting step for a process.	
Step	Common Step	A plain grey block indicates a common step within a process.	
Step	Ending Step	A block with a blue circle ( ) indicates the ending step for a process.	
Process	Starting Step, Common Step, or Ending Step	A block with a plus symbol ( ) indicates that it is a complete process in itself. When the **Type** value is "Process," the **Step Type** value is not considered while creating the block.	
Control	Starting Step, Common Step, or Ending Step	An orange decision box ( ) indicates a decision control step for a process. When the **Type** value is "Control," the **Step Type** value is not considered while creating the block.	

Product Properties

A product captures the core product segmentation of an organization and describes the context of the products by connecting them to other facets. Use the Product facet to record and describe information from a product perspective. For example, you can have Savings and Loans products in the banking sector and Electronics and Home Appliances products in the retail sector. The purpose of the Product facet is to divide products into segments at a level where they are not changing constantly, but can be used to differentiate with other products. For example, if the data is related to specific household products, you can create the product segment as "Home Essentials."

Definition

The following table describes the properties that you can provide to create a product:

Field	Description
Name	Short name of the product. Enter a name that users can recognize easily.
Parent	Parent name of the product that you want to create.
Description	Description of the product.
Ref.	A unique reference identifier for the product that you want to create.
Long Name	Full name of the product.

Classifications

The following table describes the properties that you can select to classify a product:

Field	Description
Axon Status	Status of the product asset in Axon.
Axon Viewing	Whether the product is available for public viewing or not.
Lifecycle	Stage of the product in the production lifecycle. The stages are **In Production** and **Obsolete**.
Segment	The segment to which you want to assign the product to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Project Properties

A project is a collection of activities that are planned and organized to achieve a particular set of objectives. Projects are often complex and managed using project management tools. In Axon, you can view how projects are dependent on other functions within your organization. You can create and use a project to relate to all the objects that can be affected by the project. You can assess the scope, dependencies, and community of stakeholders. The Project facets helps you with greater transparency and reduces the chances

of missing key elements. The appropriate use of the Project facet avoids unintended consequences of implementing a change.

Definition

The following table describes the properties for creating a project:

Field	Description
Name	Name of the project. Enter a name that users can recognize easily.
Parent	Parent of the project if the project belongs to a hierarchy.
Ref.	ID for the project. If you leave this field empty, Axon assigns a new reference automatically.
Description	Description of the project.
Type	Whether you are creating a program or project within a program. The options you see here are predefined in your Axon installation.
Classification	Purpose of the project. You can select from the following classification options: - Mandatory - Discretionary

Classifications

The following table describes the properties for classifying a project:

Field	Description
Axon Status	Status of the project asset in Axon.
Lifecycle	Stage of the project in the project management lifecycle. You can select from the following classification options: - Initiation - Execution - Closed
Axon Viewing	Whether the project should be available for public viewing or not.
RAG	Status of the project in the project management lifecycle. Select Red, Amber or Green.
Start Date	Start date of the project. When you bulk upload a project assets from a Microsoft Excel file, sometimes, Microsoft Excel converts the date into number of days. To prevent this, enter a single quote before the date. For example, enter March 20, 2017 as '20-03-2017 in Microsoft Excel.
End Date	End date of the project. When you bulk upload a project assets from a Microsoft Excel file, sometimes, Microsoft Excel converts the date into number of days. To prevent this, enter a single quote before the date. For example, enter March 20, 2017 as '20-03-2017 in Microsoft Excel.
Segment	The segment to which you want to assign the project to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Regulation Properties

A regulation is a directive or rule that you employ to manage an activity, system, or organization. For example, the General Data Protection Regulation (GDPR) policy helps you determine whether your organization is compliant with statutory regulations on data privacy and protection. A regulation holds the interpretation of regulatory documentation for an organization. In Axon, you can link external regulation to internal policies to ensure compliance.

Definition

The following table describes the properties that you can provide to create a regulation:

Field	Description
Long Name	Full name of the regulation, for example, General Data Protection Regulation.
Ref	ID for the regulation.
Description	Description of the regulation.
Short Name	Short name of the regulation. The most commonly used name or an acronym for the regulation, such as GDPR. Enter a name that users can recognize easily.
Legal Advice	A description of the legal advice.
Legal Advice Type	The type of legal advice. Select one of the following legal advice types: - Comment - Guideline - Legal Requirement
Additional Info	Any additional information that provides a context to the regulation.
Parent	Parent object of the regulation.

Classifications

The following table describes the properties that you can provide to classify a regulation:

Field	Description
Compliance Level	The current state of the response of the organization to the regulation. Select one of the following compliance levels: - Unknown - Fully Compliant - Compliant with Exceptions - Materially Not Compliant
Maturity	The level of maturity in understanding and interpreting the regulation. Select one of the following maturity stages: - Initial Draft - Open for Comments - Comments Incorporated - Finalizing - Finalized

Field	Description
Probability	The extent to which a regulation is probable. Select **Confirmed**.
Impact Rating	The level of impact of the regulation on the organization. Select one of the following impact ratings: - None - Unknown - Low - Medium - High
Status	Status of the regulation in Axon. Select one of the following statuses: - Active - Obsolete - Deleted
Stage	The stage of the organization when a regulation is created or updated. Select one of the following stages: - Interpretation - Impact Assessment - Completed
Access Control	Whether or not the regulation needs to be available to public. Axon is meant for public use within your organization. Contact Informatica Global Customer Support before you configure the field to "Non-Public."
Publication Date	The date of the original publication of the regulation. If a regulation object is manually created and the object is a child of another regulation object, the publication date automatically inherits the value from the parent.
Compliance Date	The date by when you want to enforce the regulation, for example, 25th May 2018. If a regulation object is manually created and is the child of another regulation object, the compliance date automatically inherits the value from the parent.
Comments Date	The date by when you want the stakeholders of an organization to provide comments or opinions on the draft regulation.
Finalisation Date	The date by when you want the stakeholders to submit comments and finalize the regulation.
Segment	The segment to which you want to assign the regulation to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Regulator Properties

A regulator is a person who applies or enforces the regulation. One regulator can start a regulation and other regulators can adopt the regulation. For example, the European Union (EU) is the regulator of GDPR.

Definition

The following table describes the properties that you can provide to create a regulator:

Field	Description
Name	Full name of the regulator.
Short Name	Short name of the regulator. The most commonly used name or an acronym for the regulator. Enter a name that users can recognize easily.
Description	Description of the regulator.
Segment	The segment to which you want to assign the regulator to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Regulatory Theme Properties

A regulatory theme classifies a regulation based on the type of data. For example, you can create a regulatory theme to know what is the Credit Exposure limit for your organization or to protect sensitive, personal data of employees.

Definition

The following table describes the properties that you can provide to create a regulatory theme:

Field	Description
Name	Full name of the regulatory theme.
Parent	Parent object of the regulatory theme.
Description	Description of the regulatory theme.
Ref	ID for the regulatory theme.
Short Name	Short name of the regulatory theme. The most commonly used name or an acronym for the regulatory theme. Enter a name that users can recognize easily.

Classification

The following table describes the property that you can select to classify a regulatory theme:

Field	Description
Axon Status	Status of the regulatory theme in Axon. Select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Segment	The segment to which you want to assign the regulatory theme to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

System Interface Properties

An interface facilitates the flow of information between systems. System interfaces might be technical assets that are supplied by your IT department or manual activities that you create to fully understand the flow of data within an organization. When you create a system interface in Axon, you create a dotted line between two objects in a system lineage map. Axon displays the interface information along the dotted lines. You can use system interfaces to explain data lineage by looking at the attributes that link two objects.

Definition

The following table describes the properties for creating a system interface:

Field	Description
Name	Name of the system interface. You can create several interfaces between the same systems. Duplicate names are allowed but Informatica recommends that you enter a name that is descriptive and unique.
Ref.	ID for the system interface. If you leave this field empty, Axon assigns a new reference automatically.
Source System Short Name	Short name of the source system from which the information flows out.
Target System Short Name	Short name of the target system to which the information flows in.
Description	Description of the system interface.
Synchronisation Control	Description of the rules that control the synchronization of information between the two connected interfaces.

Classifications

The following table describes the properties for classifying a system interface:

Field	Description
Axon Status	Status of the system interface asset in Axon.
Axon Viewing	Whether the system interface should be available for public viewing or not.
Lifecycle	Stage of the system interface in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned
Automation	Level of automation. You can select the following the automation levels: - Manual - File based - Manual - Re-keyed - Partially Automated - Fully Automated - Unknown
Frequency	Frequency at which data flows between the source and target system. You can select the following frequencies: - Ad-Hoc - Monthly - Weekly - Daily - Realtime - Unknown
Asset ID	ID of the asset.
Transfer Method	Protocol or medium used to move information between the source and target system. You can select the following methods: - FTP - SFTP - SCP - HTTP - HTTPS - SOAP - MQSERIES - EMAIL
Transfer Format	Format or file type used to flow information between the source and target system. You can select the following formats: - XML - XBRL - JSON - DELIMITED - XLS
Interface Classification	Classification of the system interface that best describes its purpose, for example, BAU. The options you see here are predefined in your Axon installation.

System Properties

A system is a container that holds one or more collections of data assets that are useful to your organization. The definition of a system is broader than only the software applications that are supplied by your IT department. A system refers to business categories and functions that retrieve data from their sources and use them. In Axon, data assets, such as documents and end-user computing applications, are often described as systems.

Definition

The following table describes the properties for creating a system:

Field	Description
Short Name	Short name of the system. Enter a name that users can recognize easily.
Description	Description of the system.
Type	Whether the system is a software application or one of several file types. You also need to specify whether the system is hosted internally inside your organization or externally outside your organization.
Long Name	Full name or proper name of the system.
URL	Link to another page where related information is mentioned. Include the network protocol in the link. For example, enter `https://www.website.com`.
Parent Short Name	Short name of the parent of the system that you create.

Classifications

The following table describes the properties for classifying a system:

Field	Description
Axon Status	Status of a system in Axon.
Lifecycle	Stage of the system in the production lifecycle. You can select the following default stages: - In Production - Being Decommissioned - Decommissioned
Axon Viewing	Whether the system should be available for public viewing or not.

Field	Description
CIA Rating	Confidentiality, Integrity, and Availability (CIA) rating of a system. Confidentiality, Integrity, and Availability are crucial elements of security for a system. - Confidentiality: The ability of a system to show the right information to the right users who have the right credentials. - Integrity: The ability of a system to ensure that the information shown to the users have not been compromised. - Availability: The ability of a system to show the right information to the right users at the right time. The CIA rating indicates the security assessment of a system. Each of the CIA elements is rated from 1 to 3. You can add a maximum of nine values to the CIA Rating list using the dropdown configuration in the Admin Panel. The value you select here is a composite rating of all three elements. The **CIA Rating** list values defined in the Admin panel apply to Glossary and System objects. If the CIA rating ranges from 1 to 3, each digit in the rating has the following indicators: - 1 - Indicates weak security of a system that is less secure. - 2 - Indicates average security of a system that is moderately secure. - 3 - Indicates strong security of a system that is the most secure.
Asset ID	ID for the system.
Classification	Classification of the system that best describes its function. You can select the Data Warehouse classification.
Segment	The segment to which you want to assign the system to. This field appears if a SuperAdmin user has created segments in the Admin Panel.

Add Users

You can add users to Axon by manually creating a People object or by bulk uploading People objects. To manually create a People object or to bulk upload People, you must have the Admin or SuperAdmin profile.

Before you can create People objects, you must create the necessary Org Unit objects. You can create Org Units manually or by bulk importing objects. When you add a People object, you may require to configure the Manager property. The Manager property specifies the reporting structure. Ensure that the Manager accounts are available in Axon before you create the People objects.

If your organization uses Single Sign-On, you can link the People facet to an external databases such as LDAP. You can link the Org Unit facet to an HR view. If you link the People facet to an external database, you do not create People and Org Unit objects.

Bulk Upload Users to the People Facet

You can bulk upload a large number of People objects to Axon. Specify data in a Microsoft Excel sheet and upload the sheet to Axon. You must have the Admin or SuperAdmin profile to bulk upload data to Axon.

1. In the Axon toolbar, click **Upload from file** from the **Create** menu.

   Axon displays the **Upload from File** page. Use the wizard to make choices related to bulk uploading of data.

2. In the **Choose File** step of the wizard, download an object template for People.

3. Configure the following properties in the Microsoft Excel file:

Field	Description
First Name	Required. First name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Last Name	Required. Last name of the user. Specify the name as it is recorded in the LDAP directory server of your organization.
Function	Job title or role of the user.
Function Description	Job description of the role of the user.
Description	Description about the user.
Email	Required. Email address of the user. Must be unique. Axon sends emails to this address.
Password	A password to provide access to the user. The user can change the password later. Not required if you enable Single Sign-On authentication.
Status	The status of the user in Axon. You can select one of the following statuses: - Active - Inactive - Pending Review - Obsolete - Deleted
Org Unit Reference	Required. The reference identifier of the organizational unit that the user is associated with.
Profile	Required. A user profile that controls the tasks that the user can perform and the objects that the user can view. Select one of the following user profiles: - WebUser - Admin - SuperAdmin
Office Location	Office location of the user.
Internal Mail Code	Internal office mail code of the user.
Office Telephone	Office phone number of the user.
Mobile/Cell	Mobile phone number of the user.
LAN ID	Network ID of the user. LAN ID might be required if you want to enable Single Sign-On authentication. If the LAN ID column is empty, you must not map the LAN ID column of the template to any field in the Axon Field column when you perform a bulk upload.

Field	Description
Employment Type	Required. The type of employment of the user. Specify whether the employment of the user is external or internal.
LinkedIn URL	Optional. Public URL of the user's LinkedIn profile. When you enter a valid URL, a clickable LinkedIn icon appears on the user profile page. For example, https://www.linkedin.com/in/<username>
Lifecycle	Required. The status of the employment of the user. You can select one of the following default statuses: - Working - Temporarily Inactive - Pending Deactivation - Left the Company An administrator can configure these values. Specify customized values if your organization does not have the default values.

4. Select the file from your computer and choose to update existing objects or upload new items.
5. Click **Next - Map Columns**.
6. In the **Map Columns** step of the wizard, map the columns in the Excel file to the properties that Axon supports. In the **Column in Uploaded File** property, from the menu, you can select the column that is present in the Excel file that you want to map to the Axon field.
7. To continue with the bulk upload wizard steps, click **Next - Start Upload**.
8. In the **Upload** step of the wizard, review the progress of the upload task. Axon displays a progress bar and a message to indicate the progress of the upload task.

Manually Add Users to the People Facet

You create users in the People facet like how you create other objects in Axon. You must be logged in with an Admin profile to create People.

1. From the toolbar, click **Create**.
2. From the sub-menu, click **People** under **Organizational**.
3. Configure the following properties in the **Summary** tab:

Option	Description
Email	Email address of the person. Must be unique. Axon sends emails to this address.
Password	Optional. Provide a password. The user can change the password later. Not required when using Single Sign-On
Confirm	Repeat the password.
Profile	User profile assigned to the person. The object is always saved with the WebUser profile, regardless of the value that you select here. **Note:** To change the profile after you save the object, open the object in Edit mode and select a different profile value.

Option	Description
Axon Status	Status of the object.
First Name	First name of the user. Specify the name as it is recorded in the LDAP directory of your organization.
Last Name	Last name of the user. Specify the name as it is recorded in the LDAP directory of your organization.
Description	Other relevant information about the user. Axon displays this information in the **About Me** section.
Org Unit	Organization unit that the user is associated with.
Function Name	Job title or role of the user.
Function Description	Job description of the role of the user.

4. Click **Save & Close** to save the user details.

Edit Objects

When you start out to create an object, you might not be able to provide all the information, such as stakeholders, relationships, and connections, upfront. After you create an object, you might have to perform some actions at a different point in time, such as connecting the object to many other objects and providing detailed descriptions of the object relationships. You can edit an object to make such changes so that you enrich the object with more information for better clarity and accuracy.

The Edit options for an object vary based on the facet. You need to have Edit permissions to edit objects. You can perform different actions such as adding connections, configuring relationships, adding data quality rules, assigning stakeholders, creating change requests, and defining workflows.

For People objects, user cannot modify the details of other users that are retrieved via LDAP directory or SSO.

If an object belongs to a segment, you can view and change the segment when you edit the object.

If the Axon Admin or SuperAdmin has defined a workflow for the object that you want to edit, the object moves through the workflow lifecycle. As the object moves through the phases defined in the workflow lifecycle, Axon creates change requests for the workflow stakeholders. At each stage of the workflow, the stakeholders must make a decision on the object before the object moves to the next phase defined in the workflow. For more information on workflows for editing Axon objects, see "Use Workflows" on page 143.

Editing an Object

You can edit the properties of the objects in Axon.

1. Log in to Axon.
2. Click a facet to edit an object.
3. Click the object that you want to edit.

The **Summary** tab appears where you can edit the basic properties of the object.

4. Click **Edit**.

1. **Note:** To prevent malicious files or security vulnerabilities, ensure you sanitize your files before uploading them to the Axon application. For example, customers can sanitize content before storing it, such as during image uploads or when filling out form fields during facet creation and updation.
5. In the object, click the tabs that you want to edit. Edit the properties that you want to change for the object from each tab.

   The tabs differ based on the facet type.
6. To save and finish the changes, click **Save and Close**.

   If the Axon Admin or SuperAdmin has defined a workflow for the object, click **Save & Submit**. Axon starts a workflow for the object, creates a change request, and notifies the stakeholders defined in the workflow.

Tag Axon Objects

Axon allows you to tag associated objects while creating a new object or while editing an existing object. You can tag one or more associated objects in the **Description** or rich text field of the **Summary** page of a facet.

You must have one of the following user profiles to tag associated objects while editing an existing object:

- WebUser
- Admin
- SuperAdmin

Note: Only Admin or SuperAdmin users can tag existing associated objects, while creating a new object.

To tag the object in the **Description** field, add `#` symbol followed by <`facet name`> and <`object name`>. Enter `#<facet name>:` and click **Show Editor** to display the list of objects in the facet. Based on the facet name, Axon displays recommendations for the users to select the required object. Click the **Save and Close** button to save the changes.

For example

- You can tag a Glossary facet and object named 'Customer' by entering `#glossary:customer` in the **Description** field.
- You can also tag multiple objects by entering `#<facet name>:<object 1> #<facet name>:<object 2>`.

Note: The facet or object name entries are not case-sensitive.

The following image shows the tagging of a Data Set object:

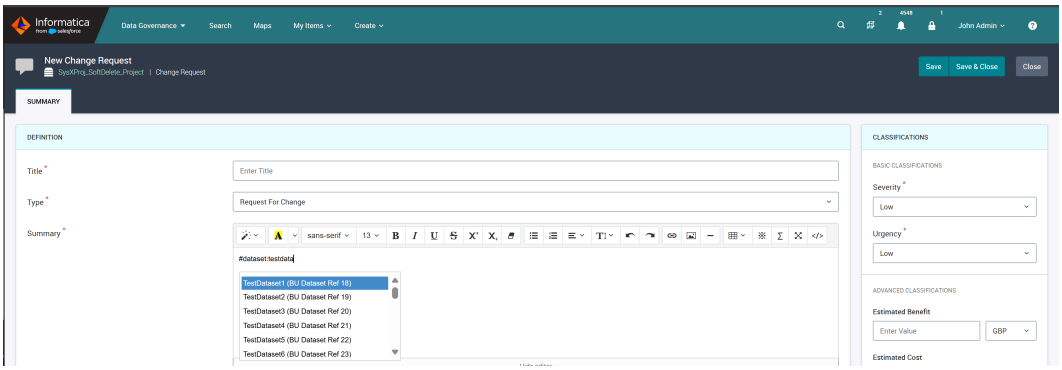

The Unison page displays all the associated objects with hyperlinks in the **Description** field. If you click a tagged object from the **Description** field, the corresponding object opens on a new tab. You can tag one or more objects to display the associated objects.

Assign a Delegate to an Object

On the **Stakeholders** tab of an object, you can add stakeholders to the object or remove existing stakeholders from the object. You can also set delegates that can act on behalf of the stakeholders of the object.

To assign a user as a delegate to an object, the user must be in the list of stakeholders. For more information about how you can create a list of stakeholders, see “Configuring a Role Assignment” in the *Axon Data Governance Administrator Guide*.

1. In Unison search, open an object and click the **Edit** button.
2. In the edit view, click the **Stakeholders** tab.

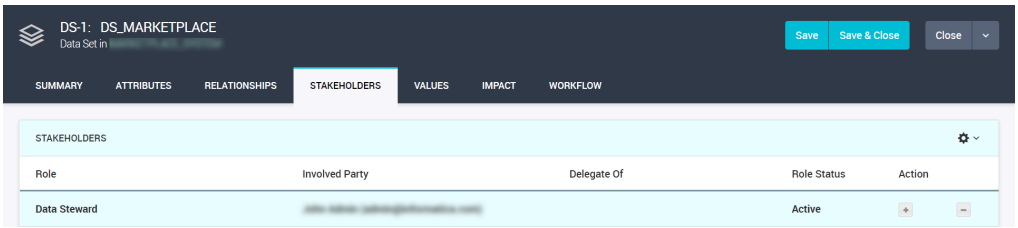

3. To assign a stakeholder, select the **Involved Party** field and add a user from the list of stakeholders.
4. To assign a delegate, select the **Delegate Of** field and add a user from the list of stakeholders.
5. To add more stakeholders or delegates, click the add (+) icon.
6. To remove a stakeholder or delegate, click the remove (−) icon.
7. Click **Save & Close**.

Edit Glossary

You can edit a glossary to add relationships, configure rollup views, discover attributes, assign stakeholders, connect to other objects, and define workflows. To edit a glossary, you need to have Edit permissions on the Glossary object.

You can roll up a glossary to view all the relationships from the immediate child glossaries, the grandchild glossaries, and all the facet objects that are linked to the child glossaries.

When you search for a glossary object, Axon might not provide all the related attributes if they are not linked to the glossary. In a Glossary object, you can perform data discovery to discover all the attributes that you can link to the glossary.

You can connect a glossary to other objects and based on the connections, Axon derives the context of the object. You can create a change request and define workflows to facilitate communication between the glossary stakeholder and the wider Axon community.

Note: Under the **Summary** tab of a glossary, you can add a URL to the **Documents** section. If the URL is valid, the **Item** column of the **Documents** section displays the name of the web page the URL redirects to. If the URL is not valid, if the target web page requires additional authentication or if the URL redirects to a web page that is not accessible on the organization network, the **Item** column displays the name of the document that you entered in the **Name** column.

Glossary Relationships

To configure relationships between glossaries, click the **Relationships** tab, and click **Edit**. You can configure the type of relationships from the Admin Panel. The default relationship type for a glossary is "Is Related to." The **Is Related to** relationship type describes how a glossary is related to another glossary. Use this type of relationship to describe the relationships, other than parent-child relationship, between two glossaries.

Glossary Rollup View

You can choose to roll up a Glossary object to get a complete view of the glossary relationships. In the Glossary Rollup view of an object, you can view all the relationships from the immediate child glossaries, the grandchild glossaries, and all the facets that are linked to the child glossaries.

After you enable the rollup view, you can see the rolled up relationships in orange color. You can see the glossary from where the rollup happens. You can view the rolled up relationships from the **Impact** and **Data** tabs of a glossary object. To view the rolled up relationships, click **Edit** > **Show Rollup View**. To hide the rolled up relationships, click **Edit** > **Hide Rollup View**.

The following image displays a glossary rollup view for the related processes:

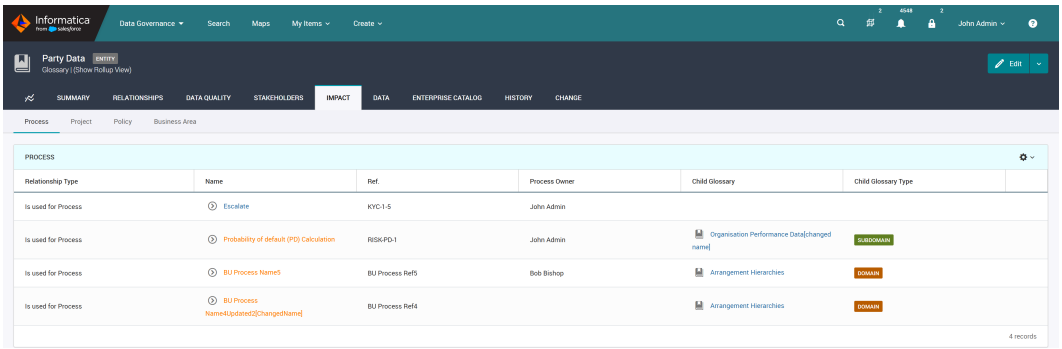

Data Discovery

Data discovery is the process of discovering the metadata based on the configured pattern searches. You can perform data discovery in Axon from the **Data | Data Discovery** tab of a Glossary object.

An object can be connected to multiple objects within the same facet or different facets in Axon. The Glossary facet binds many objects across different facets together. If you search for a Glossary object, Axon displays all the connected objects across facets. If an object belongs to a segment that you cannot access, Axon does not list the objects.

When you search for a glossary object, Axon might not provide all the related attributes if they are not linked to the glossary. If you perform data discovery within a glossary, you can view all the attributes that are representations of the same concept used in different data sets. For example, consider that three attributes from three different data sets share the same name "Party Classification" and only one of them is associated with the glossary "Party Data". If you search for the "Party Data" glossary, Axon might not provide all the three relevant attributes with the name "Party Classification" because two of the attributes are not linked to the glossary. You can perform data discovery on the glossary "Party Data" to discover and link all the relevant attributes so that all of them appear in the search results.

You can perform data discovery on a Glossary object to discover the attributes that you can link to the glossary. To perform data discovery, you can use data domain discovery rules from Enterprise Data Catalog, or assign and run rules for a glossary in Axon.

Data Domain Discovery Rules

A data domain is a predefined or user-defined object that enables you to discover the functional meaning of column data. Examples of data domains include Social Security number, credit card number, and account status. Data domain discovery is the process of discovering the functional meaning of data in the data sources based on the semantics of data. Data domain discovery finds the source columns that contain similar data.

A data domain discovery rule is the business logic that you define to identify data domains. In Axon, a glossary defines the common business terminology about a concept that is used across the organization. Both glossary and data domain are related to each other in a way that a glossary defines the concept and a data domain defines the rules to discover that concept. You can map a glossary to a data domain and use the discovered knowledge to identify the key data elements. Enterprise Data Catalog uses the data domain discovery rules to discover matching column data or column name patterns from the metadata extracted by the resources. Enterprise Data Catalog discovers the attributes based on the association between the glossary and data domain discovery rules, and then onboards the discovered attributes to Axon.

You can associate a data domain with a Glossary object in the Edit mode. Any Axon user with Edit permissions on a glossary can associate the glossary to a data domain. In Axon, navigate to the **Data | Data Discovery** tab of a Glossary object. You can view the data domains from Enterprise Data Catalog in the **Data Domain Discovery Rules** section. You can either choose an existing data domain discovery rule or navigate to Catalog Administrator to create rules. To create a data domain discovery rule in Catalog Administrator, click **Create**. After you create the rule in Catalog Administrator, the rule appears in Axon after the next synchronization between Axon and Enterprise Data Catalog. For more information on creating data domains, refer the *Creating a Rule-based Data Domain* topic in the *Informatica 10.2.2 Catalog Administrator Guide*.

To view and select the existing rules, click the **Edit** icon ( ) in the **Data Domain Discovery Rules** field. In the **Select Data Domain Discovery Rules** dialog box, you can select a single or multiple data domains. You can filter the data domains based on the name, description, and group. If a data domain belongs to multiple groups, you need to enter a single group name in the Group filter. After you select and associate the rules to a glossary, you can save the glossary. When you save the glossary, Axon associates the selected data domain discovery rules with the glossary.

The following image shows a sample list of data domain discovery rules from Enterprise Data Catalog:

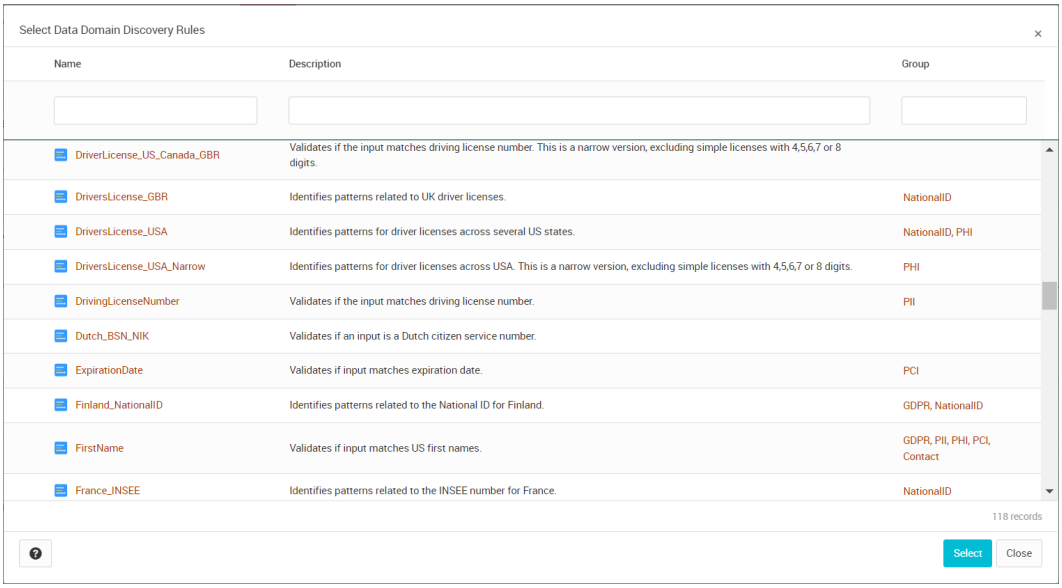

The association between a glossary and data domain is stored in Enterprise Data Catalog. If the Axon glossary is already scanned, the glossary to data domain association appears in Enterprise Data Catalog after indexing activities. Otherwise, the association appears with minimum glossary information, such as glossary name and description, in Enterprise Data Catalog. After the next scan runs, the complete glossary information is populated in Enterprise Data Catalog.

Onboarding the discovered objects from Enterprise Data Catalog starts after the next scheduled synchronization between Axon and Enterprise Data Catalog. In the **Data | Data Attributes** tab of a Glossary object, you can view the attributes that Enterprise Data Catalog discovers.

When you hover over the data domain discovery rules, you can view their description. To delete and remove the association between the glossary and data domain discovery rules, you can click the **X** sign. When you delete a data domain discovery rule, Axon retains the discovered attributes associated with the rule.

Once you associate a data domain discovery rule with a Glossary object, you cannot associate the data domain discovery rule with the other Glossary objects. You need to remove the association between the glossary and data domain discovery rule to associate the data domain with another Glossary object.

If you delete a glossary in Axon, the association between the glossary and data domain exists in Enterprise Data Catalog till the next synchronization between Axon and Enterprise Data Catalog.

Note: To view the data domain discovery rules, ensure that Enterprise Data Catalog runs on Informatica version 10.2.2.

Glossary Assignment Rules

In Axon, there might be glossaries that are not linked to attributes. Searching for the attributes without glossaries in the Attributes facet might take a long time. You can create, assign, and run a rule to discover the attributes that you can associate with a glossary.

In a Glossary object, click **Edit** and click the **Data Discovery** sub-tab under the **Data** tab. To create and assign rules for a glossary, you can define the rule parameters, such as patterns, data set patterns, and systems. Axon performs searches based on the patterns and finds the attributes that you can associate with the glossary object.

The following image shows the sections that you can use to discover attributes:

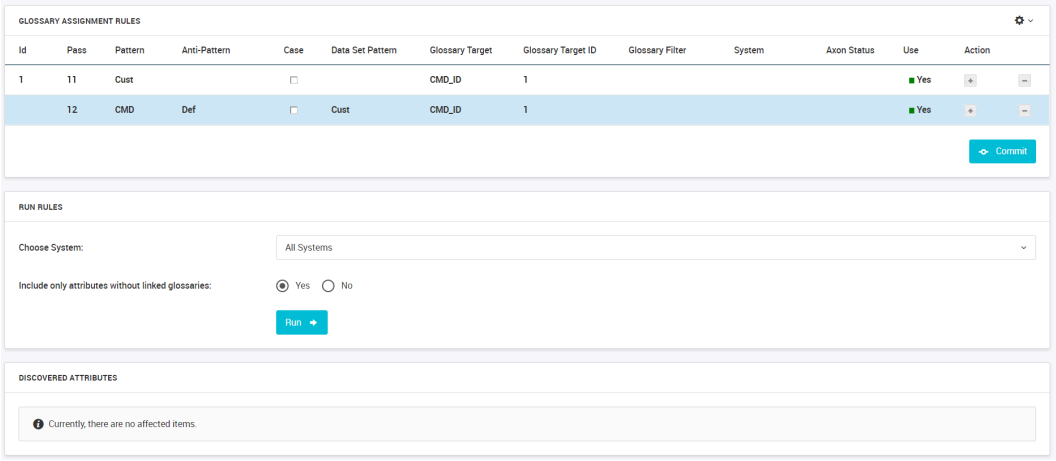

Create and Assign Rules

To create a rule, you need to have a role with the Edit permission. You can create and assign the rules for a glossary from the **Glossary Assignment Rules** section under the **Data | Data Discovery** tab of a glossary object.

The following table list the fields that you can enter in the **Glossary Assignment Rules** section:

Name	Description
Id	Optional. Identifier for the glossary assignment rule.
Pass	Required. A unique number that identifies the rule that you configure. Axon runs the rule in ascending order. If you want to run multiple rules at the same time, the search result shows the rule that returns each row. If there are multiple rules that discover an attribute, Axon displays the name of the first rule that discovered the attribute.
Pattern	Required. A text string that you can use to search the attribute names.
Anti-Pattern	Optional. A text string that you can configure to excludes from attribute search. This field is not visible by default. To view this field, choose the **Anti-Pattern** column from the **Grid Settings** menu.
Case	Optional. Specifies if you want to perform a case-sensitive search.
Glossary Target	The name of the glossary in which you create the rule. This field is automatically populated, and you cannot edit this field.
Axon Status	Required. The status of the data set that contains the attributes.
Use	The option to choose the configured rule when you run the rules. Select "Yes" or "No".
Data Set Pattern	Optional. A text string that you can configure to exclude from data set search.

Name	Description
Glossary Filter	Optional. A text string that you can configure to exclude from glossary search.
System	Optional. A text string that you can configure to exclude from system search.

Run Rules

You can choose to run the rules from the **Glossary Assignment Rules** section by toggling the value from "No" to "Yes" in the **Use** column. When you commit the changes in the Edit mode, Axon runs the selected rules against the Attributes facet and automatically associates the search results with the active glossary object. You cannot undo the changes after you choose to commit.

From the **Run Rules** section, you can choose the systems and attributes on which you want to run the rules. Axon displays the attributes that match the rules in the **Discovered Attributes** section below the **Run Rules** section. You can decide whether you want to associate the attributes to a glossary based on the relevance of the results.

Data Attributes

You can view all the attributes that are linked to a glossary in the **Data Attributes** sub-tab.

If you have not configured Enterprise Data Catalog, you can view only the Axon attributes. If you have configured Enterprise Data Catalog, you can view the attributes that are discovered from Enterprise Data Catalog along with the Axon attributes.

The following image shows the **Data | Data Attributes** view of a Glossary object:

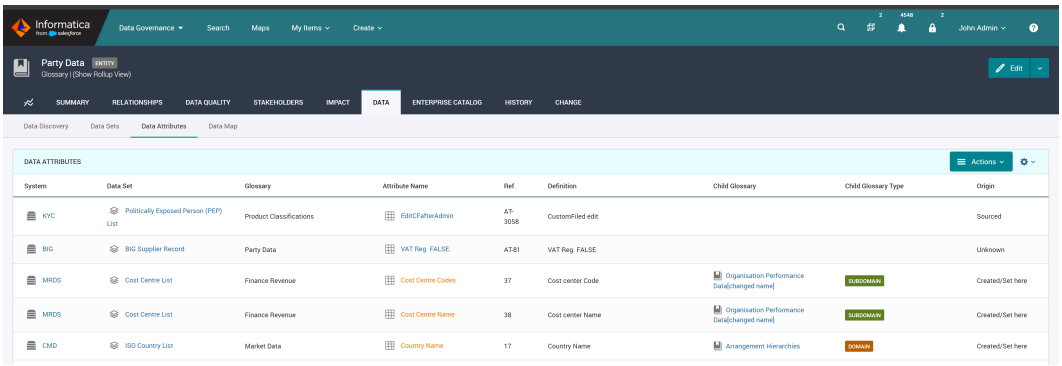

If the attributes are discovered and onboarded from Enterprise Data Catalog in to Axon, you can view the following additional columns:

Review Status

The review status of the corresponding discovered attribute. If you choose to accept onboarded objects and the Confidence Score is 100%, the attributes from Enterprise Data Catalog appear with the Accepted review status in Axon. If you do not choose to accept onboarded objects, the review status appears as Discovered. For the attributes with the Discovered review status, you can choose to accept or reject the discovered attributes from the **Actions** menu. You cannot undo the changes after you accept the discovered attributes. In a Glossary object, you cannot curate the attributes that are discovered for the child glossaries. To curate the child glossary attributes, navigate to the child glossary objects.

You can also use the Bulk Update option from the Unison search page to curate the discovered attributes.

Physical Fields

View the physical fields from Enterprise Data Catalog that are linked to the attributes. You can view the linked physical fields in orange color. Click the linked physical field hyperlink to view all the details of the field, such as Last Updated, Field Type, Resource, Table, Schema, Data Domains, and Data Domain Groups. Click the physical field name from the field information dialog box to launch Enterprise Data Catalog and view more information about each item.

Confidence Score

The predefined conformance threshold configured in the Admin Panel. Based on the confidence score, you can decide whether you want to accept or reject the discovered attributes. The confidence score for a field is higher if it is linked to multiple glossaries. If multiple fields are linked to an attribute, the overall confidence score is the average of individual scores.

Clone Data Set

In an organization, you can come across multiple repositories that contain similar data sets. The process of creating data sets and attributes for each system is time-consuming, and most of the data sets and attributes might be similar. To reduce the time and effort, you can clone a data set that contains all the attributes and associate the data set with different systems. You can clone a data set to quickly reuse the data set attributes in different systems instead of creating the attributes again.

You might see a duplication of data across systems or across multiple versions of a system running in different parts of an organization. For example, if you want to run five instances of the same system but in different departments of your organization, you can clone the data set that contains all the attributes.

When you clone a data set, Axon creates and saves a copy of the data set. Axon replicates data to the **Summary** and **Attributes** tabs. You can add details in other tabs, such as Stakeholders and Impact, that are not cloned.

After you clone a data set, Axon appends the word *(clone)* to the data set name. For example, if the data set name is KYC Data, Axon creates a clone of the data set with the name "KYC Data (clone)". You can choose to use the same name or provide a unique name for the cloned data set.

Cloning a Data Set

You can clone a data set along with the attributes in Axon. You can clone one data set at a time.

1. Open a data set that you want to clone.
2. Click **Edit** > **Clone Data Set**.

   The **Clone Data Set** dialog box appears and displays a confirmation message.
3. To clone the data set, click **Continue**.

   Axon replicates data in the Summary and Attributes tabs. By default, Axon appends the word *(clone)* to the data set name.
4. Optionally, edit the name of the data set.
5. Optionally, update the fields in the remaining tabs that are not cloned.
6. Click **Save and Close**.

Adding Attribute Values to a Data Set

Download the Attribute Values template to bulk upload values for Data Set attributes. You can choose to replace the existing values or add to the existing list of values.

Replace Existing Values

To replace the existing list of values for a Data Set attribute, perform the following steps:

1. Open the Data Set for which you want to upload attribute values, and go to the **Values** tab.
2. Click **Download Template** to download the template file.
3. Enter the values in the template file.

   Note:

   - The columns you see in the template file depend on the entries that you have made in the **Structure** section of the **Attributes** tab.
   - Do not modify the headers in the template.
   - Enter the values according to the format required by the headers. The format of the values you enter must match the format of the existing values.
4. In the **Values** tab of the Data Set, click **Choose File**, and select the template from your local machine.
5. In the **Upload Type** field, select **Overwrite**.
6. Click **Save**.

Axon erases all existing values for the Data Set attribute and creates new values from your template.

Add to Existing Values

To add new values to the existing values of a Data Set attribute, perform the following steps:

1. Open the Data Set for which you want to upload attribute values, and go to the **Values** tab.
2. Click **Download Template** to download the template file.
3. Enter the values in the template file.
   - The columns you see in the template file depend on the entries that you have made in the **Structure** section of the **Attributes** tab.
   - Do not modify the headers in the template.
   - Enter the values according to the format required by the headers. The format of the values you enter must match the format of the existing values.
4. In the **Values** tab of the Data Set, click **Choose File**, and select the template from your local machine.
5. In the **Upload Type** field, select **Append**.
6. Click **Save**.

Axon uploads the attribute values from your template and adds them to the list of existing values.

Connect Objects

The context of an object is critical information that you need to know. Axon derives the context of an object from the other objects it is connected to in different facets.

You can associate an object from one facet to another facet. The **Impact** tab of an object shows the connection of the object across many other facets. If you have edit permissions, you can connect the objects from the **Impact** tab.

You can connect objects within the same private segment. You can connect an object from a private segment to an object in the Enterprise segment. You cannot connect an object from a private segment to an object from another private segment.

You can create unidirectional, bidirectional, and inferred connections between facets. Unidirectional connections start from one facet to another and not the other way around. Bidirectional connections start from either of the facets. Inferred connections link one facet to another through other facets.

To view a visual representation of connections between the facets that you can create from the **Impact** tab, refer to *https://network.informatica.com/docs/DOC-18595*

From the **Impact** tab of an object, you can perform the following tasks:

- View and edit a connection.
- Create a connection.
- Search and add a connection.

View and Edit Modes

If you view an object in the View mode, you can see the facets to which the object is connected. If you view the same object in the Edit mode, you can see additional facets to which you can connect the object. For example, if you open a Data Set object, you can see the Policy facet in the View mode and the Policy, Client, and Legal Entity facets in the Edit mode.

The connections to objects in the facets are unidirectional. For example, you can edit the **Impact** tab of a Process object to connect the object to the System object. If you look at the connected System object, you can view the relationship, but cannot edit the relationship.

Create Connections

You can create connections with other facet objects. The other facet tabs appear based on the facet that you edit.

Users with the appropriate edit permissions can add or manage connections. Create a connection in the Edit mode. Use the **+** icon to add a connection, and the **-** icon to delete a connection. When you create a connection, the fields that appear depend on the facet type.

The following fields might appear when you create a connection:

Field	Type	Description
Relationship Type	Required	The type of relationship between the object and facet. You can configure the list of the relationship types.
Object	Required	The name of the object that you want to connect the active object to. If you click inside the text box, you can view a list of object names that you can select. **Note:** You cannot see the list of glossary names when you click inside the text box because the number of glossaries might be high. If you want to connect to a glossary from any other facet, you need to type initial characters of the glossary name to view the dropdown list of available glossaries.
Ref.	Optional	The reference number of the object that the object connects to. After you select an object, Axon automatically populates the reference number and ensures that the correct object is selected.
Owner	Optional	The owner of the object that the object connects to. After you select an object, Axon automatically populates the owner.
Description	Optional	Description of the relationships between the objects.

Search and Add Connections

You can provide search criteria to find and add objects. To search and add objects, click the **Search and Add** button next to the **Grid Settings**. To find the objects that you want to add, select the **Axon Status** value or perform a keyword search.

After the search results appear, you can perform the following tasks:

- Add each object one by one.
- Remove a collection of object connections.
- Add all the objects that belong to a hierarchy together based on the relationship type.
- Add the additional or missing objects if all the hierarchical objects are added.

Search Related Objects in Unison

When you search for a process, project or policy in Unison, Axon searches for their linked objects in all the available facets.

You can create the following direct connections:

- Process to Data Set
- Process to Attribute
- Project to Data Set
- Project to Attribute

- Policy to Data Set
- Policy to Attribute

You can also create the following inferred connections:

- Process to Data Set and Data Set to Attribute
- Process to Attribute and Attribute to Data Set
- Process to System and System to Data Set
- Process to System and System to Attribute
- Process to Glossary and Glossary to Data Set
- Process to Glossary and Glossary to Attribute
- Project to Data Set and Data Set to Attribute
- Project to Attribute and Attribute to Data Set
- Project to System and System to Data Set
- Project to System and System to Attribute
- Project to Glossary and Glossary to Data Set
- Project to Glossary and Glossary to Attribute
- Policy to Data Set and Data Set to Attribute
- Policy to Attribute and Attribute to Data Set
- Policy to System and System to Data Set
- Policy to System and System to Attribute

Axon displays the related objects even if only one connection path exists. For example, consider a data set that is directly or indirectly connected to a project. If you search for the data set, Axon displays the linked project if the project has one of the following connection paths to the data set:

- Data Set to Project
- Data Set to Attribute and Attribute to Project
- Data Set to System and System to Project
- Data Set to Glossary and Glossary to Project

Example 1: Search for Policy x Glossary

To showcase that a clause in a privacy regulation applies to a certain subject matter area, a policy steward links the policy object in Axon that represents the privacy regulation to the glossary object that represents the

subject matter area. The following image shows the related objects that Unison returns when you search for a policy that is directly linked to a glossary:

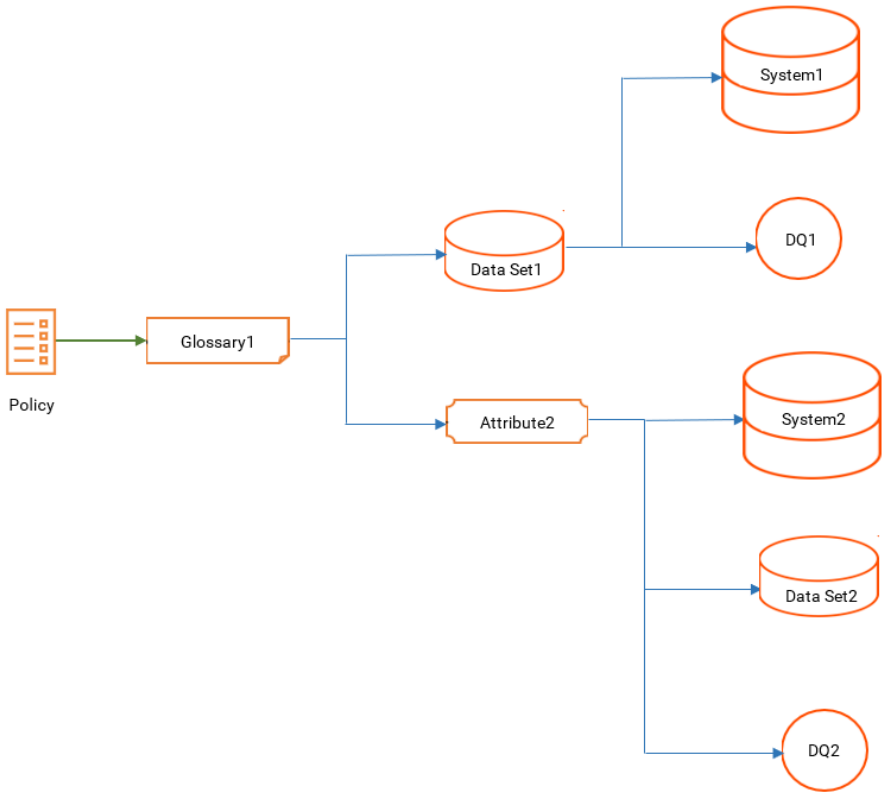

When you search for Policy, Unison search returns Glossary1, Data Set1, Data Set2, Attribute2, System1, System2, DQ1 and DQ2 based on the following logic:

- The search results show Glossary1 because Policy is connected directly to Glossary1.
- The search results show DataSet1 because Policy is connected to Data Set1 via Glossary1.
- The search results show Attribute2 because Policy is connected to Attribute2 via Glossary1.
- The search results show System1 because Policy is connected to System1 via Data Set1.
- The search results show DQ1 because Policy is connected to DQ1 via Data Set1.
- The search results show Data Set2 because Policy is connected to Data Set2 via Attribute2.
- The search results show System2 because Policy is connected to System2 via Attribute2.
- The search results show DQ2 because Policy is connected to DQ2 via Attribute2.

Example 2: Search for Project x System

To showcase that a change initiative will affect a particular system and all the data within it, a project steward links the project object in Axon that represents the change initiative to the system object that

represents the affected system. The following image shows the related objects that Unison returns when you search for a project that is directly linked to a system:

When you search for Attribute1, Unison search returns Process1 and Process2. Attribute1 is directly connected to Process2, and the connections from System1 to Process2, Glossary2 to Process2 and Glossary1 to Process2 are also present. Attribute1 is connected to Process1 through System1.

When you search for Project1, Unison search returns System1, Data Set1, Attribute1 and DQ1 based on the following logic:

- The search results show System1 because Project1 is connected directly to System1.
- The search results show Data Set1 because Project1 is connected to Data Set1 via System1.
- The search results show Attribute1 because Project1 is connected to Attribute1 via Data Set1.
- The search results show DQ1 because Project1 is connected to DQ1 via Attribute1.

Example 3: Search for Process x Data Set

To showcase the importance of a particular data set which helps a process steward make decisions, the process steward links the process object in Axon to the data set object. The following image shows the related objects that Unison returns when you search for a process that is directly linked to a data set:

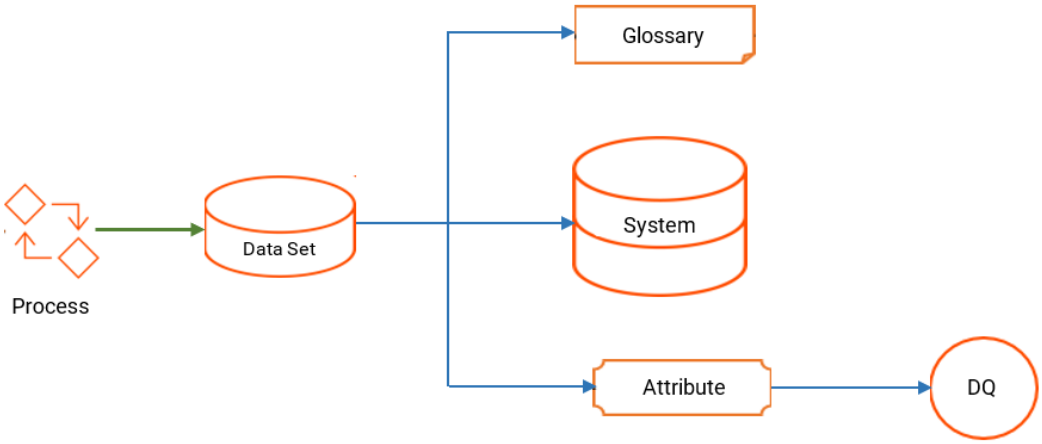

When you search for Process, Unison search returns Data Set, Glossary, System, Attribute and DQ based on the following logic:

- The search results show Data Set because Process is connected directly to Data Set.
- The search results show Glossary because Process is connected to Glossary via Data Set.
- The search results show System because Process is connected to System via Data Set.
- The search results show Attribute because Process is connected to Attribute via Data Set.
- The search results show DQ because Process is connected to DQ via Attribute.

Example 4: Search for Process x Attribute

To showcase the importance of a specific field in a table that contains key metrics, the process steward links the process object in Axon to the attribute object that represents the field. The following image shows the related objects that Unison returns when you search for a process that is directly linked to an attribute:

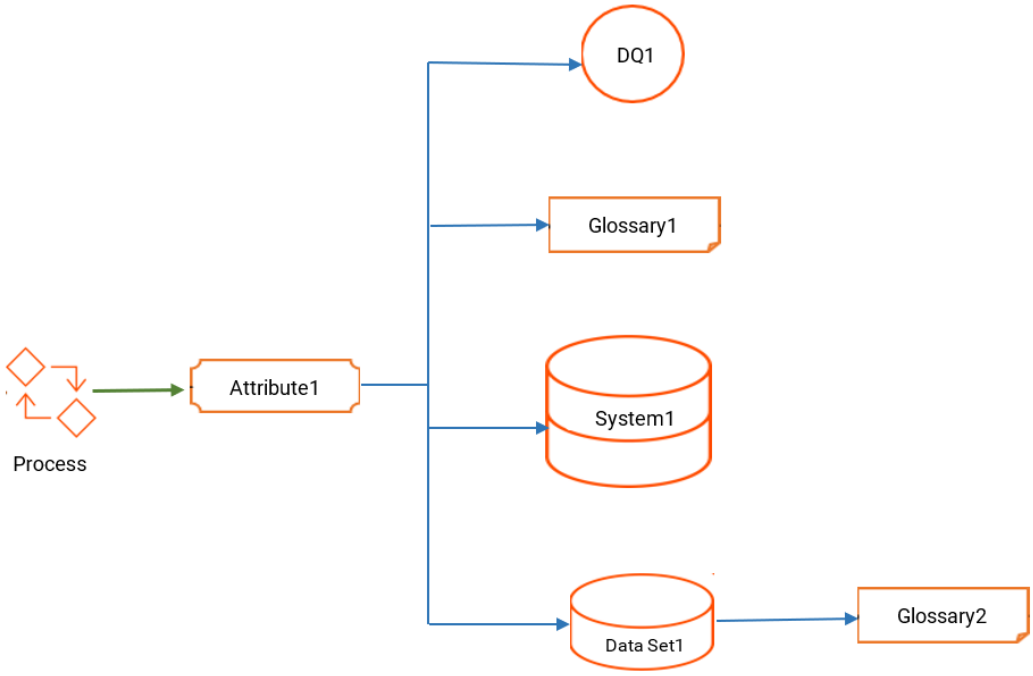

When you search for Process, Unison search returns Attribute1, DQ1, Glossary1, System1, Data Set1 and Glossary2 based on the following logic:

- The search results show Attribute1 because Process is connected directly to Attribute1.
- The search results show DQ1 because Process is connected to DQ1 via Attribute1.
- The search results show Glossary1 because Process is connected to Glossary1 via Attribute1.
- The search results show System1 because Process is connected to System1 via Attribute1.
- The search results show Data Set1 because Process is connected to Data Set1 via Attribute1.
- The search results show Glossary2 because Process is connected to Glossary2 via Data Set1.

Bulk Accept Roles

A user might be assigned several objects, such as glossaries and processes. It is very time consuming for the user to go to each object and accept the role. You can choose to accept the roles in bulk instead of accepting the roles from each object.

You can accept the roles in bulk for a user from the **People** facet. A user with the WebUser, Admin, and SuperAdmin profiles can accept the roles in bulk.

Accepting Roles in Bulk

You can choose to accept all the roles that are assigned to a user in bulk.

1. Click the **People** facet.
2. Click the name of a user for whom you want to accept the roles.
3. In the object, click **Responsibilities**.
4. Select all the roles that are not accepted and click **Edit** > **Accept**.

   The following image shows the sample roles that you can accept for a user:

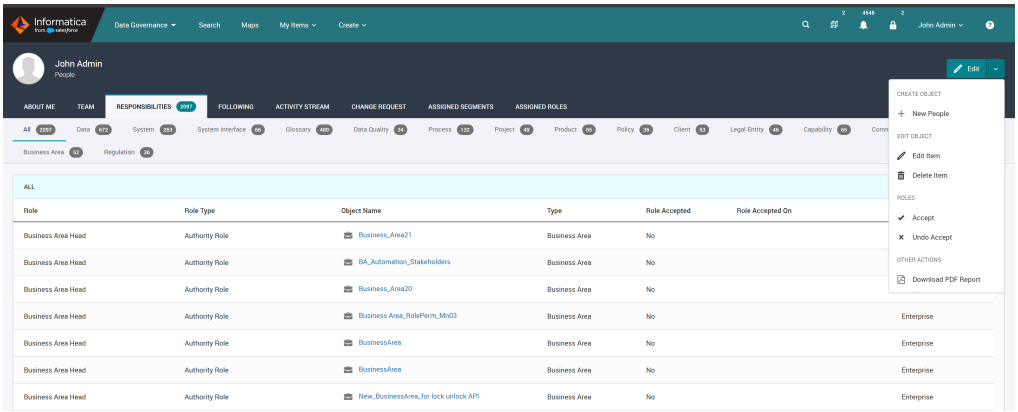

5. If you accepted a role by mistake, click **Edit** > **Undo Accept** to undo the changes.

Bulk Update

You can perform a bulk update to make changes to certain fields for a single object or multiple objects in a facet at a time.

A user with the SuperAdmin profile can perform a bulk update.

In a facet, select as many objects as you want and click **Bulk Update**. In the **Bulk Update Items** section, you can see the selected objects. In the **Definition** section, you can view the fields that you can update for the objects. Use bulk update to make a collection of changes at once. For example, change the **Axon Status** from "Inactive" to "Active" using a single update instead of changing the status from each object.

If you do not see a list of values for a field, type in at least to three characters to view the values. For example, if you want to move attributes ATT1 and ATT2 within data set DatS3 that belongs to Sys1, click the **Data Set** field and type "dat" to view the list of data sets along with the description and the systems they belong to.

Note:

- Axon does not perform bulk updates on locked objects.
- You can't change attributes with a Data Quality rule to a different dataset. To change the dataset associated with the attributes, unlink the attributes from the Data Quality rule.

Important: If you enable default change request for object creation and create a facet object, Axon ignores the Unison bulk updates to the Axon status and lifecycle for facets while the change request remains pending. Impacted facets are dataset, system, glossary, and processes.

Bulk Update Segments

If an object belongs to a segment, you can view the **Segment** field when you bulk update the object. You can select a segment to which you want to assign the objects to.

The following conditions apply if you bulk update a segment for objects:

- An object and its parent must belong to the same segment. When you perform bulk update of an object from the Unison grid, either add a parent object for the object or change the selected segment of the object. Do not change the Parent field and the Segment field values in the same bulk update operation. If you change the Parent field and the Segment field values in the same bulk update operation, Axon displays an error message.
- If you bulk update a single object, the Parent field lists all the objects that belong to the segment.
- If you bulk update multiple objects and if the Parent objects belong to different segments, the Parent field is disabled.
- If you bulk update the segment of an object that has a parent, you need to either remove the parent of the object or first move the parent to the segment.

Bulk Update Roles

When a person leaves an organization or the stakeholders are interchanged, an Admin user might have to remove the person as a stakeholder across multiple objects or reassign multiple roles from one user to another other user in bulk. The process is time-consuming and not efficient when the user is a stakeholder across hundreds of objects and the Admin user has to make changes to one object at a time. Admin requires the ability to update, reassign, change role status, and delete roles in bulk. You can perform a bulk update operation to the **Roles** facet from the Unison grid.

You can perform the following bulk update operations on the **Roles** facet:

Accept Roles

Accepts the roles that are assigned to the user.

Reassign Roles To

Assigns the roles to another user that you select. If role assignment is configured in the Admin Panel, select the user that is assigned to a role from the predefined list.

Change Role Status

Changes the status of the role.

Delete Roles

Deletes the roles that are associated with the objects for a user.

The following image shows the bulk update operations that you can perform on the **Roles** facet:

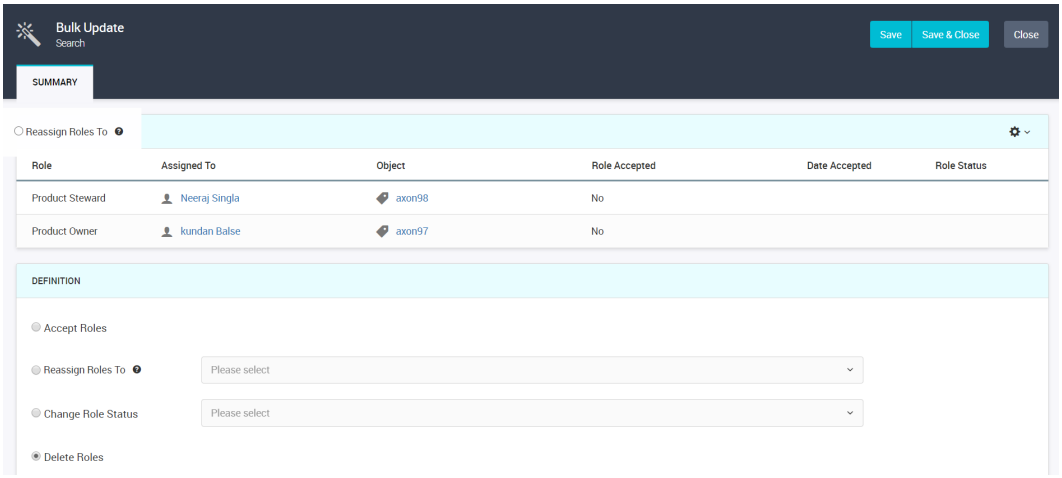

Delete Objects

You can delete an object or delete multiple objects at the same time

To delete an object, it must satisfy the following conditions that are common to all the facets:

- The **Axon Status** of the object is set to `Deleted`.
- The object does not have related objects in the **Impact** tab.
- Axon allows you to delete a facet object with hierarchical, parent-child relationships, but will prompt you to confirm the deletion. If you select **Yes, continue** to confirm the deletion, Axon removes the hierarchical, parent-child relationships and deletes the facet object.
- You can delete a facet object that is linked with stakeholders, but you will be prompted to confirm the deletion. If you select **Yes, continue** to confirm the deletion, Axon removes the stakeholders and deletes the facet object.

The deletion criteria cited above is applicable to the following object types:

- Attribute
- Business Area
- Capability
- Client
- Committee
- Data Quality Rule
- Data Set
- Geography
- Glossary
- Interface
- Legal Entity
- Org Unit

- People
- Policy
- Process
- Product
- Project
- Regulation
- Regulatory Theme
- System

If you try to delete a facet object that has related objects, Axon will delete the related objects only if they meet their respective deletion criteria. You do not require to set the status of these removable objects related to the primary object to `Deleted`. If you try to delete an object that has related objects that do not meet their respective deletion criteria then the deletion will fail and Axon will display an error.

When you configure the object status to Deleted, Axon hides the object for WebUsers from Unison search. After you delete an object, the object is permanently removed from Axon. After an object is deleted, you cannot view the object in the Unison and Quick searches.

The condition to change the status of an object to Deleted does not apply to the Geography and Regulator objects because they do not contain the **Axon Status** field.

Note: You must not update the Axon Status values using the dropdown configuration in the Admin panel.

The following table lists additional conditions for deleting an object that apply to some of the facets:

Facet	Conditions
Attribute	To delete an attribute that is linked with a local data quality rule, Axon validates whether the local data quality rule meets its respective deletion criteria. The following is observed: - If the deletion criteria is met, Axon asks you to confirm the deletion. If you click **Yes, continue**, Axon unlinks the objects related to the local data quality rule. After this, Axon deletes the local data quality rule and the attribute. - If the deletion criteria is not met, Axon will neither delete the local data quality rule nor delete the attribute. To delete the attribute, you must unlink the local data quality rule and the attribute. If you try to delete an attribute that is a target for another attribute, you will be prompted to confirm the deletion. If you click **Yes, continue**, Axon removes the relationship between the two attributes and deletes the attribute you had selected for deletion. You cannot delete an attribute that is a source for another attribute. You must unlink the attributes and try to delete the attribute again. You cannot delete an attribute that is a related to a value list. To delete the attribute, you must unlink the attribute and the value list. If you delete an attribute that is related to a physical field, Axon deletes the physical field and the attribute. When you delete an attribute, Axon unlinks the data sets and glossaries related to it. If you delete an attribute used in the **Measured Against** field of a data quality rule, Axon removes the attribute from the **Measured Against** field list and displays a blank space in its stead.
Data Quality	If the **Impact** tab for a local data quality rule selected for deletion lists any processes, policies, systems, data sets or glossaries, Axon will unlink the related objects and delete the local data quality rule. If you delete a standard data quality rule, then the automatically generated local data quality rules related to it will be deleted simultaneously. You cannot delete an automatically generated local data quality rule without deleting its associated standard data quality rule. **Note:** If an automatically generated local data quality rule is part of an ongoing change request then it will not be deleted when you delete the standard data quality rule it is associated with. If you delete a standard data quality rule that is related to a manually created local data quality rule, only their relationship is deleted. In this scenario, the manually created local data quality rule is not deleted.

Facet	Conditions
Data Set	Deleting a data set also deletes the local data quality rules and attributes associated with it. You will be prompted to confirm the deletion. Axon can delete the linked local data quality rules and attributes only if each object type meet their respective deletion criteria. Deleting a data set also deletes the local data quality rules that do not have any attributes associated with it. You will be prompted to confirm the deletion. Axon can delete the linked local data quality rules without linked attributes only if each object type meet their respective deletion criteria. When you delete a data set, Axon unlinks the systems and glossaries related to it.
Glossary	Axon allows you to delete a glossary with an alias name, but will prompt you to confirm the deletion. If you select **Yes, continue** to confirm the deletion, Axon removes the alias name and deletes the glossary. To delete a glossary that is linked with a standard data quality rule, Axon validates whether the standard data quality rule meets its respective deletion criteria. The following is observed: - If the deletion criteria is met, Axon asks you to confirm the deletion. If you click **Yes, continue**, Axon unlinks the objects related to the standard data quality rule. After this, Axon deletes the standard data quality and the glossary. - If the deletion criteria is not met, Axon will neither delete the standard data quality rule nor delete the glossary. To delete the glossary, you must unlink the standard data quality rule and the glossary. **Note:** You cannot delete a glossary, if it is an input parameter for the **Technical Rule Reference** for a standard data quality rule.
System	Deleting a system also deletes the data sets, local data quality rules and attributes associated with it. You will be prompted to confirm the deletion. Axon can delete the linked data sets, local data quality rules and attributes only if each object type meet their respective deletion criteria. To delete a system that is linked with a local data quality rule with no associated attributes and without any data set, Axon validates whether the local data quality rule meets its respective deletion criteria. If the conditions for deletion are met by the local data quality rule, Axon deletes the system and the associated local data quality rule.

In Unison search, you can use the **Bulk Delete** feature to delete multiple objects of a facet at a time by following the below steps:

1. In Unison search, select the rows that you want to delete, and click on the **Bulk Delete** option.
2. In the **Bulk Delete** page, click **Delete** to permanently delete the selected objects.

The following image shows the **Bulk Delete** page:

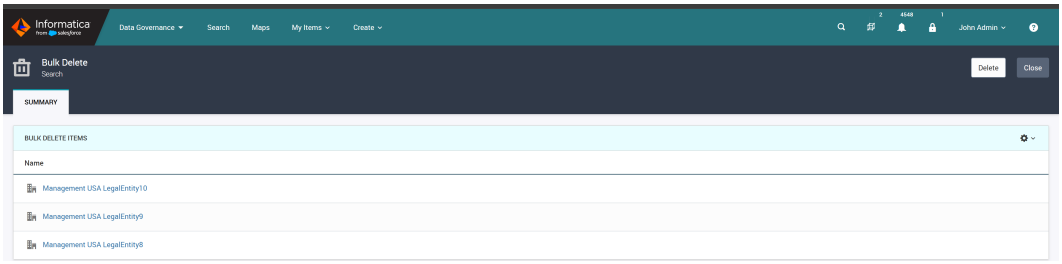

The Bulk Delete option does not appear for the following facets:

- Active Tasks
- Change Requests
- Physical Fields
- Role

Note: When you delete more than 5000 objects using the Bulk Delete feature in Unison search, you cannot use Axon until the deletion operation is complete.

Troubleshooting

To delete an object, Axon validates whether it satisfies the required conditions common for all facets and the additional conditions that vary based on the facet type. If the objects do not satisfy the required conditions, Axon does not delete those objects and displays errors. You can hover over the error icon to view the exact error message.

The error messages are can be categorized into the following types:

- Warning Message:
  Axon displays such messages in situations where the delete operation is possible. These messages give are intended to give you a brief overview on the consequences of deletion.
- Error Message:
  Axon displays such messages in situations where the delete operation is not possible. These messages give are intended to inform you on what is preventing the delete operation from completing successfully. Manual intervention is required to resolve the errors reported in these messages.

The following table lists the most commonly encountered error messages:

Facet	Message	Description
Attribute	This attribute is the target relationship for one or more attributes. If you delete it, Axon will remove its relationships with the associated attributes.	Warning Message. Click **Yes, continue** to remove the relationship between the attributes and delete the attribute you had selected for deletion.
	This attribute is the source for one or more attributes.	Error Message. To delete the attribute, you must remove the relationship between the attributes.
	This attribute is linked to one or more stakeholders.	Warning Message. Click **Yes, continue** to remove the related stakeholders and delete the attribute.

Facet	Message	Description
	This attribute is linked to one or more data quality rules for which the Axon Status might not be set to Deleted.	Warning Message. Click **Yes, continue** to unlink the objects related to the data quality rule associated with the attribute. After this, Axon deletes the data quality rule and the attribute.
	This attribute is linked to one or more data quality rules that cannot be deleted.	Error Message. To delete the attributes, you must remove the relationship between the attribute and the data quality rules.
Data Quality	Deleting the standard data quality rule will remove the relationships with the manually created local data quality rules associated with it.	Warning Message. Click **Yes, continue** to delete the standard data quality rules. In this scenario, the manually created local data quality rules associated with the standard data quality rules are not deleted. Axon removes only the relationship between the standard data quality rules and the local data quality rules.
	Deleting the standard data quality rule will remove the automatically created local data quality rules associated with it.	Warning Message. Click **Yes, continue** to delete the standard data quality rules. The automatically generated local data quality rules related to them will be deleted simultaneously. **Note:** If an automatically generated local data quality rule is part of an ongoing change request then it will not be deleted when you delete the standard data quality rule it is associated with.
Data Set	This data set contains linked attributes that cannot be deleted.	Error Message. To delete the data sets, you must remove the relationship between the attribute and the data sets.
	Deleting this data set will remove the linked attributes.	Warning Message. Click **Yes, continue** to remove the relationship between the data sets and the attributes. After this, Axon deletes the data sets and the attributes.
Glossary	This glossary is an input parameter to one or more data quality rules.	Error Message. To delete the glossary, you must remove the glossary from the **Technical Rule Reference** field of the data quality rules
	This glossary is linked to one or more data quality rules that cannot be deleted.	Error Message. To delete the glossary, you must remove the relationship between the glossary and the data quality rule.
	This glossary is linked to one or more data quality rules for which the Axon Status might not be set to Deleted.	Warning Message. Click **Yes, continue** to unlink the objects related to the data quality rule associated with the glossary. After this, Axon deletes the data quality rule and the glossary.
System	This system is linked to one or more data sets that cannot be deleted.	Error Message. To delete the system, you must remove the relationship between the data sets and the system.
	This system is linked to one or more data sets for which the Axon Status might not be set to Deleted.	Warning Message. Click **Yes, continue** to delete the system and the related data sets.

Facet	Message	Description
	This system is linked to one or more data quality rules that cannot be deleted.	Error Message. To delete the system, you must remove the relationship between the data quality rules and the system.
	This system is linked to one or more data quality rules for which the Axon Status might not be set to Deleted.	Warning Message. Click **Yes, continue** to delete the system and the related data quality rules.

Data Quality Rules

The Data Quality facet displays the data quality rules. You can configure different types of data quality rules to check the quality of the data in your systems. Technical users implement the rules in a third-party data quality product.

You can use Informatica Analyst and Informatica Developer to analyze the source data and metadata. Axon can import data quality information from profiles and scorecards that you define in Informatica Data Quality. You can create profiles to analyze the content, quality, and structure of data sources. Scorecards monitor data quality. You must install the Axon Agent before you can configure technical references to profiles and scorecards in Informatica Data Quality.

Data Quality Report holds the scores or ratings of the data quality rules for a given period. Typically, a set of rows in a table are validated against a data quality rule and the report list the percentage of compliant rows as well as the number of exceptions. The report displays the scores in red, amber, or green color according to the rule thresholds that you have specified in the respective rule.

Some Data Quality systems provide results as exceptions or variances from a perfect score. For example, a 5% value might not meet the rule requirements. Axon requires the data as an achieved score. It only considers values that are in the following format:

- 0 or 1
- Yes or No
- True or False
- Valid or Invalid

When the profile result for a column is in numeric values other than Axon standard, there is no error logged in Axon. Axon updates the volume count result as 0%. When the profile result for a column has string values, then Axon records an error message.

Axon sends you an email when the score for a data quality rule goes below a set threshold. The SuperAdmin user can enable email notifications to report these changes. To enhance monitoring, Axon also sends an email alert to responsible users if a Data Quality rule fails to run when you enable **Run Rule and Retrieve Data**.

Local Data Quality Rules

A data quality rule defined within the context of a System is referred to as a local data quality rule. Only local data quality rules can have scores or reports associated to them. All Data Quality dashboards seen in Axon relate to local data quality rules and reports.

Before you can create a local data quality rule, you must create a data set with at least one attribute. Data quality rules are measured against the attributes in the data set. Create the attributes before you create the data quality rules. You can create local data quality rules manually or by bulk upload.

Standard Data Quality Rules

Large organizations often have departments working independently of each other, using their own data sources and systems. In turn, these functions are unaware that other areas use the same data and hence, set up their own controls and quality measurement. As a result the same data is often measured in different Data Quality tools, systems, and data sets. Where this occurs, it is desirable that similar data is subject to the same quality measurement standards. Axon facilitates this via standard data quality rules.

Standard data quality rules set the guidelines for how anything linked to a standard data quality rule for a data set or attributes needs to be measured. Standard data quality rules are described at the glossary level. Since similar data must be associated to the same Glossary term, it is the ideal place to share common standards. Any local data quality rules controlling attributes linked to this glossary object can therefore be set up against these standards.

Creating Local Data Quality Rules

Create a local data quality rule for a data set. You must have edit permissions on Data Set objects to create a local data quality rule. You provide initial details when you create a new data quality rule. After you save the rule, Axon redirects you to the edit mode where you can provide more details. In both create and edit modes, Axon marks the mandatory fields with a red asterisk. You can also create a data quality rule without adding an attribute, and Axon lists the data quality rule in Unison search.

1. From the Unison search page, open a Data Set object.
2. From the **Actions** menu, click **+ New Data Quality Rule**.

   The **New Data Quality Rule** page opens.
3. In the **Definition** section of the **Summary** tab, configure the following properties:

Option	Description
Name	Required. Specify a name for the data quality rule.
Description	Required. Describe the logic for the data quality rule.
Ref	Unique identifier for each object. Axon automatically assigns a unique reference ID if you leave this field blank.

Option	Description
Type	Required. Select from one of the following types of data quality rules: • Completeness • Accuracy • Consistency • Validity • Timeliness You can enter up to nine data quality rule types using the dropdown configuration in the Admin Panel.
System Measured In	Required. Name of the system in which the rule is measured. This is often the name of the Data Quality profiling or measurement system used for the given data set. **Note:** Axon automatically populates the system name in the **System Measured In** field when you create a local data quality rule. You cannot modify the system name when you create or modify the local data quality rule.
Measuring Method	Required. How the data quality rule is evaluated. You can specify one of the following options: • System Function. The rule is measured by a data quality system, such as Informatica Data Quality. • Technical Script. The rule is measured by a script that is manually run by an analyst. • Business Extract. The rule is measured on data that is exported for a particular business case.

4. In the **Optional Fields** section of the **Summary** tab, configure the following properties:

Option	Description
Measuring Method Description	Optional. Add relevant information about the measurement process.
Population	Optional. Describe the population in scope for the rule.
Technical Description	A technical description of the rule logic. Can include SQL or pseudo SQL.
Technical Rule Reference	A reference link that associates local data quality rule to profile and scorecard. A clickable link appears when you configure the Analyst tool URL in the **System Settings** section of the Admin Panel.

5. In the **Attribute Items in Measure** section of the **Summary** tab, configure the following optional fields:

Option	Description
Attribute	Select the name of the attribute that the rule is measuring. Click the **Add** button to select multiple attributes.
Measured Against	Optional section for rule types only to show against which attribute in the current data set is being measured. Click the **Edit** icon. In the **Add Attribute** dialog box, you can select a system, data set, and attribute values based on the segment that are assigned to you. **Note:** If a data set belongs to a segment and you are not assigned to that particular segment, you cannot view **Measured Against** field.

6. Click **Add Item** if you want to add more attributes to measure the data quality rule against. Informatica recommends that you measure only one data quality rule against one attribute.
7. In the **Classifications** section of the **Summary** tab, configure the following properties.

Option	Description
Axon Status	Status of the data quality rule in Axon. Select one of the following values: • Active • Inactive • Pending Review • Obsolete • Deleted If you want to delete a standard data quality rule, you need to set the Axon Status to Deleted.
Lifecycle	Lifecycle status of the object. Select one of the following values: • Active • Draft • Obsolete
Axon Viewing	Choose if the data quality rule is public or non-public.
Criticality	Level of criticality . Select from one of the following options: • Low • Medium • High
Frequency	How often the rule is measured. Select one of the following values from the drop-down menu: • Daily • Weekly • Monthly • Quarterly • AdHoc • Bi-Weekly
Automation	How automated the Data Quality measurement process is. Select from one of the following options: • Fully Automated • Partially Automated • Manual • Unknown
Green Target	Enter this as a number from 0 to 100 to reflect the proportion of the measured data has achieved this level of performance Do not enter characters e.g. %. Decimal Points are acceptable, although results are rounded. Some Data Quality measurement systems report deviation from a perfect score rather than stating the actual score - do not enter as deviation, i.e. if 5% deviation is reported, enter '95'
Amber Target	A number from 0 to 100 that indicates the threshold value for amber color.

8. Click **Save and Close**.

Linking Profiles and Scorecards to Local Data Quality Rules

You can link data quality rules to columns in Informatica Data Quality. Informatica Data Quality runs a profile or scorecard which you define against the data in a column or metric. Axon fetches the profile score or scorecard data and displays it as a report or dashboard in the data set, data quality rule, or system.

You must create and save a data quality rule before you link profiles and scorecards to the rules.

1. From Unison search, open a data set object.
2. In the **Data Quality** tab, click the **Rules** sub-tab.
3. In the **Ref** column, click the data quality rule that you want to edit.

   Axon displays the data quality rule.
4. Optionally, search for a data quality rule from Unison or open the Data Quality facet in Unison to see existing rules.
5. Click **Edit**.
6. In the **Defintion** section of the **Summary** tab, click the icon for the **Technical Rule Reference** field.

   Axon displays the **Select Technical Rule Reference** dialog box.
7. Choose **Scorecard** or **Profile**.
8. Select a project from the list of projects that appear. The list of projects is from the Model Repository Service in the Informatica domain.
9. Select a scorecard or profile. Based on the selection, choose a column or metric.
10. In the **Classifications** section, select the frequency under **Basic Classifications**.
11. Select a frequency and configure the scheduling details based on the frequency that you selected. Axon retrieves scores from Informatica Data Quality based on these parameters.
12. Select **Run Rule and Retrieve Data** for Axon to run the profile or scorecard in Informatica Data Quality at the scheduled frequency. If you do not select **Run Rule and Retrieve Data**, Axon fetches the latest data available in Informatica Data Quality.

    Note: If you select **Run Rule and Retrieve Data** and the rule fails, Axon sends an email notification to the stakeholders of the Data Quality rule. The email contains the rule name and a link to the rule's page.
13. Click **Save and Close**.

When you associate a profile or scorecard to a local data quality rule, you can select the **Run Rule and Retrieve Data** check box. If you select the check box, make sure that you choose the option for all local rules to which you associate the same profile or scorecard. Conversely, if you do not select the check box for a local data quality rule, make sure that you do not choose the option for all local rules to which you associate the same profile or scorecard.

If you do not choose the **Run Rule and Retrieve Data** check box for any local rule, make sure that you run the rule manually once so that Axon can retrieve and display the scores at the next scheduled interval. If you do not run the rule manually, Axon might not have any score to display for the rule at the next scheduled interval.

Enhance Local Data Quality Rules

Add information to data quality rules after you create and save the rule. You can update the existing data to provide more information or link it to other items in Axon.

You can view the Technical Rule Reference in the Data Quality facet within Unison. You can easily access the relevant information about Data Quality. When you export data with the Unison's grid export functionality, the information gets included in the output files. You can download the files in the PDF, Excel, or CSV formats to view the comprehensive details, including the Technical Rule Reference.

Note: Technical Rule Reference property enables you to link Data Quality rules to specific rule specifications and scorecards.

All users of Axon can view the details in the data quality rule objects. Only users with permissions on individual items can make edits. Users with no edit rights may be able to make associations to an item if they hold edit rights against other item types.

You can add more information to a data quality rule in the following tabs.

Stakeholder Tab

Displays a list of stakeholders and followers for the data quality rule.

You can view information about stakeholders in the following sections:

- Direct Stakeholders. Responsible for providing, defining or maintaining the item. The users receive email notifications for events related to the data quality rule, such as run failures.
- Stakeholder Community. If this item is connected to any other items in Axon, the stakeholders of those connected items collectively make up the wider stakeholder community.

Report Tab

Displays reports and results about the data quality rules. You can upload data or manually add data here. Displays historical scores for the data quality rule. Axon considers only the latest score for calculation in the Data Quality dashboard. The same report is displayed in the Data Quality Dashboard in the **Data Quality** tab of a data set.

You can view information in the following sections:

- Data Quality Results. Displays a chart of data quality scores for 100 records by default. You can apply a filter based on the number of records or choose a date range to view the **Data Quality Results** chart. If you choose to filter based on the number of records, enter a number and click **Apply**. If you do not enter any value, Axon loads the chart with all the records. If you choose to filter based on the date range, choose **From Date** and **To Date** values, and click **Apply**.
- Data Quality Reports. Gives greater detail on all data quality reports added for the rule. Axon applies a limit of 100 reports when the grid loads.

Relationships Tab

Summarises information on Data Quality into the following sub-views:

- Standardised Data Quality Rules
- Non-Standardised Data Quality Rules

Impact Tab

The Impact tab shows how connected an item is across many other facets.

Create a Standard Data Quality Rule

Create a standard data quality rule in a Glossary object. You must have edit permissions on the Glossary object.

1. From Unison search, open the Glossary object for which you want to create a standard data quality rule.
2. Click **Edit**.
3. From the Actions menu, click **New Standard Data Quality Rule**.

   The **New Standard Data Quality Rule** tab appears.
4. In the **New Standard Data Quality Rule** tab, specify the properties of the standard rule. You can enter the basic properties of the rule, the rule type and status, and the settings for generating the rule scores. To

know more about each property, see the "Create a Standard Data Quality Rule" on page 227 topic in the *Automate Data Quality Rules* chapter.

5. Click **Save and Close**.

Associating Local Data Quality Rules to a Standard Data Quality Rule

If an existing local data quality rule that applies to an attribute is associated with the Glossary object, you can view it in the Local Data Quality Rules grid in the **Data Quality** tab of the Glossary object.

Define local data quality rules before you associate a local data quality rule to a standard data quality rule.

1. From Unison search, open the Glossary object where you want to associate a standard data quality rule.
2. Click the **Data Quality** tab.
3. Click the **+** icon below the local data quality rule to copy it as a standard data quality rule.

Manually Add Data Quality Report Data

Manually add Data Quality report data by editing a local data quality rule. You cannot add scores to a standard data quality rule.

1. From Unison search, open a data set object.
2. In the **Data Quality** tab, click the **Rules** sub-tab.
3. In the **Ref** column, click the data quality rule that you want to edit.

   Axon displays the data quality rule.
4. Click the **Report** tab.
5. Click **Edit**.
6. Configure the following properties:

Option	Description
Report Date	The date of the Data Quality report in the format DD/MM/YYYY. This is not the date the reports are uploaded to Axon, it is when the evaluation of the data was performed in your DQ system. Multiple reports for the same item and multiple items can be uploaded at the same time.
Result	The score expressed as a number between 0 and 100, of items that meet the expectations of the quality rule. Axon displays this number as a percentage. Do not use a % sign when entering data. You can enter scores expressed with decimal places. Most Axon screens round off the score with a decimal value.
Report URL	Link to the full report generated by the Data Quality system.
Exception Count	Some Data Quality systems report the number of records that did not meet standards. Specify that information.
Volume	Number of observations in the report.

Option	Description
Threshold	Required. Enter a value between 0 to 100. Indicates the threshold value for the Data Quality score. Enter a value between 0 to 100. Data Quality scores below the threshold value are highlighted in red in the Data Quality report. Data Quality scores between the threshold and target value are highlighted in amber in the Data Quality report.
Target	Required. Enter a value between 0 to 100. Indicates the target value for the Data Quality score. Data Quality scores above the target value are highlighted in green in the report. Special characters such as % are not valid. You can enter decimal numbers based on which the results are rounded off. Few Data Quality measurement systems indicate deviation from a perfect score instead of providing the actual score. If the deviation is 5 %, enter '95' instead of the deviation percentage.

7. Click the **+** icon to add another row.
8. Click **Save and Close**.

Data Migration

You can migrate all or specific Axon objects and the related objects across environments. For example, you might have a development, testing, and production environment in your organization. You can migrate the objects, roles, and relationships from a testing environment and import the migrated data into a development environment. An Admin or a SuperAdmin user can perform the data migration task.

To view the **Bulk Migrate** option on the Unison search grid, a SuperAdmin user has to enable data migration from the Admin Panel.

You cannot perform data migration for the following facets:

- People
- Change Requests
- Roles
- Active Tasks
- Physical Fields

Note: You can migrate roles for each facet but you cannot migrate other facets based on the **Roles** facet.

When you click **Bulk Migrate**, you can choose to migrate all or specific objects for a facet. The following image shows the bulk data migration options:

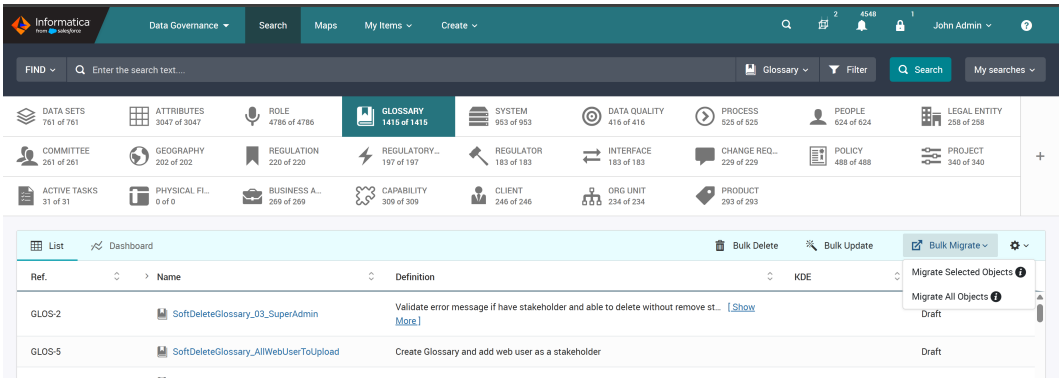

Bulk Migrate Objects

Use the following options to bulk migrate objects from Unison search:

Migrate All Objects

Migrate all objects in a facet. When you click **Migrate All Objects** for a facet from Unison search, a new tab opens and Axon initiates to export all objects and downloads the `Axon_datamigration.zip` file for the facet.

Migrate Selected Objects

Migrate specific objects in a facet. Select the objects that you want to migrate and click **Migrated Selected Objects**. The **Bulk Migrate** page appears with the list of selected objects and related objects. Depending on the facet type, you can choose to migrate the related objects. The dependent objects for the selected objects are migrated by default. For example, if you choose to migrate Data Set objects, you need to migrate the System and Glossary objects. The System and Glossary fields appear as read-only when you select and migrate Data Set objects. You can choose to migrate additional related objects.

The following image shows a sample of selected data sets for migration:

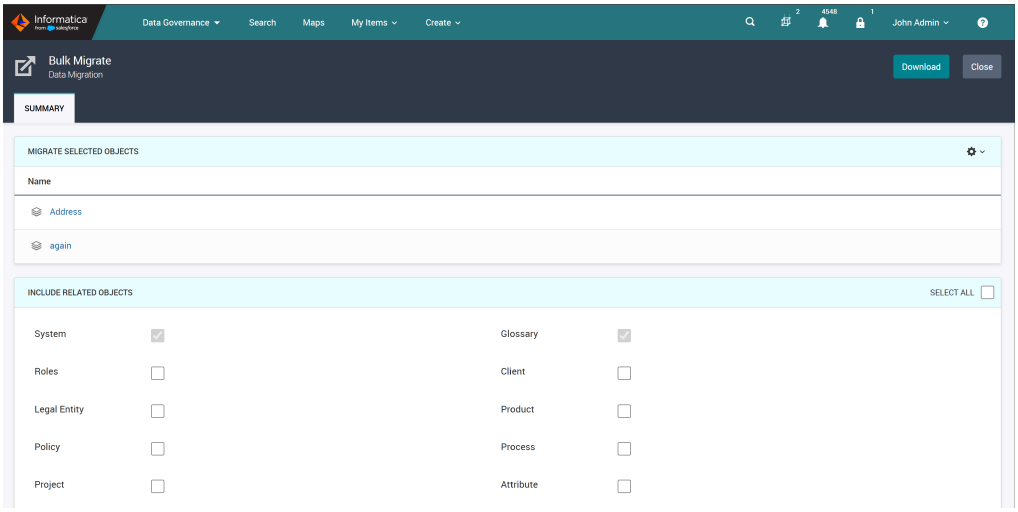

Guidelines for Data Migration

When you perform a data migration task from a source instance to a target instance, you need to follow some guidelines for some objects, fields, and the object relationships.

Follow the guidelines when you perform a data migration task:

- Before you import data, it is recommended that you take a backup of the target instance.
- Before you import data, create stakeholders, roles, custom fields, dropdown values, and segments in the target instance according to the source instance.
- To import Data Set X Process, Data Set X Policy, or Data Set X Project relationships, you must create a relationship of process, policy, or project with the glossary and system in the target instance.
- To migrate Regulator x Regulation relationships, a value must be present in the **Regulator Reg Ref** field.
- For a local data quality rule, you need to create System, Glossary, Data Set and Attribute objects in the target instance.
- For a standard data quality rule, you need to create a Glossary object in the target instance.

Exported Data

When you perform a data migration task from a source instance to a target instance, you need to understand the scope of exported data.

When you migrate objects for a facet from Unison search, the exported file contains the active facet objects and their dependent and related objects.

View the following exported details for the active facet objects:

- All default and custom fields that are available in the bulk upload mapping file.
- Dependent objects such as enforced relationships and parent objects.
- Related facet objects.
- Roles that you choose to include.

View the following exported details for the dependent objects:

- All default and custom fields that are available in the bulk upload mapping file.
- Dependent objects such as enforced relationships and parent objects.
- Roles that you choose to include.

View the following exported details for the related objects:

- All default and custom fields that are available in the bulk upload mapping file.
- Dependent objects such as enforced relationships and parent objects.
- Roles that you choose to include.

For example, if you choose to migrate objects for the Attribute facet, the dependent data sets are exported. If data sets are exported, the dependent systems and glossaries are also exported. If attributes are related to glossaries, the related glossaries are also exported.

Limitations on Data Migration

The following limitations apply for data migration:

- You cannot export indirect relationships.
- You cannot export objects from the People facet.
- If an active facet does not have roles, the roles for related facets are not exported.
- For Regulator x Regulation relationships, you can migrate the objects that are created in bulk but not the objects created through Axon interface.
- If you migrate more than a total of 160,000 objects, the amount of memory might exhaust and errors appear. Apply Unison filters to narrow down to active facets and then migrate data for better results.

CHAPTER 4

Workflows and Change Requests

This chapter includes the following topics:

- Workflows and Change Requests Overview, 143
- Use Workflows, 143
- Use Change Requests, 145
- Example of Using Workflows and Change Requests, 146
- Create a Default Workflow, 147
- Automatic Change Requests, 147
- Create a Change Request Manually, 149
- Assign a Workflow to a Manual Change Request, 150
- Review a Change Request, 150
- Assign a Delegate in a Workflow, 152
- View Audit Trail of a Change Request, 152
- Periodic Review of Objects, 152
- View Active Tasks of Change Requests, 153
- Create a Custom Workflow, 154

Workflows and Change Requests Overview

You can create workflows that Axon implements when users want to create or modify objects. A workflow specifies the steps to create or modify an object, and the stakeholders that must be involved in providing inputs for the change process. A user who wants to create or modify an object must raise a change request and select a workflow for the object.

Use Workflows

You can define controls for creating and modifying objects in Axon using a workflow. A workflow is a series of predetermined steps that a SuperAdmin can define for creating or modifying an object.

A workflow ensures that the right people have the opportunity to provide input, challenge, and approve matters related to the object that is created or modified. At each step in the workflow, Axon notifies the stakeholders that they must make a decision about the object. If the workflow for a change request requires

the role of approvers at various stages of the lifecycle, the approvers must approve or reject the object for the workflow to move to the next stage.

The series of steps in a workflow ensure that objects are created in Axon according to the data governance principles in your organization. Only users with the proper role and access can create or modify Axon objects. The workflows available for a change request might vary depending on the facets.

Axon includes a Business Process Model and Notation (BPMN) 2.0 workflow component to support data governance and change control functionality.

You can create default and custom workflows in Axon. A SuperAdmin user can define a default workflow for a facet, and the workflow applies to all the objects in the facet. Apart from the default workflows that the SuperAdmin has configured, an object stakeholder can define a custom workflow for a specific object within a facet.

Stakeholders in a Workflow

The stakeholders that can participate in a workflow depend on the object facet that a user wants to modify.

Facet Stakeholders

The roles that the administrator has configured for a facet become the workflow stakeholders for the facet objects. For example, if the SuperAdmin user has configured the Project Manager and Project Steward roles for the Project facet, then users that have the Project Manager or Project Steward responsibilities can participate in workflows to create or modify Project objects.

When a user raises a change request for an object, you can see the stakeholders of the change request in the following locations:

- Open the object for which a change request is created, and go to the **Stakeholders** tab.
- Open the change request from the Change Request facet, and go to the **Stakeholders** tab.

Note: To assign or update any stakeholders, cancel the current change requests for the object before you raise a change request for the new or updated stakeholder assignments in the Stakeholders tab.

To create stakeholder roles for a facet, see the *Axon Data Governance Administrator Guide*.

Requestor

Any user in the organization, including users that are not stakeholders for a facet, can raise a change request to create or modify an object. Such a user is called a Requestor. In addition to the facet stakeholders, you can add the Requestor as a stakeholder in the swimlanes of a workflow.

To see the Requestor of a change request, go to the Change Request facet and see the **Created By** field in the **Summary** tab.

Note: A change request can have only one Requestor person. After a change request is raised by a Requestor, you cannot choose another person as the Requestor.

Use Change Requests

A change request facilitates communication and discussion between the object stakeholders and the wider Axon community.

Raise a change request to provide a controlled and audited change approval process. Assign a workflow to the change request, and run the workflow to activate the change request. The types of change requests that you can create depend on the configuration of each instance of Axon and the configured workflows. Any user that logs in to Axon can raise a change request.

To create a change request, you can use the native Axon change request system or an external system that the system administrator has configured. Axon supports the ServiceNow ticketing system.

In Axon, you can create change requests manually, or the Axon Administrator can configure automatic change requests.

Manual Change Request

Raise a change request manually if you want to involve stakeholders when you create or modify an Axon object. To raise a manual change request, see "Create a Change Request Manually" on page 149.

Automatic Change Request

If the Axon administrator has configured automatic change requests, Axon automatically starts a change request process when you create or modify an object.

For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.

You can find or track a change request in the following locations:

- Unison Search. Change Requests have their own facet. Each change request is linked to the object that they belong to.
- Object View. View a change request in the **Change** tab of an object.
- My Account. Object stakeholders that are a part of change request workflow can find a list in the **My Account | Change Request** view.
- Dashboard widgets. In the **Change Requests** widget, view the change requests that are assigned to you and the change requests you have raised. In the **Pending Tasks** widget, see your pending tasks in workflows where you are a stakeholder.

After a task starts in the workflow of a change request, Axon displays the task in the **Active Tasks** facet on the Unison search.

Change Request Statuses

A change request can be in one of the following statuses:

Pending Start

You have created a change request, but not started it. Assign and run a workflow to start the change request. If the SuperAdmin has configured mandatory workflow approvals, check for pending stakeholder roles, assign the missing stakeholders to the object, and submit your changes to start the change request.

Running

The change request has started, and the object moves through the stakeholders that are defined in the workflow for the object.

Completed

The change request is complete. The object has moved through all the stakeholders and reached the end of the workflow

Cancelled

The change request was cancelled in the middle of the workflow, and the object cannot be created or modified in Axon

Invalid

The change request has become invalid because approval for the object is no longer required.

Example of Using Workflows and Change Requests

In your organization, the data governance principles require that only a glossary steward can create or modify glossary objects, and every object must be approved by a glossary definition owner.

Roles

To create or modify a glossary term, a SuperAdmin user must create the following roles in Axon:

- A **glossary steward** to create the Glossary object
- A **glossary definition owner** to approve the Glossary object

Workflow

The SuperAdmin must also create a workflow that uses the glossary steward and glossary definition owner roles.

The following diagram represents the workflow for this example:

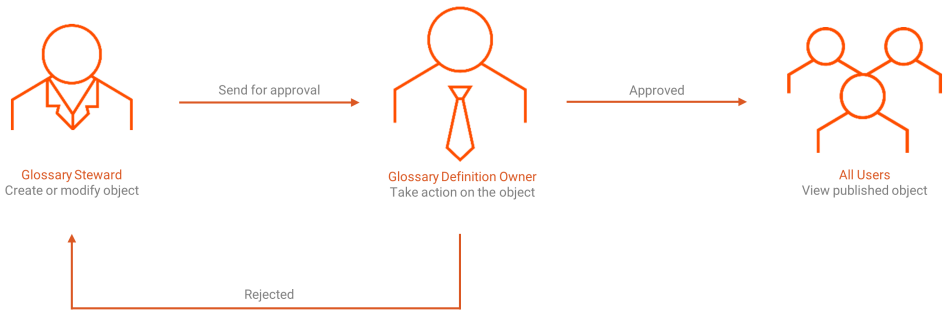

The glossary steward logs in to Axon and creates or modifies a glossary term. Axon does not save the term as approved. Instead, Axon sends the object to the glossary definition owner for approval. The glossary definition owner logs in to Axon and sees the notification for the object approval. If the owner approves the definition, Axon publishes the term to make it available to all users. If the owner rejects the definition, Axon sends the object back to the glossary steward. The glossary steward can now modify the object and send it again to the definition owner for approval.

Change Request

When a glossary steward creates a glossary term, Axon starts a change request according to the workflow that the SuperAdmin has specified for the Glossary facet. According to the workflow, the object moves from the steward to the definition owner. If the glossary definition owner approves the term, Axon publishes the object, and the change request is complete.

For more information on the related administrative tasks, see the *Axon Data Governance 7.3.8 Administrator Guide*.

Create a Default Workflow

Default workflows are specific to a facet and apply to all the objects in the facet. Each facet can have multiple default workflows. If you want multiple objects to use the same workflow, create a default workflow for the facet.

If you want different workflows for different object types, you can create the workflows for the facet types. For example, you can specify a workflow for change requests created for Glossary domain objects, and another workflow for change requests created for Glossary term objects.

Only users with the SuperAdmin profile can create default workflows for facets and facet types. For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.

Automatic Change Requests

The Axon Administrator might configure change requests to start automatically when you create or modify an object. An automatic change request starts a workflow that requires mandatory approval for the object. This ensures that the right stakeholders can provide inputs to the object, and all changes are approved by the authorized people.

To configure an automatic change request, see the *Axon Data Governance 7.3.8 Administrator Guide*.

Note: If there are automatically generated change requests that are in the Pending Start state for an object, a stakeholder or Admin or Super Admin user can use the bulk upload operation to assign several stakeholders to that object. In this situation, if all the required stakeholders are uploaded, as soon as the stakeholders are assigned to the object, the default workflow starts and the change request moves through the steps defined in the workflow. This is applicable for bulk uploading stakeholders using the Microsoft Excel template or API.

Facets that Support Automatic Change Requests

An administrator can configure Axon to create automatic change requests when users modify the following tabs and sections for facet objects:

- Glossary
  - **Summary** > **Definition**
  - **Summary** > **Classifications**
  - **Summary** > **Strategic Source**
  - **Summary** > **Documents**
  - **Relationships** > **Hierarchy**
  - **Impact**
- System
  - **Summary** > **Definition**
  - **Summary** > **Classifications**
  - **Summary** > **Data Content Summary**
  - **Summary** > **Documents**
  - **Impact**

- Data Set
  - **Summary** > **Definition**
  - **Summary** > **Classifications**
  - **Summary** > **Documents**
  - **Attributes**
  - **Relationships** > **Inbound Relationships**
  - **Relationships** > **Outbound Relationships**
  - **Values**
  - **Impact**
- Process
  - **Summary** > **Definition**
  - **Summary** > **Classifications**
  - **Summary** > **Process Predecessors**
  - **Summary** > **Documents**
  - **Components**
  - **Impact**

Axon creates automatic change requests when you create, modify, or delete objects from the Axon interface. If you use bulk upload templates to create, modify, or delete objects, Axon automatically raises change requests.

Enterprise Data Catalog Facets

You can configure automatic change requests to trigger for Axon systems that you create while you link them to Enterprise Data Catalog resources. You can also configure automatic change requests to trigger for Axon data sets and attributes that you create or edit while you link them to Enterprise Data Catalog physical fields. An automated change request is triggered when you create systems, create data sets and attributes, and edit existing data sets to create attributes from the following areas:

- Resources
  - When you manually link an Axon system to an Enterprise Data Catalog resource from the **Create** > **Manage Catalog Links** > **Resources** page.
- Physical Fields
  - When you manually link an Axon attribute to an Enterprise Data Catalog physical field from the **Create** > **Manage Catalog Links** > **Resources** page.
  - When you manually link all the Enterprise Data Catalog physical fields of a parent at once to Axon attributes from the **Create** > **Manage Catalog Links** > **Resources** page.
  - When you link an Axon attribute to an Enterprise Data Catalog physical field from the **System** > **Enterprise Catalog** > **Physical Fields** page.
  - When attributes are onboarded into data sets during automated onboarding.

Create a Change Request Manually

Raise a change request to create, update, enhance, or request information for an Axon object. You can start a change request when you modify a default field or custom field.

The SuperAdmin must configure a workflow for the object facet in the Admin Panel.

1. Open the object for which you want to raise a change request.
2. In the **Change** tab of the object, click the **Change Request** tab.
3. Click **Edit** > **Raise Change Request**.

   The **New Change Request** page appears.
4. Configure the following properties to define a change request:

Field	Description
Title	Provide a short, meaningful title for the change request.
Type	Select the option that best describes the type of change request. You can either request for a change or request for information.
Summary	Provide a full description to explain why you want to raise the change request. The summary must contain enough information for stakeholders to assess the change request. A change request might be rejected if the details are not sufficient.
Parent	Select a parent name if the change request is part of a collection of related requests. You can associate the change request as a child of the parent change request.

5. Configure the following properties to classify a change request:

Field	Description
Severity	Select the severity of the change request. You can select a low, medium, or high severity.
Urgency	Select the level of urgency for the change request. Select low, medium, or high.
Estimated Benefit	Enter the amount of estimated benefit after you make the change. Expressed in GBP.
Estimated Cost	Enter the amount of the estimated cost to make the change. Expressed in GBP.

6. Click **Save and Close**.

Axon creates a change request for the object, but does not start the change request. To start the change request, you must assign a workflow to the object. To select a workflow, see "Assign a Workflow to a Manual Change Request" on page 150. You can view the Summary, Relationships, Stakeholders, and History tabs of the change request that you created. .
Axon allows you to start an workflow automatically after you raise the change request. To do this, the SuperAdmin or Admin user should configure the change request type from the **Admin panel > Default Workflow** page.

Note:

- If you create or modify an object for which you have configured change requests, Axon does not start the change request if you do not assign the required stakeholders. To start the change request, open the object, add the stakeholders in the **Stakeholders** tab, and click **Save and Submit**.
- If a change request is completed or cancelled, you cannot modify the change request.
- If there are one or more manually created change requests that are in the Pending Start state for an object, a stakeholder or Admin or Super Admin user can use the bulk upload operation to assign several stakeholders to that object. In this situation, as soon as the stakeholders are assigned to the object, the default workflow starts and the change request moves through the steps defined in the workflow. This is applicable for bulk uploading stakeholders using the Microsoft Excel template or API. Also, the administrator must have configured a default workflow for the change request type for the facet.

Assign a Workflow to a Manual Change Request

After you create a change request, you must assign a workflow to the change request. To start the change request process, you must start the workflow. You can choose a default or custom workflow.

The following prerequisites apply to change requests that use workflows:

- The SuperAdmin has created the workflows in the Admin Panel, and the workflows must be in the active status.
- In the Admin Panel, the SuperAdmin has enabled default change requests for each facet. If the SuperAdmin does not enable default change requests, you can create or modify objects without using approval workflows.

1. Open the object for which you want to create a change request.
2. In the **Change | Change Requests** view, click the change request for which you want to run the workflow.

   Before you open the change request, you can see that the change request is in the **Pending Start** state.
3. In the **Summary** tab, select a workflow from the list.

   You can view the list of custom and default workflows that are applicable for the object.
4. To start the change request and run the workflow, click **Start**.

   Note: A person with the Requestor role cannot start a change request.

   Axon displays a message that the workflow is initiated. The stakeholder can add comments and complete the tasks based on the tasks specified for different roles in the workflow.

Review a Change Request

If you are a stakeholder in a change request process, you can provide your inputs for creating or modifying an Axon object. Your role in the change request is determined by the workflow that the Axon Admin or SuperAdmin assigns to the object. Review the change requests assigned to you and provide your inputs.

For more information on workflows, see "Use Workflows" on page 143.

1. Open the object with a change request that you want to review.

   The object is in the **Running** state.

2. In the **Change** tab of the object, click the **Change Request** sub-tab.

   The page displays the list of objects for which you have change requests.

3. Click an Axon object in the list to open the object.

   The object opens in a new window, and the **Summary** tab is displayed by default.

4. Verify the information in the **Changes to Review** section. The **Changes to Review** section displays the changes that stakeholders have made to the object during the lifecycle of the change request.

   Note: The **Changes to Review** section is displayed for change requests that are in progress. If a stakeholder completes or cancels a change request, the **Changes to Review** section does not appear.

5. Review your role in the workflow, and provide your inputs on the Axon object. For example, if the change request requires that you start a workflow, you might have to scroll down to the **Workflow** section of the page and click **Start**. If you are participating in a workflow that is started by another user, you might have to click **Approve**.

   Note: You can see the **View Original** and **Viewing Changes** views for the objects if you are a stakeholder of the object, a user with edit permission for all objects, the Axon Admin, or the Axon SuperAdmin user.

   If the **Summary** tab of the object is under revision, the top of the page displays the status of the object. You can see whether the page displays the original version or modified version of the object.

   You cannot see changes in the **Viewing Changes** view for the following sections:

   - **Summary** > **Strategic Source**
   - **Summary** > **Hierarchy**
   - **Relationships** > **Hierarchy**
   - **Relationships** > **Map**
   - **Stakeholders** > **Stakeholder Community**

   If you modify the **Stakeholders** section and select **Viewing Changes** view, the **Stakeholder Community (Based on Previous State)** section displays the stakeholders before the change request was started.

   If you modify the object hierarchy and select the **Viewing Changes** view, the **Hierarchy (Based on Previous State)** section displays the object hierarchy before the change request was started. Complete the workflow to see the updated hierarchy.

6. To complete the workflow, click **Complete** in the **Classifications** section of the page.

   Note: A person with the Requestor role cannot complete a workflow.

   If a SuperAdmin user has configured auto-completion of change requests, Axon automatically marks the change request as complete when the object reaches the end of the workflow.

If you have new Attribute objects that are in the middle of a workflow process, Axon does not assign reference numbers to the objects. When you go to the **Attributes** tab of the related data set, the **Ref** column for the Attribute objects do not display any value. In such cases, you cannot bulk update the objects. After the workflow is complete, Axon assigns reference numbers to the objects, and you can then bulk update the Attribute objects.

If you move attributes from one data set to the another data set, the change request is created for the second data set for the following conditions:

- Automatic change request is enabled.
- The attribute is bulk updated.

Assign a Delegate in a Workflow

When a change request workflow is stuck, an Admin user or an object stakeholder with edit permissions can help progress the workflow.

A workflow gets stuck due to the following reasons:

- The responsible user might not be available to complete the action in the active workflow step.
- A required stakeholder role might be vacant during the life of the change request.

To allow the progress of a workflow, you can add a user to the required role as a delegate of an existing role if the role is vacant. Allow the user take the appropriate action, and approve the step when complete. Then, remove the user from the role for the task. You must add an entry to the **Discussion** section of the Change Request to record the actions that you take. You can also view the updates to the change request from the **History** tab of the Change Request.

Note: When you try to add a user as a delegate to a stakeholder of a workflow, you might encounter an error. To solve this, remove the stakeholder that you want to assign as the delegate. After you remove the stakeholder from the workflow, add the stakeholder again and add the delegate.

For more information about how you can add a delegate to a workflow, see "Assign a Delegate to an Object" on page 111.

View Audit Trail of a Change Request

When you run a workflow, Axon notifies the stakeholders of the tasks that they need to perform as part of the change request. A stakeholder can review and take necessary actions for the change request. After you start the workflow, the workflow diagram shows the active task in green color.

The **Discussion** section of the workflow contains an audit trail of all the steps for which actions are taken or discussions are held. For example, you can see the task name, status, description, and due date for a user task. You can use the @ special character to address the user in a discussion. When a user is assigned to perform a task, Axon invites the user to post the results and shows the relevant actions that the user needs to perform to complete the task. If a user task is followed by a gateway, the user has an option to capture the decision made as part of the user task.

After all the responsible stakeholders complete the tasks, the designated stakeholder can close the change request.

Periodic Review of Objects

You can configure Axon to periodically review objects to ensure that the objects are up-to-date according to the data governance requirements of your organization.

You can create the periodic review for the following facets:

- Data Set
- Glossary
- Process

- System

When you enable periodic review for the objects, Axon starts a change request according to the workflow configured for the facet. The automatic change request provides opportunity to all the stakeholders to review and update objects regularly. You can choose to start the review of the objects at different frequencies, such as monthly, quarterly, and yearly. When periodic review of objects start, Axon sends you email notifications.

You can find and track a periodic review details in the following locations:

- Unison Search.
- Object View. View a periodic review date in the **Classification** tab of the object.

Users with the SuperAdmin profile can configure periodic review for the objects. To configure a periodic review, see the *Configure Periodic Review of Objects* topic in the *Configuring Axon* chapter of the *Axon Data Governance 7.3.8 Administrator Guide*.

View Active Tasks of Change Requests

You can view the active tasks that are defined within the workflow of a change request. Once a task starts, it appears under the **Active Tasks** facet. After the task is complete, it disappears from the **Active Tasks** facet.

To view the **Active Tasks** facet on the Unison search page, click the **+** icon and select **Business & Change** > **Active Tasks**. You can view outstanding workflow tasks from the **Active Tasks** facet.

You can search for active tasks that are associated with objects or individuals. When you perform a Unison search, you can apply filters based on due days and due dates for the **Active Tasks** facet. You can apply the following filters:

- Due Date From
- Due Date To
- Due In (days)
- Due Date Overdue

You can save searches for active tasks and add widgets to appear as a number count or table in a dashboard. Use the active tasks dashboard to monitor the outstanding tasks.

The following image shows the **Active Tasks** facet view on Unison search:

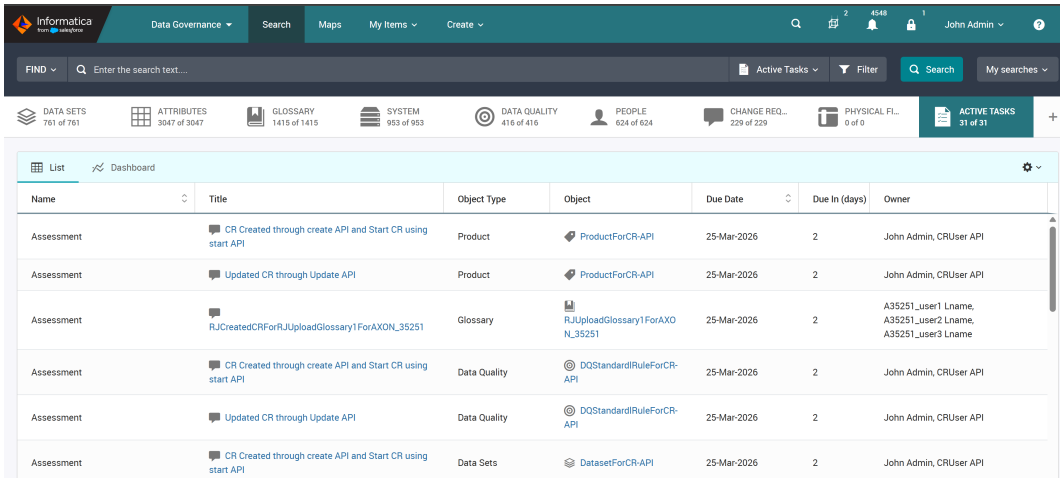

You can view the following task information on the Unison grid:

Name

Name of the active task.

Object Type

The type of the object in which the active task is present.

Object

The object that contains the active task.

Due Date

The date by which the active task needs to be completed.

Due Days

The number of days by which the active task is due.

Owner

The owner of the active task within the object.

If a name is not provided for a task in a workflow, the task does not appear in the **Active Tasks** facet. If a due date is not specified for a task in a workflow, the **Due Days** column of the **Active Tasks** facet displays the value as "Not Specified."

Create a Custom Workflow

If you want an object to follow one or more specific workflows, create a custom workflow for the object. A stakeholder with edit permissions can create a custom workflow.

1. Click the object for which you want to create a custom workflow.
2. Click **Edit**.

   The object opens in the edit mode.
3. Click the **Workflow** tab.
4. Choose to add a new workflow.
5. Enter a name for the workflow.

   The name must contain a minimum of six characters.
6. Provide a description for the workflow.

   Axon creates a canvas with many swimlanes based on the roles that are defined for the facet.
7. In **Workflow Diagram** section, create a workflow diagram on the canvas. Create swimlanes to assign tasks to the facet stakeholders or Requestor. Use the **Toolbar** to add objects and connect them. Use the **Properties** panel to specify additional properties for the objects.
8. Click **Save**.

Workflow Designer

Axon implements a visual editor to create and run a workflow from a browser.

When you provide a name and description for a new workflow, Axon creates a canvas to create a workflow diagram. The Workflow Diagram section has three components: a toolbar on the left, a canvas in the center, and a properties panel on the right.

The following image shows the different sections of a workflow diagram:

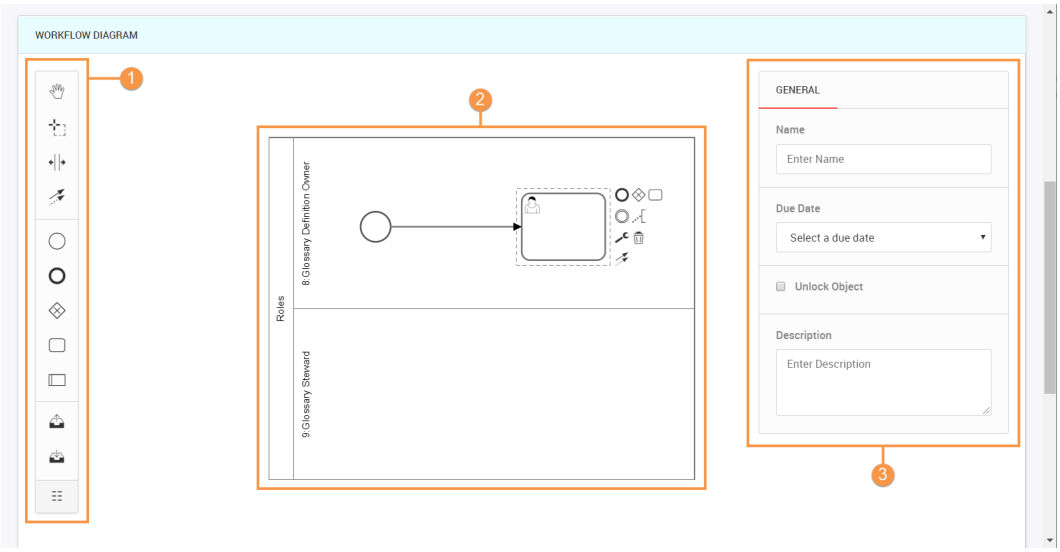

1. Toolbar
2. Canvas
3. Properties

Toolbar

Use the toolbar to create a workflow diagram. The toolbar has three sections. The top section contains tools to select the items, resize the canvas, and connect the items. The middle section lists the building blocks of the workflow. You can select the items and drag to the canvas to create the workflow. The bottom section contains tools to show or hide the toolbar.

The following table describes the different tools that you can use to create a workflow diagram:

Tool Name	Description
Hand	Use the hand tool to select an item.
Lasso	Use the lasso tool to select a block on the swimlane.
Create/Remove Space	Use the create or remove tool to increase or decrease the canvas size.
Global Connect	Use the global connect tool to connect the items in a workflow.
Create StartEvent	Use the Create StartEvent tool to start a workflow event. You can decide the role that can start the event.

Tool Name	Description
Create EndEvent	Use the Create EndEvent tool to end a workflow event. You can decide the role that can end the event.
Create ExclusiveGateway	Use the Create ExclusiveGateway tool to create decision boxes that can have two results. For example, a validate request can have two values: accept and reject. A gateway and the preceding user task must be close to one another in the same swimlane because they both are a logical unit and must be performed by the same user.
Create UserTask	Use the Create UserTask tool to create tasks that a user can perform. You can enter a name, due date, and description for a user task. You can create user tasks such as validate request, capture impact assessment, confirm feasibility, and approve request.
Create Pool/Participant	Use the Create Pool or Participant tool to add a swimlane for a user role.
Upload BPMN	Use the Upload BPMN tool to upload a workflow diagram to the canvas.
Download BPMN	Use the Download BPMN tool to download a workflow diagram from the canvas.
Hide/Show	Use the Hide or Show tool to hide or show the toolbar.

Canvas

The canvas provides a visual representation of the workflow. When you create a custom or default workflow, Axon automatically creates an empty canvas with swimlanes for each role that is defined for a facet. For example, if a Glossary facet has four roles, Axon creates four swimlanes, one for each role.

Select a swimlane and drag a corner to resize the canvas vertically and horizontally. Select items from the toolbar, drag them to the canvas, and connect them. When you place an item on the canvas, you can click the item to view the toolbar options that are relevant to the object.

BPMN workflows use swimlanes to capture who is responsible for a set of tasks. The tasks that you specify in a swimlane becomes the responsibility of the role associated with the swimlane. If one or more roles do not contain any task in the workflow, you can leave the swimlanes empty or delete the swimlanes. If you want to create the swimlane again, you can use the tool bar to create a swimlane and you must specify the role name and the correct role ID.

Properties

In the **Properties** panel, you can specify additional properties for the items or tasks on the canvas. The properties that appear depend on the tool that you add to the workflow. All properties do not appear for all tools.

The following table describes the properties that you can configure:

Tool Name	Description
Name	Name of the workflow step. If you click a role in the workflow canvas, select the object stakeholder or requestor that participates in the workflow step.
Due Date	Date by which the workflow step must be completed.

Tool Name	Description
Description	Description of the workflow step.
Axon Status	Status of the object during the workflow step as it appears in the **Axon Status** field.
Lifecycle	Lifecycle of the object during the workflow step as it appears in the **Lifecycle** field.
Unlock Object	Select the check box to unlock the object at a specific step in the workflow. If you do not select the check box, the object remains locked.
Commit Changes	Select the check box to save the object with the changes and apply the values that you specified in the **Axon Status** and **Lifecycle** fields. This check box is typically selected when the workflow has reached the last step and a stakeholder has approved the changes to the object. Clear the check box to not save the object. This check box is typically cleared when the workflow has reached the last step and a stakeholder has rejected the changes to the object.

If you have a gateway in a workflow, you must specify the labels for the lines that start from the gateway. The labels need to be short and unique. The labels serves decision routing actions when you run the workflow.

Workflow Diagram Example

The example shows a new Default Workflow being created. Apart from the different start point, the functionality to build the workflow is identical. The facet used in this example is Product. After you select the Product facet, you can see that one default workflow already exists. You can either select this one to edit, or create another.

1. From the Axon toolbar, click **Admin Panel** under the user name.

   The **Admin Dashboard** appears with the Axon version details, status of Axon services, and Axon message queues.
2. On the left navigation pane, click **DG Operating Model** > **Default Workflows**.
3. Select the **Product** facet for which you want to configure a workflow.
4. Choose to add a new workflow.
5. Enter a name for the workflow.

   The name must contain a minimum of six characters.
6. Provide a description for the workflow.

   Axon creates a canvas with many swimlanes based on the roles that are defined for the facet. Remember that the swimlanes appear with a lane for each type of stakeholder role configured for the facet, that is for the Product Steward, Product Owner role.
7. Click into one of the lanes, so that a dotted line appears, and use the bin icon on the menu to delete this lane. You can add it back in later if required.
8. From the toolbar, choose the **Start Event**, and place it in the Steward's swimlane. This means that the objects stewards receive the first request to action when a ticket is raised against this request.
9. Typically the first thing that anyone does is to validate that the request should have been routed to this workflow. If OK, then do something. If Not OK, inform the requestor and close the ticket.
10. The first step is to raise a User Action, and populate the Properties on the right.
    1. Click into the Start action.

2. From the options cloud that appears, choose the User Action and drop it in the Steward's swimlane.

A line automatically appears between the two concepts.

The following image shows the start step and the first user task of the workflow:



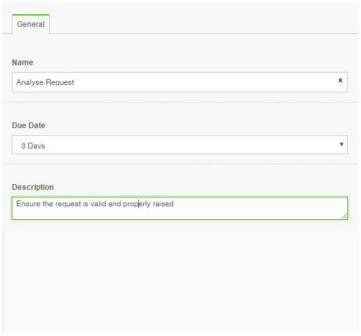

The User Action can be populated by completing the Properties section, as above.

11. Next, you need a Gateway to show that there are two options - accept as valid request or reject.
    1. Click in the User Action and the same option cloud appears as before. This time select the diamond shaped concept, ensuring that it is placed in the Steward's swimlane.
    2. In the next picture the user has increased the horizontal width of all swimlanes, increased the height of the Steward's swimlane, and finally used the lasso tool on the Toolbar to grab and move the concepts you have created so far to the bottom of the swimlane.

    The following image shows the increased length of the swimlane:

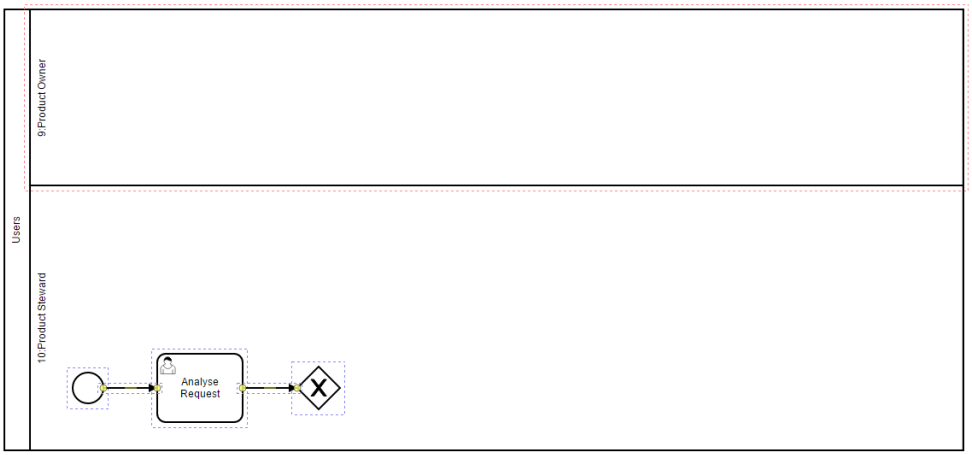

12. Now, you can add the two possible paths. First, an invalid request needs a User Action to Inform the user and then a Close Action.
    1. Always remember to click the predecessor object, create the User Action, and close the workflow. Remember to populate the Properties for each object.
    2. Lines leaving a gateway MUST have a name added to them, because these will appear in the any active workflow as labels on the Accept/Reject buttons. Keep them short and clear.

The following image shows the workflow diagram with the user task:

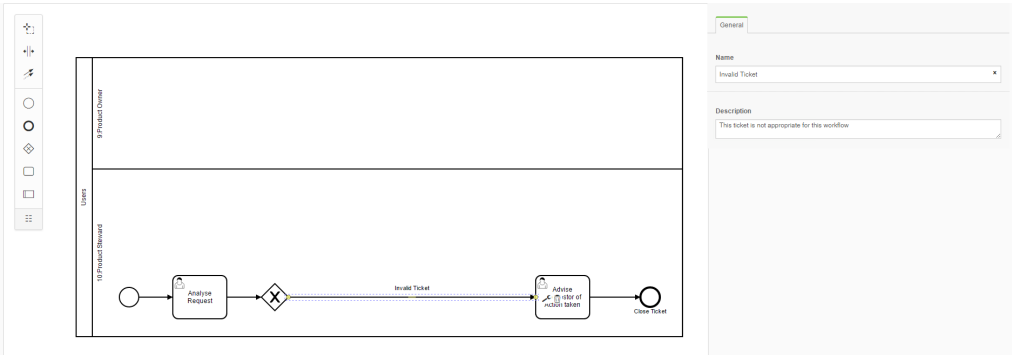

13. If you want to leave the Gateway on the alternative (valid request) path, then you need to create the next User Task.

    This step is to 'Perform Detailed Analysis', and has been created in the picture below. As you can see, this is also performed by the Product Steward.

    The following image shows the workflow diagram with the user task:

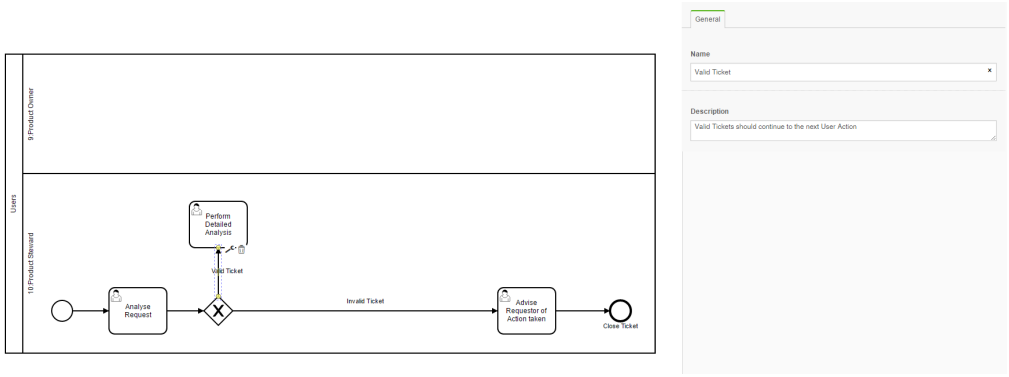

14. After some additional tasks by the Steward shown as an additional User Task (Collate Report) in the same swimlane, it is time to send to the Product Owner user for review and approval.

    This time, from the option cloud on the 'Collate Report' User Action, simply drag the User Action into the Owner's swimlane, and fill in the Properties.

    The following image shows the properties that you can fill in for the user task:

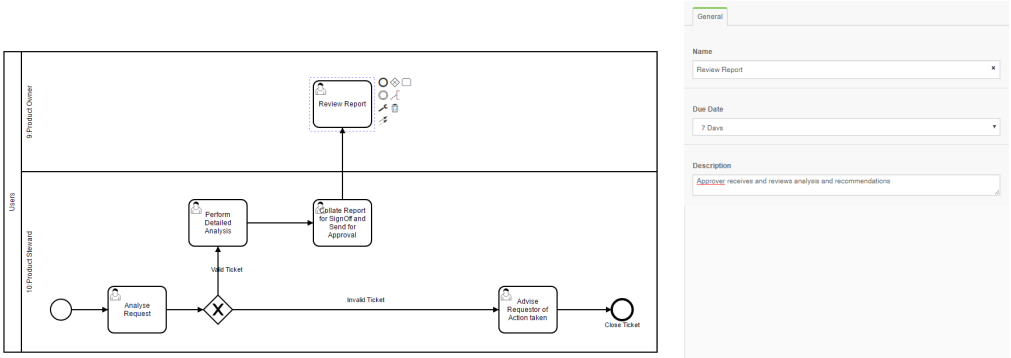

15. As the possible actions are to either accept or reject the findings in the report, you need a Gateway to show these two alternatives. If the Owner rejects the report, then you should connect this new Gateway to the User Action already created to 'Advise Requestor of Action taken', and then you close the workflow.

The following image shows the alternatives for the gateway:

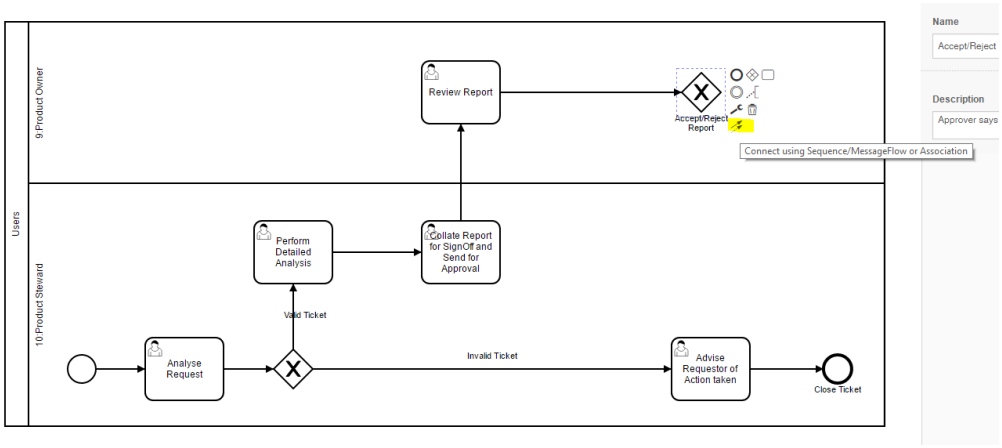

16. As this Gateway and the User Action both already appear on the page, you need to do something slightly different to connect them.
    1. Click on the Gateway, and select the lines icon, from the option cloud.
    2. Once clicked simply move your mouse toward the 'Advise Requestor…' User Action, and a line will be drawn between them.
    3. Remember to go back to this new line and name it. Click in the line between the two concepts and fill in the Properties. The line's name will later appear in the workflow step when the Owner has to accept/reject the step.

    The following image shows the workflow with the Reject path complete:

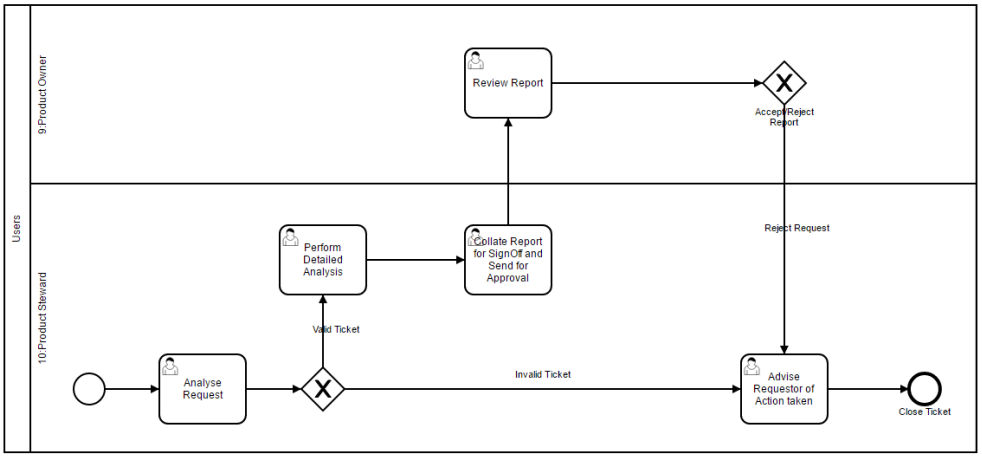

17. If the reviewed report is accepted, add something in to show what happens. The Steward is expected to implement the report, so create a User Action in the Steward's swimlane.

The following image shows the action added to the steward role:

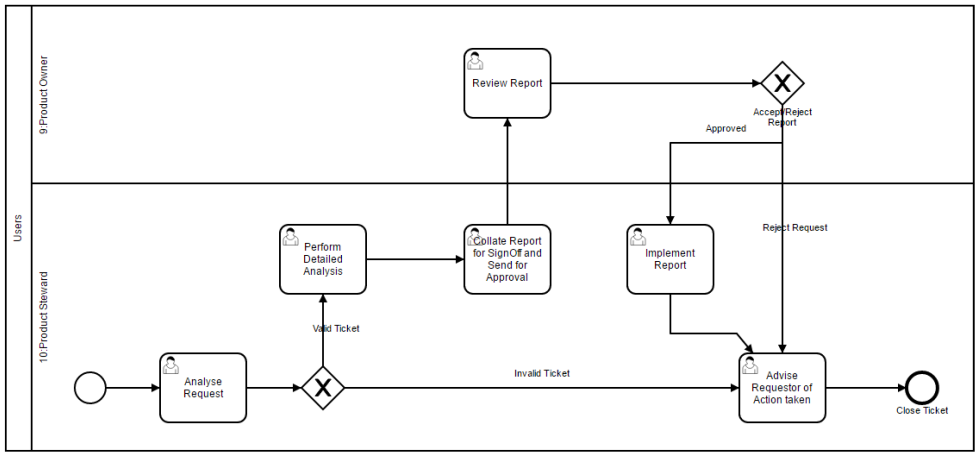

18. Save and close the workflow.

    You now have a completed workflow. All paths ultimately lead to the Close event. All lines leading FROM a Gateway have a name, which creates the approve/reject buttons in a live workflow.

19. When a Change Request is raised against the workflow, you can see the CR on the canvas.

    You can see that:

    1. The Active Step, i.e. the step awaiting action is Green. If orange it is alerting users that the Due By Date is less than a day away.
    2. The description that was created for this workflow step (in the Properties section) appears as guidance on the action expected by the Steward in the Discussion section below the canvas..
    3. There are two green buttons in the Discussion, which allow the Steward to accept/reject the step. They have the same names as the lines that leave the Gateway immediately after the active User Action.

    The following image shows the workflow diagram for the change request:

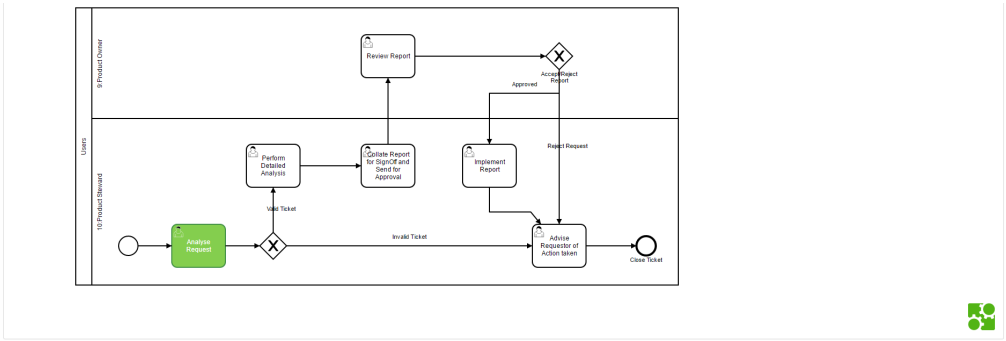

CHAPTER 5

Dashboards and Widgets

This chapter includes the following topics:

- Dashboards and Widgets Overview, 162
- Add or Clone a Dashboard, 163
- Edit a Dashboard, 163
- Delete a Dashboard, 164
- Set Dashboard Display Options, 164
- View Default Widgets, 165
- Add a Widget, 167
- Choose, Reorder, or Hide a Widget, 169
- Edit or Delete a Widget, 169
- Sharing Dashboards, 170
- Download Dashboard and Widgets, 173
- Dashboard Tab Icons, 174

Dashboards and Widgets Overview

When you log in, Axon displays the default **My Dashboard** page and some default widgets. The default widgets are recommendations of essential objects and tasks that might be required for the data governance initiatives in your organization. You can add your own dashboards and widgets that highlight objects and tasks that are personalized for you.

You can also clone a dashboard, share a dashboard with other users, and export a dashboard into a downloadable file format.

You can choose to add the results of your saved Unison searches as widgets. Instead of running a Unison Search query every time, you can add the saved search query as a widget to quickly look at the search results. You can also create a widget that contains free text.

If objects belong to a segment, the dashboard result appears based on the selected segment. Widgets such as Object Counts in a dashboard shows data based on the selected segments. The data might change if you change the selected segments.

To view and share dashboards, an Admin or SuperAdmin user must enable dashboards from the Admin Panel.

Add or Clone a Dashboard

Apart from the **My Dashboard** tab that appears when you first log in to Axon, you can create your own dashboard and add your own widgets. You can also clone a dashboard to quickly create a copy of an existing dashboard and its widgets.

To view and add dashboards, the Axon Administrator must enable the display of dashboards from the Admin Panel.

1. In the Axon home page, click the **Actions** menu, and select **New Dashboard**.
2. In the **New Dashboard** dialog box, enter the following properties for the dashboard:

Property	Description
Name	Required. Title of the dashboard as you want it to appear in the Axon home page.
Description	Required. Description of the dashboard as you want it to appear in the Axon home page.
Set as Default	Optional. Select the check box to display the dashboard when you log in to Axon.

3. Click **OK**.

   The new dashboard that you have created appears.
4. To display the description of the dashboard at the top of the page, click the **Actions** menu, and select **Show Description**.
5. To create a duplicate of an existing dashboard and copy all the widgets, go to the dashboard, click the **Actions** menu, and select **Clone Dashboard**.

   Note: You cannot clone the default dashboard that Axon provides. The default dashboard is typically called **My Dashboard**.

Edit a Dashboard

You can modify the title and description of a dashboard.

1. In the Axon home page, go to the dashboard that you want to modify.
2. Click the **Actions** menu, and select **Edit Dashboard**.
3. In the **Edit Dashboard** dialog box, enter the following properties for the dashboard:

Property	Description
Name	Required. Title of the dashboard as you want it to appear in the Axon home page.
Description	Required. Description of the dashboard as you want it to appear in the Axon home page.
Set as Default	Optional. Select the check box to display the dashboard when you log in to Axon.

4. Click **OK**.

Delete a Dashboard

You can remove a dashboard from the Axon home page if the widgets in the dashboard are no longer relevant to you. When you remove a dashboard, Axon removes all the widgets from the dashboard. If you created widgets from saved searches, Axon retains the saved searches.

1. In the Axon home page, go to the dashboard that you want to remove.
2. Click the **Actions** menu, and select **Delete Dashboard**.
3. In the **Delete Dashboard** confirmation prompt, click **OK**.

Set Dashboard Display Options

You can choose to display or hide specific dashboards on the Axon home page. You can also show or hide a dashboard description, or display a dashboard by default whenever you go to the Axon home page.

To select the dashboards that you want to display on the Axon home page, go to the **Actions** menu, click **Choose Dashboards**, and select the dashboards that you want to display.

To show the description for a dashboard, go to the **Actions** menu of the dashboard, and click **Show Description**.

To set a dashboard to appear as default when you go to the Axon home page, go to the **Actions** menu of the dashboard, and click **Set as Default**.

View Default Widgets

If your Axon administrator has enabled the display of dashboards in the Admin Panel, Axon gives you seven default widgets that you can choose to display in your dashboards.

The following image shows all the default widgets enabled on a dashboard:

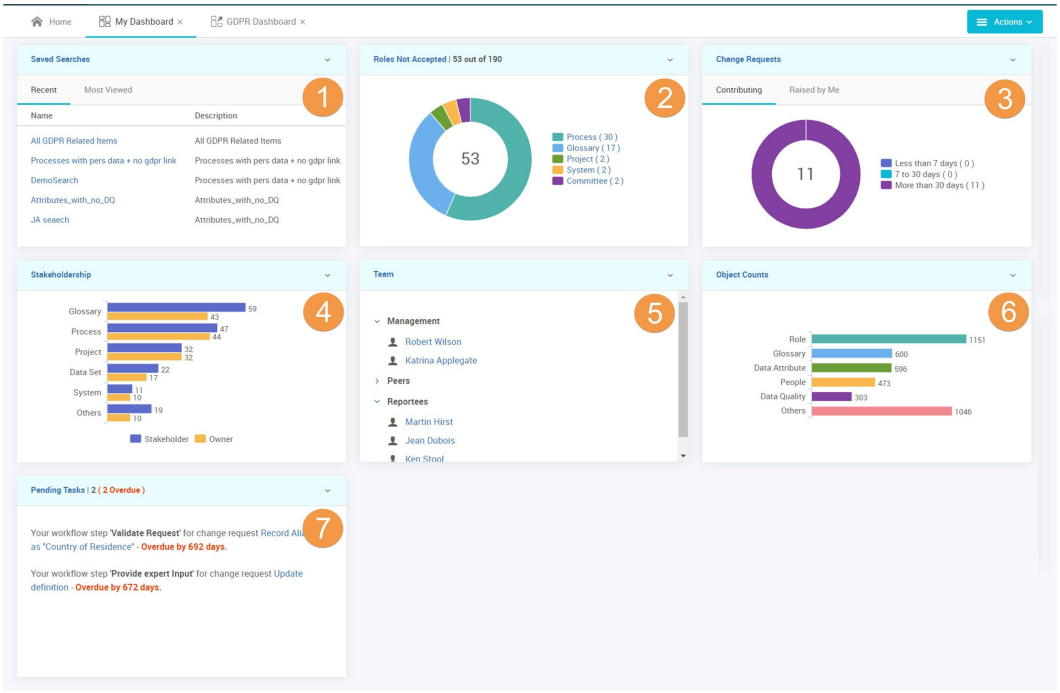

1. The saved searches that include the recent and most viewed searches.
2. The number of roles that you have not accepted for each facet.
3. The change requests that are assigned to you and the change requests that you have raised.
4. The number of facet objects for which you are an owner or stakeholder.
5. The organizational structure of your team.
6. The number of objects for each facet.
7. The top five pending tasks in a workflow for all your change requests, sorted by most recently created tasks.

To add a default widget to a dashboard, click the **Actions** menu of the dashboard, hover the mouse over **Choose Widgets**, and select a widget. Default widgets have the word *Default* appended to the title.

Saved Searches

Lists the top five recent searches and most viewed searches. Recent search list is based on the searches that you opened recently. Most viewed search list is based on the number of hits for a keyword search from any user who created the search, ran the search, or with whom the search is shared. You can switch between **Recent** and **Most Viewed** tabs on the widget. When you click a search link, Axon opens the Unison search results page for the search. When you click the **Saved Searches** link, you can view the **Manage Searches** page that displays the saved and shared searches.

Roles Not Accepted

Displays a pie chart for all the roles that you have not accepted for each facet. The roles are categorized based on the facet type. You can view the top five facets that contain maximum number of roles that are not accepted. The legend shows the facet name and roles count. For example, `Process (47)` indicates that you have not accepted 47 roles in the Process facet. The rest of the facets belong to the **Others** category. When you click the **Roles Not Accepted** link, Axon displays the **Responsibilites | All** view of your **My Account** page. When you click a section in the pie chart or a facet name with the count in the legend, Axon redirects you to the corresponding facet sub-tab in the **Responsibilites** tab of your **My Account** page. Under the facet sub-tab in the **Responsibilites** tab, Axon displays only the roles that you have not accepted for the facet that corresponds to the section of the pie chart that you click on.

Change Requests

Displays a pie chart of change requests that are assigned to you and the change requests that you have raised. You can view the change requests that are open for less than 7 days, 7 to 30 days, and more than 30 days. You can switch between **Contributing** and **Raised by Me** tabs on the widget. When you click the **Change Requests** link, you can view the **My Account | Change Requests** page that shows the current status of all your change requests.

When you click the **Change Requests** pie chart widget under **My Dashboard**, Axon redirects you to the corresponding section on the **My Account | Change Requests** page. For example, if you click the **Change Requests | Contributing** widget, Axon redirects you to the **Contributing** section on the **My Account | Change Requests** page. On the **My Account | Change Requests** page, Axon displays only the change requests that correspond to the section of the pie chart that you click on. For example, if you click the section representing the change requests that are open for less than 7 days, you will see the same on the **My Account | Change Requests** page. To reveal all your change requests, click the **Show All** (👁) icon.

Stakeholdership

Displays a graph of facets for which you are a stakeholder or owner. You can view the top five facet names and the count of facet objects for which you are a stakeholder or owner. The rest of the facets belong to the **Others** category. When you click the **Stakeholdership** link, Axon displays the **Responsibilites | All** view on your **My Account** page. Click a colored segment on the graph to navigate to the roles and responsibilities for each facet in the **Responsibilites** tab of the **My Account** page.

Team

Displays the reporting structure of your team. You can view the following details:

- Management. Displays the list of the managers that you report to.
- Peers. Displays the list of other employees who report to the same line managers.
- Reportees. Displays the list of employees who report to you.

When you click the **Team** link, Axon displays the **Team** tab on your **My Account** page. To view information about the team members, you can click each name.

Object Counts

Displays the count of objects for the facets that have the most number of objects. You can view the facet names and the number of objects for the facets. When you click a facet name, Axon opens the facet in Unison search.

Pending Tasks

Displays a list of your pending tasks in a workflow step for a change request. If you are a stakeholder for a step in a workflow, you need to complete your tasks to proceed with the next step of the workflow. You can view the task information such as the workflow step name, associated change request name, and number of days that you have to complete the task. For example, your workflow step "Approve Term" for the change request "Update Glossary" is due in 5 days. You can click the name of a change request to navigate to the pending task in the **Summary** tab of the change request.

Add a Widget

You can add widgets to a dashboard to display the results of saved Unison searches. Instead of running a saved Unison search every time, you can add the search as a widget to quickly look at the search results in the dashboard. You can also add a text widget that you can use as a note or reminder.

To add a saved search widget to a dashboard, you must create and save a Unison search. For more information on saving searches, see "Saving and Sharing Searches" on page 43.

1. In the Axon home page, go to the dashboard where you want to add a widget.
2. Click the **Actions** menu, and select **New Widget**.

   The **New Widget** dialog box opens.
3. In the **Widget Source** field, specify whether you want the widget to display a saved Unison Search result or free text.
4. If you selected the `Saved Search` option in the **Widget Source** field, enter the following properties of the widget:

Property	Description
Source	Saved Unison search for which you want to see the results in the widget.
Focus	Facet in the Unison search result for which you want to see the data in the widget.
Title	Title for the widget.
Description	Description of the widget.
Visualize As	Specify whether you want the data in the widget to appear as a doughnut chart, bar chart, number count, or table. **Note:** Do not use the doughnut chart in conjunction with a multiple selection dropdown type custom field.
Visualize By	Column in the Unison search result for which you want to see the data in the widget.
Preview	Click to see a preview of the widget.

The following image shows the properties of a sample saved search:

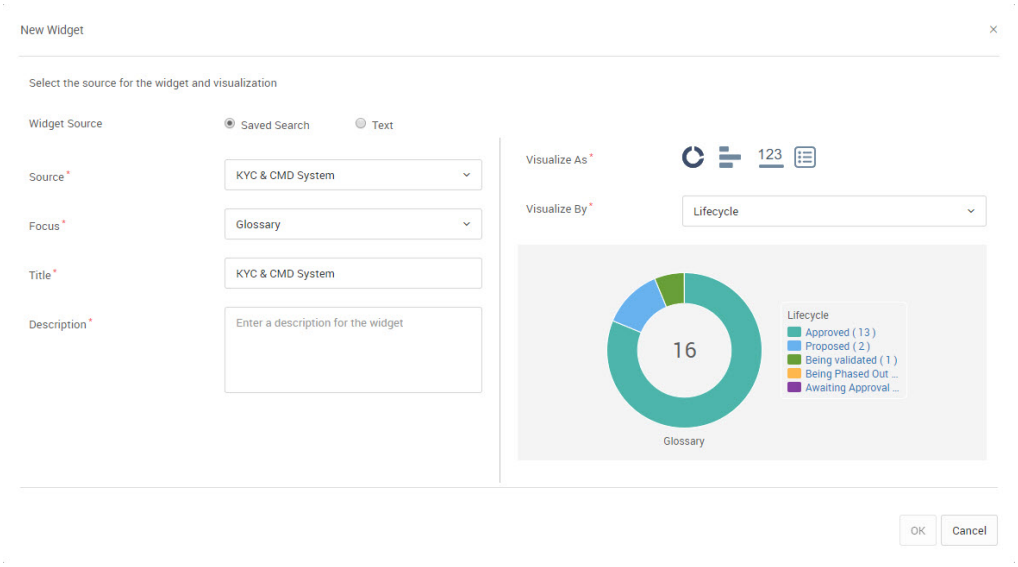

5. If you selected the `Text` option in the **Widget Source** field, enter the following properties of the widget:

Option	Description
Title	Title for the widget.
Description	Description of the widget
Free text box	Enter the text that you want to display in the widget.

The following image shows the properties of a sample free text:

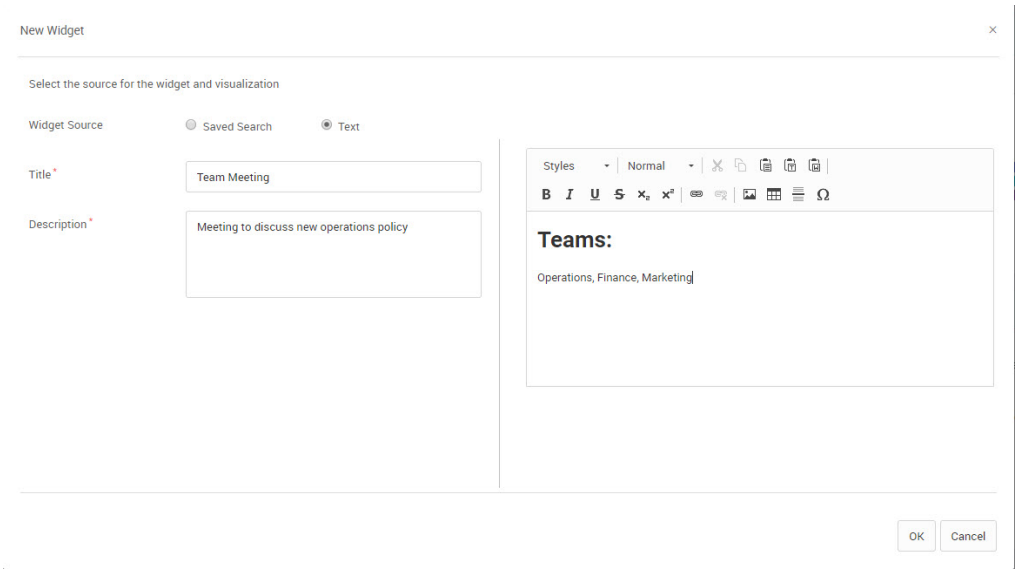

6. To save the widget, click **OK**.

The widget appears in the dashboard.

Choose, Reorder, or Hide a Widget

You can choose the widgets that you want to display or hide in each dashboard. You can also reorder the widgets in a dashboard if you want to arrange them by categories.

To add a specific widget, click the **Actions** menu of a dashboard, hover the mouse over the **Choose Widgets** option, and select the widgets that you want to display.

To reorder a widget in a dashboard, drag the widget by the title bar and move it to a new location. Release the widget in the new location when you see a separator line. The following image shows the drag action for a widget:

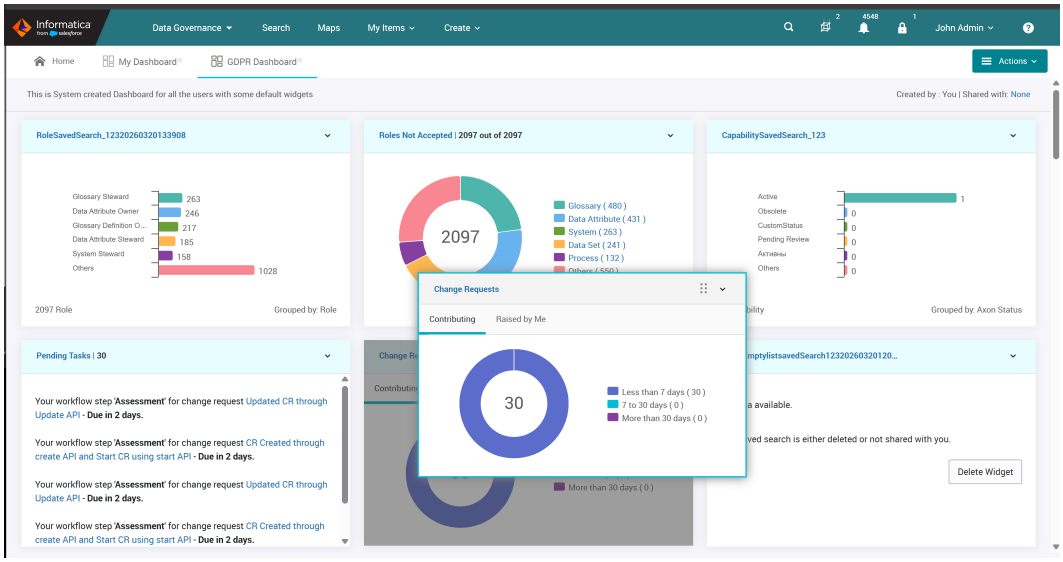

To hide a widget from a dashboard, click the icon in the title bar of the widget and click **Hide**.

Edit or Delete a Widget

You can edit or delete the widgets that you create on dashboards.

To edit a widget from a dashboard, click the icon in the title bar of the widget and click **Edit**. When you edit a widget, you can either edit the fields or change the widget source. For example, if you want to edit the fields, you can change the name and description for a **Text** widget, or change the search, chart, name, and description for a **Saved Search** widget. If you want to change the widget source, you can change the widget type from **Saved Search** to **Text**, or vice-versa.

If you have shared the dashboard widget with a user and you edit the widget, the same widget changes apply on the dashboard of the user.

To delete a widget from a dashboard, click the icon in the title bar of the widget and click **Delete**.

You cannot edit or delete the default widgets on the **My Dashboard** page.

Sharing Dashboards

You can share a dashboard that you created with other users in your organization. When you choose to share a dashboard, Axon shares the dashboard and all the widgets in it with the receivers.

Some widgets in a dashboard are based on free text, while other widgets are based on your saved searches. When you share a dashboard, Axon manages the two types of widgets differently. If your shared dashboard that contains widgets based on free text, Axon replicates the widget and the text in the receiver's shared dashboard. If your shared dashboard contains widgets based on your saved searches, you can specify whether you want to share the saved searches with the receiver.

Note: You cannot share the default **My Dashboard** with other users.

To share the saved searches of dashboard widgets with other users or modify sharing options, see the "Share Dashboard with Other Users" on page 170 topic. To manage and share saved searches, see the "Saving and Sharing Searches" on page 43 topic.

Share Dashboard with Other Users

You can share the dashboard that you created. To view and share dashboards, the Admin or SuperAdmin user must enable the display of dashboards from the Admin Panel.

1. In the Axon home page, go to the dashboard that you created and want to share.
2. Click the **Actions** menu.
3. Click **Modify Sharing**.
4. In the **Modify Sharing** dialog box, choose one of the following sharing options:

   Share with public

   Share the dashboard that you created with all users in your organization. After the dashboard is made public, users that are logged in and users that are not logged in can view the dashboard. If the saved searches used in the dashboard widgets are not public, you can choose to make them public by selecting the **Make searches used in the dashboard widgets public.** option.

   Only Admin and SuperAdmin users can view this option and make dashboards public.

   Share with selected users

   Specify the users with whom you want to share the dashboard. Use the following options to specify the users:

   - Type the users or select from the dropdown list that appears. For more information, see "Entering User Names to Share Dashboard" on page 171.
   - Enter the users in a template and upload the template file. For more information, see "Uploading User Names to Share Dashboard" on page 171.

   To view the list of the users with whom the dashboard is currently shared, select **Show shared list**.

   Select the **Share searches used in the dashboard widgets** option if you want to share the saved searches for the widgets with other users. This option does not apply to widgets that are based on free text.

   Note: If you clear **Share searches used in the dashboard widgets** before sharing the dashboard, Axon does not add the saved search to the **My Searches** list on the Unison search page of the receiver. The widget appears as blank in the receiver's dashboard. If you previously shared the saved searches with the receiver, you can clear this check box before sharing the dashboard. In

such cases, Axon populates the widgets in the shared dashboard by retrieving data from the saved Unison search of the receiver.

Stop sharing

Stop sharing the dashboard. If the dashboard is already shared with some users, the dashboard is removed from their view. However, the shared searches remain in the **Searches Shared With Me** page.

5. Click **Save**.

Entering User Names to Share Dashboard

To enter specific names of users to share the dashboard, start typing their names in the sharing dialog box.

Perform the following steps to specify user names:

1. In the Axon home page, go to the dashboard that you created and want to share.
2. Click the **Actions** menu.
3. Click **Modify Sharing**.
4. In the **Modify Sharing** dialog box, choose the **Share with selected users** option, and select **Select Users Manually** from the list.

   The following image shows the **Modify Sharing** dialog box:

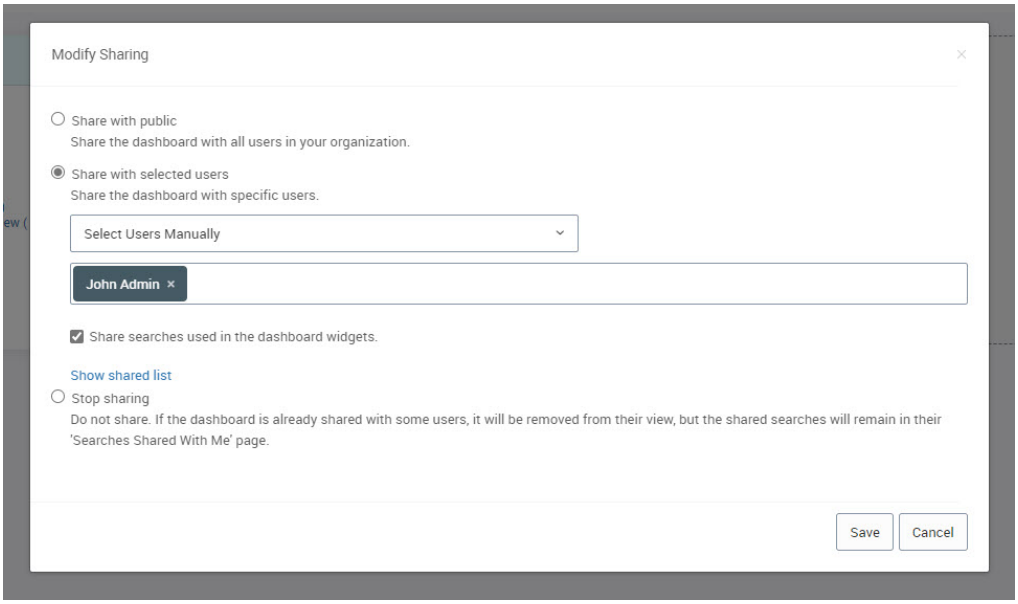

5. Start typing the names or email addresses of the users.
6. Click **Save**.

Uploading User Names to Share Dashboard

If you want to share the dashboard with several users, you can use a template file. Download the template file, populate the file with the user details, and upload the file to Axon.

Perform the following steps to upload the user names:

1. In the Axon home page, go to the dashboard that you created and want to share.
2. Click the **Actions** menu.

3. Click **Modify Sharing**.
4. In the **Modify Sharing** dialog box, choose the **Share with selected users** option, and select **Upload User File** from the list.

   The following image shows the **Modify Sharing** dialog box:

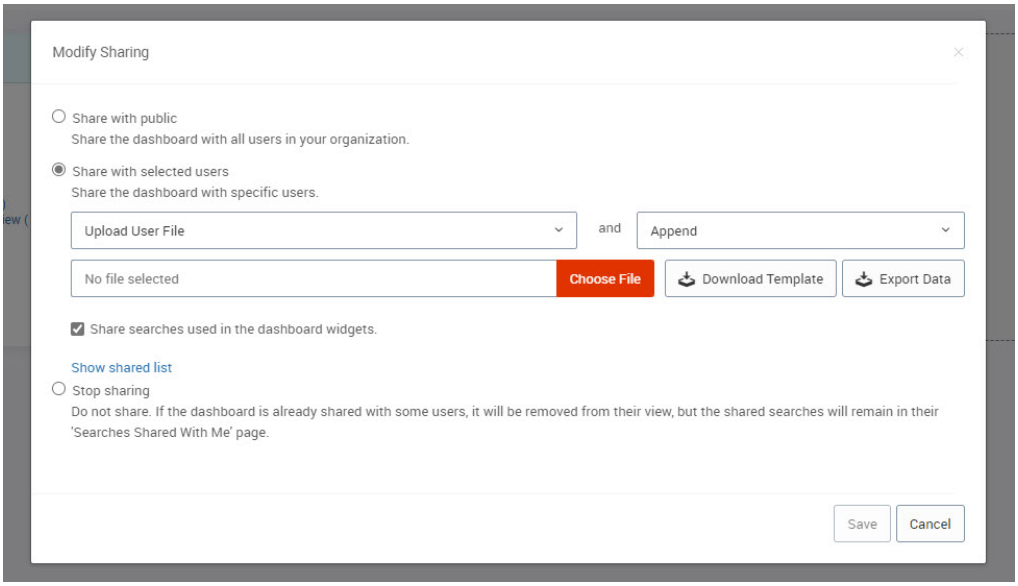

5. You can click **Export Data** to download a Microsoft Excel file to see all the users to which the dashboard is currently shared.
6. To share the dashboard with additional users along with the existing users, select **Append**. To share the dashboard with a new set of users and replace the existing users, select **Overwrite**.
7. Click **Download Template** to download the template as a Microsoft Excel file.
8. In the template file, enter the following values to represent the users:

Option	Description
User ID	Reference number of the user.
First Name	Enter the first name of the user.
Last Name	Enter the last name of the user.
Email	Enter the e-mail address of the user.

   Note: For a user, you can enter either the reference number or the first and last name combination or the email address. You do not have to enter all the values. However, if you choose to enter all the values of a user, make sure that they are entered accurately.
9. When the template file is ready, click **Choose File** to upload it to Axon.
10. Click **Save**.

Receive Dashboard Shared by Other Users

You can add a dashboard that is shared by other users to your Axon home page. For example, the data governance office in your organization might share a dashboard with all team members to monitor the status

of a specific compliance program. You can use this dashboard to see the status of the program and collaborate with other users.

If a dashboard is shared with all the users by making it public, the shared dashboard appears as a separate tab by default to the users. To add the dashboard that is shared using the **Share with selected users** option, click the **Actions** menu of the Axon home page, hover the mouse over the **Choose Dashboards** option and select the shared dashboard.

If a user has shared a dashboard or stopped sharing a dashboard with you, Axon sends you an email notification.

If a shared dashboard contains widgets that are based on saved searches, Axon adds the saved searches to the **Searches Shared With Me** tab of your **Manage Searches** page. To manage your saved searches, see the "Saving and Sharing Searches" on page 43 topic.

Note: Shared dashboards are read-only for the receivers. If you have received a shared dashboard, you cannot add, delete, or reorder the widgets in it. However, if you delete the saved search for a widget in a shared dashboard, the widget appears as blank.

Edit a Shared Dashboard

If you edit a dashboard that is shared with other users, Axon replicates the changes to the dashboard of all receivers.

1. In the Axon home page, go to the shared dashboard that you want to modify.
2. Edit the dashboard by adding, deleting, or reordering the widgets.
3. To modify the title or description of the widget, click the **Actions** menu, and select **Edit Dashboard**.
4. Click **OK**.

Axon updates the receiver's dashboard with the changes that you make. If you add a widget based on a saved search, Axon adds the new saved search to the **Searches Shared With Me** tab of the receiver's **Manage Searches** page. If you remove a widget, Axon removes the widget from the receiver's dashboard, but does not remove the saved search from the receiver's **Manage Searches** page. For more information on managing saved searches, see the "Saving and Sharing Searches" on page 43 topic.

Delete a Shared Dashboard

If you delete a dashboard that is shared with other users, Axon removes the dashboard from the receivers' home pages.

Each receiver of the shared dashboard receives an email notifying that the dashboard is removed. When the receiver goes to the Axon home page, or reloads the Axon home page, the dashboard is removed.

Download Dashboard and Widgets

You can download a dashboard to your computer if you want to save a copy or share the contents of the dashboard. Axon takes a snapshot of the dashboard and the widgets, and saves the screenshot to your computer as a local file.

1. In the Axon home page, go to the dashboard that you want to download.
2. Click the **Actions** menu, hover the mouse over the **Export Dashboard** option, and select a format for download. Axon supports download in three file formats: `.PDF`, `.PNG`, and `.JPG`.

Axon downloads the file to the default downloads folder in your computer.

Dashboard Tab Icons

You can identify the status of a dashboard by looking at the tab icon. The following table describes the icons for dashboard tabs that appear in Axon:

Icon	Status
	User-created dashboard
	User-created dashboard that is set as your default
	Shared dashboard
	Shared dashboard that is set as your default
	Received dashboard
	Received dashboard that is set as your default

CHAPTER 6

Linking to Enterprise Metadata

This chapter includes the following topics:

- Linking to Enterprise Metadata Overview, 175
- User Tasks, 176
- Enterprise Data Catalog Objects, 176
- Linking Resources with Systems Manually, 188
- Linking Physical Fields with Attributes Manually, 189
- Onboarding Parent of Physical Fields as Data Set, 190
- View Enterprise Catalog in Data Set, 192
- View Enterprise Catalog in Glossary , 192
- View Enterprise Catalog in System, 193
- Data Onboarding Rules for a System, 196
- Automate Object Onboarding from Enterprise Data Catalog, 199
- View Automated Lineage from Enterprise Data Catalog, 215
- Link Removal Notifications, 219

Linking to Enterprise Metadata Overview

Business users might want to document the data elements in Axon for various reasons, such as compliance, standardization, accountability, and monitoring. The business users or analysts might not be aware of all the data elements and the format of technical assets that they own. The users need to collaborate manually with their counterparts to get the required details, identify those data elements, and then document them in Axon. This task can be hectic, error-prone, and vulnerable due to manual human intervention. Informatica Enterprise Data Catalog is master catalog of technical assets and has a data discovery tool that helps reduce the manual human intervention and increase the user productivity. Axon in collaboration with Enterprise Data Catalog can provide a great user experience and automatically bootstrap the content.

Integrate Axon with Enterprise Data Catalog to view links to technical enterprise assets in systems, glossaries, and data sets. After integration, Axon fetches Enterprise Data Catalog resources and fields and displays them in the **Resources** and **Physical Fields** facets. You can link Axon objects and Enterprise Data Catalog assets manually or by using bulk upload relationship templates. You can link resources to systems. You can link fields to attributes in data sets. Axon uses Informatica technology to recommend attributes to which you can link the fields.

To view a field from Enterprise Data Catalog that you linked to an attribute, navigate to **Physical Fields** on the **Attributes** tab of a **Data Set** facet. In the **Relationships** tab of a **Data Set** facet, you can click **Show**

Recommendations to view the related attributes that Axon recommends for possible linking with fields. Axon displays attribute recommendations only if the associated fields are interlinked in Enterprise Data Catalog. You also need to ensure that you provide the accurate Axon Resource Name parameter value when you configure access to Enterprise Data Catalog.

Note: Any change made in business terms or Data Domain association in Enterprise Data Catalog reflects automatically on the onboarded data sets and attributes in Axon.

You might see some masked data based on the segments that are assigned to you. If you are assigned only to a particular segment, you can see the data sets, attributes, systems, and glossaries that belong to the segment. If a physical field is linked to a glossary that belongs to a segment that you cannot access, you can see that the data is masked for the glossary.

For a list of resource types available in Enterprise Data Catalog, see the *Catalog Administrator Guide*.

User Tasks

You associate Axon objects with Enterprise Data Catalog assets. WebUsers see technical assets in Axon systems, glossaries, and data sets.

The following table lists the tasks that Axon users perform to view technical metadata:

Task	User Profile	Result
Provide the machine details of your Enterprise Data Catalog deployment when you install Axon.	Installer	Axon and Enterprise Data Catalog are integrated. Axon displays the resources from Enterprise Data Catalog in the **Resources** facet. For more information on installing Axon, see the *Axon Data Governance 7.3.8Installation Guide*.
Link Enterprise Data Catalog resources to one or more Axon systems.	Admin, SuperAdmin, and WebUser with the New permission	Axon associates systems and resources and displays the linked resources in the **Enterprise Catalog** tab when you open the system object.
Link fields to attributes in data sets.	Admin, SuperAdmin, and WebUser with the New permission	Axon displays the technical metadata from the fields in the **Attributes** tab when you open the data set object.
Ignore fields	Admin, SuperAdmin, and WebUser with the New permission	Axon does not associate the fields in the **Physical Fields** facet with the corresponding attributes in Enterprise Data Catalog. In Axon, the status of the ignored fields change from Reported to Ignored.

Enterprise Data Catalog Objects

After you integrate Axon with Enterprise Data Catalog, a WebUser profile with the New permission, Admin profile, and SuperAdmin profile can navigate to **Create** > **Manage Catalog Links** from the Axon toolbar and view the **Resources** and **Physical Fields** tabs. Axon displays a list of resources from Enterprise Data Catalog in the **Resources** tab and fields in the **Physical Fields** tab.

Axon displays enterprise metadata in the **Resources** and **Physical Fields** tabs.

Filter Objects

You might not have access to some resources in Enterprise Data Catalog. If a SuperAdmin user chooses to restrict access to objects in Axon based on the access permissions in Enterprise Data Catalog from the Admin Panel, you cannot view the resources in the Manage Catalog > Resources page. If you do not select this option, you can access all the objects in Axon irrespective of the access permissions in Enterprise Data Catalog.

Resources

A resource is an Enterprise Data Catalog object that represents an external data source or metadata repository from where scanners extract metadata. Scanners in Enterprise Data Catalog fetch the metadata from resources. Enterprise Data Catalog performs basic metadata operations, such as extraction, storage, and management of metadata at the resource level.

Axon displays the following types of resources from Enterprise Data Catalog:

- Snowflake Advanced Scanner
- Tibco Spotfire Scanner
- Amazon S3 - V2 scanner
- ADLS Gen2 - V2 scanner
- New Salesforce V2
- Relational sources
- File systems, such as Amazon S3, Native, and HDFS
- Custom resource types
- Business Intelligence resources. Axon displays the following resource types:
  - IBM Cognos
  - Microstrategy
  - Oracle Business Intelligence
  - Power BI - Cloud Advanced Scanners
  - QlikView
  - QlikSense
  - SAP Business Objects
  - Tableau 19.x
  - Tableau Server
- Apache Cassandra
- AWS Glue
- Azure Blob Storage
- Azure Synapse
- Google BigQuery
- Google Cloud Storage
- Informatica MDM
- MongoDB
- SAP ERP

- SAP HANA
- SAP S/4HANA
- SAP BW
- SAP BW/4HANA
- Snowflake
- Workday

You can also view custom resources from Enterprise Data Catalog in Axon.

You can link resources with systems either manually or using bulk upload templates. You can use an existing system or create a system. You cannot link a resource to a system that has Axon Status value as "Deleted." For more information on manually linking resources with systems, see "Linking Resources with Systems Manually" on page 188. For more information on using bulk upload templates to link resources with systems, refer to *System X Resource* topic in the *Axon Data Governance 7.3.8 Bulk Upload Reference Guide* .

The following image shows a sample list of Enterprise Data Catalog resources:

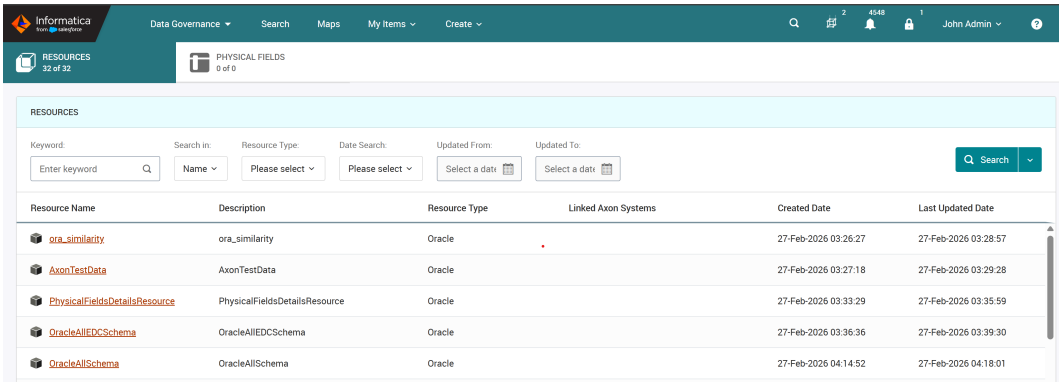

The **Resources** tab displays the following information in a tabular format:

- Resource Name
- Description
- Resource Type
- Linked Axon Systems
- Created

The **Resource Name** column contains the hyperlink to the resources in Enterprise Data Catalog.

The **Linked Axon Systems** column displays information after you link systems to resources. All other columns display information that Axon fetches from Enterprise Data Catalog.

If you have access to only Enterprise Data Catalog or both Enterprise Data Catalog and Data Privacy Management, the Resource Name hyperlink opens the resource information in the Enterprise Data Catalog application. If you have access to only Data Privacy Management, you can click the Resource Name hyperlink to view the list of data stores in the Data Privacy Management application. You can search for the data store name from the list of data stores.

You can filter the information in the **Resources** tab by filter type. You can search by resource name and narrow down your search by the uploaded or updated date. The created date is in the `YYYY/MM/DD HH:MI:SS` format.

Masked Data in Resources

You might see some masked data based on the segments that you can access. If you are assigned only to a particular segment, you can see the systems that belong to the segment. If a resource is linked to a system that belongs to a segment that you cannot access, you can see that the data is masked for the system in the **Linked Axon Systems** column.

The following image shows a sample masked system in the **Resources** tab:

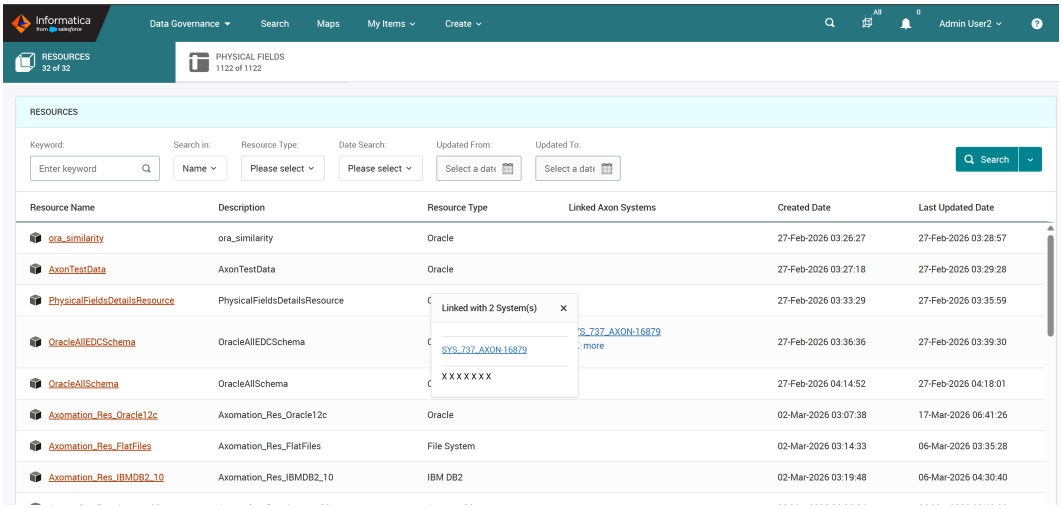

Export Resources

You can export the resources metadata to a CSV file to retrieve more information on the Enterprise Data Catalog resources. For example, if you want to bulk upload the relationship between Enterprise Data Catalog resources and Axon systems, you need additional information, such as resource identifiers.

You can export resources metadata from the following areas of Axon:

- **Create** > **Manage Catalog Links** > **Resources**.
- **System** > **Enterprise Catalog** > **Resources**. For more information, see "View Enterprise Catalog in System" on page 193.

From the search area of the **Resources** tab, click the icon next to the **Search** option and click **Export to CSV**. The name of the exported file is in the following format: `Resources grid-<YYYYMMDD>.csv`. Make sure that the CSV file viewer displays characters that are encoded in UTF-8 format.

You can view the following metadata in the exported CSV file:

Resource Name

Name of the Enterprise Data Catalog resource.

Description

Description of the resource.

Resource ID

A unique identifier for the resource.

Resource Type

Type of the resource, such as Oracle, File System, and Teradata.

Created Date

The date on which the resource is created.

Physical Fields

After you link systems to resources, Axon displays fields from the linked resources in the **Physical Fields** tab.

If a resource is linked to a system, you can link the physical field of the resource only to the attribute of the data set that belongs to the system. The **Axon Status** value for the data set must be "Active." For example, system S1 has data set DS1 that contains attributes A1 and A2. Another system S2 has data set DS2 that contains attributes A3 and A4. Resource R1 contains physical fields F1 and F2. If system S1 is linked to resource R1, you can link physical fields F1 and F2 only to attributes A1 and A2 of data set DS1.

You can link the physical fields with attributes of a data set from the **Create** > **Manage Catalog Links** page. Informatica recommends attributes of the data set that you can link the physical fields to. You can create the links between physical fields and attributes manually, use automated onboarding of attributes, or use bulk upload templates. You can also link all physical fields of a parent to the attributes of a data set at once instead of individually linking each physical field of the parent to the attribute. This type of linking simplifies the process of onboarding of a parent-level object, such as folders and tables, as data sets in Axon.

For more information on automated onboarding, see "Automate Object Onboarding from Enterprise Data Catalog" on page 199. For more information on using bulk upload templates to link fields with attributes, refer to *Attribute X Physical Field* topic in the *Axon Data Governance 7.3.8 Bulk Upload Reference Guide* .

The following image shows the list of Enterprise Data Catalog fields:

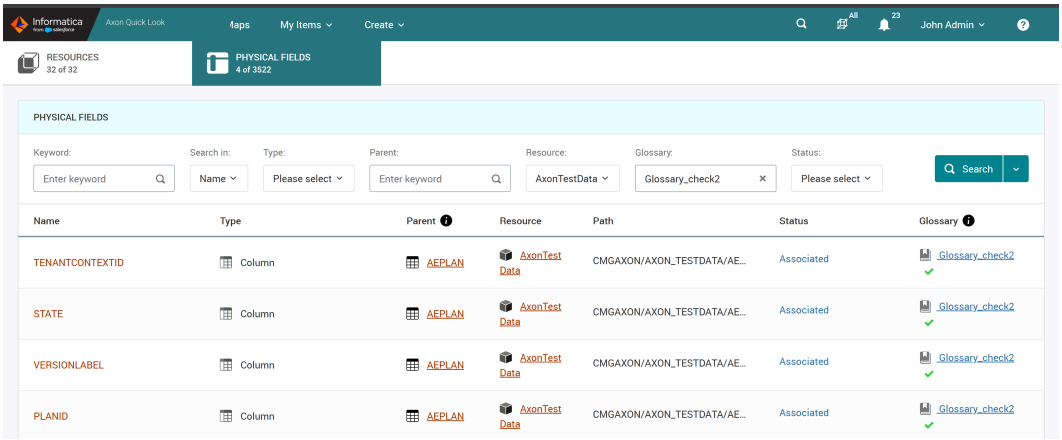

The **Physical Fields** tab displays the following information:

- Name
- Type
- Parent
- Resource
- Path
- Status
- Glossary

You can view the following types of Enterprise Catalog fields in Axon:

- List View Column
- Column

- View Column
- JSON Field
- XML Field
- CSV Field
- Salesforce Field
- AVRO Field
- Parquet Field
- Calculated Report Field
- MicroStrategy Column
- Field
- Tableau Column
- Tableau Columns
- Tableau Field
- Tableau Mark
- Tableau Marks
- Tableau Row
- Tableau Rows
- QlikView Column
- Text Field
- External Column
- Report Field
- Cognos Column
- Field Body
- BusinessObjects Column
- Cell
- Google Field
- MongoDB Field
- Snowflake Field
- QlikSense Column
- QlikSense Dimension
- QlikSense Measure
- Report Metric
- Attribute Form
- Property
- AWS Glue Field
- Power BI Field
- SAP HANA Attribute
- SAP HANA Calculated Attribute
- SAP HANA Measure

- SAP HANA Calculated Measure
- SAP S/4HANA View Field
- SAP S/4HANA Table Field
- SAP BW Field
- SAP BW Dimension Field
- SAP BW Key Figures Field
- SAP BW Data Source Field
- SAP BW Characteristics Field
- SAP BW Navigational Attribute Field
- SAP BW Query Field
- SAP BW/4HANA Data Source Field
- SAP BW/4HANA Query Field
- SAP BW/4HANA Dimension Field
- SAP BW/4HANA Key Figures Field
- SAP BW/4HANA Navigational Attribute Field
- SAP BW/4HANA Characteristics Field
- SAP BW/4HANA Field
- MDM Base Object Column
- MDM Landing Table Columns
- MDM Staging Table Columns
- MDM XREF Table Column
- MDM Business Entity Table Column
- MDM Child Business Entity Table Column

You can also view fields from the custom resource types in Enterprise Data Catalog.

Enterprise Data Catalog can discover more than one field for a data domain during the data discovery process. If the data domain has a single field or multiple fields associated with the data domain, all the fields appear in the **Physical Fields** tab with the same Axon glossary name listed in the **Glossary** column.

In the **Glossary** column, you can view the following types of glossaries that are linked to Enterprise Data Catalog assets:

- Linked glossaries. Linked glossaries are the Axon glossaries that you link to fields in Enterprise Data Catalog. A linked glossary appears with a green tick sign.
- Accepted glossaries. Accepted glossaries are the Axon glossaries that you link to curated data domains in Enterprise Data Catalog. If the data domains are curated in Enterprise Data Catalog, you can view a green tick sign along with the glossary name.
- Inferred glossaries. Inferred glossaries are the Axon glossaries that are linked to inferred data domains in Enterprise Data Catalog. If the data domains are not curated in Enterprise Data Catalog, you can view the percentage of match next to the glossary name.

Note: The fields in the **Physical Fields** facet might appear blank if the Axon system fails to connect to Enterprise Data Catalog. For example, if the connected Enterprise Data Catalog instance is shut down or the Enterprise Data Catalog connection password has changed, Axon cannot retrieve and display the fields. Contact your Axon administrator to check the Axon connectivity with the Enterprise Data Catalog system.

Using Filters on Physical Fields

You can filter the entries in the **Physical Fields** tab to search for specific fields. You can search by the field name, field type, resource, associated glossary, and field status. In the **Parent** field, Axon displays suggestions for table names along with the schema information for relational sources and path information for non-relational sources.

Note:

- If you filter by parent objects in the **Parent** field, Axon displays only the immediate children in the search results.
- If you want to filter by parent objects, Axon supports only the **Type** field combination to be used with the **Parent** field.

Masked Data in Physical Fields

You might see some masked data based on the segments that you can access.

If you are assigned only to a particular segment, you can see the glossaries that belong to the segment. If a physical field is linked to a glossary that belongs to a segment that you cannot access, you can see that the data is masked for the glossary in the **Glossary** column.

The following image shows sample masked glossaries:

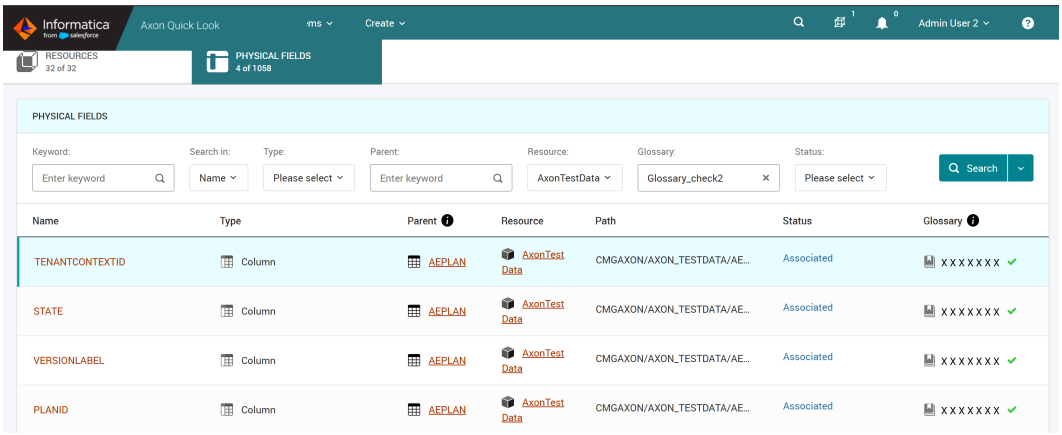

A physical field might be linked to multiple attributes and the attributes might belong to different segments. If you do not have access to the segments, you can see masked attributes, data sets, and systems in the **Associated Attributes** pop-up.

The following image shows sample masked attributes, data sets, and systems:

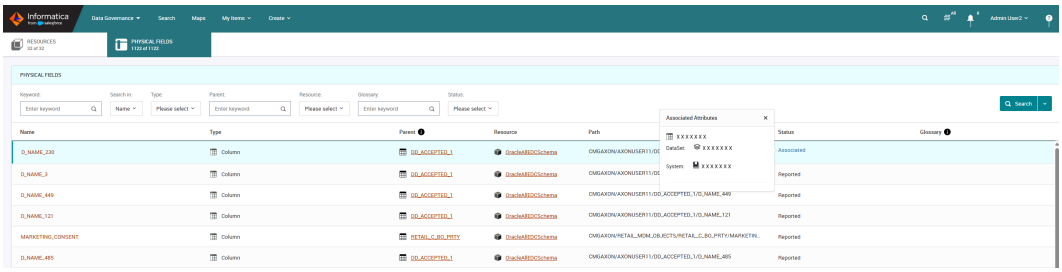

Viewing Resources and Physical Fields in Enterprise Data Catalog

Click the parent name, and resource name links in the tabs to launch Enterprise Data Catalog and view more information about each item.

You can create an Axon resource in Catalog Administrator. For more information on the resource-related task that you need to perform in Enterprise Data Catalog, refer to the *Axon Resource Properties* topic in the *Catalog Administrator Guide*.

You can run a profile on resources in Enterprise Data Catalog and identify fields from the profile results that match data domains. You can link those data domains to Axon glossaries in Enterprise Data Catalog. If you link glossaries to a data domain in Enterprise Data Catalog, the fields appear in the **Physical Fields** tab with the associated glossary name displayed in the **Glossary** column.

Physical Field Details

In Axon, you can view the physical field details, such as datatype, primary key, and pattern, from Enterprise Data Catalog.

When you click the parent and resource names, Axon directs you to the Enterprise Data Catalog application. When you click a physical field name, a dialog box appears in Axon with additional details for the physical field from Enterprise Data Catalog.

You can view the physical field details from the following areas of Axon:

- **Create** > **Manage Catalog Links** > **Physical Fields**
- **System** > **Enterprise Catalog** > **Physical Fields**
- **Glossary** > **Enterprise Catalog** > **Physical Fields**
- **Data Set** > **Enterprise Catalog** > **Physical Fields**
- **Glossary** > **Data** > **Data Attributes**
- **System** > **Data** > **Data Attributes**
- **Data Set** > **Data Attributes**
- **Physical Fields** facet in Unison search

The following image shows a sample list of properties that you can view for a physical field:

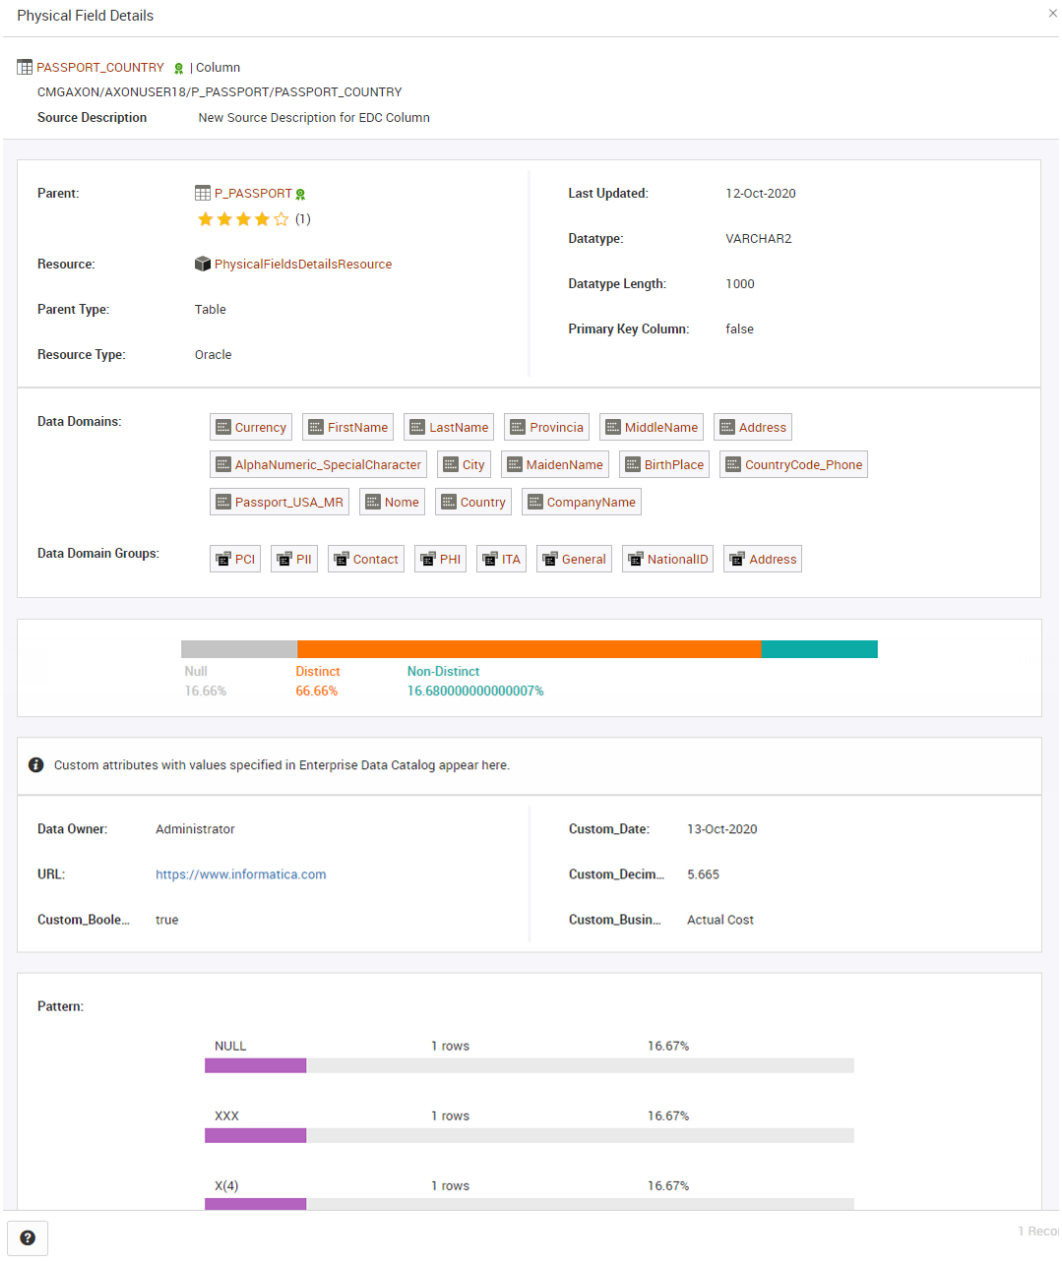

The following table describes the additional properties of physical fields:

Field	Description
Parent	Parent of the Enterprise Data Catalog physical field.
Resource	The Enterprise Data Catalog resource that contains the physical field.
Parent Type	The parent type for the physical field.

Field	Description
Resource Type	The type of the Enterprise Data Catalog resource that contains the physical field. You can view many resource types, such as relational, file systems, custom resources, MongoDB, and business intelligent resources.
Last Updated	The date on which the physical field was last updated.
Datatype	The datatype for the physical field. Indicates whether the physical field is of string, numeric, or date data type.
Datatype Length	The datatype length for the physical field.
Primary Key Column	Indicates whether or not the physical field is a primary key.
Data Domains	The data domains associated with the physical field.
Data Domain Groups	The group that the data domains are a part of.
Null, Distinct, and Non-Distinct	The percentage of null, distinct, and non-distinct values in a column.
Custom Attributes	The different types of custom attributes the catalog administrator creates and configures for a physical field in the Catalog Administrator. You can view the custom attributes of data types, such as the date, string, boolean, decimal, integer, and URL. If a custom attribute is a URL with String type in Enterprise Data Catalog, Axon displays the custom attribute as a string of characters. If a custom attribute is a URL with URL type in Enterprise Data Catalog, Axon displays the custom attribute as a URL. You might see some glossaries that are not part of your current Axon instance because of the following reasons: - An Axon glossary from another Axon instance is defined as a custom attribute for the physical field in Enterprise Data Catalog, - A Business Glossary Term is defined as a custom attribute for the physical field in Enterprise Data Catalog. You might also see the stakeholders if a physical field contains a stakeholder in Enterprise Data Catalog.
Pattern	The data patterns for the physical field values along with the percentage and frequency. Each pattern appears as a horizontal bar chart along with the pattern format, number of rows, and percentage of rows.

Export Physical Fields

You can export the physical fields metadata to a CSV file. For example, if you want to bulk upload the relationship between Enterprise Data Catalog physical fields and Axon attributes, you need additional information, such as field identifiers. To retrieve more information on the Enterprise Data Catalog physical fields, you can export the physical fields metadata to a CSV file.

From the search area of the **Physical Fields** tab, click the icon next to the **Search** option and click **Export to CSV**. The name of the exported file is in the following format: `Physical Fields grid-<YYYYMMDD>.csv`. Make sure that the CSV file viewer displays characters that are encoded in UTF-8 format.

You can view the following metadata in the exported CSV file:

Physical Field Name

Name of the physical field.

Parent

Parent of the physical field. You can see the table names along with the schema information for relational sources and path information for non-relational sources.

Resource Name

Name of resource that contains the physical field.

Physical Field ID

Identifier for the physical field.

Path

Location of the physical field.

Class Type

Object class type of the physical field.

Glossary

The Axon glossary that the physical field is linked to. The exported file contains all the associated, inferred, and accepted glossaries.

Datatype

The datatype for the physical field. Indicates whether the physical field is of string, numeric, or date data type.

Datatype Length

The datatype length for the physical field.

Primary Key Column

Indicates whether or not the physical field is a primary key.

You can export up to 5000 physical fields. If the number of physical fields are more than 5000, you can apply filters and then export.

You can also export the physical fields metadata from the **Physical Fields** sub-tab in the **Enterprise Catalog** tab of a System object. For more information, see "View Enterprise Catalog in System" on page 193.

Physical Fields in Unison Search

You can view the fields that are linked to attributes in the **Physical Fields** facet from the Unison search interface.

To view the **Physical Fields** facet, click **+** sign, choose **Catalog**, and select **Physical Fields**. You can also apply filters, such as name and type, when you perform a Unison search on the fields.

In the **Physical Fields** facet, you choose to view the **Segments** column. The **Segments** column is hidden by default. If a physical field is linked to attributes that belong to different segments, the **Segments** column displays segment names in the following format: `Segment Name 1, +n`. When you click the **+n** hyperlink, you can view the additionally assigned segments.

Linking Resources with Systems Manually

Link Enterprise Data Catalog resources with Axon systems to view the fields in the **Physical Fields** tab in Axon. You can add an existing system or create a system. If you create a system, an automatic change request is triggered if it is configured in the Admin Panel. You must have an Enterprise Data Catalog account to view the resource details.

1. From the Axon toolbar, click **Create** > **Manage Catalog Links** to view the **Resources** tab.
2. Review the resource details and select the rows that you want to link to Axon systems. To make multiple selections, hold the control key and click every row that you want to include.
3. Right-click a row and click **Manage Linking**.

   The **Link Axon Systems** dialog box opens.
   The following image shows a sample system to which you can link a resource:

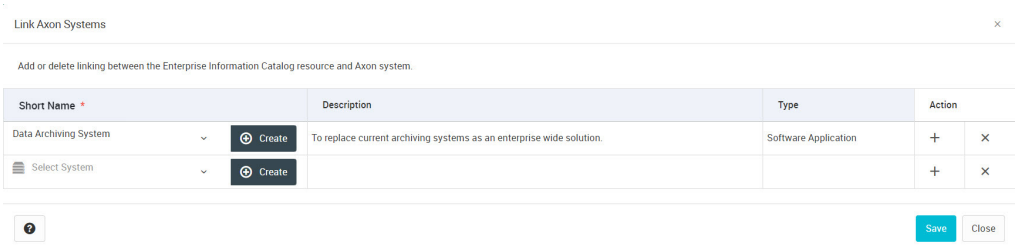

4. In the **Short Name** column, start typing the name of the system that you want to link to the rows that you selected.

   Axon starts suggesting systems based on the keywords that you type.
5. Select the system from the list of suggestions that Axon makes.

   Axon updates the **Description** and **Type** columns with information about the system that you selected.
6. Optionally, click **Create** to create a system.
   a. Configure the required properties.
   b. Click **Save**. If an automatic change request is configured for the System facet in the Admin Panel, the change request is automatically created in the Pending Start mode.
   c. Click **Save and Submit**. If an automatic change request is configured for the System facet in the Admin Panel, the change request is automatically created. The workflow starts automatically if all the stakeholders are present. If all the stakeholders are not present, the change request is in the Pending Start mode.
7. Optionally, click the **+** icon to add a row and link another system. You can add multiple systems to Enterprise Data Catalog resources.
8. Optionally, click the **X** icon to delete a row and remove an existing link.

   You cannot remove the link between a system and resource if the system has an attribute that is linked to a field in the resource. In such cases, you must first remove the link between the attribute and field and then delete the system to resource link.
9. Click **Save**.

   The resources are linked to systems. If an automatic change request for a system is in progress, you can see the linked resources after the change request is complete.

   Note: Axon lists a resource in the **Resources** tab even if you save the resource without running it or purge the resource in Enterprise Data Catalog. If you link the resource to a system, the **Physical Fields** tab does not list the corresponding fields.

Linking Physical Fields with Attributes Manually

Link Enterprise Data Catalog physical fields to data set attributes in Axon. You can set the status of fields that are not relevant to **Ignore**. If a resource is linked to a system, you can link the physical field of the resource only to the data set attribute that belongs to the system. If you create or edit a data set and add attributes during the linking process, an automatic change request is triggered if it is configured in the Admin Panel.

1. From the Axon toolbar, click **Create** > **Manage Catalog Links** to view the **Physical Fields** tab.
2. Review the field details and select the rows that you want to link to attributes in data sets. To make multiple selections, hold the control key and click the rows that you want to include.
3. Right-click a row and click **Manage Linking**. Optionally, click the drop-down menu next to the **Search** button and click **Manage Linking**.

   The **Link Axon Attributes** dialog box opens.
   The following image shows a sample linking of a physical field to attributes:

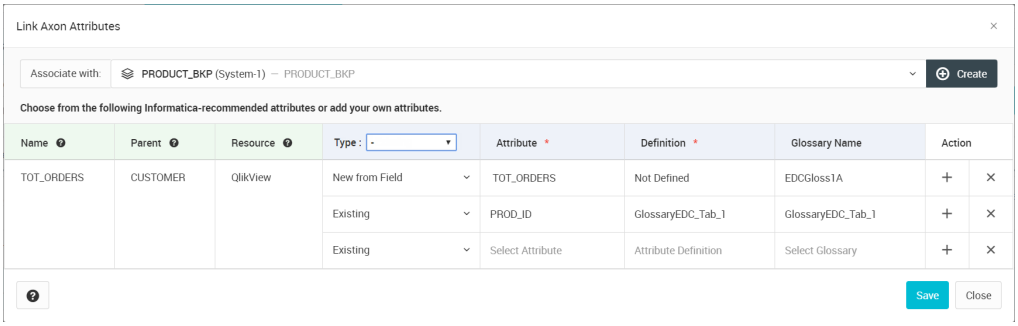

4. In the **Associate with** field, select a data set from which you want to link attributes to the physical field.

   Informatica recommends attributes of the selected data set that you can link the fields to. You can also view the list of data set attributes available in Axon.

   Note: If you link an Axon attribute with an Enterprise Data Catalog field that contains the `$` symbol in the field name, the field will not appear in the Physical Fields facet in Unison Search.
5. Optionally, click **Create** to create a data set.
   a. In the **Create a Data Set** dialog box, specify values for the required properties.

      When you select a system to create a data set, the list of systems that appears depends on the segments that you can access and the systems that are connected to Enterprise Data Catalog resources.

   b. Click **Save**. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created in the Pending Start mode.

   c. Click **Save and Submit**. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created. The workflow starts automatically if all the stakeholders are present. If all the stakeholders are not present, the change request is in the Pending Start mode.
6. From the **Type** list, select the link type.

Option	Description
Existing	Select an existing attribute of the data set.

Option	Description
New from Field	Create an attribute from the physical field information. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created. The workflow starts automatically if all the stakeholders are present. If all the stakeholders are not present, then the change request is in the Pending Start mode.

7. Based on the type of link, Axon updates the **Attribute**, **Definition**, and **Glossary Name** columns. If the definition is not available, the value displays "Not Defined."

   If you select **New from Field**, Informatica recommends a list of glossaries that you can associate with the attribute.

8. If you choose to associate the physical fields with **Existing** and **New from Field** type attributes, you can see the **Type** column reset to "-" value.

   Note: Axon displays an error message if you enter the **<** or **>** special character in an attribute.

9. Optionally, click the **+** icon to associate a new attribute to a field.
10. Optionally, click the **X** icon to unlink the Axon data set attribute and the Enterprise Data Catalog field.
11. Click **Save**.

    The physical fields are linked to attributes. If an automatic change request for a data set is in progress, you can see the linked physical fields after the change request is complete.

    Note: The review status appears deleted for automatically onboarded attributes to which the associated physical field becomes stale.

Onboarding Parent of Physical Fields as Data Set

You can link all the physical fields of a parent to attributes at once instead of individually linking each field of a parent to an attribute. This type of linking simplifies the process of onboarding of a parent-level object, such as folders and tables, as data sets in Axon. If you create or edit a data set and add attribute during the linking process, an automatic change request is triggered if it is configured in the Admin Panel.

1. From the Axon toolbar, click **Create** > **Manage Catalog Links** to view the **Physical Fields** tab.
2. Select a row for the parent from which you want to link the fields to attributes.
3. Right-click the row and click **Manage Parent-level Linking**. Optionally, click the drop-down menu next to the **Search** button and click **Manage Parent-level Linking**.

   If you select more than one row, you cannot see the **Manage Parent-level Linking** option.

4. In the **Associate with** field, select a data set from which you want to link attributes to the physical fields of the parent.

   Informatica recommends attributes of the selected data set that you can link the fields to.

The following image shows a sample linking of physical fields of a parent to attributes:

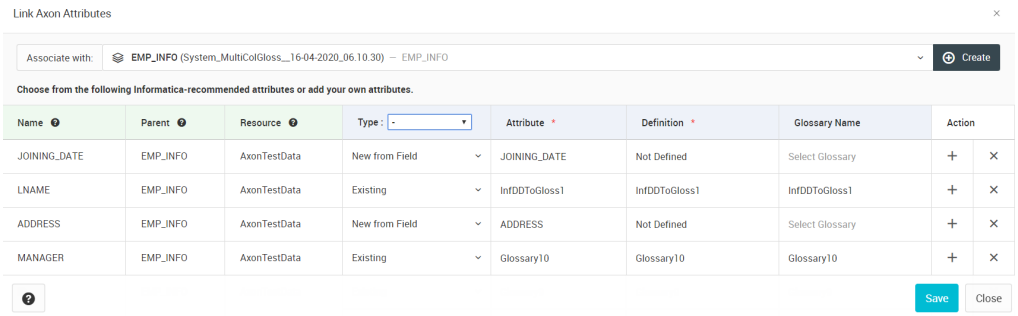

5. Optionally, click **Create** to create a data set.
   a. In the **Create a Data Set** dialog box, you can see that the parent name is populated for the data set name. You can change the name if you want.

      When you select a system to create a data set, the list of systems that appears depends on the segments that you can access and the systems that are connected to Enterprise Data Catalog resources.

   b. Specify values for the rest of the required properties.

   c. Click **Save**. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created in the Pending Start mode.

   d. Click **Save and Submit**. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created. The workflow starts automatically if all the stakeholders are present. If all the stakeholders are not present, the change request is in the Pending Start mode.
6. From the **Type** list, select the link type.

Option	Description
Existing	Select an existing attribute of the data set.
New from Field	Create an attribute from the physical field information. If an automatic change request is configured for the Data Set facet in the Admin Panel, the change request is automatically created. The workflow starts automatically if all the stakeholders are present. If all the stakeholders are not present, the change request is in the Pending Start mode.

7. If the link type is **New from Field**, Axon automatically populates the **Attribute** and **Definition** columns. If the definition is not available, the value displays "Not Defined."

   The **Glossary Name** column is automatically populated only if a field is linked to a glossary. If an attribute is linked to multiple glossaries, you need to manually select the glossary.

   If you select **Existing**, you have to manually choose the values for the **Attribute** and **Definition** fields. The **Glossary Name** column is automatically populated if an attribute has a linked glossary.
8. If you choose to associate the physical fields with Existing and New from Field type attributes, you can see the **Type** column reset to "-" value.
9. Optionally, click the **x** icon if you do not want to link a field of the selected parent to an attribute.
10. Click **Save**.

    All physical fields of parent are linked to attributes. If an automatic change request for a data set is in progress, you can see the linked physical fields after the change request is complete.

View Enterprise Catalog in Data Set

You can view the physical field information in the **Enterprise Catalog** tab of a Data Set object after you link the Enterprise Data Catalog physical fields to Axon attributes.

You can view the physical fields that are linked to the attributes of a Data Set object in the View mode of the Data Set object. In the Edit mode of a Data Set object, you cannot view the **Enterprise Catalog** tab.

The following image shows the **Enterprise Catalog** > **Physical Fields** view of a Data Set object:

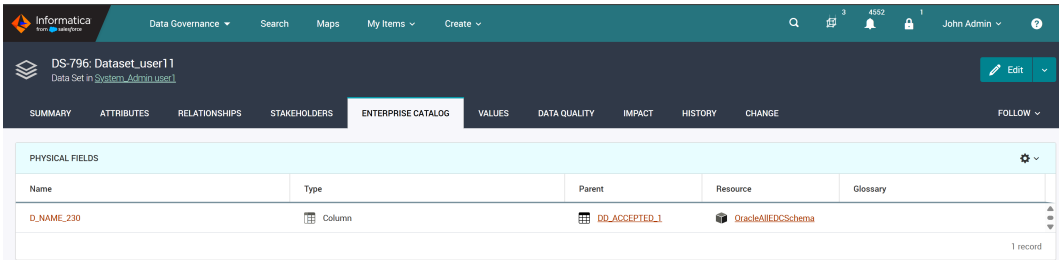

The **Physical Fields** tab displays the following information:

- Name
- Type
- Parent
- Resource
- Path
- Parent ID
- Glossary

You can search by the field name, field type, parent name, glossary name, and parent identifier. You can narrow down the search results by selecting a resources in which you want to search. You can also group the fields based on the **Parent ID** column to get a better view of all the physical fields that belong to a parent. The **Path** column is hidden by default. You need to choose the **Path** column from the grid settings.

You can export the physical fields metadata from a Data Set object to a PDF or Microsoft Excel format.

View Enterprise Catalog in Glossary

When you open a Glossary object, you can see Enterprise Data Catalog physical fields that are directly linked to the Glossary object. You can also see physical fields that are indirectly linked to the Glossary object via a data domain.

In the View mode of a Glossary object, you can see the physical fields that are associated only to the Glossary object. In the Edit mode of a Glossary object, you cannot view the **Enterprise Catalog** tab.

The following image shows the **Enterprise Catalog** > **Physical Fields** view of a Glossary object:

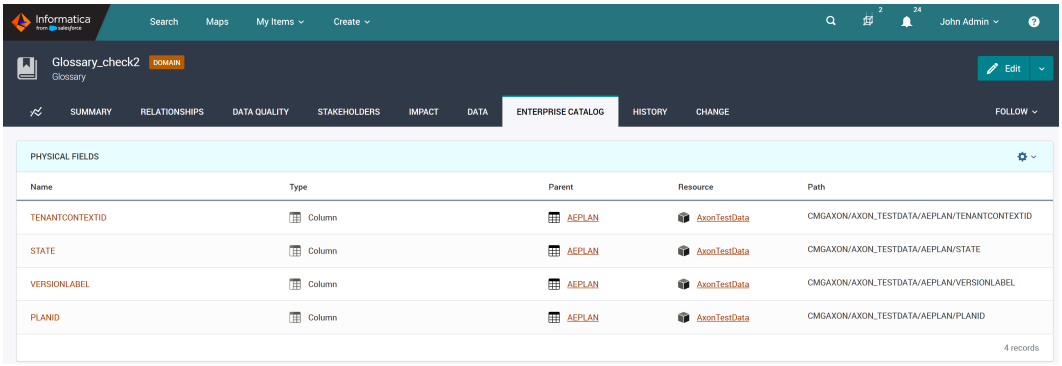

The **Physical Fields** section displays the following information:

- Name
- Type
- Parent
- Resource
- Path

The **Path** column is hidden by default. You need to choose the **Path** column from the grid settings.

View Enterprise Catalog in System

After you install and configure Enterprise Data Catalog, you can view the **Resources**, **Physical Fields**, and **Data Onboarding Rules** sub-tabs under the **Enterprise Catalog** tab of a System object.

To view resources in the **Resources** sub-tab of a System object, you need to link the system to a resource. From the Axon toolbar, click **Create** > **Manage Catalog Links** and create a resource to system link from the **Resources** facet. For more information, refer to "Linking Resources with Systems Manually" on page 188.

After you link a system to a resource, you need to link the physical fields to attributes to view field information in the **Physical Fields** sub-tab of the System object.

In the Edit mode of a System object, you can perform the following operations in the **Enterprise Catalog** tab:

- From the **Physical Fields** sub-tab, link a physical field to an attribute. For more information, refer to "Linking Physical Fields with Attributes Manually" on page 189.
- From the **Physical Fields** sub-tab, link multiple fields of a parent to attributes at the same time instead of individually linking each field of a parent to an attribute. For more information, refer to "Onboarding Parent of Physical Fields as Data Set" on page 190
- From the **Data Onboarding Rules** sub-tab, select a data onboarding rule that you can use to apply filters on objects that are onboarded from Enterprise Data Catalog to Axon. After you enable the automated onboarding process, the Enterprise Data Catalog objects are filtered based on the rule configuration and then the data sets and attributed are onboarded to the system. For more information, see "Data Onboarding Rules for a System" on page 196.

In the View mode of a System object, you can see the resources, physical fields, and data onboarding rule that are associated only to the System object. In the Edit mode of a System object, you can link physical fields to existing attributes or create attributes from the data sets within the system. The **Resources** tab does not appear in the Edit mode of a System object.

If you do not have access to some resources and physical fields in Enterprise Data Catalog and the SuperAdmin user chooses to restrict access to objects in Axon based on the access permissions in Enterprise Data Catalog, you can still view the resources and physical fields on the **System** > **Enterprise Catalog** page. In the Edit mode of a System object, you cannot view the physical fields that you cannot access in Enterprise Data Catalog.

The following image shows the **Enterprise Catalog** > **Physical Fields** view of a System object:

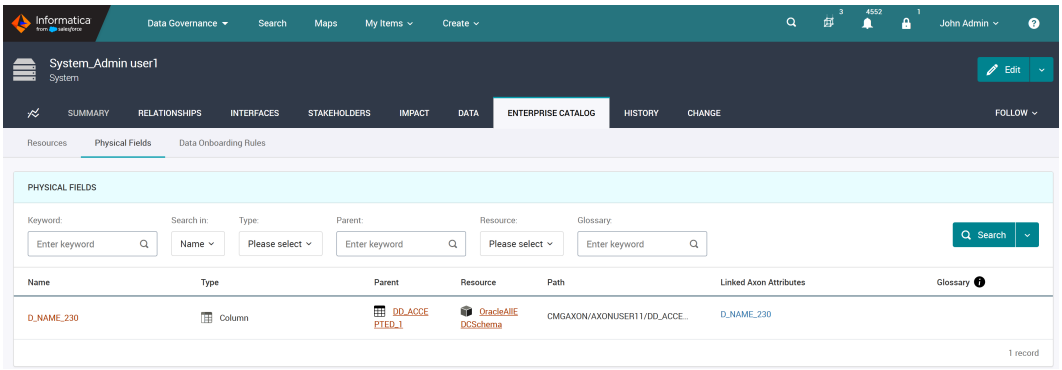

You can filter the information in the **Physical Fields** tab by status type. You can search by the field name, parent name, glossary, and narrow down the search by selecting resources to search in. In the Parent Name field, Axon displays suggestions for table names along with the schema information for relational sources and path information for non-relational sources.

Export Resources in System

In an Axon system, you can export the Enterprise Data Catalog resources metadata to a CSV file. For example, if you want to bulk upload the relationship between Enterprise Data Catalog resources and Axon systems, you need additional information, such as resource identifiers. To retrieve more information on the Enterprise Data Catalog resources, export the resources metadata to a CSV file.

From the search area of the **Resources** tab, click the icon next to the **Search** option and click **Export to CSV**. The name of the exported file is in the following format: `Resources grid-<YYYYMMDD>.csv`. Make sure that the CSV file viewer displays characters that are encoded in UTF-8 format.

You can view the following metadata in the exported CSV file:

Resource Name

Name of the Enterprise Data Catalog resource.

Description

Description of the resource.

Resource ID

A unique identifier for the resource.

Resource Type

Type of the resource, such as Oracle, File System, and Teradata.

Created Date

The date on which the resource is created.

Export Physical Fields in System

You can export the physical fields metadata to a CSV file. You can export the physical fields from Axon in View and Edit modes of the System object.

In the search area of the **Physical Fields** tab, click the icon next to the **Search** option and click **Export to CSV**. The name of the exported file is in the following format: `Physical Fields-<YYYYMMDD>.csv`. Make sure that the CSV file viewer displays characters that are encoded in UTF-8 format.

You can view the following metadata in the exported CSV file:

Physical Field Name

Name of the physical field.

Parent

Parent of the physical field. You can see the table names along with the schema information for relational sources and path information for non-relational sources.

Resource Name

Name of resource that contains the physical field.

Physical Field ID

Identifier for the physical field.

Path

Location of the physical field.

Class Type

Object class type of the physical field.

Glossary

The Axon glossary that the physical field is linked to. The exported file contains all the associated, inferred, and accepted glossaries.

Datatype

The datatype for the physical field. Indicates whether the physical field is of string, numeric, or date data type.

Datatype Length

The datatype length for the physical field.

Primary Key Column

Indicates whether or not the physical field is a primary key.

You can export up to 5000 physical fields. If the number of physical fields are more than 5000, you can apply filters and then export.

You can also export the physical fields metadata from the **Physical Fields** tab in the **Create** > **Manage Catalog Links** page. For more information, see "Enterprise Data Catalog Objects" on page 176.

Data Onboarding Rules for a System

In an Axon system, use data onboarding rules that you can apply for automated onboarding of data sets and attributes from Enterprise Data Catalog. You can also apply data onboarding rules to download and preview data that you can use later to bulk upload manually.

An Admin or SuperAdmin user creates data onboarding rules from the Admin Panel. You can select a single rule for a system.

When you edit a system, you can choose an onboarding rule for the system from the **Enterprise Catalog** > **Data Onboarding Rules** tab. The onboarding rule specifies the objects that you want to include in the onboarding process. After you configure the onboarding rule, you can view the onboarding rule properties in the View mode of the system.

You can view the **Data Set Status** and **Data Set Lifecycle** fields for all Data Set assets onboarded into the Axon system. These fields appear on the **Enterprise Catalog > Data Onboarding Rules** tab on the System facet. The lifecycle and status updates of all onboarded Data Set assets are available in the System facet. The Admin or SuperAdmin can configure the **Default Axon Status for Creating Object** and **Default Lifecycle for Creating Object** fields from the **Admin panel > Default Change Request** page.

The following image depicts the **Data Onboarding Rules** sub-tab:

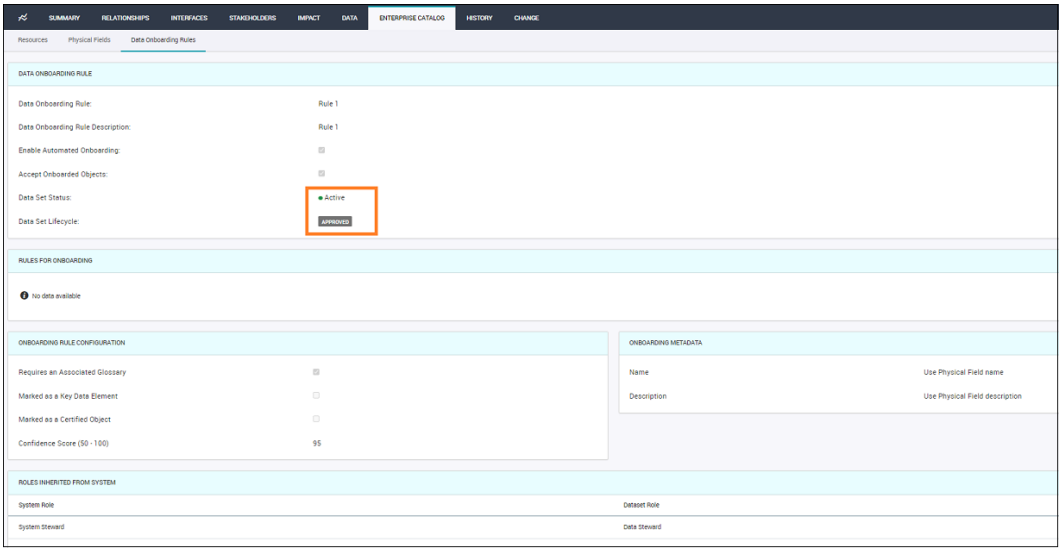

The objects are onboarded from Enterprise Data Catalog to Axon based on the following rule properties:

Context

The context based on which the objects are onboarded. The context values include Parent, Type, and Path.

If the **Rules for Onboarding** section contains multiple rows specified with context and regular expressions, the data is onboarded based on the combination of all the conditions.

Regular Expression

A regular expression with a pattern based on which the objects are onboarded. If the **Rules for Onboarding** section contains multiple rows specified with context and regular expressions, the data is onboarded based on the combination of all the conditions.

Requires an Associated Glossary

If this option is enabled in the rule, the objects are onboarded if a physical field is linked to a glossary in Enterprise Data Catalog. If this option is not enabled and a physical field is not linked to a glossary, the default glossary specified in the Admin Panel is used for onboarding objects.

Marked as a Key Data Element

If this option is enabled in the rule, the objects are onboarded to an Axon system only if a physical field is connected to a glossary that is a key data element. If the default glossary specified from the Admin Panel is used for onboarding objects, then the default glossary needs to be a key data element.

Marked as a Certified Object

If this option is enabled in the rule, the objects are onboarded only if a physical field is marked as a certified object in Enterprise Data Catalog.

Confidence Score (50 - 100)

The confidence score threshold value based on which the objects are onboarded from Enterprise Data Catalog. The value ranges from 50 to 100. The default value is 95.

The confidence score value is applicable if the **Requires an Associated Glossary** option is selected. If the **Requires an Associated Glossary** option is not selected, the onboarded attribute has 100% confidence score.

Name

The glossary or physical field name that is used for the onboarded attribute. The default value is "Use Glossary Name."

Description

The glossary or physical field description that is used for the onboarded attribute. The default value is "Use Glossary Description."

System Role

The role that the onboarding job uses to get the stakeholders. While onboarding, the Dataset create job gets the stakeholders for this role from the system and assigns it to the mapped dataset role. You can view the list of stakeholders from the Stakeholders tab. For more information, see "Stakeholders" on page 54.

Dataset Role

The child role that inherit stakeholders from the parent system role. For example, Data Steward (dataset role) is mapped to the System Steward (system role).

Note: While onboarding, the Dataset create job maps the configured system roles to the dataset roles.

In automated onboarding, the data sets and attributes are automatically created in an Axon system and the notifications are sent to the stakeholders. You can choose to enable automated onboarding of objects from Enterprise Data by selecting the **Enable Automated Onboarding** option.

If you choose the **Accept Onboarded Objects** option, the attributes from Enterprise Data Catalog appear with the Accepted review status in Axon. You do not have to curate these objects again in Axon.

When you apply a data onboarding rule and enable automated onboarding in a system, you need to save the settings. Then you can see the activities recorded in the **System** > **History** tab.

Download and Preview Data

In the Edit mode of a system, you can choose to download and preview the Enterprise Data Catalog physical fields that will be part of the automated onboarding process. The physical fields are populated in the downloaded file based on the onboarding rule that you selected. You can also use the list of physical fields to link to Axon attributes using the Attribute X Physical Field bulk upload template.

After you select an onboarding rule, you must save the System object to enable the **Download and Preview** button. After you click **Download and Preview**, the file downloads in the CSV format. The file might take some time to download based on the amount of data.

You can view the following information in the downloaded CSV file:

Physical Field Name

Name of the physical field.

Parent

Parent of the physical field. You can see the table names along with the schema information for relational sources and path information for non-relational sources.

Resource Name

Name of resource that contains the physical field.

Physical Field ID

Identifier for the physical field.

Path

Location of the physical field.

Class Type

Object class type of the physical field.

Glossary Name

The Axon glossary that the physical field is linked to. The exported file contains all the associated, inferred, and accepted glossaries.

Data Type

The datatype for the physical field. Indicates whether the physical field is of string, numeric, or date data type.

Data Length

The datatype length for the physical field.

Primary Key Column

Indicates whether or not the physical field is a primary key.

If the download and preview task fails, you can view the error details in the downloaded CSV file.

Data Onboarding Rule Example

Consider that in the Finance system, you want to filter onboarding of objects based on the parent that contains "PROD" OR "PRODUCTION" in the name and schema name "LDMV1SCN" that is present in the path of the physical field. Select the data onboarding rule from the list. You can click **Download and Preview** to preview the data that appears after the onboarding process.

The following image shows a sample system with a configured data onboarding rule:

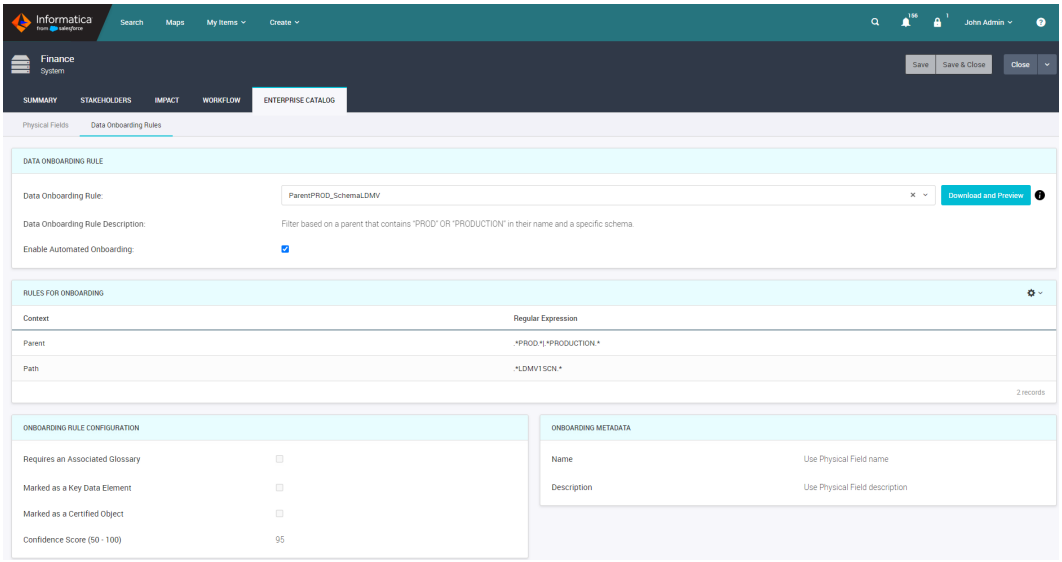

In this example, the Finance system has an onboarding rule with the following filter criteria:

- Context is "Parent" to find the parent with the name `.*PROD.*|.*PRODUCTION.*` specified in the regular expression.
- Context is "Path" to locate the schema with name `.*LDMV1SCN.*` specified in the regular expression.
- Onboarded attributes must have the name same as the physical field name and the description same as the physical field description.

Based on the rule configuration, the filter is applied on resources that contains schema name LDMV1SCN in the path and the physical fields with the parent that has "PROD" or "PRODUCTION" in the name.

Automate Object Onboarding from Enterprise Data Catalog

After you integrate Axon with Enterprise Data Catalog, you can choose to automate the process of onboarding the discovered objects from Enterprise Data Catalog. In the onboarding process, Informatica identifies the critical data elements and automatically creates objects, such as data sets and attributes, and brings them to Axon. This automation eliminates the need for you to manually create content and link Axon objects and Enterprise Data Catalog technical assets. The automation increases efficiency, productivity, and adds value to the business.

You define a glossary and system in Axon. Configure data onboarding rules and apply the onboarding rules to systems in which you want to onboard data sets and attributes. You need to enable the automated onboarding process from the System objects. Enterprise Data Catalog is master catalog of technical assets and contains data domains and physical fields. Based on the onboarding rule criteria and associations between a glossary and data domain or physical field linking, the onboarding job discovers objects that can be onboarded from Enterprise Data Catalog. You can choose to discover the attributes that are related to an Axon glossary term with the help of Enterprise Data Catalog instead of manually searching and linking them. Informatica automates the process of creating data sets and attributes and onboards them into Axon. Axon sends notifications about the discovered objects for a glossary to the glossary stakeholders. You can curate

the attributes by accepting or rejecting them. Ensure that the onboarded data sets have assigned stakeholders to curate the attributes.

Any modification made in attribute glossary details are updated in Axon system only for the automatically onboarded assets and not for manual onboarded assets.

Note: If objects are assigned to segments in Axon, the automated onboarding of objects are based on the segments that the objects belong to.

Prerequisites

Verify the following prerequisites:

- You have installed Enterprise Data Catalog that runs on Informatica version 10.2.2 or higher.
- You have configured the Enterprise Data Catalog parameters from the Admin Panel in Axon. For more information, refer to the *Configure Access to Enterprise Data Catalog* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.
- You have created the required systems and glossaries in Axon.
- You have linked an Axon system to at least one Enterprise Data Catalog resource. For more information, refer to "Linking Resources with Systems Manually" on page 188
- You have created a data onboarding rule from the Admin Panel, applied the rule to an Axon system, and enabled the automated onboarding process from the system. For more information, refer to "Configure and Apply Data Onboarding Rules" on page 204
- Each glossary has a stakeholder to receive onboarding notifications.

Automated Onboarding Process

In the automated onboarding process, the key elements are identified based on a data onboarding rule specified for a system. Configure a data onboarding rule and apply to a system. After you enable automated onboarding from the system, the data sets and attributes are automatically created.

The following image shows the automated onboarding process flow from Enterprise Data Catalog to Axon:

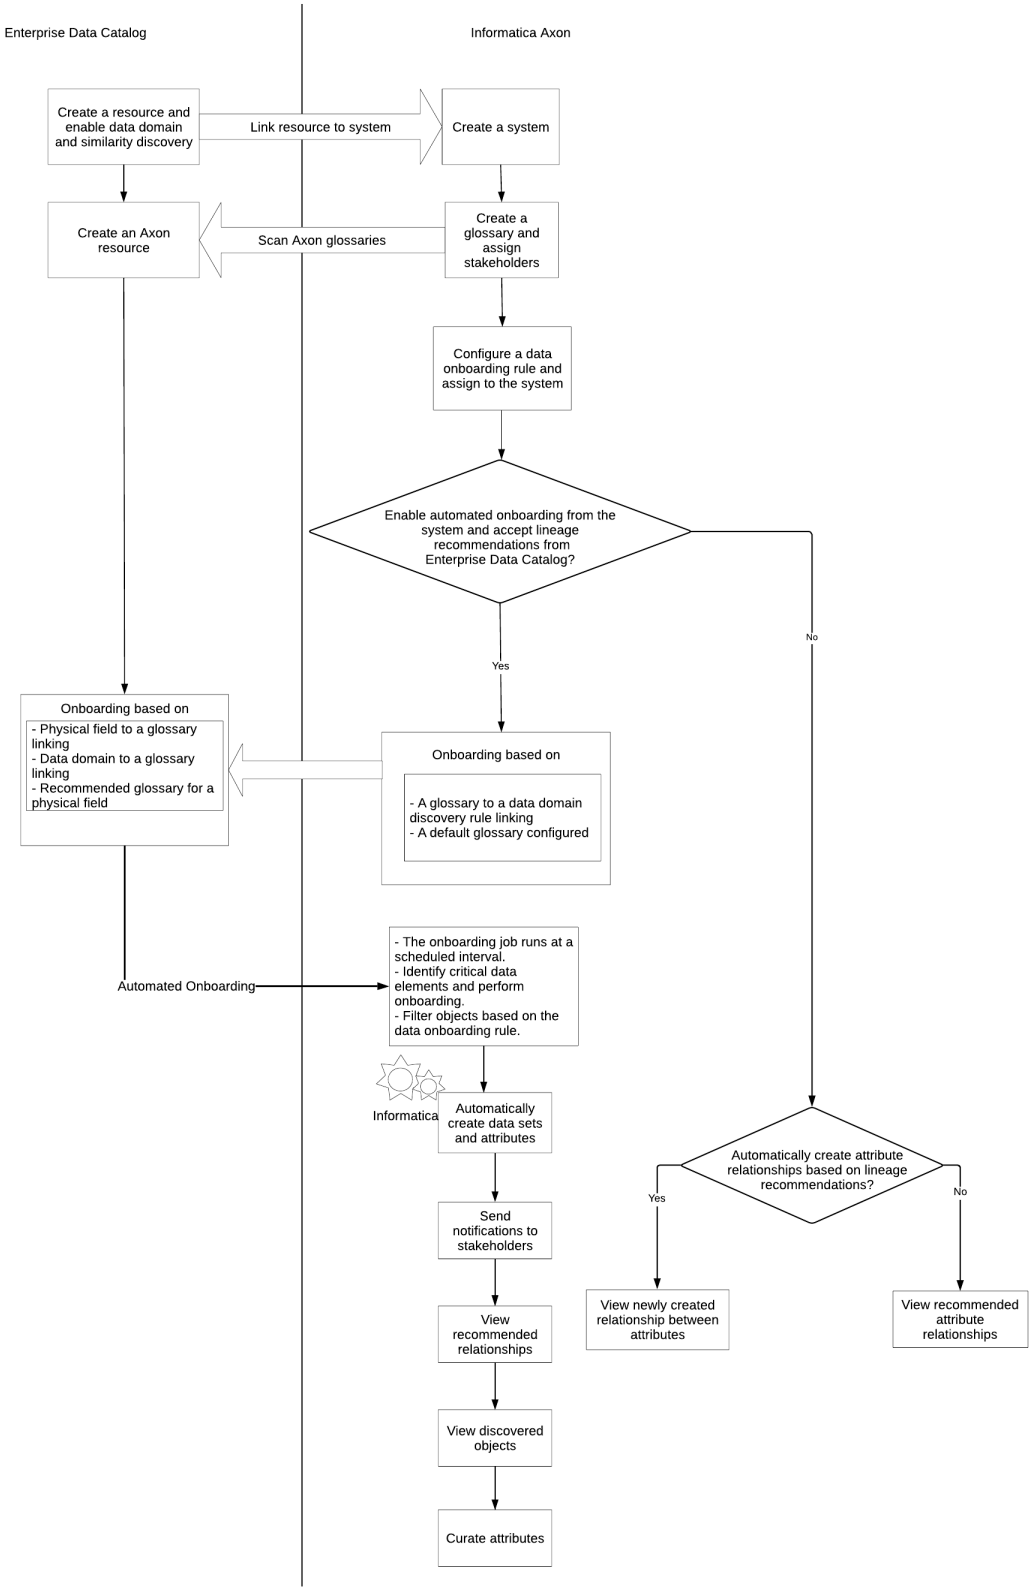
Enterprise Data Catalog
Informatica Axon
Create a resource and enable data domain and similarity discovery
Link resource to system
Create a system
Create an Axon resource
Scan Axon glossaries
Create a glossary and assign stakeholders
Configure a data onboarding rule and assign to the system
Enable automated onboarding from the system and accept lineage recommendations from Enterprise Data Catalog?
Yes
No
Onboarding based on
- Physical field to a glossary linking
- Data domain to a glossary linking
- Recommended glossary for a physical field
Onboarding based on
- A glossary to a data domain discovery rule linking
- A default glossary configured
Automated Onboarding
- The onboarding job runs at a scheduled interval.
- Identify critical data elements and perform onboarding.
- Filter objects based on the data onboarding rule.
Informatica
Automatically create data sets and attributes
Send notifications to stakeholders
View recommended relationships
View discovered objects
Curate attributes
Automatically create attribute relationships based on lineage recommendations?
Yes
No
View newly created relationship between attributes
View recommended attribute relationships

The following process describes the series of events for automatic onboarding of objects into Axon:

1. Create a resource in Enterprise Data Catalog. Optionally, you can enable data domain and similarity discovery options. For more information, refer to the topics *Creating a Resource* and *Enable Data Discovery* in the *Informatica 10.5 Catalog Administrator Guide*.
2. Create an Axon resource type in Enterprise Data Catalog. Use the Axon scanner to scan the Axon glossaries. For more information, refer to the topics *Creating a Resource* and *Axon Resource Type Properties* in the *Informatica 10.5 Catalog Administrator Guide*.
3. Create glossaries and systems in Axon. Assign at least one stakeholder to a glossary to receive notifications about onboarding objects into Axon. For more information, see "Creating an Object" on page 82.
4. To automate the onboarding of data sets and attributes, you must first configure data onboarding rules in the Admin Panel. For more information on creating data onboarding rules, refer to the *Configure Data Onboarding Rules* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.
5. Apply onboarding rules and enable automated onboarding from Axon systems. Based on the configured onboarding rules, Axon includes or excludes onboarding of the data sets and attributes from Enterprise Data Catalog. For more information, see "Data Onboarding Rules for a System" on page 196.
6. A background job is scheduled to run daily at a predefined interval. When the job runs, Informatica identifies critical data elements based on the configured onboarding rules and the data sets and attributes are automatically created in Axon systems. For more information, see "Onboarding Scheduler" on page 204.
   The onboarding process is based on any of the following associations:
   - When you link a physical field to a glossary in Enterprise Data Catalog. For more information, refer to the *Add Business Title* topic in the *Informatica 10.5 Enterprise Data Catalog User Guide*.
   - When you link a physical field to a data domain and the data domain is linked to a glossary in Enterprise Data Catalog. For more information, refer to the *Column and Field Assets* and *Data Domain Assets* topics in the *Informatica 10.5 Enterprise Data Catalog User Guide*.
   - When a physical field displays recommended glossaries in Enterprise Data Catalog. For more information, refer to the *Add Business Title* topic in the *Informatica 10.5 Enterprise Data Catalog User Guide*.
   - When a glossary is linked to a data domain discovery rule in Axon. For more information, see "Data Domain Discovery Rules" on page 113.
   - When a default glossary is specified in the Admin Panel. If a glossary association is selected in the onboarding rule for the system, Axon searches for the physical fields that are associated to a glossary. If a glossary association is not selected in the onboarding rule for the system, Axon uses the default glossary to onboard the objects from Enterprise Data Catalog.

   For more information, see "Linking Glossaries" on page 230.
7. Axon sends notifications to the glossary stakeholders about the discovered objects. For more information, see "Notify Stakeholders" on page 212.
8. View the discovered data sets and attributes. Curate the attributes by accepting or rejecting them. Ensure that the onboarded data sets have assigned stakeholders with Edit permissions to curate the attributes. For more information, see "View Discovered Objects" on page 213 and "Curate Discovered Attributes" on page 214.
9. You can view newly created relationships between attributes in Axon if you choose to accept the lineage recommendations from Enterprise Data Catalog and create links automatically. You can view the attribute links in both inbound and outbound relationship grids. You can filter based on the created date to find the newly created attribute links.

Configure and Apply Data Onboarding Rules

To automatically onboard objects from Enterprise Data Catalog, you must configure data onboarding rules and enable automated onboarding from Axon systems.

After you configure the Enterprise Data Catalog parameters in Axon, you can create data onboarding rules from the Admin Panel. In a data onboarding rule, you specify the properties based on which you want to automatically onboard the objects. You can define multiple rules as per your requirement for different systems. You can apply a single data onboarding rule for a system. For more information on creating data onboarding rules, refer the *Configure Data Onboarding Rules* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.

Navigate to a System object in which you want the data sets and attributes to be onboarded. Click the **Enterprise Catalog** > **Data Onboarding Rules** view. Click **Edit**, select the configured onboarding rule, and choose the **Enable Automated Onboarding** option to automatically onboard objects from Enterprise Data Catalog based on the onboarding rule. For more information, see "Data Onboarding Rules for a System" on page 196.

Onboarding Scheduler

Axon has a predefined scheduled job that runs every day at 2 a.m. After the job runs, the discovered objects are automatically onboarded from Enterprise Data Catalog to Axon.

When the onboarding script runs for the first time, Informatica onboards all the discovered data sets and attributes into Axon. When it runs the next time, the newly discovered data sets and attributes are onboarded.

When the onboarding job runs, the relationship between attributes is also onboarded if you choose to automatically create links from the Admin Panel.

Common Onboarding Conditions

The following conditions apply to an onboarding process:

- The name of the onboarded attribute is same as that of either the glossary name or physical field name based on the configuration in the Admin Panel.
- The name of the onboarded data set is that of the parent name of the field.
- If a parent is associated to a glossary in Enterprise Data Catalog, the glossary is used to automatically create a data set with the parent name. Otherwise, the glossary that is required to automatically create a data set is randomly selected. For example, consider that table EMP_DATA has columns EmpName and EmpID. The column EmpName is linked to glossary "Name" and column "EmpID" is linked to glossary ID. If the table EMP_DATA is linked to a glossary, a data set with the name EMP_DATA is automatically created using the glossary. If the table is not linked to any glossary, a data set with the name EMP_DATA is automatically created using either glossary "Name" or "ID".
- If a data set exists in Axon, only the attributes are onboarded within the data set.
- If data sets and attributes exist in Axon, the data sets and attributes are not onboarded, but the link is created in Axon.
- If you reject a discovered attribute in Axon, the attribute is not onboarded again.
- If a field in a custom resource does not have a parent in Enterprise Data Catalog, then the attribute corresponding to the field is not onboarded to Axon. This happens because you need a data set to onboard attributes, and without a parent, the data set context is missing.
- If you configure a mandatory custom field for data sets and attributes in Axon, the onboarded data sets and attributes display the mandatory field with the default value that you provide while creating the mandatory custom field. You can change the default value for the mandatory custom field from the Data

Set and Attribute objects. The onboarding of objects do not happen for some of the Business Intelligence resources that do not display the parent information.

- If you configure a non-mandatory custom field for data sets and attributes in Axon, the onboarded data sets and attributes display the non-mandatory field without any value. You can specify a value from the Data Set and Attribute objects.
- If objects are part of different segments, the objects are not automatically onboarded. For example, consider that glossary G1 is part of segment Seg1 and system S1 is part of segment Seg2. If G1 is connected to physical field C1 of resource R1 and R1 is connected to S1, the attributes are not automatically onboarded because S1 and G1 belong to two different segments.

Data Onboarding Rule Conditions

The following onboarding rule conditions apply to an onboarding process:

Associated Glossary Required

If you select the **Requires an Associated Glossary** option and specify the **Confidence Score** value in an onboarding rule, the confidence score value is considered. The data is onboarded only if the calculated confidence score value is greater than or equal to the specified confidence score value.

For example, consider that the **Requires an Associated Glossary** option is selected and confidence score is 50% in a data onboarding rule. In Enterprise Data Catalog, physical field "EMP" is linked to inferred data domain "ID" that has a confidence score of 66.67% and "ID" is linked to glossary "Ref". Based on the rule conditions, the attribute "Ref" is onboarded with a calculated confidence score of 63.3% and the onboarded attribute "Ref" is linked to glossary "Ref".

Associated Glossary Not Required

If the **Requires an Associated Glossary** option is not selected in an onboarding rule, the confidence score value specified in the rule is not considered for the following cases:

- Consider that a physical field is associated with an inferred data domain and the physical field is linked to a glossary. If the inferred data domain is also linked to a glossary, the attributes are onboarded with a confidence score of 100% based on the physical field to glossary linking.
  For example, consider that physical field "Length" is associated with inferred data domain "Measure" that has confidence score of 60%. Physical field "Length" is associated with glossary "Unit" and data domain "Measure" is associated with glossary "Height". The attribute "Unit" is onboarded with a confidence score of 100% and glossary "Unit" linked to onboarded attribute "Unit".
- Consider that a physical field is associated with an inferred data domain and the inferred data domain is linked to a glossary. If the physical field is not linked to a glossary, the attribute is onboarded with a confidence score of 100% based on the inferred data domain to glossary linking without considering the confidence score value of the inferred data domain.
  For example, consider that physical field "Length" is associated with inferred data domain "Measure" that has confidence score of 60%. Data domain "Measure" is associated with glossary "Height" and the physical field is not linked to any glossary. The attribute "Height" is onboarded with a confidence score of 100% and glossary "Height" linked to onboarded attribute "Height".
- Consider that a physical field is associated with an inferred data domain and the physical field and inferred data domain are not linked to any glossary. If a default glossary is specified in the Admin Panel, the attribute is onboarded based on the default glossary.
  For example, consider that physical field "EMP" is associated with inferred data domain "Record" that has a confidence score of 50%. Both the physical field and inferred data domain are not linked to any glossary. The default glossary "Cust" is configured in the Admin Panel. The attribute "Cust" is onboarded with a confidence score of 100% and glossary "Cust" is linked to onboarded attribute "Cust".

- Consider that a physical field is associated with an accepted data domain and the physical field is linked to a glossary. If the accepted data domain is also linked to a glossary, the attributes are onboarded with a confidence score of 100% based on the physical field to glossary and data domain to glossary linking.
  For example, consider that physical field "Age" is associated with accepted data domain "Number" that has confidence score of 100%. Accepted data domain "Number" is linked to glossary "ID" and physical field "Age" is glossary "Years". The attributes "ID" and "Years" are onboarded with a confidence score of 100%. The glossary "ID" is linked to the onboarded attribute and glossary "Years" is linked to the onboarded attribute "Years".
- Consider that a physical field is associated with an inferred data domain and the physical field and inferred data domain are not linked to any glossary. If a default glossary is not specified in the Admin Panel, the attribute is not onboarded at all.

Objects Onboarding Scenarios

Consider the onboarding scenarios for resources with relational sources, such as tables and columns. The process of automated onboarding of objects vary based on the following types of links between a system and resource:

- A single system is linked to a single resource.
- Multiple systems are linked to a single resource.

In all the scenarios, consider that you choose the glossary names for the onboarded attributes.

Note: Axon automatically onboard only the exact table details, such as description of dataset attribute from Enterprise Data Catalog to Data Set object definition in Axon system. This auto-update happens only for the automatically onboarded assets.

Scenario 1. Single System to Single Resource

After you link an Axon system to a single Enterprise Data Catalog resource, the onboarding results can vary based on whether columns of the resource are linked to different glossaries or the same glossary.

Consider that system S1 is linked to resource R1. Resource R1 contains tables T1 and T2. Table T1 contains columns C1, C2, C3, and C5. Table T2 has a column C4.

Multiple Columns Linked to Different Glossaries

In this case, columns C1, C2, C3, and C5 of table T1 are linked to different glossaries G1, G2, G3, and G5 respectively. Column C4 of table T2 is linked to glossary G4.

The following image shows a sample linking of multiple columns from different tables of a single resource to different glossaries:

System to Resource Linking	Table with Column in Resource	Glossary
S1 -> R1	T1.C1 (R1)	G1
	T1.C2 (R1)	G2
	T1.C3 (R1)	G3
	T1.C5 (R1)	G5
	T2.C4 (R1)	G4

In this case, the objects are onboarded in the following way:

- A data set is created and onboarded with the same name as of table T1.

- Attributes are created and onboarded with the same names as of glossaries G1, G2, G3, and G5. Attributes G1, G2, G3, and G5 are created within data set T1.
- Another data set is created and onboarded with the same name as of table T2.
- Another attribute is created and onboarded with the same name as of glossary G4. Attribute G4 is created within the data set T2.

The following image shows a sample list of the onboarded objects:

Onboarded Objects	
Data Set	Attribute
T1	G1
	G2
	G3
	G5
T2	G4

Multiple Columns Linked to Same Glossary

In this case, resource R1 is linked to system S1. Consider that all the columns of tables T1 and T2 of the resource R1 are linked to the same glossary G1.

The following image shows a sample linking of multiple columns from different tables of a single resource to the same glossary:

System to Resource Linking	Table with Column in Resource	Glossary
S1 -> R1	T1.C1 (R1)	G1
	T1.C2 (R1)	G1
	T1.C3 (R1)	G1
	T1.C5 (R1)	G1
	T2.C4 (R1)	G1

In this case, the objects are onboarded in the following way:

- A data set is created and onboarded with the same name as of table T1.
- An attribute is created and onboarded with the same name as of glossary G1. Attribute G1 is created within data set T1.
- Another data set is created and onboarded with the same name as of table T2.
- Another attribute is created and onboarded with the same name as of glossary G1. Attribute G1 is created within the data set T2.

The following image shows a sample list of the onboarded objects:

Onboarded Objects	
Data Set	Attribute
T1	G1
T2	G1

Scenario 2. Multiple Systems to Single Resource

After you link multiple Axon systems to a single Enterprise Data Catalog resource, the onboarding results can vary based on whether columns of the resource are linked to different glossaries or same glossary.

Consider that systems S1 and S2 are linked to resource R1. Resource R1 contains tables T1 and T2. Table T1 contains columns C1, C2, and C3. Table T2 contains columns C4 and C5.

Multiple Columns Linked to Different Glossaries

In this case, columns C1, C2, and C3 of table T1 are linked to different glossaries G1, G2, and G3 respectively. Columns C4 and C5 of table T2 are linked to glossaries G4 and G5 respectively.

The following image shows a sample linking of multiple columns from different tables of a resource to different glossaries:

System to Resource Linking	Table with Column in Resource	Glossary
S1 -> R1 and S2 -> R1	T1.C1 (R1)	G1
	T1.C2 (R1)	G2
	T1.C3 (R1)	G3
	T2.C4 (R1)	G4
	T2.C5 (R1)	G5

If multiple systems are linked to a single resource and multiple columns from different tables of the resource are linked to different glossaries, the data sets and attributes are created and onboarded to each system. In this case, the objects are onboarded in the following way:

- A data set is created and onboarded with the same name as of table T1 in systems S1 and S2.
- Attributes are created and onboarded with the same names as of glossaries G1, G2, and G3. Attributes G1, G2, and G3 are created within data set T1 in systems S1 and S2.
- Another data set is created and onboarded with the same name as of table T2 in systems S1 and S2.
- Attributes are created and onboarded with the same names as of glossaries G4 and G5. Attributes G4 and G5 are created within data set T2 in systems S1 and S2.

The following image shows a sample list of the onboarded objects:

Onboarded Objects			
S1		S2	
Data Set	Attribute	Data Set	Attribute
T1	G1	T1	G1
	G2		G2
	G3		G3
T2	G4	T2	G4
	G5		G5

Multiple Columns Linked to Same Glossary

In this case, all columns from tables T1 and T2 are linked to the same glossary G1.

The following image shows a sample linking of multiple columns from different tables to the same glossary:

System to Resource Linking	Table with Column in Resource	Glossary
S1 -> R1 and S2 -> R1	T1.C1 (R1)	G1
	T1.C2 (R1)	G1
	T1.C3 (R1)	G1
	T2.C4 (R1)	G1
	T2.C5 (R1)	G1

If multiple systems are linked to a single resource and multiple columns from different tables of the resource are linked to the same glossary, data sets along with attributes are created and onboarded to each system. In this case, the objects are onboarded in the following way:

- A data set is created and onboarded with the same name as of table T1 in systems S1 and S2.
- Another data set is created and onboarded with the same name as of table T2 in systems S1 and S2.
- An attribute is created and onboarded with the same name as of glossary G1 in both data sets T1 and T2 for systems S1 and S2.

The following image shows a sample list of the onboarded objects:

Onboarded Objects			
S1		S2	
Data Set	Attribute	Data Set	Attribute
T1	G1	T1	G1
T2	G1	T2	G1

Onboarding Objects from Different Schemas in a Resource

If two parents with the same name belong to two different schemas in Enterprise Data Catalog, Axon creates two different data sets based on the linked glossaries. For example, the Employee table is present in both Finance and HR schemas. The Employee table in the Finance schema is linked to the Name glossary, and the Employee table in the HR schema is linked to the ID glossary. During automated onboarding, two data sets with the name Employee are created in Axon.

Consider that a Resource with the name R1 contains two different schemas Schema1 and Schema2. A table with the same name T1_EMP belongs to schemas Schema1 and Schema2. Table T1_EMP contains physical fields F1_ID and F2_SAL. G1_FName, G2_LName, G3_Sal, and G4_ID are Axon glossaries. The data sets are onboarded based on the linking between the table and glossaries or fields and glossaries. Axon populates attribute names in data sets based on the glossary or physical field name that you configured. The following scenarios describe the onboarding conditions based on the linked glossaries:

Tables Linked to Separate Glossaries

The following table describes a sample linking of table T1_EMP with separate glossaries G1_FName and G2_LName:

Schema 1	Schema 2
T1_EMP => G1_FName	T1_EMP => G2_LName
F1_ID => G3_Sal	F1_ID => G4_ID

In this case, two data sets T1_EMP and T1_EMP(`R1\Schema2\T1_EMP`) get onboarded because the tables are linked to separate glossaries. To make the onboarded data sets distinguishable, Axon appends the table path to the name of the data set that was onboarded later. If you choose to onboard attributes using the glossary name or the physical field name, two attributes are created.

The following table describes a sample of the onboarded data set and attributes:

Onboarded Datasets	Onboarded Attributes
Data Set T1_EMP linked to G1_FName	Attribute F1_ID or Attribute G3_Sal
Data Set T1_EMP(`R1\Schema2\T1_EMP`) linked to G2_LName	Attribute F1_ID or Attribute G4_ID

Physical Fields Linked to Separate Glossaries

The following table describes a sample linking of physical field F1_ID with separate glossaries G1_FName and G2_LName:

Schema 1	Schema 2
T1_EMP	T1_EMP
F1_ID => G1_FName	F1_ID => G2_LName

In this case, two data sets T1_EMP and T1_EMP(`R1\Schema2\T1_EMP`) get onboarded because the physical fields are linked to separate glossaries. To make the onboarded data sets distinguishable, Axon appends the table path to the name of the data set that was onboarded later.

The following table describes a sample of the onboarded data set and attributes:

Onboarded Datasets	Onboarded Attributes
Data Set T1_EMP linked to G1_FName	Attribute F1_ID or Attribute G1_FName
Data Set T1_EMP(`R1\Schema2\T1_EMP`) linked to G2_LName	Attribute F1_ID or Attribute G2_LName

Tables Linked to Same Glossary

The following table describes a sample linking of table T1_EMP with same glossary G1_FName:

Schema 1	Schema 2
T1_EMP => G1_FName	T1_EMP => G1_FName
F1_ID => G2_LName	F1_ID => G3_Sal

In this case, two data sets T1_EMP and T1_EMP(`R1\Schema2\T1_EMP`) get onboarded because the tables are linked to same glossaries. To make the onboarded data sets distinguishable, Axon appends the table path to the name of the data set that was onboarded later. If you choose to onboard attributes using the glossary name or the physical field name, two attributes are created.

The following table describes a sample of the onboarded data set and attributes:

Onboarded Datasets	Onboarded Attributes
Data Set T1_EMP linked to G1_FName	Attribute F1_ID or Attribute G2_LName
Data Set T1_EMP(`R1\Schema2\T1_EMP`) linked to G1_FName	Attribute F1_ID or Attribute G3_Sal

Physical Fields Linked to Same Glossary

The following table describes a sample linking of physical field F1_ID with same glossary G1_FName:

Schema 1	Schema 2
T1_EMP	T1_EMP
F1_ID => G1_FName	F1_ID => G1_FName

In this case, two data sets T1_EMP and T1_EMP(`R1\Schema2\T1_EMP`) get onboarded because the physical field F1_ID is linked to the same glossary G1_FName. To make the onboarded data sets distinguishable, Axon appends the table path to the name of the data set that was onboarded later.

The following table describes a sample of the onboarded data set and attributes:

Onboarded Datasets	Onboarded Attributes
Data Set T1_EMP linked to G1_FName	Attribute F1_ID or Attribute G1_FName
Data Set T1_EMP(`R1\Schema2\T1_EMP`) linked to G1_FName	Attribute F1_ID or Attribute G1_FName

Physical Fields Linked to Same and Separate Glossaries

The following table describes a sample linking of physical field F1_ID with same glossary G1_FName and physical field F2_SAL is linked to separate glossaries G2_LName and G3_Sal:

Schema 1	Schema 2
T1_EMP	T1_EMP
F1_ID => G1_FName	F1_ID => G1_FName
F2_SAL => G2_LName	F2_SAL => G3_Sal

In this case, data sets and attributes are onboarded based on the order of processing of the physical fields.

If the order of processing is Schema 1> T1_EMP > F1_ID, Schema 1> T1_EMP > F2_SAL, Schema 2> T1_EMP > F1_ID, and Schema 2> T1_EMP > F2_SAL, one data set T1_EMP is onboarded because physical field F1_ID is linked to same glossary G1_FName.

The following table describes a sample of the onboarded data set and attributes:

Data Set T1_EMP1 linked to G1_FName
Attribute F1_ID or Attribute G1_FName
Attribute F2_SAL or Attributes G2_LName and G3_Sal

If the order of processing is Schema 1> T1_EMP > F1_ID, Schema 1> T1_EMP > F2_SAL, Schema 2> T1_EMP > F2_SAL, and Schema 2> T1_EMP > F1_ID, two data sets with the name T1_EMP because physical field F2_Sal is linked to separate glossaries G2_LName and G3_Sal.

The following table describes a sample of the onboarded data set and attributes:

Data Set T1_EMP1 linked to G2_LName	Data Set T1_EMP1 linked to G2_Sal
Attribute F1_ID or Attribute G1_FName	Attribute F1_ID or Attribute G1_FName
Attribute F2_SAL or Attribute G2_LName	Attribute F2_SAL or Attribute G3_Sal

Automatic Change Requests for Data Sets and Attributes

You can configure default change requests for the Data Set facet in the Admin Panel. During automated onboarding, Axon triggers an automatic change request when attributes are onboarded into a data set. The workflow starts automatically if all the stakeholders are assigned to the data set. If all the stakeholders are not assigned to the data set, then the change request is in the Pending Start mode.

If a default change request is configured for data sets, the onboarding process automatically starts the change request for the data set and stores the attributes information in the **Viewing Changes** section. After the change request is complete, you can view the links between Axon attributes and Enterprise Data Catalog physical fields. If the change request is cancelled, the attributes are ignored and not merged into the data set. The attributes are rejected and is not onboarded again.

Notify Stakeholders

Axon sends notifications about the onboarded objects to all the stakeholders of a glossary. You can click the bell icon ( ) and view the onboarding and relationship recommendation notifications in the **Catalog** tab.

The following image shows a sample list of discovered objects that you can view in the notifications:

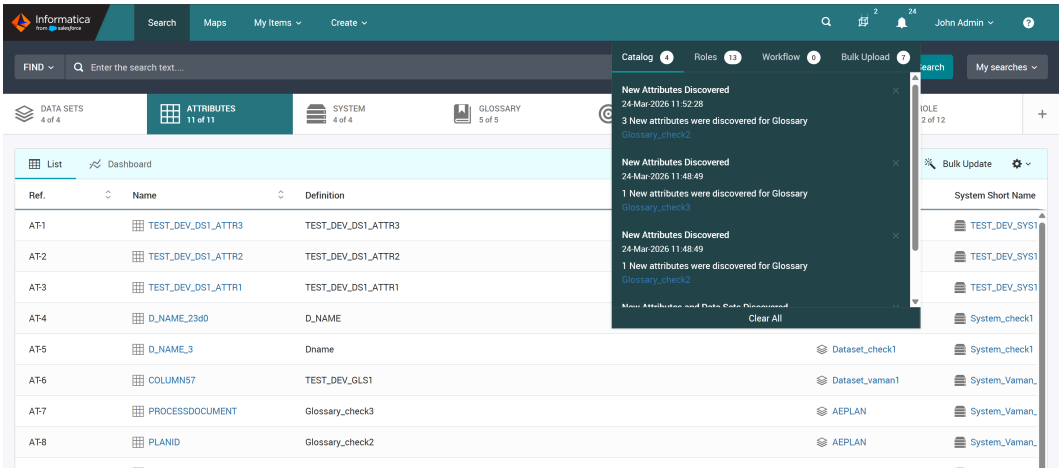

If the notifications include links to the glossaries for which the data sets and attributes were discovered, you can click the glossary name to navigate to the glossary object and view the discovered data sets and attributes. For example, 11 new attributes and 8 data sets were discovered for Glossary FNAME. When you click the FNAME glossary, you can view the discovered data sets and attributes under the **Data** tab.

Axon displays a notification for each glossary. After the next onboarding scheduler run, the discovered objects are updated for each glossary.

View Discovered Objects

In Axon, you can view data sets and attributes that are discovered and onboarded from Enterprise Data Catalog.

You can view the discovered data sets from **Data** > **Data Sets** view of a Glossary object. You can view the discovered attributes from the following areas in the Axon interface:

- The **Data** > **Data Attributes** view of a Glossary object
- The **Attributes** facet view from the Unison search
- The **Attributes** tab of a Data Set object
- The **Data** > **Data Attributes** view of a System object

The following image shows the **Data** > **Data Attributes** view of a Glossary object:

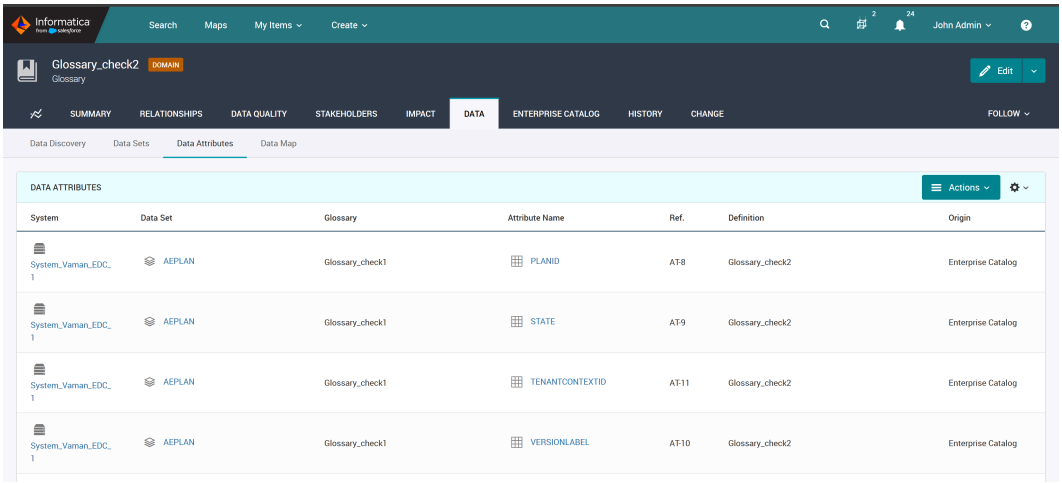

You can view that the attributes are populated from Enterprise Data Catalog with the following properties:

- The onboarded name of the attribute is same as that of the glossary name or physical field name.
- The attribute definition displays the same definition of the glossary.
- The **Origin** field has the "Enterprise Catalog" value.
- The data type is the same as that of the Enterprise Data Catalog field.
- The data length is same as that of the data type length in Enterprise Data Catalog.
- The data set name is the same name as of the parent of the field in Enterprise Data Catalog.
- The **Physical Fields** column shows the names in orange color. You can click the hyperlink on the linked physical field to view the details of the field, such as Last Updated, Field Type, Resource, Table, Schema, Data Domains, and Data Domain Groups.
- The **Review Status** column of the discovered attributes show "Accepted" or "Discovered" status. If you choose to accept onboarded objects and the Confidence Score is 100%, the attributes from Enterprise Data Catalog appear with the "Accepted" review status in Axon. If you do not choose to accept onboarded objects, the review status appears as "Discovered." The "Accepted" review status appears only when a physical field or curated data domain is directly linked to a glossary. You cannot see the "Accepted" review status when you use recommended glossaries and data domain links.
- The **Confidence Score** column shows the percentage of conformance of the discovered attributes.
- The onboarded attributes metadata includes the **Data Type**, **DataLength**, and **Key** columns with values populated from Enterprise Data Catalog.

Note: If objects are part of segments, you might see some masked data if you do not have access to the segment.

Curate Discovered Attributes

To curate the discovered attributes, ensure that the onboarded data sets have assigned stakeholders with Edit permissions. You can curate the discovered attributes from the following areas in the Axon interface:

Objects View

If you want to curate the attributes within a data set, you must have Edit permissions on the data set. You can view and curate the discovered attributes from the following objects:

- The **Data Attributes** sub-tab on the **Data** tab of a Glossary object
- The **Attributes** tab of a Data Set object
- The **Data Attributes** sub-tab on the **Data** tab of a System object

You can choose whether you want to accept or reject the discovered attributes. Select the attributes with the "Discovered" review status, click the **Actions** menu and choose **Accept** or **Reject**. You cannot undo the changes after you accept or reject the discovered attributes.

If you do not have the required permissions to curate the attributes, the Actions menu does not appear for the **Attributes** tab of a Data Set object. In System and Glossary objects, you can view the Actions menu even if you do not have the required permissions to curate the attributes. But, if you try to curate the discovered attributes, an error occurs.

In a Glossary object, you cannot curate the attributes that are discovered for the child glossaries. To curate the child glossary attributes, navigate to the child glossary objects.

Bulk Update

Use the Bulk Update option from the Unison search to curate the discovered attributes.

The following image shows the Attributes facet with a sample list of discovered objects that you can curate from the Unison search:

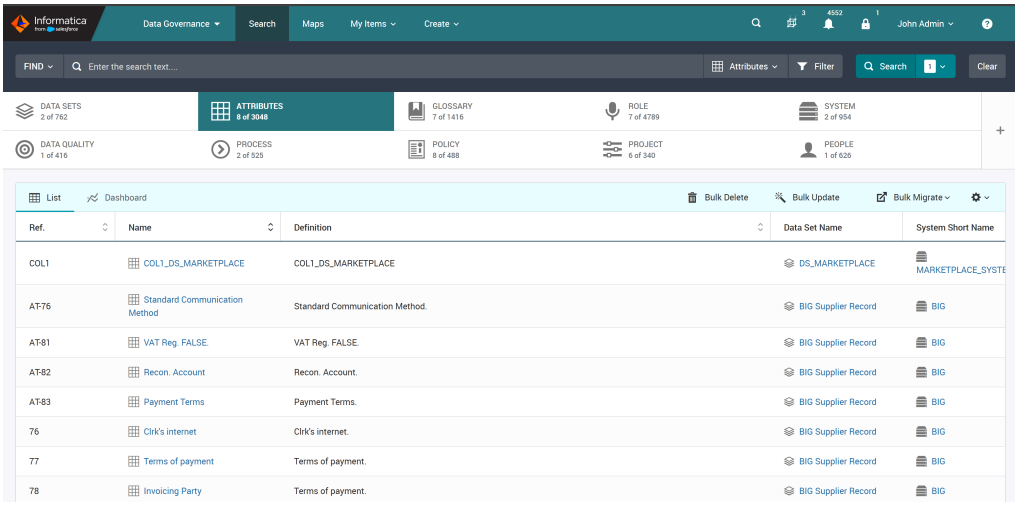

In the Attributes facet, select the attributes with the "Discovered" review status, and click **Bulk Update**. In the Bulk Update Items section, you can see the selected attributes. In the Definition section, you can view the fields that you can update for the attributes. To curate the attributes, select **Accept** or **Reject** in the **Review Status** field.

If you choose to reject a discovered attribute, Axon permanently deletes the discovered attribute without changing the review status to "Rejected". You can view the audit history to identify who curated the attributes and when the attributes were curated.

View Automated Lineage from Enterprise Data Catalog

In Axon, you can choose to automatically create links between attributes based on the recommendations from Enterprise Data Catalog. You need not manually review the relationship recommendations and curate attributes for each data set. You can view lineage recommendations for single and multiple hop relationships between the physical fields in Enterprise Data Catalog.

A physical field F1 from table T1 is directly linked to physical field F2 from table T2. The physical field F1 is linked to attribute A1, and the physical field F2 is linked to attribute A2. Enterprise Data Catalog provides lineage recommendation between attributes A1 and A2. Run the Axon scanner to discover the relationships. If you choose to accept lineage recommendations and create links, you can see that the link between the attributes A1 and A2 are automatically created in Axon after automated onboarding of attributes. A daily job runs to discover additional relationships that can be onboarded from Enterprise Data Catalog. You can see the linked attribute A1 in the **Relationships** tab of the data set that contains attribute A2. The **Type** column displays the value "Sourced From" to indicate that the related attribute relationship is created based on Enterprise Data Catalog recommendations. You can view the attribute links in both inbound and outbound relationship grids. To find the newly created attribute links, you can filter based on the **Created Date** column that is hidden by default.

To accept the lineage recommendations, you need to enable the **Automatically Accept Lineage Recommendations** option from the Admin Panel. If the fields are linked to attributes and the fields are linked with each other in Enterprise Data Catalog, the links between attributes are automatically created. After the link is created between attributes, Axon notifies the data set stakeholders only with the Stewardship Role

type. The notification appears on the **Catalog** tab of the notification center that you can access from the toolbar. The notification contains information about all the attribute links that are created. If you delete an automatically created relationship, the same link is not created again in the next onboarding process.

The onboarded links between the attributes is unique. When the onboarding script runs, duplicate attribute links are not onboarded. The uniqueness of the Attribute X Attribute links is not validated based on the Sourcing Type. If you delete a link between attributes, the link is not onboarded again when the onboarding script runs. You can manually activate the deleted link when you click **Show Recommendations** from the recommended attributes.

If you do not select the **Automatically Accept Lineage Recommendations** option from the Admin Panel, Axon sends an email and interface notification. The notification contains information about the discovery of additional linked attributes and the link that directs you to the **Relationship** tab of a Data Set object. Click **Show Recommendations** to view the recommended attributes. There might be a delay in showing the recommendations even after the Axon scanner run is complete. You can accept or reject recommendations for each data set.

Lineage Onboarding Prerequisites

Automated lineage between attributes is created in Axon based on the following prerequisites:

- Physical fields must be directly connected to each other in Enterprise Data Catalog.
- Attributes must be associated with the physical fields.
- Run the Axon scanner after a physical field is linked to an attribute to discover attribute relationships.
- Run the Axon scanner if you manually curate attributes and then run the onboarder job to discover additional relationships.
- If a default change request is configured for data sets, the onboarding of attributes initiate a change request workflow. After the change request is complete, run the Axon scanner and then run the onboarder script to onboard the attribute to attribute relationships and lineage recommendations.

Lineage Onboarding Scenarios

The attribute links are automatically created in the following scenarios:

- Consider that physical fields F1 and F2 are linked to each other in Enterprise Data Catalog, and the physical field F1 is linked to attribute A1 and F2 is linked to A2. Run the Axon scanner after a physical field is linked to an attribute. If you choose to accept the lineage recommendations from the Admin Panel, the attributes A1 and A2 are automatically linked in Axon.
- Consider that physical fields F1 is linked to F2 and F2 is linked to F3. The physical field F1 is linked to attribute A1, F2 is not linked to any attribute, and F3 is linked to A3. Run the Axon scanner after a physical field is linked to an attribute. If you choose to accept the lineage recommendations from the Admin Panel, the attributes A1 and A3 are automatically linked in Axon. Since F2 is not linked to any attribute, the immediate inbound relationship is checked and onboarded if the physical field is linked to an attribute.
- Consider that physical fields F1 and F2 are linked to each other in Enterprise Data Catalog, and the physical field F1 is linked to glossary G1 and F2 is linked to G2. From the Admin Panel, you choose to automatically onboard attributes, accept the lineage recommendations, and accept onboarded attributes. Run the Axon scanner after a physical field is linked to a glossary. After the onboarder job runs, the attributes with names G1 and G2 are automatically onboarded and the relationship between attributes G1 and G2 is created in Axon.

- Consider that physical fields F1 and F2 are linked to each other in Enterprise Data Catalog, and the physical field F1 is linked to glossary G1 and F2 is linked to G2. From the Admin Panel, you choose to automatically onboard attributes and accept the lineage recommendations but you do not choose to accept onboarded attributes. After the onboarder job runs, the attributes with names G1 and G2 are automatically onboarded with the "Discovered" review status. The relationship between attributes G1 and G2 are not automatically created in Axon. To automatically create the relationships, you need to manually curate the discovered attributes G1 and G2. Run the Axon scanner and then run the onboarder job again. After the onboarder job runs, the relationship between attributes G1 and G2 is created in Axon.

The attribute links are not automatically created in the following scenarios:

- Consider that physical fields F1 and F2 are linked to each other in Enterprise Data Catalog, and the physical field F1 is linked to attribute A1 and F2 is not linked to any attribute. If you choose to accept the lineage recommendations from the Admin Panel, you cannot see any lineage recommendation for attribute A1 in Axon.
- Consider that physical fields F1 and F2 are linked to each other in Enterprise Data Catalog, and the physical field F1 is linked to glossary G1 and F2 is linked to G2. If you do not choose to automatically onboard attributes and choose to accept the lineage recommendations from the Admin Panel, you cannot see any lineage recommendation in Axon.

Single Hop Lineage Example

The following image shows the sample automated lineage onboarding process for single hop physical field relationships:

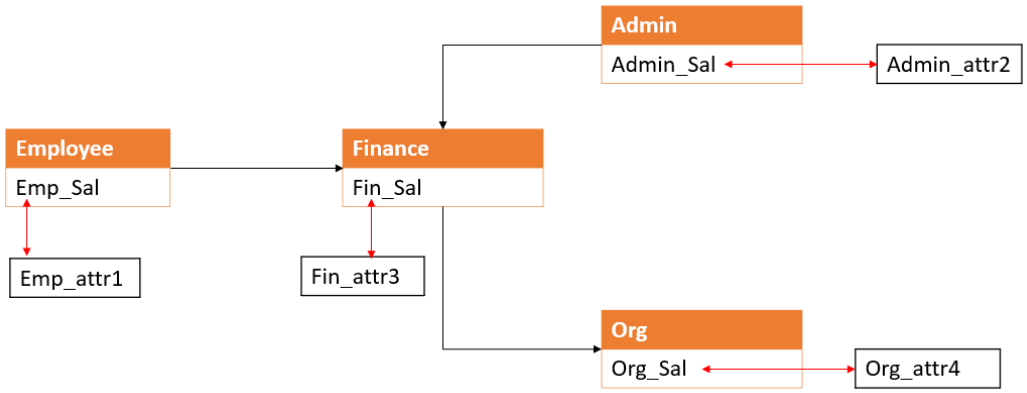

Consider that there are Employee, Finance, Admin, and Org tables that contain salary information in Enterprise Data Catalog. The physical fields of these tables are linked based on the salary information. Emp_Sal and Admin_Sal physical fields are linked to Fin_Sal physical field, which is linked to Org_Sal physical field. All physical fields are linked through a single hop in Enterprise Data Catalog. The linking between Enterprise Data Catalog physical fields and Axon attributes is as follows:

- Emp_Sal physical field to Emp_attr1 attribute
- Admin_Sal physical field to Admin_attr2 attribute
- Fin_Sal physical field to Fin_attr3 attribute
- Org_Sal physical field to Org_attr4 attribute

If you choose to accept the lineage recommendations from Enterprise Data Catalog, the links between attributes are automatically created in Axon based on the linked fields in Enterprise Data Catalog. For attribute Fin_attr3, you can see the linked attributes Emp_attr1 and Admin_attr2 in the **Relationships** > **Inbound Relationships** view of the data set. You can see the linked attribute Org_attr4 in the **Relationships** > **Outbound Relationships** view.

Multiple Hop Lineage Example

The following image shows the sample automated lineage onboarding process for multiple hop physical field relationships:

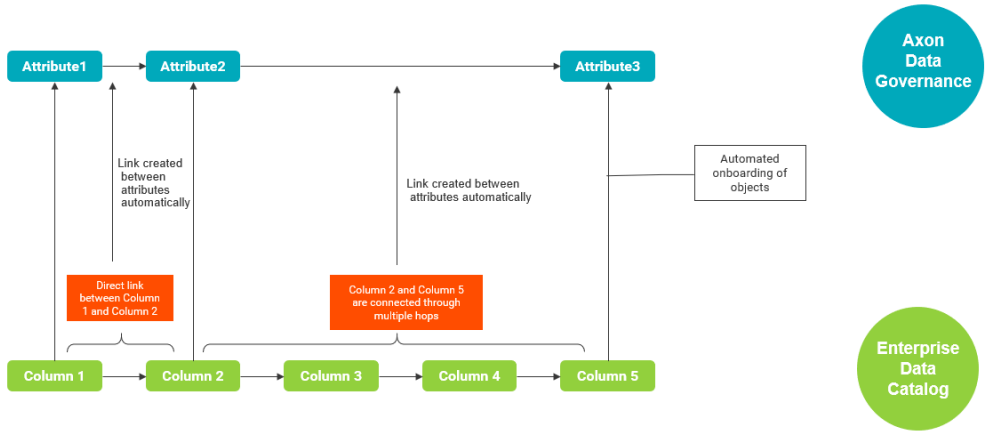

Axon supports automated lineage creation for single hop, multiple hops, and direct relationships between the physical fields. In the example, Column 1 is directly linked to Column 2, Column 1 is linked to Attribute1, and Column 2 is linked to Attribute2. You need to run the Axon scanner to discover the relationships. When the onboarding job runs, automated lineage is created between Attribute1 and Attribute2. Column 2 is linked to Column 5 through multiple hops and the lineage between Attribute2 and Attribute3 is created automatically. But the link between Attribute1 and Attribute3 is not created automatically because the onboarding job checks for the first inbound relationship in the multiple hops. After the Attribute2 to Attribute3 link is created, the onboarding job does not check for Attribute1.

Lineage Notifications

Axon sends email and interface notifications to the stakeholders based on configuration of the **Automatically Accept Lineage Recommendations** and **Enable Lineage Recommendation Notifications** options on the Admin Panel.

The following table describes the different combination of the values based on which Axon sends lineage notifications:

Automatically Accept Lineage Recommendations	Enable Lineage Recommendation Notifications	Notifications
True	True	Data Steward receives email and interface notifications about the automatically created relationships.
True	False	Data Steward receives email and interface notifications about the automatically created relationships.
False	True	Data Steward receives email and interface notifications about the lineage recommendations.
False	False	Axon does not send any notification.

Link Removal Notifications

If a resource or physical field is deleted from Enterprise Data Catalog, the links from the resource to Axon system or physical field to attribute is removed. Axon sends the link removal notifications through the interface and emails to the data set and system stakeholders based on the configuration settings in the Admin Panel.

A scheduled job runs once a day to synchronize the links between Axon and Enterprise Data Catalog objects. When the job runs, any removal of resource or physical field and corresponding links are identified and notifications are sent to the stakeholders.

If you rename a resource or physical field in Enterprise Data Catalog, it is considered as deleting the resource or physical field and creating them again. Links between the resource and system or physical field and attribute is removed.

Axon sends email and interface notifications about the deleted links to the stakeholders based on configuration of the **Automatically Delete Attribute Relationships** and **Enable Lineage Recommendation Notifications** options on the Admin Panel.

The following table describes the different combination of the values based on which Axon sends link removal notifications:

Automatically Delete Attribute Relationships	Enable Lineage Recommendation Notifications	Notifications
True	True	Links are automatically deleted and the Data Set stakeholder receives email and interface notifications about the deleted links.
True	False	Links are automatically deleted and the Data Set stakeholder receives email and interface notifications about the deleted links.
False	True	Links are not deleted and the Data Set stakeholder receives email and interface notifications about the relationships that are not valid.
False	False	Links are not deleted and Axon does not send any notification.

Axon stores all the links that are removed from the physical field to attribute for seven days. This allows you to re-establish the attribute and physical field links. To bulk upload, you can also use the list of physical fields to link to Axon attributes using the Attribute X Physical Field bulk upload template. Only the Axon Administrator can access the removed links from the following folder path:

```
/axonhome/axon_scheduler/referenceLink/tmp
```

CHAPTER 7

Automate Data Quality Rules

This chapter includes the following topics:

- Automate Data Quality Rules Overview, 220
- Understanding Terms, 221
- Automating Data Quality Rules Process, 223
- Prerequisites, 225
- Setting Up Data Quality Rule Automation, 227
- Linking Objects, 229
- Onboarding Objects, 237
- Running Rules, 238
- Managing Data Quality Rules, 241

Automate Data Quality Rules Overview

In Axon, you can automate the process of running data quality rules on Enterprise Data Catalog fields instead of manually generating the mappings and producing data quality scores. You can use Enterprise Data Catalog resources to scan for data objects, send the values of the data sources to Informatica Data Quality, and run rules on thousands of fields instantly. Axon retrieves the scores of the data quality rules from Informatica Data Quality and displays the scores for each field.

In Axon, you can associate Glossary objects in Axon with data domains and fields in Enterprise Data Catalog. This association automatically creates Axon attributes for Enterprise Data Catalog fields. You can also create standard rules in Axon and link them with rules in Informatica Data Quality. When you make these associations, Axon automatically runs Informatica Data Quality rules on fields that are scanned by Enterprise Data Catalog. Informatica Data Quality generates scores for the rules that are run on the fields. Axon retrieves these scores and displays them in the Axon interface.

Example

You have created 10 glossary objects in Axon, and each object has 100 attributes that are associated to Enterprise Data Catalog fields. For each attribute, you want to run two data quality rules, one rule for consistency and one rule for completeness.

If you want to run the two data quality rules manually on the 1000 attributes, for each attribute, you must create 1000 local rules for consistency and 1000 local rules for completeness. As a result, you have to create 2000 local data quality rules manually in Axon. You must also create several profiles and scorecards in Informatica Data Quality and associate them to the local data quality rules as required.

If you choose to automate the rules, you can create 10 standard data quality rules for consistency and 10 standard data quality rules for completeness. When you link the standard rules in Axon to rules in Informatica Data Quality, Axon automatically creates 2000 local data quality rules for the attributes, sends the mapping requests to Informatica Data Quality to run the rules, and retrieves the scores and displays them in the Axon interface.

In this example, instead of creating 2000 local rules, you created only 20 standard rules and mapped the rules to the relevant rules in Informatica Data Quality. Axon automated the process of rules in Informatica Data Quality and displayed the data quality scores to you. The rule automation significantly reduces the effort to run data quality rules and increases productivity.

Understanding Terms

To understand how Axon runs data quality rules on fields scanned by Enterprise Data Catalog, you must be familiar with the following terms:

Resource

A resource is an Enterprise Data Catalog object that represents an external data source or metadata repository from where scanners extract metadata. Scanners in Enterprise Data Catalog fetch the metadata from resources. Axon displays resources from the relational sources, file systems such as Amazon S3, Native, Azure SQL Data Warehouse, and HDFS, and Salesforce application from Enterprise Data Catalog. You can also view Business Intelligence (BI) resources, such as Google BigQuery, Tableau, and Cognos.

For more information about resources, see "Enterprise Data Catalog Objects" on page 176.

Physical Field

Physical fields represent a source column or field in an Enterprise Data Catalog resource. You can view different types of Enterprise Data Catalog physical fields, such as columns in relational tables, fields in CSV files, and fields in Salesforce objects, in Axon:

For more information about all the supported physical fields, see "Enterprise Data Catalog Objects" on page 176.

Data Domain

A data domain is a predefined or user-defined object that enables you to discover the functional meaning of data. Examples of data domains include Social Security number, credit card number, and account status. Data domain discovery is the process of discovering the functional meaning of data in the data sources based on the semantics of data.

For more information about data domains, refer the *Column and Field Assets* and *Data Domain Assets* topics in the *Informatica 10.2.2 Enterprise Data Catalog User Guide*.

Data Onboarding Rules

In an Axon system, use data onboarding rules that you can apply for onboarding data sets and attributes from Enterprise Data Catalog. The onboarding rule specifies the objects that you want to include or exclude from onboarding.

For more information about data domains, see "Data Onboarding Rules for a System" on page 196.

Data Quality Rule

A data quality rule is a rule in Informatica Data Quality that checks the quality of the data in your systems. Data quality rules are stored in Informatica Data Quality as rule specifications and rule mapplets. A rule specification is the design of a rule in Informatica Data Quality. It refers to the

requirements of a business rule that you can design in the Informatica Analyst Tool. A rule mapplet is an executable rule in Informatica Data Quality. Rule specifications are read-only in the Informatica Developer tool, but rule mapplets are editable templates that you can run on specific data objects.

To know more about rules, rule specifications, and rule mapplets, see the *Rule Specification Guide*.

Standard Data Quality Rule

A standard data quality rule in Axon is a textual description of a rule that must be run on some data.

For example, if your organization processes automobile insurance claims, you would have some predetermined criteria to determine whether the insurance claim of a particular customer qualifies or not. You might check the age of the car, distance driven, and premium amount paid, and then use a formula to determine whether a specific claim must be processed. In Axon, you can create a Glossary object called “Eligibility for Insurance Claim”, and mention a brief summary of the rule in the **Description** field. You can then go to the **Data Quality** tab of the Glossary object to view the standard data quality rule associated with the Glossary.

Local Data Quality Rule

A local data quality rule is an instance of a standard rule that you run on a specific data object. Standard data quality rules are textual descriptions of rules. Based on the Enterprise Data Catalog technical metadata associated with the Axon attributes, Axon automatically creates local data quality rules for the standard rule.

For example, the standard rule “Eligibility for Insurance Claim” helps you understand the eligibility to process a car insurance claim. When a specific customer makes an actual insurance claim for a car, Axon applies the standard rule for this particular claim, and creates a local rule for this specific instance.

A standard rule refers to the textual description of a rule, and a local rule refers to the instance of running the rule on actual data.

Input Parameter

An input parameter refers to a field on which a rule is run. In Axon, you can run rules that have single or multiple input parameters.

Some rules require a single input parameter. For example, if a policy requires that the first name of a person is mandatory, the rule must specify that the First Name field cannot be a null value. In this case, the input parameter is single because the values of the parameter can be either valid or null.

Some rules require several input parameters. For example, if a policy requires that a customer's full name be concatenated from the customer's first and last name, the rule must specify that the Customer Name field is a combination of the First Name and Last Name fields. In this case, the input parameters are multiple because the values of the Customer Name field are generated from two other fields.

For more information on input parameters, refer the *Inputs* topic in the *Rule Specification Guide* .

Automating Data Quality Rules Process

The following image shows the steps required to set up Axon with Enterprise Data Catalog and Informatica Data Quality so that Axon runs the rules automatically on data store fields:

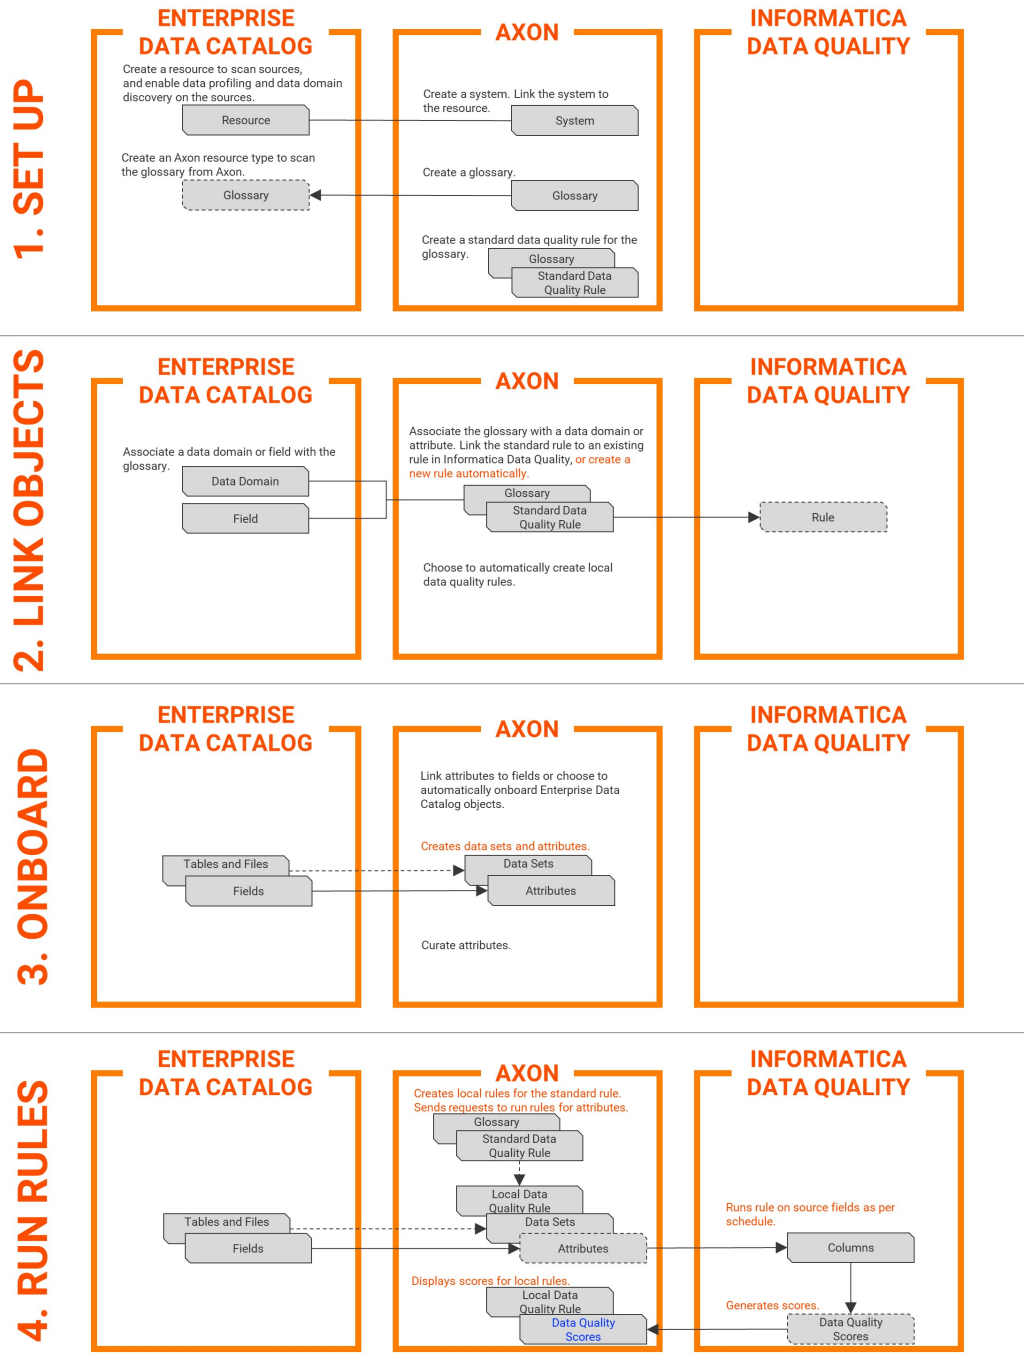

The following steps describe how to automate data quality rules:

1. Set up Axon, Enterprise Data Catalog, and Informatica Data Quality.

2. Link objects as required between Axon and Enterprise Data Catalog. Link objects as required between Axon and Informatica Data Quality.
3. Onboard objects from Enterprise Data Catalog to Axon. Optionally, manually create links between Enterprise Data Catalog fields and Axon attributes.
4. Run rules on the objects onboarded from Enterprise Data Catalog in Informatica Data Quality.

Note: If the administrator has enabled the Data Marketplace option in the Admin Panel, make sure that you are in **Data Governance** view to set up rule automation and perform tasks in Axon.



Step 1. Set Up Axon, Enterprise Data Catalog, and Informatica Data Quality

The first step to automate rules is to set up Axon, Enterprise Data Catalog, and Informatica Data Quality by creating the required objects.

Perform the following steps to create the objects:

1. In Enterprise Data Catalog, create a resource to scan data sources, and configure the resource to discover data profiles and data domains.
2. In Axon, create a System object that maps to the resource you created in Enterprise Data Catalog. Link the System object to at least one Enterprise Data Catalog resource to enable onboarding objects from Enterprise Data Catalog to Axon.
3. In Axon, create a Glossary object.
4. Create an Axon resource type in Enterprise Data Catalog. Use the Axon resource type to scan the Axon glossaries.
5. In Axon, create a standard data quality rule for the glossary objects. The standard data quality rule is a textual definition of the rule that you want to run on the fields.

Step 2. Link Objects Between Axon, Enterprise Data Catalog, and Informatica Data Quality

The second step is to link the objects in Axon and Enterprise Data Catalog to onboard the fields, and link the objects in Axon and Informatica Data Quality to connect the rules.

Perform the following steps to link the objects:

1. In Axon, associate the Glossary object with the Enterprise Data Catalog data domains. In Enterprise Data Catalog, you can associate data domains and fields with the Axon glossary.
2. In Axon, link the standard data quality rule to an existing rule in Informatica Data Quality. This step associates a textual rule definition in Axon with a logical rule in Informatica Data Quality. Alternatively, Informatica CLAIRE® can recommend a rule and automatically create the rule in Informatica Data Quality.

   Note: To recommend and create a rule automatically, the Axon Administrator must enable this option in the Admin Panel. For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.
3. In Axon, choose the option to automatically create local data quality rules for the standard data quality rule. This step enables data quality rule automation.

Step 3. Onboard Objects from Enterprise Data Catalog to Axon

The third step is to display the objects from Enterprise Data Catalog in Axon. You can manually link the attributes in Axon with the fields in Enterprise Data Catalog. You can also choose to automatically onboard the objects from Enterprise Data Catalog to Axon. When you choose to onboard objects, the data sets and attributes are automatically created and onboarded to Axon.

Perform the following steps to onboard the objects:

1. In Axon, choose the option to automatically onboard the objects from Enterprise Data Catalog.
2. After the key elements are identified, the data sets and attributes are automatically created and onboarded to Axon. Axon is now ready to send the fields to Informatica Data Quality to run the rules.
3. In Axon, you can choose to accept or reject the Attribute objects created automatically.

Step 4. Run Informatica Data Quality Rules on Onboarded Objects

The fourth step is to run the rules automatically. Axon automatically runs Informatica Data Quality rules on Enterprise Data Catalog fields and displays the scores.

Axon performs the following steps to display the scores:

1. Axon creates a local data quality rule for the attributes that apply to each data set. In this step, Axon creates an instance of a rule for each field scanned by Enterprise Data Catalog. Axon then sends the rule mapping requests for the attributes to Informatica Data Quality.
2. Informatica Data Quality receives the mapping requests and runs the rule on the fields as per the schedule that you have defined.
3. Informatica Data Quality generates data quality scores for each field.
4. Axon retrieves the data quality scores for each table column and displays the scores for each local rule.

Prerequisites

To run local data quality rules automatically, you must be familiar with resources and scanners in Enterprise Data Catalog, and rules and mappings in Informatica Data Quality.

Enterprise Data Catalog

To automate data quality rules, verify the following prerequisites in Enterprise Data Catalog:

1. You have installed Enterprise Data Catalog. See the Product Availability Matrix for the supported versions.
2. To automate the onboarding of data sets and attributes, you must first configure data onboarding rules in the Admin Panel. For more information on creating data onboarding rules, refer to the *Configure Data Onboarding Rules* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.
3. Apply onboarding rules and enable automated onboarding from Axon systems. Based on the configured onboarding rules, Axon includes or excludes onboarding of the data sets and attributes from Enterprise Data Catalog. For more information, see "Data Onboarding Rules for a System" on page 196.
4. Enterprise Data Catalog can scan the following source databases:
   - Amazon Redshift
   - CSV flat files stored in ADLS Gen2
   - Databricks Advanced Scanner
   - Db2 for IBM z/OS
   - JDBC
   - Google BigQuery
   - Apache Hive

- Microsoft Azure Data Warehouse
- Oracle
- Parquet files stored in Amazon S3
- Snowflake
- Microsoft SQL Server
- Teradata

5. The file sources for which you want to run rules are CSV flat files in native file systems.

If you run rules on Amazon S3 flat file resources that contains data of any data type other than the String data type, the onboarded data from Enterprise Data Catalog to Axon is of String data type.

You cannot run rules on Amazon S3 parquet file resources that contains data of Map data type.

If you run rules on a parquet file that uses the `TO_DECIMAL(value)` function with high precision enabled, the mapping will not work. For the mapping to be successful, you must use the `TO_DECIMAL38(value ,[scale])` function. The `value` is either string or a numeric and `scale` is and integer literal between 0 and 28.

Note: If you disable high precision while generating the mappings, the accuracy of the mapping output is affected.

You cannot run rules on Amazon Redshift resources that contain data of TIMESTAMPTZ or TIMESTAMP WITH TIME ZONE data type. Instead, you can use Amazon Redshift resources that contain data Date/Time data type.

Informatica Data Quality

To automate data quality rules, verify the following prerequisites in Informatica Data Quality:

1. You have installed Informatica Data Quality. See the Product Availability Matrix for the supported versions.
2. The following services are running on Informatica Data Quality:
   - Model Repository Service with monitoring enabled
   - Data Integration Service
   - Content Management Service
   - Scheduling service configured to the Model Repository Service
3. Ensure that you configure Data Integration Service with Workflow DB to run the mappings.
4. You can connect Axon Agent 7.3.8 to Informatica Data Quality 10.5.0 and 10.5.1. For more information, refer to the *Configure Access to Informatica Data Quality* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.

   Note: You can use parquet files on Amazon S3 as the source database only if you connect Axon Agent to Informatica Data Quality 10.4.1, 10.5.0 and 10.5.1.
5. Axon connects to the Axon Agent using the HTTP protocol.
6. The database where Informatica Data Quality stores the data quality scores is a relational database. The Axon Agent connects to this database to retrieve and display data quality scores in Axon.
7. To run data quality rules on fields, Informatica Data Quality must connect to the sources scanned by Enterprise Data Catalog. Make sure that all critical connection parameters are configured in Informatica Data Quality, such as the password and Support Mixed-Case Identifier option for the resource.
8. You have enabled rule automation in the Axon Admin Panel. To automate data quality rules, see the *Automate Data Quality Rules* topic in the *Axon Data Governance 7.3.8 Administrator Guide*.

Setting Up Data Quality Rule Automation

Before you can automate rules, you must set up Axon, Enterprise Data Catalog, and Informatica Data Quality with the required objects to run the rules.

In Enterprise Data Catalog, create a resource to scan the fields on which you want to run the rules. In Axon, create a System for the Enterprise Data Catalog resource. Additionally, create a Glossary object in Axon that defines the rule, and scan the object in Enterprise Data Catalog.

In Informatica Data Quality, create the data quality rule that you want to run. In Axon, create a standard data quality rule for the Glossary object that you scanned in Enterprise Data Catalog. The standard rule maps to the rule in Informatica Data Quality and provides a textual definition for the rule that you want to run.

Create Enterprise Data Catalog and Axon Objects

You can link the attributes of Axon data sets with Enterprise Data Catalog fields. You can also onboard the fields from Enterprise Data Catalog and automatically create attributes for the fields. To start with the onboarding process, you need to create the required Enterprise Data Catalog resources and Axon objects such as systems and glossaries.

You can perform the following steps to create Enterprise Data Catalog resources and Axon objects:

1. Create a resource in Enterprise Data Catalog. Enable data domain discovery. Optionally, you can enable similarity discovery. For more information, refer the topics *Creating a Resource* and *Enable Data Discovery* in the *Informatica Catalog Administrator Guide*.

   Note: The file sources for which you want to run rules must be flat files in native file systems. In the **Connection Properties** section of the Enterprise Data Catalog resources, select the `Local File` dropdown option in the **File Protocol** field.
2. Create an Axon resource type in Enterprise Data Catalog. Use the Axon resource type to scan the Axon glossaries. For more information, refer the *Creating a Resource* and *Axon Resource Type Properties* topics in the *Informatica Catalog Administrator Guide*.
3. Create glossaries and systems in Axon. Assign at least one stakeholder to a glossary to receive notifications about onboarding objects into Axon. For more information, see "Creating an Object" on page 82.

Create a Standard Data Quality Rule

Create a standard data quality rule in a Glossary object. You must have edit permissions on the Glossary object.

1. From Unison search, open the Glossary object for which you want to create a standard data quality rule.
2. Click **Edit**.
3. From the Actions menu, click **New Standard Data Quality Rule**.

   The **New Standard Data Quality Rule** tab appears.
4. In the **New Standard Data Quality Rule** tab, specify the following properties:

Option	Description
Name	Name of the standard data quality rule.

Option	Description
Description	Description of the logic for the standard data quality rule.
Reference Number	Unique identifier for each object. Axon automatically assigns a unique reference ID if you leave this field blank.
Type	Select from one of the following types of data quality rules: • Completeness • Accuracy • Consistency • Validity • Timeliness You can customize the values from **Meta-Model Administration** | **Dropdown Configurations** in the Admin Panel
Technical Description	A technical description of the rule logic. Can include SQL or pseudo SQL.
Technical Rule Reference	Option to link the standard rule with a rule in Informatica Data Quality. For more information, refer to "Link Standard Data Quality Rule to a Rule in Informatica Data Quality" on page 231. For more information, refer to *Configure Access to Informatica Data Quality* topic in the *Axon Data Governance 7.3.8 Administrator Guide*
Select Glossary	Specify the glossary that is associate with the standard data quality rule. You can specify more than one glossary to the standard rule. If the glossary belongs to a segment that is not assigned to you, you cannot view the details of the associated glossary.
Create Local Rules Automatically	Automates the running of data quality rules in Informatica Data Quality. To automate rules, the **Axon Status** field must have the `Active` value. For more information, refer to "Create Local Data Quality Rules Automatically" on page 237.
Axon Status	Status of the data quality rule in Axon. Select one of the following values: • Active • Inactive • Pending Review • Obsolete • Deleted If you want to delete a standard data quality rule, you need to set the Axon Status to Deleted.
Lifecycle	Lifecycle status of the object. Select one of the following values: • Active • Draft • Obsolete
Axon Viewing	Whether the rule is available for public viewing or not.

Option	Description
Criticality	Level of criticality . Select from one of the following options: • Low • Medium • High
Frequency	The frequency at which you want to run the rule and retrieve data quality scores from Informatica Data Quality. Select one of the following frequencies: • Daily • Weekly • Monthly • Quarterly • Ad-hoc • Bi-Weekly If you plan to automate data quality rules, see "Scheduling Local Data Quality Rules" on page 239 to understand the scheduling conditions for the local data quality rules that are automatically generated by Axon.
Green Target	A number that indicates the threshold value for the green color. Reflects the proportion of the measured data that achieved the performance level for the green target. Enter a number from 0 to 100. Do not enter characters such as %.
Amber Target	A number from 0 to 100 that indicates the threshold value for the amber color.

Note: Consider the following points when you run data quality rule:

- In an Azure Data Warehouse database, if you run a data quality rule for a datetime data type input on a DATETIME2 column, the rule automation fails. The rule automation works only if you run a rule with string data type input on a DATETIME2 column.
- If you modify the frequency at which you want to run the rule in Axon to retrieve data quality scores from Informatica Data Quality, the schedule change made in Axon does not reflect in Informatica Data Quality. Only the Informatica Data Quality Admins can update the frequency based on the Axon configuration.

5. Click **Save and Close**.

Linking Objects

To identify the key elements for onboarding, configure data onboarding rules and apply to Axon systems. After you enable automated onboarding from systems, the data sets and attributes are automatically created in Axon systems. You must also link the standard data quality rule in Axon to the rule in Informatica Data Quality. To automate data quality rules, choose to automatically create local data quality rules.

Linking Glossaries

In Enterprise Data Catalog, you can link a glossary to a field directly or through data domains. You can also assign recommended glossaries to a field in Enterprise Data Catalog. In Axon, you can link a glossary to a data domain discovery rule.

The onboarding criteria is based on the following associations between a field and glossary:

Physical Field to Glossary

In Enterprise Data Catalog, you can directly link a physical field to a glossary. Based on the physical field to glossary linking and the confidence score threshold that you configure in Axon, the data sets and attributes are automatically created and onboarded to Axon.

For more information, refer the *Add Business Title* topic in the *Informatica Enterprise Data Catalog User Guide*.

Data Domain to Glossary

In Enterprise Data Catalog, a physical field can have a single or multiple data domains assigned to it. A data domain is a predefined or user-defined object that enables you to discover the functional meaning of field data, such as credit card number and Social Security number. You can link a data domain to a glossary. The physical field is indirectly linked to the glossary through data domains.

Based on the data domain to glossary linking and the confidence score threshold that you configure in Axon, the data sets and attributes are automatically created and onboarded to Axon.

For more information, refer the *Column and Field Assets* and *Data Domain Assets* topics in the *Informatica Enterprise Data Catalog User Guide*.

Physical Field to Recommended Glossary

In Enterprise Data Catalog, when you link a physical field to a glossary, you can view the recommended glossary terms with the match percentage. Based on the confidence score for recommended glossaries in Enterprise Data Catalog and the confidence score threshold that you configure in Axon, the data sets and attributes are automatically created and onboarded to Axon. If there are more than one recommended glossaries, the attributes are created and onboarded based on the glossary with the highest percentage of recommendation and the confidence score threshold.

For more information, refer the *Add Business Title* topic in the *Informatica Enterprise Data Catalog User Guide*.

Glossary to Data Domain Discovery Rules

In Axon, you can map a glossary to a data domain discovery rule. Enterprise Data Catalog uses the data domain discovery rules to discover matching field data or field name patterns from the metadata extracted by the resources. Enterprise Data Catalog discovers the attributes based on the association between the glossary and data domain discovery rules, and then onboards the discovered attributes to Axon.

For more information, see "Data Domain Discovery Rules" on page 113.

Default Glossary

In Axon, you can specify a default glossary is specified in the Admin Panel. If a glossary association is selected in the onboarding rule for the system, Axon searches for the physical fields that are associated to a glossary. If a glossary association is not selected in the onboarding rule for the system, Axon uses the default glossary to onboard the objects from Enterprise Data Catalog.

Link Standard Data Quality Rule to a Rule in Informatica Data Quality

A standard data quality rule in Axon maps to a rule in Informatica Data Quality. You can map the standard rule to an existing rule in Informatica Data Quality, or you can automatically create a rule in Informatica Data Quality using CLAIRE recommendations.

Link Standard Rule to an Existing Rule in Informatica Data Quality

From Axon, you can link a standard data quality rule to an existing rule in Informatica Data Quality. After you link the rule, you can run the rule on Glossary object attributes that you onboarded from Enterprise Data Catalog.

The rule in Informatica Data Quality must conform to specific guidelines. For more information on the guidelines, see "Guidelines for Creating Rules in Informatica Data Quality" on page 232.

Perform the following steps to link the rule:

1. From Unison search, open the Glossary object where you want to create a standard data quality rule.
2. Click the **Data Quality** tab.
3. In the **Standard Data Quality Rules** section, click the standard data quality rule that you want to link to a rule in Informatica Data Quality.

   The standard rule opens.
4. Click **Edit**.
5. Click the icon next to **Technical Rule Reference**.

   The **Select Technical Rule Reference** dialog box opens.
6. In the **All** tab of the **Select Technical Rule Reference** dialog box, select the rule from Informatica Data Quality. Select a project in the left pane, and then select the rule for the project in the middle pane. The right pane displays the number of input parameters for the option you select in the middle pane.

   For the rules that you are allowed to select, refer to "Guidelines for Creating Rules in Informatica Data Quality" on page 232.

   The following image shows a sample **Select Technical Rule Reference** dialog box:

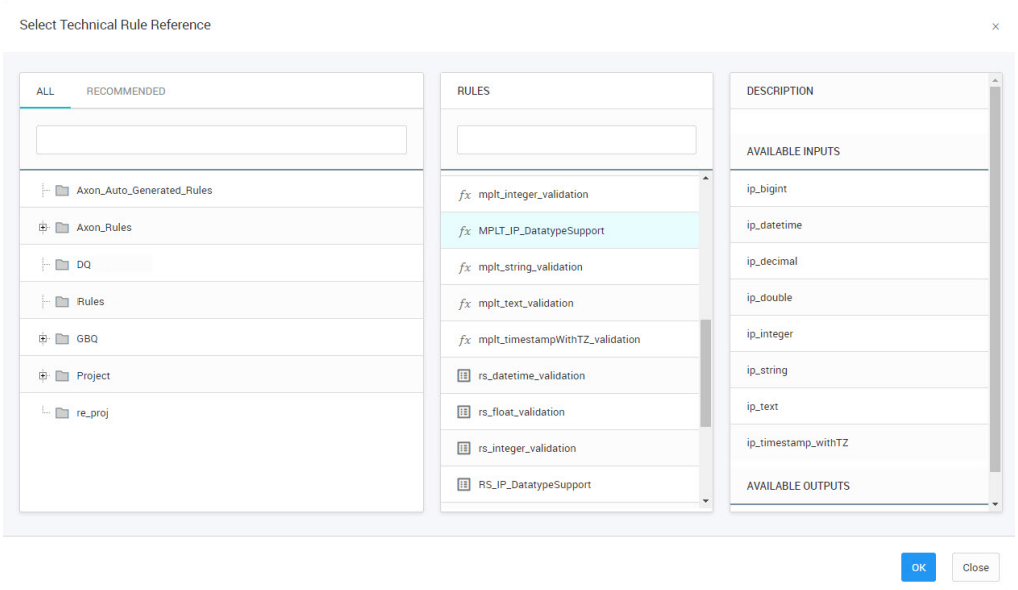

7. After you select a rule from Informatica Data Quality, click **OK** to close the **Select Technical Rule Reference** dialog box.
8. Click **Save & Close**.

Guidelines for Creating Rules in Informatica Data Quality

Make sure that the rule in Informatica Data Quality conforms to the following guidelines:

- The output value must be in the first column of the rule output.
- The data type in the status output port of the rule must be of string type.
- The output value for the rule must conform to the value criteria. The administrator can specify the output values that must be used by Axon to automate data quality rules. If the output values do not conform to the value criteria, Axon displays the data quality scores as 0% and marks all row counts as exceptions. For example, if Axon requires the output value to be either *Yes* or *No*, but the data quality rule generates the output value as *Y* or *N*, Axon displays the *Y* scores as exceptions.

  To specify the output values for the rules, see the *Axon Data Governance 7.3.8 Administrator Guide*.

If you have an existing rule in Informatica Data Quality that does not conform to the guidelines, modify the rule to meet the guidelines on the output criteria.

Automatically Create a Rule in Informatica Data Quality

If a data quality rule does not exist in Informatica Data Quality, you can automatically create the rule from the Axon interface. For a standard data quality rule in Axon, you can enter a description for the rule that you want to run on the Enterprise Data Catalog physical fields scanned. CLAIRE reads the description that you enter and intelligently recommends a single rule or multiple rules that can be run on the physical fields. If you agree to the recommendation, Axon creates the rule in Informatica Data Quality and then links the standard rule in Axon to the rule in Informatica Data Quality.

To recommend and create a rule automatically in Informatica Data Quality, the Axon Administrator must enable this option in the Admin Panel. For more information, see the *Axon Data Governance 7.3.8 Administrator Guide*.

1. From Unison search, open the Glossary object where you want to create a standard data quality rule.
2. Click the **Data Quality** tab.
3. In the **Standard Data Quality Rules** section, click the standard data quality rule that you want to link to a rule in Informatica Data Quality.

   The standard rule opens.
4. Click **Edit**.
5. In the **Technical Description** field, start typing the rule description.

   To create rules that CLAIRE can interpret, refer "Guidelines for Entering Technical Descriptions" on page 233.

   The CLAIRE icon turns orange .
6. Click the CLAIRE icon .

   The **Select Technical Rule Reference** dialog box opens.
7. In the **Recommended** tab of the **Select Technical Rule Reference** dialog box, review the recommended rule in the **CLAIRE Recommendation** and **Rules** sections.

The following image shows a sample **Select Technical Rule Reference** dialog box:

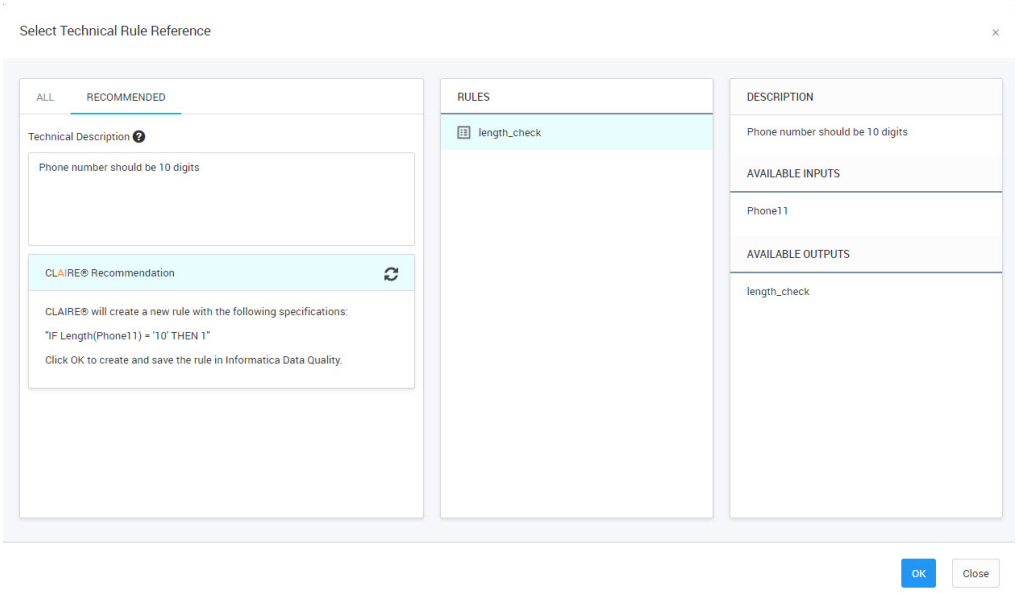

8. To modify the rule description, update the description in the **Technical description** field, and click the refresh icon.
9. Click **OK** when you are ready to use the recommended rule.

   Axon creates a rule in Informatica Data Quality that conforms to the technical description that you entered.
10. Click **Save & Close**.

Guidelines for Entering Technical Descriptions

When you enter a technical description for a standard data quality rule, CLAIRE® reads and intelligently recommends one or more rules. Based on the description, CLAIRE® can provide up to a maximum of four recommendations to generate a rule. You can review the recommended rules and decide whether the rule meets your requirement. If you agree to the recommendation, Axon automatically creates the rule in Informatica Data Quality and associates the rule with the standard rule in Axon.

Consider the following guidelines when you enter a technical description so that CLAIRE® can recommend appropriate rules:

- The description must be in English.
- The description must be within 200 characters and 30 words.
- The description must be in one sentence, and can contain letters, numbers, spaces, and special characters.
- The following special characters are permitted: comma (`,`), hyphen (`-`), semi-colon (`;`), single quote (`'`), double quotes (`"`), angle brackets (`<` and `>`), equal sign (`=`), parentheses (`{` and `}`), braces (`(` and `)`), square brackets (`[` and `]`), and period (`.`)

Examples of Empty Value Rules

If you want to check for null or empty values, you can use the keywords, such as "`empty`" or "`null`". You can also add lengthy and creative statements in the technical description.

The following examples show technical description of empty value rules that CLAIRE® can intelligently read:

- `Phone number should not be null.`
- `Phone number must not be an empty string.`
- `Phone number isn’t empty.`
- `Phone number cannot be empty.`
- `Phone number is expected not to be empty.`
- `Phone number is required to be not empty.`
- `Phone number should be an empty string.`
- `Phone number is an empty string.`
- `Phone Number is defined.`
- `It's not acceptable for Phone Number to equal NULL.`
- `Phone Number must be populated.`
- `Phone Number should contain something.`

When you check for a null or empty value, CLAIRE® suggests two rules in the following order:

- IS NOT NULL
- IS NULL

Examples of Comparison Rules

You can enter a technical description creatively to specify a comparison. You can also enter compound sentences.

The following examples show technical description of comparison rules that CLAIRE® can intelligently read:

- `Down payment should be less than 10000.`
- `Down payment is ten thousand.`
- `Down payment should be greater or equal to 10000.`
- `Down payment cannot be less than ten thousand.`
- `Down payment shouldn’t be greater or equal to 10000.`
- `Down payment must be smaller than 10000.`
- `Water depth holds a number greater or equal to zero.`
- `Water depth is going to either be 2 or be above 2.`
- `Value cannot be less than 1,000.`

CLAIRE® suggests a single rule when you check for a comparison.

Examples of String Length Rules

You can enter length-related statements in different ways in a technical description. You can use the words, such as "characters" or "digits", in the technical description.

The following examples show technical description of length rules that CLAIRE® can intelligently read:

- `Product Code must not be longer than 9 characters.`
- `Product Code must not be longer than 9 symbols.`
- `Product Code mustn't be longer than 9 letters and digits.`
- `Product Code is 9 characters long.`

- `Product Code is 10 digits.`
- `Product Code must be less than or equal to nine characters.`
- `Product Code shouldn't be greater than 9 characters.`
- `Product Code must be shorter than nine characters.`
- `The length of Policy Description should have value other than 10.`
- `ID's length equals 0 or is above 0.`
- `Policy Description has a length that's more than 10.`
- `Policy Description is at least 10 long.`
- `ORG ID has at least one character.`

CLAIRE® suggests a single rule when you check for a string length.

Examples of Data Type Rules

You can enter synonyms and lengthy sentences or keywords, such as "`number`" or "`date`", in the technical description.

The following examples show technical descriptions of data type rules that CLAIRE® can intelligently read:

- `Expiration Date must be a date.`
- `Expiration Date must be of type date.`
- `Lease number must be of type integer.`
- `Last Name isn’t a number.`
- `Employee ID is numeric.`
- `Expiration Date can have values of type date only.`
- `Expiration Date should contain the value of date.`
- `It can only have values of type date.`

When you check for a data type value, CLAIRE® suggests a single rule based on whether the data type is a date or number.

Examples of Range Rules

In a technical description, you can enter a markup that explicitly denotes the range and inclusion of boundary values. You can also enter complex language, including some compound sentences, in the technical description.

The following examples show technical description of range rules that CLAIRE® can intelligently read:

- `Diameter should be within [1; 2]`
- `Diameter should be in (1; 2)`
- `Diameter is in [1.5; 2.5)`
- `Diameter shouldn't be in [1 ; 2)`
- `Diameter exceeds 0 and doesn't exceed 5.`
- `Diameter is bigger than zero and also diameter is smaller than five.`
- `Diameter is between one and five, but it cannot be one or five.`
- `Diameter is at least 1 or higher, but not as high as 10.`
- `Diameter can be equal to 1, or be between 1 and 10.`

When you check for a range, CLAIRE® suggests recommendations based on the following scenarios:

- If you enter brackets, such as "`X must be in (1;2]`", to check for a range, CLAIRE® suggests a single rule because you have explicitly specified whether the boundary values have to be included or not.
- If you check for a range in the enhanced format, such as "`X must be between 1 and 2`", CLAIRE® suggests four recommendations, one for each combination of inclusion and exclusion of boundary values. Due to language ambiguity, CLAIRE® cannot interpret if you want to include or exclude the boundary values.

Examples of List Rules

In a technical description to define a list, you can enter markups or delimiters, such as curly braces (`{}`) and semicolon (`;`). To facilitate naturally written sentences, you can include conjunctions in the delimiters. Enclose each item of a list within double quotes (`""`).

The following examples show technical description of list rules that CLAIRE® can intelligently read:

- `Index must be {07; 10; 14; UU}`
- `Index is {07;10;14;UU}`
- `Index is one of {07 ;  10 ;  14 ;  UU}`
- `Index is one of {07; 10; 14; UU;}`
- `Index is one of {07; 07; 10; 14; UU}`
- `Index is one of {07,10,14,UU}`
- `The value of ARM Index is "0", "1" or "2"`
- `ARM Index shall be equivalent to "yes", "no" or "na"`
- `ARM Index will be one of these: "yes", "no", "na"`
- `ARM Index should have values within the limit of "yes", "no" and "na"`
- `"Yes", "no" or "na" can only be the values that ARM Index can hold.`

CLAIRE® suggests a single rule when you check for a list.

Note: Use the double quotes to indicate lists. If at least one double quote is found in the sentence, CLAIRE® attempts to read the list items.

Limitations

The following types of sentences are not supported in a technical description:

- You cannot combine different types of checks. Ranges and length check sentences are not compatible. For example, sentences such as "`Length of X must be between 1 and 10`" are not supported. You can either perform a comparison-type length check, such as "`Length of X must be below 1`", or perform a range check on the value of the glossary term, such as "`X must be between 1 and 10`", but not both.
- Compound statements such as "X must be not null and be a number" are not supported.
- Axon does not perform a validity check for ranges. For example, if you enter "`X must be below 9 and above 10`", there are no values that satisfy this range check and there are no validity checks performed. CLAIRE® detects the entered range, extracts two numbers, sorts them, and forms a range check so that the value is between those two numbers.
- If you enter the description without the brackets, range check can only address a single range. A compound sentence for a range is not supported if you want to check whether a value is outside a particular range. For example, the following sentences are not supported:

  - `X to be below nine or above 10.`
  - `X is lesser than ten or also x is greater than or equal to two hundred.`

- Axon performs a proper range check based on the description that you enter. For example, both the description "`X must be in [1; 2]`" and "`X must be between one and two`" generate the proper rules. If the value is outside the range, for example, "`X must not be between one and two`", Axon does not generate the proper rule. Instead, for example, "`X must not be between [1;2]`" generates the proper rule.

Create Local Data Quality Rules Automatically

After you link a standard data quality rule in Axon to a rule in Informatica Data Quality, you can choose to automatically create local data quality rules for the Glossary object attributes. Make sure that each Axon attribute is linked to only one column in Enterprise Data Catalog. In Axon, the **Axon Status** field for the standard rule must have the `Active` value

Axon creates local data quality rules when certain conditions are met. To know the conditions, refer to "Conditions for Automatically Generating Local Data Quality Rules" on page 239.
Perform the following steps to create local data quality rules automatically:

1. From Unison search, open the Glossary object that is associated with the standard data quality rule.
2. Click the **Data Quality** tab.
3. In the **Standard Data Quality Rules** section, click the standard data quality rule for which you want to create local data quality rules.

   The standard rule opens.
4. Click **Edit**.
5. Set the value of the **Axon Status** field to `Active`.
6. Select the **Create Local Rules Automatically** check box.
7. If you selected a rule that requires multiple input parameters, in the **Input to Glossary Mapping** section, associate each input parameter to a Glossary object.

   Note: Make sure that one of the Glossary objects that you map to an input parameter is the Glossary object that is linked to the attribute.

   The following image shows a sample **Input to Glossary Mapping** section:

8. Click **Save & Close**.

Onboarding Objects

You can manually link Enterprise Data Catalog fields to Axon attributes. You can also choose to automatically onboard the data sets and attributes from Enterprise Data Catalog to Axon. Configure the Enterprise Data Catalog parameters and data onboarding rules from the Admin Panel in Axon. To automatically onboard objects, you can select an onboarding rule for a System object and enable the automated onboarding process based on the onboarding rule from the System object.

A background job is scheduled to run daily at a predefined interval. When the job runs, Informatica identifies critical data elements based on the configured onboarding rules and the data sets and attributes are automatically created in Axon systems. After onboarding the discovered objects, Axon sends notifications to

the glossary stakeholders about the discovered objects. The data set stakeholders can curate the attributes by accepting or rejecting them.

For more information on the complete onboarding process, see "Automate Object Onboarding from Enterprise Data Catalog" on page 199.

Running Rules

After you have set up data quality rule automation, Axon runs rules on the fields scanned by Enterprise Data Catalog.

The following diagram describes how Axon works with Enterprise Data Catalog and Informatica Data Quality to run the rules and display the scores in Axon:

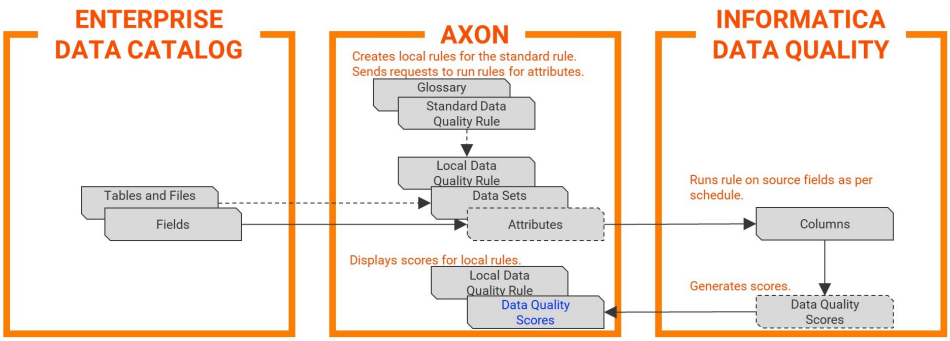

The following steps describe how Axon automatically runs data quality rules on the Enterprise Data Catalog fields:

1. Axon creates a local rule for each Attribute object. The local rules are instructions to run the standard rule for the Axon attributes linked to the Enterprise Data Catalog fields. To run the local rules, Axon sends mapping requests to Informatica Data Quality.
2. Informatica Data Quality connects to the resource scanned by Enterprise Data Catalog and runs the mapping on the fields. In this step, Informatica Data Quality applies the logical rule and processes the data in the fields.
3. Informatica Data Quality generates scores for the fields based on the rule.
4. Axon retrieves the scores from Informatica Data Quality and displays the score for each local rule.

To verify the log files for rule automation, see the *Axon Data Governance 7.3.8 Administrator Guide*.

Conditions for Automatically Generating Local Data Quality Rules

When you link a standard data quality rule in Axon with a rule in Informatica Data Quality, Axon creates local data quality rules for data set attributes that are associated with the glossary objects. Axon creates the local rules automatically without any user intervention.

Axon creates local data quality rules in Axon when the following conditions are met:

- You have created a new standard data quality rule for a Glossary object, and the value of the **Axon Status** field for the standard rule is set to `Active`.
- You have linked the standard rule to a data quality rule in Informatica Data Quality.
- You have selected the **Create Local Rules Automatically** check box for the standard rule.
- You have linked an attribute to a Glossary that has a standard data quality rule. Additionally, the attribute is linked to a field in Enterprise Data Catalog.
- You have manually linked the attribute to a field in Enterprise Data Catalog or onboarded the fields to Axon automatically.

Scheduling Local Data Quality Rules

When Axon sends mapping requests for the fields scanned by Enterprise Data Catalog, Informatica Data Quality runs the rules on the fields based on the frequency that you define in the local data quality rules.

In Axon, the local data quality rules can be scheduled to run daily, weekly, monthly, quarterly, bi-weekly, or on an ad-hoc basis.

Informatica Data Quality applies the following scheduling conditions for the local rules that are automatically generated by Axon:

- Daily: The rule is run everyday at the time specified by your Axon Administrator.
- Weekly or Bi-weekly: The rule is run once a week at the time specified by your Axon Administrator.
- Monthly or Quarterly: The rule is run once a month at the time specified by your Axon Administrator.
- Ad-hoc: The rule is run immediately when you save the local rule.

Note: The schedule for running the rules is determined by the frequency and time zone configured in Informatica Data Quality.

View Automatically Created Local Data Quality Rules

You can see the local rules created by Axon from the Data Quality facet, the standard data quality rules, and the Glossary objects.

Data Quality Facet

To see the local rules created by Axon, search the Data Quality facet in Unison. The Data Quality facet lists the standard rules and the local rules for the standard rules that Axon creates. Local data quality rules created by Axon have the following name format: `<standard_DQ_Rule> (Auto-created)`. Click a local data quality rule to see the details.

Standard Data Quality Rule

Open the standard rule, and go to the **Report** tab. In the **Local Data Quality Rules Generated for the Standard Rule** section, click on a local rule to open it.

Glossary Object

Open the Glossary object on which you have run a data quality rule, and go to the **Data Quality** tab. In the **Local Data Quality Rules** section, click on a local rule to open it.

View Data Quality Scores

When you automate data quality rules, Axon creates local data quality rules for the attributes and sends mapping requests for the attributes to Informatica Data Quality. Informatica Data Quality runs the rule on each field and generates data quality scores. The scores are sent back to Axon and displayed in the Axon interface. If a data source has no rows, Axon displays "0" as the data quality score for those rows.

You can view data quality scores from the standard data quality rule or Glossary object.

To view data quality scores from the standard data quality rule, open the standard rule and go to the **Report** tab. The **Local Data Quality Rules Generated for the Standard Rule** section displays the scores for each local data quality rule that was generated from this standard rule.

The following image shows a sample score displayed for the `Phone Number - not null` standard data quality rule:

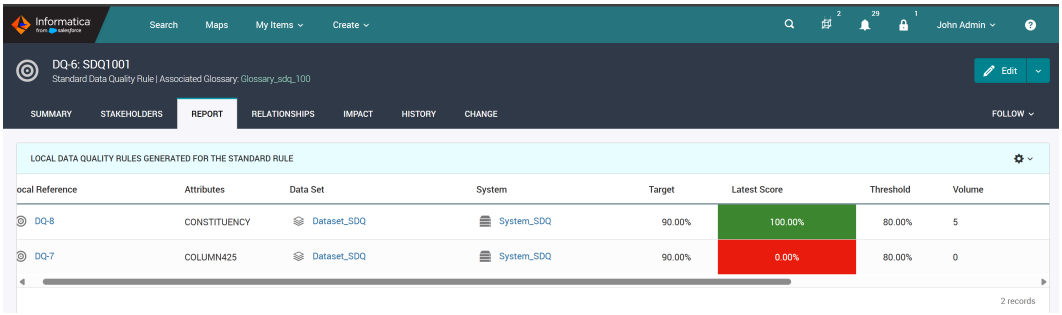

To view data quality scores from the Glossary object, open the object and go to the **Data Quality** tab. The **Local Data Quality Rules** section displays the standard data quality rule associated with the glossary, and each local data quality rule that was generated from the standard rule.

The following image shows a sample score displayed for the `Phone Number` glossary:

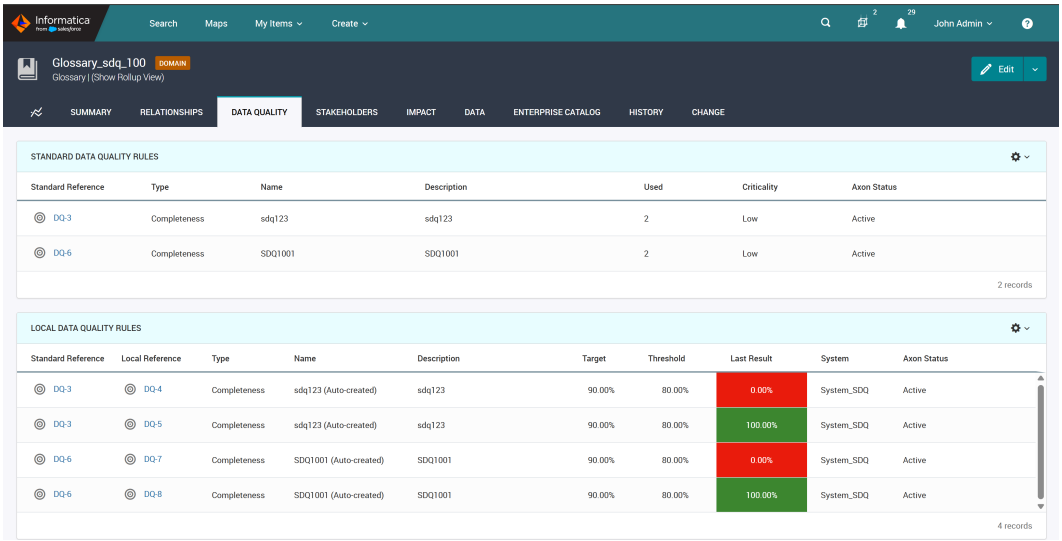

Axon sends you an email when the score for a data quality rule goes below a set threshold. The SuperAdmin user can enable email notifications to report these changes.

Managing Data Quality Rules

When you automate data quality rules, Axon runs the standard rules on the Attribute objects and creates local rules for each object. You can modify or delete the standard and local rules in Axon. You can also modify or delete the rules in Informatica Data Quality. When you perform these actions, Axon synchronizes the changes with Informatica Data Quality and updates the standard and local rules.

Modify or Delete Standard Data Quality Rules in Axon

You can modify or delete standard data quality rules in Axon. When you modify or delete a standard rule, Axon sends the changes to Informatica Data Quality. Some changes require Axon to update the local rules that are already created. Other changes require Axon to delete and recreate all local rules.

The following table shows how Axon handles local rules when you modify the related standard rule:

Action on Standard Rule	Action on Automatically Created Local Rules
Replace rule in the **Technical Rule Reference** field with another rule from Informatica Data Quality	Delete and recreate local rules
Change input parameters	Delete and recreate local rules
Change Enterprise Data Catalog field for a linked Attribute object	Delete and recreate local rules
Change **Frequency**, **Green Target**, or **Amber Target** values	Update scores for local rules

To see the updates made to an automatically created local rule, open the rule, and go to the **Reports** tab. In the **Data Quality Results** section, the chart shows the updates to the rule.

The following image shows an automatically updated local data quality rule:

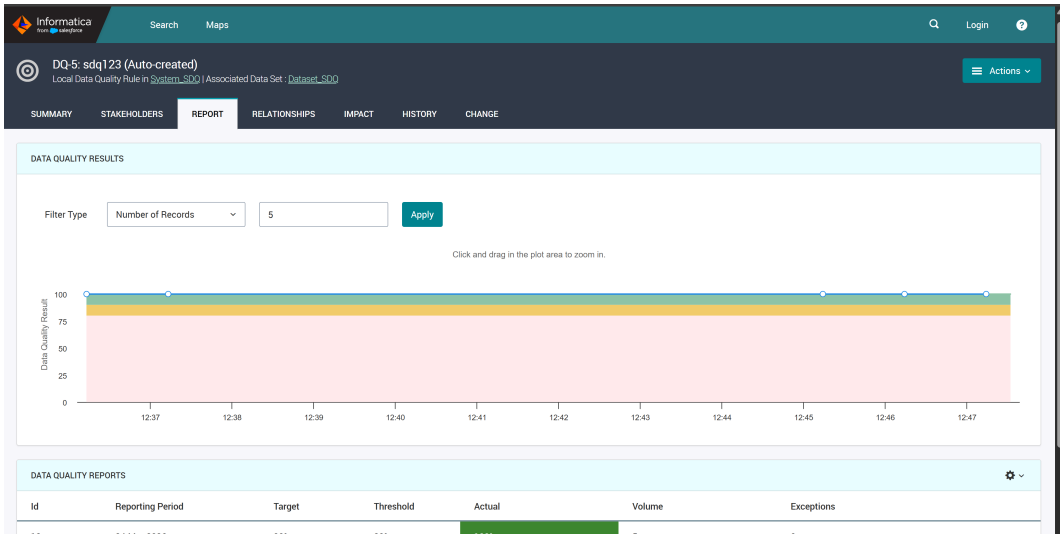

The tooltip in the timestamp indicates that the rule target and rule threshold was updated because the standard rule was modified.

If you delete a standard data quality rule or remove the Informatica Data Quality rule from the **Technical Rule Reference** field of the standard rule, Axon deletes all local rules that were automatically created from the standard rule. Axon removes the associations between the Attribute objects and the rule in Informatica Data Quality. All rule mappings for the Attributes objects in Informatica Data Quality are removed.

Modifying Standard Data Quality Rules

When you modify a standard data quality rule, Axon updates or recreates the related local rules depending on the change that you make to the standard rule.

1. From Unison search, open the standard data quality rule that you want to modify.
2. Click **Edit**.
3. Modify the properties of the rule. For information on the rule properties, see the "Create a Standard Data Quality Rule" on page 227 topic.
4. Click **Save & Close**.

Deleting Standard Data Quality Rules

You can delete the standard data quality rule in Axon if you do not want to run rules from Informatica Data Quality on Attribute objects. Before you delete a standard rule, you must set the status of the rule to `Deleted`.

1. From Unison search, open the standard data quality rule that you want to delete.
2. Click **Edit** to edit the standard rule.
3. Set the value of the **Axon Status** field to `Deleted`.
4. Click **Close** to save your changes.
5. From the Actions menu, click **Delete Item**.

   A confirmation prompt appears.
6. Click **Yes**.

Modify or Delete Local Data Quality Rules in Axon

You can modify a local data quality rule that is automatically created by Axon. Some fields in the local rule are editable and other fields are read-only.

The following fields are editable in automatically created local rules:

- Scheduling frequency in the **Frequency** field
- Threshold value in the **Green Target** field
- Threshold value in the **Amber Target** field
- **Run Rule and Retrieve Data** check box to disable or enable rule automation

If you choose to modify the **Frequency**, **Green Target**, or **Amber Target** fields in an automatically created local rule, Axon preserves the changes and does not overwrite the local rule if you modify the related standard rule at a later time.

The example in the following diagram shows a standard data quality rule and 4 automatically created local data quality rules. You can modify local rule 2. If you modify the standard rule, Axon automatically updates local rules 1, 3 and 4. Axon preserves your changes to local rule 2 and does not update the rule.

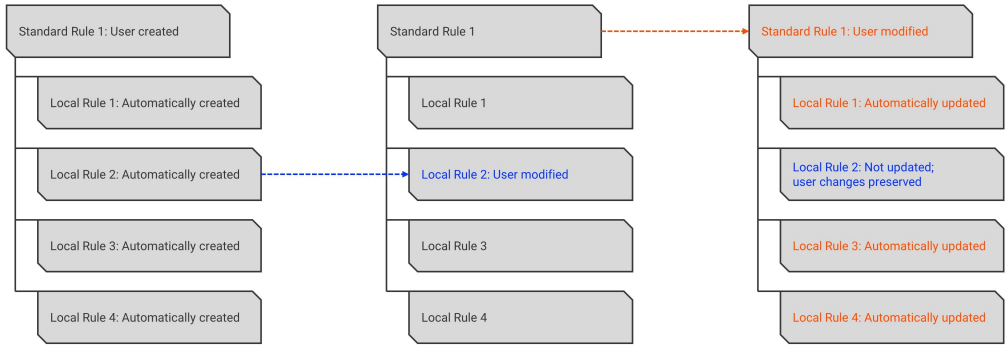

Note:

- If you delete a standard data quality rule or remove the Informatica Data Quality rule from the **Technical Rule Reference** field of the standard rule, Axon deletes all local rules that were automatically created from the standard rule. In such cases, all local rules become invalid, and the values in the **Frequency**, **Green Target**, and **Amber Target** fields no longer apply.
- If you update the **Frequency**, **Green Target**, or **Amber Target** value of a local rule to match the same value of the standard rule, Axon overwrites that particular local rule property with the standard rule property if you modify the standard rule at a later time.

You cannot delete a local data quality rule that is automatically generated by Axon. You can stop running data quality rules on the attribute by clearing the **Run Rule and Retrieve Data** check box of the local rule. To modify a local rule, see the "Modifying Local Data Quality Rules" on page 243 topic.

Modifying Local Data Quality Rules

Perform the following steps to modify a local data quality rule that is automatically created by Axon.

1. Open the local rule that you want to modify. For more information on how you can view local rules, see the "View Automatically Created Local Data Quality Rules" on page 239 topic.
2. Go to the **Report** tab, and click the local rule name that you want to modify.
3. Click **Edit**.
4. Modify the properties of the local rule.
5. To stop running data quality rules on the Attribute object, clear the **Run Rule and Retrieve Data** check box in the **Classifications** section.
6. Click **Save & Close**.

Modify or Delete Rules in Informatica Data Quality

When you modify or delete a rule in Informatica Data Quality, the changes are sent to Axon. Depending on the type of change you make, Axon updates or disables the rules in the Axon interface.

The changes that you make to a rule in Informatica Data Quality appear in Axon after a period of time depending on the synchronization interval between Axon and Informatica Data Quality. The Axon Administrator can configure the synchronization interval in the Axon Agent. For more information on configuring the synchronization interval between Axon and Informatica Data Quality, see the *Axon Data Governance 7.3.8 Administrator Guide*.

Rule Changes that Update Automatically in Axon

Some changes to data quality rules in Informatica Data Quality are automatically updated in Axon. In such cases, Axon updates the Informatica Data Quality rule in the **Technical Rule Reference** field of the standard rule in Axon. Axon also updates the rule parameters for all automatically created local rules. At the next local rule run, Axon runs the data quality rules on the Attribute objects based on the rule modifications that you have made in Informatica Data Quality.

The following changes in Informatica Data Quality are updated automatically in Axon:

- Rename rule
- Rename rule folder
- Rename rule project
- Modify the rule logic without modifying the input parameters

Rule Changes that Require User Action in Axon

Some changes to data quality rules in Informatica Data Quality are not automatically updated in Axon. In such cases, Axon marks the linked standard rules as invalid in the Axon interface, and all related local rules become disabled. Axon stops sending the Attribute objects to Informatica Data Quality to generate rule mappings. When you open a standard rule that is disabled by Axon, you are notified that the rule is disabled. The glossary owner of the standard rule gets an email notification that the rule is invalid.

The following changes in Informatica Data Quality are not updated automatically in Axon:

- Modify the number of input parameters of the rule
- Rename the input parameters
- Delete the rule

You must modify the standard rule in Axon to conform to the rule changes in Informatica Data Quality. Depending on the rule change in Informatica Data Quality, you can modify the standard rule in the following ways:

- Specify another rule from Informatica Data Quality in the **Technical Rule Reference** field.
- Add or remove input parameters based on the port changes in the Informatica Data Quality rule.
- Create a new standard rule in Axon and link it to a new rule in Informatica Data Quality to generate the scores automatically.

CHAPTER 8

Accessibility

This chapter includes the following topics:

- Overview, 245
- Keyboard Shortcuts for Axon Controls, 245
- Accessibility Tips, 247

Overview

Axon Data Governance supports accessibility compliance with the Web Content Accessibility Guidelines (WCAG) 2.2 AA standards including Section 508, UAT, and VPAT standards.

The following table displays the standard methods of web content navigation in Axon:

Keyboard Shortcut	Action
Tab	Move to the next element.
Shift + Tab	Move to the previous element.
Up arrow	Move up one line in the menu.
Down arrow	Move down one line in the menu.
Left arrow	Move selection to the previous tab.
Right arrow	Move selection to the next tab.

To optimize the experience for users who rely on audio feedback, Axon supports various assistive technologies such as screen readers. When you click an image, the screen reader reads the alternative text provided for the image.

Keyboard Shortcuts for Axon Controls

Axon enables shortcut keys for Calendar and Table or Grid controls.

The following table displays keyboard shortcuts for the Calendar control in Axon:

Shortcut Key	Action
Ctrl + Shift + Page Up	Move the selection to the previous year.
Ctrl + Shift + Page Down	Move the selection to the next year.
Ctrl + Home	Open the Datepicker.
Ctrl + Home Windows + Home	Move the selection to the current month.
Ctrl + Left arrow Windows+ Left arrow	Move the selection to the previous day.
Ctrl + Right arrow Windows + Right arrow	Move the selection to the next day.
Ctrl + Up arrow Windows + Up arrow	Move the selection to the previous week.
Ctrl + Down arrow Windows + Down arrow	Move the selection to the next week.
Ctrl + End Windows + End	Erase the selected date and close the Datepicker.
Enter	Save the selected date.
Escape	Close the Datepicker.
Page Down	Move the selection to the next month.
Page Up	Move the selection to the previous month.

The following table displays keyboard shortcuts for the Table or Grid control in Axon:

Shortcut Key	Action
Ctrl + Down arrow	Move the selection one cell down. Focus does not move if selection is on the last cell in the column.
Ctrl + Left arrow	Move the selection one cell to the left. Focus does not move if selection is on the first cell in the row.
Ctrl + Right arrow	Move the selection one cell to the right. Focus does not move if selection is on the last cell in the row.
Ctrl + Up arrow	Move the selection one cell up. Focus does not move if selection is on the first cell in the column.

Shortcut Key	Action
Left click Spacebar	Select or deselect a row in the table.
Ctrl + Left click	Select or deselect multiple rows in the table.

Accessibility Tips

Consider the following accessibility tips for optimizing ZoomText usage and Table Management:

- Asterisk symbol (*) indicates required fields on forms.
- When you use ZoomText, focus on the top area of the login screen to identify any errors.
- Axon separates table headers from data sections for improved readability.

APPENDIX A

Glossary

admin

The user profile that can perform administrative tasks on facets. Users with the admin profile have access to the Admin Panel.

attribute

A property of the data set. The attributes of a data object exist only within the context of a data set.

attribute link

The link that shows how an attribute in a data set is connected to one or more attributes in other data sets and systems.

Axon

Axon is a knowledge repository and governance tool that stores the core data items and the business context of your organization.

capability

A facet that refers to a list of activities, deliverables, or skills that is available in your organization. Use the Capability facet to inventorize the core capabilities of your organization and link them to the data, information technology, and business assets.

change request

A change request facilitates communication and discussion between the object stakeholders and the wider Axon community.

client

A facet that captures the core client segments of an organization and describes the context by connecting the clients to the other facets.

committee

A facet that contains an inventory of the core governance bodies of an organization and how they are related to each other.

data quality

A facet that displays the data quality rules and reports.

data set

A facet that holds the data structures, such as client, product, and transaction, of a system.

DQ Report

A data quality report that holds the scores or ratings of the data quality rules for a given period.

DQ Rule

A data quality rule that checks the quality of the data in systems.

facet

A structure that describes different aspects of an organization.

glossary

A facet that captures the definitions for data, activities, business terms, and other objects of an organization.

grid

A grid shows the list of objects based on the search criteria. The grid consists of columns that you can configure.

Insight Map

A graphical representation of the relationships between objects across different facets.

legal entity

A facet that contains an inventory of the legal entities of an organization that is aligned across different entities and jurisdictions.

Local Data Quality Rule

The data quality rules that are defined within the context of a system.

Local Map

A graphical representation of the immediate relationships of the object that you have currently opened.

object

A term that indicates each item listed in a facet.

org unit

A facet that describes the complex hierarchical structure of an organization.

people

A facet that describes the Axon users, the user profiles, and the org units to which the users belong.

policy

A facet that contains a statement of a plan or principles that address the needs of a particular situation.

process

A facet that contains a series of actions performed in a logical order to achieve a particular task or objective.

product

A facet that captures the core product segments of an organization and describes the context by connecting the products to the other facets.

project

A facet that contains a collection of activities that are planned and organized in order to achieve a particular set of objectives.

Quick Search

Finds objects in Axon across all facets.

role

A facet that describes the role of stakeholders in different areas such as data, information technology, and business areas.

segmentation

The capability to restrict information access to a limited set of users based on their location, business area, or function within an organization.

Standard Data Quality Rule

A data quality rule that is configured at the glossary level. A standard data quality rule sets the guidelines to measure the quality of an object, such as a data set and attributes, that is linked to a standard data quality rule.

superadmin

The user profile that can perform all administrative tasks in Axon. In comparison to an admin profile, a user with a SuperAdmin profile can perform additional tasks, such as configure default workflows and edit glossary rules engine.

system

A facet that holds one or more collections of data assets that are useful to your organization.

system interface

A facet that facilitates the flow of information between systems and data sets.

Unison Search

A powerful search function that is central to Axon. When you search using Unison, you can view objects that are linked to the object that you searched for in all the available facets.

user profile

A profile that the administrator associates to the user account to perform tasks on objects in Axon.

webuser

The most basic user profile in Axon that has permission to view content. An administrator can provide advanced permissions to a WebUser on a facet by assigning a role.

INDEX

A

activity stream
  objects 64
add
  Data Quality report 139
add grid items 36
add users
  bulk upload 106
  manually 108
assign workflow
  change request 150
axon
  bulk update 125
Axon
  dashboard 19
  data quality report 80
  data quality rule 80
  Unison search 30
  user 15
Axon integration
  Enterprise Data Catalog 175
Axon Interface
  facet 18
  grid 18
  My Dashboard 18
  toolbar 18

B

bulk migrate
  migrate all objects 140
  migrate selected objects 140
bulk update
  roles 125
bulk upload
  people 106

C

canvas
  swimlane 155
change request
  create 149
  overview 145
  requestor 144
  status 145
  supported facets 147
clone
  data set 117
cloning
  data set 117
configure
  parameters 204
create
  attribute links 215
  dashboards 162
  object 81
  widgets 162
creating
  local Data Quality rule 134
curate attributes
  bulk update 214
  glossary 214
custom fields
  Viewing 80

D

data discovery
  automated 199
  data domains 113
  discovered attributes 114
data domains
  definition 221
data migration 140
data onboarding rules
  overview 196
data privacy
  Data Privacy Management 69
  GDPR 69
data quality rule
  definition 221
Data Set
  Enterprise Catalog 192
data sets
  values 55
delete objects
  superadmin 127
discovered attributes
  curate 214
discovered objects
  attribute 213
  data set 213

E

edit
  objects 109
Enterprise Catalog
  Link Physical Fields 189
  Link Resources 188
  Physical Fields 176
  Resources 176
Enterprise Data Catalog
  automation 199
  confidence score 116
  data attributes 116

Enterprise Data Catalog *(continued)*
Review Status 116
export
physical fields 186
resources 179
export physical fields
system 195
export resources
system 194
exported data
dependent objects 142
facet objects 142
related objects 142

F

facet
active tasks 153
field
recommended glossary 230
fields
definition 221
following
objects 64

G

glossary
data discovery 113
data domain 113
hierarchy 63
link data domain 230
link field 230
Glossary
Enterprise Catalog 192
glossary assignment rules
data discovery 114
grid
dashboard 22
list 22

H

hierarchical facet
child objects 38
level 38

I

impact tab
connect objects 119
create connections 119
search and add 119, 120
view and edit 119
input parameters
definition 221

L

link fields
parent 190
Link Physical Fields
Attributes 189
Link Resources
Systems 188
local data quality rules
conditions 239
create automatically 237
definition 221
schedule 239
view 239
local data quality scores 240

M

maps
context map 78
insight map 73
local map 77
process map 78

N

notification
discovered objects 212

O

object properties
org unit 93
organizational unit 93
objects
bulk delete 127
create 81
creating an object 82
editing an object 109
search and view 28
onboarding
automated 199
automation process 201
condition 204
criteria 230
discovered objects 213
examples 206
notification 212
prerequisites 200
relational source 206
scheduled job 204
overview
dashboards 162
widgets 162

P

People
accept roles 124
undo accept 124
physical field
metadata 184
properties
business area 83
capability 84
client 85
committee 86
data set 87
geography 89
glossary 89

properties *(continued)*
legal entity 93
people 108
policy 94
process 95
product 98
project 99
regulation 100
regulator 102
regulatory theme 102
system 105
system interface 103

R

recommended
attributes 215
remove link
attribute 219
system 219
requestor 144
resources
definition 221
rule automation
overview 220
process 223
rule mapplets
definition 221
rule specifications
definition 221
rules
data onboarding 196
run workflow
change request 150

S

search
misspell words 35
quick links 36
Search Operations
Add to Search 32
Clear Search 32
Perform New Searches 32
search operator
AND 33
NOT 33
OR 33
search option
group 34
mute 34
reorder 34
segment
Unison search 29
segmentation
example 24
overview 24
stakeholder 144
standard data quality rules
create 138, 227
definition 221
link to rule specification or rule mapplet 231
system
export physical fields 195
export resources 194
System
Enterprise Catalog 193

U

Unison search
bulk update 125
filter options 31
hierarchical facet 38
objects 30
options 34
save search 43
share search 43
Unison search interface
facet 19, 21
grid 19, 22
toolbar 19, 20
user profile
admin 15, 17
superadmin 15, 17
technical owner 17
webuser 15

V

values 55
view
about me 61
active tasks 153
activity stream 62
attributes 51
change 60
change request 62
components 59
dashboards 66
Data 58
data quality 56
Enterprise Catalog 58
following 62
History 60
impact 59
interfaces 50
people 59
regulations 59
relationships 53
Report 59
Responsibilities 62
segment 29
Stakeholders 54
summary 48
Team 62

W

workflow
create custom workflow 154
overview 143
requestor 144
stakeholders 144
workflow diagram
canvas 155
properties 155
toolbar 155
workflows
discussion 152