How-To Library

Informatica

Using REST API to Retrieve Links Between Axon and External Applications

© Copyright Informatica LLC 2019, 2021. Informatica, the Informatica logo, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

You can use a REST API client to retrieve the links between Axon objects and objects in external applications. This article describes the REST API method, syntax, and examples that help you understand how to retrieve the links between Axon and other application objects.

Supported Versions

- Informatica Axon Data Governance 6.1

Table of Contents

Overview. . . . 2
Prerequisites. . . . 3
URL and Method. . . . 3
API Parameters. . . . 4
Examples: Retrieve Links Between Axon and Enterprise Data Catalog. . . . 5
Example 1. Retrieve Linked Resources. . . . 6
Example 2. Retrieve Linked Attributes. . . . 7
Examples: Retrieve Links Between Axon and Informatica Data Quality. . . . 8
Example 1. Retrieve Linked Rule Mapplets. . . . 8
Example 2. Retrieve Linked Rule Specifications. . . . 9
Example 3. Retrieve Linked Rule Mapplet and Rule Specification. . . . 10
Example 4. Retrieve Linked Scorecard. . . . 11
Example 5. Retrieve Linked Profile. . . . 12
Example 6. Retrieve Linked Data Quality Rules. . . . 13
Examples: Retrieve Linking Between Axon and Secure@Source. . . . 14
Example 1. Retrieve Secure@Source Policy Using a Single Source ID. . . . 14
Example 2. Retrieve Secure@Source Policies Using Multiple Source IDs. . . . 15
Example 3. Retrieve Axon Policy Using a Single Target ID. . . . 17
Example 4. Retrieve Axon Policy Using Multiple Target IDs. . . . 18

Overview

You can use a REST API to retrieve the links between Axon objects and objects in external applications. For example, use a REST API to retrieve the links between Axon objects and Enterprise Data Catalog technical assets.

In an API request, the source object is Axon. The target objects that the API supports are external applications such as Enterprise Data Catalog, Secure@Source, and Informatica Data Quality. You can use the target information to find information about other related sources. If you provide the source information, the API finds the related target information. For example, if you provide information on Axon attributes, you can find the related Enterprise Data Catalog fields using the API.

You can retrieve the following links between Axon and other applications:

- Axon attribute and Enterprise Data Catalog field

- Axon system and Enterprise Data Catalog resource
- Axon data quality rules and Informatica Data Quality rules
- Axon policy and Secure@Source policy

Prerequisites

Before you make REST API calls, you must authenticate yourself with your user name and password.

Enter the following parameters in the REST API client to connect to the Axon host and receive a JW token:

Property	Value
URL	**http(s)://<Axon_host_name>:<Axon_port_number>/api/login_check**
Method	POST
Input parameter `username`	Your Axon login user name
Input parameter `password`	Your Axon login password

After you enter these parameters and make the API call, you will receive a JW token as the Output parameter:

Property	Value
Output	The output parameter in the form of a long string text. The JW token `<Your_JW_token>` is the text within double quotes in the output.

To make the Axon API calls, specify the JW token `<Your_JW_token>` and send the API payload.

URL and Method

Use API requests to retrieve links between Axon objects and objects in other applications. You can provide an API request with source information to retrieve target information. You can also provide an API request with target information to retrieve source information.

Retrieve Links Based on Source Information

If you want to retrieve the target information for external applications, you must provide the source parameters for Axon in the API request.

The following table lists the source parameters for the API to retrieve the linked target information:

Property	Description
URL	**http(s)://<Axon_host>:<port>/api/v1/referencelinks?sourceIds[]=<source_identifier>&entityType=<object_classtype>&systemIdentifier=<sourcename>&relationshipNames[]=<relationshipname_for_linkedobjects>**
Method	GET

A sample API call with the parameters for an Axon system to retrieve the linked Enterprise Data Catalog resource is as follows:

http(s)://<Axon_host>:<port>/api/v1/referencelinks?sourceIds[]=1&entityType=Axon\AppBundle\Entity\System&systemIdentifier=Axon&relationshipNames[]=AxonSystemToEICResource

Retrieve Links Based on Target Information

If you want to retrieve the source information for Axon, you must provide the target parameters in the API request.

Before you pass the target information, you need to retrieve the target identifiers by passing the source identifiers in the API. For example, an Axon system is connected to a single Enterprise Data Catalog resource. The Enterprise Data Catalog resource might be connected to multiple Axon systems. First, you need to provide the Axon system information in the API client to retrieve the linked Enterprise Data Catalog resource information. Then, you can provide the Enterprise Data Catalog resource information to retrieve the linked Axon systems.

The following table lists the target parameters for the API to retrieve the linked source information:

Property	Description
URL	**http(s)://<Axon_host>:<port>/api/v1/referencelinks?targetIds[]=<target_identifier>&entityType=<object_classtype>&systemIdentifier=<targetname>&relationshipNames[]=<relationshipname_for_linkedobjects>**
Method	GET

A sample API call with the parameters for an Enterprise Data Catalog field to retrieve the linked Axon attribute is as follows:

http(s)://<Axon_host>:<port>/api/v1/referencelinks?targetIds[]=HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1
&entityType=com.infa.ldm.relational.Column&systemIdentifier=EIC&relationshipNames[]=AxonAttributeToEICColumn

API Parameters

The following table lists the important query parameters exposed for this API:

Parameter	Description
sourceIds	An array of source identifiers. The source refers to Axon. You need to provide source identifiers if you want to retrieve the linked target objects. For example, to retrieve Enterprise Data Catalog fields that are linked to Axon attributes, you need to pass the attribute identifiers.
targetIds	An array of target identifiers. The target refers to external applications such as Enterprise Data Catalog, Informatica Data Quality, and Secure@Source. You need to provide target identifiers if you want to retrieve the linked source objects. For example, to retrieve Axon attributes that are linked to Enterprise Data Catalog fields, you must pass the field identifiers. **Note:** Before you pass the target identifier, you must retrieve the target identifiers by passing the source identifiers in the REST API.

Parameter	Description
entityType	The class type of the object for which you provide the identifiers. Axon objects can have the following values: - System: `Axon\AppBundle\Entity\System` - Attribute: `Axon\AppBundle\Entity\CatItemComponent` - Data Quality Rule: `DQMeasure` - Policy: `Axon\AppBundle\Entity\Policy` Enterprise Data Catalog technical assets can have the following values: - Resource: `core.Resource` - Field: `com.infa.ldm.relational.Column` Informatica Data Quality rules can have the following values: - Rule Mapplet: `RULE_MAPPING` - Rule Specification: `RULE_DEFINITION` - Profile or a Scorecard: `com.infa.profiling.ProfileDefinition` Secure@Source policy can have the following value: - Policy: `policy`
systemIdentifier	Unique identifier for the application. You define the parameters for the application in the API and the value for the identifier depends on the source or target identifiers that you provide. You can enter the following values: - If the source is Axon, the value is "Axon". - If the target is Enterprise Data Catalog, the value is "EIC". - If the target is Informatica Data Quality, the value is "DQ". - If the target is Secure@Source, the value is " SATS".
relationshipNames	Optional. An array of relationship names or labels for the relationship between Axon and external application objects. If you want the linked objects for a specific relationship, you can filter by providing the relationship names. If you want to filter based on the relationship between Axon objects and Enterprise Data Catalog assets, enter the following values: - System to Resource: `AxonSystemToEICResource` - Attribute to Field: `AxonAttributeToEICColumn` If the link is between Axon and Secure@Source, enter the value `AxonPolicyToSATSPolicy`. If the link is between Axon and Informatica Data Quality, enter the value `AxonProfileRelationship`. **Note:** Use the **relationshipNames** parameter for standard and local data quality rules. You cannot use this parameter for automatically created data quality rules because there are no data quality objects that can be displayed.

Examples: Retrieve Links Between Axon and Enterprise Data Catalog


You can link an Axon system to an Enterprise Data Catalog resource. You can link an Axon attribute to an Enterprise Data Catalog field.

The following examples describe how to retrieve links between Axon objects and Enterprise Data Catalog technical assets:

Example 1. Retrieve Linked Resources

Consider an Axon system that is linked to an Enterprise Data Catalog resource.

The following image shows a sample API request with the Axon system information to retrieve the linked Enterprise Data Catalog resource information:

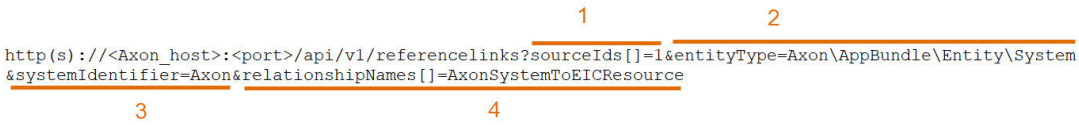

The REST API URL request contains the following information:

1. The `sourceIds[]=1` parameter indicates that the identifier for the Axon system is "1."
2. The `entityType=Axon\AppBundle\Entity\System` parameter indicates that the entity type is an Axon system.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonSystemToEICResource` parameter indicates the relationship label for the link between an Axon system and Enterprise Data Catalog resource.

The following image shows the sample response with the linked resource information:



The sample response includes the following output information:


1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonSystemToEICResource"` parameter indicates the relationship label for the link between an Axon system and Enterprise Data Catalog resource.
3. The `"objectIdentifier": "AmazonS3://AmazonS3"` parameter indicates the unique identifier for the linked resource.
4. The `"systemIdentifier": "EIC"` parameter indicates that the identifier for the target is Enterprise Data Catalog.

5. The `"entityType": "core.Resource"` parameter indicates that the entity type is an Enterprise Data Catalog resource.
6. In the `"properties"` section, the `"ResourceName": " AmazonS3"` parameter indicates that the name of the linked resource is "AmazonS3."

Example 2. Retrieve Linked Attributes

Consider an Axon attribute that is linked to an Enterprise Data Catalog field.

The following image shows a sample API request with the Enterprise Data Catalog field information to retrieve the related Axon attribute:



The API URL request contains the following information:

1. The `targetIds[]=HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1` parameter indicates that the target identifier is "HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1."
2. The `entityType=com.infa.ldm.relational.Column` parameter indicates that the entity type is an Enterprise Data Catalog field.
3. The `systemIdentifier=EIC` parameter indicates that the identifier for the target is Enterprise Data Catalog.
4. The `relationshipNames[]=AxonAttributeToEICColumn` parameter indicates the relationship label for the link between an Axon attribute and Enterprise Data Catalog field.

The following image shows the sample response with the linked attribute information:


```
{
    "results": [
        {
            "objectIdentifier": "HDFSScanner_v1022://Hdfs/HDFS_FF/CMD.xml/items/ID1",
            "systemIdentifier": "EIC",
            "entityType": "com.infa.ldm.relational.Column",
            "links": [
                {
                    "relationshipName": "AxonAttributeToEICColumn",
                    "objectIdentifier": "4",
                    "systemIdentifier": "Axon",
                    "entityType": "Axon\AppBundle\Entity\CatItemComponent",
                    "properties": {
                        "ColumnName": "ID1",
                        "ClassType": "com.infa.ldm.file.xml.XMLField"
                    }
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.

2. The `"relationshipName": "AxonAttributeToEICColumn"` parameter indicates the relationship label for the link between an Axon attribute and Enterprise Data Catalog field.
3. The `"objectIdentifier": "4"` parameter indicates the unique identifier for the linked attribute. You can use this identifier to find the attribute information, such as attribute name.
4. The `"systemIdentifier": "Axon"` parameter indicates that the identifier for the source is Axon.
5. The `"entityType": "Axon\AppBundle\Entity\CatItemComponent"` parameter indicates the class type of the Axon attribute.
6. In the `"properties"` section, the `"ColumnName": "ID1"` parameter indicates the name of the related Enterprise Data Catalog field. The `"ClassType": "com.infa.ldm.file.xml.XMLField"` indicates that the type of the Enterprise Data Catalog field is "XML Field".

Examples: Retrieve Links Between Axon and Informatica Data Quality


An Axon data quality rule links to a rule mapplet, rule specification, scorecard, and profile from Informatica Data Quality.

The following examples describe how to retrieve links between Axon and Informatica Data Quality rules:

Example 1. Retrieve Linked Rule Mapplets

Consider an Axon data quality rule that is linked to an Informatica Data Quality rule mapplet.

The following image shows a sample API request with the Axon data quality rule information to retrieve the related Informatica Data Quality rule mapplet:

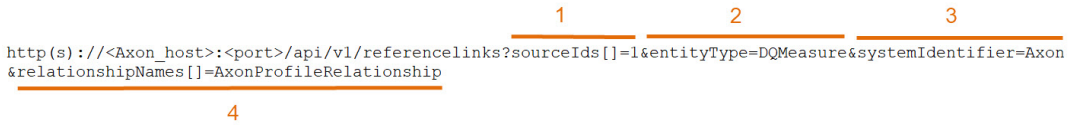

The REST API URL request contains the following information:

1. The `sourceIds[]=1` parameter indicates that the identifier for the Axon data quality rule is "1."
2. The `entityType=DQMeasure` parameter indicates that the entity type is an Axon data quality rule.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule mapplet.

The following image shows the sample response with the linked rule mapplet information:


```
{
    "results": [
        {
            "objectIdentifier": "1",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "mapplet:/Axon_EDGE/Auto/NotNull_Validation_Yes",
                    "systemIdentifier": "DQ",
                    "entityType": "RULE_MAPPING",
                    "properties": []
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule mapplet.
3. The `"objectIdentifier": "mapplet:/Axon_EDGE/Auto/NotNull_Validation_Yes"` parameter indicates the unique identifier for the linked rule mapplet.
4. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
5. The `"entityType": "RULE_MAPPING"` parameter indicates that the entity type is a rule mapplet.

Example 2. Retrieve Linked Rule Specifications

Consider an Axon data quality rule that is linked to an Informatica Data Quality rule specification.

The following image shows a sample API request with the Axon data quality rule information to retrieve the related Informatica Data Quality rule specification:

```
                                                                    1              2
http(s)://<Axon_host>:<port>/api/v1/referencelinks?sourceIds[]=6&entityType=DQMeasure
&systemIdentifier=Axon&relationshipNames[]=AxonProfileRelationship
          3                          4
```

The REST API URL request contains the following information:

1. The `sourceIds[]=6` parameter indicates that the identifier for the Axon data quality rule is "6."
2. The `entityType=DQMeasure` parameter indicates that the entity type is an Axon data quality rule.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule specification.

The following image shows the sample response with the linked rule specification information:


```
{
    "results": [
        {
            "objectIdentifier": "6",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "rulespec:/Axon_EDGE/Auto/ValidateZipcode_4",
                    "systemIdentifier": "DQ",
                    "entityType": "RULE_DEFINITION",
                    "properties": []
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule specification.
3. The `"objectIdentifier": "rulespec:/Axon_EDGE/Auto/ValidateZipcode_4"` parameter indicates the unique identifier for the linked rule specification.
4. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
5. The `"entityType": "RULE_DEFINITION"` parameter indicates that the entity type is a rule specification.

Example 3. Retrieve Linked Rule Mapplet and Rule Specification

Consider an Axon data quality rule that is linked to a rule mapplet and rule specification from Informatica Data Quality.

The following image shows a sample API request with the Axon data quality rule information to retrieve the related rule specification and rule mapplet from Informatica Data Quality:


```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?sourceIds[]=6&sourceIds[]=1&entityType=DQMeasure&systemIdentifier=Axon
&relationshipNames[]=AxonProfileRelationship
```


1 2 3 4

The REST API URL request contains the following information:

1. The `sourceIds[]=1` and `sourceIds[]=6` parameters indicate that the identifiers for the Axon data quality rules are "1" and "6."
2. The `entityType=DQMeasure` parameter indicates that the entity type is an Axon data quality rule.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule mapplet. The parameter also indicates the relationship label between the Axon data quality rule and Informatica Data Quality rule specification.

The following image shows the sample response with the linked rule mapplet and rule specification information:


```
{
    "results": [
        {
            "objectIdentifier": "1",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "mapplet:/Axon_EDGE/Auto/NotNull_Validation_Yes",
                    "systemIdentifier": "DQ",
                    "entityType": "RULE_MAPPING",
                    "properties": []
                }
            ]
        },
        {
            "objectIdentifier": "6",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "rulespec:/Axon_EDGE/Auto/ValidateZipcode_4",
                    "systemIdentifier": "DQ",
                    "entityType": "RULE_DEFINITION",
                    "properties": []
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. In the `"objectIdentifier": "1"` section, the `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule mapplet.
3. The `"objectIdentifier": "mapplet:/Axon_EDGE/Auto/NotNull_Validation_Yes"` parameter indicates the unique identifier for the linked rule mapplet.
4. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
5. The `"entityType": "RULE_MAPPING"` parameter indicates that the entity type is a rule mapplet.
6. In the `"objectIdentifier": "6"` section, the `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality rule specification.
7. The `"objectIdentifier": "rulespec:/Axon_EDGE/Auto/ValidateZipcode_4"` parameter indicates the unique identifier for the linked rule specification.
8. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
9. The `"entityType": "RULE_DEFINITION"` parameter indicates that the entity type is a rule specification.

Example 4. Retrieve Linked Scorecard

Consider an Axon data quality rule that is linked to a scorecard from Informatica Data Quality.

The following sample API request contains the Axon data quality rule information to retrieve the related scorecard from Informatica Data Quality:

```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?
sourceIds[]=22&entityType=DQMeasure&systemIdentifier=Axon&relationshipNames[]=AxonProfileRelatio
nship
```

The API URL request contains the following information:

1. The `sourceIds[]=22` parameter indicates that the identifier for the Axon data quality rule "22."
2. The `entityType=DQMeasure` parameter indicates that the entity type is an Axon data quality rule.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and scorecard from Informatica Data Quality.

The following sample response contains the linked rule scorecard information:


```
{
    "results": [
        {
            "objectIdentifier": "22",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "scorecard:/Axon_EDGE/GNP/SC_New@FNameLength",
                    "systemIdentifier": "DQ",
                    "entityType": "com.infa.profiling.ProfileDefinition",
                    "properties": []
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality scorecard.
3. The `"objectIdentifier": "scorecard:/Axon_EDGE/GNP/SC_New@FNameLength"` parameter indicates the unique identifier for the linked scorecard.
4. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
5. The `"entityType": "com.infa.profiling.ProfileDefinition"` parameter indicates that the entity type is a scorecard.

Example 5. Retrieve Linked Profile

Consider an Axon data quality rule that is linked to a profile from Informatica Data Quality.
The following sample API request contains the Axon data quality rule information to retrieve the related profile from Informatica Data Quality:

```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?
sourceIds[]=23&entityType=DQMeasure&systemIdentifier=Axon&relationshipNames[]=AxonProfileRelatio
nship
```

The API URL request contains the following information:

1. The `sourceIds[]=23` parameter indicates that the identifier for the Axon data quality rule "23."
2. The `entityType=DQMeasure` parameter indicates that the entity type is an Axon data quality rule.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and profile from Informatica Data Quality.

The following sample response contains the linked profile information:

```
{
    "results": [
        {
            "objectIdentifier": "23",
            "systemIdentifier": "Axon",
            "entityType": "DQMeasure",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "profile:/Axon_EDGE/GNP/Profile01@FNameLength",
                    "systemIdentifier": "DQ",
                    "entityType": "com.infa.profiling.ProfileDefinition",
                    "properties": []
                }
            ]
        }
    ]
}
```

The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality profile.
3. The `"objectIdentifier": "profile:/Axon_EDGE/GNP/Profile01@FNameLength"` parameter indicates the unique identifier for the linked profile.
4. The `"systemIdentifier": "DQ"` parameter indicates that the identifier for the target is Informatica Data Quality.
5. The `"entityType": "com.infa.profiling.ProfileDefinition"` parameter indicates that the entity type is a profile.

Example 6. Retrieve Linked Data Quality Rules

Consider a scorecard from Informatica Data Quality that is linked to an Axon data quality rule.
The following sample API request contains the Informatica Data Quality scorecard information to retrieve the related Axon data quality rule:

```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?targetIds[]=scorecard:/Axon_EDGE/GNP/
SC_New@FNameLength&relationshipNames[]=AxonProfileRelationship&entityType=com.infa.profiling.Pro
fileDefinition&systemIdentifier=DQ
```

The API URL request contains the following information:

1. The `targetIds[]=scorecard:/Axon_EDGE/GNP/SC_New@FNameLength` parameter indicates the identifier for the Informatica Data Quality scorecard.
2. The `entityType=com.infa.profiling.ProfileDefinition` parameter indicates that the entity type is a scorecard from Informatica Data Quality.

3. The `systemIdentifier=DQ` parameter indicates that the identifier for the target is Informatica Data Quality.
4. The `relationshipNames[]=AxonProfileRelationship` parameter indicates the relationship label for the link between the Axon data quality rule and scorecard from Informatica Data Quality.

The following sample response contains the linked Axon data quality rule information:

```
{
    "results": [
        {
            "objectIdentifier": "scorecard:/Axon_EDGE/GNP/SC_New@FNameLength",
            "systemIdentifier": "DQ",
            "entityType": "com.infa.profiling.ProfileDefinition",
            "links": [
                {
                    "relationshipName": "AxonProfileRelationship",
                    "objectIdentifier": "22",
                    "systemIdentifier": "Axon",
                    "entityType": "DQMeasure",
                    "properties": []
                }
            ]
        }
    ]
}
```

The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonProfileRelationship"` parameter indicates the relationship label for the link between the Axon data quality rule and Informatica Data Quality scorecard.
3. The `"objectIdentifier": "22"` parameter indicates the unique identifier for the linked Axon data quality rule.
4. The `"systemIdentifier": "Axon"` parameter indicates that the identifier for the source is Axon.
5. The `"entityType": "DQMeasure"` parameter indicates that the entity type is an Axon data quality rule.


Examples: Retrieve Linking Between Axon and Secure@Source

You can link an Axon policy to a security policy and classification policy from Secure@Source.

The following examples describe how to retrieve links between Axon and Secure@Source policies.

Example 1. Retrieve Secure@Source Policy Using a Single Source ID

Consider an Axon policy that is linked to a Secure@Source policy.
The following image shows a sample API request that contains information about a single Axon policy that retrieves the related Secure@Source policy:



The REST API URL request contains the following information:

1. The `sourceIds[]=1` parameter indicates that the identifier for the Axon policy is "1."
2. The `entityType=Axon\AppBundle\Entity\Policy` parameter indicates that the entity type is an Axon policy.

3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonPolicyToSATSPolicy` parameter indicates the relationship label for the link between the Axon policy and Secure@Source policy.

The following image shows the sample response with the linked Secure@Source policy:


```
{
    "results": [
        {
            "objectIdentifier": "1",
            "systemIdentifier": "Axon",
            "entityType": "Axon\\AppBundle\\Entity\\Policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "3",
                    "systemIdentifier": "SATS",
                    "entityType": "policy",
                    "properties": {
                        "SATSPolicyName": "New_Anomaly_Policy_1",
                        "SATSPolicyType": "SecurityPolicy",
                        "id": "3"
                    }
                }
            ]
        },
    ]
}
```



The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"relationshipName": "AxonPolicyToSATSPolicy"` parameter indicates the relationship label for the link between the Axon policy and Secure@Source policy.
3. The `"objectIdentifier": "3"` parameter indicates the unique identifier for the linked Secure@Source policy.
4. The `"systemIdentifier": "SATS"` parameter indicates that the identifier for the target is Secure@Source.
5. The `"entityType": "policy"` parameter indicates that the entity type is a Secure@Source policy.
6. In the `"properties":` section, the `"SATSPolicyName": "New_Anomaly_Policy_1"` parameter indicates the name of the linked Secure@Source policy. The `"SATSPolicyType": "SecurityPolicy"` parameter indicates that type of the linked policy is a security policy. The `"id": "3"` parameter indicates the unique identifier for the linked Secure@Source policy.

Example 2. Retrieve Secure@Source Policies Using Multiple Source IDs

Consider Axon policies that are linked to Secure@Source policies.

The following image shows a sample API request that contains information about multiple Axon policies that retrieve the related Secure@Source policies:



The REST API URL request contains the following information:

1. The `sourceIds[]=2` and `sourceIds[]=3` parameters indicate the identifiers of the Axon policies for which you want to retrieve the linked Secure@Source policies.
2. The `entityType=Axon\AppBundle\Entity\Policy` parameter indicates that the entity type is an Axon policy.
3. The `systemIdentifier=Axon` parameter indicates that the identifier for the source is Axon.
4. The `relationshipNames[]=AxonPolicyToSATSPolicy` parameter indicates the relationship label for the link between the Axon policies and Secure@Source policies.

The following image shows the sample response with the linked Secure@Source policies:


```
{
    "results": [
        {
            "objectIdentifier": "2",
            "systemIdentifier": "Axon",
            "entityType": "Axon\\AppBundle\\Entity\\Policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "4",
                    "systemIdentifier": "SATS",
                    "entityType": "policy",
                    "properties": {
                        "SATSPolicyName": "New_User_Activity_Policy",
                        "SATSPolicyType": "SecurityPolicy",
                        "id": "4"
                    }
                }
            ]
        },
        {
            "objectIdentifier": "3",
            "systemIdentifier": "Axon",
            "entityType": "Axon\\AppBundle\\Entity\\Policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "4",
                    "systemIdentifier": "SATS",
                    "entityType": "policy",
                    "properties": {
                        "SATSPolicyName": "GDPR_LOW_RISK",
                        "SATSPolicyType": "ClassificationPolicy",
                        "id": "4"
                    }
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.

2. The `"links"` section in the `"objectIdentifier": "2"` parameter shows the Secure@Source policy information linked to the Axon policy identifier "2."
3. The `"objectIdentifier": "4"` parameter indicates the unique identifier for the linked Secure@Source policy.
4. The `"systemIdentifier": "SATS"` parameter indicates that the identifier for the target is Secure@Source.
5. The `"entityType": "policy"` parameter indicates that the entity type is a Secure@Source policy.
6. In the `"properties":` section, the `"SATSPolicyName": "New_User_Activity_Policy"` parameter indicates the name of the linked Secure@Source policy. The `"SATSPolicyType": "SecurityPolicy"` parameter indicates that type of the linked policy is a security policy. The `"id": "4"` parameter indicates the unique identifier for the linked Secure@Source policy.
7. The `"links"` section in the `"objectIdentifier": "3"` parameter shows the Secure@Source policy information linked to the Axon policy identifier "3."
8. The `"objectIdentifier": "4"` parameter indicates the unique identifier for the linked Secure@Source policy.
9. The `"systemIdentifier": "SATS"` parameter indicates that the identifier for the target is Secure@Source.
10. The `"entityType": "policy"` parameter indicates that the entity type is a Secure@Source policy.
11. In the `"properties":` section, the `"SATSPolicyName": "GDPR_LOW_RISK"` parameter indicates that the name of the linked Secure@Source policy. The `"SATSPolicyType": "ClassificationPolicy"` parameter indicates that type of the linked policy is a classification policy. The `"id": "4"` parameter indicates the unique identifier for the linked Secure@Source policy.

Example 3. Retrieve Axon Policy Using a Single Target ID

Consider a Secure@Source policy that is linked to an Axon policy.
The following sample API request contains information about a single Secure@Source policy that retrieves the related Axon policy:

```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?
targetIds[]=3&entityType=policy&systemIdentifier=SATS
 &relationshipNames[]=AxonPolicyToSATSPolicy
```

The API URL request contains the following information:

1. The `targetIds[]=1` parameter indicates that the identifier for the Secure@Source policy is "3."
2. The `entityType=policy` parameter indicates that the entity type is a Secure@Source policy.
3. The `systemIdentifier=SATS` parameter indicates that the identifier for the target is Secure@Source.
4. The `relationshipNames[]=AxonPolicyToSATSPolicy` parameter indicates the relationship label for the link between the Axon policy and Secure@Source policy.

The following sample API response displays the linked Axon policy:

```
{
    "results": [
        {
            "objectIdentifier": "3",
            "systemIdentifier": "SATS",
            "entityType": "policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "1",
                    "systemIdentifier": "Axon",
                    "entityType": "Axon\\AppBundle\\Entity\\Policy",
                    "properties": {
```

```
                    "SATSPolicyName": "New_Anomaly_Policy_1",
                    "SATSPolicyType": "SecurityPolicy",
                    "id": "3"
                }
            }
        ]
    }
]
}
```

The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"objectIdentifier": "1"` parameter indicates the unique identifier for the linked Axon policy.
3. The `"systemIdentifier": "Axon"` parameter indicates that the identifier for the target is Axon.
4. The `"entityType": "Axon\\AppBundle\\Entity\\Policy"` parameter indicates that the entity type is an Axon policy.
5. The `"properties":` section contains the Secure@Source policy information, such as policy name, security policy type, and policy identifier.

Example 4. Retrieve Axon Policy Using Multiple Target IDs

Consider Secure@Source policies that are linked to Axon policies.

The following sample API request contains information about multiple Secure@Source policies that retrieve the related Axon policies:

```
http(s)://<Axon_host>:<port>/api/v1/referencelinks?
targetIds[]=3&targetIds[]=4&entityType=policy&systemIdentifier=SATS
&relationshipNames[]=AxonPolicyToSATSPolicy
```

The API URL request contains the following information:

1. The `targetIds[]=3` and `targetIds[]=4` parameters indicate the identifiers of the Secure@Source policies for which you want to retrieve the linked Axon policies.
2. The `entityType=policy` parameter indicates that the entity type is a Secure@Source policy.
3. The `systemIdentifier=SATS` parameter indicates that the identifier for the target is Secure@Source.
4. The `relationshipNames[]=AxonPolicyToSATSPolicy` parameter indicates the relationship label for the link between the Axon policies and Secure@Source policies.

The following sample API response displays the linked Axon policies:

```
{
    "results": [
        {
            "objectIdentifier": "3",
            "systemIdentifier": "SATS",
            "entityType": "policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "1",
                    "systemIdentifier": "Axon",
                    "entityType": "Axon\\AppBundle\\Entity\\Policy",
                    "properties": {
                        "SATSPolicyName": "New_Anomaly_Policy_1",
                        "SATSPolicyType": "SecurityPolicy",
                        "id": "3"
                    }
                }
```

```
            ]
        },
        {
            "objectIdentifier": "4",
            "systemIdentifier": "SATS",
            "entityType": "policy",
            "links": [
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "2",
                    "systemIdentifier": "Axon",
                    "entityType": "Axon\\AppBundle\\Entity\\Policy",
                    "properties": {
                        "SATSPolicyName": "New_User_Activity_Policy",
                        "SATSPolicyType": "SecurityPolicy",
                        "id": "4"
                    }
                },
                {
                    "relationshipName": "AxonPolicyToSATSPolicy",
                    "objectIdentifier": "3",
                    "systemIdentifier": "Axon",
                    "entityType": "Axon\\AppBundle\\Entity\\Policy",
                    "properties": {
                        "SATSPolicyName": "GDPR_LOW_RISK",
                        "SATSPolicyType": "ClassificationPolicy",
                        "id": "4"
                    }
                }
            ]
        }
    ]
}
```


The sample response includes the following output information:

1. The top-level key in the response is the `"results"` section. The results are an array of elements. Each entry in an array corresponds to a source or target identifier and shows all the link details within the `"links"` section.
2. The `"links"` section in the `"objectIdentifier": "3"` parameter shows the Axon policy information that is linked to the Secure@Source policy identifier "3."
3. The `"objectIdentifier": "1"` parameter indicates the unique identifier for the linked Axon policy.
4. The `"systemIdentifier": "Axon"` parameter indicates that the identifier for the target is Axon.
5. The `"entityType": "Axon\\AppBundle\\Entity\\Policy"` parameter indicates that the entity type is an Axon policy.
6. The `"properties":` section contains the Secure@Source policy information, such as the policy name, security policy type, and identifier.
7. The `"links"` section in the `"objectIdentifier": "4"` parameter shows that two Axon policies are linked to the Secure@Source policy identifier "4."
8. The `"objectIdentifier": "2"` parameter indicates the unique identifier for the Axon policy that is linked to the security policy with the identifier "4." The `"objectIdentifier": "3"` parameter indicates the unique identifier for the Axon policy that is linked to the classification policy with the identifier "4."
9. The `"systemIdentifier": "Axon"` parameter indicates that the identifier for the target is Axon.
10. The `"entityType": "Axon\\AppBundle\\Entity\\Policy"` parameter indicates that the entity type is an Axon policy.
11. The `"properties":` section contains the linked Secure@Source policy information, such as the policy name, policy type, and identifier.

Author

Vinita Arun Kumar

Acknowledgements

The author would like to acknowledge the Development and Quality Assurance teams for their technical assistance.