How-To Library

Informatica

Single Sign-On Using Microsoft Azure Active Directory in Axon Data Governance 6.2

© Copyright Informatica LLC 2013, 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

This document describes the steps to enable Single Sign-On (SSO) in a cloud or on-premises deployment of Axon Data Governance 6.2 using the Microsoft Azure Active Directory (Azure AD) identity management tool.

Supported Versions

- Informatica Axon 6.2

Table of Contents

Overview. 2
Create a New Application in Azure AD. 3
Configure Axon Details in Azure AD. 3
Generate SAML Metadata Assertion. 5
Configure Axon to Use Azure AD. 7
Clear the Axon Cache and Restart Services. 7


Overview

When you enable SSO, users with an account in the Identity Provider (IDP) of your organization can log in to the Axon web interface without entering a username and password. Axon uses Security Assertion Markup Language (SAML) 2.0 to authenticate users based on the IDP credentials.

Azure AD is an enterprise IDP tool. If your organization uses Azure AD, you can set up Axon as the service provider and enable SSO using SAML. SAML is an XML-based open-standard data format for authorization and authentication between the IDP and the service provider.

To enable SSO, you must configure Axon as an application in Azure AD. Axon supports any IDP that uses SAML 2.0 authentication.

The following image show the steps to configure SSO for Axon:

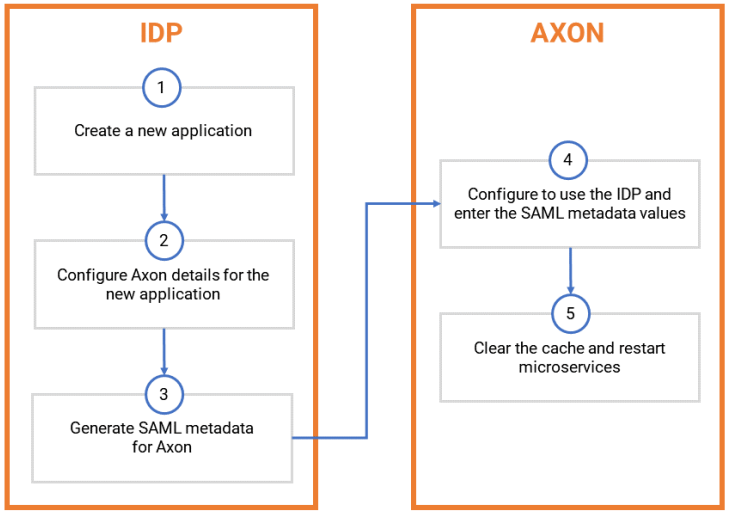

Create a New Application in Azure AD

Perform the following steps to set up Axon as an application in Okta:

1. Log in to Azure AD, and click **Azure Active Directory** on the left menu.
2. In the **Manage** section, click **Enterprise Application**.
3. Click the **New Application** icon, and select the **Non-gallery application** option. This option allows Azure AD to configure third-party applications, such as Axon.
4. In the **Name** field, enter `Axon`.


Configure Axon Details in Azure AD

To configure Axon as a SAML application, perform the following tasks in Azure AD:

1. In the **Manage** section of the left menu, select **Single sign-on**.
2. In the right pane, enter the following values:

Field	Value
Single Sign-on Mode	`SAML-based Sign-on`
Identifier	`https://<Axon_URL>:<port_number>/saml/metadata`
Reply URL	`https://<Axon_URL>:<port_number>/saml/acs`
Show advanced URL settings	Check box selected
Sign on URL	`https://<Axon_URL>:<port_number>/saml/acs`

The following image shows sample configuration values for Axon:

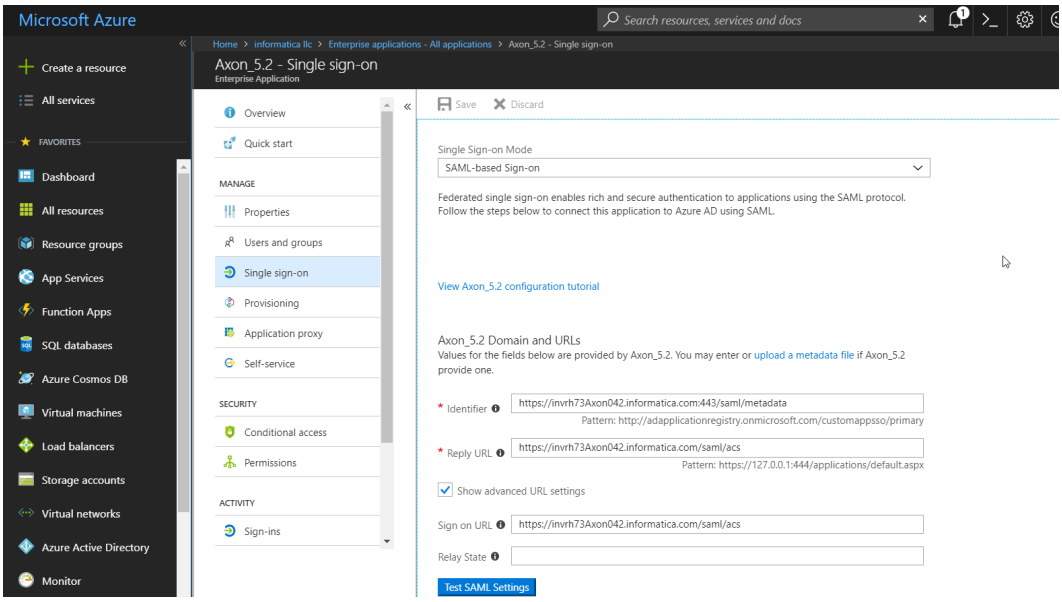

3. Scroll down to the **User Attributes** section of the page and enter the following values:

Field	Value
User Identifier	`user.mail`
View and edit all other user attributes	Check box selected

4. Click **Add attribute** to add the attributes that must be included in the SAML assertion. Add the following mandatory attributes and select the appropriate value for each attribute:
   - orgunit
   - firstName
   - lastName
   - orgunitTitle
   - email
5. You can also set some optional attributes to include in the SAML assertion. Click **Add attribute** to add the following optional attributes:
   - statusID: If you do not select the **statusID** property, or if you select the **statusID** property and do not assign a default value, Axon assigns the `Active` value to all the users.
   - orgunitDescription: If you do not select the **orgunitDescription** property, or if you select the **orgunitDescription** property and do not assign a default value, Axon assigns a blank value to all organization units.
   - profile: Assign a profile for the user in Axon. If you do not select the **profile** property, or if you select the **profile** property and do not assign a default value, Axon assigns the WebUser profile to the users.

6. Configure the following signing options:


Field	Value
Show advanced certificate signing settings	Check box selected
Signing Option	`Sign SAML assertion`
Signing Algorithm	`SHA-256`
Notification Email	Azure AD or Axon administrator email address

Generate SAML Metadata Assertion

After you configure Axon in Azure AD, perform the following steps in Azure AD to obtain the SAML metadata assertion:

1. Scroll to the end of the page, and click the **Configure <Name>** link.
2. In the **Configure Sign-on** page, verify the overview text.

The following image shows a sample overview text and the SAML metadata values:

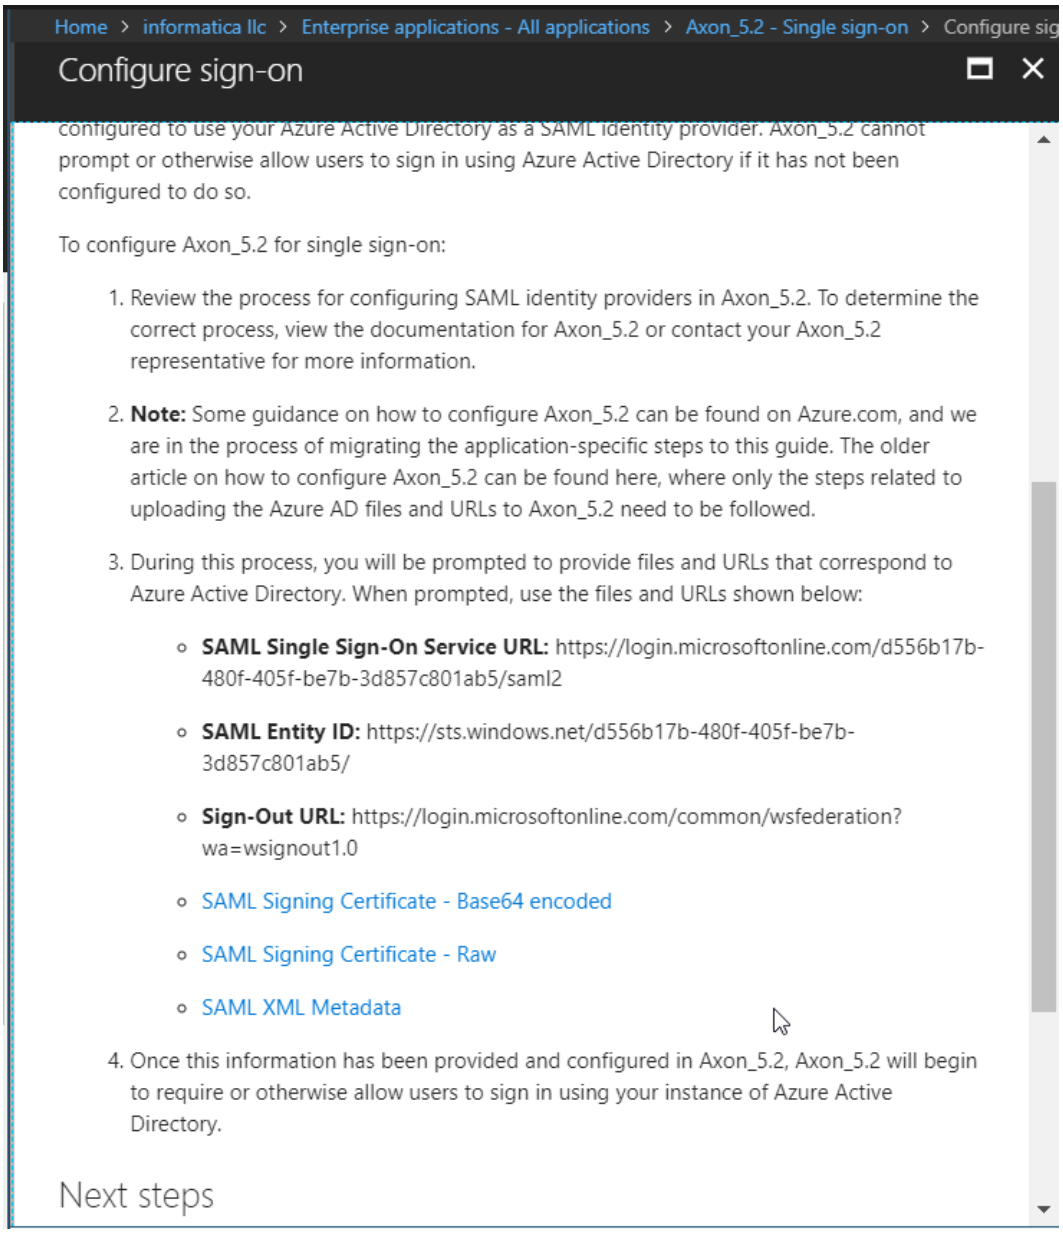

3. Step 3 of the overview text mentions the SAML values that you need to configure in Axon. Record the following values:
   - SAML Single Sign-On Service URL
   - SAML Entity ID
4. Click **SAML XML Metadata**. Azure AD generates a SAML metadata XML file.
5. Open the SAML metadata XML file and record the string value in the `<X509Certificate>` tag. This value is the X.509 Certificate.

You must enter the values of the Service URL, Entity ID, and X.509 Certificate when you configure Axon.

Note: The SAML metadata is based on the configuration parameters that you have entered in Azure AD. If you modify any of the parameters in Azure AD, you must perform the above steps again to get the new SAML metadata values.

Configure Axon to Use Azure AD

After you create Axon as an application in Azure AD, you must configure Axon to authorize and authenticate the data that is exchanged with Azure AD. You must have the Super Admin profile to perform this task.

Perform the following configuration steps in Axon to use SSO:

1. From the Axon toolbar, click the **Admin Panel** menu item under your user name.
2. In the menu on the left, under the **Customize & Configure** category, click **Configure Axon**.
3. In the Group dropdown, select **SAML Configuratio**n.
4. Click **Edit**.
5. Enter the following values:

Field	Value
SSO URL	`http(s)://<Axon_URL>/saml/login`
IDP Endpoint	SAML Single Sign-On Service URL value that you recorded.
IDP Entity ID	SAML Entity ID value that you recorded.
IDP X.509 Certificate	X.509 Certificate that you recorded. **Note:** Enter this value in a single line without line breaks.
Service Provider Binding	Change the `urn:oasis:names:tc:SAML:2.0:bindings:HTTP-Redirect` value to `urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST`.
Encrypt Outgoing Name ID	Check box cleared
Encrypt Incoming Name ID	Check box cleared

6. Click **Save**.

Clear the Axon Cache and Restart Services

After you have configured Axon in the IDP and configured the Axon SAML files, you must update the Axon cache with the new configuration values.

1. In the Linux environment, run the following command to clear the contents of the cache directory:

```
rm -rf <INSTALLATION_DIRECTORY>/axonhome/axon/app/cache/*
```

2. Run the following commands to restart the Memcached and HTTPD services:

```
<INSTALLATION_DIR>/axonhome/third-party-app/scripts/memcached restart
service httpd restart
```

Author

Abhilash Scariya

Acknowledgements

Pradeep G.N.