Informatica® MDM SaaS
April 2026

# MDM 360 for Retail

Informatica MDM SaaS MDM 360 for Retail
April 2026

© Copyright Informatica LLC 2024, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-04-11

# Table of Contents


Preface. . . . 5
Informatica Resources. . . . 5
Informatica Documentation. . . . 5
IDMC web site. . . . 5
Intelligent Data Management Cloud Communities. . . . 5
IDMC Marketplace. . . . 5
Informatica Knowledge Base. . . . 5
IDMC Trust Center. . . . 6
Informatica Global Customer Support. . . . 6

**Chapter 1: Introducing MDM 360 for Retail. . . . 7**

Guidelines for importing assets. . . . 8
Guidelines for migrating assets. . . . 8
Prerequisites to deploy the extension. . . . 8

**Chapter 2: Predefined MDM 360 for Retail assets. . . . 9**

Data model attributes. . . . 9
Person business entity model. . . . 10
Organization business entity data model . . . 36
Household business entity data model . . . 50
Product business entity. . . . 54
Item business entity. . . . 56
Category business entity model. . . . 60
Supplier business entity model. . . . 61
Emission business entity model. . . . 91
Location business entity model. . . . 93
Batch jobs. . . . 103
Batch jobs of the Category business entity for Global Product Classification. . . . 104
Batch jobs of the Category business entity for Google product category. . . . 105
Batch jobs for Customer 360 SaaS and Google BigQuery integration. . . . 107
Batch jobs for Product 360 SaaS and Google BigQuery integration. . . . 114
Batch jobs for Supplier 360 SaaS and Google BigQuery integration. . . . 117
Batch jobs for Multidomain MDM SaaS and Google BigQuery integration. . . . 121
Pages. . . . 122
Search result layout components. . . . 124
Relationships. . . . 125
Reports. . . . 127
Data quality rule associations. . . . 128
DDL Scripts for Google BigQuery. . . . 130

## Chapter 3: MDM 360 for Retail and external data integration. . . . . 131

Product 360 SaaS and Global Product Classification integration. . . . . 131

Ingress data. . . . . 131

Product 360 and Google product category integration. . . . . 132

Ingress data. . . . . 132

MDM SaaS and Google BigQuery integration. . . . . 132

Data flow to publish master data to Google BigQuery. . . . . 132

MDM SaaS master data. . . . . 133

Staging schema. . . . . 133

Analytical schema. . . . . 134

## Chapter 4: Deploying MDM 360 for Retail. . . . . 136

Downloading and extracting the MDM 360 for Retail package. . . . . 136

Importing data model, pages, and search layout components. . . . . 137

Adding predefined pages and components. . . . . 138

Importing reference data assets. . . . . 139

Prerequisites. . . . . 139

Importing the reference data. . . . . 140

## Chapter 5: Configuring MDM 360 for Retail for external data integration. . . . 141

Setting up and loading Global Product Classification for integration with MDM 360 for Retail. . . . 141

Setting up MDM 360 for Retail for integration with Global Product Classification. . . . . 141

Loading Global Product Classification data file for integration with MDM 360 for Retail . . . . 143

Setting up and loading Google product category for integration with MDM 360 for Retail. . . . . 143

Setting up MDM 360 for Retail for integration with Google product category. . . . . 144

Loading Google product category data file for integration with MDM 360 for Retail . . . . . 145

Configuring MDM 360 for Retail to integrate with Google BigQuery . . . . . 146

Creating datasets. . . . . 146

Running the Google BigQuery scripts. . . . . 147

Importing the Cloud Data Integration assets for staging schema. . . . . 147

Importing the job assets. . . . . 147

Setting up the Secure Agent parameters. . . . . 148

Importing parameter files. . . . . 148

Configuring Business 360 FEP connector. . . . . 148

Running the jobs and taskflows. . . . . 149

## Index. . . . . 150

# Preface

Follow the instructions in *MDM 360 for Retail* to deploy the MDM 360 for Retail extension.

# Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

## Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

## IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

## Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

## IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

## Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

## IDMC Trust Center

The IDMC Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the IDMC Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Data Management Cloud Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all IDMC components. Subscribing to all components is the best way to be certain you never miss an update.

## Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

# Introducing MDM 360 for Retail

An industry 360 application is a ready-to-use package that you can use as a template for implementing MDM SaaS. With an industry 360 application, you can customize solutions to meet specific requirements and business initiatives of your industry. Use an industry 360 application to reduce implementation time, enhance data quality, and achieve faster business outcomes.

Use MDM 360 for Retail as a template to get started with MDM SaaS. You can use this industry 360 application with Customer 360 SaaS, Product 360 SaaS, Supplier 360 SaaS, and Multidomain MDM SaaS. Based on your requirements, you can choose to expand to all business applications later. You can use the industry 360 application to standardize, consolidate, and relate your retail business data across customer, product, supplier, and location domains.

Leverage MDM 360 for Retail to integrate Global Product Classification (GPC) and Google product category with MDM SaaS. The industry 360 application also includes a sample Google BigQuery analytical schema and predefined Cloud Data Integration assets to populate data into the Google BigQuery staging store.

Use the industry 360 application to achieve the following business goals for retail industry:

**Enhance personalized customer experiences**

Use comprehensive customer data to assess their loyalty and lifetime value to your business. You can accurately create customer segments to customize services, promotions, and interactions to align with your specific customer preferences.

**Streamline management of dynamic product portfolios**

Update product information and manage dynamic product portfolios. This streamlined approach boosts your operational efficiency and speeds up the transition from the product creation to marketing.

**Optimize supply chain operations**

Improve the visibility of your supplier networks, expenditure, and performance, and analyze risks and ratings to strengthen your supply chain resilience. You can streamline your supplier and location data management to enhance supply chain efficiency and reduce costs.

**Ensure ESG data compliance**

Assess and identify suppliers with high ESG risks to enforce compliance and boost accountability and transparency in your supply chain. You can manage supplier emissions and greenhouse gas (GHG) inventory data to evaluate emission-related risks based on the Corporate Value Chain (Scope 3) Standard.

# Guidelines for importing assets

Consider the following guidelines before you import the industry 360 application assets:

- Set up the prerequisite MDM SaaS business application.
- Import the industry 360 application assets before you customize the business entities. You can safely import multiple industry 360 application assets that use different business entities and in different MDM SaaS business applications. When you import the assets in an environment that already has an industry 360 application with the same business entities, the import fails.
- After you import the assets, consider them as your custom assets.
- Once you deploy an industry 360 application, upgrading to a newer version of the industry 360 application isn't supported.

# Guidelines for migrating assets

Consider the following guidelines before you migrate the industry 360 application assets to another environment:

- To migrate the industry 360 application assets to higher environments, such as QA and production, export the assets from the development environment. Then, import them into the QA and production environments. For more information about migrating assets, see *Migrating projects and assets*.
- Don't import the industry 360 application assets again into a higher environment.

# Prerequisites to deploy the extension

Before you deploy the MDM 360 for Retail, perform the following prerequisites:

- Ensure that you have the license for the Integration Components for Business 360, MDM SaaS edition, and Google BigQuery V2 Connector.
  Ensure that you have the licenses required to manage connections, external data, and service rights.

  **Note:** The use of the extension doesn't confer any additional license or entitlement to license consumption beyond the terms specified in the applicable licensing agreements.
- Ensure that the version of the extension bundle matches the current MDM SaaS version where you import the extension assets.

  If the version of the extension bundle doesn't match the current MDM SaaS version, contact Informatica Global Customer Support to use the current version of the extension.

  To verify the MDM SaaS version, in Business 360 Console, click **About** in the IDMC Help menu and verify the build version.

  To verify the version of the extension, navigate to the readme.txt file in the extracted extension package.

CHAPTER 2

# Predefined MDM 360 for Retail assets

MDM 360 for Retail is available as a package for installation on request.

The package includes the following predefined assets:

- Business entities
- Reports
- Batch jobs
- Pages
- Search result layout components
- Relationships
- Reference data assets
- Data quality rule associations
- Cloud Data Integration assets
- Standard product classifications
- Data definition language (DDL) scripts to create Google BigQuery staging schema, Google BigQuery analytical schema, and sample Views.
- Secure Agent group parameter files


**Note:** When you import the MDM 360 for Retail assets, the existing MDM SaaS assets and your customizations are overwritten. Ensure that you import the assets of the extension before you customize the MDM SaaS data model.

## Data model attributes

The data model attributes include the data dictionary of metadata, such as business entities, the fields that the business entities contain, and field descriptions, to understand the data model for MDM 360 for Retail.

The data model includes business entities, such as Person, Organization, Household, Product, Item, Category, Supplier, Emission, and Location.

The following image shows the MDM 360 for Retail business entities and their relationships:

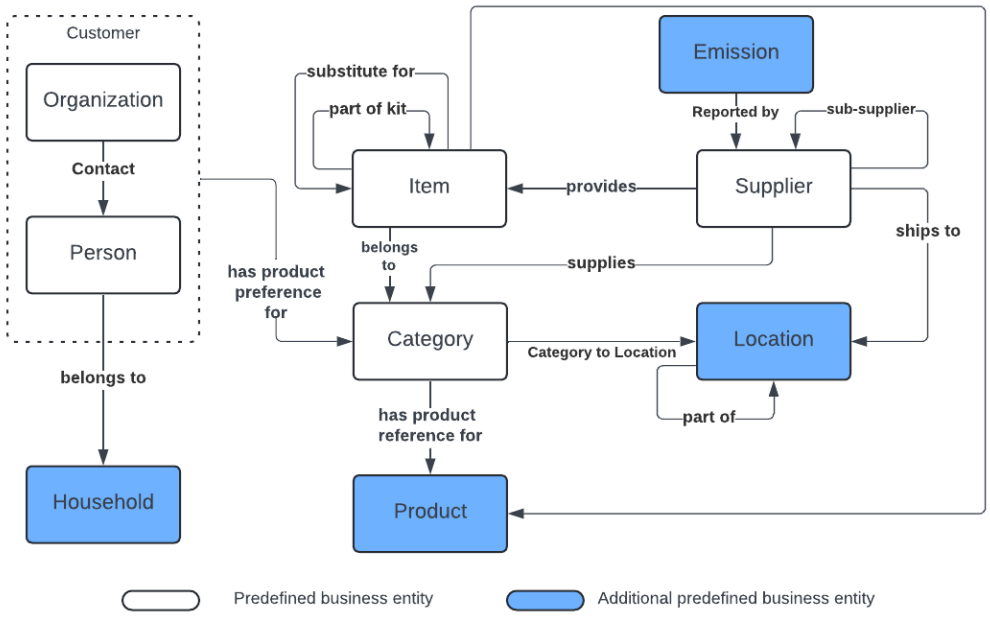


# Person business entity model

Person business entity stores information about people. This business entity contains some basic fields and some field groups.

## General fields of the Person business entity

The general fields store basic information about a person, such as name and date of birth.

The following table lists the general fields that the Person business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| First Name | firstName | Text | 255 | NA | First name of the person. |
| Middle Name | middleName | Text | 255 | NA | Middle name of the person. |
| Last Name | lastName | Text | 255 | NA | Last name of the person. |
| Full Name | fullName | Text | 255 | NA | Full name of the person. |
| Title | title | Text | 255 | NA | Title associated with the person's name. |
| Birth Place | birthPlace | Text | 255 | NA | Place of birth of the person. |
| Birth Date | birthDate | Date Time | NA | NA | Date of birth of the person. |
| Gender | gender | Lookup | NA | Gender | Gender of the person. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Image | imageUrl | Text | 255 | NA | URL of the image of the person. |
| Prefix Name | prefixName | Lookup | NA | PrefixName | Prefix for the name of the person. For example, Dr, Mr, or Mrs. |
| Suffix Name | suffixName | Lookup | NA | SuffixName | Suffix name of the person. For example, Sr, Jr, II, or III. |
| Designation | designation | Text | 255 | NA | Designation or position of the person. |
| Marital Status | maritalStatus | Lookup | NA | MaritalStatus | Marital status of the person. For example, single, married, or divorced. |
| Is Customer | X_infa360rtl_isCustomer | Boolean | NA | NA | Indicates whether the person is a customer. |
| Is Contact | X_infa360rtl_isContact | Boolean | NA | NA | Indicates whether the person is a contact. |

## Address field group of the Person business entity

The Address field group stores the postal addresses of a person. Postal address is a physical address associated with the person. A person can have multiple addresses.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | X_infa360rtl_addressLine1 | Text | 200 | NA | Line 1 of an address. |
| Address Line 2 | X_infa360rtl_addressLine2 | Text | 200 | NA | Line 2 of an address. |
| Address Line 3 | X_infa360rtl_addressLine3 | Text | 200 | NA | Line 3 of an address. |
| Address Status | X_infa360rtl_addressStatus | Lookup | NA | AddressStatus | Status of an address, such as active, current, old address, or changed. |
| Address Type | X_infa360rtl_addressType | Lookup | NA | AddressType | Type of a postal address, such as home, office, shipping, or mailing. |
| City | X_infa360rtl_city | Text | 50 | NA | City of a postal address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Coordinate System | X_infa360rtl_coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of an address. |
| Country | X_infa360rtl_country | Lookup | NA | Country | Country of a postal address. |
| County | X_infa360rtl_county | Text | 50 | NA | County of a postal address. |
| Default Indicator | X_infa360rtl_defaultIndicator | Boolean | NA | NA | Indicates whether an address is the default address. |
| End Date | X_infa360rtl_effectiveEndDate | Date and Time | NA | NA | Expiry date of an address. |
| Enriched Indicator | X_infa360rtl_enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of an address, such as, error, valid, or not validated. |
| Latitude | X_infa360rtl_latitude | Text | 20 | NA | Latitude for an address. |
| Location Coordinate Desc | X_infa360rtl_locationCoordinateDesc | Text | 50 | NA | Location of an address using coordinate system. |
| Longitude | X_infa360rtl_longitude | Text | 20 | NA | Longitude for an address. |
| Postal Code | X_infa360rtl_postalCode | Text | 10 | NA | Postal code of an address. |
| Postal Code Extension | X_infa360rtl_postalCodeExtension | Text | 10 | NA | Postal code extension of an address. |
| Start Date | X_infa360rtl_effectiveStartDate | Date and Time | NA | NA | Start date from when an address is active. |
| State | X_infa360rtl_state | Dependant Lookup | NA | State | State of a postal address. |
| Usage Type | X_infa360rtl_usageType | Lookup | NA | AddressUsage Type | Usage type of an address, such as business or personal. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Verification Message | X_infa360rtl_statusMessage | Text | 255 | NA | Validation message that an address verification service returns. |
| Verification Status Code | X_infa360rtl_statusCode | Text | 10 | NA | Validation status that an address verification service returns. |

## Address Consent field group of the Person business entity

The Address Consent field group stores information about the address consent details given by customers to an organization, such as the effective date, retention date, do not share status, and the lawful basis for processing their address.

The following table lists the fields that the Address consent field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360rtl_addressConsentDescription | Text | 255 | NA | Description of the address consent wherein organizations inform customers about why they need to collect their addresses, how they will be used, and with whom they may be shared. |
| Do Not Share Flag | X_infa360rtl_isSharableFlagAddress | Boolean | NA | NA | Indicates whether a person prefers not to share their address for third-party communication. |
| Effective Date | X_infa360rtl_addressConsentEffectiveDate | Date and Time | NA | NA | Date from which the address consent is valid. |
| Lawful Basis of Processing | X_infa360rtl_addresslawfulBasisOfProcessing | Lookup | NA | infa360rtl_LawfulBasis | Legal grounds under which personal data can be processed by an organization. |
| Object to Processing | X_infa360rtl_addressConsentObjecttoProcessing | Text | 255 | NA | Text describing the objection to processing the address. |
| Opt in | X_infa360rtl_addressConsentConsentFlag | Boolean | NA | NA | Indicates whether a person has opted in to receive communication. |
| Purpose | X_infa360rtl_addressPurpose | Dependant Lookup | NA | infa360rtl_PersonConsentPurpose | Purpose of the address consent. |
| Retention Date | X_infa360rtl_addressConsentRetentionDate | Date and Time | NA | NA | Date until which the address consent is retained. |

## Alternate Names field group of Person business entity

The Alternate Names field group stores the details of alternate names. Alternate names can be alias, previous name, doing business as and maiden name.

The following table lists the fields that the Alternate Names field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name Type | alternateNameType | Lookup | NA | AlternateNameType | Type of the alternate name. |
| Alternate Name | AlternateName | Text | 255 | NA | Alternate name of the person such as alias, previous name and maiden name. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the alternate name is valid. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the alternate name. |

## Behavioral Segment field group of the Person business entity

The Behavioral Segment field group stores the behavioral details of a person.

The following table lists the fields that the Behavioral Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_behavioralType | Lookup | NA | behavioralType | Behavioral segment type of a person, such as, brand, channel, or occasion. |
| Value | X_infa360rtl_behavioralValue | Lookup | NA | behavioralValue | A behavioral segment type can have segment values, such as, Adobe, Apple, or Aribnb. If brand is the segment type, then Adobe, Apple, or Airbnb are segment values. |
| Effective Start Date | X_infa360rtl_behavioralEffectiveStartDate | Date | NA | NA | Start date from which the value entered for a behavioral segment is valid. |
| Effective End Date | X_infa360rtl_behavioralEffectiveEndDate | Date | NA | NA | End date on which the value entered for a behavioral segment expires. |

## Citizenship field group of Person business entity

The Citizenship field group stores the details of citizenship of a person, such as country and status of citizenship.

The following table lists the fields that the Citizenship field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Citizen of Country | citizenOfCountry | Lookup | NA | Country | Country to which the person belongs. |
| Citizenship Status | citizenshipStatus | Text | 255 | NA | Status of the citizenship. |
| Supporting Document Name | supportingDocumentName | Text | 255 | NA | Name of the supporting document that proves the citizenship. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the citizenship is valid. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of citizenship. |

## Customer Asset field group of the Person business entity

The Customer Asset field group stores the information about customer assets, such as, asset manufacturer, model, and type.

The following table lists the fields that the Customer Asset field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360rtl_description | Text | 4000 | NA | Description of an asset owned by a customer. |
| Make | X_infa360rtl_make | Text | 255 | NA | Manufacturer of an asset owned by a customer. |
| Model | X_infa360rtl_model | Text | 255 | NA | Model of an asset owned by a customer. |
| Feature Style | X_infa360rtl_featureStyle | Text | 255 | NA | Type of an asset owned by a customer. |
| Asset Color | X_infa360rtl_featureColor | Text | 255 | NA | Color of an asset owned by a customer. |
| Owned Since Date | X_infa360rtl_ownedSinceDate | Date | NA | NA | Date from which an asset is owned by a customer. |
| Verified Date | X_infa360rtl_verifiedDate | Date | NA | NA | Date on which an asset was verified as owned by a customer. |

## Customer Occasion field group of the Person business entity

The Customer Occasion field group stores the information about a customer occasion, such as occasion type and date.

The following table lists the fields that the Customer Occasion field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360in_eventType | Lookup | NA | infa360rtl_EventType | Type of an occasion related to the customer. |
| Date | X_infa360in_eventDate | Date | NA | NA | Date on which a customer occasion occurs. |
| Anticipated Indicator | X_infa360in_anticipatedIndicator | Boolean | NA | NA | Indicates whether a customer occasion is expected to occur. |

## Documents field group of Person business entity

The Documents field group stores the document details, such as bank statement, salary slip, qualification certificate, identity proof, and residence proof.

The following table lists the fields that the Documents field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Document Type | documentType | Lookup | NA | DocumentType | Type of document. |
| Document Name | documentName | Text | 255 | NA | Name of the document. |
| Document Link | documentLink | Text | 255 | NA | URL to access the document. |
| File Name | fileName | Text | 255 | NA | Name of the file. |
| Valid From | validFrom | Date Time | NA | NA | Date from when the document is valid. |
| Valid To | validTo | Date Time | NA | NA | Date until when the document is valid. |

## Demographic Segment field group of the Person business entity

The Demographic Segment field group stores the demographic details of a person.

The following table lists the fields that the Demographic Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_demographicType | Lookup | NA | DemographicType | Demographic segment type of a person, such as, income, age, location, or spending pattern. |
| Value | X_infa360rtl_demographicValue | Lookup | NA | DemographicValue | A demographic segment type can have segment values, such as, lower middle class, upper high class, or upper middle class. If income is the segment type, then lower middle class, upper high class, and upper middle class are segment values. |
| Effective Start Date | X_infa360rtl_demographicEffectiveStartDate | Date | NA | NA | Start date from which the value entered for a demographic segment is valid. |
| Effective End Date | X_infa360rtl_demographicEffectiveEndDate | Date | NA | NA | End date on which the value entered for a demographic segment expires. |

## Education field group of Person business entity

The Education field group stores the education details of a person. The education details can include the name of the institution where a person graduated, address of the institution, and year of passing.

The following table lists the fields that the Education field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Qualification Type | qualificationType | Lookup | NA | QualificationType | Type of qualification, such as illiterate, certification, diploma, bachelor, master, or doctoral. |
| Qualification Status | qualificationStatus | Lookup | NA | QualificationStatus | Status of the qualification. |
| Qualification Name | qualificationName | Text | 255 | NA | Name of the qualification. |
| Institution Name | institutionName | Text | 255 | NA | Name of the institution. |
| Student Number | studentNumber | Text | 255 | NA | Student number in the institution. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the qualification. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the qualification. |
| Address Line 1 | addressLine1 | Text | 255 | NA | Line 1 of the address of the educational institution. |
| Address Line 2 | addressLine2 | Text | 255 | NA | Line 2 of the address of the educational institution. |
| City | city | Text | 255 | NA | City in which the institution is located. |
| Postal Code | postalCode | Text | 255 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 255 | NA | Postal code extension of the address. |
| State | state | Lookup | NA | State | State in which the institution is located. |
| Country | country | Lookup | NA | Country | Country in which the institution is located. |

## Email field group of the Person business entity

The Email field group stores information about an electronic address, such as email address, status, and usage type.

The following table lists the fields that the Email field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | X_infa360rtl_defaultIndicator | Boolean | NA | NA | Indicates whether an email address is primary or default. |
| Effective End Date | X_infa360rtl_effectiveEndDate | Date Time | NA | NA | End date for an email address. |
| Effective Start Date | X_infa360rtl_effectiveStartDate | Date Time | NA | NA | Start date for an electronic address. |
| Electronic Address | X_infa360rtl_electronicAddress | Text | 255 | NA | Electronic address of a person. |
| Electronic Address Status | X_infa360rtl_electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of an email address, such as, active, blocked, or not in use. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Enriched Indicator | X_infa360rtl_enrichedIndicator | Boolean | NA | NA | Indicates whether an address verification service verified the address. |
| Hygiene Status | X_infa360rtl_hygieneStatus | Text | 255 | NA | Hygiene status for an electronic address, such as, safe to send, invalid, or spam. |
| Net Protect Code | X_infa360rtl_netProtectCode | Text | 255 | NA | Net protect codes identify which service or appliance is monitoring a given network. |
| Usage Type | X_infa360rtl_usageType | Lookup | NA | ElectronicAddressUsageType | Usage type indicates the intended use or purpose of an electronic address, such as, business, work, or personal. |
| Validation Message | X_infa360rtl_validateMessage | Text | 255 | NA | Message that an address validation service generates to indicate how valid and trusted an address is. |
| Validation Status | X_infa360rtl_validationStatusCode | Text | 255 | NA | Validation status of an electronic address. |

## Email Consent field group of the Person business entity

The Email Consent field group stores information about the email consent details given by customers to an organization, such as the effective date, retention date, do not share status, and the lawful basis for processing their email address.

The following table lists the fields that the Email consent field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360rtl_emailConsentDescription | Text | 255 | NA | Description of the email consent wherein organizations inform customers about why they need to collect their email address, how they will be used, and with whom they may be shared. |
| Do Not Share Flag | X_infa360rtl_isSharableFlagEmail | Boolean | NA | NA | Indicates whether a person prefers not to share their email address for third-party communication. |
| Effective Date | X_infa360rtl_emailConsentEffectiveDate | Date and Time | NA | NA | Date from which the email consent is valid. |
| Lawful Basis of Processing | X_infa360rtl_emaillawfulBasisOfProcessing | Lookup | NA | infa360rtl_LawfulBasis | Legal grounds under which personal data can be processed by an organization. |
| Object to Processing | X_infa360rtl_emailConsentObjecttoProcessing | Text | 255 | NA | Text describing the objection to processing the email address. |
| Opt in | X_infa360rtl_emailConsentConsentFlag | Boolean | NA | NA | Indicates whether a person has opted in to receive communication. |
| Purpose | X_infa360rtl_emailPurpose | Dependant Lookup | NA | infa360rtl_PersonConsentPurpose | Purpose of the email consent. |
| Retention Date | X_infa360rtl_emailConsentRetentionDate | Date and Time | NA | NA | Date until which the email consent is retained. |

## Employment field group of Person business entity

The Employment field group stores the employment details, such as the employer name, the type of employment, and the status of employment.

The following table lists the fields that the Employment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Employer Name | employerName | Text | 255 | NA | Name of the employer. |
| Employment Type | employmentType | Lookup | NA | EmploymentType | Type of employment, such as permanent, contract, and part-time. |
| Employment Status | employmentStatus | Lookup | NA | EmploymentStatus | Status of employment, such as active, inactive, resigned, and terminated. |
| Designation | designation | Text | 255 | NA | Designation of the person. |
| Line of Business | lineOfBusiness | Text | 255 | NA | Line of business, such as retail or mortgage. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of employment. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of employment. |
| Location | location | Text | 255 | NA | Location of the employer. |

## Financial field group of Person business entity

The Financial field group stores financial information of a person.

The following table lists the fields that the Financial field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Amount | amount | Double | NA | PersonStatusValue | Total value of the finance. |
| Currency | currency | Lookup | NA | Currency | Currency in which the financial information is provided. |
| Finance Info Type | financeInfoType | Lookup | NA | FinanceInfoType | Type of financial information. For example, equity, annual income, and debt. |
| Financial Reliability | financeReliability | Lookup | NA | FinanceReliability | Reliability of the financial data. For example, actual or estimate. |
| Time Period | timePeriod | Text | 255 | NA | Finance period for which the data is collected. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Time Period Type | timePeriodType | Lookup | NA | TimePeriodType | Type of the finance period. For example, quarterly or yearly. |
| Unit | unit | Lookup | NA | FinancialUnit | Unit of the amount. For example, thousands, millions, or billions. |

## Geographic Segment field group of the Person business entity

The Geographic Segment field group stores the geographic details of a person.

The following table lists the fields that the Geographic Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_GeographicType | Lookup | NA | infa360rtl_GeographicSegmentType | Geographic segment type of a person, such as, population density, metropolitan statistical area, or climate and season. |
| Value | X_infa360rtl_GeographicValue | Lookup | NA | infa360rtl_GeographicSegmentValue | A geographic segment type can have segment values, such as, urban, suburban, or rural. If population density is the segment type, then lower middle class, urban, suburban, or rural are segment values. |
| Effective Start Date | X_infa360rtl_GeographicEffectiveStartDate | Date | NA | NA | Start date from which the value entered for a Geographic segment is valid. |
| Effective End Date | X_infa360rtl_GeographicEffectiveEndDate | Date | NA | NA | End date on which the value entered for a Geographic segment expires. |

## Health Segment field group of the Person business entity

The Health Segment field group stores the health details of a person.

The following table lists the fields that the Health Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_healthType | Lookup | NA | infa360rtl_HealthSegmentType | Health segment type of a person, such as dietary habit or disability impairment. |
| Value | X_infa360rtl_healthValue | Lookup | NA | infa360rtl_HealthSegmentValue | A health segment type can have segment values, such as, limit fried foods, eat breakfast, or decrease salt intake. If dietary habit is the segment type, then limit fried foods, eat breakfast, or decrease salt intake are segment values. |
| Effective Start Date | X_infa360rtl_healthEffectiveStartDate | Date | NA | NA | Start date from which the value entered for a health segment is valid. |
| Effective End Date | X_infa360rtl_healthEffectiveEndDate | Date | NA | NA | End date on which the value entered for a health segment expires. |

## Identifier field group of Person business entity

The Identifier field group stores the alternate identifier details of a person, such as Social Security number, driver's license number, or passport number. Alternate identifiers are known identifiers that uniquely identify a person.

The following table lists the fields that the Identifier field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Identifier Type | alternateIdentifierType | Lookup | NA | AlternateIdType | Type of alternate identifier. |
| Alternate Identifier Value | alternateIdentifierValue | Text | 255 | NA | Value of alternate identifier, such as driver's license number, or passport number. |
| Issuing Authority | issuingAuthority | Lookup | NA | IssuingAuthority | Authority that has issued the identifier to the person. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | identifierStatus | Lookup | NA | IdentifierStatus | Status of the alternate identifier. For example, effective, disqualified, expired, and temporary. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Issued date of the identifier. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the identifier. |

## Insurance field group of Person business entity

The Insurance field group stores the insurance details, such as the name of the insurance provider, the policy number, the insurance type, and the validity.

The following table lists the fields that the Insurance field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Policy Number | policyNumber | Text | 255 | NA | Policy number of the insurance. |
| Insurance Value | insuranceValue | Double | NA | NA | Amount insured. |
| Unit | unit | Lookup | NA | FinancialUnit | Unit for the amount. |
| Currency | currency | Lookup | NA | Currency | Currency in which the person is insured. |
| Insurance Provider | insuranceProvider | Text | 255 | NA | Company that provides the insurance. |
| Insurance Type | insuranceType | Lookup | NA | InsuranceType | Type of insurance, such as life, health and accident, professional indemnity, or medical malpractice. |
| Insurance Sub Type | insuranceSubType | Lookup | NA | InsuranceSubType | Insurance subtype. For example, if the insurance type is life, the subtypes might be non-participating, participating, indeterminate premium, economic, limited pay, or single premium. |
| Insurance Status | insuranceStatus | Lookup | NA | InsuranceStatus | Status of the insurance. For example, active or expired. |
| Insurance Holder | insuranceHolder | Text | 255 | NA | Name of the insurance holder. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the insurance. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the insurance. |

## Lifestyle field group of Person business entity

The Lifestyle field group stores the details related to the lifestyle of a person. Lifestyle details give additional information about the person, such as behavior and interests. Lifestyle information includes travel style, hobbies, and entertainment preferences.

The following table lists the fields that the Lifestyle field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Lifestyle Type | lifestyleType | Lookup | NA | LifestyleType | Type of lifestyle, such as classical music listener, decision maker or movie maniac. |
| Lifestyle Value | lifestyleValue | Text | 255 | NA | Value for a specified lifestyle. |

## Loyalty field group of Person business entity

The Loyalty field group stores the loyalty account details of a person.

The following table lists the fields that the Loyalty field group entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Type | accountType | Lookup | NA | LoyaltyAccountType | Type of loyalty accounts. For example, elite, silver, gold, or privileged. |
| Account Number | AccountNumber | Text | 255 | NA | Loyalty account number. |
| Redemption Preferences | redemptionPreferences | Lookup | NA | RedemptionPreferences | Preference for the redemption of loyalty points. For example, cash back or credit. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the loyalty account. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the loyalty account. |
| Account Status | accountStatus | Lookup | NA | LoyaltyAccountStatus | Status of the account. For example, active, inactive, or dormant. |

## Membership Account field group of the Person business entity

The Membership Account field group stores the details of a person's membership, such as account type, reward program, and program level.

The following table describes the fields that the Membership Account field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account | X_infa360rtl_PersonAccount | Text | 255 | NA | Details of a membership account. |
| Account Type | X_infa360rtl_PersonCustomerAccountType | Lookup | NA | infa360rtl_PersonCustomerAccountType | Type of a membership account. |
| Effective Date | X_infa360rtl_PersonEffectivedate | Date | NA | NA | Date from which a membership is valid. |
| Expiry Date | X_infa360rtl_PersonExpiryDate | Date | NA | NA | Date of expiry of a membership. |
| Fee Charged Indicator | X_infa360rtl_PersonFeeChargedFlag | Boolean | NA | NA | Indicates whether a fee is charged. |
| Program Level | X_infa360rtl_PersonProgramlevel | Dependant Lookup | NA | infa360rtl_PersonProgramLevel | Level of a reward program. |
| Reward Program | X_infa360rtl_PersonProgram | Dependant Lookup | NA | infa360rtl_PersonRewardProgramType | Type of a reward program. |
| Status | X_infa360rtl_PersonAccountstatus | Lookup | NA | infa360rtl_PersonAccountStatus | Status of a membeship, such as active or inactive. |

## Psychographic Segment field group of the Person business entity

The Psychographic Segment field group stores the psychographic details of a person.

The following table lists the fields that the Psychographic Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_psychographicType | Lookup | NA | infa360rtl_PsychographicSegmentType | Psychographic segment type of a person, such as, lifestyle type, personal value type, or personality type. |
| Value | X_infa360rtl_psychographicValue | Lookup | NA | infa360rtl_PsychographicSegmentValue | A psychographic segment type of a person can have segment values, such as, modern, urban professional, or workaholic. If lifestyle is the segment type, then modern, urban professional, or workaholic are segment values. |
| Effective Start Date | X_infa360rtl_psychographicEffectiveStartDate | Date | NA | NA | Start date from which the value entered for a psychographic segment is valid. |
| Effective End Date | X_infa360rtl_psychographicEffectiveEndDate | Date | NA | NA | End date on which the value entered for a psychographic segment expires. |

## Phone field group of the Person business entity

The Phone field group stores the phone details of a person.

The following table lists the fields that the Phone field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | X_infa360rtl_cellPrefix | Text | 255 | NA | Prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | X_infa360rtl_defaultIndicator | Boolean | NA | NA | Indicates whether the phone number is the default number. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Do Not Call Indicator | X_infa360rtl_doNotCallIndicator | Boolean | NA | NA | Indicates whether the person is interested to receive unsolicited phone calls from marketers. |
| Effective End Date | X_infa360rtl_effectiveEndDate | DateTime | NA | NA | Date until when the phone number was active or will be active. |
| Effective Start Date | X_infa360rtl_effectiveStartDate | Date Time | NA | NA | Date from when the phone number is active. |
| Enriched Indicator | X_infa360rtl_enrichedIndicator | Boolean | NA | NA | Indicates whether the phone number validation service verified the phone number. |
| International Format | X_infa360rtl_internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | X_infa360rtl_internationalPrefix | Text | 255 | NA | Prefix used to select an international telephone circuit. |
| ISO | X_infa360rtl_iso | Text | 2 | NA | ISO country code. |
| National Destination Code | X_infa360rtl_nationalDestinationCode | Text | 255 | NA | Code that identifies a numbering area within a country or a group of countries. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| National Destination Code Indicator | X_infa360rtl_nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether the phone number includes the National Destination Code. |
| National Format | X_infa360rtl_nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | X_infa360rtl_nationalPrefix | Text | 255 | NA | Digit or combination of digits which must be dialed before an area or city code. |
| Phone Number | X_infa360rtl_phoneNumber | Text | 255 | NA | Phone number of the person. |
| Phone Number Extension | X_infa360rtl_phoneNumberExtension | Text | 255 | NA | Extension to phone number. |
| Phone Type | X_infa360rtl_phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, home, or business. |
| Phone Usage Type | X_infa360rtl_phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, and customer service. |
| Prefix Number | X_infa360rtl_prefixNumber | Text | 255 | NA | Country dialing code. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | X_infa360rtl_status | Lookup | NA | PhoneStatus | Status of the phone number, such as the phone number is publicly available or active. |
| Validation Message | X_infa360rtl_validationMessage | Text | 255 | NA | Validation message that the phone number validation service returns. |
| Validation Status | X_infa360rtl_validationStatusCode | Text | 255 | NA | Validation status that the phone number validation service returns. |

## Phone Consent field group of the Person business entity

The Phone Consent field group stores information about the phone consent details given by customers to an organization, such as the effective date, retention date, do not share status, and the lawful basis for processing their phone numbers.

The following table lists the fields that the Phone Consent field group contains

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360rtl_phoneConsentDescription | Text | 255 | NA | Description of the phone consent wherein organizations inform customers about why they need to collect their phone numbers, how they will be used, and with whom they may be shared. |
| Do Not Share Flag | X_infa360rtl_isShareableFlagPhone | Boolean | NA | NA | Indicates whether a person prefers not to share their phone number for third-party communication. |
| Effective Date | X_infa360rtl_phoneConsentEffectiveDate | Date and Time | NA | NA | Date from which the phone consent is valid. |
| Lawful Basis of Processing | X_infa360rtl_phoneLawfulBasisOfProcessing | Lookup | NA | infa360rtl_LawfulBasis | Legal grounds under which personal data can be processed by an organization. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Object to Processing | X_infa360rtl_phoneConsentObjectoProcessing | Text | 255 | NA | Text describing the objection to processing the phone number. |
| Opt in | X_infa360rtl_phoneConsentConsentFlag | Boolean | NA | NA | Indicates whether a person has opted in to receive communication. |
| Purpose | X_infa360rtl_phonePurpose | Depandant Lookup | NA | infa360rtl_PersonConsentPurpose | Purpose of the phone consent. |
| Retention Date | X_infa360rtl_phoneConsentRetentionDate | Date and Time | NA | NA | Date until which the phone consent is retained. |

## Social Media field group of Person business entity

The Social Media field group stores information about the social media identifiers of a person.

The following table lists the fields that the Social Media field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social Media Type | socialHandleType | Lookup | NA | SocialHandleType | Type of social media platform, such as Facebook or Twitter. |
| Social Media Value | socialMediaValue | Text | 255 | NA | Social media identifier or name of the person. |

## Social Media Consent field group of the Person business entity

The Social Media Consent field group stores information about the social media consent details given by customers to an organization, such as the effective date, retention date, do not share status, and the lawful basis for processing their social media details.

The following table lists the fields that the Social Media consent field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360rtl_socialMediaConsentDescription | Text | 255 | NA | Description of the social media consent wherein organizations inform customers about why they need to collect their social media details, how they will be used, and with whom they may be shared. |
| Do Not Share Flag | X_infa360rtl_socialMediableFlagsAddress | Boolean | NA | NA | Indicates whether a person prefers not to share their social media details for third-party communication. |
| Effective Date | X_infa360rtl_socialMediaConsentEffectiveDate | Date and Time | NA | NA | Date from which the social media consent is valid. |
| Lawful Basis of Processing | X_infa360rtl_socialMediaLawfulBasisOfProcessing | Lookup | NA | infa360rtl_LawfulBasis | Legal grounds under which personal data can be processed by an organization. |
| Object to Processing | X_infa360rtl_socialMediaConsentObjecttoProcessing | Text | 255 | NA | Text describing the objection to processing the social media details. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Opt in | X_infa360rtl_socialMediaConsentConsentFlag | Boolean | NA | NA | Indicates whether a person has opted in to receive communication. |
| Purpose | X_infa360rtl_socialMediaPurpose | Dependant Lookup | NA | infa360rtl_PersonConsentPurpose | Purpose of the social media consent. |
| Retention Date | X_infa360rtl_socialMediaConsentRetentionDate | Date and Time | NA | NA | Date until which the social media consent is retained. |

## Specialization field group of Person business entity

The Specialization field group stores information about the specialities or specializations of a person. For healthcare professionals, a speciality can be cardiology, pediatrics, dermatology, or endocrinology.

The following table lists the fields that the Specialization field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Specialty Type | specialtyType | Lookup | NA | SpecialityType | Speciality type. For example, cytopathology, nephrology, or geriatrics. |
| Speciality | speciality | Text | 255 | NA | Name of speciality. |
| Board Certification Flag | boardCertificationFlag | Boolean | NA | NA | Indicates whether the board certification is active or not. |

## Status field group of Person business entity

The Status field group stores the statuses of a person. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table lists the fields that the Status field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status Type | statusType | Lookup | NA | PersonStatusType | Status type of the person. For example, onboarding, legal, or credit. |
| Status Value | statusValue | Lookup | NA | PersonStatusValue | Status value of the person. |

## Tax Details field group of Person business entity

The Tax Details field group stores tax-related information of a person, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the fields that the Tax Details field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country of taxation. |
| Currency | currency | Lookup | NA | Currency | Currency in which the tax is paid. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the tax period. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the tax period. |
| State | state | Lookup | NA | State | State within the country of the taxation. |
| Tax Authority | taxAuthority | Lookup | NA | TaxAuthority | Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department. |
| Tax Number | taxNumber | Text Field | 255 | NA | Unique number that identifies the person for tax purposes. |
| Tax Number Type | taxNumberType | Lookup | NA | TaxNumberType | Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), Employer Identification Number (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN). |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Tax Paid | taxPaid | Text Field | 255 | NA | Tax amount that the person has paid. |
| Taxpayer Type | taxPayerType | Lookup | NA | TaxPayerType | Type of tax payer. For example, individual, company, partnership, or trust. |

# Organization business entity data model

The Organization business entity stores information about the organization.

## General Fields of the Organization business entity

The general fields store some basic information about an organization such as name and date of incorporation.

The following table lists the general fields that the Organization business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country Of Incorporation | countryOfIncorporation | Lookup | NA | Country | Country of incorporation of an organization. |
| Date of Incorporation | dateOfIncorporation | Date Time | NA | NA | Date of incorporation of an organization. |
| Preferred Language | X_infa360rtl_preferredLanguage | Lookup | NA | Language | Language preference of an organization. |
| Name | name | Text | 255 | NA | Name of an organization. |
| State Of Incorporation | stateOfIncorporation | Lookup | NA | State | State of incorporation of an organization. |
| Number Of Employees | numberOfEmployees | Integer | NA | NA | Total number of employees in an organization. |
| Company Type | companyType | Lookup | NA | CompanyType | Type of company. |
| Website | X_infa360rtl_website | Text | 4000 | NA | URL to access the website of an organization. |

## Address field group of Organization business entity

The Address field group stores the postal addresses of an organization. Postal address is a physical address associated with the organization. An organization can have multiple addresses.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| Address Type | addressType | Lookup | NA | AddressType | Type of postal address. For example, office, or shipping. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| City | city | Text | 50 | NA | City of postal address. |
| County | county | Text | 50 | NA | County of postal address. |
| State | state | Lookup | NA | State | State of postal address. |
| Country | country | Lookup | NA | Country | Country of postal address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Location Coordinate Desc | locationCoordinateDesc | Text | 50 | NA | Location of the address using coordinate system. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active, current, old address, or changed. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Longitude | longitude | Text | 20 | NA | Longitude for the address. |
| Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the address is active. |
| End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |

## Alternate Names field group of Organization business entity

The Alternate Names field group stores the details of alternate names. An organization might use different names, such as legal name, alias, and trading name. An alternative name might be active during a particular time.

The following table lists the fields that the Alternate Names field group of Organization business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name | infac360hc_alternateName | Text | 255 | NA | Alternate name of the organization. |
| Name Type | infac360hc_nameType | Lookup | NA | AlternateNameType | Alternate name type. For example, doing business as, alias, business name, and trading name. |
| Effective Start Date | infac360hc_effectiveStartDate | Date | NA | NA | Start date from when the alternate name is valid. |
| Effective End Date | infac360hc_effectiveEndDate | Date | NA | NA | Expiry date of the alternate name. |

## Documents field group of Organization business entity

The Documents field group stores the document details, such as bank statement, qualification certificate and proof of business existence.

The following table lists the fields that the Documents field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Document Type | documentType | Lookup | NA | DocumentType | Type of document. |
| Document Name | documentName | Text | 255 | NA | Name of the document. |
| Document Link | documentLink | Text | 255 | NA | URL to access the document. |
| File Name | fileName | Text | 255 | NA | Name of the file. |
| Valid From | validFrom | Date Time | NA | NA | Date from when the document is valid. |
| Valid To | validTo | Date Time | NA | NA | Date until when the document is valid. |

## Email field group of Organization business entity

The Email field group stores information about the electronic addresses, such as email addresses or URL of the websites.

The following table lists the fields that the Email field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Usage Type | usageType | Lookup | NA | ElectronicAddressUsageType | Usage type indicates the intended use or purpose of the address. For example, business, work, or personal. |
| Electronic Address | electronicAddress | Text | 255 | NA | Electronic address of the organization. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the electronic address is primary or default. |
| Hygiene Status | hygieneStatus | Text | 50 | NA | Hygiene status for the electronic address. For example, safe to send, invalid, or spam. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Electronic Address Status | electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of the email address. For example, active, blocked, or not in use. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status of the electronic address. |
| Validation Message | validateMessage | Text | 50 | NA | Message that the address validation service generates to indicate how valid and trusted the address is. |
| Net Protect Code | netProtectCode | Text | 50 | NA | Net protect codes identify which service or appliance is monitoring a given network. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the address verification service verified the address. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date for the electronic address. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date for the electronic address. |

## Financial field group of Organization business entity

The Financial field group stores financial information of an organization.

The following table lists the fields that the Financial field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Finance Info Type | infac360hc_financeInfoType | Lookup | NA | FinanceInfoType | Type of financial information. For example, equity, annual income, and debt. |
| Amount | infac360hc_amount | Double | NA | NA | Total value of the finance. |
| Time Period | infac360hc_timePeriod | Text | 255 | NA | Finance period for which the data is collected. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Currency | infac360hc_currency | Lookup | NA | Currency | Currency in which the financial information is collected. |
| Unit | infac360hc_unit | Lookup | NA | FinancialUnit | Unit of the amount. For example, thousands, millions, or billions. |
| Finance Reliability | infac360hc_financeReliability | Lookup | NA | FinanceReliability | Reliability of the financial data. For example, actual or estimate. |
| Time Period Type | infac360hc_timePeriodType | Lookup | NA | TimePeriodType | Type of the finance period. For example, quarterly or yearly. |

## Identifier field group of Organization business entity

The Identifier field group stores the alternate identifier details of an organization, such as tax numbers, D-U-N-S number, or National Provider Identifier (NPI) numbers for healthcare providers.. Alternate identifiers are known identifiers that uniquely identify an organization.

The following table lists the fields that the Identifier field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Issuing Authority | infac360hc_issuingAuthority | Lookup | NA | IssuingAuthority | Authority that has issued the identifier to the organization. |
| Identifier Type | infac360hc_identifierType | Lookup | NA | AlternateIdType | Type of the identifier. |
| Effective Start Date | infac360hc_effectiveStartDate | DateTime | NA | NA | Issued date of the identifier. |
| Effective End Date | infac360hc_effectiveEndDate | DateTime | NA | NA | Expiry date of the identifier. |
| Identifier Value | infac360hc_identifierValue | Text | 50 | NA | Value of the identifier, such as D-U-N-S number or National Provider Identifier. |
| Deactivation Reason | infac360hc_deactivationReason | Text | 255 | NA | Reason for the deactivation of the identifier. |
| Deactivation Date | infac360hc_deactivationDate | DateTime | NA | NA | Date on which the identifier was deactivated. |
| Reactivation Date | infac360hc_reactivationDate | DateTime | NA | NA | Date on which the identifier was reactivated. |
| Status | infac360hc_status | Lookup | NA | IdentifierStatus | Status of the identifier. For example, effective, disqualified, expired, and temporary. |

## Indicator field group of Organization business entity

The Indicator field group stores the indicator types based on which you want to identify an organization.

The following table lists the fields that the Indicator field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Indicator Type | infac360hc_indicatorType | Lookup | NA | IndicatorType | Type of organization indicator such as promoter, detractor, minority-owned, women-owned, locally based, and small business. |
| Indicator value | infac360hc_indicatorvalue | NA | 255 | NA | Actual value of the indicator. |

## Industry Classification field group of the Organization business entity

The Industry Classification field group stores the classification details of an organization, such as classification type and code.

The following table lists the fields that the Industry Classification field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Classification Type | X_infa360rtl_IndustryClassificationType | Lookup | NA | infa360rtl_IndustryClassificationType | Type of classification system that groups organization. |
| Classification Level 1 | X_infa360rtl_classificationLevel1Code | Dependant Lookup | NA | infa360rtl_classificationLevel1Code | Code value that indicates the group to which an organization belongs. |
| Classification Level 1 Label | X_infa360rtl_classificationLevel1Label | Dependant Lookup | NA | infa360rtl_classificationLevel1Label | Hierarchical classification that indicates the sector to which an organization belongs. |
| Classification Level 2 | X_infa360rtl_classificationLevel2Code | Dependant Lookup | NA | infa360rtl_classificationLevel2Code | Code value that indicates the group to which an organization belongs. |
| Classification Level 2 Label | X_infa360rtl_classificationLevel2Label | Dependant Lookup | NA | infa360rtl_classificationLevel2Label | Hierarchical classification that indicates the sector to which an organization belongs. |
| Classification Level 3 | X_infa360rtl_classificationLevel3Code | Dependant Lookup | NA | infa360rtl_classificationLevel3Code | Code value that indicates the group to which an organization belongs. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Classification Level 3 Label | X_infa360rtl_classificationLevel3Label | Dependant Lookup | NA | infa360rtl_classificationLevel3Label | Hierarchical classification that indicates the sector to which an organization belongs. |
| Classification Level 4 | X_infa360rtl_classificationLevel4Code | Dependant Lookup | NA | infa360rtl_classificationLevel4Code | Code value that indicates the group to which an organization belongs. |
| Classification Level 4 Label | X_infa360rtl_classificationLevel4Label | Dependant Lookup | NA | infa360rtl_classificationLevel4Label | Hierarchical classification that indicates the sector to which an organization belongs. |

## Insurance field group of Organization business entity

The Insurance field group stores the insurance details, such as the name of the insurance provider, the policy number, the insurance type, and the validity.

The following table lists the fields that the Insurance field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Policy Number | insurancePolicyNumber | Text | 100 | NA | Policy number of the insurance. |
| Value | insuranceValue | Double | NA | NA | Amount insured. |
| Unit | unit | Lookup | NA | FinancialUnit | Unit for the amount. |
| Currency | currency | Lookup | NA | Currency | Currency in which the organization is insured. |
| Insurance Provider | insuranceProvider | Text | 255 | NA | Company that provides the insurance. |
| Insurance Type | insuranceType | Lookup | NA | InsuranceType | Type of insurance, such as life, health and accident, professional indemnity, or medical malpractice. |
| Insurance Sub Type | insuranceSubType | Lookup | NA | InsuranceSubType | Insurance subtype. For example, if the insurance type is life, the subtypes might be non-participating, participating, indeterminate premium, economic, limited pay, or single premium. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Insurance Holder | insuranceHolder | Text | 255 | NA | Name of the insurance holder. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the insurance. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the insurance. |
| Status | insuranceStatus | Text | 255 | NA | Status of the insurance. For example, active or expired. |

## Key People field group of Organization business entity

The Key People field group stores information about the key executives in an organization. The key executives are important people in an organization. For example, the key executives include chief executive officer and chief financial officer of the organization.

The following table lists the fields that the Key People field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Executive Type | infac360hc_executiveType | Lookup | NA | ExecutiveType | Executive type. For example, executive chairman, non-executive chairman, or chief executive officer. |
| Name | infac360hc_name | Text | 255 | NA | Name of the executive. |
| Designation | infac360hc_designation | Text | 255 | NA | Designation of the key executive. |

## Membership Account field group of the Organization business entity

The Membership Account field group stores the details of an organization's membership, such as account type, reward program, and program level.

The following table describes the fields that the Membership Account field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account | X_infa360rtl_orgAccount | Text | 255 | NA | Details of a membership account. |
| Account Type | X_infa360rtl_orgCustomerAccountType | Lookup | NA | infa360rtl_orgCustomerAccountType | Type of a membership account. |
| Effective Date | X_infa360rtl_orgEffectivedate | Date | NA | NA | Date from which a membership is valid. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Expiry Date | X_infa360rtl_orgExpiryDate | Date | NA | NA | Date of expiry of a membership. |
| Fee Charged Indicator | X_infa360rtl_orgFeeChargedFlag | Boolean | NA | NA | Indicates whether a fee is charged. |
| Program Level | X_infa360rtl_orgProgramlevel | Dependant Lookup | NA | infa360rtl_OrganizationProgramLevel | Level of a reward program. |
| Reward Program | X_infa360rtl_orgProgram | Dependant Lookup | NA | infa360rtl_orgRewardProgramType | Type of a reward program. |
| Status | X_infa360rtl_orgAccountstatus | Lookup | NA | infa360rtl_OrgAccountStatus | Status of a membeship, such as active or inactive. |

## Phone field group of Organization business entity

The Phone field group stores the phone details of the organization.

The following table lists the fields that the Phone field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, home, or business. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, and customer service. |
| Phone Number | phoneNumber | Text | 20 | NA | Phone number of the organization. |
| Phone Number Extension | phoneNumberExtension | Text | 10 | NA | Extension to the phone number. |
| Prefix Number | prefixNumber | Text | 3 | NA | Country dialing code. |
| International Prefix | internationalPrefix | Text | 3 | NA | Prefix used to select an international telephone circuit. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits which must be dialed before an area or city code. |
| Cell Prefix | cellPrefix | Text | 1 | NA | Prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the phone number is the default number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Indicates whether the organization is interested to receive unsolicited phone calls from marketers. |
| National Destination Code | nationalDestinationCode | Text | 10 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Destination Code Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether the phone number includes the National Destination Code. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status that the phone number validation service returns. |
| Validation Message | validationMessage | Text | 50 | NA | Validation message that the phone number validation service returns. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Date from when the phone number is active. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Date until when the phone number was active or will be active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as the phone number is publicly available or active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the phone number validation service verified the phone number. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| ISO | iso | Text | 2 | NA | ISO country code. |

## Segment field group of Organization business entity

The Segment field group stores the segment details of an organization. Segmentation can help marketers design targeted campaigns.

The following table lists the fields that the Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Segment Type | infac360hc_segmentType | Lookup | NA | SegmentType | Type of segment of the organization. For example, income, age, or geography. |
| Segment Name | infac360hc_segmentName | Lookup | NA | SegmentValue | Name of the category or segment. A segment type can have segment values. |

## Social Media field group of Organization business entity

The Social Media field group stores information about the social media identifiers of an organization.

The following table lists the fields that the Social Media field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social Media Type | socialHandleType | Lookup | NA | SocialHandleType | Type of social media platform, such as Facebook or Twitter. |
| Social Media Handle | socialMediaHandle | Text | 255 | NA | Social media identifier or name of the organization. |

## Status field group of Organization business entity

The Status field group stores the statuses of the organization. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table lists the fields that the Status field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status Type | infac360hc_statusType | Lookup | NA | OrgStatusType | Status type of the organization. For example, onboarding, legal, or credit. |
| Status Value | infac360hc_statusValue | Lookup | NA | OrgStatusValue | Status value of the organization. |
| Start Date | infac360hc_startDate | DateTime | NA | NA | Date when the status was issued. |
| End Date | infac360hc_endDate | DateTime | NA | NA | Expiry date of the status. |
| Status Reason | infac360hc_statusReason | Text | 255 | NA | The reason for the status. |

## Stock field group of Organization business entity

The Stock field group stores information about the stock exchanges where an organization trades.

The following table lists the fields that the Stock field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country in which the stock exchange is located. |
| Stock Exchange | stockExchangeName | Text | 255 | NA | Name of the stock exchange that trades the shares. |
| Ticker Symbol | tickerSymbol | Text | 255 | NA | Abbreviation used to identify the publicly traded shares of the organization. |

## Tax field group of Organization business entity

The Tax field group stores tax-related information, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the fields that the Tax field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Tax Number Type | taxNumberType | Lookup | NA | TaxNumberType | Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN). |
| Tax Payer Type | taxPayerType | Lookup | NA | TaxPayerType | Type of tax payer. For example, company, partnership, or trust. |
| Currency | currency | Lookup | NA | Currency | Currency in which the tax is paid. |
| Country | country | Lookup | NA | Country | Country of taxation. |
| State | state | Lookup | NA | State | State within the country of the taxation. |
| Tax Authority | taxAuthority | Lookup | NA | TaxAuthority | Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the tax period. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the tax period. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Tax Paid | taxPaid | Text | 50 | NA | Tax amount that the organization has paid. |
| Tax Number | taxNumber | Text | 50 | NA | Unique number that identifies the organization for tax purposes. |

# Household business entity data model

Household business entity stores information about households. This business entity contains some basic fields and some field groups.

## General fields of the Household business entity

The general fields store some basic information about a household, such as name and member count.

The following table lists the general fields that the Household business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Name | infa360rtl_name | Text | 255 | NA | Name of a household. |
| Member Count | infa360rtl_memberCount | Integer | NA | NA | Total number of members in a household. |
| Status | infa360rtl_householdStatus | Lookup | 255 | infa360rtl_householdStatus | Status of a household, such as active or inactive. |

## Address field group of Household business entity

The Address field group stores the postal addresses of a household. Postal address is a physical address associated with the household. A household can have multiple addresses.

The following table lists the fields that the Household field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| Address Type | addressType | Lookup | NA | AddressType | Type of postal address. For example, office, or shipping. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| City | city | Text | 50 | NA | City of postal address. |
| County | county | Text | 50 | NA | County of postal address. |
| State | state | Lookup | NA | State | State of postal address. |
| Country | country | Lookup | NA | Country | Country of postal address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Location Coordinate Desc | locationCoordinateDesc | Text | 50 | NA | Location of the address using coordinate system. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active, current, old address, or changed. |
| Verification Status Code | statusCode | Text | 10 | NA | Validation status that the address verification service returns. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Longitude | longitude | Text | 20 | NA | Longitude for the address. |
| Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the address is active. |
| End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the address. |
| Verification Message | statusMessage | Text | 255 | NA | Validation message that the address verification service returns. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |

## Phone Field Group of Household Business Entity

The Phone field group stores the phone details of a household.

The following table lists the fields that the household field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, home, or business. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, and customer service. |
| Phone Number | phoneNumber | Text | 20 | NA | Phone number of the organization. |
| Phone Number Extension | phoneNumberExtension | Text | 10 | NA | Extension to the phone number. |
| Prefix Number | prefixNumber | Text | 3 | NA | Country dialing code. |
| International Prefix | internationalPrefix | Text | 3 | NA | Prefix used to select an international telephone circuit. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits which must be dialed before an area or city code. |
| Cell Prefix | cellPrefix | Text | 1 | NA | Prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the phone number is the default number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Indicates whether the organization is interested to receive unsolicited phone calls from marketers. |
| National Destination Code | nationalDestinationCode | Text | 10 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Destination Code Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether the phone number includes the National Destination Code. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status that the phone number validation service returns. |
| Validation Message | validationMessage | Text | 50 | NA | Validation message that the phone number validation service returns. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Date from when the phone number is active. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Date until when the phone number was active or will be active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as the phone number is publicly available or active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the phone number validation service verified the phone number. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| ISO | iso | Text | 2 | NA | ISO country code. |

# Product business entity

The Product business entity stores information about a product. This business entity contains some basic fields and field groups, such as product description and highlights.

## General fields of the Product business entity

The general fields store basic information about a product, such as the unique identifier, manufacturer, and country of origin.

The following table describes the general fields that the Product business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Brand | X_infa360rtl_brand | Lookup | NA | infa360rtl_Brand | The brand name of a product. |
| Country of origin | X_infa360rtl_countryOfOrigin | Lookup | NA | Country | Country from which a product originates. |
| Identifier | X_infa360rtl_identifier | Text | 255 | NA | Unique identifier of a product. |
| Manufacturer | X_infa360rtl_manufacturer | Text | 255 | NA | The manufacturer of a product. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | X_infa360rtl_status | Lookup | NA | ItemStatus | Status of a product. |
| Sub-brand | X_infa360rtl_subBrand | Loopup | NA | infa360rtl_SubBrand | Sub-brand of a product. |

## Description field group of the Product business entity

The Description field group stores the short or long description of a product.

The following table describes the fields that the Description field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infa360rtl_descLanguage | Lookup | NA | Language | Language of a product description. |
| Title | X_infa360rtl_descTitle | Text | 255 | NA | Title of a product description. |
| Short Description | X_infa360rtl_shortDescription | Text | 255 | NA | Short description of a product. |
| Long Description | X_infa360rtl_longDescription | Text | 4000 | NA | Detailed description of a product. |

## Product Highlights field group of the Product business entity

The Product highlights field group stores the most relevant highlight of a product.

The following table describes the fields that the Product Highlights field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infa360rtl_prodHglLanguage | Lookup | NA | Language | Language of product highlights. |
| Product Highlights | X_infa360rtl_productHighlight | Text | 4000 | NA | The most relevant highlight of a product. |

### Tags field group of the Product business entity

The Tags field group stores the relevant hashtags to associate with a product.

The following table describes the fields that the Tags field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infa360rtl_tagLanguage | Lookup | NA | Language | Language of the hashtag associated with a product. |
| Tag | X_infa360rtl_tag | Text | 255 | NA | Relevant hashtag to associate with a product. |

### Keywords field group of the Product business entity

The Keywords field group stores the relevant keywords to associate with a product.

The following table describes the fields that the Keywords field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infa360rtl_kywdsLanguage | Lookup | NA | Language | Language of the keywords to associate with a product. |
| Keyword | X_infa360rtl_keyword | Text | 255 | NA | The word that customers might use to find a product on a search page or an online store. |

### Selling Price field group of the Product business entity

The Selling price field group stores the selling price details of a product.

The following table describes the fields that the Selling price field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | X_infa360rtl_sellType | Lookup | NA | SellingPriceType | Type of a selling price, such as gross list price or net list price. |
| Currency | X_infa360rtl_currency | Lookup | NA | Currency | Currency in which a selling price is specified. |
| Territory | X_infa360rtl_territory | Lookup | NA | Country | Region in which a selling price is valid. |
| Amount | X_infa360rtl_amount | Decimal | 34,9 | NA | Price of a product. |

## Item business entity

The Item business entity stores information about the items included in a product. This business entity contains some basic fields and field groups.

## General fields of the Item business entity

The general fields store basic information about an item, such as the unique identifier, manufacturer details, and availability and expiration dates.

The following table describes the general fields that the Item business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Availability | availability | Lookup | NA | ItemAvailability | Indicates if the item is in stock. |
| Availability date | availabilityDate | Date | NA | NA | The date from when an item will be available. |
| Brand | X_infa360rtl_brand | Lookup | 255 | infa360rtl_Brand | The brand name of an item. |
| Consumer Package Depth | X_infa360rtl_consumerPackageDepth | Decimal | (9,3) | NA | Depth of a packaged item. |
| Consumer Package Diameter | X_infa360rtl_consumerPackageDiameter | Decimal | (3,0) | NA | Diameter of a packaged item. |
| Consumer Package Gross Weight | X_infa360rtl_consumerPackageGrossWeight | Decimal | (9,3) | NA | Gross weight of a packaged item. |
| Consumer Package Height | X_infa360rtl_consumerPackageHeight | Decimal | (9,3) | NA | Height of a packaged item. |
| Consumer Package Net Weight | X_infa360rtl_consumerPackageNetWeight | Decimal | (3,0) | NA | Net Weight of a packaged item. |
| Consumer Package Size Unit of Measure | X_infa360rtl_consumerPackageSizeUOM | Picklist | NA | NA | Unit of measurement for the size of a packaged item. |
| Consumer Package Weight Unit of Measure | X_infa360rtl_consumerPackageWeightUOM | Picklist | NA | NA | Unit of measurement for the weight of a packaged item.. |
| Consumer Package Width | X_infa360rtl_consumerPackageWidth | Decimal | (9,3) | NA | Width of a packaged item. |
| Country of origin | countryOfOrigin | Lookup | NA | Country | Country from which the item originates. |
| Expiration date | expirationDate | Date | NA | NA | The date after which an item expires. |
| Front Image URL | X_infa360rtl_frontImageURL | Text | 4000 | NA | URL that directs to the front image of a packaged item. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| GTIN | gtin | Text | 14 | NA | Global Trade Item Number. An item identifier assigned by GS1. |
| Identifier | identifier | Text | 255 | NA | Unique identifier of an item. |
| Main Image URL | X_infa360rtl_mainImageURL | Text | 4000 | NA | URL that directs to the main image of a packaged item. |
| Manufacturer | manufacturer | Text | 255 | NA | The manufacturer of an item. |
| Manufacturer GLN | manufacturerGLN | Text | 13 | NA | Manufacturer Global Location Number. Identifies the name and address of the company that manufactures the item. |
| Manufacturer product number | manufacturerProductNumber | Text | 255 | NA | SKU number of the item specified by the manufacturer. |
| Other Image URL | X_infa360rtl_otherImageURL | Text | 4000 | NA | URL that directs to other image of a packaged item. |
| Product | X_infa360rtl_product | Lookup | NA | infa360rtl_product | Product to which an item is associated with. |
| Status | status | Lookup | NA | ItemStatus | Status of an item. |
| Sub-brand | X_infa360rtl_subBrand | Lookup | 255 | infa360rtl_SubBrand | Sub-brand of an item. |
| Type | X_infa360rtl_itemType | Lookup | NA | infa360rtl_ItemType | Type of an item. |

## Description field group of the Item business entity

The Description field group stores the short or long description of an item.

The following table describes the fields that the Description field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | descriptionLanguage | Lookup | NA | Language | Language of the item description. |
| Title | productTitle | Text | 255 | NA | Title of the item. |
| Short description | shortDescription | Text | 255 | NA | Short description of the item. |
| Long description | longDescription | Text | 4000 | NA | Detailed description of the item. |

## Product highlight field group of the Item business entity

The Product highlight field group stores the most relevant highlight of an item.

The following table describes the fields that the Product highlight field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | producthighlightsLanguage | Lookup | NA | Language | Language of the product highlights. |
| Product highlight | productHighlight | Text | 4000 | NA | The most relevant highlight of the item. |

## Tags field group of the Item business entity

The Tags field group stores the relevant hashtags to associate with an item.

The following table describes the fields that the Tags field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | tagsLanguage | Lookup | NA | Language | Language of the hashtags associated with the item. |
| Tag | tag | Text | 255 | NA | Relevant hashtag to associate with the item. |

## Keywords field group of the Item business entity

The Keywords field group stores the relevant keywords to associate with an item.

The following table describes the fields that the Keywords field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | keywordsLanguage | Lookup | NA | Language | Language of the keywords to associate with the item. |
| Keyword | keyword | Text | 255 | NA | The word that customers might use to find an item on a search page or an online store. |

### Selling price field group of the Item business entity

The Selling price field group stores the selling price details of an item.

The following table describes the fields that the Selling price field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Type | sellingPriceType | Lookup | NA | SellingPriceType | Type of the selling price. |
| Currency | sellingCurrency | Lookup | NA | Currency | Currency in which the selling price is specified. |
| Territory | sellingTerritory | Lookup | NA | Country | Region in which the selling price is valid. |
| Valid from | sellingValidFrom | Date | NA | NA | The date from when the selling price is valid. |
| Valid to | sellingValidTo | Date | NA | NA | The date until when the selling price is valid. |
| Amount | sellingPriceAmount | Decimal | NA | NA | Price of the item. |

## Category business entity model

The Category business entity stores information about product categories. This business entity contains a basic field and some field groups.

### General field of the Category business entity

The general field stores the unique identifier of the category.

The following table describes the general field that the Category business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Identifier | identifier | Text | 255 | NA | Unique identifier of the category. |

### Description field group of the Category Business Entity

The Description field group stores the short or long description of the category.

The following table describes the fields that the Description field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | descriptionsLanguage | Lookup | NA | Language | Language of the category description. |
| Name | name | Text | 255 | NA | Name of the category. |
| Description | description | Text | 4000 | NA | Description of the category. |

### Keywords field group of the Category business entity

The Keywords field group stores the relevant keywords to associate with the category.

The following table describes the fields that the Keywords field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | keywordsLanguage | Lookup | NA | Language | Language of the keyword to associate with the category. |
| Keyword | keyword | Text | 255 | NA | The word that customers might use to find the category containing the item on a search page or an online store. |

## Supplier business entity model

Supplier business entity stores information about a supplier. This business entity contains some basic fields and some field groups.

### General fields of Supplier business entity

The general fields store some basic information about a supplier organization such as name and date of incorporation.

The following table lists the general fields that the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Business Type | businessType | Lookup | NA | BusinessType | Type of business. For example, asset based or non-asset based. |
| Company Code | companyCode | Text | 255 | NA | Company code of the supplier organization. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Company Logo | companyLogo | Text | 255 | NA | URL of the image for the supplier organization. |
| Currency Type | currencyType | Lookup | NA | Currency | Currency in which the financial information is provided. |
| Date of Incorporation | dateOfIncorporation | Date | NA | NA | Date of incorporation of the supplier organization. |
| DUNS Number | dunsNumber | Text | 255 | NA | DUNS number of the supplier organization. |
| Industry Type | industryType | Lookup | NA | IndustryType | Type of industry. For example, agriculture, banking, chemicals, or communication. |
| NAICS Code | naicsCode | Text | 255 | NA | North American Industry Classification System code of the supplier organization. |
| Name | name | Text | 255 | NA | Name of the supplier organization. |
| Number of Employees | numberOfEmployees | Integer | NA | NA | Total number of employees in the supplier organization. |
| Online Catalog Flag | onlineCatalogFlag | Boolean | NA | NA | Indicates whether the supplier organization provides an online catalog. |
| Online Sell Flag | onlineSellFlag | Boolean | NA | NA | Indicates whether the supplier sells online. |
| Ownership Type | ownershipType | Lookup | NA | OwnershipType | Type of ownership for the supplier organization. For example, cooperative, private, public, or self-owned. |
| SIC Code | sicCode | Text | 255 | NA | Standard Industrial Classification code of the supplier organization. |
| Supplier Type | supplierType | Lookup | NA | SupplierType | Type of supplier. For example, manufacturers, exporters, or distributors. |
| Web Address | webAddress | Text | 255 | NA | Website of the supplier organization. |

## Address field group of Supplier business entity

The Address field group stores the postal addresses of suppliers. Postal address is a physical address associated with the supplier organization. A supplier organization can have multiple addresses.

The following table describes the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the postal address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the postal address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the postal address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active or inactive. |
| Address Type | addressType | Lookup | NA | AddressType | Type of postal address. For example, office, or shipping. |
| City | city | Text | 50 | NA | City of the postal address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Country | country | Lookup | NA | Country | Country of the postal address. |
| County | county | Text | 50 | NA | County of the postal address. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the postal address is the default address. |
| End Date | effectiveEndDate | Date and Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnriched Indicator | Validation status of the address. For example, error, valid, or not validated. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Desc | locationCoordinate Desc | Text | 50 | NA | Location of the address using coordinate system. |
| Longitude | longitude | Text | 20 | NA | Longitude for the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtensio n | Text | 10 | NA | Postal code extension of the address. |
| Start Date | effectiveStartDate | Date and Time | NA | NA | Start date from when the address is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| State | state | Lookup | NA | State | State of the postal address. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |
| Verification Message | statusMessage | Text | 255 | NA | Validation message that the address verification service returns. |
| Verification Status Code | statusCode | Text | 10 | NA | Validation status that the address verification service returns. |

## Alternate Names field group of Supplier business entity

The Alternate Names field group stores the alternate names related information, such as alternate name, effective start date, and effective end date. A supplier might use different names, such as legal name, alias, and trading name. An alternative name might be active during a particular time.

The following table describes the fields that the Alternate Names field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name | alternateName | Text | 255 | NA | Alternate name of the supplier organization. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Expiry date of the alternate name. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Start date from when the alternate name is valid. |
| Name Type | nameType | Lookup | NA | AlternateNameType | Alternate name type of the supplier organization. For example, doing business as name, alias, legal name, or previous name. |

## Bank Details field group of Supplier business entity

The Bank Details field group stores the bank related information, such as account number, account holder, and branch of the contact.

The following table describes the fields that the Bank Details field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Type | accountType | Lookup | NA | NA | Type of bank account, such as savings account or current account. |
| Account Holder | accountHolder | Text | 50 | NA | Bank account holder's name. |
| Branch Name | branchName | Text | 255 | NA | Name of the branch in which the supplier organization has the account. |
| Account Number | accountNumber | Text | 50 | NA | Bank account number of the supplier organization. |
| Account Status | accountStatus | Lookup | NA | NA | Status of the bank account, such as active or inactive. |
| Bank Name | bankName | Text | 255 | NA | Name of the bank. |
| SWIFT | swift | Text | 50 | NA | Society for Worldwide Interbank Financial Telecommunication code. |
| IBAN | iban | Text | 50 | NA | International Bank Account Number. |
| Country | country | Lookup | NA | NA | Country of the bank account. |
| Branch Number | branchNumber | Text | 50 | NA | Branch number of the bank. |
| Check Digit | checkDigit | Text | 50 | NA | Error detection on identification numbers, such as bank account numbers. |
| Primary Indicator | primaryIndicator | Boolean | NA | NA | Indicates whether the bank account is the primary account. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Start date from when the bank account is valid. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Expiry date of the bank account. |

## Contract field group of Supplier business entity

The Contract field group stores contract related information, such as the order number, quality, transit risk, shipment completion method, and payment type.

The following table describes the fields that the Contract field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Agreement Confidentiality | agreementConfidentiality | Boolean | NA | NA | Indicates whether the contract agreement is confidential. |
| Agreement Date | agreementDate | Date | NA | NA | Date when the contract agreement is drawn. |
| Arbitration | arbitration | Boolean | NA | NA | Indicates whether arbitration is applicable to the contract. |
| Country | country | Lookup | NA | Country | Country code of the contract. |
| Currency | currency | Lookup | NA | Currency | Currency that is specified in the contract. |
| Delivery Responsibility | deliveryResponsibility | Lookup | NA | DeliveryResponsibilityType | Delivery responsibility of the contract, such as customer will arrange delivery or supplier will arrange delivery. |
| Discount Avail | discountAvail | Boolean | NA | NA | Indicates whether discount is available for the contract. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Effective end date of the contract. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Effective start date of the contract. |
| Force Majeure | forceMajeure | Boolean | NA | NA | Indicates whether the force majeure provision is applicable to the contract. |
| Language | language | Lookup | NA | Language | Language in which the contract is written. |
| Order Number | orderNumber | Text | 255 | NA | Order number of the contract. |
| Payment Method | paymentMethod | Lookup | NA | PaymentMethodType | Payment method, such as cash, cheque, direct debit, or file electronic transfer. |
| Payment Type | paymentType | Lookup | NA | PaymentType | Payment type of the contract, such as several installment payments or single lump sum payment. |
| Purchasing Org Code | purchaseOrgCode | Lookup | NA | PurchaseOrgCodeType | Code of the purchasing organization. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Quality | quality | Text | 255 | NA | Quality requirements of the product or service contract. |
| Return Remedy Period | returnRemedyPeriod | Text | 255 | NA | Return remedy period of the contract. |
| Return Responsibility | returnResponsibility | Lookup | NA | ReturnResponsibilityType | Return responsibility of the contract, such as customer will take responsibility for returns, or supplier will take responsibility for returns. |
| Shipment Completion Type | shipmentCompletionType | Lookup | NA | ShipmentCompletionType | Shipment completion type of the contract, such as upon delivery of goods to the final destination or upon delivery of goods to the shipping company. |
| State Law Applied | stateLawApplied | Boolean | NA | NA | Indicates whether the state law is applicable to the contract. |
| Transferability | transferability | Boolean | NA | NA | Indicates whether the contract is transferable. |
| Transit Risk | transitRisk | Text | 255 | N | Transit risk factors of the contract, such as loss of goods. |
| Tax Responsibility | taxResponsibility | Lokkup | NA | TaxResponsibilityType | Tax responsibility of the contract, such as customer will take responsibility for tax, do not include tax provision, or supplier will take responsibility for tax. |
| Violation Grace Period | violationGracePeriod | Text | 255 | NA | Violation grace period of the contact. |
| Warranty | warranty | Text | 255 | NA | Warranty of the contract. |

## Diversity field group of Supplier business entity

The Diversity field group stores diversity related information, such as diversity status and diversity type.

The following table describes the fields that the Diversity field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Diversity Status | diversityStatus | Boolean | NA | NA | Indicates whether the supplier organization is diverse. |
| Diversity Type | diversityType | Lookup | NA | DiversityType | Diversity type of the supplier organization. For example, minority business enterprise, small disadvantaged business, or women business enterprise. |

## Documents field group of Supplier business entity

The Documents field group stores the document related information, such as bank statement, qualification certificate, and proof of business existence.

The following table describes the fields that the Documents field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Document Link | documentLink | Text | 255 | NA | URL to access the document. |
| Document Name | documentName | Lookup | NA | DocumentType | Name of the document. |
| Document Type | documentType | Text | 255 | NA | Type of document. |
| File Name | fileName | Text | 255 | NA | Name of the file. |
| Valid From | validFrom | Date | NA | NA | Date from when the document is valid. |
| Valid To | validTo | Date | NA | NA | Date until when the document is valid. |

## Email field group of Supplier business entity

The Email field group stores information about the electronic addresses, such as email addresses.

The following table describes the fields that the Email field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| Effective End Date | effectiveEndDate | Date and Time | NA | NA | End date for the electronic address. |
| Effective Start Date | effectiveStartDate | Date and Time | NA | NA | Start date for the electronic address. |
| Electronic Address | electronicAddress | Text | 255 | NA | Electronic address of the supplier organization. |
| Electronic Address Status | electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of the email address. For example, active, blocked, or not in use. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the email verification service verified the electronic address. |
| Hygiene Status | hygieneStatus | Text | 50 | NA | Hygiene status for the electronic address. For example, safe to send, invalid, or spam. |
| Net Protect Code | netProtectCode | Text | 50 | NA | Net protect codes identify which service or appliance is monitoring a given network. |
| Usage Type | usageType | Lookup | NA | ElectronicAddressUsageType | Intended use or purpose of the electronic address. For example, business, work, or personal. |
| Verification Status Code | validationStatusCode | Text | 50 | NA | Validation status of the electronic address. |
| Verification Message | validationMessage | Text | 50 | NA | Message that the email validation service generates to indicate how valid and trusted the address is. |

## ESG Risk Rating (D&B) field group of the Supplier business entity

The ESG Risk Rating (D&B) field group stores the Dun & Bradstreet (D&B) environmental, social, and governance risk ratings of a company.

The following table describes the fields that the ESG Risk Rating (D&B) field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Average Peer Score | X_infas360esg_averagePeerScore | Decimal | 20 | NA | Average ESG ranking for the Sustainability Accounting Standards Board (SASB) industry peer group of the company. |
| Data Depth Indicator | X_infas360esg_dataDepthIndicator | Text | 10 | NA | Indicates the level of predictive data available for ESG calculations. |
| Environmental - Average Peer Score | X_infas360esg_environmentAveragePeerScore | Decimal | 20 | NA | Average environmental ranking for the SASB industry peer group of the company. |
| Environmental - Data Depth Indicator | X_infas360esg_environmentDataDepthIndicator | Text | 10 | NA | Indicates the level of predictive data available for environmental score calculations. |
| Environmental - Emissions and Climate - GHG Emission Score | X_infas360esg_environmentalEmmisionGHGEmmisionScore | Integer | NA | NA | Performance rating of the company related to the measurement and management of GHG (Greenhouse Gas) emissions. |
| Environmental - Emissions and Climate - Risk Score | X_infas360esg_environmentalEmmisionClimateRiskScore | Integer | NA | NA | Performance rating of the company related to awareness and readiness to address climate-related impacts. |
| Environmental - Emissions and Climate Score | X_infas360esg_environmentEmmisionClimateScore | Integer | NA | NA | The risk score for the performance of the company related to the GHG emissions and climate. |
| Environmental - Natural Resource Energy Management Score | X_infas360esg_environmentalNaturalEnergyManagementScore | Integer | NA | NA | Performance rating of the company related to the energy management efforts. |
| Environmental - Natural Resource Land Use Biodiversity Score | X_infas360esg_environmentalNaturalLandUseBiodiversityScore | Integer | NA | NA | Performance rating of the company related to land use and biodiversity loss. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Environmental - Natural Resource Material Sourcing Management Score | X_infas360esg_environmentalNaturalMaterialSourcingManagementScore | Integer | NA | NA | Performance rating of the company related to procurement, materials sourcing, and management. |
| Environmental - Natural Resource Pollution Prevention Management Score | X_infas360esg_environmentalNaturalPollutionPreventionManagementScore | Integer | NA | NA | Performance rating of the company related to policies and impact related to pollution management. |
| Environmental - Natural Resource Score | X_infas360esg_environmentNaturalResourceScore | Integer | NA | NA | The risk score of the company related to the management of natural resources. |
| Environmental - Natural Resource Waste Hazard Management Score | X_infas360esg_environmentalNaturalWasteHazardManagementScore | Integer | NA | NA | Performance rating of the company related to waste and hazards management efforts. |
| Environmental - Natural Resource Water Management Score | X_infas360esg_environmentalNaturalWaterManagementScore | Integer | NA | NA | Performance rating of the company related to water management efforts. |
| Environmental - Opportunities Certification Score | X_infas360esg_environmentalOpportunitiesCertificationScore | Integer | NA | NA | Performance rating of the company to indicate whether the company has environmental related certifications for its branches and headquarters. |
| Environmental - Opportunities Score | X_infas360esg_environmentOpportunitiesScore | Integer | NA | NA | Performance rating of the company for initiatives toward sustainable and green activities. |
| Environmental - Peer Percentile Group | X_infas360esg_environmentPeerPercentileGroup | Text | 50 | NA | Percentile environmental ranking of the company compared to the SASB industry peer group. |
| Environmental - Ranking Score | X_infas360esg_environmentScore | Integer | NA | NA | Overall environmental ranking of the company. |
| Environmental - Reason | X_infas360esg_environmentalReason | Nested field group | NA | NA | Reason for the overall environmental ranking. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Environmental - Risk Compliance Score | X_infas360esg_environmentalRiskComplainceScore | Integer | NA | NA | Performance rating of the company related to adherence to environmental regulations. |
| Environmental - Risk Score | X_infas360esg_environmentRiskScore | Integer | NA | NA | Performance rating of the company related to environmental risk. |
| ESG Score | X_infas360esg_esgScore | Integer | NA | NA | Overall ESG ranking that indicates the environmental, social, and governance risk factors of the company. |
| ESG Score Date | X_infas360esg_esgScoreDate | Date | NA | NA | Date of calculation of the ESG risk ranking. |
| Governance - Average Peer Score | X_infas360esg_governanceAveragePeerScore | Decimal | 20 | NA | Average governance ranking for the SASB industry peer group of the company. |
| Governance - Business Resilience Score | X_infas360esg_governanceBusinessResilienceScore | Integer | NA | NA | Performance rating for the business sustainability and resiliency of the company. |
| Governance - Business Resilience Sustainability Score | X_infas360esg_governanceBusinessResilienceSustainabilityScore | Integer | NA | NA | Performance rating for the ability to be resilient against volatility, economic, and weather-related events. |
| Governance - Corporate Behaviour Related Certification Score | X_infas360esg_governanceRelatedCertificationScore | Integer | NA | NA | Performance rating for the adherence of the company to formal governance structures through certifications. |
| Governance - Corporate Behaviour Score | X_infas360esg_governanceCorporateBehaviourScore | Integer | NA | NA | The risk score that indicates the overall behavior or conduct of the company related to governance. |
| Governance - Corporate Board Accountability Score | X_infas360esg_governanceCorporateBoardAccountabilityScore | Integer | NA | NA | Performance rating for the level of accountability of the board of directors of the company. |
| Governance - Corporate Business Ethics Score | X_infas360esg_governanceCorporateBusinessEthicsScore | Integer | NA | NA | Performance rating for the commitment of the company to conduct ethical business practices. |
| Governance - Corporate Business Transparency Score | X_infas360esg_governanceCorporateBusinessTransparencyScore | Integer | NA | NA | Performance rating for the commitment of the company to operate in a transparent and accountable manner. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Governance - Corporate Compliance Behaviour Score | X_infas360esg_governanceCorporateComplianceBehaviourScore | Integer | NA | NA | Performance rating for the adherence of the company to regulatory requirements and absence of liabilities. |
| Governance - Corporate Shareholder Rights Score | X_infas360esg_governanceCorporateShareholderRightsScore | Integer | NA | NA | Performance rating for the quality and use of appropriate channels for shareholders to enact their rights. |
| Governance - Corporate Score | X_infas360esg_governanceCorporateGovernanceScore | Integer | NA | NA | Risk score for the governance practices of the company. |
| Governance - Data Depth Indicator | X_infas360esg_governanceDataDepthIndicator | Text | 10 | NA | Indicates the level of predictive data available for governance score calculations. |
| Governance - Peer Percentile Group | X_infas360esg_governancePeerPercentileGroup | Text | 50 | NA | Percentile governance ranking of the company compared to the SASB industry peer group. |
| Governance - Ranking Score | X_infas360esg_governanceRankingScore | Integer | NA | NA | Overall governance ranking of the company. |
| Governance - Reason | X_infas360esg_governanceReason | Nested field group | NA | NA | Reason for the overall governance ranking. |
| Peer Percentile Group | X_infas360esg_peerPercentileGroup | Text | 50 | NA | Percentile ranking of the ESG Ranking of the company compared to the SASB industry peer group. |
| Social - Average Peer Score | X_infas360esg_socialAveragePeerScore | Decimal | 20 | NA | Average social ranking for the SASB industry peer group of the company. |
| Social - Certification Score | X_infas360esg_socialCertificationScore | Integer | NA | NA | Risk score for the social-related certifications of the company. |
| Social - Certification Related Score | X_infas360esg_socialRelatedCertificationScore | Integer | NA | NA | Performance rating for the commitment of the company to pursue formal processes and management systems related to social issues. |
| Social - Community Corporate Philanthropy Score | X_infas360esg_socialCorporatePhilanthropyScore | Integer | NA | NA | Performance rating of the company towards engagement and contributions to the community through philanthropic initiatives. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social - Community Engagement Score | X_infas360esg_socialCommunityEngagementScore | Integer | NA | NA | Performance rating of the company related to the community engagement. |
| Social - Community Score | X_infas360esg_socialCommunityScore | Integer | NA | NA | Risk score for community engagement of the company. |
| Social - Customers Data Privacy Score | X_infas360esg_socialCustomersDataPrivacyScore | Integer | NA | NA | Performance rating for the vulnerability of the company to breaches related to personal and customer data. |
| Social - Customers Products and Services Score | X_infas360esg_socialCustomersProductServiceScore | Integer | NA | NA | Performance rating of the company related to customer engagement activities for its products and services. |
| Social - Customers Score | X_infas360esg_socialCustomersScore | Integer | NA | NA | Risk score for the customer engagement of the company. |
| Social - Data Depth Indicator | X_infas360esg_socialDataDepthIndicator | Text | 10 | NA | Indicates the level of predictive data available for social score calculations. |
| Social - Human Capital Diversity and Inclusion Score | X_infas360esg_socialHumanCapitalDiversityInclusionScore | Integer | NA | NA | Performance rating of the company related to diversity and inclusion within the company and among its leadership. |
| Social - Human Capital Health Safety Score | X_infas360esg_socialHumanCapitalHealthSafetyScore | Integer | NA | NA | Performance rating for the responsibility of the company for employee health and safety. |
| Social - Human Capital Labor Relations Score | X_infas360esg_socialHumanCapitalLaborRelationsScore | Integer | NA | NA | Performance rating for the quality of the company - employee relationships. |
| Social - Human Capital Right Abuse Score | X_infas360esg_socialHumanRightAbuseScore | Integer | NA | NA | Performance rating for the coverage of potential human rights abuses within the operations of the company. |
| Social - Human Capital Score | X_infas360esg_socialHumanCapitalScore | Integer | NA | NA | Risk score for the human capital management of the company. |
| Social - Human Capital Training Education Score | X_infas360esg_socialHumanCapitalTrainingEducationScore | Integer | NA | NA | Performance rating for the focus of the company on employee training and education. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social - Peer Percentile Group | X_infas360esg_socialPeerPercentileGroup | Text | 50 | NA | Percentile ranking of the social ranking of the company compared to the SASB industry peer group. |
| Social - Products and Services Cyber Risk Score | X_infas360esg_socialProductServiceCyberRiskScore | Integer | NA | NA | Performance rating for the vulnerability of the company to business disruption from cyber-related incidents. |
| Social - Products and Services Quality Management Score | X_infas360esg_socialProductQualityManagementScore | Integer | NA | NA | Performance rating for the activities of the company related to the quality of its product and service portfolios. |
| Social - Products and Services Score | X_infas360esg_socialProductServiceScore | Integer | NA | NA | Risk score for the products and services of the company. |
| Social - Ranking Score | X_infas360esg_socialRankingScore | Integer | NA | NA | Overall social ranking of the company. |
| Social - Reason | X_infas360esg_socialReason | Nested field group | NA | NA | Reason for the overall social ranking. |
| Social - Supplier Engagement Score | X_infas360esg_socialSupplierEngagementScore | Integer | NA | NA | Performance rating for the quality of relationships and engagement of the company with its suppliers. |
| Social - Supplier Score | X_infas360esg_socialSupplierScore | Integer | NA | NA | Risk score for the supplier engagement of the company. |

## Environmental - Reason field group of the Supplier business entity

The Environmental - Reason field group stores the details of a reason for the overall environmental ranking of a company.

The following table describes the fields that the Environmental - Reason nested field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Reason Code | X_infas360esg_environmentalReasonCode | Integer | NA | NA | Unique code assigned by Dun & Bradstreet to indicate the reason that influences the overall environmental ranking. |
| Reason Description | X_infas360esg_environmentalReasonDescription | Text | 255 | NA | Description of the reason that influences the overall environmental ranking. |
| Reason Priority | X_infas360esg_environmentalReasonPriority | Integer | NA | NA | The order of importance assigned to the environmental factors of the subject company. |

## Social - Reason field group of the Supplier business entity

The Social - Reason field group stores the details of a reason for the overall social ranking of a company.

The following table describes the fields that the Social - Reason nested field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Reason Code | X_infas360esg_socialReasonCode | Integer | NA | NA | Unique code assigned by Dun & Bradstreet to indicate the reason that influences the overall social ranking. |
| Reason Description | X_infas360esg_socialReasonDescription | Text | 255 | NA | Description of the reason that influences the overall social ranking. |
| Reason Priority | X_infas360esg_socialReasonPriority | Integer | NA | NA | The order of importance assigned to the social factors of the subject company. |

## Governance - Reason field group of the Supplier business entity

The Governance - Reason field group stores the details of a reason for the overall governance ranking of a company.

The following table describes the fields that the Governance - Reason nested field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Reason Code | X_infas360esg_governanceReasonCode | Integer | NA | NA | Unique code assigned by Dun & Bradstreet to indicate the reason that influences the overall governance ranking. |
| Reason Description | X_infas360esg_governanceReasonDescription | Text | 255 | NA | Description of the reason that influences the overall governance ranking. |
| Reason Priority | X_infas360esg_governanceReasonPriority | Integer | NA | NA | The order of importance assigned to the governance factors of the subject company. |

## ESG Risk Rating (Sustainalytics) field group of the Supplier business entity

The ESG Risk Rating (Sustainalytics) field group stores the Sustainalytics environmental, social, and governance risk ratings of a company.

The following table describes the fields that the ESG Risk Rating (Sustainalytics) field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Environmental - Risk Score | X_infas360esg_environmentRiskScore | Decimal | 20 | NA | Unmanaged score of the environment cluster. |
| ESG Risk Category | X_infas360esg_riskcategory | Text | 10 | NA | Risk category assigned to the ESG rating. |
| ESG Risk Category - Momentum | X_infas360esg_esgRiskCategoryMomentum | Text | 13 | NA | Year-on-year absolute change in the ESG risk category. |
| ESG Risk Percentile - Subindustry | X_infas360esg_esgRiskPercentileSubindustry | Decimal | 5 | NA | ESG risk score of the company relative to the Sustainalytics sub-industry expressed as a percentage rank. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| ESG Risk Percentile - Universe | X_infas360esg_esgRiskPercentileUniverse | Decimal | 5 | NA | ESG risk score of the company relative to the Sustainalytics research universe expressed as a percentage rank. |
| ESG Risk Rank - Subindustry | X_infas360esg_esgRiskRankSubindustry | Text | 8 | NA | ESG risk score of the company relative to the Sustainalytics sub-industry expressed as a rank. |
| ESG Risk Rank - Universe | X_infas360esg_esgRiskRankUniverse | Text | 8 | NA | ESG risk score of the company relative to the Sustainalytics research universe expressed as a rank. |
| ESG Risk Score | X_infas360esg_esgRiskScore | Decimal | 20 | NA | Overall ESG risk score of the company. |
| ESG Risk Score Average - Universe | X_infas360esg_esgRiskScoreAverageUniverse | Decimal | 5 | NA | Average ESG risk score of all companies in the Sustainalytics research universe. |
| ESG Risk Score Average - Subindustry | X_infas360esg_esgRiskScoreAverageSubindustry | Decimal | 5 | NA | Average ESG Risk Score of all companies in the Sustainalytics sub-industry. |
| Governance - Risk Score | X_infas360esg_governanceRiskScore | Decimal | 20 | NA | Unmanaged risk score of the governance cluster. |
| Overall Beta | X_infas360esg_overallBeta | Decimal | 20 | NA | Deviation of the overall exposure of the company from the overall exposure of the sub-industry. |
| Overall Excess Exposure Score | X_infas360esg_overallExcessExposureScore | Decimal | 20 | NA | Deviation of the exposure score of the company from the exposure score of the sub-industry. |
| Overall Exposure Category | X_infas360esg_overallExposureCategory | Text | 6 | NA | Exposure category in the ESG risk rating assigned to the overall exposure score of the company. |
| Overall Exposure Category - Momentum | X_infas360esg_overallExposureCategoryMomentum | Text | 13 | NA | Year-on-year absolute change in the overall exposure category. |
| Overall Exposure Score | X_infas360esg_overallExposureScore | Decimal | 20 | NA | Extent of the ESG risk exposure of the company. |
| Overall Exposure Score - Momentum | X_infas360esg_overallExposureScoreMomentum | Decimal | 7 | NA | Year-on-year absolute change in the overall exposure score. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Overall Manageable Risk Factor | X_infas360esg_overallManageableRiskFactor | Decimal | 20 | NA | Overall percentage of risk that can be managed by the company. |
| Overall Manageable Risk Score | X_infas360esg_overallManageableRiskScore | Decimal | 20 | NA | ESG risk managed by the company through suitable policies, programs, or initiatives. The score ranges from 0 to 100. |
| Overall Managed Risk Score | X_infas360esg_overallManagedRiskScore | Decimal | 20 | NA | ESG risk managed by the company through suitable policies, programs, or initiatives. |
| Overall Management Category | X_infas360esg_overallManagementCategory | Text | 7 | NA | Management category in the ESG risk rating assigned to the overall management score of the company. |
| Overall Management Category - Momentum | X_infas360esg_overallManagementCategoryMomentum | Text | 13 | NA | Year-on-year absolute change in the overall management category. |
| Overall Management Gap Score | X_infas360esg_overallManagementGapScore | Decimal | 20 | NA | Total risk that the company can manage but not yet managing. The score ranges from 0 to the overall manageable risk score of the company. |
| Overall Management Score | X_infas360esg_overallManagementScore | Decimal | 20 | NA | Measure of the management decisions and handling of ESG risks across the company issues. |
| Overall Management Score - Momentum | X_infas360esg_overallManagementScoreMomentum | Decimal | 7 | NA | Year-on-year absolute change in the overall management score. |
| Overall Unmanageable Risk Score | X_infas360esg_overallUnmanageableRiskScore | Decimal | 20 | NA | ESG risk that can't be managed by the company. The score ranges from 0 to the overall manageable risk score of the company. |
| Social - Risk Score | X_infas360esg_socialRiskScore | Decimal | 20 | NA | Unmanaged risk score of the social cluster. |

## Executive Members field group of Supplier business entity

The Executive Members field group stores the executive members-related information, such as company name, business title, and executive type.

The following table describes the fields that the Executive Members field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Business Title | businessTitle | Text | 255 | NA | Business title for the executive member. |
| Company Name | companyName | Text | 255 | NA | Company name of the executive member. |
| Executive Type | executiveType | Lookup | NA | ExecutiveType | Type of the executive member. For example, Board of Directors, Chief Executive Officer, Chief Financial Officer, or Managing Director. |
| Full Name | fullName | Text | 50 | NA | Full name of the executive member of the supplier organization. |

## Financial field group of Supplier business entity

The Financial field group stores financial information of a supplier organization, such as currency, unit, and financial reliability.

The following table describes the fields that the Financial field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Amount | amount | Double | NA | NA | Total value of the finance. |
| Currency | currency | Lookup | NA | Currency | Currency in which the financial information is collected. |
| Finance Info Type | financeInfoType | Lookup | NA | FinanceInfoType | Type of financial information. For example, equity, annual income, or debt. |
| Finance Reliability | financeReliability | Lookup | NA | FinanceReliability | Reliability of the financial data. For example, actual or estimate. |
| Time Period | timePeriod | Text | 255 | NA | Finance period for which the data is collected. |
| Time Period Type | timePeriodType | Lookup | NA | TimePeriodType | Type of the finance period. For example, quarterly or yearly. |
| Unit | unit | Lookup | NA | FinancialUnit | Unit of the amount. For example, thousands, millions, or billions. |

## Identifier field group of Supplier business entity

The Identifier field group stores the identifier related information of a supplier organization, such as tax numbers, D-U-N-S number or National Provider Identifier (NPI) numbers for healthcare providers.

The following table describes the fields that the Identifier field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date | NA | NA | Expiry date of the identifier. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Issued date of the identifier. |
| Identifier Type | identifierType | NA | NA | OrganizationIdentifierType | Type of identifier. |
| Identifier Value | identifierValue | Text | 50 | NA | Value of identifier, such as D-U-N-S number or National Provider Identifier. |
| Issuing Authority | issuingAuthority | Lookup | NA | IssuingAuthority | Authority that has issued the identifier to the supplier organization. |
| Status | status | Lookup | NA | IdentifierStatus | Status of the alternate identifier. For example, effective, disqualified, expired, or temporary. |

## Industry Classification field group of the Supplier business entity

The Industry Classification field group stores the classification details of a supplier, such as classification type and code.

The following table lists the fields that the Industry Classification field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Classification Type | X_infas360esg_IndustryClassificationType | Lookup | NA | infac360lei_ClassificationType | Type of classification system that groups suppliers. |
| Classification Level 1 | X_infas360esg_classificationLevel1Label | Lookup | NA | infac360lei_ClassificationLevel1Code | Code value that indicates the group to which a supplier belongs. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Classification Level 1 Label | X_infas360esg_classificationLevel2Label | Lookup | NA | infac360lei_ClassificationLevel1Label | Hierarchical classification that indicates the sector to which a supplier belongs. |
| Classification Level 2 | X_infas360esg_classificationLevel3Label | Lookup | NA | infac360lei_ClassificationLevel2Code | Code value that indicates the group to which a supplier belongs. |
| Classification Level 2 Label | X_infas360esg_classificationLevel4Label | Lookup | NA | infac360lei_ClassificationLevel2Label | Hierarchical classification that indicates the industry group to which a supplier belongs. |
| Classification Level 3 | X_infas360esg_classificationLevel1Code | Lookup | NA | infac360lei_ClassificationLevel3Code | Code value that indicates the group to which a supplier belongs. |
| Classification Level 3 Label | X_infas360esg_classificationLevel2Code | Lookup | NA | infac360lei_ClassificationLevel3Label | Hierarchical classification that indicates the industry to which a supplier belongs. |
| Classification Level 4 | X_infas360esg_classificationLevel3Code | Lookup | NA | infac360lei_ClassificationLevel4Code | Code value that indicates the group to which a supplier belongs. |
| Classification Level 4 Label | X_infas360esg_classificationLevel4Code | Lookup | NA | infac360lei_ClassificationLevel4Label | Hierarchical classification that indicates the sub-industry to which a supplier belongs. |

## Insurance field group of Supplier business entity

The Insurance field group stores the insurance-related information, such as the name of the insurance provider, the policy number, the insurance type, and the validity.

The following table describes the fields that the Insurance field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Currency | currency | Lookup | NA | Currency | Currency in which the supplier organization is insured. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Expiry date of the insurance. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Start date of the insurance. |
| Insurance Holder | insuranceHolder | Text | 255 | NA | Name of the insurance holder. |
| Insurance Provider | insuranceProvider | Text | 255 | NA | Company that provides the insurance. |
| Insurance Type | insuranceType | Lookup | NA | InsuranceType | Type of insurance, such as cargo insurance, casualty, commercial auto, or shipping. |
| Policy Number | policyNumber | Text | 100 | NA | Policy number of the insurance. |
| Status | status | Text | 255 | NA | Status of the insurance. For example, active or expired. |
| Sub Type | subType | Lookup | NA | InsuranceSubType | Insurance subtype. For example, if the insurance type is group, the subtypes might be extended lenders mortgage, family health gold, mediexcel horizon, or platinum travel. |
| Unit | unit | Lookup | NA | FinancialUnit | Unit for the amount. For example, billion, million, or thousand. |
| Value | value | Double | NA | NA | Amount insured. |

## Phone field group of the Supplier business entity

The Phone field group stores the phone details, such as phone number, phone number extension, and phone type.

The following table describes the fields that the Phone field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | cellPrefix | Text | 1 | NA | Prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the phone number is the default phone number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Indicates whether the supplier is interested to receive unsolicited phone calls from marketers. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Date until when the phone number was active or will be active. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Date from when the phone number is active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the phone number validation service verified the phone number. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | internationalPrefix | Text | 3 | NA | Prefix used to select an international telephone circuit. |
| ISO | iso | Text | 2 | NA | ISO country code. |
| National Destination Code | nationalDestinationCode | Text | 10 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits which must be dialed before an area or city code. |
| NDC Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether the phone number includes the National Destination Code. |
| Phone Number | phoneNumber | Text | 20 | NA | Phone number of the supplier organization. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Phone Number Extension | phoneNumberExtension | Text | 10 | NA | Extension to phone number. |
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, cell, fax, freephone, landline, mobile, or pager. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, business, customer service - group market, customer service toll free - individual market, or small group market. |
| Prefix Number | prefixNumber | Text | 3 | NA | Country dialing code. |
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as the phone number is publicly available or active. |
| Verification Status Code | validationStatusCode | Text | 50 | NA | Validation status that the phone number validation service returns. |
| Verification Message | validationMessage | Text | 255 | NA | Validation message that the phone number validation service returns. |

## Reference Details field group of Supplier business entity

The Reference Details field group stores the reference details, such as company name, contact name, and company contact number.

The following table describes the fields that the Reference Details field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Company Name | companyName | Text | 255 | NA | Name of the reference organization. |
| Contact Name | contactName | Text | 255 | NA | Name of the contact in the reference organization. |
| Contact Number | contactNumber | Text | 255 | NA | Contact number of the reference organization. |

## Risk Questions field group of Supplier business entity

The Risk Questions field group stores information about risk-related questions.

The following table describes the fields that the Tax field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Anti-Bribery - Will the supplier interact with government officials on behalf of the buyer? | question1 | Boolean | NA | NA | Indicates whether the supplier organization interacts with government officials on behalf of the buyer. |
| Personally Identifiable Information - Will the supplier process or store personal information of any of the buyer's employees or customers? | question2 | Boolean | NA | NA | Indicates whether the supplier organization processes or store personal information of any of the buyer's employees or customers. |
| Protected Health Information - Will the supplier collect and store data relating to health of any of the buyer's employees or customers? | question3 | Boolean | NA | NA | Indicates whether the supplier organization collects and store data relating to health of the buyer's employees or customers. |
| Will the supplier interact with customers or provide any customer-facing services? | question4 | Boolean | NA | NA | Indicates whether the supplier organization interacts with customers or provides any customer-facing services. |

## Segment field group of Supplier business entity

The Segment field group stores the segment related information, such as segment type and segment name.

The following table describes the fields that the Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Segment Name | segmentName | Lookup | NA | SegmentValue | Supplier segment name. |
| Segment Type | segmentType | Lookup | NA | SegmentType | Segment type of the supplier organization. For example, region or supplier criticality. |

## Social Media field group of Supplier business entity

The Social Media field group stores information about the social media identifiers of a supplier organization.

The following table describes the fields that the Social Media field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social Media Handle | socialMediaHandle | Text | 255 | NA | Social media identifier or name of the supplier organization. |
| Social Media Type | socialMediaType | Lookup | NA | SocialHandleTyp e | Type of social media platform. For example, Facebook or Twitter. |

## Sourcing Manager field group of Supplier business entity

The Sourcing Manager field group stores the sourcing manager related information, such as name and employee ID.

The following table describes the fields that the Sourcing Manager field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Employee ID | sourcingManagerEmpl oyeeId | Text | 255 | NA | Employee ID of the sourcing manager. |
| Name | sourcingManagerNam e | Text | 255 | NA | Name of the sourcing manager. |

## Sustainable Industry Classification field group of the Supplier business entity

The Sustainable Industry Classification field group stores the industry classification details of a supplier.

The following table describes the fields that the Sustainable Industry Classification field group of the Supplier business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Classification Type | X_infas360esg_classificationType | Lookup | NA | infas360esg_ClassificationType | Type of classification of the company. |
| Subsector | X_infas360esg_level2 | Text | 255 | NA | Subsector that the company is categorized into. |
| Sector | X_infas360esg_level1 | Text | 50 | NA | Sector that the company is categorized into. |
| Industry | X_infas360esg_level3 | Text | 255 | NA | Industry that the company is categorized into. |

## Stock field group of Supplier business entity

The Stock field group stores the stock related information, such as ticker symbol, exchange name, and country.

The following table describes the fields that the Stock field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country where the stock exchange is located. |
| Exchange Name | exchangeName | Text | 255 | NA | Name of the stock exchange that trades the shares of the supplier organization. |
| Ticker Symbol | tickerSymbol | Text | 255 | NA | Abbreviation used to identify the publicly traded shares of the organization. |

## Supplier Alerts field group of Supplier business entity

The Supplier Alerts field group stores information, such as message, message type, and external link.

The following table describes the fields that the Supplier Alerts field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date | NA | NA | Expiry date of the supplier alert. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Start date of the supplier alert. |
| External Link | externalLink | Text | 255 | NA | External link to the supplier alert message. |
| Message | message | Text | 255 | NA | Supplier alert message. |
| Message Type | messageType | Text | 255 | NA | Type of supplier alert message. |

## Tax field group of Supplier business entity

The Tax field group stores tax-related information, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid of the supplier organization.

The following table describes the fields that the Tax field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country of taxation. |
| Currency | currency | Lookup | NA | Currency | Currency in which the tax is paid. |
| Effective End Date | effectiveEndDate | Date | NA | NA | End date of the tax period. |
| Effective Start Date | effectiveStartDate | Date | NA | NA | Start date of the tax period. |
| State | state | Lookup | NA | State | State within the country of taxation. |
| Tax Authority | taxAuthority | Lookup | NA | TaxAuthority | Tax authority. For example, Internal Revenue Service (IRS) or HM Revenue and Customs (HMRC). |
| Tax Number | taxNumber | Text | 50 | NA | Unique number that identifies the supplier organization for tax purposes. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Tax Number Type | taxNumberType | Lookup | NA | TaxNumberType | Type of the tax number. For example, tax number can be Individual Taxpayer Identification Number (ITIN) or Social Security Number. |
| Tax Paid | taxPaid | Text | 50 | NA | Tax amount that the supplier organization has paid. |
| Tax Payer Type | taxPayerType | Lookup | NA | TaxPayerType | Type of tax payer. For example, business entity, estate, or individual. |

# Emission business entity model

Emission business entity stores information about the greenhouse gas (GHG) emission of a company. This business entity contains some basic fields and some field groups.

## General fields of the Emission business entity

The general fields store basic information about the greenhouse gas (GHG) emission of a company.

The following table describes the fields that the general fields of the Emission business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Allocation Factors | infas360esg_allocationFactors | Text | 255 | NA | Factors based on which a company allocates the emission. |
| Allocation Ratio | infas360esg_allocationRatio | Decimal | 20 | NA | Ratio of allocation factor emission to the GHG emission. |
| Allocation Type | infas360esg_allocationType | Lookup | NA | infas360esg_AllocationType | Method to allocate emissions from a supplier of the company. |
| Data Type | infas360esg_dataType | Lookup | NA | infas360esg_DataType | Type of data used by organizations in disclosing GHG emissions. |
| GHG Emissions - CH4 | infas360esg_ghgEmissionsCH4 | Decimal | 20 | NA | Amount of methane (CH4) emissions. |
| GHG Emissions - CO2e | infas360esg_ghgEmissionsCO2e | Decimal | 20 | NA | Equivalent amount of carbon dioxide emissions. |
| GHG Emissions - CO2 | infas360esg_ghgEmissionsCO2 | Decimal | 20 | NA | Amount of carbon dioxide (CO2) emissions. |
| GHG Emissions - HFCs | infas360esg_ghgEmissionsHFCs | Decimal | 20 | NA | Amount of Hydrofluorocarbons (HFCs) emissions. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| GHG Emissions - N2O | infas360esg_ghgEmissionsN2O | Decimal | 20 | NA | Amount of nitrous oxide (N2O) emissions. |
| GHG Emissions - PFCs | infas360esg_ghgEmissionsPFCs | Decimal | 20 | NA | Amount of Perfluorocarbons (PFCs) emissions. |
| GHG Emissions - SF6 | infas360esg_ghgEmissionsSF6 | Decimal | 20 | NA | Amount of Sulfur Hexafluoride (SF6) emissions. |
| Level | infas360esg_level | Lookup | NA | infas360esg_Level | Rating type of the emission by a company. |
| Location or Site | infas360esg_locationSite | Text | 255 | NA | Location of direct-emitting facilities. |
| Measurement Unit of GHG Emissions - CO2e | infas360esg_ghgEmissionsCO2eUnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsCO2eUnitofMeasure | Unit of measurement of CO2e emission concentration. |
| Measurement Unit of GHG Emissions - CO2 | infas360esg_ghgEmissionsCO2UnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsCO2UnitofMeasure | Unit of measurement of GHG CO2 emission concentration. |
| Measurement Unit of GHG Emissions - CH4 | infas360esg_ghgEmissionsCH4UnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsCH4UnitofMeasure | Unit of measurement of CH4 emission concentration. |
| Measurement Unit of GHG Emissions - HFCs | infas360esg_ghgEmissionsHFCsUnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsHFCsUnitofMeasure | Unit of measurement of HFCs emission concentration. |
| Measurement Unit of GHG Emissions - N2O | infas360esg_ghgEmissionsN2OUnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsN2OUnitofMeasure | Unit of measurement of N2O emission concentration. |
| Measurement Unit of GHG Emissions - PFCs | infas360esg_ghgEmissionsPFCsUnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsPFCsUnitofMeasure | Unit of measurement of PFCs emission concentration. |
| Measurement Unit of sGHG Emissions - SF6 | infas360esg_ghgEmissionsSF6UnitofMeasure | Lookup | NA | infas360esg_ghgEmissionsPFCsUnitofMeasure | Unit of measurement of SF6 emission concentration. |
| Reporting Period End Date | infas360esg_reportingperiodEndDate | Date | NA | NA | Date until when the reporting period is effective. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Reporting Period Start Date | infas360esg_reportingperiodStartDate | Date | NA | NA | Date from when the reporting period is effective. |
| Scope | infas360esg_scope | Text | 255 | NA | Type of emission to identify whether the emissions are owned or controlled by the company or are a consequence of the activities of the company but occur from sources not owned or controlled by the company. |
| Supplier Allocation | infas360esg_supplierAllocation | Boolean | NA | NA | Allocation of emission from a supplier of the company. |

### Activity Data field group of the Emission business entity

The Activity Data field group stores the quantitative measure of a level of activity that results in GHG emissions.

The following table describes the fields that the Activity Data field group of the Emission business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Activity Name | infas360esg_activityName | Text | 255 | NA | Name of the activity the company is involved. |
| Emission Factor | infas360esg_emissionFactor | Decimal | 20 | NA | Factor that converts activity data into GHG emissions data. |
| Emission Factor Description | infas360esg_emissionFactorDescription | Text | 255 | NA | Description of the emission factor. |
| Emission Factor Source | infas360esg_emissionFactorSource | Text | 255 | NA | Data source for the emission factor. |
| Measurement Unit | infas360esg_unitofMeasure | Lookup | NA | infas360esg_UnitofMeasure | Unit of measurement for the emission factor. |
| Quantity | infas360esg_quantity | Text | 255 | NA | Level of activity for GHG emission. |

## Location business entity model

The Location business entity stores information about locations. This business entity contains basic fields and field groups.

## General fields of the Location business entity

The general fields store basic information about a location, such as location type and ownership type.

The following table describes the general fields of the Location business entity:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Name | X_infa360loc_name | Text | 255 | NA | Name of a location. |
| Location Type | X_infa360loc_locationType | Lookup | NA | infa360loc_LocationType | Type of location, such as a factory, hospital, or office. |
| Location Form | X_infa360loc_locationForm | Lookup | NA | infa360loc_LocationForm | Form of a location, such as building, jurisdiction, or virtual. |
| Ownership Type | X_infa360loc_ownershipType | Lookup | NA | infa360loc_OwnershipType | Type of ownership of the location, such as leased or owned. |
| Opening Date | X_infa360loc_openDate | Date and Time | NA | NA | Date since when the location is open. |
| Closing Date | X_infa360loc_closeDate | Date and Time | NA | NA | Date until when the location is open. |
| Short Description | X_infa360loc_shortDescription | Text | 255 | NA | Brief description of a location. |
| Long Description | X_infa360loc_longDescription | Text | 255 | NA | Detailed description of a location. |
| Standard Time Zone | X_infa360loc_standardTimeZone | Lookup | NA | infa360loc_StandardTimeZone | Standard time zone of a location based on the IANA (Internet Assigned Numbers Authority)time zone database. |
| URL | X_infac360loc_url | Text | 255 | NA | URL to identify the network address of a location, such as website, blog, Facebook or Skype. |

## Alternate Names field group of the Location business entity

The Alternate Names field group stores the information related to alternative names, such as an alternative name, effective start date, and effective end date. A supplier might use alternative names, such as a legal name, alias, and trading name. An alternative name might be active during a particular time.

The following table describes the fields of the Alternate Names field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name | X_infa360loc_alternateName | Text | 255 | NA | Alternative name of the location. |
| Effective End Date | X_infa360loc_effectiveEndDate | Date | NA | NA | Date until when the alternative name is active. |
| Effective Start Date | X_infa360loc_effectiveStartDate | Date | NA | NA | Date from when the alternative name is active. |
| Name Type | X_infa360loc_nameType | Lookup | NA | infa360loc_NameType | Alternative name type of the location, such as alias. |

## Email Address field group of the Location business entity

The Email Address field group stores information about electronic addresses, such as email address and status of the email address.

The following table describes the fields of the Email Address field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| Effective End Date | effectiveEndDate | Date and Time | NA | NA | Date until when the electronic address is active. |
| Effective Start Date | effectiveStartDate | Date and Time | NA | NA | Date from when the electronic address is active. |
| Electronic Address | electronicAddress | Text | 255 | NA | Electronic address of the supplier organization. |
| Electronic Address Status | electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of the email address, such as active, blocked, or not in use. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the email verification service verified the electronic address. |
| Hygiene Status | hygieneStatus | Text | 50 | NA | Hygiene status of the electronic address, such as safe to send, invalid, or spam. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Net Protect Code | netProtectCode | Text | 50 | NA | Code that identifies the service or appliance that's monitoring a specific network to filter or detect spam emails. |
| Usage Type | usageType | Lookup | NA | ElectronicAddressUsageType | Intended use or purpose of the electronic address, such as business, work, or personal. |
| Verification Status Code | validationStatusCode | Text | 50 | NA | Validation status of the electronic address. |
| Verification Message | validationMessage | Text | 50 | NA | Message that the email validation service generates to indicate how valid and trusted the address is. |

## Geo Location field group of the Location business entity

The Geo Location field group stores the geographic details of a location, such as the location coordinates.

The following table describes the fields of the Geo Location field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Latitude | X_infa360loc_latitude | Text | 255 | NA | Latitude of the location. |
| Longitude | X_infa360loc_longitude | Text | 255 | NA | Longitude of the location. |

## Identifier field group of the Location business entity

The Identifier field group stores the identifier information of a location, such as identifier type and identifier issuer.

The following table describes the fields of the Identifier field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | X_infa360loc_effectiveEndDate | DateTime | NA | NA | Expiry date of the identifier. |
| Effective Start Date | X_infa360loc_effectiveStartDate | DateTime | NA | NA | Issued date of the identifier. |
| Identifier Issuer | X_infa360loc_identifierIssuer | Text | 255 | NA | Authority that issued the identifier to an organization, such as Dun & Bradstreet or a government agency. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Identifier Type | X_infa360loc_identifierType | Lookup | NA | infa360loc_IdentifierType | Type of the identifier, such as Global Location Number or Google Place ID. |
| Identifier Value | X_infa360loc_identifierValue | Text | 255 | NA | Value of the identifier. |
| Usage Type | X_infa360loc_usageType | Lookup | NA | infa360loc_UsageType | Type of usage of the identifier, such as old, primary, or secondary. |

## Indicator field group of the Location business entity

The Indicator field group stores the indicator details that you use to identify a location.

The following table lists the fields of the Indicator field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Indicator Type | X_infa360loc_indicatorType | Lookup | NA | infa360loc_IndicatorType | Indicates the type of location, such as cash point, fire inspection, or parking. |
| Indicator Value | X_infa360loc_indicatorValue | Lookup | NA | infa360loc_IndicatorValue | Actual value of the indicator, such as multilevel or underground. |
| Indicator Group | X_infa360loc_indicatorGroup | Lookup | NA | infa360loc_IndicatorGroup | Group of the indicator, such as compliance or facility. |

## Operating Hours field group of the Location business entity

The Operating Hours field group stores the operating hours information of a location.

The following table describes the fields of the Operating Hours field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Days of Week | X_infa360loc_daysOfweek | Lookup | NA | infa360loc_DaysOfweek | Days of a week when the location is operational. |
| All Day | X_infa360loc_allDay | Boolean | NA | NA | Indicates whether the location is operational all day. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Start Time (Hours) | X_infa360loc_startTimeHours | Lookup | NA | infa360loc_StartTimeHours | The hour when the location starts operations. |
| Start Time (Minutes) | X_infa360loc_startTimeMinutes | Lookup | NA | infa360loc_StartTimeMinutes | The minutes of the hour when the location starts operations. |
| Start Time (Seconds) | X_infa360loc_startTimeSeconds | Lookup | NA | infa360loc_StartTimeSeconds | The seconds after the minutes of the hour when the location starts operations. |
| End Time (Hours) | X_infa360loc_endTimeHours | Lookup | NA | infa360loc_EndTimeHours | The hour when the location closes operations. |
| End Time (Minutes) | X_infa360loc_endTimeMinutes | Lookup | NA | infa360loc_EndTimeMinutes | The minutes of the hour when the location closes operations. |
| End Time (Seconds) | X_infa360loc_endTimeSeconds | Lookup | NA | infa360loc_EndTimeSeconds | The seconds after the minutes of the hour when the location closes operations. |

## Operating Hours Exception field group of the Location business entity

The Operating Hours Exception field group stores the exception to the operating hours information for a location.

The following table describes the fields of the Operating Hours Exception field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Description | X_infa360loc_description | Text | 255 | NA | Description of the exception to operating hours of a location when the opening hours are different to normal, such as public holiday availability. |
| End Date and Time | X_infa360loc_end | Date and Time | NA | NA | End data and time of the exception to operating hours for a location.. |
| Start Date and Time | X_infa360loc_start | Date and Time | NA | NA | Start date and time of the exception to operating hours for a location. |

## Phone field group of the Location business entity

The Phone field group stores the phone details of a location, such as phone number, phone number extension, and phone type.

The following table describes the fields of the Phone field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | cellPrefix | Text | 1 | NA | Prefix for the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the phone number is the default phone number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Indicates whether the supplier wants to receive unsolicited phone calls from marketers. |
| Effective End Date | effectiveEndDate | Date | NA | NA | Date until when the phone number was active or will be active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Start Date | effectiveStartDate | Date | NA | NA | Date from when the phone number is active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Indicates whether the phone number validation service verified the phone number. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | internationalPrefix | Text | 3 | NA | Prefix used to select an international telephone circuit. |
| ISO | iso | Text | 2 | NA | ISO country code. |
| National Destination Code | nationalDestinationCode | Text | 10 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or a combination of digits that must be dialed before an area or city code. |
| NDC Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether the phone number includes the National Destination Code (NDC). |
| Phone Number | phoneNumber | Text | 20 | NA | Phone number of the location. |
| Phone Number Extension | phoneNumberExtension | Text | 10 | NA | Extension to phone number. |
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone, such as a cell, fax, freephone, landline, mobile, or pager. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Type of phone usage, such as business, customer service - group market, customer service toll free - individual market, or small group market. |
| Prefix Number | prefixNumber | Text | 3 | NA | Country dialing code. |
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as whether the phone number is publicly available or active. |
| Verification Status Code | validationStatusCode | Text | 50 | NA | Validation status that the phone number validation service returns. |
| Verification Message | validationMessage | Text | 255 | NA | Validation message that the phone number validation service returns. |

## Postal Address field group of the Location business entity

The Postal Address field group stores the postal addresses of a location.

The following table describes the fields of the Postal Address field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Effective End Date | X_infa360loc_effectiveEndDate | Date and Time | NA | NA | Date until when the address is active. |
| Address Effective Start Date | X_infa360loc_effectiveStartDate | Date and Time | NA | NA | Date from when the address is active. |
| Address Line 1 | X_infa360loc_line1 | Text | 255 | NA | Line 1 of the postal address. |
| Address Line 2 | X_infa360loc_line2 | Text | 255 | NA | Line 2 of the postal address. |
| Address Line 3 | X_infa360loc_line3 | Text | 255 | NA | Line 3 of the postal address. |
| Address Line 4 | X_infa360loc_line4 | Text | 255 | NA | Line 4 of the postal address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Type | X_infa360loc_addressType | Lookup | NA | infa360loc_AddressType | Type of postal address, such as physical or P.O. box. |
| Address Usage Type | X_infa360loc_addressUsageType | Lookup | NA | infa360loc_AddressUsageType | Usage type of the address, such as billing or shipping. |
| Altitude | X_infa360loc_altitude | Text | 255 | NA | Altitude of the location. |
| City | X_infa360loc_city | Text | 255 | NA | City of the postal address. |
| Country | X_infa360loc_country | Lookup | NA | infa360loc_Country | District or country of the postal address. |
| District or County | X_infa360loc_district_county | Text | 255 | NA | County of the postal address. |
| Enriched Indicator | X_infa360loc_enrichedIndicator | Lookup | NA | infa360loc_EnrichedIndicator | Validation status of the address, such as error, valid, or not validated. |
| Latitude | X_infa360loc_latitude | Text | 255 | NA | Latitude for the address. |
| Longitude | X_infa360loc_longitude | Text | 255 | NA | Longitude for the address. |
| Postal Code | X_infa360loc_postalCode | Text | 255 | NA | Postal code of the address. |
| Postal Code Extension | X_infa360loc_postalCodeExtension | Text | 255 | NA | Postal code extension of the address. |
| Region | X_infa360loc_region | Text | 255 | NA | Region of the postal address. |
| State | X_infa360loc_state | Lookup | NA | infa360loc_State | State of the postal address. |
| Verification Message | X_infa360loc_verificationMessage | Text | 255 | NA | Validation message that the address verification service returns. |
| Verification Status Code | X_infa360loc_verificationStatusCode | Text | 255 | NA | Validation status that the address verification service returns. |

### Status field group of the Location business entity

The Status field group stores the status information of a location.

The following table describes the fields of the Status field group:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | X_infa360loc_effectiveEndDate | Date and Time | NA | NA | Date until when a location is active. |
| Effective Start Date | X_infa360loc_effectiveStartDate | Date and Time | NA | NA | Date from when a location is active. |
| Status Type | X_infa360loc_statusType | Lookup | NA | infa360loc_StatusType | Type of status of a location, such as operational status or overall status. |
| Status Value | X_infa360loc_statusValue | Lookup | NA | infa360loc_StatusValue | Status of a location, such as active, closed, or inactive. |

# Batch jobs

Use predefined ingress jobs to import the Global Product Classifications (GPC) and Google product category to Product 360 SaaS. You can process the imported data in MDM SaaS. Use predefined egress jobs to export the processed data from MDM SaaS to the Google BigQuery staging store.

Each job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps source system fields with MDM SaaS business entity fields.

# Batch jobs of the Category business entity for Global Product Classification

Use predefined ingress jobs to import product category and hierarchy data from Global Product Classification (GPC) to the Category business entity in Product 360 SaaS.

The following table lists the predefined ingress jobs and their related taskflows, mapping tasks, and mappings to import product category data from Global Product Classification:

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| infa360rtl_ingress_gpc_category_inbound | infa360rtl_tf_gpc_category_inbound | - infa360rtl_mt_gpc_category_brick_inbound_description<br>- infa360rtl_mt_gpc_category_brick_inbound_root<br>- infa360rtl_mt_gpc_category_class_inbound_description<br>- infa360rtl_mt_gpc_category_class_inbound_root<br>- infa360rtl_mt_gpc_category_family_inbound_description<br>- infa360rtl_mt_gpc_category_family_inbound_root<br>- infa360rtl_mt_gpc_category_segment_inbound_description<br>- infa360rtl_mt_gpc_category_segment_inbound_root | - infa360rtl_m_gpc_category_brick_inbound_description<br>- infa360rtl_m_gpc_category_brick_inbound_root<br>- infa360rtl_m_gpc_category_class_inbound_description<br>- infa360rtl_m_gpc_category_class_inbound_root<br>- infa360rtl_m_gpc_category_family_inbound_description<br>- infa360rtl_m_gpc_category_family_inbound_root<br>- infa360rtl_m_gpc_category_segment_inbound_description<br>- infa360rtl_m_gpc_category_segment_inbound_root | Imports product category data from Global Product Classification (GPC) to the Category business entity in Product 360 SaaS. |
| infa360rtl_ingress_gpc_categorytocategory_hierarchy_inbound | infa360rtl_tf_gpc_categorytocategory_hierarchy_inbound | - infa360rtl_mt_gpc_categorytocategory_hierarchy_class_inbound<br>- infa360rtl_mt_gpc_categorytocategory_hierarchy_family_inbound<br>- infa360rtl_mt_gpc_categorytocategory_hierarchy_segment_inbound | - infa360rtl_m_gpc_categorytocategory_hierarchy_class_inbound<br>- infa360rtl_m_gpc_categorytocategory_hierarchy_family_inbound<br>- infa360rtl_m_gpc_categorytocategory_hierarchy_segment_inbound | Imports product hierarchy data from Global Product Classification (GPC) to the Category business entity in Product 360 SaaS. |

# Batch jobs of the Category business entity for Google product category

Use predefined ingress jobs to import product category data from Google product category to the Category business entity in Product 360 SaaS.

The following table lists the predefined ingress jobs and their related taskflows, mapping tasks, and mappings to import product category data from Google product category:

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| infa360rtl_ingress_googleproductcategory_category_inbound | infa360rtl_tf_googleproductcategory_category_inbound | - infa360rtl_mt_googleproductcategory_category_inbound_level1_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level1_root<br>- infa360rtl_mt_googleproductcategory_category_inbound_level2_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level2_root<br>- infa360rtl_mt_googleproductcategory_category_inbound_level3_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level3_root<br>- infa360rtl_mt_googleproductcategory_category_inbound_level4_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level4_root<br>- infa360rtl_mt_googleproductcategory_category_inbound_level5_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level5_root<br>- infa360rtl_mt_googleproductcategory_category_inbound_level6_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level6_root<br>- infa360rtl_mt_googleproductcategory_cate | - infa360rtl_m_googleproductcategory_category_inbound_level1_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level1_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level2_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level2_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level3_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level3_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level4_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level4_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level5_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level5_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level6_description | Imports product category data from Google product category to the Category business entity in Product 360 SaaS. |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | gory_inbound_level7_description<br>- infa360rtl_mt_googleproductcategory_category_inbound_level7_root | - infa360rtl_m_googleproductcategory_category_inbound_level6_root<br>- infa360rtl_m_googleproductcategory_category_inbound_level7_description<br>- infa360rtl_m_googleproductcategory_category_inbound_level7_root | |
| infa360rtl_ingress_googleproductcategory_hierarchy_inbound | infa360rtl_tf_googleproductcategory_categorytocategory_hierarchy_inbound | - infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level1<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level2<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level3<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level4<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level5<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level6<br>- infa360rtl_mt_googleproductcategory_categorytocategory_hierarchy_inbound_level7 | - infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level1<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level2<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level3<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level4<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level5<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level6<br>- infa360rtl_m_googleproductcategory_categorytocategory_hierarchy_inbound_level7 | Imports product hierarchy data from Google product category to the Category business entity in Product 360 SaaS. |

# Batch jobs for Customer 360 SaaS and Google BigQuery integration

Use predefined egress jobs to export master data from Customer 360 SaaS to Google BigQuery staging store.

The following table lists the predefined egress jobs and their related taskflows, mapping tasks, and mappings to export master data from Customer 360 SaaS to Google BigQuery.

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| infac360gbq_egress_household_InfaRetail_Extension_household_master_stg | infa360gbq_customer_tf_household_gbq_outbound_household_stage | - infa360gbq_customer_mt_household_rtl_address_gbq_outbound_household_rtl_address<br>- infa360gbq_customer_mt_household_rtl_phone_gbq_outbound_household_rtl_phone<br>- infa360gbq_customer_mt_household_rtl_root_gbq_outbound_household_rtl_root | - infa360gbq_customer_m_household_rtl_address_gbq_outbound_household_rtl_address<br>- infa360gbq_customer_m_household_rtl_phone_gbq_outbound_household_rtl_phone<br>- infa360gbq_customer_m_household_rtl_root_gbq_outbound_household_rtl_root | Exports master data from Customer 360 SaaS to Google BigQuery staging store. |
| infa360gbq_egress_customer_personXref_InfaRetail_Extension_customer_master_stg | infa360gbq_customer_tf_person_xref_gbq_outbound_person_xref_stage | infa360gbq_customer_mt_person_XREF_gbq_outbound_person_XREF | infa360gbq_customer_m_person_XREF_gbq_outbound_person_XREF | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| infa360gbq_egress_customer_person_gbq_InfaRetail_Extension_customer_master_stg | infa360gbq_customer_tf_person_gbq_outbound_person_stage | - infa360gbq_customer_mt_Person_address_gbq_outbound_person_address<br>- infa360gbq_customer_mt_Person_alternateName_gbq_outbound_person_alternateName<br>- infa360gbq_customer_mt_Person_Citizenship_gbq_outbound_Person_Citizenship<br>- infa360gbq_customer_mt_person_demographic_gbq_outbound_person_demographic<br>- infa360gbq_customer_mt_person_document_gbq_outbound_person_document<br>- infa360gbq_customer_mt_Person_email_gbq_outbound_Person_email<br>- infa360gbq_customer_mt_Person_financial_gbq_outbound_Person_financial<br>- infa360gbq_customer_mt_Person_identifier_gbq_outbound_Person_identifier<br>- infa360gbq_customer_mt_person_insurance_gbq_outbound_person_insurance<br>- infa360gbq_customer_mt_person_lifestyle_gbq_outbound_person_lifestyle<br>- infa360gbq_customer_mt_person_loyalty_gbq_outbound_person_loyalty<br>- infa360gbq_customer_mt_Person_phone_gbq_outbound_Person_phone<br>- infa360gbq_customer_mt_Person_p | - infa360gbq_customer_m_Person_address_gbq_outbound_person_address<br>- infa360gbq_customer_m_Person_alternateName_gbq_outbound_person_alternateName<br>- infa360gbq_customer_m_Person_Citizenship_gbq_outbound_Person_Citizenship<br>- infa360gbq_customer_m_person_demographic_gbq_outbound_person_demographic<br>- infa360gbq_customer_m_person_document_gbq_outbound_person_document<br>- infa360gbq_customer_m_Person_email_gbq_outbound_Person_email<br>- infa360gbq_customer_m_Person_financial_gbq_outbound_Person_financial<br>- infa360gbq_customer_m_Person_identifier_gbq_outbound_Person_identifier<br>- infa360gbq_customer_m_person_insurance_gbq_outbound_person_insurance<br>- infa360gbq_customer_m_person_lifestyle_gbq_outbound_person_lifestyle<br>- infa360gbq_customer_m_person_loyalty_gbq_outbound_person_loyalty<br>- infa360gbq_customer_m_Person_phone_gbq_outbound_Person_phone<br>- infa360gbq_customer_m_Person_professional_gbq_outbound_person_professional<br>- infa360gbq_customer_m_Person_qualification_gbq_outbound_Person_qualification<br>- infa360gbq_customer_m_person_root_gbq | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | rofessional_gbq_outbound_person_professional<br>- infa360gbq_customer_mt_Person_qualification_gbq_outbound_Person_qualification<br>- infa360gbq_customer_mt_person_root_gbq_outbound_person_customer<br>- infa360gbq_customer_mt_person_rtl_address_consent_gbq_outbound_person_rtl_address_consent<br>- infa360gbq_customer_mt_person_rtl_address_gbq_outbound_person_rtl_address<br>- infa360gbq_customer_mt_person_rtl_behav_segment_gbq_outbound_person_rtl_behav_segment<br>- infa360gbq_customer_mt_person_rtl_custom_account_gbq_outbound_person_rtl_custom_account<br>- infa360gbq_customer_mt_person_rtl_custom_asset_gbq_outbound_person_rtl_custom_asset<br>- infa360gbq_customer_mt_person_rtl_demo_segment_gbq_outbound_person_rtl_demo_segment<br>- infa360gbq_customer_mt_person_rtl_email_consent_gbq_outbound_person_rtl_email_consent<br>- infa360gbq_customer_mt_person_rtl_email_gbq_outbound_person_rtl_email | _outbound_person_customer<br>- infa360gbq_customer_m_person_rtl_address_consent_gbq_outbound_person_rtl_address_consent<br>- infa360gbq_customer_m_person_rtl_address_gbq_outbound_person_rtl_address<br>- infa360gbq_customer_m_person_rtl_behav_segment_gbq_outbound_person_rtl_behav_segment<br>- infa360gbq_customer_m_person_rtl_custom_account_gbq_outbound_person_rtl_custom_account<br>- infa360gbq_customer_m_person_rtl_custom_asset_gbq_outbound_person_rtl_custom_asset<br>- infa360gbq_customer_m_person_rtl_demo_segment_gbq_outbound_person_rtl_demo_segment<br>- infa360gbq_customer_m_person_rtl_email_consent_gbq_outbound_person_rtl_email_consent<br>- infa360gbq_customer_m_person_rtl_email_gbq_outbound_person_rtl_email<br>- infa360gbq_customer_m_person_rtl_geo_segment_gbq_outbound_person_rtl_geo_segment<br>- infa360gbq_customer_m_person_rtl_health_segment_gbq_outbound_person_rtl_health_segment<br>- infa360gbq_customer_m_person_rtl_lifeevent_gbq_outbound_person_rtl_health_lifeevent<br>- infa360gbq_customer_m_person_rtl_phone_consent_gbq_outb | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | - infa360gbq_customer_mt_person_rtl_geo_segment_gbq_outbound_person_rtl_geo_segment<br>- infa360gbq_customer_mt_person_rtl_health_segment_gbq_outbound_person_rtl_health_segment<br>- infa360gbq_customer_mt_person_rtl_lifeevent_gbq_outbound_person_rtl_health_lifeevent<br>- infa360gbq_customer_mt_person_rtl_phone_consent_gbq_outbound_person_rtl_phone_consent<br>- infa360gbq_customer_mt_person_rtl_phone_gbq_outbound_person_rtl_phone<br>- infa360gbq_customer_mt_person_rtl_psycho_segment_gbq_outbound_person_rtl_psycho_segment<br>- infa360gbq_customer_mt_Person_segment_gbq_outbound_person_segment<br>- infa360gbq_customer_mt_person_socialhandle_gbq_outbound_person_socialhandle<br>- infa360gbq_customer_mt_person_socialmedia_gbq_outbound_person_socialmedia<br>- infa360gbq_customer_mt_person_specialization_gbq_outbound_person_specialization<br>- infa360gbq_customer_mt_person_status_gbq_outbound_person_status | ound_person_rtl_phone_consent<br>- infa360gbq_customer_m_person_rtl_phone_gbq_outbound_person_rtl_phone<br>- infa360gbq_customer_m_person_rtl_psycho_segment_gbq_outbound_person_rtl_psycho_segment<br>- infa360gbq_customer_m_Person_segment_gbq_outbound_person_segment<br>- infa360gbq_customer_m_person_socialhandle_gbq_outbound_person_socialhandle<br>- infa360gbq_customer_m_person_socialmedia_gbq_outbound_person_socialmedia<br>- infa360gbq_customer_m_person_specialization_gbq_outbound_person_specialization<br>- infa360gbq_customer_m_person_status_gbq_outbound_person_status<br>- infa360gbq_customer_m_person_taxdetails_gbq_outbound_person_taxdetails | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | - infa360gbq_customer_mt_person_taxdetails_gbq_outbound_person_taxdetails | | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| infa360gbq_egress_customer_org_gbq_InfaRetail_Extension_customer_master_stg | infa360gbq_customer_tf_org_gbq_outbound_org_stage | - infa360gbq_customer_mt_org_address_gbq_outbound_org_address<br>- infa360gbq_customer_mt_org_alternateName_gbq_outbound_org_alternateName<br>- infa360gbq_customer_mt_org_document_gbq_outbound_org_document<br>- infa360gbq_customer_mt_org_email_gbq_outbound_org_email<br>- infa360gbq_customer_mt_org_financial_gbq_outbound_org_financial<br>- infa360gbq_customer_mt_org_identifier_gbq_outbound_org_identifier<br>- infa360gbq_customer_mt_org_indicator_gbq_outbound_org_indicator<br>- infa360gbq_customer_mt_org_insurance_gbq_outbound_org_insurance<br>- infa360gbq_customer_mt_org_keyexecutive_gbq_outbound_org_keyexecutive<br>- infa360gbq_customer_mt_org_phone_gbq_outbound_org_phone<br>- infa360gbq_customer_mt_org_root_gbq_outbound_org_customer<br>- infa360gbq_customer_mt_org_rtl_customer_account_gbq_outbound_org_rtl_customer_account<br>- infa360gbq_customer_mt_org_rtl_industry_classification_gbq_outbound_org_rtl_industry_classification | - infa360gbq_customer_m_org_address_gbq_outbound_org_address<br>- infa360gbq_customer_m_org_alternateName_gbq_outbound_org_alternateName<br>- infa360gbq_customer_m_org_document_gbq_outbound_org_document<br>- infa360gbq_customer_m_org_email_gbq_outbound_org_email<br>- infa360gbq_customer_m_org_financial_gbq_outbound_org_financial<br>- infa360gbq_customer_m_org_identifier_gbq_outbound_org_identifier<br>- infa360gbq_customer_m_org_indicator_gbq_outbound_org_indicator<br>- infa360gbq_customer_m_org_insurance_gbq_outbound_org_insurance<br>- infa360gbq_customer_m_org_keyexecutive_gbq_outbound_org_keyexecutive<br>- infa360gbq_customer_m_org_phone_gbq_outbound_org_phone<br>- infa360gbq_customer_m_org_root_gbq_outbound_org_customer<br>- infa360gbq_customer_m_org_rtl_customer_account_gbq_outbound_org_rtl_customer_account<br>- infa360gbq_customer_m_org_rtl_industry_classification_gbq_outbound_org_rtl_industry_classification<br>- infa360gbq_customer_m_org_segment_gbq_outbound_org_segment<br>- infa360gbq_customer_m_org_socialhandl | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | - infa360gbq_customer_mt_org_segment_gbq_outbound_org_segment<br>- infa360gbq_customer_mt_org_socialhandle_gbq_outbound_org_socialhandle<br>- infa360gbq_customer_mt_org_status_gbq_outbound_org_status<br>- infa360gbq_customer_mt_org_stockexchange_gbq_outbound_org_stockexchange<br>- infa360gbq_customer_mt_org_taxdetails_gbq_outbound_org_taxdetails | e_gbq_outbound_org_socialhandle<br>- infa360gbq_customer_m_org_status_gbq_outbound_org_status<br>- infa360gbq_customer_m_org_stockexchange_gbq_outbound_org_stockexchange<br>- infa360gbq_customer_m_org_taxdetails_gbq_outbound_org_taxdetails | |
| infa360gbq_egress_customer_orgXref_InfaRetail_Extension_customer_master_stg | infa360gbq_customer_tf_org_xref_gbq_outbound_org_xref_stage | infa360gbq_customer_mt_org_xref_gbq_outbound_org_xref | infa360gbq_customer_m_org_xref_gbq_outbound_org_xref | |

# Batch jobs for Product 360 SaaS and Google BigQuery integration

Use predefined egress jobs to export master data from Product 360 SaaS to Google BigQuery staging store.

The following table lists the predefined egress jobs and their related taskflows, mapping tasks, and mappings to export master data from Product 360 SaaS to Google BigQuery.

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| - infa360gbq_egress_product_category_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_rtl_product_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_product_item_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_product_itemXref_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_product_class_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_rtl_product_xref_InfaRetail_Extension_product_master_stg<br>- infa360gbq_egress_product_relation_InfaRetail_Extension_item_category_realationship_stg | - infa360gbq_product_tf_rtl_product_xref_gbq_outbound_rtl_product_stage<br>- infa360gbq_product_tf_rtl_product_gbq_outbound_rtl_product_stage<br>- infa360gbq_product_tf_relation_item_category_gbq_outbound_item_relation_stage<br>- infa360gbq_product_tf_item_xref_gbq_outbound_item_xref_stage<br>- infa360gbq_product_tf_item_gbq_outbound_item_stage<br>- infa360gbq_product_tf_classification_gbq_outbound_classification_stage<br>- infa360gbq_product_tf_category_gbq_outbound_category_stage<br>- infa360gbq_product_tf_hierarchy_item_category_gbq_outbound_item_hierarchy_stage | - infa360gbq_product_mt_relation_item_to_category_outbound_informatica_item_category_relationship_stg<br>- infa360gbq_product_mt_category_root_gbq_outbound_category_root<br>- infa360gbq_product_mt_item_selPrice_gbq_outbound_item_selPrice<br>- infa360gbq_product_mt_hierarchy_product_to_category_outbound_informatica_item_category_hierarchy_stg<br>- infa360gbq_product_mt_item_root_gbq_outbound_item_root<br>- infa360gbq_product_mt_hierarchy_item_to_category_outbound_informatica_item_category_hierarchy_stg<br>- infa360gbq_product_mt_item_xref_gbq_outbound_item_xref<br>- infa360gbq_product_mt_hierarchy_classification_gbq_outbound_informatica_classification_hierarchy<br>- infa360gbq_product_mt_rtl_product_xref_gbq_outbound_rtl_product_xref<br>- infa360gbq_product_mt_item_metainfo_gbq_outbound_item_metainfo<br>- infa360gbq_product_mt_classificati | - infa360gbq_product_m_relation_category_to_category_gbq_outbound_informatica_item_category_relations<br>- infa360gbq_product_m_rtl_product_root_gbq_outbound_rtl_product_root<br>- infa360gbq_product_m_hierarchy_category_to_category_gbq_outbound_informatica_item_category_hierarchy<br>- infa360gbq_product_m_classification_gbq_outbound_classification<br>- infa360gbq_product_m_category_root_gbq_outbound_category_root<br>- infa360gbq_product_m_rtl_product_xref_gbq_outbound_rtl_product_xref<br>- infa360gbq_product_m_item_productHighlight_gbq_outbound_item_productHighlight<br>- infa360gbq_product_m_hierarchy_classification_gbq_outbound_informatica_classification_hierarchy<br>- infa360gbq_product_m_category_keywords_gbq_outbound_category_keywords | Exports master data from Product 360 SaaS to Google BigQuery staging store. |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | on_gbq_outbound_classification<br>- infa360gbq_product_mt_rtl_product_tags_gbq_outbound_rtl_product_tags<br>- infa360gbq_product_mt_rtl_product_root_gbq_outbound_rtl_product_root<br>- infa360gbq_product_mt_item_description_gbq_outbound_item_description<br>- infa360gbq_product_mt_rtl_product_highlights_gbq_outbound_rtl_product_highlights<br>- infa360gbq_product_mt_item_tags_gbq_outbound_item_tags<br>- infa360gbq_product_mt_category_keywords_gbq_outbound_category_keywords<br>- infa360gbq_product_mt_relation_category_to_category_gbq_outbound_informatica_item_category_relations<br>- infa360gbq_product_mt_item_productHighlight_gbq_outbound_item_productHighlight<br>- infa360gbq_product_mt_hierarchy_category_to_classification_gbq_outbound_item_category_hierarchy<br>- infa360gbq_product_mt_item_keyword_gbq_outbound_item_keyword<br>- infa360gbq_product_mt_category_description_gbq_outbound_category_description<br>- infa360gbq_product_mt_rtl_product | - infa360gbq_product_m_hierarchy_product_to_category_outbound_informatica_item_category_hierarchy_stg<br>- infa360gbq_product_m_hierarchy_category_to_classification_gbq_outbound_item_category_hierarchy<br>- infa360gbq_product_m_hierarchy_item_to_category_outbound_informatica_item_category_hierarchy_stg<br>- infa360gbq_product_m_item_selPrice_gbq_outbound_item_selPrice<br>- infa360gbq_product_m_item_metainfo_gbq_outbound_item_metainfo<br>- infa360gbq_product_m_rtl_product_keywords_gbq_outbound_rtl_product_keywords<br>- infa360gbq_product_m_relation_item_to_category_outbound_informatica_item_category_relationship_stg<br>- infa360gbq_product_m_item_root_gbq_outbound_item_root<br>- infa360gbq_product_m_rtl_product_price_range_gbq_outbound_rtl_product_price_range<br>- infa360gbq_product_m_rtl_product_highlights_gbq_outbound_r | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | _description_gbq_outbound_rtl_product_description<br>- infa360gbq_product_mt_relation_category_to_classification_gbq_outbound_informatica_item_category_rel<br>- infa360gbq_product_mt_rtl_product_price_range_gbq_outbound_rtl_product_price_range<br>- infa360gbq_product_mt_rtl_product_keywords_gbq_outbound_rtl_product_keywords<br>- infa360gbq_product_mt_hierarchy_category_to_category_gbq_outbound_informatica_item_category_hierarchy | tl_product_highlights<br>- infa360gbq_product_m_category_description_gbq_outbound_category_description<br>- infa360gbq_product_m_rtl_product_description_gbq_outbound_rtl_product_description<br>- infa360gbq_product_m_item_keyword_gbq_outbound_item_keyword<br>- infa360gbq_product_m_item_tags_gbq_outbound_item_tags<br>- infa360gbq_product_m_item_xref_gbq_outbound_item_xref<br>- infa360gbq_product_m_item_description_gbq_outbound_item_description<br>- infa360gbq_product_m_relation_category_to_classification_gbq_outbound_item_category_relation<br>- infa360gbq_product_m_rtl_product_tags_gbq_outbound_rtl_product_tags | |

# Batch jobs for Supplier 360 SaaS and Google BigQuery integration

Use predefined egress jobs to export master data from Supplier 360 SaaS to Google BigQuery staging store.

The following table lists the predefined egress jobs and their related taskflows, mapping tasks, and mappings to export master data from Supplier 360 SaaS to Google BigQuery.

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| - infa360gbq_egress_supplier_InfaRetail_Extension_supplier_master_stg<br>- infa360gbq_egress_supplier_xref_InfaRetail_Extension_supplier_master_stg | - infa360gbq_supplier_tf_supplier_xref_gbq_outbound_supplier_xref_stage<br>- infa360gbq_supplier_tf_supplier_gbq_outbound_supplier_stage<br>- infa360gbq_customer_tf_esg_emission_gbq_outbound_esg_emission<br>- infa360gbq_supplier_tf_contact_xref_gbq_outbound_contact_xref_stage<br>- infa360gbq_supplier_tf_contact_gbq_outbound_contact_stage | - infa360gbq_supplier_mt_contact_identifier_gbq_outbound_contact_identifier<br>- infa360gbq_supplier_mt_supplier_contract_gbq_outbound_supplier_contract<br>- infa360gbq_supplier_mt_supplier_esg_ratingdnb_gbq_outbound_supplier_esg_ratingdnb<br>- infa360gbq_supplier_mt_contact_root_gbq_outbound_contact_root<br>- infa360gbq_supplier_mt_supplier_socialMedia_gbq_outbound_supplier_socialMedia<br>- infa360gbq_supplier_mt_supplier_sourcing_manager_gbq_outbound_supplier_sourcing_manager<br>- infa360gbq_supplier_mt_supplier_reference_gbq_outbound_supplier_reference<br>- infa360gbq_supplier_mt_supplier_esg_rating_sustainalytics_gbq_outbound_supplier_rating<br>- infa360gbq_supplier_mt_supplier_risk_question_gbq_outbound_supplier_risk_question<br>- infa360gbq_customer_mt_rtl_esg_emission_gbq_outbound_rtl_esg_emission<br>- infa360gbq_supplier_mt_contact_a | - infa360gbq_supplier_m_contact_xref_gbq_outbound_contact_xref<br>- infa360gbq_supplier_m_supplier_altName_gbq_outbound_supplier_altName<br>- infa360gbq_supplier_m_contact_postal_address_gbq_outbound_contact_postal_address<br>- infa360gbq_supplier_m_supplier_phone_gbq_outbound_supplier_phone<br>- infa360gbq_supplier_m_supplier_segment_gbq_outbound_supplier_segment<br>- infa360gbq_supplier_m_supplier_esg_industry_classification_gbq_outbound_supplier_esg_industry_class<br>- infa360gbq_supplier_m_supplier_diversity_gbq_outbound_supplier_diversity<br>- infa360gbq_supplier_m_supplier_esg_environmental_reason_gbq_outbound_esg_environmental_reason<br>- infa360gbq_supplier_m_supplier_sourcing_manager_gbq_outbound_supplier_sourcing_manager<br>- infa360gbq_supplier_m_contact_address_gbq_outbound_contact_email<br>- infa360gbq_supplier_m_supplier_contract_gbq_outboun | Exports master data from Supplier 360 SaaS to Google BigQuery staging store. |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | ddress_gbq_outbound_contact_email<br>- infa360gbq_supplier_mt_supplier_segment_gbq_outbound_supplier_segment<br>- infa360gbq_supplier_mt_supplier_document_gbq_outbound_supplier_document<br>- infa360gbq_supplier_mt_supplier_esg_industry_classification_gbq_outbound_supplier_esg_industry_class<br>- infa360gbq_supplier_mt_supplier_bankdetails_gbq_outbound_supplier_bankdetails<br>- infa360gbq_supplier_mt_supplier_financial_gbq_outbound_supplier_financial<br>- infa360gbq_supplier_mt_supplier_insurance_gbq_outbound_supplier_insurance<br>- infa360gbq_supplier_mt_supplier_altName_gbq_outbound_supplier_altName<br>- infa360gbq_supplier_mt_supplier_esg_social_reason_gbq_outbound_supplier_esg_social_reason<br>- infa360gbq_supplier_mt_supplier_esg_sustain_classification_gbq_outbound_esg_sustain_classification<br>- infa360gbq_supplier_mt_supplier_phone_gbq_outbound_supplier_phone<br>- infa360gbq_supplier_mt_supplier_alerts_gbq_outbou | d_supplier_contract<br>- infa360gbq_supplier_m_contact_socialmedia_gbq_outbound_contact_socialmedia<br>- infa360gbq_supplier_m_supplier_document_gbq_outbound_supplier_document<br>- infa360gbq_supplier_m_supplier_stock_stg_gbq_outbound_supplier_stock<br>- infa360gbq_supplier_m_supplier_reference_gbq_outbound_supplier_reference<br>- infa360gbq_supplier_m_supplier_esg_ratingdnb_gbq_outbound_supplier_esg_ratingdnb<br>- infa360gbq_supplier_m_contact_identifier_gbq_outbound_contact_identifier<br>- infa360gbq_supplier_m_supplier_socialMedia_gbq_outbound_supplier_socialMedia<br>- infa360gbq_supplier_m_supplier_esg_sustain_classification_gbq_outbound_esg_sustain_classification<br>- infa360gbq_supplier_m_supplier_root_gbq_outbound_supplier_root<br>- infa360gbq_supplier_m_supplier_risk_question_gbq_outbound_supplier_risk_question<br>- infa360gbq_supplier_m_supplier_insurance_gbq_outbound_supplier_insurance<br>- infa360gbq_customer_m_rtl_esg_act | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | nd_supplier_alerts<br>- infa360gbq_supplier_mt_contact_postal_address_gbq_outbound_contact_postal_address<br>- infa360gbq_supplier_mt_supplier_diversity_gbq_outbound_supplier_diversity<br>- infa360gbq_supplier_mt_supplier_address_gbq_outbound_supplier_address<br>- infa360gbq_supplier_mt_supplier_root_gbq_outbound_supplier_root<br>- infa360gbq_supplier_mt_supplier_esg_environmental_reason_gbq_outbound_esg_environmental_reason<br>- infa360gbq_supplier_mt_supplier_tax_gbq_outbound_supplier_tax<br>- infa360gbq_supplier_mt_contact_phone_gbq_outbound_contact_phone<br>- infa360gbq_supplier_mt_supplier_executiveMembers_gbq_outbound_supplier_executiveMembers<br>- infa360gbq_supplier_mt_contact_xref_gbq_outbound_contact_xref<br>- infa360gbq_supplier_mt_supplier_xref_gbq_outbound_supplier_xref<br>- infa360gbq_supplier_mt_contact_socialmedia_gbq_outbound_contact_socialmedia<br>- infa360gbq_supplier_mt_supplier_stock_stg_gbq_out | ivity_data_gbq_outbound_rtl_esg_activity_data<br>- infa360gbq_supplier_m_supplier_address_gbq_outbound_supplier_address<br>- infa360gbq_supplier_m_contact_status_gbq_outbound_contact_status<br>- infa360gbq_supplier_m_contact_root_gbq_outbound_contact_root<br>- infa360gbq_supplier_m_supplier_financial_gbq_outbound_supplier_financial<br>- infa360gbq_supplier_m_supplier_executiveMembers_gbq_outbound_supplier_executiveMembers<br>- infa360gbq_customer_m_rtl_esg_emission_gbq_outbound_rtl_esg_emission<br>- infa360gbq_supplier_m_supplier_esg_social_reason_gbq_outbound_supplier_esg_social_reason<br>- infa360gbq_supplier_m_supplier_tax_gbq_outbound_supplier_tax<br>- infa360gbq_supplier_m_supplier_esg_governance_reason_gbq_outbound_supplier_gover_reason<br>- infa360gbq_supplier_m_supplier_bankdetails_gbq_outbound_supplier_bankdetails<br>- infa360gbq_supplier_m_supplier_email_gbq_outbound_supplier_email<br>- infa360gbq_supplier_m_supplier_esg | |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | bound_supplier_stock<br>- infa360gbq_customer_mt_rtl_esg_activity_data_gbq_outbound_rtl_esg_activity_data<br>- infa360gbq_supplier_mt_contact_status_gbq_outbound_contact_status<br>- infa360gbq_supplier_mt_supplier_identifier_gbq_outbound_supplier_identifier<br>- infa360gbq_supplier_mt_supplier_esg_governance_reason_gbq_outbound_supplier_gover_reason<br>- infa360gbq_supplier_mt_supplier_email_gbq_outbound_supplier_email | _rating_sustainalytics_gbq_outbound_supplier_rating<br>- infa360gbq_supplier_m_contact_phone_gbq_outbound_contact_phone<br>- infa360gbq_supplier_m_supplier_xref_gbq_outbound_supplier_xref<br>- infa360gbq_supplier_m_supplier_alerts_gbq_outbound_supplier_alerts<br>- infa360gbq_supplier_m_supplier_identifier_gbq_outbound_supplier_identifier | |

# Batch jobs for Multidomain MDM SaaS and Google BigQuery integration

Use predefined egress jobs to export master data from Multidomain MDM SaaS to Google BigQuery staging store.

The following table lists the predefined egress jobs and their related taskflows, mapping tasks, and mappings to export master data from Multidomain MDM SaaS to Google BigQuery.

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| - infa360gbq_egress_locMaster_InfaRetail_Extension_location_master_stg<br>- infa360gbq_egress_locXref_InfaRetail_Extension_location_master_stg | - infa360gbq_location_tf_multidomain_location_xref_gbq_outbound_location_xref<br>- infa360gbq_location_tf_multidomain_location_gbq_outbound_location_stage | - infa360gbq_location_mt_location_address_gbq_outbound_location_address<br>- infa360gbq_location_mt_location_altName_gbq_outbound_location_altName<br>- infa360gbq_location_mt_location_operatingHours_gbq_outbound_location_operatingHours<br>- infa360gbq_location_mt_location_indicator_gbq_outbound__location_indicator<br>- infa360gbq_location_mt_location_operatingHoursException_gbq_outbound_location_operatingHoursException<br>- infa360gbq_location_mt_location_xref_gbq_outbound_location_xref<br>- infa360gbq_location_mt_location_identifier_gbq_outbound_location_identifier<br>- infa360gbq_location_mt_location_status_gbq_outbound_location_status<br>- infa360gbq_location_mt_location_phone_gbq_outbound_location_phone<br>- infa360gbq_location_mt_locati | - infa360gbq_location_m_location_operatingHoursException_gbq_outbound_location_operatingHoursException<br>- infa360gbq_location_m_location_operatingHours_gbq_outbound_location_operatingHours<br>- infa360gbq_location_m_location_altName_gbq_outbound_location_altName<br>- infa360gbq_location_m_location_status_gbq_outbound_location_status<br>- infa360gbq_location_m_location_indicator_gbq_outbound__location_indicator<br>- infa360gbq_location_m_location_identifier_gbq_outbound_location_identifier<br>- infa360gbq_location_m_location_xref_gbq_outbound_location_xref<br>- infa360gbq_location_m_location_phone_gbq_outbound_location_phone<br>- infa360gbq_location_m_location_root_gbq_outbound_location_root<br>- infa360gbq_location_m_location_address_gbq_outbound_location_address<br>- infa360gbq_location_m_location_e | Exports master data from Multidomain MDM SaaS to Google BigQuery staging store. |

| Job Name | Taskflow | Mapping Task | Mapping | Description |
|---|---|---|---|---|
| | | - on_root_gbq_outbound_location_root<br>- infa360gbq_location_mt_location_email_gbq_outbound_location_email | mail_gbq_outbound_location_email | |

# Pages

The MDM 360 for Retail package contains predefined pages. You can use predefined pages as a reference to create similar custom pages for business entities.

Use the Create page type to create records. Use the View and Edit page type to view and edit records.

The following table describes the pages that are predefined for MDM 360 for Retail business entities:

| MDM SaaS Service | Page Name | Description | Assigned User Roles |
|---|---|---|---|
| Customer 360 SaaS | Create Page Household | A page to create a Household record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Create Page Organization | A page to create an Organization record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Create Page Person | A page to create a Person record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Edit Page Household | A page to view or edit a Household record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Edit Page Organization | A page to view or edit an Organization record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Edit Page Person | A page to view or edit a Person record. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |

| MDM SaaS Service | Page Name | Description | Assigned User Roles |
|---|---|---|---|
| Product 360 SaaS | Create Page Category | A page to create a Category record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Create Page Item | A page to create an Item record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Create Page Product | A page to create a Product record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Edit Page Category | A page to create an Associate record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Edit Page Item | A page to view or edit an Item record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Edit Page Product | A page to view or edit a Product record. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Supplier 360 SaaS | Create Page Emission | A page to create an Emission record. | - MDM Business User<br>- Supplier 360 Analyst<br>- Supplier 360 Commodity Manager<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward |
| Supplier 360 SaaS | Create Page Supplier | A page to create a Supplier record. | - MDM Business User<br>- Supplier 360 Analyst<br>- Supplier 360 Commodity Manager<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward |
| Supplier 360 SaaS | Edit Page Emission | A page to view or edit an Emission record. | - MDM Business User<br>- Supplier 360 Analyst<br>- Supplier 360 Commodity Manager<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward |
| Supplier 360 SaaS | Edit Page Supplier | A page to view or edit a Supplier record. | - MDM Business User<br>- Supplier 360 Analyst<br>- Supplier 360 Commodity Manager<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward |
| Multidomain MDM SaaS | Create Page Location | A page to create a Location record. | - MDM Business User<br>- Business360ProcessExecutor |
| Multidomain MDM SaaS | Edit Page Location | A page to view or edit a Location record. | - Customer 360 Data Steward<br>- Customer 360 Analyst<br>- Customer 360 Manager<br>- MDM Business User<br>- Business_Steward |

# Search result layout components

The MDM 360 for Retail package contains predefined search result layout components.

The following table describes the components of search result layout for the MDM 360 for Retail business entities:


| MDM SaaS Service | Search Result Layout Component Name | Description | Assigned User Roles |
|---|---|---|---|
| Customer 360 SaaS | Search Layout Household | Search layout to display search results of the Household business entity records. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Search Layout Organization | Search layout to display search results of the Organization business entity records. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Customer 360 SaaS | Search Layout Person | Search layout to display search results of the Person business entity records. | - Customer 360 Analyst<br>- Customer 360 Data Steward<br>- Customer 360 Manager<br>- MDM Business User |
| Product 360 SaaS | Search Layout Category | Search layout to display search results of the Category business entity records. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Search Layout Item | Search layout to display search results of the Item business entity records. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Product 360 SaaS | Search Layout Product | Search layout to display search results of the Product business entity records. | - MDM Business User<br>- Product 360 Manager<br>- Product 360 Read Only |
| Supplier 360 SaaS | Search Layout Emission | Search layout to display search results of the Emission business entity records. | - MDM Business Users<br>- Supplier 360 Analyst<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward<br>- Supplier 360 Read Only<br>- Supplier 360 Risk Manager |
| Supplier 360 SaaS | Search Layout ESG Score (D&B) | To search a record for the Supplier business entity ESG Score (D&B). | - MDM Business Users<br>- Supplier 360 Analyst<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward<br>- Supplier 360 Read Only<br>- Supplier 360 Risk Manager |

| MDM SaaS Service | Search Result Layout Component Name | Description | Assigned User Roles |
|---|---|---|---|
| Supplier 360 SaaS | Search Layout Supplier | Search layout to display search results of the Supplier business entity records. | - MDM Business User<br>- Supplier 360 Analyst<br>- Supplier 360 Contract Manager<br>- Supplier 360 Data Steward<br>- Supplier 360 Read Only<br>- Supplier 360 Risk Manager |
| Multidomain MDM SaaS | Search Layout Location | Search layout to display search results of the Location business entity records. | - MDM Business User |

# Relationships

You can use predefined relationships between predefined business entities that are included in MDM 360 for Retail.

The following image shows the MDM 360 for Retail business entities and their relationships:

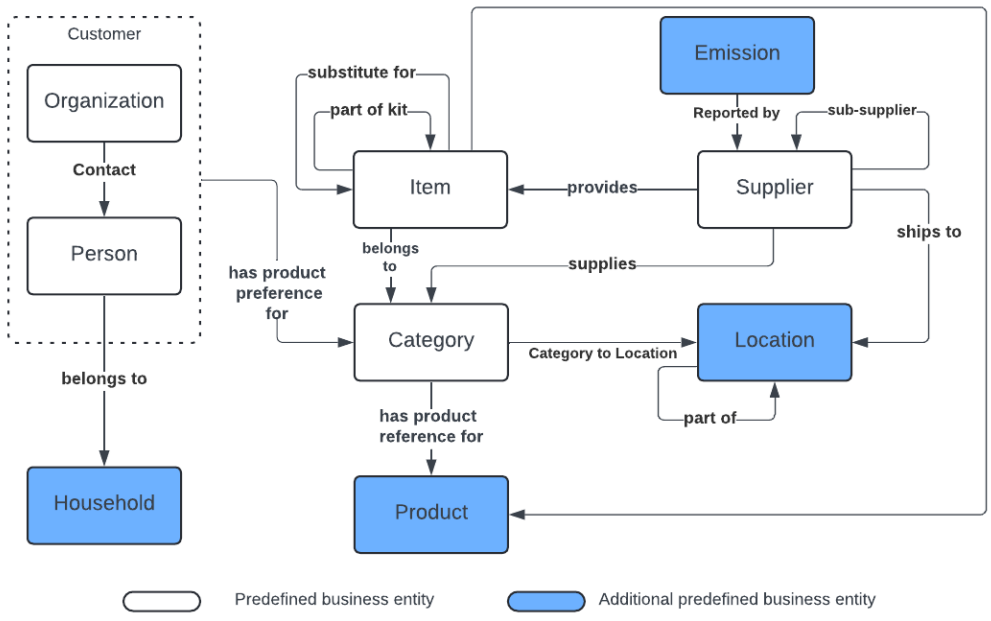

The following table describes the predefined relationship types for MDM 360 for Retail:

| MDM SaaS Solution | Relationship Name | Internal ID | Business Entity 1 | Business Entity 2 | Direction |
|---|---|---|---|---|---|
| Customer 360 SaaS | belongs to | infa360rtl_person_to_hh_belongs_to | Person | Household | Person → Household |
| Customer 360 SaaS | Contact | infa360rtl_org_person_contact | Organization | Person | Organization → Person |
| Multidomain MDM SaaS | Category to Location | infa360rtl_category_to_location | Category | Location | Category → Location |
| Multidomain MDM SaaS | provides | infa360rtl_supplier_item_provides | Supplier | Item | Supplier → Item |
| Multidomain MDM SaaS | ships to | infa360rtl_supplier_location_ships_to | Supplier | Location | Supplier → Location |
| Multidomain MDM SaaS | supplies | infa360rtl_supplier_category_supplies | Supplier | Category | Supplier → Category |
| Product 360 SaaS | belongs to | infa360rtl_item_category_belong_to | Item | Category | Item → Category |
| Product 360 SaaS | has product reference for | infa360rtl_person_category_has_product_reference_for | Product | Category | Category → Product |
| Product 360 SaaS | part of kit | infa360rtl_item_to_item_part_of_kit | Item | Item | Item ← Item |
| Product 360 SaaS | substitute for | infa360rtl_item_to_item_substitute_for | Item | Item | Item → Item |
| Supplier 360 SaaS | Reported By | infas360esg_reportedby | Emission | Supplier | Emission → Supplier |

# Reports

Use predefined reports to visualize data in the form of charts and report tables in MDM 360 for Retail.

The following table describes predefined reports that the MDM 360 for Retail package includes:

| MDM SaaS Service | Report Name | Internal ID | Description |
|---|---|---|---|
| Customer 360 SaaS | Customer By Age Group | infa360rtl_customer_by_age_group | Displays the number of Customer records by age. |
| Customer 360 SaaS | Customer By House Owner Status | infa360rtl_customer_by_house_owner_status | Displays the number of Customer records based on their house ownership status. |
| Customer 360 SaaS | Customer By Purchase Power | infa360rtl_customer_by_purchase_power | Displays the number of Customer records based on their purchase power. |
| Customer 360 SaaS | Customer By State | infa360rtl_customer_by_state | Displays the number of Customer records by State of postal address. |
| Product 360 SaaS, | Item Descriptions by Language | infa360rtl_item_descriptions_by_language | Displays the number of Item records based on their description language. |
| Product 360 SaaS, | Items by Availability | infa360rtl_items_by_availability | Displays the number of Item records based on their type. |
| Product 360 SaaS, | Items by Brand | infa360rtl_items_by_brand | Displays the number of Item records based on their brand. |
| Product 360 SaaS, | Items by Country of Origin | einfa360rtl_items_by_country_of_origin | Displays the number of Item records based on their country of origin. |
| Product 360 SaaS, | Items by Status | infa360rtl_items_by_status | Displays the number of Item records based on their status. |
| Product 360 SaaS, | Items by Type | infa360rtl_items_by_type | Displays the number of Item records based on their type. |
| Product 360 SaaS, | Products by Brand | infa360rtl_products_by_brand | Displays the number of Product records based on their brand. |
| Supplier 360 SaaS | ESG performance (D&B) | infas360esg_supplier_esg_performance_dnb | Displays the number of Supplier records based on their ESG performance. |
| Supplier 360 SaaS | ESG Rating Dimensions | infas360esg_esg_rating_by_dimensions | Displays the number of Supplier records based on their ESG rating dimensions. |

| MDM SaaS Service | Report Name | Internal ID | Description |
|---|---|---|---|
| Supplier 360 SaaS | Supplier by ESG Peer Percentile Group - D&B | infas360esg_supplier_by_esg_peer_percentile_group_dnb | Displays the number of Supplier records based on the peer percentile group for D&B. |
| Supplier 360 SaaS | Supplier by ESG Risk Category - Sustainalytics | infas360esg_supplier_by_sustainalytics_esg_risk_category | Displays the number of Supplier records based on the ESG risk category in a sub-industry for Sustainalytics. |
| Supplier 360 SaaS | Supplier by ESG Risk Percentile - Sustainalytics | infas360esg_supplier_by_esg_risk_percentile_sustainalytics | Displays the number of Supplier records based on the ESG risk percentile in a sub-industry for Sustainalytics. |
| Supplier 360 SaaS | Supplier by Industry Sector | infas360esg_supplier_by_industry_sector | Displays the number of Supplier records based on the industry sector. |
| Supplier 360 SaaS | Supplier ESG score | infa360rtl_supplier_esg_score | Displays the number of Supplier records based on their ESG score. |
| Supplier 360 SaaS | Suppliers By SASB Classification | infa360rtl_suppliers_by_sasb_classification | Displays the number of Supplier records based on their SASB Classification. |

# Data quality rule associations

Add predefined data quality rule associations to the business entity fields to cleanse, standardize, and validate the field values. When you import source records, the data quality rule associations validate and transform the records in MDM 360 for Retail.

The following table describes the advanced rule associations that MDM 360 for Retail uses:

| Rule Association Name | Rule Specification Name | Applied Field | Description |
|---|---|---|---|
| GLN Checkdigit | GLN Checkdigit | Manufacturer GLN | Validates whether the GLN number provided is valid or not.<br>This rule uses check digit logic internally. |
| GTIN Checkdigit | GTIN Checkdigit | GTIN | Validates whether the GLN number provided is valid or not.<br>This rule uses check digit logic internally. |

| Rule Association Name | Rule Specification Name | Applied Field | Description |
|---|---|---|---|
| AllDayend Check | AllDayend Check | - Operating Hours.End Time (Hours)<br>- Operating Hours.End Time (Minutes)<br>- Operating Hours.End Time (Seconds) | Validates whether the applied field values are set to null when the All Day field is set to True.<br>It internally uses the Endtime Rule to validate the applied fields. |
| AllDaystart Check | AllDaystartCheck | - Operating Hours.Start Time (Hours)<br>- Operating Hours.Start Time (Minutes)<br>- Operating Hours.Start Time (Seconds) | Validates whether the applied field values are set to null when the All Day field is set to True.<br>It internally uses the Starttime Rule to validate the applied fields. |
| Endtime Rule | Endtime Rule | - Operating Hours.End Time (Hours)<br>- Operating Hours.End Time (Minutes)<br>- Operating Hours.End Time (Seconds) | Validates whether the applied field values are null. |
| Latitude Check | Latitude Check | Postal Address.Latitude | Validates whether the latitude value is in between -90 and +90. |
| Longitude Check | Longitude Check | Postal Address.Longitude | Validates whether the longitude value is between -180 and +180. |
| PostalCode Check | PostalCode Check | Postal Address.Postal Code | Validates whether the applied field value is equal to five when the Postal Code field isn't null.<br>It internally uses the PostalCode Rule to validate the applied field. |
| PostalCode Rule | PostalCode Rule | Postal Address.Postal Code | Validates whether the length of the field value is equal to five. |
| Starttime Rule | Starttime Rule | - Operating Hours.Start Time (Hours)<br>- Operating Hours.Start Time (Minutes)<br>- Operating Hours.Start Time (Seconds) | Validates whether the applied field values are null. |
| State Check | State Check | Postal Address.State | Validates whether the applied field value is equal to `USA` when the State field isn't null.<br>It internally uses the State Rule to validate the applied field. |
| State Rule | State Rule | Postal Address.State | Validates whether the value is equal to `USA`. |
| URL Check | URL Rule | URL | Validates whether the value has a valid URL format. |

# DDL Scripts for Google BigQuery

Use DDL scripts to create Google BigQuery staging schema, Google BigQuery analytical schema, and sample views.

You can use the scripts to create the Google BigQuery staging schema for customer, supplier, product, location, emission, and household data. You can also use the scripts to create analytical schema for customer, supplier, product, and location analytics.

MDM 360 for Retail also includes sample views. Views are logical tables defined using SQL queries. When you run the SQL query in Google Cloud Console, you can use the views to visualize data in the Google BigQuery analytical schema through dashboards.

CHAPTER 3

# MDM 360 for Retail and external data integration

MDM 360 for Retail provides out-of-the-box integration with the following external data:

- Standard product classifications such as Global Product Classification (GPC) and Google product category
- Google BigQuery

## Product 360 SaaS and Global Product Classification integration

You can use MDM 360 for Retail to integrate Product 360 SaaS with Global Product Classification (GPC) to standardize the product category and hierarchy of the master data in MDM SaaS.

### Ingress data


You can run predefined ingress jobs to import Global Product Classification (GPC) data into Product 360 SaaS.

Manually download the Global Product Classification (GPC) data and configure the file to integrate with Product 360 SaaS. The ingress job uses Cloud Application Integration processes to read the file that contains Global Product Classification (GPC) data in the directory where the flat file connection is configured. For more information, see "Loading Global Product Classification data file for integration with MDM 360 for Retail " on page 143.

MDM 360 for Retail includes two predefined ingress jobs for Global Product Classification (GPC). The first predefined ingress job loads the category from Global Product Category and the second predefined ingress job creates the classification hierarchy in the category business entity in Product 360 SaaS.

For more information about ingress jobs, see "Batch jobs of the Category business entity for Global Product Classification" on page 104.

The following image shows the process to ingress data from Global Product Classification to Product 360 SaaS:



# Product 360 and Google product category integration

You can use MDM 360 for Retail to integrate Product 360 SaaS with Google product category to standardize the product category and hierarchy of master data in MDM SaaS.


## Ingress data

You can run predefined ingress jobs to import Google product category data into Product 360 SaaS.

Manually download the Google product category data and configure the file to integrate with Product 360 SaaS. Predefined ingress jobs use Cloud Application Integration processes to read the file that contains the Google product category data in the directory where the flat file connection is configured. For more information, see "Loading Google product category data file for integration with MDM 360 for Retail " on page 145

MDM 360 for Retail includes two predefined ingress jobs for Google product category. The first predefined ingress job loads the category from Google product category and the second predefined ingress job creates the classification hierarchy in the category business entity in Product 360 SaaS. For more information about ingress jobs, see "Batch jobs of the Category business entity for Global Product Classification" on page 104.

The following image shows the process to ingress data from Google product category to Product 360 SaaS:




# MDM SaaS and Google BigQuery integration


Use MDM 360 for Retail to integrate MDM SaaS with Google BigQuery to drive analytics and generative AI applications for customer, product, supplier, emission, household, and location data and relationships.

You can publish master data and relationships from MDM SaaS to the Google BigQuery staging store. You can then publish data from the staging store into the Google BigQuery target dimension tables.

## Data flow to publish master data to Google BigQuery

Use egress jobs and Cloud Data Integration assets to publish master data and relationships from MDM SaaS to the Google BigQuery staging store. The extension then uses data transformation and taskflows to populate data into the Google BigQuery dimension and fact tables.

The following image shows the flow of data from MDM SaaS to Google BigQuery:




When you run MDM SaaS egress jobs, Cloud Data Integration assets export MDM SaaS master data and relationships, such as product relationships and business entity to business entity relationships, into the

Google BigQuery staging store. You can export MDM SaaS master data, such as customer, product, location, and supplier master data, into the Google BigQuery staging store.

When you run Cloud Data Integration taskflows, Cloud Data Integration transforms and publishes master data and relationships from the Google BigQuery staging store into the Google BigQuery dimension and fact tables.

Based on the type of records that you manage in MDM SaaS, data is stored in the Google BigQuery dimension and fact tables.

You can use the sample views to view analytical reports from the Google BigQuery analytical schema.

## MDM SaaS master data

Based on the type of records that you manage in MDM SaaS, MDM 360 for Retail uses its corresponding data model.

The following table lists the different record types and their corresponding data model details:

| Record Type | Data Model Reference |
|---|---|
| Customer | - "Person business entity model" on page 10<br>- "Organization business entity data model " on page 36 |
| Product | - "Product business entity" on page 54<br>- "Item business entity" on page 56<br>- "Category business entity model" on page 60 |
| Supplier | "Supplier business entity model" on page 61 |
| Location | "Location business entity model" on page 93 |
| Emission | "Emission business entity model" on page 91 |
| Household | "Household business entity data model " on page 50 |

## Staging schema

The extension writes master data from MDM SaaS to the Google BigQuery staging store.

Based on the type of records that you manage in MDM SaaS, the master data is generated in the tables of datasets in the staging store.

The following table displays the datasets in Google BigQuery for MDM SaaS record types:

| Record Type | Datasets |
|---|---|
| Customer | InfaRetail_Extension_customer_master_stg |
| Emission | InfaRetail_Extension_esg_emission_master_stg |
| Household | InfaRetail_Extension_household_master_stg |
| Location | InfaRetail_Extension_location_master_stg |

| Record Type | Datasets |
|---|---|
| Multidomain | - InfaRetail_Extension_Supplier_category_relationship_stg<br>- InfaRetail_Extension_Supplier_emission_relationship_stg<br>- InfaRetail_Extension_Supplier_item_relationship_stg<br>- InfaRetail_Extension_Supplier_location_relationship_stg<br>- InfaRetail_Extension_Supplier_relationship_stg<br>- InfaRetail_Extension_category_location_relationship_stg<br>- InfaRetail_Extension_customer_org_person_relationship_stg<br>- InfaRetail_Extension_customer_person_relationship_stg<br>- InfaRetail_Extension_item_category_realationship_stg |
| Product Relationship | InfaRetail_Extension_item_category_realationship_stg |
| Product | InfaRetail_Extension_product_master_stg |
| Supplier | InfaRetail_Extension_supplier_master_stg |

**Note:** When you create datasets, ensure that you use the same dataset names to generate master data in the tables of the staging schema. For more information about creating datasets, see "Creating datasets" on page 146.

## Analytical schema

The analytical schema is a repository for master and transactional data in Google BigQuery. Use the analytical schema to gain insights into the data.

When you run Cloud Data Integration taskflows, the Cloud Data Integration assets transform and publish master data and relationships from the Google BigQuery staging store into the Google BigQuery dimension and fact tables. Data in the analytical schema is stored in the `InfaRetail_Extension_BigQueryAnalytics.tbl` dataset.

The analytical schema includes the following dimension and fact tables:


- InfaRetail_Extension_BigQueryAnalytics.tbl_sales_txn_fact
- InfaRetail_Extension_BigQueryAnalytics.tbl_item_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_customer_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_email_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_calendar_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_address_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_location_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_phone_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_supplier_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_esg_score_dnb_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_esg_score_dnb_social_reason_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_esg_score_dnb_governance_reason_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_esg_score_dnb_environmental_reason_dim
- InfaRetail_Extension_BigQueryAnalytics.tbl_supplier_order_txn_fact
- InfaRetail_Extension_BigQueryAnalytics.vw_retail_analytics

- InfaRetail_Extension_BigQueryAnalytics.vw_supplier_analytics
- InfaRetail_Extension_BigQueryAnalytics.order_transaction
- InfaRetail_Extension_BigQueryAnalytics.supplier_transaction

Based on your use case, you can create or edit the target dimension and fact tables.

**Note:** When you create datasets to generate master data in the tables of the analytical schema, ensure that you use the same dataset names. For more information about creating datasets, see "Creating datasets" on page 146.

The following image shows the tables of the Google BigQuery analytical schema and their relationships:

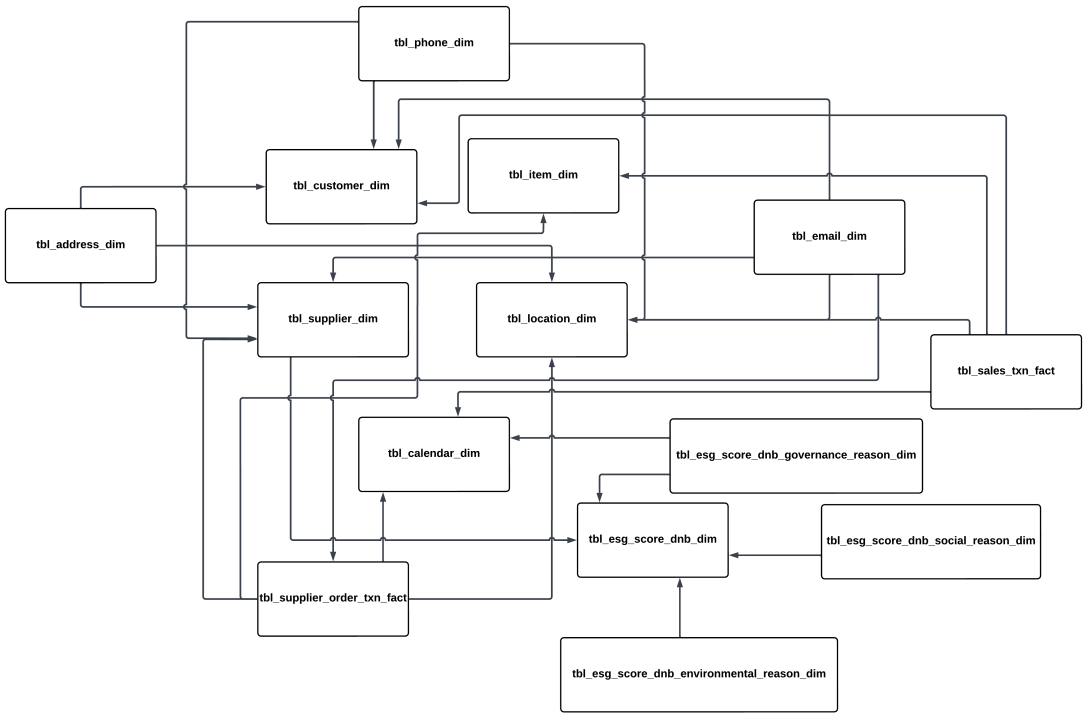

CHAPTER 4

# Deploying MDM 360 for Retail

To deploy MDM 360 for Retail, you must configure source systems, download the extension package, import assets into MDM SaaS, and update the predefined connections.

To deploy MDM 360 for Retail, perform the following tasks:

1. Download and extract the extension package.
2. Import the data model, the predefined custom pages, and the source systems.
3. Add predefined pages and search result layout components.
4. Import reference data code values into reference data assets.

**Note:** Before importing the data model, pages, and reference data assets, ensure that you are assigned to the Designer, MDM Designer, Reference 360 User, and Reference 360 Business Steward user roles, and not to the Admin user role.

After you deploy the extension, you can integrate MDM 360 for Retail with Global Product Classification (GPC) and Google product category, and publish the master data from MDM SaaS to the Google BigQuery staging store.

## Downloading and extracting the MDM 360 for Retail package

To get the link to download the MDM 360 for Retail package, contact Informatica Global Customer Support.

After you download MDM 360 for Retail, extract the package on your machine. The package contains the additional data model attributes, relationships, and predefined custom pages for MDM 360 for Retail.

The extracted package contains the following files and folders:

| File or Folder Name | Description |
|---|---|
| 1_MDM_Assets | Contains the following folders:<br>- Customer_MDM_Assets.zip. Contains additional data model attributes to store customer data, source system, predefined pages and reports.<br>- Location_MDM_Assets.zip. Contains additional data model attributes to store location data, source system, predefined pages and reports.<br>- Multidomain_MDM_Assets.zip. Contains additional data model attributes to store source system records, source system, predefined pages and reports.<br>- Product_MDM_Assets.zip. Contains additional data model attributes to store product data, source system, predefined pages and reports.<br>- Supplier_MDM_Assets.zip. Contains additional data model attributes to store supplier data, source system, predefined pages and reports. |
| 2_DI_Assets | Contains Product_DI_Assets.zip folder. The Product_DI_Assets.zip folder contains the Data Integration assets and connections that you require to ingress and egress data. |
| 3_MDM_Job_Assets | Contains Product_MDM_Job_Assets.zip folder. Contains the job assets to synchronize the source system records with MDM SaaS in batches. |
| Reference Data | Contains files that store code lists and values related to source systems. |
| Secure Agent Files | Contains the lookup source files and parameter values for the Cloud Data Integration mappings. |

# Importing data model, pages, and search layout components

After you download and extract the extension package, import data model assets, predefined pages, and search layout components.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   <Extracted extension package>/1_MDM_Assets/<Domain>_MDM_Assets.zip
3. Click **Open**.
4. Ensure that all the assets are selected.
5. Click **Import**.
6. On the **My Import/Export Logs** page, verify whether the import job is successful.

# Adding predefined pages and components

You can add the predefined pages and search result layout components of MDM 360 for Retail to MDM SaaS. Ensure that you belong to the administrator user role.

1. In Business 360 Console, click **Explore** > **<Project>**.

   For example, if you use Customer 360 SaaS, click **Customer360**.
2. Click the business application.
3. On the **Pages** tab, select **Person**.
4. On the **Create** tab, click **Add Page**.

   A blank row appears.
5. To select a page, click the asset picker.

   The **Select a page** window appears.
6. Select **Create Page Person**, and click **Select**.

   The selected page appears in the row.
7. To assign user roles to the page, from the list of user roles, select one or more user roles.

   For more information about the user roles assigned to pages, see "Pages" on page 122.
8. On the **View and Edit** tab, click **Add Page**.

   A blank row appears.
9. To select a page, click the asset picker.

   The **Select a page** window appears.
10. Select **Edit Page Person**, and assign the page to one or more user roles.

    For more information about the user roles assigned to pages, see "Pages" on page 122.
11. Repeat steps 4 through 10, for all the pages listed under "Pages" on page 122.
12. On the **Search** tab, in the **Business Entities** section, select **<business entity>**.

    For example, if you use Customer 360 SaaS, select **Person**.
13. In the **Search Result Layouts: Person** section, click **Add Search Result Layout**.

    A blank row appears.
14. To select a component, click the asset picker.

    The **Select a Component** window appears.
15. Select **Search Layout Person**, and assign the component to one or more user roles.

    For more information about the user roles assigned to search result layout components, see "Search result layout components" on page 124.
16. Repeat steps 13 through 15 for all the search result layout components listed under "Search result layout components" on page 124.
17. Click **Save**.

For more information about how to assign pages to user roles, see *Assign pages to user roles*.

# Importing reference data assets

After you import MDM assets, import reference data code values in bulk from CSV files into reference data assets.

The following table describes the files and folders in the extracted reference data directory:

| File or Folder Name | Description |
|---|---|
| Customer_Reference_Data | The folder that contains the lookup code values folders for Customer 360. Contains the following folders:<br>- Organization. The folder that contains the lookup code values for the Organization business entity. Lookup code values are in the following files and folders:<br>  - _1 . Contains the parent lookup code values.<br>  - _2 . Contains the child lookup code values.<br>  - _3 . Contains the sub-child lookup code values.<br>  - LoadReferenceData.py . Python script to import reference data.<br>- Person. The folder that contains the lookup code values for the Person business entity. Lookup code values are in the following folders:<br>  - _1 . Contains the parent lookup code values.<br>  - _2 . Contains the child lookup code values.<br>  - LoadReferenceData.py . Python script to import reference data. |
| Location_Reference_Data | The folder that contains the lookup code values folders for the Location business entity.<br>Lookup code values are in the following files and folders:<br>- _1 . Contains the parent lookup code values.<br>- _2 . Contains the child lookup code values.<br>- LoadReferenceData.py . Python script to import reference data. |
| Product_Reference_Data | The folder that contains the lookup code values folders for the Product business entity.<br>Lookup code values are in the following files and folders:<br>- _1 . The folder that contains the code values.<br>- LoadReferenceData.py . Python script to import reference data. |
| Supplier_Reference_Data | The folder that contains the lookup code values folders for the Supplier business entity.<br>Lookup code values are in the following files and folders:<br>- _1 . Contains the parent lookup code values.<br>- _2 . Contains the child lookup code values.<br>- LoadReferenceData.py . Python script to import reference data. |

To import code values in bulk from CSV files that are available in the extracted reference data directory, run the LoadReferenceData.py Python script.

## Prerequisites

Before you import reference data into MDM SaaS, ensure that you complete the following prerequisite tasks:

- Ensure that you have permission to import reference data.
- Install Python version 3 or later on your machine.

- To verify whether the cURL library files are preinstalled and to check the cURL library version, run the following command from a command prompt:
  ```
  curl --version
  ```
  **Note:** If cURL isn't available in your operating system, ensure that you install it. You can download the cURL library for your operating system from the cURL website:
  ```
  http://curl.haxx.se/download.html
  ```

## Importing the reference data

To import all the reference data in bulk, run the Python script.

1. Open a command prompt, and navigate to the following directory:
   ```
   <Extracted extension package>/Reference Data
   ```
2. Run the following command:
   - On Windows.
     ```
     python LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```
   - On Linux.
     ```
     python3 LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```

   The jobs to import reference data code values run.
3. To monitor the status of a job, click **My Jobs** in Reference 360.

   The My Jobs page lists the job instances that are currently running, failed, and successfully completed.

CHAPTER 5

# Configuring MDM 360 for Retail for external data integration

Configure MDM SaaS to integrate with external data, such as Global Product Classification (GPC), Google product category, and Google BigQuery.

After you import the data model changes and custom pages, import assets for the external data that you plan to use.

## Setting up and loading Global Product Classification for integration with MDM 360 for Retail

Use MDM 360 for Retail to integrate Product 360 SaaS with Global Product Classification to standardize the product category and hierarchy of the master data in MDM SaaS.

### Setting up MDM 360 for Retail for integration with Global Product Classification

**Note:** Before you import the assets related to Global Product Classification, ensure that you have imported the data model related to the extension, the predefined pages, and search layout components.

To configure MDM SaaS, perform the following tasks:

1. Import the Cloud Data Integration assets.
2. Import the job assets.
3. Add a secure agent.
4. Configure the flat file connection.
5. Configure the Business 360 Connector.
6. Run the jobs.

#### Importing the Cloud Data Integration assets

Import the Cloud Data Integration assets, such as predefined taskflows, mapping tasks, and mappings. Create import and export jobs based on the predefined taskflows.

1. In Data Integration, click **Explore** > **Import**.

2. Navigate to the following file:

   `<Extracted extension package>/2_DI_Assets/Product_DI_Assets.zip`

3. Click **Open**.

   The **Import Assets** page lists the assets in the file.

4. Ensure that all the assets are selected, and then select **Publish Taskflow(s) after import**.
5. Click **Import**.
6. On the **My Import/Export Logs** page, verify whether the import job is successful.

## Importing the job assets

After you import the Cloud Data Integration assets, import the job assets related to the product standard classifications sources. Use ingress jobs to import product standard classifications source records into Product 360 SaaS.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/3_MDM_Job_Assets/Product_MDM_Job_Assets.zip`

3. Click **Open**.

   The **Import Assets** page lists the assets in the file.

4. Ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify whether the import job is successful.

## Adding a Secure Agent

After you publish the Cloud Application Integration processes, add a Secure Agent to the predefined Secure Agent group.

1. In Administrator, click **Runtime Environments**.
2. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Add or Remove Secure Agents**.
3. In the **Available Agents** list, select the Secure Agent that you want to add to the group, and click **Select**.
4. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Enable or Disable Services, Connectors**.
5. From the **Services** tab, select the services to enable for the Secure Agent group.
6. From the **Connectors** tab, select the connectors to enable for the Secure Agent group.
7. Click **Save**.

## Configuring the flat file connection

To access flat files from the Secure Agent, configure the flat file connection.

1. In Administrator, click **Connections**.
2. Click `infa360rtl_conn_flat_file`.
3. Verify the directory to store the flat file.

   Default is `C:\ReferenceData`.

4. Test the connection, and ensure that the connection is successful.

### Configuring Business 360 connector

You can use the Business 360 Connector to write data from external data sources into MDM SaaS. If the input values for source system integer fields are null, the Business 360 Connector converts the null values to 0 in MDM SaaS.

1. In Administrator, click **Connections**.
2. Click `infa360_retail_business360`.
3. Test the connection.

   The connection might fail with the following error:
   `The test connection for infa360_retail_business360 failed. Unable to fetch connector attributes, Ensure adapter ID is valid[com.infa.adapter.mdmflat].`
4. If the connection fails, verify and ensure that the connection is successful.
   a. Ensure that you have a license for Business 360 Connector.
   b. Ensure that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

## Loading Global Product Classification data file for integration with MDM 360 for Retail

You can use MDM 360 for Retail to load Global Product Classification (GPC) data file into Product 360 SaaS.

You can run ingress jobs to load Global Product Classification (GPC) data into Product 360 SaaS.

Before you run the ingress jobs, perform the following tasks:

1. Manually download the file that contains the GPC data from the GS1 website in `.xlsx` format.
2. Save the downloaded file with the name "GPC_data" in `.csv` format.
3. Locate a file named "GPC_import_config.csv" in the Reference Data folder of the MDM 360 for Retail package, where you can choose a language of your choice and a hierarchy instance name. Ensure that you make no changes to the ID field in this file.
4. Save both the files in the directory where the flat file connection is configured. Default directory is `C:\ReferenceData`.
5. Run ingress jobs to import data from the flat file to Product 360 SaaS.

   For more information about ingress jobs, see "Batch jobs of the Category business entity for Global Product Classification" on page 104.

# Setting up and loading Google product category for integration with MDM 360 for Retail

Use MDM 360 for Retail to integrate Product 360 SaaS with Google product category to standardize the product category and hierarchy of the master data in MDM SaaS.

# Setting up MDM 360 for Retail for integration with Google product category

**Note:** Before you import the assets related to Google product category, ensure that you have imported the data model related to the extension, the predefined pages, and search layout components.

To configure MDM SaaS, perform the following tasks:

1. Import the Cloud Data Integration assets.
2. Import the job assets.
3. Add a secure agent.
4. Configure the flat file connection.
5. Configure the Business 360 Connector.
6. Run the jobs.

## Importing the Cloud Data Integration assets

Import the Cloud Data Integration assets, such as predefined taskflows, mapping tasks, and mappings. Create import and export jobs based on the predefined taskflows.

1. In Data Integration, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/2_DI_Assets/Product_DI_Assets.zip`
3. Click **Open**.

   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and then select **Publish Taskflow(s) after import**.
5. Click **Import**.
6. On the **My Import/Export Logs** page, verify whether the import job is successful.

## Importing the job assets

After you import the Cloud Data Integration assets, import the job assets related to the product standard classifications sources. Use ingress jobs to import product standard classifications source records into Product 360 SaaS.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/3_MDM_Job_Assets/Product_MDM_Job_Assets.zip`
3. Click **Open**.

   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify whether the import job is successful.

## Adding a Secure Agent

After you publish the Cloud Application Integration processes, add a Secure Agent to the predefined Secure Agent group.

1. In Administrator, click **Runtime Environments**.

2. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Add or Remove Secure Agents**.
3. In the **Available Agents** list, select the Secure Agent that you want to add to the group, and click **Select**.
4. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Enable or Disable Services, Connectors**.
5. From the **Services** tab, select the services to enable for the Secure Agent group.
6. From the **Connectors** tab, select the connectors to enable for the Secure Agent group.
7. Click **Save**.

### Configuring the flat file connection

To access flat files from the Secure Agent, configure the flat file connection.

1. In Administrator, click **Connections**.
2. Click `infa360rtl_conn_flat_file`.
3. Verify the directory to store the flat file.

   Default is `C:\ReferenceData`.
4. Test the connection, and ensure that the connection is successful.

### Configuring Business 360 connector

You can use the Business 360 Connector to write data from external data sources into MDM SaaS. If the input values for source system integer fields are null, the Business 360 Connector converts the null values to 0 in MDM SaaS.

1. In Administrator, click **Connections**.
2. Click `infa360_retail_business360`.
3. Test the connection.

   The connection might fail with the following error:
   ```
   The test connection for infa360_retail_business360 failed. Unable to fetch connector attributes, Ensure adapter ID is valid[com.infa.adapter.mdmflat].
   ```
4. If the connection fails, verify and ensure that the connection is successful.
   a. Ensure that you have a license for Business 360 Connector.
   b. Ensure that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

## Loading Google product category data file for integration with MDM 360 for Retail

You can use MDM 360 for Retail to load Google product category data file into Product 360 SaaS.

You can run the predefined ingress jobs to import Google product category data into Product 360 SaaS.

Before you run the ingress jobs, perform the following tasks:

1. Manually download the Google product category flat file from Google in `.xlsx` format.
2. Save the downloaded file with the name "GoogleCategory_data" in `.csv` format.

3. Locate a file named "GoogleCategory_import_config.csv" in the Reference Data folder of the MDM 360 for Retail package, where you can choose a language of your choice and a hierarchy instance name. Ensure that you make no changes to the ID field in this file.
4. Save both the files in the directory where the flat file connection is configured. The default directory is `C:\ReferenceData`.
5. Run ingress jobs to import data from the flat file to Product 360 SaaS.

   For more information about predefined ingress jobs, see "Batch jobs of the Category business entity for Google product category" on page 105.

# Configuring MDM 360 for Retail to integrate with Google BigQuery

Use MDM 360 for Retail to integrate MDM SaaS with Google BigQuery to drive analytics and generative AI applications for customer, location, supplier, product, emission, and household master data and relationships.

Publish master data from MDM SaaS to the Google BigQuery staging store. The extension then publishes data from the staging store into the Google BigQuery target dimension tables.

**Note:** Before you import the assets related to source systems, ensure that you have imported the data model related to the extension, the predefined custom pages, and the source system.

To configure MDM SaaS, perform the following tasks:

1. Create datasets.
2. Run the Google BigQuery scripts.
3. Import the Cloud Data Integration assets for staging and analytical schema.
4. Import the job assets.
5. Set the Secure Agent parameters.
6. Import the parameter files.
7. Run the jobs and taskflows.

## Creating datasets

After you download and extract the extension package, create datasets to organize dimension tables and views in Google BigQuery.

1. In Google Cloud, click **Console**.
2. From the **Navigation** menu, click **BigQuery**.
3. Select the project where you want to create a dataset.
4. Expand the **Actions** menu, and click **Create dataset**.
5. On the **Create dataset** page, enter the following parameters:
   - Dataset ID. Unique dataset identifier.
   - Location type. Geographic location of the dataset.

     **Note:** Ensure that you use the same geographic location for all datasets.

## Running the Google BigQuery scripts

To add Google BigQuery staging and analytical schema, run the DDL scripts in Google BigQuery.

1. In Google Cloud, click **Console**.
2. From the **Navigation** menu, click **BigQuery**.
3. Select the project from where you want to run the script.
4. Click the **Create SQL query** icon.
5. Copy the script from the following location to the Query editor text area:

   `<Extracted extension package>/4_Analytics_Assets/1_DDL/1_BigQuery_Staging/BigQuery_Staging.zip/<Domain>_Stage`
6. Click **Run**.
7. To add Google BigQuery analytical schema, repeat steps 4 to 6.

   **Note:** To add Google BigQuery analytical schema, copy the script from the following location to the Query editor text area: `<Extracted extension package>/4_Analytics_Assets/1_DDL/2_BigQuery_Analytics/BigQuery_Analytics.zip/Analytics`

## Importing the Cloud Data Integration assets for staging schema

Import the Cloud Data Integration assets, such as predefined taskflows, mapping tasks, and mappings for the staging schema.

1. In Data Integration, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/4_Analytics_Assets/2_DI_Assets/1_DI_Assets_Staging.zip/<Domain>_Staging.zip`
3. Click **Open**.

   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and then select **Publish Taskflow(s) after import**.
5. Click **Import**.
6. On the **My Import/Export Logs** page, verify whether the import job is successful.
7. Navigate to the following file and repeat steps 3 through 6:

   `<Extracted extension package>/4_Analytics_Assets/2_DI_Assets/2_DI_Assets_Analytics.zip`

## Importing the job assets

Import the job assets to egress MDM SaaS master data, relationships, and to Google BigQuery staging store.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/4_Analytics_Assets/3_MDM_Job_Assets/<Domain>_Job_Assets_Staging.zip`
3. Click **Open**.

   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify whether the import job is successful.

## Setting up the Secure Agent parameters

After you import the MDM SaaS batch jobs, set the Secure Agent parameters.

1. In Administrator, click **Runtime Environments**.
2. Expand the **Actions** menu for the Secure Agent, and select **Edit Secure Agent**.
3. In the **Custom Configuration Details** section, enter the following details:

| Field Name | Value |
|---|---|
| Type | DTM |
| Name | SFTP_MaxWriteSize |
| Value | 8192 |

4. To save the custom configuration of the Secure Agent, click **OK**.

   The Secure Agent restarts automatically within 10 minutes. To apply the properties immediately, you can restart manually. To avoid failure of any running task, ensure that no tasks run .

## Importing parameter files

Import the list of user-defined parameters and their associated values for Cloud Data Integration mappings.

To import parameter files, save the parameter files in the Secure Agent Installation directory.

Copy the parameter files from the source directory to the target Secure Agent installation directory:

Source: `<Extracted extension package>\4_Analytics_Assets\Secure_Agent_Files\Parameter Files`

Target: `<Secure Agent Installation Directory>\apps\Data_Integration_Server\data\userparameters`

Optionally, if you want to use a configured path for the target location, see *Cloud Data Integration*.

## Configuring Business 360 FEP connector

You can use the Business 360 FEP Connector to write data from external data sources into MDM SaaS. If the input values for source system integer fields are null, the Business 360 Connector converts the null values to 0 in MDM SaaS.

1. In Administrator, click **Connections**.
2. Click `infa360gbq_conn_business360_fep`.
3. Test the connection.

   The connection might fail with the following error:
   `The test connection for infa360gbq_conn_business360_fep failed. Unable to fetch connector attributes, Ensure adapter ID is valid[com.infa.adapter.mdmflat].`
4. If the connection fails, verify and ensure that the connection is successful.
   a. Ensure that you have a license for Business 360 FEP Connector.
   b. Ensure that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

# Running the jobs and taskflows

After you integrate MDM SaaS with Google BigQuery, you can run the egress jobs.

On the **My Import/Export Logs** page, verify whether the egress job is successful.
After you run the egress jobs, run the following Cloud Data Integration taskflows in Cloud Data Integration to populate data from the Google BigQuery staging store into the Google BigQuery dimension and fact tables:

- infa360gbq_tf_gbq_item_stage_gbq_retail_analytics
- infa360gbq_tf_gbq_customer_stage_gbq_retail_analytics
- infa360gbq_tf_gbq_location_stage_gbq_retail_analytics
- infa360gbq_tf_gbq_supplier_stage_gbq_retail_analytics
- infa360gbq_tf_gbq_product_stage_gbq_retail_analytics
- infa360gbq_tf_gbq_txn_stage_gbq_retail_analytics

# INDEX


## I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

## M

maintenance outages 6

## S

status
  IDMC 6
system status 6

## T

trust site
  description 6

## U

upgrade notifications 6

## W

web site 5