Informatica® MDM - Customer 360 SaaS
April 2026

Customer 360 Extension for SAP

Informatica MDM - Customer 360 SaaS Customer 360 Extension for SAP
April 2026

© Copyright Informatica LLC 2021, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-04-11

Table of Contents

Preface. . . . 5
Informatica Resources. . . . 5
Informatica Documentation. . . . 5
IDMC web site. . . . 5
Intelligent Data Management Cloud Communities. . . . 5
IDMC Marketplace. . . . 5
Informatica Knowledge Base. . . . 5
IDMC Trust Center. . . . 6
Informatica Global Customer Support. . . . 6

Chapter 1: Introducing Customer 360 Extension for SAP. . . . 7

Guidelines for importing assets. . . . 7
Guidelines for migrating assets. . . . 8
Prerequisites. . . . 8

Chapter 2: Customer 360 Extension for SAP and SAP integration. . . . 9

Processing data in batches. . . . 9
Ingress data. . . . 9
Egress data. . . . 10
Import reference data. . . . 10

Chapter 3: Customer 360 Extension for SAP assets. . . . 12

Data model attributes. . . . 12
Organization business entity model. . . . 12
Person business entity model. . . . 29
Batch jobs. . . . 49
Batch jobs of the Organization business entity for SAP ECC. . . . 49
Batch jobs of the Person business entity for SAP ECC. . . . 52
Batch jobs of the Organization business entity for SAP S/4HANA. . . . 55
Batch jobs of the Person business entity for SAP S/4HANA. . . . 61
Field mapping. . . . 67
Mapping of Organization business entity and SAP ECC business partner fields 67
Mapping of Organization business entity and SAP S/4HANA Organization business partner fields. . . . 71
Mapping of Person business entity and SAP ECC business partner fields 77
Mapping of Person business entity and SAP S/4HANA Person business partner fields 82
Pages. . . . 89
Reports. . . . 90
Data quality rule association. . . . 90

Chapter 4: Deploying Customer 360 Extension for SAP. 92

Downloading and extracting the Customer 360 Extension for SAP package. 92
Importing Customer 360 Extension for SAP assets. 93
Adding predefined pages. 93
Importing reference data assets. 94
Prerequisites. 94
Importing the reference data. 95

Chapter 5: Integrating Customer 360 Extension for SAP. 96

Importing the Cloud Data Integration assets. 96
Importing the job assets. 97
Importing the Cloud Application Integration assets. 97
Publishing the Cloud Application Integration processes. 98
Adding a Secure Agent. 98
Importing parameter files. 98
Configuring the flat file connection. 99
Configuring Business 360 FEP connector. 99
Configuring Business 360 Connector. 100
Configuring SAP connection. 100
Creating custom tables in SAP. 102
Creating import jobs in Reference 360. 103
Running the jobs. 104

Index. 105

Preface

Follow the instructions in *Customer 360 Extension for SAP* to deploy Customer 360 Extension for SAP.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the IDMC Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Data Management Cloud Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all IDMC components. Subscribing to all components is the best way to be certain you never miss an update.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introducing Customer 360 Extension for SAP

An MDM SaaS extension is a ready-to-use package that streamlines and accelerates the implementation of MDM SaaS. MDM SaaS extensions contain pre-configured assets and integrations that extend and enhance the MDM SaaS business applications. Use an extension to reduce implementation time, enhance data quality, and achieve faster business outcomes.

You can use Customer 360 Extension for SAP to integrate Customer 360 SaaS and SAP and process the SAP records in Customer 360 SaaS. Leverage Customer 360 Extension for SAP to standardize and consolidate customer records. The extension uses the Organization and Person business entities to store SAP records. You can configure SAP to synchronize records with Customer 360 SaaS in batches.

Use Customer 360 Extension for SAP to achieve the following goals:

Import SAP ECC and SAP S/4HANA records

You can import customer and Financial accounting (FI) customer records from SAP ECC and business partner records from SAP S/4HANA into Customer 360 SaaS. After you import the initial load, you can also import incremental changes from SAP ECC and SAP S/4HANA into Customer 360 SaaS.

Master and export SAP ECC records to SAP S/4HANA

You can master customer and FI customer records from SAP ECC and business partner records from SAP S/4HANA in Customer 360 SaaS. You can then export them to SAP S/4HANA as business partner records in batches.

Synchronize records between Customer 360 SaaS and SAP S/4HANA

You can create and process records in Customer 360 SaaS and export these records to SAP S/4HANA as new business partner records. When you update records in Customer 360 SaaS, you can export the incremental changes to the records in SAP S/4HANA.

You can use the following SAP business partner roles with Customer 360 Extension for SAP:

- Business Partner (General)
- Financial Accounting (FI) Customer
- Customer

Guidelines for importing assets

Consider the following guidelines before you import the extension assets:

- Set up the prerequisite MDM SaaS business application.

- Import the extension assets before you customize the business entities. You can safely import multiple extension assets that use different business entities and in different MDM SaaS business applications. When you import the assets in an environment that already has an extension with the same business entities, the import fails.
- After you import the assets, consider them as your custom assets.
- Once you deploy an extension, upgrading to a newer version of the extension isn't supported.

Guidelines for migrating assets

Consider the following guidelines before you migrate the extension assets to another environment:

- To migrate the extension assets to higher environments, such as QA and production, export the assets from the development environment. Then, import them into the QA and production environments. For more information about migrating assets, see *Migrating projects and assets*.
- Don't import the extension assets again into a higher environment.

Prerequisites

Before you deploy Customer 360 Extension for SAP, perform the following prerequisites:

- Ensure that you have the license for the Integration Components for Business 360 and Customer 360 SaaS Edition.
  Ensure that you have the licenses required to manage connections, external data, and service rights.

  Note: The use of the extension doesn't confer any additional license or entitlement to license consumption beyond the terms specified in the applicable licensing agreements.
- Ensure that the version of the package matches the current MDM SaaS version where you import the extension assets.
  To view the MDM SaaS version, in Business 360 Console, click **About** in the IDMC Help menu and verify the build version.

  To view the MDM version of the extension, navigate to the readme text file in the extracted extension package and verify the platform version.

  If the version of the extension bundle doesn't match the current MDM SaaS version, contact Informatica Global Customer Support to use the current version of the extension.
- Based on your requirement, enable the following optional licenses:

Functionality	License
Integrating Customer 360 with SAP S/4HANA	- SAP S/4HANA 2023 version - SAP Business Application Programming Interfaces (BAPI) Connector - SAP Table Connector
Integrating Customer 360 with SAP ECC	- SAP ECC 6.0 EHP8 version - SAP Business Application Programming Interfaces (BAPI) Connector - SAP Table Connector

CHAPTER 2

Customer 360 Extension for SAP and SAP integration

Use Customer 360 Extension for SAP to integrate SAP and Customer 360, process the SAP records in Customer 360, and export the processed records to SAP S/4HANA.

Processing data in batches

You can process SAP ECC and SAP S/4HANA records with Customer 360 SaaS in batches.

Run ingress batch jobs to import records from SAP ECC and SAP S/4HANA into Customer 360 SaaS in batches. Run egress batch jobs to export processed records from Customer 360 SaaS to SAP S/4HANA in batches. The job uses a taskflow to run mapping tasks. Each mapping task includes a mapping that maps the fields in SAP with the business entity fields in Customer 360 SaaS.

Ingress data

You can import SAP ECC and SAP S/4HANA records to Customer 360 SaaS and process these records in batches using predefined ingress jobs.

When you import SAP ECC customer and FI customer records and SAP S/4HANA business partner records to Customer 360 SaaS, the ingress job imports them as customer records. A customer record contains a source primary key, such as a customer number for an SAP ECC customer and FI customer record or a business partner number for an SAP S/4HANA business partner record. After the initial import, you can run incremental ingress jobs to incrementally import the records that are added or updated in SAP ECC and SAP S/4HANA to Customer 360 SaaS.

To import records from SAP, the ingress job uses SAP Table Connector and Business 360 FEP Connector. To read data from SAP, you require SAP Table Connector. To write data into Customer 360 SaaS, you require Business 360 FEP Connector. After you import SAP records, you can process the records in Customer 360 SaaS.

For more details about predefined ingress jobs, see “Batch jobs” on page 49.

The following image shows how to ingress SAP records in batches:



Egress data


You can export the customer records from Customer 360 SaaS to SAP S/4HANA in batches using the predefined egress jobs.

After you create, update, or process customer records in Customer 360 SaaS, you can export them to custom SAP table in SAP S/4HANA in batches. Use predefined egress jobs, Cloud Data Integration assets, and multiple Business Application Programming Interfaces (BAPIs) to export the processed customer records from Customer 360 SaaS to SAP S/4HANA in batches. After you export the records to SAP S/4HANA, the integration status of records, which is either successful or failed, is added to Customer 360 SaaS.

You can export the following records from Customer 360 SaaS to SAP S/4HANA in batches:

- Records imported from SAP ECC. After you import customer and FI customer records from SAP ECC, you can process these records in Customer 360 SaaS and export them to SAP S/4HANA as business partner records.
- Records imported from SAP S/4HANA. After you import business partner records from SAP S/4HANA, you can process these records in Customer 360 SaaS and export them to SAP S/4HANA as business partner records.
- Records created or updated in Customer 360 SaaS. After you create a customer record in Customer 360 SaaS, you can process it and then export it to SAP S/4HANA as a business partner record. SAP S/4HANA then assigns a new business partner number to the processed record and stores the number in an SAP custom table. This business partner number is retrieved and stored in the Identifier field of the Organization or Person business entity in Customer 360 SaaS. If you update a record in Customer 360 SaaS that was previously exported to SAP S/4HANA, you can export the incremental changes to SAP S/4HANA using the existing business partner number without creating duplicates.

The following images show how to export customer records to custom SAP table in SAP S/4HANA in batches:

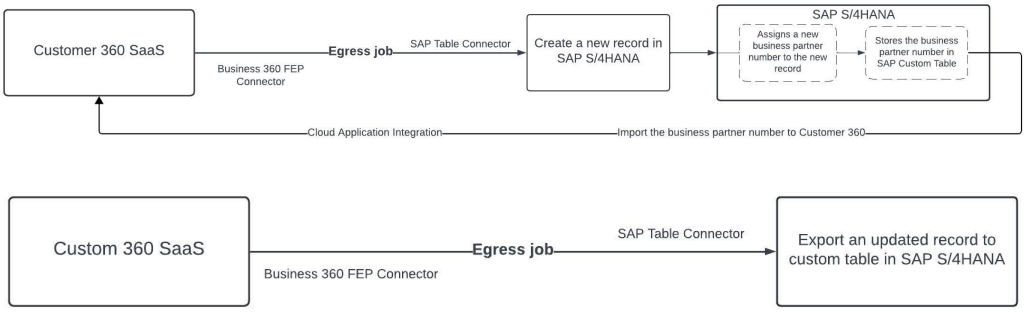

Import reference data

To import reference data sets from SAP ECC or SAP S/4HANA into Reference 360, you can create import jobs in Reference 360.

You can import the following reference data from SAP ECC or SAP S/4HANA:

- Reconciliation account
- Company code
- Sales org
- Sales division
- Sales distribution channel

For information about creating import jobs, see “Creating import jobs in Reference 360” on page 103.

After you create the import jobs, run the jobs.

For information about running import jobs, see “Running the jobs” on page 104.

CHAPTER 3

Customer 360 Extension for SAP assets

Customer 360 Extension for SAP is available as a package for installation on request.

The package includes the following predefined assets:

- Business entities
- Batch jobs
- Pages
- Field mappings
- Data quality rule associations
- Reports
- Reference data assets
- Runtime Secure Agent group

Data model attributes

Customer 360 Extension for SAP includes additional fields and reference data for the Organization and Person business entities.

Organization business entity model

Organization business entity stores information about an organization. This business entity contains some basic fields and some field groups.

General fields of the Organization business entity

The general fields store some basic information about an organization, such as name of the organization and company type.

The following table describes the general fields of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Type	companyType	Lookup	NA	CompanyType	Type of company.
Country Of Incorporation	countryOfIncorporation	Lookup	NA	Country	Country of incorporation of an organization.
Company Logo	imageUrl	Text	255	NA	URL of the image for an organization.
Customer Classification	X_infac360sap_customerClassification	Lookup	NA	infac360sap_CustomerClassification	Classification of the customers.
Date of Incorporation	dateOfIncorporation	Date Time	NA	NA	Date of incorporation of an organization.
Name	name	Text	255	NA	Name of an organization.
Nielsen Indicator	X_infac360sap_nielsenIndicator	Lookup	NA	infac360sap_NielsenIndicator	Indicator to predict the consumer behavior of an organization.
Number Of Employees	numberOfEmployees	Integer	NA	NA	Total number of employees in an organization.
State of Incorporation	stateOfIncorporation	Lookup	NA	State	State of incorporation of the organization.

Address field group of the Organization business entity

The Address field group stores the address details of an organization.

The following table describes the fields of the Address field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	200	NA	Line 1 of the address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address, such as active, old address, or changed.
Address Type	addressType	Lookup	NA	AddressType	Type of address, such as organization, high-rise building, or home.
City	city	Text	50	NA	City of postal address.
Coordinate System	coordinateSystem	Text	100	NA	Coordinate system used to determine the location of the address.
Country	country	Lookup	NA	Country	Country code of postal address, such as Australia or United States.
County	county	Text	50	NA	County of postal address.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the address is the default address.
End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the address.
Enriched Indicator	enrichedIndicator	Lookup	NA	AddressEnrichedIndicator	Validation status of the address, such as error, valid, or not validated.
Latitude	latitude	Text	20	NA	Latitude for the address.
Location Coordinate Description	locationCoordinateDesc	Text	50	NA	Location of the address using the geocode coordinates system.
Longitude	longitude	Text	20	NA	Longitude of the address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	10	NA	Postal code extension of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the address is active.
State	state	Lookup	NA	State	State of postal address. For example, if the country is United States, the state can be California or Florida.
Usage Type	usageType	Lookup	NA	AddressUsageType	Intended use or purpose of an address, such as business, work, or personal.
Verification Message	statusMessage	Text	255	NA	Validation message that the address verification service returns.
Verification Status Code	statusCode	Text	10	NA	Validation status that the address verification service returns.

Alternate Name field group of the Organization business entity

The Alternate Name field group stores the details of the alternative name of an organization.

The following table describes the fields of the Alternate Name field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Alternate Name	name	Text	255	NA	An alternative name for an organization.
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the alternate name.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the alternate name is valid.
Name Type	nameType	Lookup	NA	AlternateNameType	Alternate name type, such as business name, company name, or marketing name.

Bank Details field group of the Organization business entity

The Bank Details field group stores the banking information of an organization, such as account number, account holder, and bank detail identifier.

The following table describes the fields of the Bank Details field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Holder	X_infac360sap_accountHolder	Text	50	NA	Name of an account holder.
Account Name	X_infac360sap_AccountName	Text	255	NA	Name of an organization account.
Account Number	X_infac360sap_accountNumber	Text	50	NA	Bank account number of an organization.
Bank Detail Identifier	X_infac360sap_bankDetailIdentifier	Text	255	NA	Unique identifier for bank details.
Bank Key	X_infac360sap_bankKey	Text	255	NA	Unique identifier assigned to a bank or branch.
Country	X_infac360sap_country	Lookup	NA	Country	Country of the bank account.
Effective End Date	X_infac360sap_effectiveEndDate	Date	NA	NA	Date until when the bank account is active.
Effective Start Date	X_infac360sap_effectiveStartDate	Date	NA	NA	Date from when the bank account is active.
IBAN	X_infac360sap_iban	Text	50	NA	International Bank Account Number, which is a unique identifier for a bank account to process international payments.

Company Code field group of the Organization business entity

The Company Code field group stores details of an organization, such as company code and reconciliation account.

The following table describes the fields of the Company Code field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Code	X_infac360sap_companyCode	Lookup	NA	infas360sap_CompanyCode	Company code of a buyer.
Reconciliation Account	X_infac360sap_reconciliationAccount	Lookup	NA	infas360sap_ReconciliationAccount	Account used to reconcile the sub ledgers with the general ledger.

Customer Type field group of the Organization business entity

The Customer Type field group stores the customer type details of an organization.

The following table describes the fields of the Customer Type field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Customer Type	X_infac360sap_custTyp	Lookup	NA	infac360sap_CustomerType	Type of customer. For example, sales partner or competitor.

Document Field Group of the Organization Business Entity

The Document field group stores the document details of an organization.

The following table lists the fields that the Document field group contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Document Link	documentLink	Text	255	NA	URL to access the document.
Document Name	documentName	Text	255	NA	Name of the document.
Document Type	documentType	Lookup	NA	DocumentType	Type of the document. For example, application form, claim form, or policy.
File Name	fileName	Text	255	NA	Physical name of the file.
Valid From	validFrom	Date	NA	NA	Date from when the document becomes valid.
Valid To	validTo	Date	NA	NA	Date until when the document is valid.

Email field group of the Organization business entity

The Email field group stores information about the electronic addresses, such as email addresses and hygiene status of the electronic address.

The following table describes the fields of the Email field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the electronic address is primary or default.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date for the electronic address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date for the electronic address.
Electronic Address	electronicAddress	Text	255	NA	Actual electronic address of an organization.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the electronic address. For example, active, blocked, or not in use.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Validation status of the electronic address. For example, error, valid, or not validated.
Hygiene Status	hygieneStatus	Text	50	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or former trap.
Net Protect Code	netProtectCode	Text	50	NA	Net protect codes identify which service or appliance is monitoring a given network.
Usage Type	usageType	Lookup	NA	ElectronicAddressUsageType	Intended use of the communication preference that an organization shared. For example, business or personal.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Verification Message	validateMessage	Text	50	NA	Message that the electronic address validation service generates to indicate how valid and trusted the electronic address is.
Verification Status Code	validationStatusCode	Text	50	NA	Validation status code that the email address validation service returns.

Financial field group of the Organization business entity

The Financial field group stores financial information of a person.

The following table describes the fields of the Financial field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Amount	amount	Double	20	NA	Total value of the physical assets that an organization owns.
Currency	currency	Lookup	NA	Currency	Currency used for transactions. For example, United States dollar or United Kingdom pound.
Finance Info Type	financeInfoType	Lookup	NA	FinanceInfoType	Type of financial information. For example, total equity, annual revenue, or debt.
Finance Reliability	financeReliability	Lookup	NA	FinanceReliability	Reliability of the financial data, if the data is actual or an estimate.
Time Period	timePeriod	Text	255	NA	Finance period for which the data is collected.
Time Period Type	financeTimePeriodType	Lookup	NA	TimePeriodType	Type of the finance period. For example, quarterly or annual.
Unit	financialUnit	Lookup	NA	FinancialUnit	Unit for the amount. For example, thousand, million, or billion.

Identifier field group of the Organization business entity

The Identifier field group stores the account details of an organization, such as country and responsible institution.

The following table describes the fields of the Identifier field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
City	X_infac360sap_city	Text	255	NA	City of an organization.
Country	X_infac360sap_country	Lookup	NA	Country	Country of an organization.
Description	X_infac360sap_description	Text	255	NA	Description of an organization.
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the identifier.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Issued date of the identifier.
Identifier Type	idType	Lookup	NA	AlternateIdType	Type of alternate identifier. For example, D&B ID or Federal Employer Identification Number.
Identifier Value	altIdValue	Text	50	NA	Value of alternate identifier, such as employee ID or tax ID number.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority that has issued the identifier to an organization. For example, Dun & Bradstreet or government agency.
Issued Date	X_infac360sap_issuedDate	Date	NA	NA	Issue date of the identifier.
Region	X_infac360sap_region	Lookup	NA	State	State region of the issuing country.
Status	identifierStatus	Lookup	NA	IdentifierStatus	Code to indicate the status of the alternate identifier. For example, effective, disqualified, expired, or temporary.

Indicator field group of the Organization business entity

The Indicator field group stores the indicator details based on which you want to identify an organization.

The following table describes the fields of the Indicator field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Indicator Type	X_infac360sap_indicatorType	Lookup	NA	IndicatorType	Indicates the type of an organization, such as minority-owned, women-owned, and small business.
Indicator Value	X_infac360sap_indicatorValue	Text	255	NA	Actual value of the indicator.

Industry field group of the Organization business entity

The Industry field group stores the industry details of an organization.

The following table describes the fields of the Industry field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Industry Code	X_infac360sap_industryCode	Lookup	NA	infac360sap_IndustryCode	Code of the industry the organization belongs to.
Industry Value	X_infac360sap_industryValue	Text	255	NA	Industry identifier or name of the industry.

Insurance field group of the Organization business entity

The Insurance field group stores the insurance details of an organization, such as name of the insurance provider and policy number.

The following table describes the fields of the Insurance field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Currency	currency	Lookup	NA	Currency	Currency for the premium payment and claim settlement.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the insurance.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the insurance.
Insurance Holder	insuranceHolder	Text	255	NA	Name of the insurance holder.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Insurance Provider	insuranceProvider	Text	255	NA	Company that provides the insurance.
Insurance Sub Type	insuranceSubType	Lookup	NA	InsuranceSubType	Insurance subtype. For example, if the insurance type is lenders mortgage, the subtype might be extended lenders mortgage.
Insurance Type	insuranceType	Lookup	NA	InsuranceType	Type of the insurance, such as commercial auto, lenders mortgage, or shipping.
Insurance Value	insuranceValue	Double	NA	NA	Amount insured.
Policy Number	insurancePolicyNumber	Text	100	NA	Insurance policy number.
Status	insuranceStatus	Text	255	insuranceStatus	Status of the insurance. For example, active or expired.
Unit	unit	Lookup	NA	FinancialUnit	Specifies the unit for the amount. For example, thousands, millions, ot billions.

Key People field group of the Organization business entity

The Key People field group stores information about the key executives in an organization. The key executives are important people in an organization. For example, the key executives include chief executive officer and chief financial officer of an organization.

The following table describes the fields of the Key People field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Designation	designation	Text	255	NA	Designation of the key executive.
Executive Type	executiveType	Lookup	NA	ExecutiveType	Executive type. For example, executive chairman, non-executive chairman, or chief executive officer.
Name	name	Text	255	NA	Name of the executive.

Language field group of the Organization business entity

The Language field group stores the language proficiency details of an organization.

The following table describes the fields of the Language field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Language	X_infac360sap_language	Lookup	NA	infac360sap_Language	The organizational language.
Primary Indicator	X_infac360sap_primaryIndicator	Boolean	NA	NA	Indicates whether the language is the primary language of the organization.

Phone field group of the Organization business entity

The Phone field group stores the phone details of an organization.

The following table describes the fields of the Phone field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Cell Prefix	cellPrefix	Text	255	NA	Dialing prefix that must prepend the National Significant Number for inbound international calls.
Default Indicator	defaultIndicator	Boolean	NA	NA	Flag to indicate whether the phone number is the default number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Flag to indicate whether an organization is willing to receive unsolicited phone calls from marketers.
Effective End Date	effectiveEndDate	DateTime	NA	NA	Date until when the phone number was active or will be active.
Effective Start Date	effectiveStartDate	DateTime	NA	NA	Date from when the phone number is active.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Validation status of the phone number. For example, error, valid, or not validated.
ISO	iso	Text	2	NA	ISO country code.
International Format	internationalFormat	Text	50	NA	International format for the phone number.
International Prefix	internationalPrefix	Text	255	NA	Prefix used to select an international telephone circuit.
National Destination Code	nationalDestinationCode	Text	255	NA	Code that identifies a numbering area within a country or a group of countries.
National Destination Code Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether a country defines geographic area codes in the National Numbering Plan.
National Format	nationalFormat	Text	50	NA	National format for the phone number.
National Prefix	nationalPrefix	Text	255	NA	Digit or combination of digits that must be dialed before an area or city code.
Phone Number	phoneNumber	Text	255	NA	Organization phone number.
Phone Number Extension	phoneNumberExtension	Text	255	NA	Extension number.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, landline, mobile, or fax.
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, personal, business, or home.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Prefix Number	prefixNumber	Text	255	NA	Country dialing code.
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as publicly unavailable or the contact point is active.
Verification Message	validationMessage	Text	255	NA	Validation message that the phone number validation service returns.
Verification Status Code	validationStatusCode	Text	255	NA	Validation status code that the phone number validation service returns.

PO Box Address field group of the Organization business entity

The PO Box Address field group stores the postal address details of an organization, such as postal code and delivery service number.

The following table describes the fields of the PO Box Address field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Postal Code	X_infac360sap_companyPostalCode	Number	NA	NA	Postal code for a large organization.
Delivery Number	X_infac360sap_deliveryNumber	Number	NA	NA	Delivery service number.
Delivery Service	X_infac360sap_deliveryService	Lookup	NA	infac360sap_DeliveryService	Type of delivery service. For example, counter delivery or general delivery.
Postal Code	X_infac360sap_postalCode	Number	NA	NA	Postal code of the address.
PO Box	X_infac360sap_poBox	Text	255	NA	PO box number.
PO Box Without Number	X_infac360sap_poBoxWoNo	Boolean	NA	NA	Indicates whether the PO box is without number.
PO Box Lobby	X_infac360sap_poBoxLobby	Text	255	NA	Name of the PO box lobby.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Other City	X_infac360sap_otherCity	Text	255	NA	Different PO box city.
Other Country	X_infac360sap_otherCountry	Lookup	NA	Country	Different PO box country.
Other Region	X_infac360sap_otherRegion	Lookup	NA	State	Different PO box region.
Undeliverable	X_infac360sap_undeliverable	Lookup	NA	infac360sap_Undeliverable	Undelivered status. For example, deceased or illegible address.

Record Status field group of the Organization business entity

The Record Status field group stores the status of an Organization business entity record.

The following table describes the fields of the Record Status field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Description	X_infac360sap_description	Text	255	NA	A brief description of the status of a record.
Last Updated	X_infac360sap_lastUpdated	Date and Time	NA	NA	The latest date and time when the status was updated.
Status	X_infac360sap_status	Lookup	NA	infap360mm_errorStatus	Integration status of a record, such as success or failure.
Status Type	X_infac360sap_status_Type	Lookup	NA	infas360sap_ErrorStatusType	Type of record status, such as SAP S/4HANA integration status.

Role field group of the Organization business entity

The Role field group stores the business partner roles assigned for the business transactions of organizations.

The following table describes the fields of the Role field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Role	X_infac360sap_bpRole	Lookup	NA	infac360sap_OrgRoleType	Roles assigned to a business partner.

Sales Area field group of the Organization business entity

The Sales Area field group stores the sales and distribution information of an Organization such as, sales org, division, and distribution channel.

The following table describes the fields of the Sales Area field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Sales Org	X_infac360sap_salesOrgnization	Lookup	NA	X_infac360sap_SalesOrgnization	Unit of an organization that handles sales.
Sales Division	X_infac360sap_salesDiv	Lookup	NA	X_infac360sap_salesDiv	Division of a sales organization.
Sales Distribution Channel	X_infac360sap_salesDistributionchn	Lookup	NA	X_infac360sap_salesDistributionchn	Channel through which salable materials or services of an organization reach its customers, such as wholesale, retail, or direct sales.

Segment field group of the Organization business entity

The Segments field group stores information about the segment of an organization. Segmentation can help marketers to design targeted campaigns.

The following table describes the fields of the Segment field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Segment Type	segmentType	Lookup	NA	SegmentType	Type of segment. For example, age or income.
Segment Value	segmentValue	Lookup	NA	SegmentValue	Name of the category or segment. For example, if the segment type is age, then segment value can be 0-18 years.

Social Media field group of the Organization business entity

The Social Media field group stores information about the social media identifiers of an organization.

The following table describes the fields of the Social Media field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Handle	socialMediaHandle	Text	255	NA	Social media contact details.
Social Media Type	socialHandleType	Lookup	NA	SocialHandleType	Type of social media contact details. For example, Facebook, Linkedin, or Pinterest.

Status field group of the Organization business entity

The Status field group stores the statuses of an organization. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table describes the fields of the Status field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status Type	statusType	Lookup	NA	OrgStatusType	Status type of an organization, such as onboarding or primary status.
Status Value	statusValue	Lookup	NA	OrgStatusValue	Status value of an organization, such as active, accepted, or rejected.

Stock field group of the Organization business entity

The Stock field group stores information about the stock exchanges where an organization trades.

The following table describes the fields of the Stock field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country in which the stock exchange is located.
Stock Exchange	stockExchangeName	Text	255	NA	Name of the stock exchange that trades the shares.
Ticker Symbol	tickerSymbol	Text	255	NA	Abbreviation used to identify the publicly traded shares of an organization.

Tax Details group of the Organization business entity

The Tax field group stores the tax-related information of an organization, such as tax name and tax type.

The following table describes the fields of the Tax Details field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country of taxation.
Currency	currency	Lookup	NA	Currency	Currency in which the tax is paid.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of the tax period.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of the tax period.
State	state	Lookup	NA	State	State within the country of the taxation.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Tax Authority	taxAuthority	Lookup	NA	TaxAuthority	Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department.
Tax Number	taxNumber	Text	50	NA	Unique number that identifies an organization for tax purposes.
Tax Number Type	taxNumberType	Lookup	NA	TaxNumberType	Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN).
Tax Paid	taxPaid	Text	50	NA	Tax amount that an organization has paid.
Tax Payer Type	taxPayerType	Lookup	NA	TaxPayerType	Type of tax payer. For example, company, partnership, or trust.

Person business entity model

Person business entity stores information about a person. This business entity contains some basic fields and some field groups.

General fields of the Person business entity

The general fields store some basic information about a person such as number of household menbers and occupation.

The following table describes the general fields of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Birth Country	X_infac360sap_birthCountry	Lookup	NA	Country	The country of birth for a person.
Birth Date	birthDate	Date Time	NA	NA	Date of birth of the person.
Birth Place	birthPlace	Text	255	NA	Place of birth of a person.
Children	X_infac360sap_children	Integer	2	NA	Number of children.
Designation	designation	Text	255	NA	Designation or position of a person.
First Name	firstName	Text	255	NA	First name of a person.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Full Name	fullName	Text	255	NA	Full name of a person.
Gender	gender	Lookup	NA	Gender	Gender of a person.
Household Members	X_infac360sap_houseHoldMembers	Integer	2	NA	Number of household members.
Image	imageUrl	Text	255	NA	URL of the image of a person.
Last Name	lastName	Text	255	NA	Last name of a person.
Marital Status	maritalStatus	Lookup	NA	MaritalStatus	Marital status of the person. For example, single, married, or divorced.
Middle Name	middleName	Text	255	NA	Middle name of a person.
Occupation	X_infac360sap_occupation	Lookup	NA	infac360sap_Occupation	Occupation of a person.
Prefix Name	prefixName	Lookup	NA	PrefixName	Prefix for the name of a person. For example, Dr, Mr, or Mrs.
Salutation	X_infac360sap_salutation	Text	255	NA	Salutation for a person.
Suffix Name	suffixName	Lookup	NA	SuffixName	Suffix name of a person. For example, Sr, Jr, II, or III.
Title	title	Text	255	NA	Title associated with a person's name.

Address field group of the Person business entity

The Address field group stores the address details of a person.

The following table describes the fields of the Address field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	200	NA	Line 1 of the address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address, such as active, old address, or changed.
Address Type	addressType	Lookup	NA	AddressType	Type of address, such as organization, high-rise building, or home.
City	city	Text	50	NA	City of postal address.
Coordinate System	coordinateSystem	Text	100	NA	Coordinate system used to determine the location of the address.
Country	country	Lookup	NA	Country	Country code of postal address, such as Australia or United States.
County	county	Text	50	NA	County of postal address.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the address is the default address.
End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the address.
Enriched Indicator	enrichedIndicator	Lookup	NA	AddressEnrichedIndicator	Validation status of the address, such as error, valid, or not validated.
Latitude	latitude	Text	20	NA	Latitude for the address.
Location Coordinate Description	locationCoordinateDesc	Text	50	NA	Location of the address using the geocode coordinates system.
Longitude	longitude	Text	20	NA	Longitude of the address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	10	NA	Postal code extension of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the address is active.
State	state	Lookup	NA	State	State of postal address. For example, if the country is United States, the state can be California or Florida.
Usage Type	usageType	Lookup	NA	AddressUsageType	Intended use or purpose of an address, such as business, work, or personal.
Verification Message	statusMessage	Text	255	NA	Validation message that the address verification service returns.
Verification Status Code	statusCode	Text	10	NA	Validation status that the address verification service returns.

Alternate Name field group of the Person business entity

The Alternate Name field group stores the details of the alternative name of a person.

The following table describes the fields of the Alternate Name field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Alternate Name	AlternateName	Text	255	NA	An alternative name of a person.
Alternate Name Type	alternateNameType	Lookup	NA	AlternateNameType	Type of alternate name, such as alias, maiden name, or married name.
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the alternate name.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the alternate name is valid.

Bank Details field group of the Person business entity

The Bank Details field group stores the banking information of a person, such as account number, account holder, and bank detail identifier.

The following table describes the fields of the Bank Details field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Holder	X_infac360sap_accountHolder	Text	50	NA	Name of an account holder.
Account Name	X_infac360sap_AccountName	Text	255	NA	Name of a person account.
Account Number	X_infac360sap_accountNumber	Text	50	NA	Bank account number of a person account.
Bank Detail Identifier	X_infac360sap_bankDetailIdentifier	Text	255	NA	Unique identifier for bank details.
Bank Key	X_infac360sap_bankKey	Text	255	NA	Unique identifier assigned to a bank or branch.
Country	X_infac360sap_country	Lookup	NA	Country	Country of the bank account.
Effective End Date	X_infac360sap_effectiveEndDate	Date	NA	NA	Date until when the bank account is active.
Effective Start Date	X_infac360sap_effectiveStartDate	Date	NA	NA	Date from when the bank account is active.
IBAN	X_infac360sap_iban	Text	50	NA	International Bank Account Number, which is a unique identifier for a bank account to process international payments.

Company Code field group of the Person business entity

The Company Code field group stores details of an organization a person is associated with.

The following table describes the fields of the Company Code field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Code	X_infac360sap_companyCode	Lookup	NA	infas360sap_CompanyCode	Company code of a buyer.
Reconciliation Account	X_infac360sap_reconciliationAccount	Lookup	NA	infas360sap_ReconciliationAccount	Account used to reconcile the sub ledgers with the general ledger.

Citizenship field group of the Person business entity

The Citizenship field group stores the details of citizenship of a person, such as country and status of citizenship.

The following table describes the fields of the Citizenship field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Citizen of Country	citizenOfCountry	Lookup	NA	Country	Country to which a person belongs.
Citizenship Status	citizenshipStatus	Text	255	NA	Status of the citizenship.
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of citizenship.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the citizenship is valid.
Supporting Document Name	supportingDocumentName	Text	255	NA	Name of the supporting document that proves the citizenship.

Customer Type field group of the Person business entity

The Customer Type field group stores the customer type details of a person.

The following table describes the fields of the Customer Type field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Customer Type	X_infac360sap_customerType	Lookup	NA	infac360sap_CustomerType	Type of customer. For example, consumer or competitor.

Demographics field group of the Person business entity

The Demographics field group stores the demographic details of a person.

The following table describes the fields of the Demographics field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Demographic Type	demographicType	Lookup	NA	DemographicType	Type of demographic factors. For example, ethnicity, income level, age, and profession.
Demographic Value	demographicValue	Lookup	NA	DemographicValue	Demographic values for a demographic type. For example, if ethnicity is a demographic type, then Hispanic and Asian are demographic values.

Document field group of the Person business entity

The Document field group stores the document details of a person.

The following table describes the fields of the Document field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Document Link	documentLink	Text	255	NA	URL to access the document.
Document Name	documentName	Text	255	NA	Name of the document.
Document Type	documentType	Lookup	NA	DocumentType	Type of the document. For example, application form, claim form, or policy.
File Name	fileName	Text	255	NA	Physical name of the file.
Valid From	validFrom	Date	NA	NA	Date from when the document becomes valid.
Valid To	validTo	Date	NA	NA	Date until when the document is valid.

Education field group of the Person business entity

The Education field group stores the education details of a person. The education details can include the name of the institution where a person graduated, address of the institution, and year of passing.

The following table describes the fields of the Education field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	255	NA	Line 1 of the address of the educational institution.
Address Line 2	addressLine2	Text	255	NA	Line 2 of the address of the educational institution.
City	city	Text	255	NA	City in which the institution is located.
Country	country	Lookup	NA	Country	Country in which the institution is located.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of the qualification.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of the qualification.
Institution Name	institutionName	Text	255	NA	Name of the institution.
Qualification Name	qualificationName	Text	255	NA	Name of the qualification.
Qualification Status	qualificationStatus	Lookup	NA	QualificationStatus	Status of the qualification.
Qualification Type	qualificationType	Lookup	NA	QualificationType	Type of qualification, such as illiterate, certification, diploma, bachelor, master, or doctoral.
Postal Code	postalCode	Text	255	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	255	NA	Postal code extension of the address.
State	state	Lookup	NA	State	State in which the institution is located.
Student Number	studentNumber	Text	255	NA	Student number in the institution.

Email field group of the Person business entity

The Email field group stores information about the electronic addresses, such as email addresses and hygiene status of the electronic address.

The following table describes the fields of the Email field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the electronic address is primary or default.
Electronic Address	electronicAddress	Text	255	NA	Actual electronic address of a person.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date for the electronic address.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date for the electronic address.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the electronic address. For example, active, blocked, or not in use.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Validation status of the electronic address. For example, error, valid, or not validated.
Hygiene Status	hygieneStatus	Text	50	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or former trap.
Net Protect Code	netProtectCode	Text	50	NA	Net protect codes identify which service or appliance is monitoring a given network.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Usage Type	usageType	Lookup	NA	ElectronicAddressUsage Type	Intended use of the communication preference that a person shared. For example, business or personal.
Verification Message	validateMessage	Text	50	NA	Message that the electronic address validation service generates to indicate how valid and trusted the electronic address is.
Verification Status Code	validationStatusCode	Text	50	NA	Validation status code that the email address validation service returns.

Employment field group of the Person business entity

The Employment field group stores the employment details of a person, such as monthly net income and net annual income.

The following table describes the fields of the Employment field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Designation	designation	Text	255	NA	Designation of a person.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of employment.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of employment.
Employee	X_infac360sap_employee	Boolean	NA	NA	Indicates whether a person is an employee.
Employer Name	employerName	Text	255	NA	Name of the employer.
Employment Status	employmentStatus	Lookup	NA	EmploymentStatus	Status of employment, such as active, inactive, or resigned.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Employment Type	employmentType	Lookup	NA	EmploymentType	Type of employment, such as fixed term, contract, or self-employed.
Line of Business	lineOfBusiness	Text	255	NA	Line of business, such as retail or mortgage.
Location	location	Text	255	NA	Location of the employer.

Financial field group of the Person business entity

The Financial field group stores financial information of a person.

The following table describes the fields of the Financial field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Amount	amount	Double	20	NA	Total value of the physical assets that a person owns.
Currency	currency	Lookup	NA	Currency	Currency used for transactions. For example, United States dollar or United Kingdom pound.
Finance Info Type	financeInfoType	Lookup	NA	FinanceInfoType	Type of financial information. For example, total asset or annual income.
Finance Reliability	financeReliability	Lookup	NA	FinanceReliability	Reliability of the financial data, if the data is actual or an estimate.
Time Period	timePeriod	Text	255	NA	Finance period for which the data is collected.
Time Period Type	financeTimePeriodType	Lookup	NA	TimePeriodType	Type of the finance period. For example, quarterly or annual.
Unit	financialUnit	Lookup	NA	FinancialUnit	Unit for the amount. For example, thousand, million, or billion.

Identification field group of the Person business entity

The Identification field group stores the identifier details of a person, such as country and issued date.

The following table describes the fields of the Identification field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	X_infac360sap_country	Lookup	NA	Country	Country that issued the identifier.
Identification Type	alternateIdentifierType	Lookup	NA	AlternateIdType	Type of alternative identifier. For example, D&B ID or Federal Employer Identification Number.
Identification Value	alternateIdentifierValue	Text	50	NA	Value of alternative identifier, such as employee ID or tax ID number.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority that has issued the identifier to an organization. For example, Dun & Bradstreet or government agency.
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of the identifier.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Issued date of the identifier.
Issued Date	X_infac360sap_issuedDate	Date	NA	NA	Date of issue of the identifier.
Region	X_infac360sap_region	Lookup	NA	State	State region of the issuing country.
Status	identifierStatus	Lookup	NA	IdentifierStatus	Code to indicate the status of the alternate identifier. For example, effective, disqualified, expired, or temporary.

Indicator field group of the Person business entity

The Indicator field group stores the indicator details based on which you want to identify a person.

The following table describes the fields of the Indicator field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Indicator Type	X_infac360sap_indicatorType	Lookup	NA	infac360sap_IndicatorType	Indicates the type of person.
Indicator Value	X_infac360sap_indicatorValue	Text	255	NA	Actual value of the indicator.

Insurance field group of the Person business entity

The Insurance field group stores the insurance details of a person, such as name of the insurance provider and policy number.

The following table describes the fields of the Insurance field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Currency	currency	Lookup	NA	Currency	Currency for the premium payment and claim settlement.
Effective End Date	effectiveEndDate	Date	NA	NA	Expiry date of the insurance.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the insurance.
Insurance Holder	insuranceHolder	Text	255	NA	Name of the insurance holder.
Insurance Provider	insuranceProvider	Text	255	NA	Company that provides the insurance.
Insurance Sub Type	insuranceSubType	Lookup	NA	InsuranceSubType	Insurance subtype. For example, if the insurance type is travel, the subtype might be platinum travel.
Insurance Type	insuranceType	Lookup	NA	InsuranceType	Type of the insurance, such as life, health, or travel.
Policy Number	insurancePolicyNumber	Text	100	NA	Insurance policy number.
Insurance Status	insuranceStatus	Text	255	insuranceStatus	Status of the insurance. For example, active or expired.
Unit	unit	Lookup	NA	FinancialUnit	Specifies the unit for the amount. For example, thousands, millions, ot billions.
Insurance Value	insuranceValue	Double	NA	NA	Amount insured.

Language field group of the Person business entity

The Language field group stores the language proficiency details of a person.

The following table describes the fields of the Language field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Language	X_infac360sap_language	Lookup	NA	infac360sap_Language	Language in which a person has proficiency.
Primary Indicator	X_infac360sap_primaryIndicator	Boolean	NA	NA	Indicates whether the language is the primary language of a person.

Lifestyle field group of the Person business entity

The Lifestyle field group stores the details of the lifestyle of a person.

The following table describes the fields of the Lifestyle field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Lifestyle Type	lifestyleType	Lookup	NA	LifestyleType	Type of lifestyle. For example, alcohol consumption or tobacco consumption.
Lifestyle Value	lifestyleValue	Text	255	NA	Frequency of a lifestyle. For example, frequent, moderate, or never.

Loyalty field group of the Person business entity

The Loyalty field group stores the loyalty account details of a person.

The following table describes the fields of the Loyalty field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Number	AccountNumber	Text	255	NA	Loyalty account number.
Account Status	accountStatus	Lookup	NA	LoyaltyAccountStatus	Status of the account. For example, active or inactive.
Account Type	accountType	Lookup	NA	LoyaltyAccountType	Type of loyalty accounts. For example, silver, gold, or platinum.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of the loyalty account.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of the loyalty account.
Redemption Preferences	redemptionPreferences	Lookup	NA	RedemptionPreferences	Preference for the redemption of loyalty points. For example, cash back or credit.

Phone field group of the Person business entity

The Phone field group stores the phone details of a person.

The following table describes the fields of the Phone field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Cell Prefix	cellPrefix	Text	255	NA	Dialing prefix that must prepend the National Significant Number for inbound international calls.
Default Indicator	defaultIndicator	Boolean	NA	NA	Flag to indicate whether the phone number is the default number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Flag to indicate whether the person is willing to receive unsolicited phone calls from marketers.
Effective End Date	effectiveEndDate	DateTime	NA	NA	Date until when the phone number was active or will be active.
Effective Start Date	effectiveStartDate	DateTime	NA	NA	Date from when the phone number is active.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Validation status of the phone number. For example, error, valid, or not validated.
International Format	internationalFormat	Text	50	NA	International format for the phone number.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
International Prefix	internationalPrefix	Text	255	NA	Prefix used to select an international telephone circuit.
International Format	internationalFormat	Text	50	NA	International format for the phone number.
ISO	iso	Text	2	NA	ISO country code.
National Destination Code	nationalDestinationCode	Text	255	NA	Code that identifies a numbering area within a country or a group of countries.
National Format	nationalFormat	Text	50	NA	National format for the phone number.
National Prefix	nationalPrefix	Text	255	NA	Digit or combination of digits that must be dialed before an area or city code.
National Destination Code Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether a country defines geographic area codes in the National Numbering Plan.
Phone Number	phoneNumber	Text	255	NA	Person phone number.
Phone Number Extension	phoneNumberExtension	Text	255	NA	Extension number.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, landline, mobile, or fax.
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, personal, business, or home.
Prefix Number	prefixNumber	Text	255	NA	Country dialing code.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as publicly unavailable or the contact point is active.
Verification Message	validationMessage	Text	255	NA	Validation message that the phone number validation service returns.
Verification Status Code	validationStatusCode	Text	255	NA	Validation status code that the phone number validation service returns.

PO Box Address field group of the Person business entity

The PO Box Address field group stores the postal address details of the person, such as postal code and delivery service number.

The following table describes the fields of the PO Box Address field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
PO Box	X_infac360sap_poBox	Text	255	NA	PO box number.
Postal Code	X_infac360sap_postalCode	Number	NA	NA	Postal code of the address.
Company Postal Code	X_infac360sap_companyPostalCode	Number	NA	NA	Postal code for a large organization.
PO Box Without Number	X_infac360sap_poBoxWoNo	Boolean	NA	NA	Indicates whether the PO box is without number.
PO Box Lobby	X_infac360sap_poBoxLobby	Text	255	NA	Name of the PO box lobby .
Delivery Service	X_infac360sap_deliveryService	Lookup	NA	infac360sap_DeliveryService	Type of delivery service. For example, counter delivery or general delivery.
Delivery Number	X_infac360sap_deliveryNumber	Number	NA	NA	Delivery service number.
Other City	X_infac360sap_otherCity	Text	255	NA	Different PO box city.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Other Country	X_infac360sap_otherCountry	Lookup	NA	Country	Different PO box country.
Other Region	X_infac360sap_otherRegion	Lookup	NA	State	Different PO box region.
Undeliverable	X_infac360sap_undeliverable	Lookup	NA	infac360sap_Undeliverable	Undelivered status. For example, deceased or illegible address.

Record Status field group of the Person business entity

The Record Status field group stores the status of a Person business entity record.

The following table describes the fields of the Record Status field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Description	X_infac360sap_description	Text	255	NA	A brief description of the status of a record.
Last Updated	X_infac360sap_lastUpdated	Date and Time	NA	NA	The latest date and time when the status was updated.
Status	X_infac360sap_status	Lookup	NA	infap360mm_errorStatus	Integration status of a record, such as success or failure.
Status Type	X_infac360sap_status_Type	Lookup	NA	infas360sap_ErrorStatusType	Type of record status, such as SAP S/4HANA integration status.

Role field group of the Person business entity

The Role field group stores the business partner roles assigned for the business transactions of a person.

The following table describes the fields of the Role field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Role	X_infac360sap_Role	Lookup	NA	infac360sap_Role	Roles assigned to a business partner.

Sales Area field group of the Person business entity

The Sales Area field group stores the sales and distribution information of a Person business entity such as, sales org, sales division, and sales distribution channel.

The following table describes the fields of the Sales Area field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Sales Org	X_infac360sap_salesOrgnization	Lookup	NA	X_infac360sap_SalesOrgnization	Sales unit of an organization that a person is associated with.
Sales Division	X_infac360sap_salesDiv	Lookup	NA	X_infac360sap_salesDiv	Division of a sales organization that a person is associated with.
Sales Distribution Channel	X_infac360sap_salesDistributionchn	Lookup	NA	X_infac360sap_salesDistributionchn	Channel, such as wholesale, retail, or direct sales, that an organization uses to sell materials or services to a person.

Segment field group of the Person business entity

The Segment field group stores information about the segment of a person. Segmentation can help marketers to design targeted campaigns.

The following table describes the fields of the Segment field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Segment Type	segmentType	Lookup	NA	SegmentType	Type of segment, such as income.
Segment Value	segmentValue	Lookup	NA	SegmentValue	Name of the category or segment. For example, lower middle class, upper high class, and upper middle class.

Social Media field group of the Person business entity

The Social Media field group stores information about the social media identifiers of a person.

The following table describes the fields of the Social Media field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Handle	socialMediaValue	Text	255	NA	Social media contact details.
Social Media Type	socialHandleType	Lookup	NA	SocialHandleType	Type of social media contact details. For example, Facebook, Linkedin, or Pinterest.

Specialization field group of the Person business entity

The Specialization field group stores information about the specialities or specializations of a person.

The following table describes the fields of the Specialization field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Specialty Type	specialtyType	Lookup	NA	SpecialityType	Specialty type. For example, construction, educational services, and finance and insurance.
Specialty	speciality	Text	255	NA	Name of specialty.
Board Certification Flag	boardCertificationFlag	Boolean	NA	NA	Indicates whether the board certification is active or not.

Status field group of the Person business entity

The Status field group stores the statuses of a person. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table describes the fields of the Status field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status Type	statusType	Lookup	NA	PersonStatusType	Status type of a person, such as onboarding or primary status.
Status Value	statusValue	Lookup	NA	PersonStatusValue	Status value of a person, such as active, accepted, or rejected.

Tax Details field group of the Person business entity

The Tax Details field group stores the tax-related information of a person, such as tax name and tax type.

The following table describes the fields of the Tax Details field group:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country of taxation.
Currency	currency	Lookup	NA	Currency	Currency in which the tax is paid.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of the tax period.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of the tax period.
State	state	Lookup	NA	State	State within the country of the taxation.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Tax Authority	taxAuthority	Lookup	NA	TaxAuthority	Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department.
Tax Number	taxNumber	Text Field	255	NA	Unique number that identifies a person for tax purposes.
Tax Number Type	taxNumberType	Lookup	NA	TaxNumberType	Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), Employer Identification Number (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN).
Taxpayer Type	taxPayerType	Lookup	NA	TaxPayerType	Type of tax payer. For example, individual, company, partnership, or trust.
Tax Paid	taxPaid	Text Field	255	NA	Tax amount that a person has paid.

Batch jobs

Use predefined ingress batch jobs to import SAP ECC customer, SAP ECC FI customer, and SAP S/4HANA business partner records into Customer 360 SaaS in batches. Use predefined egress batch jobs to export the processed records to SAP S/4HANA in batches. Each job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the SAP fields with the Customer business entity fields.

After you import the SAP records into Customer 360 SaaS, you can process the records in Customer 360 SaaS. After the initial import, you can import incremental changes, process them, and export the processed records to SAP S/4HANA in batches.

Batch jobs of the Organization business entity for SAP ECC

You can use predefined batch jobs to import customer and FI customer records from SAP ECC into Customer 360 SaaS.

Use the predefined initial ingress job to import the customer and FI customer records from SAP ECC to Customer 360 SaaS in batches for the first time. Use the predefined incremental ingress job to import incremental changes into Customer 360 SaaS to synchronize records with SAP ECC.

The job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the fields of customer and FI customer records in SAP ECC with the Organization business entity fields in Customer 360 SaaS. The Customer 360 Extension for SAP package includes predefined batch jobs and their related assets. You can customize the assets based on your requirement.

The following table lists the predefined initial ingress job and its dependent assets to import the initial load from SAP ECC:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_ecc_c360_organization_batch_inbound_initial	infac360sap_tf_ecc_c360_organization_batch_inbound_initial	- infac360sap_mt_ecc_c360_orgnization_batch_inbound_root_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_addr_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_altname_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_customertype_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_email_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_industry_initial - infac360sap_mt_ecc_c360_organization_batch_lang_inbound_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_phone_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_pobox_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_identifier_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_salesarea_initial - infac360sap_mt_ecc_c360_organization_batch_bankdetails_inbound_initial - infac360sap_mt_ecc_c360_organization_batch_inbound_company_code_initial	- infac360sap_m_ecc_c360_organization_batch_inbound_root_initial - infac360sap_m_ecc_c360_organization_batch_inbound_addr_initial - infac360sap_m_ecc_c360_organization_batch_inbound_altname_initial - infac360sap_m_ecc_c360_organization_batch_inbound_customertype_initial - infac360sap_m_ecc_c360_organization_batch_inbound_email_initial - infac360sap_m_ecc_c360_organization_batch_inbound_industry_initial - infac360sap_m_ecc_c360_organization_batch_lang_inbound_initial - infac360sap_m_ecc_c360_organization_batch_inbound_phone_initial - infac360sap_m_ecc_c360_organization_batch_inbound_pobox_initial - infac360sap_m_ecc_c360_organization_batch_inbound_identifier_initial - infac360sap_m_ecc_c360_organization_batch_inbound_salesarea_initial - infac360sap_m_ecc_c360_organization_batch_bankdetails_inbound_initial - infac360sap_m_ecc_c360_organization_batch_inbound_company_code_initial	Imports complete data from the customer and FI customer records in SAP ECC into the Organization business entity in Customer 360 SaaS.

The following table lists the predefined incremental ingress job and its dependent assets to import the incremental load from SAP ECC:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_ecc_c360_organization_batch_inbound_delta	infac360sap_tf_ecc_c360_organization_batch_inbound_delta	- infac360sap_mt_ecc_c360_orgnization_batch_inbound_root_delta - infac360sap_mt_ecc_c360_organization_batch_addr_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_altname_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_customertype_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_email_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_industry_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_phone_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_pobox_inbound_delta - infac360sap_mt_ecc_c360_organization_batch_inbound_company_code_delta	- infac360sap_m_ecc_c360_orgnization_batch_inbound_root_delta - infac360sap_m_ecc_c360_organization_batch_addr_inbound_delta - infac360sap_m_ecc_c360_organization_batch_altname_inbound_delta - infac360sap_m_ecc_c360_organization_batch_customertype_inbound_delta - infac360sap_m_ecc_c360_organization_batch_email_inbound_delta - infac360sap_m_ecc_c360_organization_batch_industry_inbound_delta - infac360sap_m_ecc_c360_organization_batch_phone_inbound_delta - infac360sap_m_ecc_c360_organization_batch_pobox_inbound_delta - infac360sap_m_ecc_c360_organization_batch_inbound_company_code_delta	Imports incremental data from the customer and FI customer records in SAP ECC into the Organization business entity in Customer 360 SaaS.

The following table lists the predefined taskflows, mapping tasks, and mappings to import reference data from SAP ECC:

Taskflow	Mapping Task	Mapping	Description
infac360sap_tf_ecc_reconcacct_reconcacct_inbound	infac360sap_mt_ecc_reconcacct_reconcacct_inbound	infac360sap_m_ecc_reconcacct_reconcacct_inbound	Imports the reconciliation account data from SAP ECC to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_ecc_batch_companycode_companycode_inbound	infac360sap_mt_ecc_batch_companycode_companycode_inbound	infac360sap_m_ecc_batch_companycode_companycode_inbound	Imports the company code data from SAP ECC to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infar360sap_tf_ecc_c360_batch_salesarea_inbound	- infar360sap_mt_ecc_r360_batch_inbound_salesorg - infar360sap_mt_ecc_r360_batch_inbound_salesdiv - infar360sap_mt_ecc_r360_batch_inbound_salesdistributionchannel	- infar360sap_m_ecc_r360_batch_inbound_salesorg - infar360sap_m_ecc_r360_batch_inbound_salesdiv - infar360sap_m_ecc_r360_batch_inbound_salesdistributionchannel	Imports the sales area data from SAP ECC to the Sales Area reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.

Batch jobs of the Person business entity for SAP ECC

You can use predefined batch jobs to import customer and FI customer records from SAP ECC into Customer 360 SaaS.

Use the predefined initial ingress job to import the customer and FI customer records from SAP ECC to Customer 360 SaaS in batches for the first time. Use the predefined incremental ingress job to import incremental changes into Customer 360 SaaS to synchronize records with SAP ECC.

The job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the fields of customer and FI customer records in SAP ECC with the Person business entity fields in Customer 360 SaaS. The Customer 360 Extension for SAP package includes predefined batch jobs and their related assets.

The following table lists the predefined initial ingress job and its dependent assets to import the initial load from SAP ECC:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_ecc_c360_person_batch_initial	infac360sap_tf_ecc_c360_person_batch_inbound_initial	- infac360sap_mt_ecc_c360_person_batch_inbound_addr_initial - infac360sap_mt_ecc_c360_person_batch_inbound_altname_initial - infac360sap_mt_ecc_c360_person_batch_inbound_customerType_initial - infac360sap_mt_ecc_c360_person_batch_inbound_email_initial - infac360sap_mt_ecc_c360_person_batch_inbound_finance_initial - infac360sap_mt_ecc_c360_person_batch_inbound_ind_initial - infac360sap_mt_ecc_c360_person_batch_inbound_lang_initial - infac360sap_mt_ecc_c360_person_batch_inbound_phone_initial - infac360sap_mt_ecc_c360_person_batch_inbound_pobox_initial - infac360sap_mt_ecc_c360_person_batch_inbound_root_initial - infac360sap_mt_ecc_c360_person_batch_bankdetails_inbound_initial - infac360sap_mt_ecc_c360_person_batch_inbound_company_code_initial - infac360sap_mt_ecc_c360_person_batch_inbound_salesorg_initial - infac360sap_mt_ecc_c360_person_batch_inbound_identifier_initial	- infac360sap_m_ecc_c360_person_batch_inbound_addr_initial - infac360sap_m_ecc_c360_person_batch_inbound_altname_initial - infac360sap_m_ecc_c360_person_batch_inbound_customerType_initial - infac360sap_m_ecc_c360_person_batch_inbound_email_initial - infac360sap_m_ecc_c360_person_batch_inbound_finance_initial - infac360sap_m_ecc_c360_person_batch_inbound_ind_initial - infac360sap_m_ecc_c360_person_batch_inbound_lang_initial - infac360sap_m_ecc_c360_person_batch_inbound_phone_initial - infac360sap_m_ecc_c360_person_batch_inbound_pobox_initial - infac360sap_m_ecc_c360_person_batch_inbound_root_initial - infac360sap_m_ecc_c360_person_batch_bankdetails_inbound_initial - infac360sap_m_ecc_c360_person_batch_inbound_company_code_initial - infac360sap_m_ecc_c360_person_batch_inbound_salesorg_initial - infac360sap_m_ecc_c360_person_batch_inbound_identifier_initial	Imports complete data from the customer and FI customer records in SAP ECC into the Person business entity in Customer 360 SaaS.

The following table lists the predefined incremental ingress job and its dependent assets to import the incremental load from SAP ECC:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_ecc_c360_person_batch_delta	infac360sap_tf_ecc_c360_person_batch_inbound_delta	- infac360sap_mt_ecc_c360_person_batch_inbound_addr_delta - infac360sap_mt_ecc_c360_person_batch_inbound_altname_delta - infac360sap_mt_ecc_c360_person_batch_inbound_customertype_delta - infac360sap_mt_ecc_c360_person_batch_inbound_email_delta - infac360sap_mt_ecc_c360_person_batch_inbound_phone_delta - infac360sap_mt_ecc_c360_person_batch_inbound_pobox_delta - infac360sap_mt_ecc_c360_person_batch_inbound_root_delta - infac360sap_mt_ecc_c360_person_batch_bankdetails_inbound_delta - infac360sap_mt_ecc_c360_person_batch_inbound_company_code_delta	- infac360sap_m_ecc_c360_person_batch_inbound_addr_delta - infac360sap_m_ecc_c360_person_batch_inbound_altname_delta - infac360sap_m_ecc_c360_person_batch_inbound_customertype_delta - infac360sap_m_ecc_c360_person_batch_inbound_email_delta - infac360sap_m_ecc_c360_person_batch_inbound_phone_delta - infac360sap_m_ecc_c360_person_batch_inbound_pobox_delta - infac360sap_m_ecc_c360_person_batch_inbound_root_delta - infac360sap_m_ecc_c360_person_batch_bankdetails_inbound_delta - infac360sap_m_ecc_c360_person_batch_inbound_company_code_delta	Imports incremental data from the customer and FI customer records in SAP ECC into the Person business entity in Customer 360 SaaS.

The following table lists the predefined taskflows, mapping tasks, and mappings to import reference data from SAP ECC:

Taskflow	Mapping Task	Mapping	Description
infac360sap_tf_ecc_reconcacct_reconcacct_inbound	infac360sap_mt_ecc_reconcacct_reconcacct_inbound	infac360sap_m_ecc_reconcacct_reconcacct_inbound	Imports the reconciliation account data from SAP ECC to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_ecc_batch_companycode_companycode_inbound	infac360sap_mt_ecc_batch_companycode_companycode_inbound	infac360sap_m_ecc_batch_companycode_companycode_inbound	Imports the company code data from SAP ECC to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infar360sap_tf_ecc_c360_batch_salesarea_inbound	- infar360sap_mt_ecc_r360_batch_inbound_salesorg - infar360sap_mt_ecc_r360_batch_inbound_salesdiv - infar360sap_mt_ecc_r360_batch_inbound_salesdistributionchannel	- infar360sap_m_ecc_r360_batch_inbound_salesorg - infar360sap_m_ecc_r360_batch_inbound_salesdiv - infar360sap_m_ecc_r360_batch_inbound_salesdistributionchannel	Imports the sales area data from SAP ECC to the Sales Area reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.

Batch jobs of the Organization business entity for SAP S/4HANA

You can use predefined batch jobs to import business partner records from SAP S/4HANA into Customer 360 SaaS and to export the processed records from Customer 360 SaaS to SAP S/4HANA in batches.

Use the predefined initial ingress job to import business partner records from SAP S/4HANA into Customer 360 SaaS in batches for the first time. Use the predefined incremental ingress job to import incremental data into Customer 360 SaaS to synchronize records with SAP S/4HANA. Use predefined egress jobs to export the processed records from Customer 360 SaaS to SAP S/4HANA in batches.

The job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the business partner fields of SAP S/4HANA with the Organization business entity fields in Customer 360 SaaS. The Customer 360 Extension for SAP package includes predefined batch jobs and their related assets. You can customize the assets based on your requirement.

The following table lists the predefined initial ingress job and its dependent assets to import the initial load from SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_s4h_c360_organization_batch_inbound_initial	infac360sap_tf_s4h_c360_organization_batch_inbound_initial	- infac360sap_mt_s4h_c360_organization_batch_inbound_root_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_addr_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_identifier_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_altname_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_customertype_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_email_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_indicator_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_industry_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_lang_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_phone_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_pobox_initial	- infac360sap_m_s4h_c360_organization_batch_inbound_root_initial - infac360sap_m_s4h_c360_organization_batch_inbound_addr_initial - infac360sap_m_s4h_c360_organization_batch_inbound_identifier_initial - infac360sap_m_s4h_c360_organization_batch_inbound_altname_initial - infac360sap_m_s4h_c360_organization_batch_inbound_customertype_initial - infac360sap_m_s4h_c360_organization_batch_inbound_email_initial - infac360sap_m_s4h_c360_organization_batch_inbound_indicator_initial - infac360sap_m_s4h_c360_organization_batch_inbound_industry_initial - infac360sap_m_s4h_c360_organization_batch_inbound_lang_initial - infac360sap_m_s4h_c360_organization_batch_inbound_phone_initial - infac360sap_m_s4h_c360_organization_batch_inbound_pobox_initial	Imports complete data from the business partner records in SAP S/4HANA into the Organization business entity in Customer 360 SaaS.

Job Name	Taskflow	Mapping Task	Mapping	Description
		- infac360sap_mt_s4h_c360_organization_batch_inbound_role_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_tax_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_salesarea_initial - infac360sap_mt_s4h_c360_organization_batch_inbound_bankdetails_initial - infac360sap_mt_s4h_s360_organization_batch_inbound_company_code_initial	- infac360sap_m_s4h_c360_organization_batch_inbound_role_initial - infac360sap_m_s4h_c360_organization_batch_inbound_tax_initial - infac360sap_m_s4h_c360_organization_batch_inbound_salesarea_initial - infac360sap_m_s4h_c360_organization_batch_inbound_bankdetails_initial - infac360sap_m_s4h_s360_organization_batch_inbound_company_code_initial	

The following table lists the predefined incremental ingress job and its dependent assets to import the incremental load from SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_s4h_c360_org_batch_inbound_delta	infac360sap_tf_s4h_c360_organization_batch_inbound_delta	- infac360sap_mt_s4h_c360_organization_batch_inbound_root_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_addr_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_altname_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_customertype_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_email_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_industry_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_phone_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_pobox_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_role_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_tax_delta - infac360sap_mt_s4h_c360_organization_batch_inbound_	- infac360sap_m_s4h_c360_organization_batch_inbound_root_delta - infac360sap_m_s4h_c360_organization_batch_inbound_addr_delta - infac360sap_m_s4h_c360_organization_batch_inbound_altname_delta - infac360sap_m_s4h_c360_organization_batch_inbound_customertype_delta - infac360sap_m_s4h_c360_organization_batch_inbound_email_delta - infac360sap_m_s4h_c360_organization_batch_inbound_industry_delta - infac360sap_m_s4h_c360_organization_batch_inbound_phone_delta - infac360sap_m_s4h_c360_organization_batch_inbound_pobox_delta - infac360sap_m_s4h_c360_organization_batch_inbound_role_delta - infac360sap_m_s4h_c360_organization_batch_inbound_tax_delta - infac360sap_m_s4h_c360_organization_batch_inbound_bankdetails_delta	Imports incremental data from the business partner records in SAP S/4HANA into the Organization business entity in Customer 360 SaaS.

Job Name	Taskflow	Mapping Task	Mapping	Description
		bankdetails_delta - infac360sap_mt_s4h_s360_organization_batch_inbound_company_code_delta	- infac360sap_m_s4h_s360_organization_batch_inbound_company_code_delta	

The following table lists the predefined taskflows, mapping tasks, and mappings to import reference data from SAP S/4HANA:

Taskflow	Mapping Task	Mapping	Description
infac360sap_tf_s4h_reconcacct_reconcacct_inbound	infac360sap_mt_s4h_reconcacct_reconcacct_inbound	infac360sap_m_s4h_reconcacct_reconcacct_inbound	Imports the reconciliation account data from SAP S/4HANA to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_s4h_batch_companycode_companycode_inbound	infac360sap_mt_s4h_batch_companycode_companycode_inbound	infac360sap_m_s4h_batch_companycode_companycode_inbound	Imports the company code data from SAP S/4HANA to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infar360sap_tf_s4h_c360_batch_salesarea_inbound	- infar360sap_mt_s4h_r360_batch_inbound_salesorg - infar360sap_mt_s4h_r360_batch_inbound_salesdiv - infar360sap_mt_s4h_r360_batch_inbound_salesdistributionchannel	- infar360sap_m_s4h_r360_batch_inbound_salesorg - infar360sap_m_s4h_r360_batch_inbound_salesdiv - infar360sap_m_s4h_r360_batch_inbound_salesdistributionchannel	Imports the sales area data from SAP S/4HANA to the Sales Area reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.

Taskflow	Mapping Task	Mapping	Description
infac360sap_tf_enterprise_batch_companycode_companycode_inbound	infac360sap_mt_enterprise_batch_companycode_companycode_inbound	infac360sap_m_enterprise_batch_companycode_companycode_inbound	Imports the company code data from enterprise codelist to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_enterprise_reconcacct_reconcacct_inbound	infac360sap_mt_enterprise_reconcacct_reconcacct_inbound	infac360sap_m_enterprise_reconcacct_reconcacct_inbound	Imports the reconciliation account data from enterprise codelist to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.

The following table lists the predefined egress jobs and its dependent assets to export data from Customer 360 SaaS to SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_egress_s4h_organization_create_root	infac360sap_tf_s4h_organization_outbound_root_writeback_create	infac360sap_mt_s4h_c360_organization_batch_outbound_root_create	infac360sap_m_s4h_c360_organization_batch_outbound_root_create	Exports complete data from the Organization business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.
infac360sap_ingress_s4h_c360_organization_writeback_root	infac360sap_tf_s4h_c360_organization_writeback_root	infac360sap_mt_s4h_c360_organization_writeback_root	infac360sap_m_s4h_c360_organization_writeback_root	

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_egress_s4h_organization_outbound_tax_bank_address_add	infac360sap_tf_s4h_organization_outbound_tax_bank_address_add	- infac360sap_mt_s4h_c360_org_batch_outbound_address_add - infac360sap_mt_s4h_c360_org_batch_outbound_tax_add - infac360sap_mt_s4h_c360_org_batch_outbound_bank_add	- infac360sap_m_s4h_c360_org_batch_outbound_address_add - infac360sap_m_s4h_c360_org_batch_outbound_tax_add - infac360sap_m_s4h_c360_org_batch_outbound_bank_add	Exports additional address, tax, and bank data from the Organization business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.
infac360sap_egress_s4h_org_outbound_root_addr_bank_tax_update_add	infac360sap_tf_s4h_organization_outbound_root_addr_bank_tax_update_add	- infac360sap_mt_s4h_c360_org_batch_outbound_root_update - infac360sap_mt_s4h_c360_org_batch_outbound_address_update_add - infac360sap_mt_s4h_c360_org_batch_outbound_tax_update_add - infac360sap_mt_s4h_c360_org_batch_outbound_bank_update_add	- infac360sap_m_s4h_c360_org_batch_outbound_root_update - infac360sap_m_s4h_c360_org_batch_outbound_address_update_add - infac360sap_m_s4h_c360_org_batch_outbound_tax_update_add - infac360sap_m_s4h_c360_org_batch_outbound_bank_update_add	Exports updated data from the Organization business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.

Batch jobs of the Person business entity for SAP S/4HANA

You can use predefined batch jobs to import business partner records from SAP S/4HANA into Customer 360 SaaS and to export processed records to SAP S/4HANA in batches.

Use the predefined initial ingress job to import business partner records from SAP S/4HANA into Customer 360 SaaS in batches for the first time. Use the predefined incremental ingress job to import incremental data into Customer 360 SaaS to synchronize records with SAP S/4HANA. Use predefined egress jobs to export the processed records to SAP S/4HANA in batches.

The job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the busines partner fields of SAP S/4HANA with the Person business entity fields in Customer 360 SaaS. The Customer 360 Extension for SAP package includes predefined batch jobs and their related assets. You can customize the assets based on your requirement.

The following table lists the predefined initial ingress job and its dependent assets to import the initial load from SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_s4h_c360_person_batch_inbound_initial	infac360sap_tf_s4h_c360_person_batch_inbound_initial	- infac360sap_mt_s4h_c360_person_batch_inbound_address_initial - infac360sap_mt_s4h_c360_person_batch_inbound_alt_id_initial - infac360sap_mt_s4h_c360_person_batch_inbound_alt_name_initial - infac360sap_mt_s4h_c360_person_batch_inbound_citizenship_initial - infac360sap_mt_s4h_c360_person_batch_inbound_customer_type_initial - infac360sap_mt_s4h_c360_person_batch_inbound_email_initial - infac360sap_mt_s4h_c360_person_batch_inbound_employment_initial - infac360sap_mt_s4h_c360_person_batch_inbound_financial_initial - infac360sap_mt_s4h_c360_person_batch_inbound_indicator_initial - infac360sap_mt_s4h_c360_person_batch_inbound_language_initial - infac360sap_mt_s4h_c360_person_batch_inbound_phone_initial	- infac360sap_m_s4h_c360_person_batch_inbound_address_initial - infac360sap_m_s4h_c360_person_batch_inbound_alt_id_initial - infac360sap_m_s4h_c360_person_batch_inbound_alt_name_initial - infac360sap_m_s4h_c360_person_batch_inbound_citizenship_initial - infac360sap_m_s4h_c360_person_batch_inbound_customer_type_initial - infac360sap_m_s4h_c360_person_batch_inbound_email_initial - infac360sap_m_s4h_c360_person_batch_inbound_employment_initial - infac360sap_m_s4h_c360_person_batch_inbound_financial_initial - infac360sap_m_s4h_c360_person_batch_inbound_indicator_initial - infac360sap_m_s4h_c360_person_batch_inbound_language_initial - infac360sap_m_s4h_c360_person_batch_inbound_phone_initial	Imports complete data from the business partner records in SAP S/4HANA into the Person business entity in Customer 360 SaaS.

Job Name	Taskflow	Mapping Task	Mapping	Description
		- infac360sap_mt_s4h_c360_person_batch_inbound_po_box_initial - infac360sap_mt_s4h_c360_person_batch_inbound_role_initial - infac360sap_mt_s4h_c360_person_batch_inbound_root_initial - infac360sap_mt_s4h_c360_person_batch_tax_inbound_initial - infac360sap_mt_s4h_c360_person_batch_bankdetails_inbound_initial - infac360sap_mt_s4h_c360_person_batch_inbound_company_code_initial - infac360sap_mt_s4h_c360_person_batch_inbound_salesorg_initial	- infac360sap_m_s4h_c360_person_batch_inbound_po_box_initial - infac360sap_m_s4h_c360_person_batch_inbound_role_initial - infac360sap_m_s4h_c360_person_batch_inbound_root_initial - infac360sap_m_s4h_c360_person_batch_inbound_tax_initial - infac360sap_m_s4h_c360_person_batch_bankdetails_inbound_initial - infac360sap_m_s4h_c360_person_batch_inbound_company_code_initial - infac360sap_m_s4h_c360_person_batch_inbound_salesorg_initial	

The following table lists the predefined incremental ingress job and its dependent assets to import the incremental load from SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_ingress_s4h_c360_person_batch_delta	infac360sap_tf_s4h_c360_person_batch_inbound_delta	- infac360sap_mt_s4h_c360_person_batch_inbound_address_delta - infac360sap_mt_s4h_c360_person_batch_inbound_alt_id_delta - infac360sap_mt_s4h_c360_person_batch_inbound_alt_name_delta - infac360sap_mt_s4h_c360_person_batch_inbound_email_delta - infac360sap_mt_s4h_c360_person_batch_inbound_phone_delta - infac360sap_mt_s4h_c360_person_batch_inbound_po_box_delta - infac360sap_mt_s4h_c360_person_batch_inbound_role_delta - infac360sap_mt_s4h_c360_person_batch_inbound_root_delta - infac360sap_mt_s4h_c360_person_batch_tax_inbound_delta - infac360sap_mt_s4h_c360_person_batch_bankdetails_inbound_delta - infac360sap_mt_s4h_c360_person_batch_inbound_comp	- infac360sap_m_s4h_c360_person_batch_inbound_address_delta - infac360sap_m_s4h_c360_person_batch_inbound_alt_id_delta - infac360sap_m_s4h_c360_person_batch_inbound_alt_name_delta - infac360sap_m_s4h_c360_person_batch_inbound_email_delta - infac360sap_m_s4h_c360_person_batch_inbound_phone_delta - infac360sap_m_s4h_c360_person_batch_inbound_po_box_delta - infac360sap_m_s4h_c360_person_batch_inbound_role_delta - infac360sap_m_s4h_c360_person_batch_inbound_root_delta - infac360sap_m_s4h_c360_person_batch_inbound_tax_delta - infac360sap_m_s4h_c360_person_batch_bankdetails_inbound_delta - infac360sap_m_s4h_c360_person_batch_inbound_comp	Imports incremental data from the business partner records in SAP S/4HANA into the Organization business entity in Customer 360 SaaS.

Job Name	Taskflow	Mapping Task	Mapping	Description
		any_code_delta	any_code_delta	

The following table lists the predefined taskflows, mapping tasks, and mappings to import reference data from SAP S/4HANA:

Taskflow	Mapping Task	Mapping	Description
infac360sap_tf_s4h_reconcacct_reconcacct_inbound	infac360sap_mt_s4h_reconcacct_reconcacct_inbound	infac360sap_m_s4h_reconcacct_reconcacct_inbound	Imports the reconciliation account data from SAP S/4HANA to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_s4h_batch_companycode_companycode_inbound	infac360sap_mt_s4h_batch_companycode_companycode_inbound	infac360sap_m_s4h_batch_companycode_companycode_inbound	Imports the company code data from SAP S/4HANA to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infar360sap_tf_s4h_c360_batch_salesarea_inbound	- infar360sap_mt_s4h_r360_batch_inbound_salesorg - infar360sap_mt_s4h_r360_batch_inbound_salesdiv - infar360sap_mt_s4h_r360_batch_inbound_salesdistributionchannel	- infar360sap_m_s4h_r360_batch_inbound_salesorg - infar360sap_m_s4h_r360_batch_inbound_salesdiv - infar360sap_m_s4h_r360_batch_inbound_salesdistributionchannel	Imports the sales area data from SAP S/4HANA to the Sales Area reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_enterprise_batch_companycode_companycode_inbound	infac360sap_mt_enterprise_batch_companycode_companycode_inbound	infac360sap_m_enterprise_batch_companycode_companycode_inbound	Imports the company code data from enterprise codelist to the Company Code reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.
infac360sap_tf_enterprise_reconcacct_reconcacct_inbound	infac360sap_mt_enterprise_reconcacct_reconcacct_inbound	infac360sap_m_enterprise_reconcacct_reconcacct_inbound	Imports the reconciliation account data from enterprise codelist to the Reconciliation Account reference data in Reference 360. **Note:** You must manually create an import job with the taskflow. For more information, see "Creating import jobs in Reference 360" on page 103.

The following table lists the predefined egress jobs and its dependent assets to export data from Customer 360 SaaS to SAP S/4HANA:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sap_egress_s4h_person_create_root	infac360sap_tf_s4h_person_outbound_root_writeback_create	infac360sap_mt_s4h_c360_person_batch_outbound_root_create	infac360sap_m_s4h_c360_person_batch_outbound_root_create	Exports complete data from the Person business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.
infac360sap_ingress_s4h_c360_person_writeback_root	infac360sap_tf_s4h_c360_person_writeback_root	infac360sap_mt_s4h_c360_person_writeback_root	infac360sap_m_s4h_c360_person_writeback_root	
infac360sap_egress_s4h_person_outbound_tax_bank_address_add	infac360sap_tf_s4h_person_outbound_tax_bank_address_add	- infac360sap_mt_s4h_c360_person_batch_outbound_address_add - infac360sap_mt_s4h_c360_person_batch_outbound_tax_add - infac360sap_mt_s4h_c360_person_batch_outbound_bank_add	- infac360sap_m_s4h_c360_person_batch_outbound_address_add - infac360sap_m_s4h_c360_person_batch_outbound_tax_add - infac360sap_m_s4h_c360_person_batch_outbound_bank_add	Exports additional address, tax, and bank data from the Person business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.
infac360sap_egress_s4h_person_outbound_root_addr_bank_tax_update_add	infac360sap_tf_s4h_person_outbound_root_addr_bank_tax_update_add	- infac360sap_mt_s4h_c360_person_batch_outbound_root_update - infac360sap_mt_s4h_c360_person_batch_outbound_address_update_add - infac360sap_mt_s4h_c360_person_batch_outbound_tax_update_add - infac360sap_mt_s4h_c360_person_batch_outbound_bank_update_add	- infac360sap_m_s4h_c360_person_batch_outbound_root_update - infac360sap_m_s4h_c360_person_batch_outbound_address_update_add - infac360sap_m_s4h_c360_person_batch_outbound_tax_update_add - infac360sap_m_s4h_c360_person_batch_outbound_bank_update_add	Exports updated data from the Person business entity in Customer 360 SaaS to business partner records in SAP S/4HANA.

Field mapping

The Cloud Data Integration mappings map the fields of Customer 360 and SAP. Based on the mappings, the SAP data is stored in Customer 360.

The following table lists the SAP objects and the Customer 360 business entities to which they are mapped:

SAP Business Partner Type	Customer 360 Object Name	Customer 360 Object Type
Organization	Organization	Business entity
Person	Person	Business entity

Mapping of Organization business entity and SAP ECC business partner fields

The fields from the SAP ECC business partner are mapped to the Customer 360 Organization business entity for data integration. You can map multiple SAP fields to a Customer 360 fields. For example, SAP fields, such as Telephone, Fax, and Mobile, are mapped to Phone Number field of Customer 360.

General fields of the Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the general fields of Organization business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Name1	KNA1-NAME1	Name	Name
Employee	KNA1-JMZAH	Number of Employees	X_infac360sap_employee
Nielsen Indicator	KNA1-NIELS	Nielsen Indicator	X_infac360sap_nielsenIndicator

Address field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Address field group of Organization business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
City	ADRC.CITY1	City	city
Country	ADRC-COUNTRY	Country	country
Postal Code	ADRC.POST_CODE1	Postal Code	postalCode
Street 3	ADRC-STR_SUPPL2	Address Line 3	addrressLine3
Postal Code Extension	ADRC-PCODE1_EXT	Postal Code Extension	postalCodeExtension

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
County	ADRC-COUNTY	County	county
- Street - House Number	- ADRC_STREET - HOUSE_NUM1	Address Line1	addressLine1
Street 2	ADRC-STR_SUPPL1	Address Line2	addressLine2
Region	ADRC-REGION	State	state
Address Valid from	ADRC-DATE_FROM	Start Date	effectiveStartDate
Address Valid to	ADRC-DATE_TO	End Date	effectiveEndDate

Alternate Name field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Alternate Name field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Name 1 - Name 2 - Name 3	NA	Alternate Name Type	nameType
- Name2 - Name3 - Name4	- KNA1-NAME2 - KNA1-NAME3 - KNA1-NAME4	Alternate Name	name

Customer Type field group of Organization business entity

The following table lists the SAP ECC general data in customer master field that is mapped to the Customer Type field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Account Group	KNA1-KTOKD	Customer Type	X_infac360sap_custType

Indicator field group of Organization business entity

The following table lists the SAP ECC general data in customer master field that is mapped to the Indicator field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID	Description
Military use	- KNA1-MILVE - KNA1- CIVVE	Indicator Type	X_infac360sap_indicatorType	The Indicator Type field populates the enabled field values, such as Military use or Non-Military use.

Industry field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Industry field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Industry Code 1 - Industry Code 2 - Industry Code 3 - Industry Code 4 - Industry Code 5	- KNA-BRAN1 - KNA-BRAN2 - KNA-BRAN3 - KNA-BRAN4 - KNA-BRAN5	Industry Code	X_infac360sap_industryCode

Language field group of Organization business entity

The following table lists the SAP ECC general data in customer master field that is mapped to the Language field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Language Key	KNA1-SPRAS	Language	X_infac360sap_language

Phone field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Phone field group of Organization business entity :

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Telephone - Fax	NA	Phone Type	phoneType
- Telephone 1 - Fax Number	- ADR2-TEL_NUMBER - ADR3-FAX_NUMBER	Phone Number	phoneNumber

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Do Not Use Communication Number	ADR2-FLG_NOUSE	Do Not Call Indicator	doNotCallIndicator
Valid From	ADR2-DATE_FROM	Effective Start Date	effectiveStartDate
Valid To	ADR2-VALID_TO	Effective End Date	effectiveEndDate
- Telephone Extension - Fax Extension	- ADR2-TEL_EXTENS - FAX_EXTENS	Phone Number Extension	phoneNumberExtension

PO Box Address field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the PO Box Address field group of Organization business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
PO Box	ADRC-PO_BOX	PO Box	X_infac360sap_poBox
Postal Code	ADRC-POST_CODE1	Postal Code	X_infac360sap_postalCode
Company Postal Code	ADRC-POST_CODE3	Company Postal Code	X_infac360sap_companyPostalCode
PO Box w/o No	ADRC-PO_BOX_NUM	PO Box w/o No	X_infac360sap_poBoxW/oNo
PO Box Lobby	ADRC-PO_BOX_LOBBY	PO Box Lobby	X_infac360sap_poBoxLobby
Delivery Service	ADRC-DELI_SERV_TYPE	Delivery service	X_infac360sap_deliveryService
Delivery Number	ADRC-DELI_SERV_NUMBER	Delivery Number	X_infac360sap_deliveryNumber
Other City	ADRC-PO_BOX_LOC	Other City	X_infac360sap_otherCity
Other Country	ADRC-PO_BOX_CTY	Other Country	X_infac360sap_otherCountry
Other Region	ADRC-PO_BOX_REG	Other Region	X_infac360sap_otherRegion
Undeliverable	ADRC-DONT_USE_P	Undeliverable	X_infac360sap_undeliverable

Tax Details field group of Organization business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Tax Details field group of Organization business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Category	KNA1-STCDT	Tax Number Type	taxNumberType
Tax Type	KNA1-FITYP	Tax Payer Type	X_infac360sap_taxType
Sales Equalization Tax	KNA1-STKZA	Sales Equalization Tax	X_infac360sap_salesEqualizationTax
- Tax Number 1 - Tax Number 2 - Tax Number 5 - Tax Number 6 - VAT Registration Number	- KNA1-STCD1 - KNA1-STCD2 - KNA1-STCD5 - KNA1-STCD6 - KNA1-STCEG	Tax Number	taxNumber

Mapping of Organization business entity and SAP S/4HANA Organization business partner fields

The fields from the SAP S/4HANA Organization business partner are mapped to the Customer 360 Organization business entity fields for data integration. For example, SAP fields, such as Telephone, Fax, and Mobile, are mapped to Phone Number field of Customer 360.

General fields of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the general fields of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Name	Customer	BUT000-NAME_ORG1	Name	name
Legal Form	Customer	BUT000-LEGAL_ENTY	Company Type	companyType
Date Founded	Customer	BUT000-FOUND_DAT	Date of Incorporation	dateOfIncorporation
BP Type	Customer	BUT000-BPKIND	BP Type	X_infac360sap_bpType
Authorization Group	Customer	BUT000-AUGRP	Authorization group	X_infac360sap_authorizationGroup
Nielsen Indicator	Customer	KNA1-NIELS	Nielsen Indicator	X_infac360sap_nielsenIndicator
Customer Classification	Customer	KNA1-KUKLA	Customer Classification	X_infac360sap_customerClassification

Address field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Address field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
City	Customer	ADRC-CITY1	City	city
Country	Customer	ADRC.COUNTRY	Country	country
Street	Customer	ADRC.STREET	Address Line 1	addressLine1
Street 2	Customer	STR_SUPPL1	Address Line 2	addressLine2
Street 3	Customer	STR_SUPPL2	Address Line 3	addressLine3
Address Type	Customer	BUT021.ADR_KIND	Address Type	addressType
Address Usage Type	Customer	NA	Usage Type	usageType
Postal Code	Customer	ADRC-POST_CODE1	Postal Code	postalCode
Postal Code Extension	Customer	ADRC-PCODE1_EXT	Postal Code Extension	postalCodeExtension
Address Valid from	Customer	ADRC-DATE_FROM	Start Date	effectiveStartDate
Address Valid to	Customer	ADRC-DATE_TO	End Date	effectiveEndDate

Alternate Name field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Alternate Name field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Name 2 - Name 3 - Name 4	Customer	NA	Alternate Name Type	nameType
- Name2 - Name3 - Name4	Customer	- BUT000-NAME_ORG2 - BUT000-NAME_ORG3 - BUT000-NAME_ORG4	Alternate Name	name

Customer Type field group of Organization business entity

The following table lists the SAP S/4HANA business partner field that is mapped to the Customer Type field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Competitors - Sales Partner - Prospect - Default SP	Customer	- KNA1-DEAR1 - KNA1-DEAR2 - KNA1-DEAR3 - KNA1-DEAR5	Customer Type	X_infac360sap_custType

Email field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Email field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Email	Customer	ADR6-SMTP_ADDR	Electronic Address	electronicAddress
Valid from	Customer	ADR6-DATE_FROM	Effective Start Date	effectiveStartDate
Valid to	Customer	ADR6-VALID_TO	Effective End Date	effectiveEndDate

Identifier field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Identifier field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Responsible Institution	Customer	BUT0ID-INSTITUTE	Issuing Authority	issuingAuthority
ID Type	Customer	BUT0ID-TYPE	Identifier Type	idType
Valid from	Customer	BUT0ID_VALID_DATE_FROM	Effective Start Date	effectiveStartDate
Valid to	Customer	BUT0ID_VALID_DATE_TO	Effective End Date	effectiveEndDate
ID Number	Customer	BUT0ID-IDNUMBER	Identifier Value	altIdValue
Country	Customer	BUT0ID_COUNTRY	Country	X_infac360sap_country

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Entry Date	Customer	BUT0ID-ENTRYDATESTR	Issued date	X_infac360sap_entryDate
Region	Customer	BUT0ID-REGION	Region	X_infac360sap_region

Indicator field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Indicator field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Military use - Nuclear Sector	Customer	NA	Indicator Type	X_infac360sap_indicatorType
Indicator	Customer	- BUT000-MILVE - BUT000-NUC_SEC - BUT000-XDELE - BUT000-XBLCK - BUT000-NOT_RELEASED	Indicator Value	X_infac360sap_indicatorValue

Industry field group of Organization business entity

The following table lists the SAP S/4HANA business partner field that is mapped to the Industry field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Industry Code	Customer	NA	Industry Code	X_infac360sap_industryCode

Language field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Language field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Language	Customer	BUT000-LANGU	Language	X_infac360sap_language
Indicator	Customer	NA	Primary Indicator	X_infac360sap_primaryIndicator

Phone field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Phone field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Telephone - Fax - Mobile - Other	Customer	NA	Phone Type	phoneType
- Telephone - Fax - Mobile	Customer	- ADR2-TEL_NUMBER - ADR3-FAX_NUMBER	Phone Number	phoneNumber
Do Not Use Communication Number	Customer	ADR2-FLG_NOUSE	Do Not Call Indicator	doNotCallIndicator
Valid From	Customer	ADR2-DATE_FROM	Effective Start Date	effectiveStartDate
Valid To	Customer	ADR2-VALID_TO	Effective End Date	effectiveEndDate
Telephone Extension	Customer	ADR2-TEL_EXTENS	Phone Number Extension	phoneNumberExtension

PO Box Address field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the PO Box Address field groups of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
PO Box	Customer	ADRC-PO_BOX	PO Box	X_infac360sap_poBox
Postal Code	Customer	ADRC-POST_CODE1	Postal Code	X_infac360sap_postalCode
Company Postal Code	Customer	ADRC-POST_CODE2	Company Postal Code	X_infac360sap_companyPostalCode
PO Box w/o No	Customer	ADRC-PO_BOX_NUM	PO Box w/o No	X_infac360sap_poBoxW/oNo
PO Box Lobby	Customer	ADRC-PO_BOX_LOBBY	PO Box Lobby	X_infac360sap_poBoxLobby
Delivery Service	Customer	ADRC-DELI_SERV_TYPE	Delivery service	X_infac360sap_deliveryService
Delivery Number	Customer	ADRC-DELI_SERV_NUMBER	Delivery Number	X_infac360sap_deliveryNumber
Other City	Customer	ADRC-PO_BOX_LOC	Other City	X_infac360sap_otherCity

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Other Country	Customer	ADRC.PO_BOX_CTY	Other Country	X_infac360sap_otherCountry
Other Region	Customer	ADRC.PO_BOX_REG	Other Region	X_infac360sap_otherRegion
Undeliverable	Customer	ADRC.DONT_USE_P	Undeliverable	X_infac360sap_undeliverable

Role field group of Organization business entity

The following table lists the SAP S/4HANA business partner field that is mapped to the Role field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Create in BP Role	Customer	BUT100-RLTYP	Role	X_infac360sap_bpRole

Status field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Status field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Status Profile	Customer	NA	Status Type	statusType
Active Status	Customer	NA	Status Value	statusValue

Tax Details field group of Organization business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Tax Details field group of Organization business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Category	Customer	DFKKBPTAXNUM-TAXTYPE	Tax Number Type	taxNumberType
Tax Type	Customer	KNA1-FITYP	Tax Payer Type	X_infac360sap_taxType
Tax Number Category	Business Partner General	DFKKBPTAXNUM-TAXTYPE	Tax Category	X_infac360sap_taxCategory

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Sales Equalization Tax	Customer	KNA1-STKZA	Sales Equalization Tax	X_infac360sap_salesEqualizationTax
Subject to Sales/ Purchase Tax	Customer	KNA1-STKZU	Subject to Sales/ Purchase Tax	X_infac360sap_subjectToSalesPurchaseTax
Tax Number	Business Partner General	DFKKBPTAXNUM-TAXNUMXL	Tax Number	taxNumber

Mapping of Person business entity and SAP ECC business partner fields

The fields from the SAP ECC business partner are mapped to the Customer 360 Person business entity for data integration. You can map multiple SAP fields to a Customer 360 fields. For example, SAP fields, such as Telephone, Fax, and Mobile, are mapped to Phone Number field of Customer 360.

General fields of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the general fields of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Full Name	KNA1-Name1	Full Name	fullName
Title	KNA1-ANRED	Title	title
Authorization Group	KNA1-BEGRU	Authorization group	X_infac360sap_authorizationGroup
Division	KNVV-SPART	Sales Division	X_infac360sap_salesDivision
Distribution Channel	KNVV-VTWEG	Sales Distribution Channel	X_infac360sap_salesDistributionchannel
Sales Organization	KNVV-VKORG	Sales Org	X_infac360sap_salesOrg

Address field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Address field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
City	ADRC.CITY1	City	city
Country	ADRC.COUNTRY	Country	country
Postal Code	ADRC.POST_CODE1	Postal Code	postalCode
Street	ADRC.STREET	Address Line 1	addressLine1
Street 2	ADRC-STR_SUPPL1	Address Line 2	addressLine2
Street 3	ADRC.-STR_SUPPL2	Address Line 3	addressLine3
Address Usage Type	NA	Usage Type	addressUsageType
Address Type	BUT021.ADR_KIND	Address Type	addressType
Postal Code Ext	ADRC.PCODE1_EXT	Postal Code Extension	postalCodeExtension
District	ADRC.CITY2	County	county
Region	ADRC-REGION	State	state
Address Valid From	ADRC.DATE_FROM	Start Date	effectiveStartDate
Address Valid To	ADRC.DATE_TO	End Date	effectiveEndDate

Alternate Names field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Alternate Name field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Name 1 - Name 2 - Name 3	NA	Alternate Name Type	alternateNameType
- Name2 - Name3 - Name4	- KNA1-NAME2 - KNA1-NAME3 - KNA1-NAME4	Alternate Name	AlternateName

Customer Type field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that is mapped to the Customer Type field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Account Group	KNA1-KTOKD	Customer Type	X_infac360sap_customerType

Email field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Email field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Email	ADR6-SMTP_ADDR	Electronic Address	electronicAddress
Vaild From	ADR6-VALID_FROM	Effective Start Date	effectiveStartDate
Vaild To	ADR6-VALID_TO	Effective End Date	effectiveEndDate

Financial field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Financial field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID	Description
Annual Sales	KNA1-UMSA1	Amount	amount	
Annual Sales	KNA1-UMSA1	Finance Info Type	financeInfoType	Customer 360 Financial Info Type field is mapped to SAP Annual Sales when the SAP Annual Sales flag is enabled.
Currency	KNA1-UWAER	Currency	currency	

Indicator field group of Person business entity

The following table lists the SAP ECC general data in customer master field that is mapped to the Indicator field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID	Description
Military use	KNA1-MILVE	Indicator Type	X_infac360sap_indicatorType	The Indicator Type field populates the enabled field values such as Military use or Non-Military use.

Language field group of Person business entity

The following table lists the SAP ECC general data in customer master field that is mapped to the Language field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Language Key	KNA1-SPRAS	Language	X_infac360sap_language

Phone field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Phone field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Telephone - Fax	NA	Phone Type	phoneType
Valid From	ADR2-DATE_FROM	Effective Start Date	effectiveStartDate
Valid To	ADR2-VALID_TO	Effective End Date	effectiveEndDate
- Telephone Extension - Fax Extension	- ADR2-TEL_EXTENS - FAX_EXTENS	Phone Number Extension	phoneNumberExtension

PO Box Address field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the PO Box Address field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
PO Box	ADRC-PO_BOX	PO Box	X_infac360sap_poBox
Postal Code	ADRC-POST_CODE1	Postal Code	X_infac360sap_postalCode
Company Postal Code	ADRC-POST_CODE2	Company Postal Code	X_infac360sap_companyPostalCode
PO Box w/o No	ADRC-PO_BOX_NUM	PO Box w/o No	X_infac360sap_poBoxW/oNo
PO Box Lobby	ADRC-PO_BOX_LOBBY	PO Box Lobby	X_infac360sap_poBoxLobby
Delivery Service	ADRC-DELI_SERV_TYPE	Delivery Service	X_infac360sap_deliveryService
Delivery Number	ADRC-DELI_SERV_NUMBER	Delivery Number	X_infac360sap_deliveryNumber
Other City	ADRC-PO_BOX_LOC	Other City	X_infac360sap_otherCity
Other Country	ADRC.PO_BOX_CTY	Other Country	X_infac360sap_otherCountry
Other Region	ADRC.PO_BOX_REG	Other Region	X_infac360sap_otherRegion
Undeliverable	ADRC.DONT_USE_P	Undeliverable	X_infac360sap_undeliverable

Tax Details field group of Person business entity

The following table lists the SAP ECC general data in customer master fields that are mapped to the Tax Details field group of Person business entity:

SAP Display Name	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Category	KNA1-STCDT	Tax Number Type	taxNumberType
Tax Type	KNA1-FITYP	Tax Payer Type	X_infac360sap_taxType
Sales Equalization Tax	KNA1-STKZA	Sales Equalization Tax	X_infac360sap_salesEqualizationTax
- Tax Number 1 - Tax Number 2 - Tax Number 5 - Tax Number 6 - VAT Registration Number	- KNA1-STCD1 - KNA1-STCD2 - KNA1-STCD5 - KNA1-STCD6 - KNA1-STCEG	Tax Number	taxNumber

Mapping of Person business entity and SAP S/4HANA Person business partner fields

The fields from the SAP S/4HANA Person business partner are mapped to the Customer 360 Person business entity fields for data integration. For example, SAP fields, such as Telephone, Fax, and Mobile, are mapped to Phone Number field of Customer 360.

General fields of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the general fields of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
First Name	Customer	BUT000.NAME_FIRST	First Name	firstName
Last Name	Customer	BUT000.NAME_LAST	Last Name	lastName
Full Name	Customer	BUT000.NAME1_TEXT	Full Name	fullName
Title	Customer	BUT000.TITLE	Prefix	title
Salutation	Customer	BUT000.TITLE_LET	Salutation	X_infac360sap_salutation
Occupation	Customer	BUT000.JOBGR	Occupation	X_infac360sap_occupation
Country of Origin	Customer	BUT000-CNDSC	Birth Country	X_infac360sap_birthCountry
BP Type	Customer	BUT000.BPKIND	BP Type	X_infac360sap_bpType
Authorization Group	Customer	BUT000.AUGRP	Authorization group	X_infac360sap_authorizationGroup
Children	Customer	But000.CHILDREN	Children	X_infac360sap_children
Household Members	Customer	BUT000.MEM_HOUSE	Household Members	X_infac360sap_houseHold Members
Birth Place	Customer	BUT000-BIRTHPL	Birth Place	birthPlace
Date of Birth	Customer	BUT000-BIRTHDT	Birth Date	birthDate
Sex	Customer	BUT000.GENDER	Gender	gender
Marital Status	Customer	BUT000-MARST	Marital Status	maritalStatus
Death Date	Customer	BUT000-DEATHDT	Death Date	X_infac360sap_dthDt

Address field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Address field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
City	Customer	ADRC.CITY1	City	city
Country	Customer	ADRC.COUNTRY	Country	country
Postal Code	Customer	ADRC.POST_CODE1	Postal Code	postalCode
Street 3	Customer	ADRC.-STR_SUPPL2	Address Line 3	addressLine3
Street 4	Customer	ADRC.STR_SUPPL3	Address Line 4	addressLine4
Street 5	Customer	ADRC.LOCATION	Address Line 5	addressLine5
Address Usage Type	Customer	NA	Usage Type	usageType
Address Type	Customer	BUT021.ADR_KIND	Address Type	addressType
Postal Code Extension	Customer	ADRC.PCODE1_EXT	Postal Code Extension	postalCodeExtension
District	Customer	ADRC.CITY2	County	county
Street	Customer	ADRC.STREET	Address Line 1	addressLine1
Street 2	Customer	ADRC-STR_SUPPL1	Address Line 2	addressLine2
Region	Customer	ADRC-REGION	State	state
Address Valid From	Customer	ADRC.DATE_FROM	Start Date	effectiveStartDate
Address Valid To	Customer	ADRC.DATE_TO	End Date	effectiveEndDate

Alternate Name field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Alternate Name field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Known As	Customer	NA	Alternate Name Type	nameType
Name Supplement	Customer	BUT000.NICKNAME	Alternate Name	name

Customer Type field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Customer Type field group of the Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Competitors - Sales Partner - Prospect - Default Sales Partner	Customer	- KNA1-DEAR1 - KNA1-DEAR2 - KNA1-DEAR3 - KNA1-DEAR5	Customer Type	X_infac360sap_customerType

Email field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Email field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Email	Customer	ADR6-SMTP_ADDR	Electronic Address	electronicAddress
Valid From	Customer	ADR6-VALID_FROM	Effective Start Date	effectiveStartDate
Valid To	Customer	ADR6-VALID_TO	Effective End Date	effectiveEndDate

Employment field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Employment field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Employer	Customer	BUT000-EMPLO	Employer Name	employerName
Monthly Net Income	Customer	BP001-MO_NET_INC	Monthly Net Income	X_infac360sap_monthlyIncome
Net Annual Income	Customer	BP001-NET_INCOME	Net Annual Income	X_infac360sap_annualIncome
Target Group	Customer	BP001.GROUP_D	Employment Type	employmentType
Occupation	Customer	BUT000-JOBGR	Designation	designation

Financial field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Financial field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Monthly Revenue - Annual Revenue	Customer	NA	Finance Info Type	financeInfoType
- Monthly Revenue - Annual Revenue	Customer	- BP001-MO_NET_INC - BP001-NET_INCOME	Amount	amount
Currency	Customer	BP001-INCOME_CUR	Currency	currency

Identifier field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Identifier field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Responsible Institution	Customer	BUT0ID.INSTITUTE	Issuing Authority	issuingAuthority
ID Type	Customer	BUT0ID.TYPE	Identifier Type	idType
Valid From	Customer	BUT0ID_VALID_DATE_FROM	Effective Start Date	effectiveStartDate
Valid To	Customer	BUT0ID_VALID_DATE_TO	Effective End Date	effectiveEndDate
ID Number	Customer	BUT0ID.IDNUMBER	Identifier Value	altIdValue
Country	Customer	BUT0ID_COUNTRY	Country	X_infac360sap_country
Entry Date	Customer	BUT0ID.ENTRY_DATE	Issued Date	X_infac360sap_entryDate
Region	Customer	BUT0ID_REGION	Region	X_infac360sap_region

Indicator field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Indicator field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Nuclear data - Military Use - Archiving Flag - Central Block - Not Released	Customer	NA	Indicator Type	X_infac360sap_indicatorType
Indicator	Customer	- BUT000-NUC_SEC - BUT000-MILVE - BUT000-XBLCK - BUT000-NOT_RELEASED - BUT000-XDELE	Indicator Value	X_infac360sap_indicatorValue

Language field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Language field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Language	Customer	BUT000.LANGU_CORR	Language	X_infac360sap_language
Indicator	Customer	NA	Primary Indicator	X_infac360sap_primaryIndicator

Phone field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Phone field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
- Telephone - Fax - Mobile - Other	Customer	NA	Phone Type	phoneType
- Telephone - Fax - Mobile	Customer	- ADR2.TEL_NUMBER - ADR3.FAX_NUMBER	Phone Number	phoneNumber
Do Not Use Communication Number	Customer	NA	Do Not Call Indicator	doNotCallIndicator
Valid From	Customer	ADR2.VALID_FROM	Effective Start Date	effectiveStartDate
Valid To	Customer	ADR2.VALID_TO	Effective End Date	effectiveEndDate
Extension	Customer	ADR2.TEL_EXTENS	Phone Number Extension	phoneNumberExtension

PO Box Address field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the PO Box Address field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
PO Box	Customer	ADRC.PO_BOX	PO Box	X_infac360sap_poBox
Postal Code	Customer	ADRC.POST_CODE1	Postal Code	X_infac360sap_postalCode
Company Postal Code	Customer	ADRC.POST_CODE2	Company Postal Code	X_infac360sap_companyPostalCode
PO Box w/o Number	Customer	ADRC.PO_BOX_NUM	PO Box Without Number	X_infac360sap_poBoxW/oNo
PO Box Lobby	Customer	ADRC.PO_BOX_LOBBY	PO Box Lobby	X_infac360sap_poBoxLobby
Delivery Service	Customer	ADRC.DELI_SERV_TYPE	Delivery Service	X_infac360sap_deliveryService
Delivery Number	Customer	ADRC.DELI_SERV_NUMBER	Delivery Number	X_infac360sap_deliveryNumber

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Other City	Customer	ADRC.PO_BOX_LOC	Other City	X_infac360sap_otherCity
Other Country	Customer	ADRC.PO_BOX_CTY	Other Country	X_infac360sap_otherCountry
Other Region	Customer	ADRC.PO_BOX_REG	Other Region	X_infac360sap_otherRegion
Undeliverable	Customer	ADRC.DONT_USE_P	Undeliverable	X_infac360sap_undeliverable

Status field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Status field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Status Profile	Business Partner General	NA	Status Type	statusType
Active Status	Business Partner General	NA	Status Value	statusValue

Tax Details field group of Person business entity

The following table lists the SAP S/4HANA business partner fields that are mapped to the Tax Details field group of Person business entity:

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Tax Number Type	Customer	DFKKBPTAXNUM-TAXTYPE	Tax Number Type	taxNumberType
Tax Type	Customer	KNA1-FITYP	Tax Payer Type	X_infac360sap_taxType
Name	Business Partner General	NA	Tax Name	X_infac360sap_taxName
Tax Number Category	Business Partner General	DFKKBPTAXNUM-TAXTYPE	Tax Category	X_infac360sap_taxCategory
Description	Business Partner General	NA	Description	X_infac360sap_description
Tax group	Business Partner	NA	Tax Group	X_infac360sap_taxGroup

SAP Display Name	SAP Business Partner Role	SAP Table Name	Customer 360 Display Name	Customer 360 Internal ID
Sales Equalization Tax	Business Partner	KNA1-STKZA	Sales Equalization Tax	X_infac360sap_salesEqualizationTax
Subject to Sales/ Purchase Tax	Business Partner General	KNA1-STKZU	Subject to Sales/ Purchase Tax	X_infac360sap_subjectToSalesPurchaseTax
Tax Number	Customer	DFKKBPTAXNUM-TAXNUMXL	Tax Number	taxNumber

Pages

The Customer 360 Extension for SAP package contains predefined pages. You can use the predefined pages as a reference to create similar custom pages for business entities.

Use the Create page type to create records. Use the View and Edit page type to view and edit records.

The following table describes the predefined pages for the Organization and Person business entities:

Page Name	Description	Assigned User Roles
Create Page for Organization	A page to create an organization record.	- MDM Business User - Customer 360 Analyst - Customer 360 Manager - Customer 360 Data Steward
View and Edit Page for Organization	A page to view or edit an organization record.	- MDM Business User - Customer 360 Analyst - Customer 360 Manager - Customer 360 Data Steward
Create Page for Person	A page to create a person record.	- MDM Business User - Customer 360 Analyst - Customer 360 Manager - Customer 360 Data Steward
View and Edit Page for Person	A page to view or edit a person record.	- MDM Business User - Customer 360 Analyst - Customer 360 Manager - Customer 360 Data Steward

For more information about creating pages, see *Designing user interface*.

Reports

Use predefined reports to visualize data in the form of charts and report tables in Customer 360 Extension for SAP.

The following table describes predefined reports that the Customer 360 Extension for SAP package includes:

Report Name	Internal ID	Description
Migration Status Organization	migration_status_organization	Displays the number of SAP ECC customer records that are exported to SAP S/4HANA and the number of SAP ECC customer records that aren't exported to SAP S/4HANA.
Organization by Source System	organization_by_source_system	Displays the number of customer records based on their source systems.
Migration Status Person	migration_status_person	Displays the number of customer records SAP ECC customer records that are exported to SAP S/4HANA and the number of SAP ECC customer records that aren't exported to SAP S/4HANA.
Person by Source System	person_by_source_system	Displays the number of customer records based on their source systems.

Data quality rule association

Add the predefined data quality rule associations to the business entity fields to cleanse, standardize, and validate the field values. When you import source records, the data quality rule associations validate and transform the records in Customer 360 SaaS.

The following table describes the advanced rule associations that the Organization and Person business entites uses:

Rule Association Name	Rule Specification Name	Applied Field	Description
IBAN Validation	IBAN Validation	Bank Details.IBAN	Validates whether the length of the International Bank Account Number (IBAN) is less than or equal to 34.
Email Address Validation	Email Address Validation	Email.Electronic Address	Validates whether the email address value has a valid format.

Rule Association Name	Rule Specification Name	Applied Field	Description
PO Box and Delivery Service Validation	Po Box and Delivery Service validation	PO Box Address.PO Box	Validates whether the applied field or the Delivery Service field has a value, and ensures that both the fields don't contain a value at the same time.
PoBox and CompanyPostalCode validation	PoBox and CompanyPostalCode validation	PO Box Address.PO Box	Validates whether the applied field or the Company Postal Code field has a value, and ensures that both the fields don't contain a value at the same time.
Postal Code and Po Box Validation	Postal Code and Po Box Validation	PO Box Address.Postal Code	Validates that when the Postal Code field has a value, the PO Box field is not null.
PO Box Without Number Check	PO Box Without Number Check	PO Box Address.PO Box Without Number	Validates whether the PO Box field has a value.

CHAPTER 4

Deploying Customer 360 Extension for SAP

To deploy Customer 360 Extension for SAP, you must configure SAP ECC and SAP S/4HANA, download the extension package, import assets into Customer 360, and update the predefined connections.

To deploy Customer 360 Extension for SAP, perform the following tasks:

1. Download and extract the extension package.
2. Import the data model, predefined pages, and source systems.
3. Add predefined pages.
4. Import reference data code values into reference data assets.

Note: To import the data model, pages, source system, and reference data assets, ensure that you belong to the MDM Designer and Designer user roles. Ensure that you don't have the Admin user role.

After you deploy the extension, configure Customer 360 to integrate Customer 360 with SAP.

Downloading and extracting the Customer 360 Extension for SAP package

To get the link to download the Customer 360 Extension for SAP package, contact Informatica Global Customer Support.

After you download Customer 360 Extension for SAP, extract the package on your machine. The package contains the additional data model attributes, relationships, and predefined custom pages for Customer 360.

The extracted package contains the following files and folders:

File or Folder Name	Description
`1_MDM_Assets.zip`	Contains the following attributes: - Additional data model attributes to store SAP ECC and SAP S/4HANA records. - Source system for SAP ECC and SAP S/4HANA. - Predefined custom pages.
`2_DI_Assets.zip`	Contains Data Integration assets to import SAP ECC and SAP S/4HANA records to Customer 360.

File or Folder Name	Description
3_MDM_Job_Assets.zip	Contains the job assets to synchronize SAP ECC and SAP S/4HANA records with Customer 360 in batches.
4_CAI_Assets.zip	Contains the Cloud Application Integration assets.
Reference Data	Contains files that store code lists and values related to SAP ECC and SAP S/4HANA.
Secure Agent Files	Contains the parameter values for the Cloud Data Integration mappings.

Importing Customer 360 Extension for SAP assets

Import the data model changes related to Customer 360 Extension for SAP, the predefined custom pages, and the source systems.

Before you customize the Customer 360 data model, ensure that you import the extension assets. Importing the Customer 360 Extension for SAP assets overwrites the existing Customer 360 assets and your customization.

Note: Before importing the data model, pages, and reference data assets, ensure that you are assigned to the Designer, MDM Designer, Reference 360 User, and Reference 360 Business Steward user roles, and not to the Admin user role.

1. In Business 360 Console, click **Explore** > **Import**.

   The **Import Assets** page appears.
2. Navigate to the following file:

   `<Extracted extension package>/1_MDM_Assets.zip`
3. Click **Open**.
4. On the **My Import/Export Logs** page, verify that the import job is successful.

Adding predefined pages

You can add the predefined pages of the Organization and Person business entities to Customer 360 SaaS. Ensure that you have the administrator user role.

1. In Business 360 Console, click **Explore** > **Customer 360**.
2. Click the business application.
3. On the **Pages** tab, select **Organization**.
4. On the **Create** tab, click **Add Page**.

   A blank row appears.
5. To select a page, click the asset picker.

   The **Select a page** window appears.
6. Select **Create Page for Organization**, and click **Select**.

The selected page appears in the row.

7. To assign user roles to the page, from the list of user roles, select one or more user roles.

   For more information about the user roles assigned to pages, see "Pages" on page 89.

8. On the **View and Edit** tab, click **Add Page**.

   A blank row appears.

9. To select a page, click the asset picker.

   The **Select a page** window appears.

10. Select **View and Edit Page for Organization**, and assign the page to one or more user roles.

    For more information about the user roles assigned to pages, see "Pages" on page 89.

11. Repeat steps 3 through 10, for all the pages listed under "Pages" on page 89.

12. Click **Save**.

For more information about how to assign pages to user roles, see *Assign pages to user roles*.

Importing reference data assets

After you import MDM assets and enrichment assets, import reference data code values in bulk from CSV files into reference data assets.

The following table describes the files and folders in the extracted reference data directory:

File or Folder Name	Description
`_1`	Folder that contains the code values.
`LoadReferenceData.py`	Python script to import reference data.

To import code values in bulk from CSV files that are available in the extracted reference data directory, run the LoadReferenceData.py Python script.

Prerequisites

Before you import reference data into your system, ensure that you meet the prerequisites.

Complete the following prerequisite tasks:

- Ensure that you have permission to import reference data.
- Install Python version 3 or later on your machine.
- To verify whether the cURL library files are pre-installed and to check the cURL library version, run the following command from a command prompt:

  ```
  curl --version
  ```

  Note: If cURL isn't available in your operating system, ensure that you install it. You can download the cURL library for your operating system from the cURL website:

  `http://curl.haxx.se/download.html`

Importing the reference data

To import all the reference data in bulk, run the Python script.

1. Open a command prompt, and navigate to the following directory:

   ```
   <Extracted extension package>/Reference Data
   ```

2. Run the following command:

   - On Windows.

     ```
     python LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```

   - On Linux.

     ```
     python3 LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```

   The jobs to import reference data code values run.

3. To monitor the status of a job, click **My Jobs** in Reference 360.

   The My Jobs page lists the job instances that are currently running, failed, and successfully completed.

CHAPTER 5

Integrating Customer 360 Extension for SAP

Integrate Customer 360 Extension for SAP with SAP ECC or SAP S/4HANA to process SAP data in batches. To integrate Customer 360 with SAP ECC or SAP S/4HANA, import and configure the Customer 360 Extension for SAP assets.

Note: Import the extension assets before you customize your data model in MDM SaaS because the import process overwrites all your customization.

To configure the Customer 360 Extension for SAP assets, perform the following tasks:

1. Import the Cloud Data Integration assets.
2. Import the predefined batch jobs.
3. Import the Cloud Application Integration assets.
4. Publish the Cloud Application Integration processes.
5. Set the Secure Agent parameters.
6. Import the parameter files.
7. Configure the flat file connection.
8. Configure the Reference 360 Connector.
9. Configure Business 360 FEP connector.
10. Configure the SAP Table Connector.
11. Create custom tables in SAP.
12. Create import jobs.
13. Run the batch jobs.

Importing the Cloud Data Integration assets

Import the Cloud Data Integration assets, such as predefined taskflows, mapping tasks, and mappings. Create import and export jobs based on the predefined taskflows.

1. In Data Integration, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/2_DI_Assets/DI_Assets.zip`
3. Click **Open**.

The **Import Assets** page lists the assets in the file.

4. Ensure that all the assets are selected, and then select **Publish Taskflow(s) after import**.
5. Click **Import**.
6. On the **My Import/Export Logs** page, verify whether the import job is successful.

Importing the job assets

After you import the Cloud Data Integration assets, import the job assets related to the source system. Use batch jobs to ingress records from and egress the processed records to the source system.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   ```
   <Extracted extension package>/3_MDM_Job_Assets/Job_Assets.zip
   ```

3. Click **Open**.

   The **Import Assets** page lists the assets in the file.

4. Ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify whether the import job is successful.

Importing the Cloud Application Integration assets

After you import the batch jobs, import the Cloud Application Integration assets.

1. In Application Integration, click **Explore** > **Import**.
2. Navigate to the following file:

   ```
   <Extracted extension package>/4_CAI_Assets.zip
   ```

3. Click **Open**.

   The **Import Assets** page lists the assets in the file.

4. Ensure that all the assets are selected.
5. In the **Review Locations** section, select the target project to which you want to import the assets.
6. Click **Import**.
7. On the **My Import/Export Logs** page, verify whether the import job is successful.

Publishing the Cloud Application Integration processes

To run Cloud Application Integration processes, you must publish the processes named `infac360sap_proc_person_writeback_create_ingress` and `infac360sap_proc_organization_writeback_create_ingress`.

1. In Application Integration, click **Explore** > **<Project>**.

   For example, if you use Customer 360, click **Customer360**.
2. Click **SAP Extension**.
3. To publish the process, click the process, expand the **Actions** menu, and click **Publish**.

Adding a Secure Agent

To run the Cloud Data Integration processes securely, add a Secure Agent to the predefined Secure Agent group.

1. In Administrator, click **Runtime Environments**.
2. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Add or Remove Secure Agents**.
3. In the **Available Agents** list, select the Secure Agent that you want to add to the group, and click **Select**.
4. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Enable or Disable Services, Connectors**.
5. From the **Services** tab, select the services to enable for the Secure Agent group.
6. From the **Connectors** tab, select the connectors to enable for the Secure Agent group.
7. Click **Save**.

Importing parameter files

A parameter file is a list of user-defined parameters and their associated values. Use parameter files to define values that you want to update without having to edit the mapping task. The parameter values are applied when the task runs. Import the parameter files for Cloud Data Integration mappings.

Customer 360 Extension for SAP contains the following parameter files in the Secure Agent files directory for the Data Integration mappings:

- `infac360sap_ecc_inbound`
- `infac360sap_ecc_outbound`
- `infac360sap_inbound`
- `infac360sap_mt_ecc_org_c360_org_limited_outbound`
- `infac360sap_mt_ecc_person_c360_person_limited_outbound`
- `infac360sap_mt_s4h_org_c360_org_limited_outbound`

- infac360sap_mt_s4h_person_c360_person_limited_outbound
- infac360sap_s4h_inbound
- infac360sap_s4h_outbound

To import parameter files, save the parameter files in the Secure Agent Installation directory.

Copy the parameter files from the source directory to the target Secure Agent installation directory:

Source: <Extracted extension package>\Secure Agent Files\Parameter Files

Target: <Secure Agent Installation Directory>\apps\Data_Integration_Server\data\userparameters

Optionally, if you want to use a configured path for the target location, see *Parameter file location*.

Configuring the flat file connection

To access flat files from the Secure Agent, configure the flat file connection.

1. In Administrator, click **Connections**.
2. Click infac360sap_conn_flatfile.
3. Verify the directory to store the flat file.

   Default is C:\ReferenceData.
4. Test the connection and ensure that the connection is successful.

Configuring Business 360 FEP connector

You can use Business 360 FEP Connector to write SAP data into MDM SaaS. If the input values for SAP ECC and SAP S/4HANA integer fields are null, Business 360 FEP Connector converts the null values to 0 in MDM SaaS.

1. In Administrator, click **Connections**.
2. Click infac360sap_conn_business360_fep.
3. Test the connection, and ensure that the connection is successful.

   The connection might fail with the following error:
   ```
   The test connection for infac360sap_fep_business360 failed. Unable to fetch connector attributes, Ensure adapter ID is valid[com.infa.adapter.mdmflat].
   ```
4. If the connection fails, perform the following steps:
   a. Verify the license used.
   b. Verify that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

Configuring Business 360 Connector

Configure Business 360 Connector to establish a connection to Reference 360 and then import reference data from SAP ECC and SAP S/4HANA into the reference data sets in Reference 360.

1. In Administrator, click **Connections**.
2. Click `infar360sap_conn_customer360`.
3. Test the connection.

   The connection might fail with the following error:
   `The test connection for infar360sap_conn_customer360 failed. Unable to fetch connector attributes. Ensure that the adapter ID is valid[com.infa.adapter.mdmflat].`
4. If the connection fails, perform the following steps to ensure that the connection is successful:
   a. Verify your license for Business 360 Connector.
   b. Ensure that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

Configuring SAP connection

You can use SAP Table connection to integrate SAP ECC and SAP S/4HANA with Customer 360 in batches.

1. To configure a SAP Table connection, perform the following steps:
   a. Verify if the required licences are available for SAP Table Connector to create an SAP table connection and process SAP table data.
   b. Download and install the Microsoft Visual C++ Redistributable package on the Windows machine that hosts the Secure Agent.
   c. Download and configure the SAP libraries on the Secure Agent machine to read from and write to SAP tables.
   d. To enable the Secure Agent to connect to the SAP system as a Remote Function Call (RFC) client, create and configure the `sapnwrfc.ini` file on the machines that host the Secure Agent.
   e. Configure the SAP user account to process SAP table data.
   f. Install the SAP Table connection transport files on the SAP machines that you want to access.
   g. To connect to SAP through HTTPS and read SAP table sources, configure the machine that hosts the Secure Agent and the machine that hosts the SAP system.

   For more information about the SAP Table Connector, see https://onlinehelp.informatica.com/IICS/prod/CDI/en/index.htm#page/cloud-data-integration-sap-connector/SAP_Table_Connector_administration.html
2. Configure the following connections:
   - `infac360sap_conn_table_ecc`
   - `infac360sap_conn_table_s4h`

The following table describes the SAP Table connection properties:

Connection property	Description
Runtime Environment	Required. Runtime environment that contains the Secure Agent that you want to use to access SAP tables.
Username	Required. SAP user name with the appropriate user authorization.
Password	Required. SAP password.
Client	Required. SAP client number.
Language	Language code that corresponds to the SAP language.
Saprfc.ini Path	Required. Local directory to the `sapnwrfc.ini` file. To write to SAP tables, use the following directory: `<Informatica Secure Agent installation directory>/main/bin/rdtm`
Destination	Required. DEST entry that you specified in the `sapnwrfc.ini` file for the SAP application server. Destination is case sensitive. **Note:** Use all uppercase letters for the destination.
Port Range	HTTP port range. The SAP Table connection uses the specified port numbers to connect to SAP tables using the HTTP protocol. Ensure that you specify valid numbers to prevent connection errors. Default: 10000-65535. Enter a range in the default range, for example, 10000-20000. When a range is outside the default range, the connection uses the default range.
Test Streaming	Tests the connection. When selected, tests the connection using both RFC and HTTP protocol. When not selected, tests connection using HTTP protocol.
Https Connection	When selected, connects to SAP through HTTPS protocol. To successfully connect to SAP through HTTPS, verify that an administrator has configured the machines that host the Secure Agent and the SAP system.
Keystore Location	The absolute path to the JKS keystore file.
Keystore Password	The destination password specified for the .JKS file.
Private Key Password	The export password specified for the .P12 file.

3. Test the connections, and ensure that the connections are successful.

   For more information about the SAP Connector, see https://onlinehelp.informatica.com/IICS/prod/CDI/en/index.htm#page/cloud-data-integration-sap-connector/SAP_IDocs_and_RFCsBAPI_Connector_administration.html

4. If the SAP instance and the Secure Agent are installed in the same Virtual Private Cloud (VPC) network, perform the following steps:
   a. Configure the Secure Agent host to use the private IP address to access the SAP instance.
      1. Open the following file on the Secure Agent:
         - On Windows. `\Windows\System32\drivers\etc\hosts`
         - On Linux. `/etc/hosts`
      2. Add an entry for the SAP instance in the following format:
         `<SAP Hostname> <Private IP address of SAP Host>`
      3. Repeat steps 1 through 2 for all the SAP instances available in VPC as Secure Agent host.
   b. For communication between SAP instance and Secure Agent, add a custom DTM configuration property to use the private IP address of the Secure Agent host.
      1. In Administrator, click **Runtime Environments**.
      2. Expand the **Actions** menu for the Secure Agent, and select **Edit Secure Agent**.
      3. In the **Custom Configuration Details** section, enter the following details:

Field Name	Value
Services	Data Integration Server
Type	DTM
Name	SapTableReaderNatIpAddress
Value	<Private IP address of Secure Agent host>

      4. Click **Save**.
         The Secure Agent restarts automatically within 10 minutes. To apply the properties immediately, you can restart manually. Ensure that no tasks run to avoid failure of any running task.
   c. Test the connection to verify the connectivity between SAP and the Secure Agent host.
      If the connection test is unsuccessful, disable the firewall to resolve the issue.

Creating custom tables in SAP

Create custom tables in SAP to hold the outbound Customer 360 data in SAP S/4HANA. After you create custom tables in SAP, you can use the Cloud Data Integration assets to load Customer 360 data to SAP S/4HANA.

1. Log in to SAP.
2. To use the ABAP dictionary, enter the transaction code value as `SE11` and press **Enter**.
   The **ABAP Dictionary: Initial Screen** page appears.
3. Enter the database table name you want to create as ZINFA_STATUS.
   Note: The table name must start with `Y` or `Z` only.

4. Click **Create**.

   The **Dictionary: Change Table** page appears.
5. Enter a short description for the transparent table.
6. To create an application table that contains master data or transaction data, enter the delivery class value as `A`.
7. From the **Fields** tab, enter field name, data type, and length of the fields that you want to add to the table.

   For more information about the field attributes, see "Field mapping" on page 67.
8. Specify the primary key for each table. To set a field as a primary key for the table, enable the **Key** checkbox.
9. Click **Save**.
10. From the menu bar, click **More** > **Extras** > **Enhancement Category**.

    The **Maintain Enhancement Category for <database table name>** dialog box appears.
11. Select **Can Be Enhanced (Deep)** enhancement category.
12. Click **Copy**.
13. From the menu bar, click the **Activate** icon.

Creating import jobs in Reference 360

To import data from SAP ECC and SAP S/4HANA to Reference 360, create import jobs in Reference 360.

1. In Reference 360, click **New**.

   The **New Asset** dialog box appears.
2. Click **Jobs** > **Reference Data Import**, and click **Create**.

   The **Reference Data Import** dialog box appears.
3. Set the display name and internal ID of the job.
4. To import data from SAP ECC, create the following jobs:
   - infac360sap_import_ecc_reconcacct_inbound
   - infac360sap_import_ecc_salesarea_inbound
   - infac360sap_import_ecc_companycode_inbound

   To import data from SAP S/4HANA, create the following jobs:
   - infac360sap_import_s4h_reconcacct_inbound
   - infac360sap_import_s4h_salesarea_inbound
   - infac360sap_import_s4h_companycode_inbound
   - infac360sap_import_s4h_enterp_reconcacct_reconcacct_inbound
5. Set the location to `Customer360\SAP Extension`.
6. Add the taskflow associated with the job.

   For more information about jobs and their related taskflow, mapping task, and mapping of the Organization and Person business entities, see "Batch jobs" on page 49.
7. Save the job.

Running the jobs

After integrating SAP ECC and SAP S/4HANA with Customer 360, you can run the ingress job.

Note: When you configure an SAP Table Reader mapping to read data from an SAP table source object, the mapping might fail with the following error:

```
com.sap.conn.jco.AbapException: (126) OPTION_NOT_VALID: OPTION_NOT_VALID Message 000 of class SAIS type E, Par[1]: DB_Error, Par[2]: DD02L I
```

If the SAP Table Reader mapping fails, configure the `SapStrictSql` custom property and set the value based on the SAP system language.

To configure the `SapStrictSql` custom property, perform the following tasks :

1. In Administrator, click **Runtime Environments**.
   The **Runtime Environments** page appears.
2. Select the Secure Agent that runs the mapping.
3. Click **Edit**.
4. In the **Custom Configuration Details** section, select **Data Integration Server** as the **Service** and **Tomcat** as the **Type**.
5. In the **Name** field, enter `SapStrictSql` and set the value based on the SAP system language.
   For example, set the value as **E** for English language.

For more information about the list of available jobs, see "Batch jobs" on page 49.

INDEX

D

Data Integration
  mapping 67

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

J

jobs
  run 104

M

maintenance outages 6
mapping
  Data Integration 67
mapping *(continued)*
  field 67

S

status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5