Informatica

Informatica® MDM - Customer 360 SaaS
April 2026

# Customer 360 for Insurance

Informatica MDM - Customer 360 SaaS Customer 360 for Insurance
April 2026

© Copyright Informatica LLC 2022, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-04-11

# Table of Contents


Preface. . . . 5
Informatica Resources. . . . 5
Informatica Documentation. . . . 5
IDMC web site. . . . 5
Intelligent Data Management Cloud Communities. . . . 5
IDMC Marketplace. . . . 5
Informatica Knowledge Base. . . . 5
IDMC Trust Center. . . . 6
Informatica Global Customer Support. . . . 6

**Chapter 1: Introducing Customer 360 for Insurance. . . . 7**
Guidelines for importing assets. . . . 7
Guidelines for migrating assets. . . . 8
Prerequisites to integrate Customer 360 with Salesforce. . . . 8

**Chapter 2: Predefined Customer 360 for Insurance assets. . . . 9**
Data model attributes. . . . 9
Agreement business entity model. . . . 10
Household business entity model. . . . 12
Land Vehicle business entity model. . . . 17
Organization business entity model. . . . 21
Person business entity model. . . . 40
Product Specification business entity model. . . . 64
Structure business entity model. . . . 65
Batch jobs. . . . 69
Predefined assets for processing data in real time . . . . 70
Relationships. . . . 70
Hierarchy relationships of the Organization business entity . . . . 73
Match model. . . . 74
Data quality rules. . . . 76

**Chapter 3: Customer 360 for Insurance and Salesforce integration. . . . 80**
Integrating Customer 360 with Salesforce. . . . 80
Ingress initial data. . . . 80
Egress initial data . . . . 81
Ingress and egress incremental data. . . . 81
Process records in batches. . . . 81
Process records in real time. . . . 82

**Chapter 4: Deploying Customer 360 for Insurance . . . . . 83**

Downloading and extracting the Customer 360 for Insurance package . . . . . 83

Importing the Customer 360 for Insurance assets . . . . . 84

Importing data model, pages, and source systems . . . . . 85

Configuring the flat file connection . . . . . 85

Configuring Customer 360 to process data from Salesforce . . . . . 85

Importing reference data assets . . . . . 86

**Index . . . . . 88**

# Preface

Follow the instructions in *Customer 360 for Insurance* to deploy the Customer 360 for Insurance extension.

# Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

## Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

## IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

## Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

## IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

## Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

## IDMC Trust Center

The IDMC Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the IDMC Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Data Management Cloud Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all IDMC components. Subscribing to all components is the best way to be certain you never miss an update.

## Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

# Introducing Customer 360 for Insurance

Customer 360 for Insurance is a ready-to-use package that extends the capability of Customer 360. The package can include business entities, reference data, relationships, custom pages, jobs, source systems, and Data Integration assets to support the jobs. You can use an extension as a template to get started with Customer 360.

Use Customer 360 for Insurance to achieve the following goals:

**Manage insurance master data**

Manage insurance data that includes individual and organizational customers, policies, product specifications, and agents master data. Use the predefined match model and data quality validation rules to master the records. For example, you can create an enterprise view of the master data across multiple policies and claim systems.

**Manage customer household**

Manage customer households, total value, and life events to identify upsell or cross-sell opportunities.

**Manage relationships**

Manage and view relationships between multiple business entities. For example, you can identify relationships between agents, customers, and insurance policies.

**Enhance insurance governance and customer compliance**

Enhance governance and compliance by understanding customer contact preferences and managing unclaimed life policies.

## Guidelines for importing assets

Consider the following guidelines before you import the industry 360 application assets:

- Set up the prerequisite MDM SaaS business application.
- Import the industry 360 application assets before you customize the business entities. You can safely import multiple industry 360 application assets that use different business entities and in different MDM SaaS business applications. When you import the assets in an environment that already has an industry 360 application with the same business entities, the import fails.
- After you import the assets, consider them as your custom assets.

- Once you deploy an industry 360 application, upgrading to a newer version of the industry 360 application isn't supported.

# Guidelines for migrating assets

Consider the following guidelines before you migrate the industry 360 application assets to another environment:

- To migrate the industry 360 application assets to higher environments, such as QA and production, export the assets from the development environment. Then, import them into the QA and production environments. For more information about migrating assets, see *Migrating projects and assets*.
- Don't import the industry 360 application assets again into a higher environment.

# Prerequisites to integrate Customer 360 with Salesforce

Before you deploy Customer 360 for Insurance, perform the following prerequisites:

- Ensure that you have the licenses required to manage connections, external data, and service rights.

  **Note:** The use of the extension doesn't confer any additional license or entitlement to license consumption beyond the terms specified in the applicable licensing agreements.
- To integrate Customer 360 with Salesforce, ensure that your organization uses the Enterprise or Developer edition of Salesforce and enable the Salesforce connector license.
- To install Customer 360 Extension for Salesforce using guided assistance, complete the following prerequisite tasks:
  - For a Windows-based Secure Agent, install Windows 10, version 1803 or later.
  - For a Linux-based Secure Agent, verify that the cURL library files are installed. To verify whether the cURL library files are installed and to check the cURL library version, run the following command from a command prompt:

    ```
    curl --version
    ```

    If cURL isn't installed, download and install the cURL library for your operating system from the cURL download web site:

CHAPTER 2

# Predefined Customer 360 for Insurance assets

Customer 360 for Insurance is available as a package for installation on request.

The package includes the following predefined assets:


- Additional business entity fields for the existing business entities
- New business entities
- Pages and layouts
- Search components
- Reference data assets
- Match models for business entities
- Relationships

**Note:** Importing the Customer 360 for Insurance assets overwrites the existing Customer 360 assets and your customization. Ensure to import the extension assets before you customize the Customer 360 data model.

## Data model attributes

Customer 360 for Insurance includes additional fields and reference data for Agreement, Household, Land Vehicle, Organization, Person, Product Specification, and Structure business entities.

The following image shows the Customer 360 for Insurance business entities and their relationships:

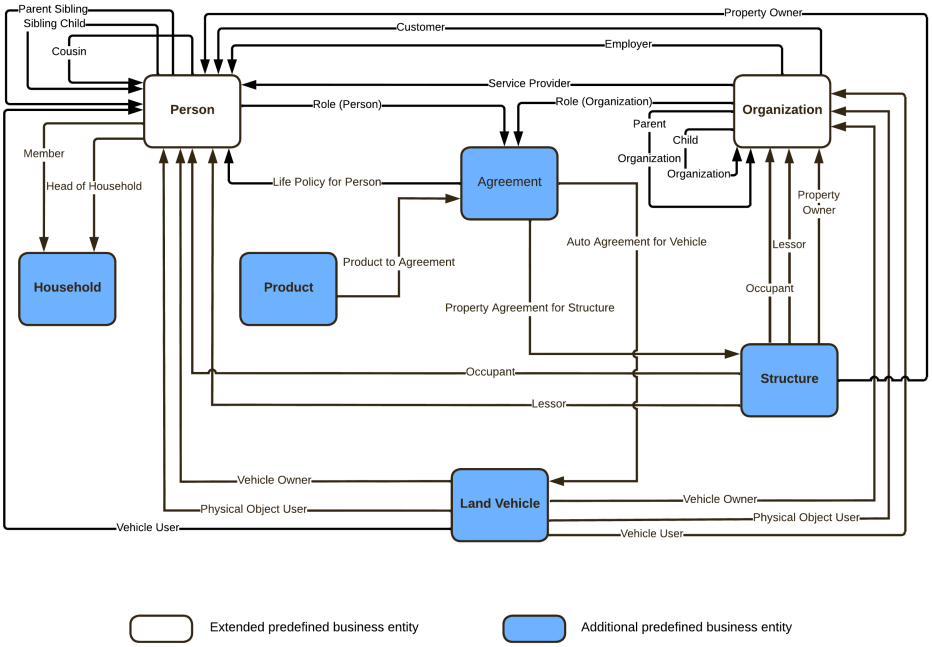


# Agreement business entity model

Agreement business entity stores information about an agreement. This business entity contains some basic fields.

## General fields of the Agreement business entity

The general fields store some basic information about an agreement, such as agreement type and amount.

The following table lists the general fields that the Agreement business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Agreement Description | infac360in_agreementDesc | Text | 50 | NA | Brief description about the insurance agreement signed between the consenting parties. |
| Agreement End Date | infac360in_agreementEndDate | Date | NA | NA | Date when the agreement ends. |
| Agreement Name | infac360in_agreementName | Text | 50 | NA | Name of the insurance agreement. |
| Agreement Number | infac360in_agreementNo | Text | 50 | NA | Agreement number of the legal contract signed between the consenting parties. |
| Agreement Start Date | infac360in_agreementStartDate | Date | NA | NA | Date when the agreement starts. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Agreement Type | infac360in_agreementType | Lookup | NA | infac360in_AgreementType | Type of insurance agreement signed between the consenting parties. For example, insurance or provider agreement. |
| Amount | infac360in_amount | Text | 50 | NA | Premium amount payable for the insurance. |
| Approval Date | infac360in_approvalDate | Date | NA | NA | Date when the insurance agreement was approved. |
| Broad LOB Code | infac360in_broadLobCode | Lookup | NA | infac360in_BroadLineofBusiness | Code used to identify the different line of businesses in an insurance industry. For example, health or life. |
| Calculation Method Code | infac360in_calcMethodCd | Text | 50 | NA | Method used to calculate the insurance coverage. |
| Claim to Loss | infac360in_claimToLoss | Text | 50 | NA | Loss that the party incurs because of the claim. |
| Co-Subscription Indicator | infac360in_cosubscriptionInd | Boolean | NA | NA | Indicates whether the agreement has additional subscribers. |
| Currency | infac360in_currency | Lookup | NA | Currency | Currency used for transactions. For example, United States dollar or United Kingdom pound. |
| Detail Status | infac360in_detailStatus | Lookup | NA | infac360in_AgreementDetailStatus | Detailed status of the insurance agreement. For example, applied, offered, or quoted. |
| Issuing Company | infac360in_issuingAuthority | Text | 50 | NA | Insurance company that issued the agreement |
| Issue Date | infac360in_issuedDate | Date | NA | NA | Date when the insurance agreement was issued. |
| Jurisdiction | infac360in_jurisdiction | Text | 50 | NA | An area whose court and system of laws has authority on the agreement. |
| Line of Business Code | infac360in_lobCode | Lookup | NA | infac360in_LineofBusinessCode | Line of business that the insurance agreement covers. For example, property or term life. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Nature | infac360in_nature | Lookup | NA | infac360in_PremiumNature | Nature of the insurance agreement signed between the consenting parties. For example, deposit premium or subsequent premium. |
| Overall Status | infac360in_overallStatus | Text | 50 | NA | Overall status of the insurance agreement. |
| Product Code | infac360in_productCode | Text | 50 | NA | Product code assigned to the subscribed insurance plan. |
| Renewal Indicator | infac360in_renewalInd | Boolean | NA | NA | Indicates whether the insurance agreement must be renewed. |
| Review Date | infac360in_reviewDate | Date | NA | NA | Review date of the insurance agreement. |
| Status Date | infac360in_statusDate | Date | NA | NA | Date when the insurance status was updated. |
| Status Reason | infac360in_statusReason | Text | 50 | NA | Reason for the insurance status. |
| Tax Qualification | infac360in_taxQualification | Text | 50 | NA | Tax exemption applicable for the insurance premium payable. |
| Tax Status | infac360in_taxStatus | Lookup | NA | infac360in_TaxStatus | Status of the tax exemption. For example, gross or net. |
| Total Claim | infac360in_totalClaim | Text | 50 | NA | Total amount that the policy claims. |
| Version | infac360in_version | Text | 50 | NA | Version of the agreement. |

## Household business entity model

Household business entity stores information about a household. This business entity contains some basic fields and some field groups.

## General fields of the Household business entity

The general fields store some basic information about a household, such as name and member count.

The following table lists the general fields that the Household business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Adult Count | infa360in_adultCount | Integer | NA | NA | Total number of adults in the household. |
| Child Count | infa360in_childCount | Integer | NA | NA | Total number of children in the household. |
| Dependent | infa360in_dependent | Text | 255 | NA | Total number of dependent members in the household. |
| Member Count | infa360in_memberCount | Integer | NA | NA | Total number of members in the household. |
| Name | infa360in_name | Text | 255 | NA | Name of the household. |

## Address field group of the Household business entity

The Address field group stores the address details of a household.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active or inactive. |
| Address Type | addressType | Lookup | NA | AddressType | Type of address. For example, organization, high-rise building, or home. |
| City | city | Text | 50 | NA | City of postal address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Country | country | Lookup | NA | Country | Country code of postal address. For example, Australia or United States. |
| County | county | Text | 50 | NA | County of postal address. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the address is the default address. |
| End Date | endDate | Date Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Description | locationCoordinateDesc | Text | 50 | NA | Location of the address using the geocode coordinates system. |
| Longitude | longitude | Text | 20 | NA | Longitude of the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Start Date | startDate | Date Time | NA | NA | Start date when the address is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| State | state | Lookup | NA | State | State of postal address. For example, if the country is United States, the state can be California or Florida. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |

## Phone field group of the Household business entity

The Phone field group stores the phone details of a household.

The following table lists the additional fields that the Household field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | cellPrefix | Text | 1 | NA | Dialing prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the phone number is the default number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Flag to indicate whether the household is willing to receive unsolicited phone calls from marketers. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | The phone number is no longer active as of this date. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | The phone number becomes active as of this date. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Validation status of the phone number. For example, error, valid, or not validated. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | internationalPrefix | Text | 3 | NA | Prefix used to select an international telephone circuit. |
| ISO | iso | Text | 2 | NA | ISO country code. |
| National Destination Code | nationalDestinationCode | Text | 10 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits that must be dialed before an area or city code. |
| National Destination Code Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether a country defines geographic area codes in the National Numbering Plan. |
| Phone Number | phoneNumber | Text | 20 | NA | Household phone number. |
| Phone Number Extension | phoneNumberExtension | Text | 10 | NA | Extension number. |
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, or fax. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, or home. |
| Prefix Number | prefixNumber | Text | 3 | NA | Country dialing code. |
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as publicly unavailable or the contact point is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Validation Message | validationMessage | Text | 50 | NA | Validation message that the phone number validation service returns. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status code that the phone number validation service returns. |

# Land Vehicle business entity model

Land Vehicle business entity stores information about a motor vehicle that runs on land. This business entity contains some basic fields and some field groups.

## General fields of the Land Vehicle business entity

The general fields store some basic information about a motor vehicle that runs on land, such as brand name and serial number.

The following table lists the general fields that the Land Vehicle business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Accessories Value Amount | X_infac360in_accessoriesValueAmount | Decimal | 34,1 | NA | Estimated amount for the accessories fitted on the vehicle. |
| Average Annual Distance | X_infac360in_avgAnnualDistanceMeasure | Decimal | 34,1 | NA | Average distance that the vehicle was driven in a year. |
| Brand Name | X_infac360in_brandName | Text | 50 | NA | Brand name of the vehicle. |
| Color | X_infac360in_color | Lookup | NA | infac360in_LandVehicleColor | Color of the vehicle, such as black or red. |
| Curb Weight | X_infac360in_curbWeight | Decimal | 34,1 | NA | Curb weight of the vehicle. |
| Curb Weight Unit of Measurement | X_infac360in_curbWeightUnitofMeasurement | Lookup | NA | infac360in_MassUnitofMeasure | Unit of measurement used for measuring the curb weight. For example, gram, ounce, or pound. |
| Currency Code | X_infac360in_currencyCode | Lookup | NA | Currency | Currency used for transaction. For example, United States dollar or United Kingdom pound. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Distance Unit of Measure | X_infac360in_distanceUom | Lookup | NA | infac360in_LengthofMeasure | Unit of measurement for the distance. For example, foot, inch, or meter. |
| First Circulation Date | X_infac360in_firstCirculationDate | Date | NA | NA | Date when the vehicle was put to use. |
| Land Vehicle Description | X_infac360in_desc | Text | 50 | NA | Description of the land vehicle. |
| Make | X_infac360in_make | Text | 255 | NA | Make of the vehicle. |
| Manufactured Date | X_infac360in_manufacturedDate | Date | NA | NA | Date when the vehicle was manufactured. |
| Model | X_infac360in_model | Text | 255 | NA | Model of the vehicle. |
| Movable Indicator | X_infac360in_movableInd | Boolean | NA | NA | Indicates whether the vehicle is in motorable condition. |
| New Vehicle Purchase Indicator | X_infac360in_newVehiclePurchaseInd | Boolean | NA | NA | Indicates whether the vehicle is newly purchased. |
| Regular Driver Count | X_infac360in_regularDriverCount | Integer | NA | NA | Number of people who regularly drive the vehicle. |
| Serial Number | X_infac360in_serialNumber | Text | 50 | NA | Serial number of the vehicle. |
| Size Measurement | X_infac360in_sizeMeasurement | Decimal | 34,1 | NA | Size of the vehicle. |
| Size Unit of Measure | X_infac360in_sizeUom | Lookup | NA | infac360in_AreaUnitofMeasure | Unit of measurement for the size of the vehicle. For example, acre or square foot. |
| Total Trailer Weight | X_infac360in_totalTrailerWeight | Decimal | 34,1 | NA | Total weight of the trailer when it is fully loaded. |
| Total Trailer Weight Unit of Measure | X_infac360in_totalTrailerWeightUom | Lookup | NA | infac360in_MassUnitofMeasure | Unit of measurement for the total trailer weight. For example, gram, ounce, or pound. |
| Trim | X_infac360in_trim | Text | 255 | NA | Trim levels of the vehicle. |
| Vehicle Use Duration Unit of Measure | X_infac360in_cvehicleUseDurationUom | Lookup | NA | infac360in_TimeUnitofMeasure | Unit of measurement for the duration of time. For example, day, hour, or month. |
| Use Mode | X_infac360in_useMode | Lookup | NA | infac360in_VehicleUse | Mode of use of the vehicle. For example, commercial or personal use. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Vehicle Damageability | X_infac360in_vehicleDamageability | Lookup | NA | infac360in_VehicleDamageability | Insurance coverage for the damages made to the vehicle. For example, average, high, or low. |
| Vehicle Identification Number | X_infac360in_vehicleIdentificationNumber | Text | 255 | NA | Unique identification number assigned to identify the vehicle. |
| Vehicle Leased | X_infac360in_vehicleLeased | Lookup | NA | infac360in_VehicleOwnershipStatus | Specifies whether the vehicle was leased. For example, leased, hired from others, or hired to others. |
| Vehicle Special Use | X_infac360in_vehicleSpecialUse | Lookup | NA | infac360in_VehicleSpecialUse | Special use for which the vehicle was put to use. For example, amusement device or emergency vehicle. |
| Vehicle Use Duration | X_infac360in_vehicleUseDuration | Integer | NA | NA | Duration of time the vehicle was used. |
| Year | X_infac360in_year | Integer | NA | NA | Year when the vehicle was launched. |

## Address field group of the Land Vehicle business entity

The Address field group stores the address details of a land vehicle.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active or inactive. |
| Address Type | addressType | Lookup | NA | AddressType | Type of address. For example, organization, high-rise building, or home. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| City | city | Text | 50 | NA | City of postal address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Country | country | Lookup | NA | Country | Country code of postal address. For example, Australia or United States. |
| County | county | Text | 50 | NA | County of postal address. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the address is the default address. |
| End Date | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |
| Enriched Indicator | endDate | Date Time | NA | NA | Expiry date of the address. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Description | locationCoordinateDesc | Text | 50 | NA | Location of the address using the geocode coordinates system. |
| Longitude | longitude | Text | 20 | NA | Longitude of the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Start Date | startDate | Date Time | NA | NA | Start date when the address is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| State | state | Lookup | NA | State | State of postal address. For example, if the country is United States, the state can be California or Florida. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |

# Organization business entity model

Organization business entity stores information about an organization. This business entity contains some basic fields and some field groups.

## General fields of Organization business entity

The general fields store basic information about an organization, such as name and date of incorporation of the organization.

The following table lists the additional general fields that the Organization business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Accounting Period Type | X_infac360in_accountingPeriodType | Text | 255 | NA | Type of accounting period for which the business transactions are accumulated into financial statements. |
| Business Type | X_infac360in_businessType | Lookup | NA | infac360in_BusinessType | Type of business that an organization does. For example, manufacture or distributor. |
| Company Logo | imageUrl | Text | 255 | NA | URL of the image for an organization. |
| Company Type | companyType | Lookup | NA | CompanyType | Type of company. For example, government, registered, or statutory. |
| Country of Incorporation | countryOfIncorporation | Lookup | NA | Country | Country code for the country of incorporation of an organization. For example, Afghanistan or Australia. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Customer Count | X_infac360in_customerCount | Integer | NA | NA | Total number of customers that an organization has. |
| Customer Since Date | X_infac360in_customerSinceDate | Date | NA | NA | Date when an organization started business activities with the customer. |
| Date of Incorporation | dateOfIncorporation | Date | NA | NA | Date from when an organization was incorporated. |
| Government ID | X_infac360in_governmentId | Text | 255 | NA | Identifier that the government issued to an organization. |
| Government ID Type | X_infac360in_governmentIdType | Text | 255 | NA | Type of identifier that the government issued to an organization. For example, driver's license or social security number. |
| NAF Code | X_infac360in_nafCode | Text | 255 | NA | Code of the Numbered Air Force (NAF). |
| NAICS Code | X_infac360in_naicsCode | Text | 255 | NA | North American Cartographic Information Society (NAICS) code used to define business establishments. |
| Name | name | Text | 255 | NA | Full name of an organization. |
| Nature of Business | X_infac360in_natureOfBusiness | Text | 255 | NA | Nature of business that an organization undertakes. |
| Number of Employees | numberOfEmployees | Integer | NA | NA | Total number of employees in an organization. |
| SIC Code | X_infac360in_sicCode | Text | 255 | NA | Standard Industrial Classification (SIC) code used to classify the industry that an organization is associated with. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| State of Incorporation | stateOfIncorporation | Lookup | NA | State | State where an organization was incorporated. For example, if the country is United States, the state can be California or Florida. |
| Website | X_infac360in_website | Text | 255 | NA | URL to access the website of an organization. |

## Address field group of the Organization business entity

The Address field group stores the address details of an organization.

The following table lists the additional fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active, current, old address, or changed. |
| Address Type | addressType | Lookup | NA | AddressType | Type of address. For example, organization, high-rise building, or home. |
| City | city | Text | 50 | NA | City of postal address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country code of postal address. For example, Australia or United States. |
| County | county | Text | 50 | NA | County of postal address. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Description | locationCoordinateDesc | Text | 50 | NA | Location of the address using the geocode coordinates system. |
| Longitude | longitude | Text | 20 | NA | Longitude of the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the address is active. |
| State | state | Lookup | NA | State | State of postal address. For example, if the country is United States, the state can be California or Florida. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |

## Alternate Names field group of the Organization business entity

The Alternate Names field group stores the details of alternate name of an organization.

The following table lists the fields that the Alternate Names field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name | name | Text | 255 | NA | An alternative name for an organization. |
| Effective Start Date | infac360hc_effectiveStartDate | Date Time | NA | NA | Start date from when the alternate name is valid. |
| Effective End Date | infac360hc_effectiveEndDate | Date Time | NA | NA | Expiry date of the alternate name. |
| Name Type | nameType | Lookup | NA | AlternateNameType | Alternate name type. For example, business name, company name, or marketing name. |

## Collection Account field group of the Organization business entity

The Collection Account field group stores information about the bank account details of the organization.

The following table lists the fields that the Collection Account field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Holder Name | X_infac360in_accountHolderName | Text | 255 | NA | Name of the account holder. |
| Account Nick Name | X_infac360in_accountNickName | Text | 255 | NA | Nick name of the account holder. |
| Account Number | X_infac360in_accountNo | Text | 255 | NA | Account number assigned to the account. |
| Account Status | X_infac360in_accountStatus | Text | 255 | NA | Status of the account. |
| Account Type | X_infac360in_accountType | Lookup | NA | AccountType | Type of the account. For example, current account or joint account. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Bank Name | X_infac360in_bankName | Text | 255 | NA | Name of the bank where an organization holds the account. |
| Branch Name | X_infac360in_branchName | Text | 255 | NA | Branch name of the bank where an organization holds the account. |
| Card Type | X_infac360in_cardType | Lookup | NA | infac360in_CardType | Type of the card. For example, debit or credit card. |
| Card Sub Type | X_infac360in_cardSubTypeLookup | Lookup | NA | infac360in_CardSubType | Subtype of the card that the bank issued to the account holder. |
| Check Digit | X_infac360in_checkDigit | Text | 255 | NA | Unique characters assigned to verify the integrity of the account number. |
| Collection Type | X_infac360in_colletionType | Text | 255 | NA | Type of the payment collection. |
| Country | X_infac360in_country | Lookup | NA | Country | Country where an organization holds the account. For example, United States or Australia. |
| Effective Start Date | X_infac360in_effectiveStartDate | Date | NA | NA | Date when the account was opened. |
| Expiry Date | X_infac360in_expiryDate | Date | NA | NA | Date when the account expires. |
| IBAN | X_infac360in_iban | Text | 255 | NA | International bank account number (IBAN) of the account holder. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Primary Indicator | X_infac360in_primaryInd | Boolean | NA | NA | Indicates whether the account is the primary account of an organization. |
| Routing Number | X_infac360in_routingNo | Text | 255 | NA | Unique numbers used to identify the financial institutions. |
| SWIFT | X_infac360in_swift | Text | 255 | NA | SWIFT code of the bank where an organization holds the account. |

## Comments field group of the Organization business entity

The Comments field group stores the details of comments about an organization.

The following table lists the fields that the Comments field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Comments | X_infac360in_comments | Text | 255 | NA | Comments about an organization. |
| Source System | X_infac360in_sourceSystem | Text | 255 | NA | The source system from which the comments about an organization are obtained. |

## Document field group of the Organization business entity

The Document field group stores the document details of an organization.

The following table lists the fields that the Document field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Content Type | X_infac360in_contentType | Text | 255 | NA | Content type of the document that is uploaded. For example, text, plain, or image. |
| Document Link | documentLink | Text | 255 | NA | URL to access the document. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Document Name | documentName | Text | 255 | NA | Name of the document. |
| Document Type | documentType | Lookup | NA | DocumentType | Type of the document. For example, application form, claim form, or policy. |
| File Name | fileName | Text | 255 | NA | Physical name of the file. |
| File Size | X_infac360in_fileSize | Integer | NA | NA | Size of the file. |
| Valid From | validFrom | Date | NA | NA | Date from when the document becomes valid. |
| Valid To | validTo | Date | NA | NA | Date until when the document is valid. |

## Email field group of the Organization business entity

The Email field group stores information about the electronic addresses, such as email addresses and hygiene status of the electronic address.

The following table lists the fields that the Email field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the electronic address is primary or default. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date for the electronic address. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date for the electronic address. |
| Electronic Address | electronicAddress | Text | 255 | NA | Actual electronic address of an organization. |
| Electronic Address Status | electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of the electronic address. For example, active, blocked, or not in use. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Validation status of the electronic address. For example, error, valid, or not validated. |
| Hygiene Status | hygieneStatus | Text | 50 | NA | Hygiene status for the electronic address. For example, safe to send, invalid, or former trap. |
| Net Protect Code | netProtectCode | Text | 50 | NA | Net protect codes identify which service or appliance is monitoring a given network. |
| Usage Type | usageType | Lookup | NA | ElectronicAddressUsage Type | Intended use of the communication preference that an organization shared. For example, business or personal. |
| Validation Message | validateMessage | Text | 50 | NA | Message that the electronic address validation service generates to indicate how valid and trusted the electronic address is. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status code that the email address validation service returns. |

## Financial field group of the Organization business entity

The Financial field group stores financial information of a person.

The following table lists the fields that the Financial field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Amount | amount | Double | 20 | NA | Total value of the physical assets that an organization owns. |
| Currency | currency | Lookup | NA | Currency | Currency used for transactions. For example, United States dollar or United Kingdom pound. |
| Finance Info Type | financeInfoType | Lookup | NA | FinanceInfoType | Type of financial information. For example, total equity, annual revenue, or debt. |
| Finance Reliability | financeReliability | Lookup | NA | FinanceReliability | Reliability of the financial data, if the data is actual or an estimate. |
| Time Period | timePeriod | Text | 255 | NA | Finance period for which the data is collected. |
| Time Period Type | financeTimePeriodType | Lookup | NA | TimePeriodType | Type of the finance period. For example, quarterly or annual. |
| Unit | financialUnit | Lookup | NA | FinancialUnit | Unit for the amount. For example, thousand, million, or billion. |

## General Ownership field group of the Organization business entity

The General Ownership field group stores the asset details of an organization.

The following table lists the fields that the General Ownership field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Currency | X_infac360in_currency | Lookup | NA | Currency | Currency used for the transaction. For example, United States dollar or United Kingdom pound. |
| Financial Assets Amount | X_infac360in_financialAssetsAmount | Decimal | 34, 1 | NA | Total value of the financial assets that an organization owns. For example, stocks, bonds, or bank deposits. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Properties Amount | X_infac360in_propertiesAmount | Decimal | 34, 1 | NA | Total value of the physical assets that an organization owns. For example, a building or land. |
| Property Count | X_infac360in_propertyCount | Integer | NA | NA | Total count of the physical assets that an organization owns solely and in partnership with others. |
| Total Owned Property Count | X_infac360in_totalOwnedPropertyCount | Integer | NA | NA | Total count of the physical assets that an organization solely owns. |
| Total Property Amount | X_infac360in_totalPropertyAmount | Decimal | 34, 1 | NA | Total value of the physical assets. |
| Valuable Assets Amount | X_infac360in_valuableAssetsAmount | Decimal | 34, 1 | NA | Total value of all the valuable assets. |

## Identifier field group of the Organization business entity

The Identifier field group stores the alternate identifier details of an organization. Alternate identifiers are known identifiers that uniquely identify an organization.

The following table lists the fields that the Identifier field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the identifier. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Issued date of the identifier. |
| Identifier Type | idType | Lookup | NA | AlternateIdType | Type of alternate identifier. For example, D&B ID or Federal Employer Identification Number. |
| Identifier Value | altIdValue | Text | 50 | NA | Value of alternate identifier, such as employee ID or tax ID number. |
| Issuing Authority | issuingAuthority | Lookup | NA | IssuingAuthority | Authority that has issued the identifier to an organization. For example, Dun & Bradstreet or government agency. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Last Verified Date | X_infac360in_lastverifiedDate | Date | NA | NA | Date when the alternate identifier was last verified. |
| Status | identifierStatus | Lookup | NA | IdentifierStatus | Code to indicate the status of the alternate identifier. For example, effective, disqualified, expired, or temporary. |
| Status Reason Code | X_infac360in_statusReasonCode | Text | 255 | NA | Reason for the status of the alternate identifier. |

## Indicator field group of Organization business entity

The Indicator field group stores additional details of an organization .

The following table lists the fields that the Indicator field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Date | X_infac360in_effectiveDate | Date | NA | NA | Date from which the indicator is valid. |
| Indicator Type | indicatorType | Lookup | NA | IndicatorType | The type of indicator that explains an organization. For example, certified small business and key opinion leader. |
| Indicator Value | value | Text | 255 | NA | Actual value of the indicator. |

## Key People field group of Organization business entity

The Key People field group stores information about the key executives in an organization. The key executives are important people in an organization. For example, the key executives include chief executive officer and chief financial officer of the organization.

The following table lists the fields that the Key People field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Designation | designation | Text | 255 | NA | Designation of the key executive. |
| Executive Type | executiveType | Lookup | NA | ExecutiveType | Executive type. For example, executive chairman, non-executive chairman, or chief executive officer. |
| Name | name | Text | 255 | NA | Name of the executive. |

## Language field group of the Organization business entity

The Language field group stores the language proficiency details of an organization.

The following table lists the fields that the Language field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infac360in_language | Lookup | NA | infac360in_Language | Primary language that an organization uses for communication. For example, English or Spanish. |
| Primary Indicator | X_infac360in_primaryIndicator | Boolean | NA | NA | Indicates whether the language is the primary language of an organization. |

## Legal Entity field group of the Organization business entity

The Legal Entity field group stores the legal information of an organization.

The following table lists the fields that the Legal Entity field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Dissolution Date | X_infac360in_dissolutionDate | Date | NA | NA | Date when an organization was dissolved. |
| Legal Capacity | X_infa360in_legalCapacity | Text | 255 | NA | Legal capacity under which an organization operates. |
| Legal Entity Type | X_infa360in_legalEntityType | Lookup | NA | infac360in_LegalEntityType | Type of legal entity. For example, Limited Partnership or Limited Liability Company. |
| Legal Status Description | X_infa360in_legalStatusDescription | Text | 255 | NA | Legal status held by an organization. |

## Loyalty field group of the Organization business entity

The Loyalty field group stores loyalty account details of an organization.

The following table lists the fields that the Loyalty field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Number | infac360in_accountNumber | Text | 255 | NA | Loyalty account number. |
| Account Status | infac360in_accountStatus | Lookup | NA | LoyaltyAccountStatus | Status of the account. For example, active or inactive. |
| Account Type | infac360in_accountType | Lookup | NA | LoyaltyAccountType | Type of loyalty accounts. For example, elite, silver, gold, or platinum. |
| Customer Loyalty Code | X_infac360in_customerLoyaltyCode | Text | 255 | NA | Code that indicates a customer loyalty level. |
| Effective End Date | infac360in_effectiveEndDate | Date | NA | NA | End date of the loyalty account. |
| Effective Start Date | infac360in_effectiveStartDate | Date | NA | NA | Start date of the loyalty account. |
| Redemption Preferences | infac360in_redemptionPreferences | Lookup | NA | RedemptionPreferences | Preference for the redemption of loyalty points. For example, cash back or credit. |

## Phone field group of the Organization business entity

The Phone field group stores the phone details of an organization.

The following table lists the additional fields that the Phone field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | cellPrefix | Text | 255 | NA | Dialing prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the phone number is the default number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Flag to indicate whether an organization is willing to receive unsolicited phone calls from marketers. |
| Effective End Date | effectiveEndDate | DateTime | NA | NA | Date until when the phone number was active or will be active. |
| Effective Start Date | effectiveStartDate | DateTime | NA | NA | Date from when the phone number is active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Validation status of the phone number. For example, error, valid, or not validated. |
| ISO | iso | Text | 2 | NA | ISO country code. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | internationalPrefix | Text | 255 | NA | Prefix used to select an international telephone circuit. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| National Destination Code | nationalDestinationCode | Text | 255 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Destination Code Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether a country defines geographic area codes in the National Numbering Plan. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits that must be dialed before an area or city code. |
| Phone Number | phoneNumber | Text | 255 | NA | Organization phone number. |
| Phone Number Extension | phoneNumberExtension | Text | 255 | NA | Extension number. |
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, or fax. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, or home. |
| Prefix Number | prefixNumber | Text | 255 | NA | Country dialing code. |
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as publicly unavailable or the contact point is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Validation Message | validationMessage | Text | 255 | NA | Validation message that the phone number validation service returns. |
| Validation Status | validationStatusCode | Text | 255 | NA | Validation status code that the phone number validation service returns. |

## Segments field group of the Organization business entity

The Segments field group stores information about the segment of an organization. Segmentation can help marketers to design targeted campaigns.

The following table lists the fields that the Segments field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Segment Type | segmentType | Lookup | NA | SegmentType | Type of segment. For example, age or income. |
| Segment Value | segmentValue | Lookup | NA | SegmentValue | Name of the category or segment. For example, if the segment type is age, then segment value can be 0-18 years. |

## Social Media field group of the Organization business entity

The Social Media field group stores information about the social media identifiers of an organization.

The following table lists the fields that the Social Media field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Consent Flag | X_infac360in_consentFlag | Boolean | NA | NA | Indicates the consent status of organization to share the social media contact details. |
| Nick Name | X_infac360in_nickName | Text | 255 | NA | Nick name of an organization. |
| Primary Contact Flag | X_infac360in_primaryContactFlag | Boolean | NA | NA | Indicates whether the contact details that an organization provided is the primary contact. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social Media Handle | socialMediaValue | Text | 255 | NA | Social media contact details. |
| Social Media Type | socialHandleType | Lookup | NA | SocialHandleType | Type of social media contact details. For example, Facebook, Linkedin, or Pinterest. |

## Specialization field group of Organization business entity

The Specialization field group stores information about the specialities or specializations of an organization.

The following table lists the fields that the Specialization field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Specialty Type | X_infac360in_specialtyType | Lookup | NA | SpecialityType | Speciality type. For example, construction, educational services, and finance and insurance. |
| Speciality | X_infac360in_specialty | Text | 255 | NA | Name of speciality. |
| Board Certification Flag | X_infac360in_boardCertificationFlag | Boolean | NA | NA | Indicates whether the board certification is active or not. |

## Status field group of the Organization business entity

The Status field group stores the statuses of an organization. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table lists the fields that the Status field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | X_infac360in_effEndDate | Date | NA | NA | Date when the status of an organization expires. |
| Effective Start Date | X_infac360in_effStartDate | Date | NA | NA | Date from when the status is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status Code | X_infac360in_statusCode | Text | 255 | NA | Status of an organization. |
| Status Date | X_infac360in_statusDate | Date | NA | NA | Date when an organization status was updated. |
| Status Reason | X_infac360in_statusReason | Text | 255 | NA | Reason for an organization status. |
| Status Type | X_infac360in_statusType | Lookup | NA | OrgStatusType | Status type of an organization, such as onboarding or primary status. |
| Status Value | X_infac360in_statusValue | Lookup | NA | infac360in_OrgStatusValue | Status value of an organization, such as active or inactive. |

## Stock field group of Organization business entity

The Stock field group stores information about the stock exchanges where an organization trades.

The following table lists the fields that the Stock field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country in which the stock exchange is located. |
| Stock Exchange | stockExchangeName | Text | 255 | NA | Name of the stock exchange that trades the shares. |
| Ticker Symbol | tickerSymbol | Text | 255 | NA | Abbreviation used to identify the publicly traded shares of an organization. |

## Tax field group of Organization business entity

The Tax field group stores tax-related information, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the fields that the Tax field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country of taxation. |
| Currency | currency | Lookup | NA | Currency | Currency in which the tax is paid. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the tax period. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the tax period. |
| State | state | Lookup | NA | State | State within the country of the taxation. |
| Tax Authority | taxAuthority | Lookup | NA | TaxAuthority | Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department. |
| Tax Number | taxNumber | Text | 50 | NA | Unique number that identifies an organization for tax purposes. |
| Tax Number Type | taxNumberType | Lookup | NA | TaxNumberType | Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN). |
| Tax Paid | taxPaid | Text | 50 | NA | Tax amount that an organization has paid. |
| Tax Payer Type | taxPayerType | Lookup | NA | TaxPayerType | Type of tax payer. For example, company, partnership, or trust. |

# Person business entity model

Person business entity stores information about a person. This business entity contains some basic fields and some field groups.

## General fields of the Person business entity

The general fields store basic information about a person, such as full name, birth place, and birth date.

The following table lists the general fields that the Person business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Birth Date | birthDate | Date | NA | NA | Date of birth of a person. |
| Birth Place | birthPlace | Text | 255 | NA | Place of birth of a person. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Blood Group | X_infa360in_bloodGroup | Lookup | NA | infac360in_BloodGroup | Blood group of a person. For example, A+ or AB+. |
| Customer Since Date | X_infac360in_customerSinceDate | Date | NA | NA | Date when a person started business activities with the customer. |
| Designation | designation | Text | 255 | NA | Designation or position of a person. |
| First Name | firstName | Text | 255 | NA | First name of a person. |
| Full Name | fullName | Text | 255 | NA | Full name of a person. |
| Gender | gender | Lookup | NA | Gender | Gender of a person. For example, female, male, or unknown. |
| Government ID | X_infac360in_governmentId | Text | 255 | NA | Identifier that the government issued to a person. |
| Government ID Type | X_infac360in_governmentIdType | Text | 255 | NA | Type of identifier that the government issued to a person. For example, driver's license or social security number. |
| Image | imageUrl | Text | 255 | NA | URL of the image for a person. |
| Is Contact | X_infac360sf_isContact | Boolean | NA | NA | Indicates whether the person is a contact in Salesforce. |
| Is Customer | X_infac360sf_isCustomer | Boolean | NA | NA | Indicates whether the person is a customer in Salesforce. |
| Last Name | lastName | Text | 255 | NA | Last name of a person. |
| Marital Status | maritalStatus | Lookup | NA | MaritalStatus | Marital status of a person. For example, single, married, or divorced. |
| Middle Name | middleName | Text | 255 | NA | Middle name of a person. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Occupation Class | X_infac360in_occupationClass | Text | 50 | NA | Occupation class of a person to define incapacity in the event of a claim. |
| Prefix Name | prefixName | Lookup | NA | PrefixName | Prefix for the name of a person. For example, Dr, Mr, or Mrs. |
| Suffix Name | suffixName | Lookup | NA | SuffixName | Suffix name of a person. For example, Sr, Jr, II, or III. |
| Title | title | Text | 255 | NA | Business title of a person. |

## Address field group of the Person business entity

The Address field group stores the address details of a person.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active, current, old address, or changed. |
| Address Type | addressType | Lookup | NA | AddressType | Type of address. For example, high-rise building, or home. |
| City | city | Text | 50 | NA | City of postal address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country code of postal address. For example, Australia or United States. |
| County | county | Text | 50 | NA | County of postal address. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the address is the default address. |
| End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Description | locationCoordinateDesc | Text | 50 | NA | Location of the address using the geocode coordinates system. |
| Longitude | longitude | Text | 20 | NA | Longitude of the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the address is active. |
| State | state | Lookup | NA | State | State of postal address. For example, if the country is United States, the state can be California or Florida. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |

## Alternate Names field group of the Person business entity

The Alternate Names field group stores the details of alternate name of a person.

The following table lists the fields that the Alternate Name field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Name | name | Text | 255 | NA | An alternative name of a person. |
| Alternate Name Type | nameType | Lookup | NA | AlternateNameType | Type of alternate name. For example, alias, maiden name, or married name. |
| Effective End Date | infac360hc_effectiveEndDate | Date Time | NA | NA | Expiry date of the alternate name. |
| Effective Start Date | infac360hc_effectiveStartDate | Date Time | NA | NA | Start date from when the alternate name is valid. |

## Citizenship field group of Person business entity

The Citizenship field group stores the details of citizenship of a person, such as country and status of citizenship.

The following table lists the fields that the Citizenship field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Citizen of Country | citizenOfCountry | Lookup | NA | Country | Country to which a person belongs. |
| Citizenship Status | citizenshipStatus | Text | 255 | NA | Status of the citizenship. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of citizenship. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date from when the citizenship is valid. |
| Supporting Document Name | supportingDocumentName | Text | 255 | NA | Name of the supporting document that proves the citizenship. |

## Collection Account field group of the Person business entity

The Collection Account field group stores information about the bank account details of a person.

The following table lists the fields that the Collection Account field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Holder Name | X_infac360in_accountHolderName | Text | 255 | NA | Name of the account holder. |
| Account Nick Name | X_infac360in_accountNickName | Text | 255 | NA | Nick name of the account holder. |
| Account Number | X_infac360in_accountNo | Text | 255 | NA | Account number assigned to the account. |
| Account Status | X_infac360in_accountStatus | Text | 255 | NA | Status of the account. |
| Account Type | X_infac360in_accountType | Lookup | NA | AccountType | Type of the account. For example, personal loan account, home loan account, or saving account. |
| Bank Name | X_infac360in_bankName | Text | 255 | NA | Name of the bank where a person holds the account. |
| Branch Name | X_infac360in_branchName | Text | 255 | NA | Branch name of the bank where a person holds the account. |
| Card Type | X_infac360in_cardType | Lookup | NA | infac360in_CardType | Type of the card. For example, debit or credit card. |
| Card Sub Type | X_infac360in_cardSubTypeLookup | Lookup | NA | infac360in_CardSubType | Subtype of the card that the bank issued to the account holder. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Check Digit | X_infac360in_checkDigit | Text | 255 | NA | Unique characters assigned to verify the integrity of the account number. |
| Collection Type | X_infac360in_colletionType | Text | 255 | NA | Type of the payment collection. |
| Country | X_infac360in_country | Lookup | NA | Country | Country where a person holds the account. For example, United States or Australia. |
| Effective Start Date | X_infac360in_effectiveStartDate | Date | NA | NA | Date when the account was opened. |
| Expiry Date | X_infac360in_expiryDate | Date | NA | NA | Date when the account expires. |
| IBAN | X_infac360in_iban | Text | 255 | NA | International bank account number (IBAN) of the account holder. |
| Primary Indicator | X_infac360in_primaryInd | Boolean | NA | NA | Indicates whether the account is the primary account of a person. |
| Routing Number | X_infac360in_routingNo | Text | 255 | NA | Unique numbers used to identify the financial institutions. |
| SWIFT | X_infac360in_swift | Text | 255 | NA | SWIFT code of the bank where a person holds the account. |

## Comments field group of the Person business entity

The Comments field group stores the details of comments about a person.

The following table lists the fields that the Comments field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Comments | X_infac360in_comments | Text | 255 | NA | Comments about a person. |
| Source System | X_infac360in_sourceSystem | Text | 255 | NA | The source system from which the comments about a person are obtained. |

## Communication Preferences field group of the Person business entity

The Communication Preferences field group stores the communication preference details of a person.

The following table lists the fields that the Communication Preferences field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Brand/ Campaign | X_infac360in_brandCampaign | Text | 255 | NA | The brand/campaign of a person. |
| Comments | X_infac360in_comments | Text | 255 | NA | Comments that a person can provide. |
| Communication Channel Type | X_infac360in_communicationChannelType | Lookup | NA | infac360in_CommunicationChannelType | The communication channel type for a person. For example, email, mail, or phone. |
| Communication Type | X_infac360in_communicationType | Lookup | NA | infac360in_CommunicationType | The type of communication for a person. For example, advertising or events. |
| Do Not Call Time | X_infac360in_doNotCallTime | Lookup | NA | infac360in_DoNotCallTime | The time duration for which a person is not interested to receive phone calls. For example, morning, afternoon, or night. |
| Opt In Indicator | X_infac360in_optInInd | Boolean | NA | NA | Indicates whether a person has opted in to receive communication. |
| Opt Out Indicator | X_infac360in_optOutInd | Boolean | NA | NA | Indicates whether a person opted out from receiving communication. |
| Preferred Call Time | X_infac360in_preferredcallTime | Lookup | NA | infac360in_TimeOfDay | Preferred time to communicate. For example, morning, afternoon, or night. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Preferred Day Of the Week | X_infac360in_preferredDayOfTheWeek | Lookup | NA | infac360in_DayOfWeek | The preferred day of the week of a person for communication. For example, Monday, Tuesday, weekday, or weekend. |
| Preferred Language | X_infac360in_preferredLanguage | Lookup | NA | infac360in_Language | Preferred language to communicate. For example, English or Spanish. |
| Preferred Location | X_infac360in_preferredLocation | Text | 255 | NA | The preferred location of a person. |

## Demographics field group of Person business entity

The Demographics field group stores the demographic details of a person.

The following table lists the fields that the Demographics field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Demographic Type | demographicType | Lookup | NA | DemographicType | Type of demographic factors. For example, ethnicity, income level, age, and profession. |
| Demographic Value | demographicValue | Lookup | NA | DemographicValue | Demographic values for a demographic type. For example, if ethnicity is a demographic type, then Hispanic and Asian are demographic values. |
| Ethnicity | X_infac360in_ethinicity | Lookup | NA | infac360in_Ethnicity | Ethnicity of a person, such as Afro American or Caucasian. |

## Document field group of the Person business entity

The Document field group stores the document details of a person.

The following table lists the fields that the Document field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Content Type | X_infac360in_contentType | Text | 255 | NA | Content type of the document that is uploaded. For example, text, plain, or image. |
| Document Link | documentLink | Text | 255 | NA | URL to access the document. |
| Document Name | documentName | Text | 255 | NA | Name of the document. |
| Document Type | documentType | Lookup | NA | DocumentType | Type of the document. For example, application form, claim form, or policy. |
| File Name | fileName | Text | 255 | NA | Physical name of the file. |
| File Size | X_infac360in_fileSize | Integer | NA | NA | Size of the file. |
| Valid From | validFrom | Date | NA | NA | Date from when the document becomes valid. |
| Valid To | validTo | Date | NA | NA | Date until when the document is valid. |

## Education field group of the Person business entity

The Education field group stores the education details of a person. The education details can include the name of the institution where a person graduated, address of the institution, and year of passing.

The following table lists the fields that the Education field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 255 | NA | Line 1 of the address of the educational institution. |
| Address Line 2 | addressLine2 | Text | 255 | NA | Line 2 of the address of the educational institution. |
| City | city | Text | 255 | NA | City in which the institution is located. |
| Country | country | Lookup | NA | Country | Country in which the institution is located. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the qualification. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the qualification. |
| Institution Name | institutionName | Text | 255 | NA | Name of the institution. |
| Qualification Name | qualificationName | Text | 255 | NA | Name of the qualification. |
| Qualification Status | qualificationStatus | Lookup | NA | QualificationStatus | Status of the qualification. |
| Qualification Type | qualificationType | Lookup | NA | QualificationType | Type of qualification, such as illiterate, certification, diploma, bachelor, master, or doctoral. |
| Postal Code | postalCode | Text | 255 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 255 | NA | Postal code extension of the address. |
| State | state | Lookup | NA | State | State in which the institution is located.<br>Legal Entity 360 for Banking supports only states in the United States. |
| Student Number | studentNumber | Text | 255 | NA | Student number in the institution. |

## Email field group of the Person business entity

The Email field group stores information about the electronic addresses, such as email addresses and hygiene status of the electronic address.

The following table lists the fields that the Email field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Indicates whether the electronic address is primary or default. |
| Electronic Address | electronicAddress | Text | 255 | NA | Actual electronic address of a person. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date for the electronic address. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date for the electronic address. |
| Electronic Address Status | electronicAddressStatus | Lookup | NA | ElectronicAddressStatus | Status of the electronic address. For example, active, blocked, or not in use. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Validation status of the electronic address. For example, error, valid, or not validated. |
| Hygiene Status | hygieneStatus | Text | 50 | NA | Hygiene status for the electronic address. For example, safe to send, invalid, or former trap. |
| Net Protect Code | netProtectCode | Text | 50 | NA | Net protect codes identify which service or appliance is monitoring a given network. |
| Usage Type | usageType | Lookup | NA | ElectronicAddressUsageType | Intended use of the communication preference that a person shared. For example, business or personal. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Validation Message | validateMessage | Text | 50 | NA | Message that the electronic address validation service generates to indicate how valid and trusted the electronic address is. |
| Validation Status | validationStatusCode | Text | 50 | NA | Validation status code that the email address validation service returns. |

## Employment field group of the Person business entity

The Employment field group stores the employment details of a person.

The following table lists the additional fields that the Employment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Designation | designation | Text | 255 | NA | Designation of a person. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of employment. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of employment. |
| Employer Name | employerName | Text | 255 | NA | Name of the employer. |
| Employment Status | employmentStatus | Lookup | NA | EmploymentStatus | Status of employment, such as active, inactive, or resigned. |
| Employment Type | employmentType | Lookup | NA | EmploymentType | Type of employment, such as fixed term, contract, or self-employed. |
| Line of Business | lineOfBusiness | Text | 255 | NA | Line of business, such as retail or mortgage. |
| Location | location | Text | 255 | NA | Location of the employer. |

## Financial field group of the Person business entity

The Financial field group stores financial information of a person.

The following table lists the fields that the Financial field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Amount | amount | Double | 20 | NA | Total value of the physical assets that a person owns. |
| Currency | currency | Lookup | NA | Currency | Currency used for transactions. For example, United States dollar or United Kingdom pound. |
| Finance Info Type | financeInfoType | Lookup | NA | FinanceInfoType | Type of financial information. For example, total asset or annual income. |
| Finance Reliability | financeReliability | Lookup | NA | FinanceReliability | Reliability of the financial data, if the data is actual or an estimate. |
| Time Period | timePeriod | Text | 255 | NA | Finance period for which the data is collected. |
| Time Period Type | financeTimePeriodType | Lookup | NA | TimePeriodType | Type of the finance period. For example, quarterly or annual. |
| Unit | financialUnit | Lookup | NA | FinancialUnit | Unit for the amount. For example, thousand, million, or billion. |

## General Ownership field group of the Person business entity

The General Ownership field group stores the asset details of a person.

The following table lists the fields that the General Ownership field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Currency | X_infac360in_currency | Lookup | NA | Currency | Currency used for the transaction. For example, United States dollar or United Kingdom pound. |
| Financial Assets Amount | X_infac360in_financialAssetsAmount | Decimal | 34, 1 | NA | Total value of the financial assets that a person owns. |
| Properties Amount | X_infac360in_propertiesAmount | Decimal | 34 | NA | Total value of the physical assets that a person owns. For example, a building or land. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Property Count | X_infac360in_propertyCount | Integer | NA | NA | Total count of the physical assets that a person owns solely and in partnership with others. |
| Total Owned Property Count | X_infac360in_totalOwnedPropertyCount | Integer | NA | NA | Total count of the physical assets that a person solely owns. |
| Total Property Amount | X_infac360in_totalPropertyAmount | Decimal | 34 | NA | Total value of the physical assets. |
| Valuable Assets Amount | X_infac360in_valuableAssetsAmount | Decimal | 34 | NA | Total value of all the valuable assets. |

## Identifier field group of the Person business entity

The Identifier field group stores the alternate identifier details of a person. Alternate identifiers are known identifiers that uniquely identify a person.

The following table lists the fields that the Identifier field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Alternate Identifier Type | alternateIdentifierType | Lookup | NA | AlternateIdType | Type of alternate identifier. For example, passport number or social security number. |
| Alternate Identifier Value | alternateIdentifierValue | Text | 50 | NA | Value of alternate identifier, such as driver's license number or passport number. Reason for the deactivation of the identifier. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | Expiry date of the identifier. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Issued date of the identifier. |
| Issuing Authority | issuingAuthority | Lookup | NA | IssuingAuthority | Authority that has issued the identifier to a person. For example, government agency or vehicle. |
| Last Verified Date | X_infac360in_lastverifiedDate | Date | NA | NA | Date when the alternate identifier was last verified. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status | identifierStatus | Lookup | NA | IdentifierStatus | Code to indicate the status of the alternate identifier. For example, effective, disqualified, expired, or temporary. |
| Status Reason Code | X_infac360in_statusReasonCode | Text | 255 | NA | Reason for the status of the alternate identifier. |

## Indicator field group of Person business entity

The Indicator field group stores additional details of a person .

The following table lists the fields that the Indicator field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Date | X_infac360in_effectiveDate | Date | NA | NA | Date from which the indicator is valid. |
| Indicator Type | X_infac360in_indicatorType | Lookup | NA | Infac360in_PersonIndicatorType | The type of indicator that explains a person. For example, current employment and primary occupation. |
| Indicator Value | X_infac360in_indicatorValue | Text | 255 | NA | Actual value of the indicator. |

## Language field group of the Person business entity

The Language field group stores the language proficiency details of a person.

The following table lists the fields that the Language field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Language | X_infac360in_language | Lookup | NA | infac360in_Language | Primary language that a person uses for communication. For example, English or Spanish. |
| Primary Indicator | X_infac360in_primaryIndicator | Boolean | NA | NA | Indicates whether the language is the primary language of a person. |

## Life Event field group of Person business entity

The Life Event field group stores the details of the events in the life of a person.

The following table lists the fields that the Life Event field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Event Type | X_infac360in_eventType | Lookup | NA | infac360in_EventType | Type of life event. For example, anticipated retirement and job change. |
| Event Date | X_infac360in_eventDate | Date | NA | NA | Date of the event. |
| Anticipated Indicator | X_infac360in_anticipatedIndicator | Boolean | NA | NA | Indicates whether the life event is anticipated. |

## Lifestyle field group of Person business entity

The Lifestyle field group stores the details of the lifestyle of a person.

The following table lists the fields that the Lifestyle field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Lifestyle Type | X_infac360in_lifestyleType | Lookup | NA | infac360in_LifestyleType | Type of lifestyle. For example, alcohol consumption or tobacco consumption. |
| Lifestyle Value | X_infac360in_lifestyleValue | Lookup | NA | infac360in_LifestyleValue | Frequency of a lifestyle. For example, frequent, moderate, or never. |
| Category | X_infac360in_category | Lookup | NA | infac360in_LifestyleCategory | Category of the lifestyle type. For example, chewing tobacco, spirits, or wine. |

## Lifestyle Activity field group of Person business entity

The Lifestyle Activity field group stores the details related to the lifestyle of a person.

The following table lists the fields that the Lifestyle Activity field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Activity Detail Description | X_infac360in_activityDetailDescription | Text | 255 | NA | Detailed description about the activities the person partakes. |
| Activity Frequency Code | X_infac360in_activityFrequencyCode | Text | 255 | NA | Code that indicates the frequency of the activity. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Activity Name | X_infac360in_activityName | Lookup | NA | infac360in_LifestyleActivityType | Activity the person partakes. For example, aviation, parasailing, or snow climbing. |
| Average Time Spent | X_infac360in_averageTimeSpent | Text | 255 | NA | Average time the person spends on an activity. |

## Loyalty field group of the Person business entity

The Loyalty field group stores the loyalty account details of a person.

The following table lists the fields that the Loyalty field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Account Number | AccountNumber | Text | 255 | NA | Loyalty account number. |
| Account Status | accountStatus | Lookup | NA | LoyaltyAccountStatus | Status of the account. For example, active or inactive. |
| Account Type | accountType | Lookup | NA | LoyaltyAccountType | Type of loyalty accounts. For example, silver, gold, or platinum. |
| Customer Loyalty Code | X_infac360in_customerLoyaltyCode | Text | 255 | NA | Code that indicates a customer loyalty level. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the loyalty account. |
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the loyalty account. |
| Redemption Preferences | redemptionPreferences | Lookup | NA | RedemptionPreferences | Preference for the redemption of loyalty points. For example, cash back or credit. |

## Medical Detail field group of the Person business entity

The Medical Detail field group stores the details about the medical condition of a person, such as medical condition name and condition status.

The following table lists the fields that the Medical Detail field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Condition Cause | X_infac360in_conditionCause | Lookup | NA | infac360in_ConditionCause | Cause of the medical condition. For example, accident, anxiety, or hereditary. |
| Condition Status | X_infac360in_conditionStatus | Lookup | NA | infac360in_ConditionStatus | Status of the medical condition. For example, recovered or under doctor's care. |
| Curability | X_infac360in_curabilityCode | Lookup | NA | infac360in_CurabilityCode | Curability of the medical condition. For example, curable, non-curable, or undetermined. |
| Formal Name | X_infac360in_formalName | Text | 255 | NA | Formal name of the medical condition. |
| Frequency | X_infac360in_frequencyCode | Lookup | NA | infac360in_FrequencyCode | Frequency of insurance claims filed for a medical condition. For example, recurrent or sporadic. |
| General Evaluation Description | X_infac360in_generalEvalutationDescripton | Text | 255 | NA | Description of the general evaluation provided for the medical condition. |
| Medical Condition Name | X_infac360in_medicalConditionName | Text | 255 | NA | Name of the medical condition. |
| Medical File Last Update Date | X_infac360in_medicalFileLastUpdateDate | Date | NA | NA | Date when the medical file was last updated. |
| Severity | X_infac360in_severityCode | Lookup | NA | infac360in_Severity Code | Severity of the medical condition. For example, high, low, or moderate. |

## Phone field group of the Person business entity

The Phone field group stores the phone details of a person.

The following table lists the additional fields that the Phone field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Cell Prefix | cellPrefix | Text | 255 | NA | Dialing prefix that must prepend the National Significant Number for inbound international calls. |
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the phone number is the default number. |
| Do Not Call Indicator | doNotCallIndicator | Boolean | NA | NA | Flag to indicate whether the person is willing to receive unsolicited phone calls from marketers. |
| Effective End Date | effectiveEndDate | DateTime | NA | NA | Date until when the phone number was active or will be active. |
| Effective Start Date | effectiveStartDate | DateTime | NA | NA | Date from when the phone number is active. |
| Enriched Indicator | enrichedIndicator | Boolean | NA | NA | Validation status of the phone number. For example, error, valid, or not validated. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |
| International Prefix | internationalPrefix | Text | 255 | NA | Prefix used to select an international telephone circuit. |
| International Format | internationalFormat | Text | 50 | NA | International format for the phone number. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| National Destination Code | nationalDestinationCode | Text | 255 | NA | Code that identifies a numbering area within a country or a group of countries. |
| National Format | nationalFormat | Text | 50 | NA | National format for the phone number. |
| National Prefix | nationalPrefix | Text | 255 | NA | Digit or combination of digits that must be dialed before an area or city code. |
| National Destination Code Indicator | nationalDestinationCodeIndicator | Boolean | NA | NA | Indicates whether a country defines geographic area codes in the National Numbering Plan. |
| Phone Number | phoneNumber | Text | 255 | NA | Person phone number. |
| Phone Number Extension | phoneNumberExtension | Text | 255 | NA | Extension number. |
| Phone Type | phoneType | Lookup | NA | PhoneType | Type of phone. For example, landline, mobile, or fax. |
| Phone Usage Type | phoneUsageType | Lookup | NA | PhoneUsageType | Usage type of the phone. For example, personal, business, or home. |
| Prefix Number | prefixNumber | Text | 255 | NA | Country dialing code. |
| Status | status | Lookup | NA | PhoneStatus | Status of the phone number, such as publicly unavailable or the contact point is active. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Validation Message | validationMessage | Text | 255 | NA | Validation message that the phone number validation service returns. |
| Validation Status | validationStatusCode | Text | 255 | NA | Validation status code that the phone number validation service returns. |

## Segment field group of the Person business entity

The Segment field group stores information about the segment of a person. Segmentation can help marketers to design targeted campaigns.

The following table lists the fields that the Segment field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Segment Type | segmentType | Lookup | NA | SegmentType | Type of segment, such as income. |
| Segment Value | segmentValue | Lookup | NA | SegmentValue | Name of the category or segment. For example, lower middle class, upper high class, and upper middle class. |

## Social Media field group of the Person business entity

The Social Media field group stores information about the social media identifiers of a person.

The following table lists the fields that the Social Media field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Consent Flag | X_infac360in_consentFlag | Boolean | NA | NA | Indicates the consent status of person to share the social media contact details. |
| Nick Name | X_infac360in_nickName | Text | 255 | NA | Nick name of the person. |
| Primary Contact Flag | X_infac360in_primaryContactFlag | Boolean | NA | NA | Indicates whether the contact details that the person provided is the primary contact. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Social Media Type | socialHandleType | Lookup | NA | SocialHandleType | Type of social media contact details. For example, Facebook, Linkedin, or Pinterest. |
| Social Media Value | socialMediaValue | Text | 255 | NA | Social media contact details. |

## Status field group of the Person business entity

The Status field group stores the statuses of a person. A status can be registered, approved, submitted, rejected, active, or inactive.

The following table lists the fields that the Status field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Status Date | X_infac360in_statusDate | Date | NA | NA | Date when a person status was updated. |
| Status Reason | X_infac360in_statusReason | Text | 255 | NA | Reason for a person status. |
| Status Type | X_infac360in_statusType | Lookup | NA | PersonStatusType | Status type of a person, such as onboarding or primary status. |
| Status Value | X_infac360in_statusValue | Lookup | NA | infac360in_PersonStatusValue | Status value of a person, such as active, accepted, or rejected. |

## Tax Details field group of the Person business entity

The Tax Details field group stores tax-related information of a person, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the fields that the Tax Details field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Country | country | Lookup | NA | Country | Country of taxation. |
| Currency | currency | Lookup | NA | Currency | Currency in which the tax is paid. |
| Effective End Date | effectiveEndDate | Date Time | NA | NA | End date of the tax period. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Effective Start Date | effectiveStartDate | Date Time | NA | NA | Start date of the tax period. |
| State | state | Lookup | NA | State | State within the country of the taxation.<br>Legal Entity 360 for Banking supports only states in the United States. |
| Tax Authority | taxAuthority | Lookup | NA | TaxAuthority | Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department. |
| Tax Number | taxNumber | Text Field | 255 | NA | Unique number that identifies a person for tax purposes. |
| Tax Number Type | taxNumberType | Lookup | NA | TaxNumberType | Type of the tax number. Tax number can be Individual Taxpayer Identification Number (ITIN), Employer Identification Number (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN). |
| Taxpayer Type | taxPayerType | Lookup | NA | TaxPayerType | Type of tax payer. For example, individual, company, partnership, or trust. |
| Tax Paid | taxPaid | Text Field | 255 | NA | Tax amount that a person has paid. |

## Product Specification business entity model

Product Specification business entity stores information about an insurance product. This business entity contains some basic fields.

## General fields of the Product Specification business entity

The general fields store some basic information about an insurance product.

The following table lists the general fields that the Product Specification business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Element Name | infac360in_ElementName | Text | 255 | NA | Elements that define the validity of the insurance policies. For example, a definable risk or fortuitous event. |
| Market Availability From | infac360in_marketableAvailabilityFrom | Date | NA | NA | Date when the product was available in the market. |
| Market Availability To | infac360in_marketableAvailabilityto | Date | NA | NA | Date when the product expires in the market. |
| Marketable Indicator | infac360in_marketableIndicator | Boolean | NA | NA | Indicates whether the product is marketable. |
| Product Description | infac360in_productDescription | Text | 255 | NA | Description of the insurance product. |
| Product Line | infac360in_productLine | Lookup | NA | infac360in_PolicyType | Type of the insurance product. For example, auto, life, or property. |
| Product Name | infac360in_productName | Text | 255 | NA | Name of the insurance product. |
| Short Name | infac360in_shortName | Text | 255 | NA | Short name of the product. |
| Status | infac360in_status | Lookup | NA | infac360in_ProductStatus | Status of the product. For example, closed, in development, or open. |
| Status Change Date | infac360in_statusChangeDate | Date | NA | NA | Date when the status was updated. |
| Status Change Reason | infac360in_statusChangeReason | Lookup | NA | infac360in_ProductStatusReason | Reason for the product status. For example, applicant declined offer, change request denied, or insured death. |
| Version | infac360in_version | Text | 50 | NA | Version of the product. |

# Structure business entity model

Structure business entity stores information about a building structure. This business entity contains some basic fields and some field groups.

## General fields of the Structure business entity

The general fields store some basic information about a building structure, such as construction type, floor count, and room count.

The following table lists the general fields that the Structure business entity contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Actual Usage | X_infac360in_actualUsages | Lookup | NA | infac360in_StructureUsagesType | Usage details of the building. For example, residential or commercial. |
| Area Unit of Measurement | X_infac360in_areaUom | Lookup | NA | infac360in_AreaUnitofMeasure | Unit of measurement for the building area. For example, acre, square foot, or square kilometer. |
| Building Sprinklered Percentage | X_infac360in_buildingSprinkleredPerc | Decimal | 34,1 | NA | Percentage of the building to which the fire sprinklers provide coverage. |
| Burglar Alarm Type | X_infac360in_burglarAlarmType | Lookup | NA | infac360in_AlarmType | Type of the burglar alarm. For example, central station call dialing or stand alone audible. |
| Basement Measurement | X_infac360in_basementMeasurement | Decimal | 34,1 | NA | Measurement of the basement. |
| Construction Type | X_infac360in_constructionType | Lookup | NA | infac360in_ConstructionType | Type of the building construction. For example, aluminium, steel frame, or concrete block. |
| Construction Year | X_infac360in_constructionYear | Text | 50 | NA | Year when the building was constructed. |
| Door Locks Indicator | X_infac360in_doorLocksInd | Boolean | NA | NA | Indicates whether the door locks are installed. |
| Design Style | X_infac360in_designStyle | Lookup | NA | infac360in_DesignStyle | Design style of the building. For example, duplex, high rise multiple units, or single family row home. |
| Distance To Fire Hydrant | X_infac360in_distanceToFireHydrant | Text | 50 | NA | Distance between the building and the nearest fire hydrant. |
| Elevator Count | X_infac360in_elevatorCount | Integer | NA | NA | Number of elevators installed in the building. |
| Floor Count | X_infac360in_floorCount | Integer | NA | NA | Number of floors in the building. |
| Fire Alarm Type | X_infac360in_fireAlarmType | Lookup | NA | infac360in_AlarmType | Type of the fire alarm installed in the building. For example, central station call dialing or stand alone audible. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| General Shape | X_infac360in_generalShape | Lookup | 50 | infac360in_GeneralShape | Shape of the building. For example, rectangle L-shaped, or very irregular. |
| Grade Floor Measurement | X_infac360in_gradeFlooreMeasure | Decimal | 34,1 | NA | Measurement of the grade floor. |
| Habitable Indicator | X_infac360in_habitalInd | Boolean | NA | NA | Indicates whether the building is in a habitable condition. |
| Habitable Unit Count | X_infac360in_habitableUnitCount | Integer | NA | NA | Number of units that are in habitable condition in the building. |
| Heating Type | X_infac360in_heatingType | Lookup | NA | infac360in_HeatingType | Type of heating equipment installed in the building. For example, wood, oil, or electricity. |
| Measure of Occupied Area | X_infac360in_occupiedMeasurement | Decimal | 34,1 | NA | Measurement of area that remains occupied in the building. |
| Prescribed Usage | X_infac360in_prescribedUsages | Lookup | NA | infac360in_PrescribedUsagesType | Recommended usage of the building. For example, commercial or residential. |
| Room Count | X_infac360in_roomCount | Integer | NA | NA | Number of rooms in the building. |
| Safe Indicator | X_infac360in_safeInd | Boolean | NA | NA | Indicates whether the building is safe to occupy. |
| Special Construction Class | X_infac360in_splConstructionClass | Text | 50 | NA | Special class under which the building falls. |
| Special Zoning Classification | X_infac360in_splZoningClass | Text | 50 | NA | Special zones under which the building falls. |
| Structure Description | X_infac360in_structureDesc | Text | 50 | NA | Description of the building structure. |
| Structure Name | infac360in_structureName | Text | 255 | NA | Name of the building structure. |
| Tenancy Type | X_infac360in_tenancyType | Lookup | NA | infac360in_TenancyType | Type of tenancy the building is let out to. For example, owner occupied, rented, or leased. |
| Total Floor Measurement | X_infac360in_totalFloorMeasurment | Decimal | 34,1 | NA | Total measurement of the floors in the building. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Vacancy Indicator | X_infac360in_vacancyInd | Boolean | NA | NA | Indicates whether the building is vacant. |
| Window Locks Indicator | X_infac360in_windowsLockInd | Boolean | NA | NA | Indicates whether the building has window locks installed. |

## Address field group of the Structure business entity

The Address field group stores the address details of a building structure.

The following table lists the fields that the Address field group contains:

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Address Line 1 | addressLine1 | Text | 200 | NA | Line 1 of the address. |
| Address Line 2 | addressLine2 | Text | 200 | NA | Line 2 of the address. |
| Address Line 3 | addressLine3 | Text | 200 | NA | Line 3 of the address. |
| Address Status | addressStatus | Lookup | NA | AddressStatus | Status of the address. For example, active or inactive. |
| Address Type | addressType | Lookup | NA | AddressType | Type of address. For example, organization, high-rise building, or home. |
| City | city | Text | 50 | NA | City of postal address. |
| Coordinate System | coordinateSystem | Text | 100 | NA | Coordinate system used to determine the location of the address. |
| Country | country | Lookup | NA | Country | Country code of postal address. For example, Australia or United States. |
| County | county | Text | 50 | NA | County of postal address. |

| Display Name | Internal ID | Field Type | Length | Reference Data | Description |
|---|---|---|---|---|---|
| Default Indicator | defaultIndicator | Boolean | NA | NA | Flag to indicate whether the address is the default address. |
| End Date | endDate | Date Time | NA | NA | Expiry date of the address. |
| Enriched Indicator | enrichedIndicator | Lookup | NA | AddressEnrichedIndicator | Validation status of the address. For example, error, valid, or not validated. |
| Latitude | latitude | Text | 20 | NA | Latitude for the address. |
| Location Coordinate Description | locationCoordinateDesc | Text | 50 | NA | Location of the address using the geocode coordinates system. |
| Longitude | longitude | Text | 20 | NA | Longitude of the address. |
| Postal Code | postalCode | Text | 10 | NA | Postal code of the address. |
| Postal Code Extension | postalCodeExtension | Text | 10 | NA | Postal code extension of the address. |
| Start Date | startDate | Date Time | NA | NA | Start date when the address is active. |
| State | state | Lookup | NA | State | State of postal address. For example, if the country is United States, the state can be California or Florida. |
| Usage Type | usageType | Lookup | NA | AddressUsageType | Usage type. For example, business or personal. |

# Batch jobs

Use the predefined batch jobs to ingress the Salesforce account records, contact records, person account records, relationships, and hierarchies to Customer 360. After you process the imported records in Customer 360, you can use the predefined batch jobs to export the processed records to Salesforce.

For more information, see Predefined batch jobs of the Organization business entity and Predefined batch jobs of the Person business entity.

# Predefined assets for processing data in real time


Use the predefined assets to synchronize Salesforce records with Customer 360 SaaS in real time.

For more information, see Predefined assets for processing data in real time.

# Relationships

You can use the predefined relationships between the predefined business entities that are included in Customer 360 for Insurance.

The following image shows the predefined relationship types between the business entities and the direction of the relationships:

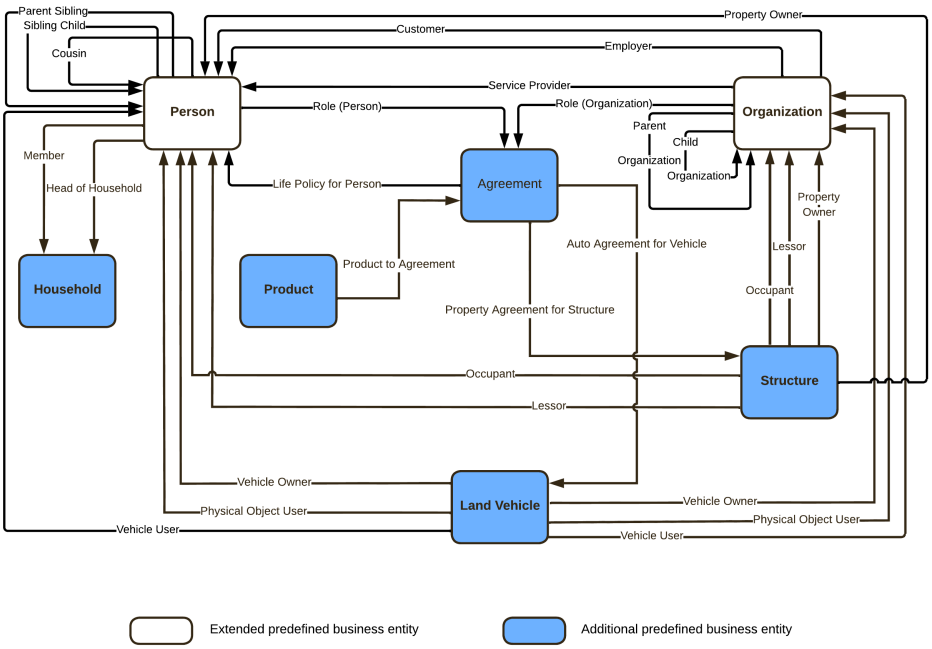

The following table describes the predefined relationships for Customer 360 for Insurance:

| Relationship Name | Internal ID | Business Entity 1 | Business Entity 2 | Direction |
|---|---|---|---|---|
| Agreement Holder - Organization | infac360in_rel_organization_agreement_holder_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Agreement Holder - Person | infac360in_rel_person_agreement_holder_role_in_agreement | Person | Agreement | Person -> Agreement |
| Agreement Producer - Organization | infac360in_rel_organization_agreement_producer_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Agreement Producer - Person | infac360in_rel_person_agreement_producer_role_in_agreement | Person | Agreement | Person -> Agreement |
| Auto Policy for Vehicle | infac360in_rel_auto_policy_for_vehicle | Agreement | Land Vehicle | Agreement -> Land Vehicle |
| Beneficiary - Organization | infac360in_rel_organization_beneficiary_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Beneficiary - Person | infac360in_rel_person_beneficiary_role_in_agreement | Person | Agreement | Person -> Agreement |
| Child Organization | infac360in_rel_child_organization | Organization | Organization | Organization -> Organization |
| Cousin | infac360in_rel_cousin | Person | Person | Person -> Person |
| Customer | infac360in_rel_customer | Organization | Person | Organization -> Person |
| Employer | infac360in_rel_employer | Organization | Person | Organization -> Person |
| Head of Household | infac360in_rel_head_of_household | Person | Household | Person -> Household |
| Insured - Organization | infac360in_rel_organization_insured_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Insured - Person | infac360in_rel_person_insured_role_in_agreement | Person | Agreement | Person -> Agreement |
| Insurer | infac360in_rel_organization_insurer_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Lessor | infac360in_rel_lessor | Structure | Person | Structure -> Person |
| Lessor(Organization) | infac360in_rel_organization_lessor | Structure | Organization | Structure -> Organization |
| Life Policy for Person | infac360in_rel_life_policy_for_person | Agreement | Person | Agreement -> Person |

| Relationship Name | Internal ID | Business Entity 1 | Business Entity 2 | Direction |
|---|---|---|---|---|
| Member of Household | infac360in_rel_member_of_household | Person | Household | Person -> Household |
| Occupant | infac360in_rel_occupant_for_property | Structure | Person | Structure -> Person |
| Occupant(Organization) | infac360in_rel_organization_occupant_for_property | Structure | Organization | Structure -> Organization |
| Organization Role in Agreement | infac360in_rel_organization_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Parent Organization | infac360in_rel_parent_organization | Organization | Organization | Organization -> Organization |
| Parent Sibling | infac360in_rel_parent_sibling | Person | Person | Person -> Person |
| Person Role in Agreement | infac360in_rel_person_role_in_agreement | Person | Agreement | Person -> Agreement |
| Physical Object User | infac360in_rel_physical_object_user | Land Vehicle | Person | Land Vehicle -> Person |
| Physical Object User(Organization) | infac360in_rel_physical_object_user_organization | Land Vehicle | Organization | Land Vehicle -> Organization |
| Premium Payer - Organization | infac360in_rel_organization_premium_payer_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Premium Payer - Person | infac360in_rel_person_premium_payer_role_in_agreement | Person | Agreement | Person -> Agreement |
| Primary Insured - Organization | infac360in_rel_organization_primary_insured_role_in_agreement | Organization | Agreement | Organization -> Agreement |
| Primary Insured - Person | infac360in_rel_person_primary_insured_role_in_agreement | Person | Agreement | Person -> Agreement |
| Product to Agreement | infac360in_rel_product_to_agreement | Product | Agreement | Product -> Agreement |
| Property Owner | infac360in_rel_property_owner | Structure | Person | Structure -> Person |
| Property Owner(Organization) | infac360in_rel_property_owner_oranization | Structure | Organization | Structure -> Organization |
| Property Policy for Structure | infac360in_rel_property_policy_for_structure | Agreement | Structure | Agreement -> Structure |
| Role (Organization) | infac360in_rel_roles_for_organizaton | Organization | Agreement | Organization -> Agreement |

| Relationship Name | Internal ID | Business Entity 1 | Business Entity 2 | Direction |
|---|---|---|---|---|
| Role (Person) | infac360in_rel_roles_for_person | Person | Agreement | Person -> Agreement |
| Service Provider | infac360in_rel_service_provider | Organization | Person | Organization -> Person |
| Sibling Child | infac360in_rel_sibling_child | Person | Person | Person -> Person |
| Signatory | infac360in_rel_person_signatory_role_in_agreement | Person | Agreement | Person -> Agreement |
| Vehicle Owner | infac360in_rel_vehicle_owner | Land Vehicle | Person | Land Vehicle -> Person |
| Vehicle Owner(Organization) | infac360in_rel_vehicle_owner_organization | Land Vehicle | Organization | Land Vehicle -> Organization |
| Vehicle User | infac360in_rel_vehicle_user | Land Vehicle | Person | Land Vehicle -> Person |
| Vehicle User(Organization) | infac360in_rel_vehicle_user_organization | Land Vehicle | Organization | Land Vehicle -> Organization |


## Hierarchy relationships of the Organization business entity

Use the Organization business entity hierarchy to define hierarchical relationships between the Organization business entity records in Customer 360.

The following predefined hierarchical relationships are available for the Organization business entity:

- Child
- Headquarters
- Subsidiary

The following image shows the hierarchical relationships between the Organization business entity records:

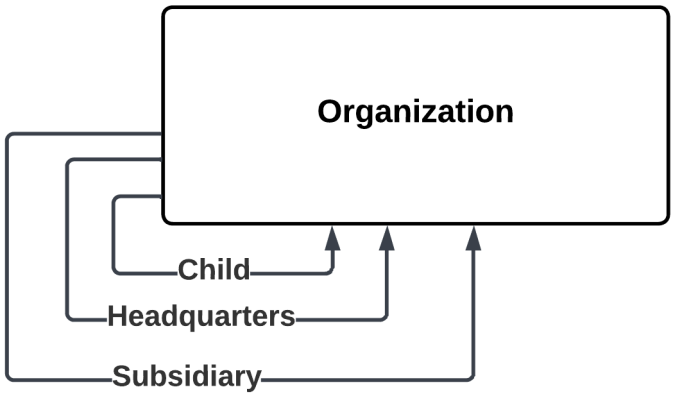

You can create recursive hierarchy relationships between Organization business entity records.

For example, consider a hierarchical relationship where ABC Entertainment is the subsidiary of ABC LLC., ABC Technology Inc. is the child organization of ABC LLC., and ABC Corp. is the head office of ABC LLC. You can create relationships from the ABC LLC. record to the ABC Entertainment, ABC Technology Inc., and ABC Corp. records.

You can view the hierarchical relationships between the Organization business entity records in the summary view.

# Match model

The match model determines how your data is matched. You can use the predefined match model to identify and resolve duplicate records.

Customer 360 for Insurance uses the `Match Model for Deduplication Organization_Name` predefined match model to match and merge duplicate Organization business entity records. The following table describes the match model properties:

| Descriptive Rule Rank | Match Objective | Match Strategy | Match Fields | Description |
|---|---|---|---|---|
| 1 | Resolve Duplicates | Exact | Exact match fields:<br>- PostalAddress.postalCode<br>- PostalAddress.country<br>- PostalAddress.state<br>- PostalAddress.addressLine1<br>- name | Exactly matching organization name & address. |
| 2 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.country<br>- PostalAddress.state<br>- X_infac360in_governmentIdType<br>- X_infac360in_governmentId<br>Fuzzy match fields:<br>- PostalAddress.addressLine1<br>- name | Strongly similar organization name, address and government ID. |

| Descriptive Rule Rank | Match Objective | Match Strategy | Match Fields | Description |
|---|---|---|---|---|
| 3 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.country<br>- PostalAddress.state<br>- AlternateIdentifier.altIdValue<br>- AlternateIdentifier.altIdType<br>Fuzzy match fields:<br>- PostalAddress.addressLine1<br>- name | Similar organization name, address and same alternate ID. |
| 4 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.country<br>- PostalAddress.state<br>Fuzzy match fields:<br>- PostalAddress.addressLine1<br>- name | Similar organization name and address. |

The `Match Model for Person Deduplication` is a predefined match model for Customer 360 for Insurance Person business entity. The following table describes the match model properties:

| Descriptive Rule Rank | Match Objective | Match Strategy | Match Fields | Description |
|---|---|---|---|---|
| 1 | Resolve Duplicates | Exact | Exact match fields:<br>- PostalAddress.postalCode<br>- PostalAddress.country<br>- PostalAddress.state<br>- PostalAddress.addressLine1<br>- lastName<br>- firstName | Exactly similar name and address. |
| 2 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- X_infac360in_governmentIdType<br>- X_infac360in_governmentId<br>Fuzzy match fields:<br>- fullName | Strongly similar person name and exactly similar government ID. |
| 3 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.postalCode<br>- PostalAddress.country<br>- PostalAddress.state<br>- AlternateIdentifier. alternateIdentifierValue<br>- AlternateIdentifier. alternateIdentifierType<br>Fuzzy match fields:<br>- PostalAddress.addressLine1<br>- fullName | Strongly similar name, address, and exactly similar alternate ID. |

| Descriptive Rule Rank | Match Objective | Match Strategy | Match Fields | Description |
|---|---|---|---|---|
| 4 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.postalCode<br>- PostalAddress.country<br>- PostalAddress.state<br>- PostalAddress.addressLine1<br>Fuzzy match fields:<br>- fullName | Similar person name and same address. |
| 5 | Resolve Duplicates | Fuzzy | Exact match fields:<br>- PostalAddress.postalCode<br>- PostalAddress.country<br>- PostalAddress.state<br>- lastName<br>Fuzzy match fields:<br>- PostalAddress.addressLine1 | Similar address and same last name. |

# Data quality rules

You can associate data quality rules to the business entity fields to cleanse, standardize, or validate the field values. When you import the source records, the rule associations validate and transform the records in Customer 360.

The following table lists the basic rule associations for Organization business entity:

| Rule Association Name | Function Name | Applied Field | Description |
|---|---|---|---|
| infac360in_ra_org_reference_period_end_date | Greater Than Date | Reference Period End Date | Validates whether Reference Period End Date is greater than Reference Period Start Date. |
| infac360in_ra_org_accounting_period_end_date | Greater Than Date | Accounting Period End Date | Validates whether Account Period End Date is greater than Accounting Period Start Date. |
| infac360in_ra_org_tax_end_date | Greater Than Date | Tax.Effective End Date | Validates whether Tax Effective End Date is greater than Tax Effective Start Date. |
| infac360in_ra_org_alt_name_end_date | Greater Than Date | Alternate Names.Effective End Date | Validates whether Alternate Names Effective End Date is greater than Alternate Names Effective Start Date. |
| infac360in_ra_org_status_end_date | Greater Than Date | Status.Effective Start Date | Validates whether Status Effective End Date is greater than Status Effective Start Date. |

| Rule Association Name | Function Name | Applied Field | Description |
|---|---|---|---|
| infac360in_ra_org_identifier_end_date | Greater Than Date | Identifier.Effective End Date | Validates whether Identifier Effective End Date is greater than Identifier Effective Start Date. |
| infac360in_ra_org_identifier_last_verified_date | No Future Date | Identifier.Last Verified Date | Validates whether Identifier Last Verified Date is not a future date. |
| infac360in_ra_org_document_valid_to | Greater Than Date | Documents.Valid To | Validates whether Documents Valid To is greater than Documents Validate From. |
| infac360in_ra_org_document_valid_to | Greater Than Date | Insurance.Effective End Date | Validates whether Insurance Valid To is greater than Insurance Validate From. |
| infac360in_ra_org_loyalty_end_date | Greater Than Date | Loyalty.Effective End Date | Validates whether Loyalty Effective End Date is greater than Loyalty Effective Start Date. |
| infac360in_ra_org_customer_since_date | No Future Date | Customer Since Date | Validates that the customer since date is not a future date. |

The following table lists the basic rule associations for Person business entity:

| Rule Association Name | Function Name | Applied Field | Description |
|---|---|---|---|
| NO_FUTURE_DATE | No Future Date | Birth Date | Validates whether birth date is not a future date. |
| CONCAT_WITH_SPACES | Concatenate With Spaces | Full Name | Concatenates first name, middle name, and last name to form full name. |
| infac360in_ra_person_death_date | No Future Date | Death Date | Validates whether the Death Date is not a future date. |
| infac360in_ra_person_missing_date | No Future Date | Missing Date | Validates whether the Missing Date is not a future date. |
| infac360in_ra_person_customer_since_date | No Future Date | Customer Since Date | Validates that the Customer Since Date is not a future date. |

| Rule Association Name | Function Name | Applied Field | Description |
|---|---|---|---|
| infac360in_ra_person_status_end_date | Greater Than Date | Status.Effective End Date | Validates whether Status Effective End Date is greater than Status Effective Start Date. |
| infac360in_ra_person_identifier_last_verified_date | No Future Date | Identifier.Last Verified Date | Validates whether Identifier Last Verified Date is not a future date. |
| infac360in_ra_person_medical_file_update | No Future Date | Medical Detail.Medical File Last Update Date | Validates whether Medical Detail Medical File Last Update Date is not a future date. |
| infac360in_ra_person_employement_end_date | Greater Than Date | Employment.Effective End Date | Validates whether Employment Effective End Date is greater than Employment Effective Start Date. |
| infac360in_ra_person_education_end_date | Greater Than Date | Education.Effective End Date | Validates whether Education Effective End Date is greater than Education Effective Start Date. |
| infac360in_ra_person_tax_end_date | Greater Than Date | Tax Details.Effective End Date | Validates whether Tax Details Effective End Date is greater than Tax Details Effective Start Date. |
| infac360in_ra_person_alt_name_end_date | Greater Than Date | Alternate Names.Effective End Date | Validates whether Alternate Names Effective End Date is greater than Alternate Names Effective Start Date. |
| infac360in_ra_person_citizenship_end_date | Greater Than Date | Citizenship.Effective End Date | Validates whether Citizenship Effective End Date is greater than Citizenship Effective Start Date. |
| infac360in_ra_person_loyalty_end_date | Greater Than Date | Loyalty.Effective End Date | Validates whether Loyalty Effective End Date is greater than Loyalty Effective Start Date. |

| Rule Association Name | Function Name | Applied Field | Description |
|---|---|---|---|
| infac360in_ra_person_identifier_end_date | Greater Than Date | Identifier.Effective End Date | Validates whether Identifier Effective End Date is greater than Identifier Effective Start Date. |
| infac360in_ra_person_document_valid_to | Greater Than Date | Documents.Valid To | Validates whether Documents Valid To is greater than Documents Validate From. |
| infac360in_ra_person_insurance_end_date | Greater Than Date | Insurance.Effective End Date | Validates whether Insurance Effective End Date is greater than Insurance Effective Start Date. |

CHAPTER 3

# Customer 360 for Insurance and Salesforce integration

You can configure Salesforce to synchronize records with Customer 360 in batches or in real time. You can also configure Salesforce to search for matching records in Customer 360 or Salesforce before creating a record.

To onboard the records from Salesforce to Customer 360, create an ingress job to import the initial records. Later, you can continue to ingress the incremental records to be in sync with Salesforce.

After you import the records to Customer 360, process the records, and create an egress job to export the records to Salesforce.

## Integrating Customer 360 with Salesforce

Use Customer 360 Extension for Salesforce to integrate Salesforce and Customer 360 and process the Salesforce records in Customer 360. Customer 360 Extension for Salesforce uses the Organization business entity to store the Salesforce Account records and the Person business entity to store the Salesforce Contact and Person Account records.

You can synchronize the following Salesforce records with Customer 360:

- The account, person account, and contact records that you create or update.
- The account to contact or account to partner relationship records that you create or update.
- The Salesforce hierarchies that you create or update. You can synchronize the hierarchies only in batches, but not in real time.

## Ingress initial data

When you ingress initial data to Customer 360 from Salesforce, the ingress job creates master records for all the Salesforce records in Customer 360. The ingress job assigns a business ID to each master record in Customer 360.

After you onboard the records to Customer 360, you can process the master records. When you run a match and merge job, the job matches the records in Customer 360 and merges the duplicate records to update the master records. The unique records of Salesforce retain the business IDs of the master records, and the duplicate records of Salesforce use the business IDs of the updated master record.

# Egress initial data

After you process the initial data in Customer 360, create an egress job to export all the master records from Customer 360 to Salesforce. By default, you can export the records that have been created, updated, and merged in Customer 360 to Salesforce.

For more information, see Exporting records created in Customer 360 to Salesforce.
When you export the master records to Salesforce, the values of each duplicate record in Salesforce are updated with the master record value. Each master record in Salesforce gets a Customer360 Id that maps to the business ID of the master record.

The Customer360 Sync Date fields for the master records, which display the export dates, are updated accordingly in Salesforce.

# Ingress and egress incremental data

After the first run, you can incrementally ingress the records that are added or updated in Salesforce. When you ingress incremental records, the ingress job uses the Customer360 Id to determine whether to update or insert a record to Customer 360.

When the Customer360 Id is present in Salesforce for a record, it indicates that the record exists in Customer 360 and the job updates the record in Customer 360. When the Customer360 Id is not present in Salesforce, it indicates that the record is new, and the job inserts the record to Customer 360.

After you onboard the incremental records, run a match and merge job to match the records and update the master records. After the master records are updated, you can export the incremental data to Salesforce. The values of each duplicate record in Salesforce are updated with the master record values.


The Customer360 Id and Customer360 Sync Date fields for the master records are updated accordingly in Salesforce.

By default, you can export only the records that have been updated and merged in Customer 360. However, you can configure Customer 360 to export records created in Customer 360 to Salesforce. For more information, see Exporting records created in Customer 360 to Salesforce.

# Process records in batches

When you process records in batches, you must first ingress the records from Salesforce to Customer 360. After you ingress the records, you can process the records in Customer 360, and then egress the records to Salesforce in batches.

The following image shows how you can process the records in batches:

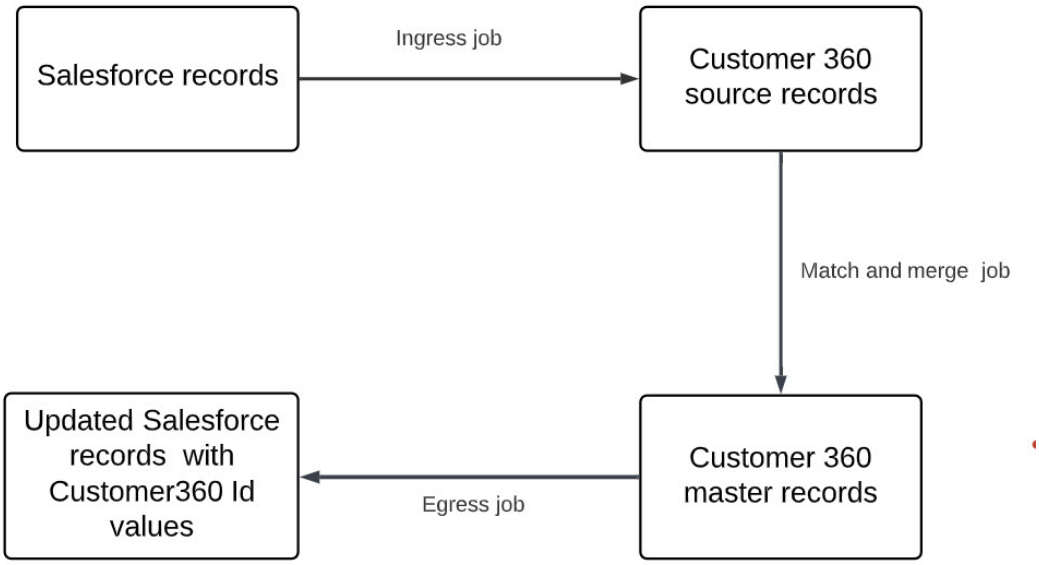



# Process records in real time

When you process records in real time, the records created or updated in Salesforce are upserted to Customer 360 instantaneously. When you create a record in Salesforce, the Cloud Application Integration process triggers a workflow to upsert the record to Customer 360.

After you process the records in Customer 360, you can export the updated records from Customer 360 to Salesforce in batches.

The following image shows how you can synchronize the records in real time:

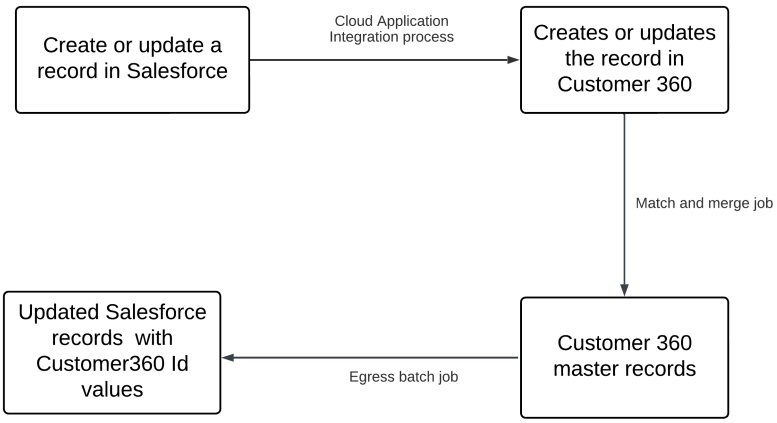


CHAPTER 4

# Deploying Customer 360 for Insurance

Before you deploy Customer 360 for Insurance, ensure that you have the license for the Integration Components for Business 360 and Customer 360 SaaS Edition.

To deploy Customer 360 for Insurance on Customer 360, you must download the extension package and import assets into Customer 360.

The following image shows the process flow to deploy Customer 360 for Insurance:

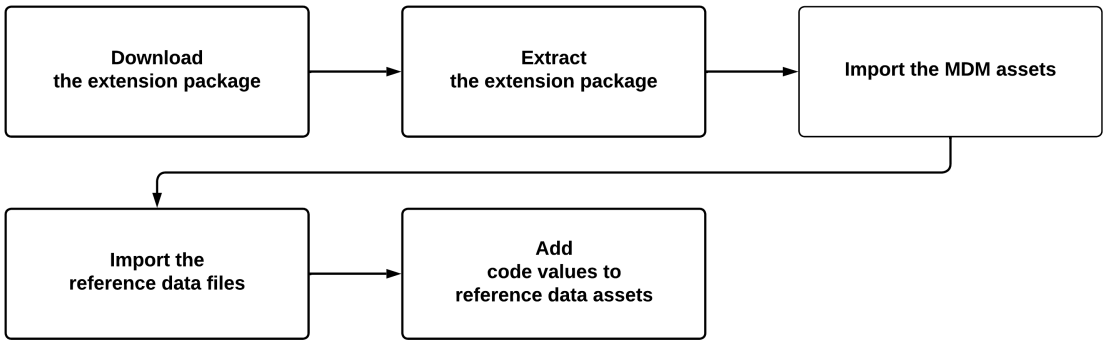


## Downloading and extracting the Customer 360 for Insurance package

To get the link to download the Customer 360 for Insurance package, contact Informatica Global Customer Support.

After you download the Customer 360 for Insurance package, extract the package on your machine. The package contains the additional data model attributes, relationships, and predefined custom pages for Customer 360.

The extracted package contains the following files and folders:

| File or Folder Name | Description |
|---|---|
| 1_MDM_Assets.zip | Contains the following attributes:<br>- Business entities with additional data model attributes to store the source system records.<br>- Relationships.<br>- Reference data assets.<br>- Predefined custom pages for Customer 360.<br>- Search layouts.<br>- Updated Customer 360 business application. |
| 2_DI_Assets.zip | Contains the Data Integration assets and connections that you can use to import Salesforce records to Customer 360 or export Customer 360 records to Salesforce. |
| 3_MDM_Job_Assets.zip | Contains the job assets to synchronize the source system records with Customer 360 in batches. |
| 4_CAI_Assets.zip | Contains the Application Integration assets and connections that you can use to enable Salesforce to search for matching records in Customer 360 and Salesforce. |
| Reference_Data | Contains files that store code lists and values related to source system. |
| Secure Agent Files | Contains the lookup source files and the parameter values for the Data Integration mappings. |

# Importing the Customer 360 for Insurance assets

After you extract the extension package, import the Customer 360 for Insurance assets to Customer 360. When you import the Customer 360 for Insurance assets, the import process overwrites the existing Customer 360 assets and your customization.

**Note:** Before you customize the Customer 360 data model, ensure that you import the extension assets.

You can import the following assets:

- Reference data tables
- Business entities with additional data model attributes
- Pages
- Relationships
- Search layouts
- Updated business application

**Note:** Before you import the extension assets, ensure that you belong to the MDM Designer and Designer user roles, but not to the Admin user role.

To import the assets, perform the following tasks:

1. Import the data model, pages, and source systems.
   For more information, see Importing data model, pages, and source systems.
2. Configure the flat file connection.
   For more information, see Configuring the flat file connection.

3. Import the assets to integrate with Salesforce.
   For more information, see Configuring assets to integrate with Salesforce.
4. Import the reference data assets.
   For more information, see Importing the reference data on page 86.
5. To synchronize batches of Salesforce records in Customer 360, see Processing data in batches.
6. To synchronize Salesforce records in Customer 360 in real-time, see Processing data in real-time.

# Importing data model, pages, and source systems

Import the data model changes related to the extension, the predefined custom pages, and the source systems.

Before you customize the Customer 360 data model, ensure that you import the extension assets.

**Note:** Before importing the data model, pages, and reference data assets, ensure that you are assigned to the Designer, MDM Designer, Reference 360 User, and Reference 360 Business Steward user roles, and not to the Admin user role.

1. In Business 360 Console, click **Explore** > **Import**.
2. Navigate to the following file:

   `<Extracted extension package>/1_MDM_Assets.zip`
3. Click **Open**.
4. On the **Import Assets** page, ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify whether the import job is successful.

# Configuring the flat file connection

To access flat files from the Secure Agent, configure the flat file connection.

1. In Administrator, click **Connections**.
2. Click `infac360ls_conn_flatfile`.
3. Verify the directory to store the flat file.

   Default is `C:\ReferenceData`.
4. Test the connection, and ensure that the connection is successful.

# Configuring Customer 360 to process data from Salesforce

Configure Customer 360 to integrate Salesforce and Customer 360 and process the Salesforce records in Customer 360. You can process Salesforce records in batches or in real time. Import the assets into Customer 360 to ingress data from and egress data to Salesforce. You can configure the extension manually, or you can use guided assistance.

**Note:** Before you import the assets related to Salesforce, ensure that you import the data model related to the extension, the predefined custom pages, and the source system.

To configure Customer 360, perform the following tasks:

1. Import the Cloud Data Integration assets related to Salesforce.
2. Import the job assets.
3. Import the Cloud Application Integration assets related to Salesforce.

4. Add a Secure Agent to the predefined Secure Agent group.
5. Add the lookup files related to Salesforce in the Secure Agent machine.
6. Import the parameter files.
7. Configure the flat file connection.
8. Configure the Business 360 FEP connector.
9. Configure the Salesforce assets manually or using guided assistance.

# Importing reference data assets

After you import the assets for the source systems that you plan to use, import reference data code values in bulk from CSV files into reference data assets.

The following table describes the files and folders in the extracted reference data directory:

| File or Folder Name | Description |
|---|---|
| `Insurance` | The folder that contains the Insurance lookup code values folders.<br>Lookup code values are in the following folders:<br>- `_1`. Contains the parent lookup code values.<br>- `_2`. Contains the child lookup code values. |
| `Salesforce` | The folder that contains the code values folder with the name `_1`. |
| `LoadReferenceData.py` | Python script to import reference data. |

To import code values in bulk from CSV files that are available in the extracted reference data directory, run the LoadReferenceData.py Python script.

## Prerequisites

Before you import reference data into your system, ensure that you meet the prerequisites.

Complete the following prerequisite tasks:

- Ensure that you have permission to import reference data.
- Install Python version 3 or later on your machine.
- To verify whether the cURL library files are pre-installed and to check the cURL library version, run the following command from a command prompt:

  ```
  curl --version
  ```

  **Note:** If cURL isn't available in your operating system, ensure that you install it. You can download the cURL library for your operating system from the cURL website:

  ```
  http://curl.haxx.se/download.html
  ```

## Importing the reference data

To import all the reference data in bulk, run the Python script.

1. Open a command prompt, and navigate to the following directory:

   ```
   <Extracted extension package>/Reference Data
   ```

2. Run the following command:
   - On Windows.
     ```
     python LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```
   - On Linux.
     ```
     python3 LoadReferenceData.py --podHostName <POD host name>.informaticacloud.com --
     userName <user name> --password <password> --region <POD region>
     ```

   The jobs to import reference data code values run.
3. To monitor the status of a job, click **My Jobs** in Reference 360.

   The My Jobs page lists the job instances that are currently running, failed, and successfully completed.

# INDEX


## I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

## M

maintenance outages 6

## S

status
  IDMC 6
  system status 6

## T

trust site
  description 6

## U

upgrade notifications 6

## W

web site 5