Informatica® MDM - Customer 360 SaaS
July 2026

Customer 360 Extension for Salesforce

Informatica MDM - Customer 360 SaaS Customer 360 Extension for Salesforce
July 2026

© Copyright Informatica LLC 2021, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-08-28

Table of Contents

Preface. . . . 6
Informatica Resources. . . . 6
Informatica Documentation. . . . 6
IDMC web site. . . . 6
Intelligent Data Management Cloud Communities. . . . 6
IDMC Marketplace. . . . 6
Informatica Knowledge Base. . . . 6
IDMC Trust Center. . . . 7
Informatica Global Customer Support. . . . 7

Chapter 1: Introducing Customer 360 Extension for Salesforce. . . . 8

Guidelines for importing assets. . . . 9
Guidelines for migrating assets. . . . 9
Prerequisites to deploy Customer 360 Extension for Salesforce. . . . 9

Chapter 2: Integrating Customer 360 with Salesforce. . . . 10

Ingress initial data. . . . 10
Egress initial data 10
Ingress and egress incremental data. . . . 11
Process records in batches. . . . 11
Process inbound data in real time. . . . 12
Process outbound data in real time. . . . 12
Search for similar records before creating a record in Salesforce. . . . 13

Chapter 3: Customer 360 Extension for Salesforce assets. . . . 15

Data model attributes. . . . 15
Organization business entity model. . . . 15
Person business entity model. . . . 29
Predefined batch jobs. . . . 47
Predefined batch jobs of the Organization business entity. . . . 48
Predefined batch jobs of the Person business entity. . . . 50
Predefined batch jobs of Salesforce relationships. . . . 52
Predefined batch jobs of Salesforce account hierarchy 53
Predefined assets for processing inbound data in real time. . . . 53
Predefined assets for processing outbound data in real time. . . . 56
Field mapping. . . . 57
Mapping of Organization business entity and Salesforce Accounts object fields 58
Mapping of Person business entity and Salesforce Contacts object fields 59
Mapping of Salesforce Account to Contact relationship and Customer 360 Contact relationship. . . . 63

Mapping of Salesforce Account to Partner relationship and Customer 360 Partner relationship. . . . 64
Mapping of Salesforce Account hierarchy to Customer 360 Organization hierarchy. . . . 64
Match Model. . . . 65

Chapter 4: Deploying Customer 360 Extension for Salesforce. . . . 67

Downloading and extracting Customer 360 Extension for Salesforce. . . . 67
Importing the Customer 360 Extension for Salesforce assets. . . . 68
Adding a Secure Agent. . . . 69
Adding lookup files. . . . 69
Importing parameter files. . . . 69

Chapter 5: Installing Customer 360 Extension for Salesforce 71

Configuring the flat file connection 71
Configuring Salesforce for MDM SaaS. . . . 71
Providing field-level access for Salesforce objects. . . . 72
Adding code values and crosswalks to the reference data assets. . . . 73
Processing data in batches. . . . 76
Using the parameter file. . . . 76
Configuring the Customer 360 connection. . . . 76
Configuring the Salesforce connection. . . . 76
Configuring Business 360 FEP Connector. . . . 76
Synchronizing source and target objects of mappings 77
Exporting value mappings of crosswalk (optional). . . . 77
Associating picklist fields with reference data code lists. . . . 78
Exporting records created in Customer 360 to Salesforce. . . . 78
Configuring change data capture 78
Running the jobs. . . . 80
Processing inbound data in real time. . . . 80
Importing the Application Integration assets for real-time inbound data synchronization. . . . 81
Configuring the Salesforce connection. . . . 81
Configuring the Customer 360 connection. . . . 81
Configuring Application Integration URN mappings for real-time inbound data synchronization. . . . 82
Updating the runtime environment 82
Publishing the Application Integration assets for real-time inbound data synchronization. . . . 82
Creating Salesforce flows. . . . 83
Testing the integration for real-time inbound data synchronization. . . . 86
Processing outbound data in real time. . . . 86
Installing the unmanaged Salesforce package for real-time outbound data synchronization. . . . 87
Configuring the custom metadata type. . . . 87
Configure the prerequisite connectors for real-time outbound data synchronization. . . . 88
Import the Application Integration assets for real-time outbound data synchronization. . . . 88

Creating a publishing event. 89
Configuring a streaming ingestion and replication task. 89
Configure Application Integration URN Mappings for real-time outbound data synchronization 89
Publishing the Application Integration assets for real-time outbound data synchronization. . . . 90
Testing the integration for real-time outbound data synchronization. 90
Searching for similar records in Customer 360 SaaS using a Lightning component in Salesforce. . . 90
Installing the unmanaged Salesforce package for searching for similar records in Salesforce. . 91
Setting up the unmanaged Salesforce package 92
Customizing the unmanaged Salesforce package. 96

Index. 101

Preface

Follow the instructions in *Customer 360 Extension for Salesforce* to deploy Customer 360 Extension for Salesforce.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introducing Customer 360 Extension for Salesforce

An MDM SaaS extension is a ready-to-use package that streamlines and accelerates the implementation of MDM SaaS. MDM SaaS extensions contain pre-configured assets and integrations that extend and enhance the MDM SaaS business applications. Use an extension to reduce implementation time, enhance data quality, and achieve faster business outcomes.

Use Customer 360 Extension for Salesforce to integrate Salesforce and Customer 360 SaaS and process the Salesforce records in Customer 360 SaaS. The supported Salesforce objects are accounts, person accounts, contacts, account to contact relationships, account to partner relationships, and account hierarchies.

After you install Customer 360 Extension for Salesforce, you can detect and merge duplicate records in Customer 360 SaaS and then export the merged records to Salesforce. You can also configure Salesforce to synchronize records with Customer 360 SaaS in batches or real time.

For example, if you have three different accounts for a customer with different addresses in Salesforce, you can merge them into a single record with all the addresses in Customer 360 SaaS. You can then export the three accounts to Salesforce with the consolidated values. The three records in Salesforce include the ID of the merged Customer 360 record.

Synchronization is bidirectional between Customer 360 SaaS and Salesforce. Inbound synchronization updates Customer 360 SaaS with changes from Salesforce. Outbound synchronization updates Salesforce with changes from Customer 360 SaaS. To synchronize records from Customer 360 SaaS to Salesforce in real time, install Informatica Customer 360 Extension for Salesforce Real-time Outbound, an unmanaged Salesforce package. The unmanaged package contains a platform event, a custom metadata type, an Apex trigger, and Apex classes.

You can use Informatica Customer 360 Extension for Salesforce, an unmanaged Salesforce package, to search and import similar records from Customer 360 SaaS. The unmanaged package includes a configurable Lightning component that seamlessly integrates with Customer 360 SaaS.

Note: Effective in the July 2026 release, Informatica dropped support for searching for similar records using Cloud Application Integration through the Customer 360 Extension for Salesforce package. Informatica recommends that you use the configurable Lightning component available in the extension package to search for similar records.

Guidelines for importing assets

Consider the following guidelines before you import the extension assets:

- Set up the prerequisite MDM SaaS business application.
- Import the extension assets before you customize the business entities. You can safely import multiple extension assets that use different business entities and in different MDM SaaS business applications. When you import the assets in an environment that already has an extension with the same business entities, the import fails.
- After you import the assets, consider them as your custom assets.
- Once you deploy an extension, upgrading to a newer version of the extension isn't supported.

Guidelines for migrating assets

Consider the following guidelines before you migrate the extension assets to another environment:

- To migrate the extension assets to higher environments, such as QA and production, export the assets from the development environment. Then, import them into the QA and production environments. For more information about migrating assets, see *Migrating projects and assets*.
- Don't import the extension assets again into a higher environment.

Prerequisites to deploy Customer 360 Extension for Salesforce

Before you deploy Customer 360 Extension for Salesforce, perform the following prerequisites:

- Ensure that you have the license for the Integration Components for Business 360, Customer 360 SaaS Edition, and the Salesforce connector. Ensure that your organization uses the Enterprise or Developer edition of Salesforce.
  Ensure that you have the licenses and user permissions required to manage connections and external data.

  Note: The use of the extension doesn't confer any additional license or entitlement to license consumption beyond the terms specified in the applicable licensing agreements.
- Ensure that the version of the extension package matches the current MDM SaaS version where you import the extension assets.

  To view the MDM SaaS version, in Business 360 Console, click **About** in the Help menu and verify the build version.

  To view the MDM version of the extension, navigate to the readme text file in the extracted extension package and verify the platform version.

  If the version of the extension package doesn't match the current MDM SaaS version, contact Informatica Global Customer Support to use the current version of the extension.

CHAPTER 2

Integrating Customer 360 with Salesforce

Use Customer 360 Extension for Salesforce to integrate Salesforce and Customer 360 SaaS and process the Salesforce records in Customer 360 SaaS. Customer 360 Extension for Salesforce uses the Organization business entity to store the Salesforce account records and the Person business entity to store the Salesforce contact and person account records.

You can synchronize the following Salesforce records with Customer 360 SaaS:

- The account, person account, and contact records that you create or update.
- The account to contact or account to partner relationship records that you create or update.
- The Salesforce account hierarchies that you create or update. You can synchronize the hierarchies only in batches.

Ingress initial data

When you ingress initial data to Customer 360 SaaS from Salesforce, the ingress job creates master records for all the Salesforce records in Customer 360 SaaS. The ingress job assigns a business ID to each master record in Customer 360 SaaS.

After you onboard the records to Customer 360 SaaS, you can process the master records. When you run a match and merge job, the job matches the records in Customer 360 SaaS and merges the duplicate records to update the master records. The unique records of Salesforce retain the business IDs of the master records, and the duplicate records of Salesforce use the business IDs of the updated master record.

Egress initial data

After you process the initial data in Customer 360 SaaS, create an egress job to export all the master records from Customer 360 SaaS to Salesforce. By default, you can export the records that have been created, updated, and merged in Customer 360 SaaS to Salesforce.

For more information, see Exporting records created in Customer 360 to Salesforce.
When you export the master records to Salesforce, the values of each duplicate record in Salesforce are updated with the master record value. Each master record in Salesforce gets a Customer360 Id that maps to the business ID of the master record.

The Customer360 Sync Date fields for the master records, which display the export dates, are updated accordingly in Salesforce.

Ingress and egress incremental data

After the first run, you can incrementally ingress the records that are added or updated in Salesforce into Customer 360 SaaS. When you ingress incremental records, the ingress job uses the Customer360 Id to determine whether to update or insert a record to Customer 360 SaaS.

When the Customer360 Id is present in Salesforce for a record, it indicates that the record exists in Customer 360 SaaS and the job updates the record in Customer 360 SaaS. When the Customer360 Id is not present in Salesforce, it indicates that the record is new, and the job inserts the record to Customer 360 SaaS.

After you onboard the incremental records, run a match and merge job to match the records and update the master records. After the master records are updated, you can export the incremental data to Salesforce. The values of each duplicate record in Salesforce are updated with the master record values.


The Customer360 Id and Customer360 Sync Date fields for the master records are updated accordingly in Salesforce.

By default, you can export only the records that have been updated and merged in Customer 360 SaaS. However, you can configure Customer 360 SaaS to export records created in Customer 360 SaaS to Salesforce. For more information, see Exporting records created in Customer 360 to Salesforce.

Process records in batches

When you process records in batches, you must first ingress the records from Salesforce to Customer 360 SaaS. After you ingress the records, you can process the records in Customer 360 SaaS, and then egress the records to Salesforce in batches.

The following image shows how you can process the records in batches:

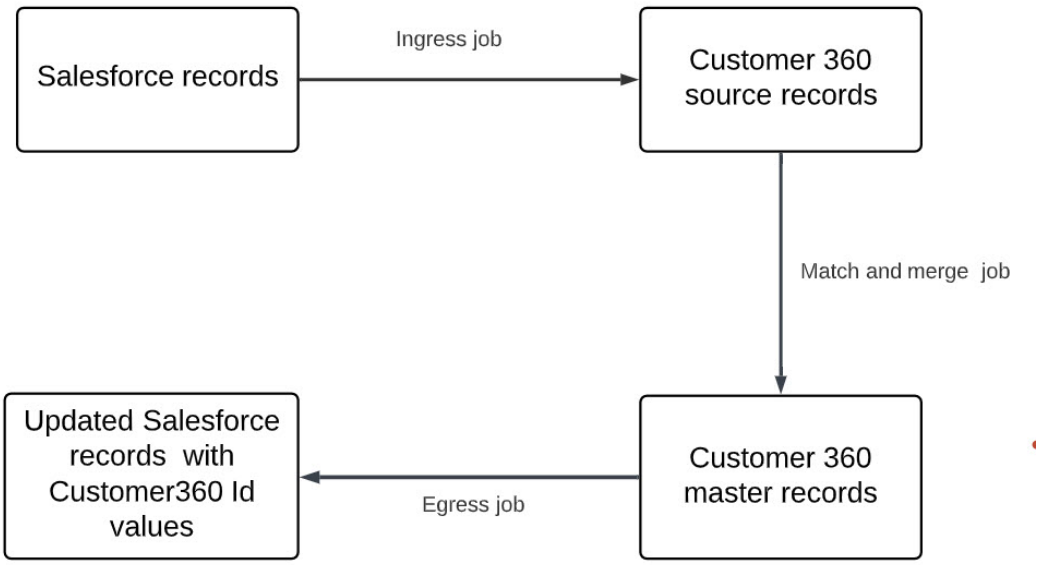


Process inbound data in real time

When you process inbound data from Salesforce to Customer 360 SaaS in real time, the records created or updated in Salesforce are upserted to Customer 360 SaaS instantaneously.

When you create or update a record in Salesforce, the Application Integration process triggers a workflow to upsert the record to Customer 360 SaaS.

The following image shows how you can synchronize the inbound records from Salesforce to Customer 360 SaaS in real time:



After you process the records in Customer 360 SaaS, you can export the updated records from Customer 360 SaaS to Salesforce in batches or in real-time.

Process outbound data in real time

When you process outbound data in real time, the Organization and Person records in Customer 360 SaaS are synchronized in Salesforce instantaneously.

Before you configure real-time outbound records synchronization, set up your Kafka streaming platform.

To process outbound records in real time, define a publishing event in Business 360 Console for the Customer 360 SaaS business entity records that you want to synchronize. When you create, update, merge, or unmerge a record, the publishing event triggers. Business 360 Event Connector captures the change, and a streaming ingestion and replication task writes it as a message to a Kafka topic.

Kafka is a message bus between Customer 360 SaaS and Salesforce. It holds each change as a message on a Kafka topic in the order the changes occur, and delivers the message to an Application Integration process. An Application Integration process reads each message from Kafka. Through Salesforce Streaming Event Connector, the process publishes the message to Salesforce as a platform event.

In Salesforce, the platform event reaches the event bus, where an Apex trigger processes it and updates the target Account or Contact record.

The following image shows how you can synchronize the outbound records in real time:



Source system filtering

Real-time outbound records synchronization uses the source system of a record to determine whether to export the record to Salesforce. You configure the source systems in the Application Integration process to export only the records you want. This configuration prevents a synchronization loop, where an exported change triggers another export back to the source system.

When a record is created in Customer 360 SaaS, the Application Integration process exports the record to Salesforce only if its source system is in the allowed list. The process skips records from any other source

system. For example, the process doesn't export a record created directly in Customer 360 SaaS unless you add the Informatica source system to the allowed list.

When a record is updated in Customer 360 SaaS, the Application Integration process exports the update to Salesforce unless the update originated in the Salesforce source system. The Application Integration process skips updates from any source system in the skip list. The record in Salesforce already has the update, and exporting it again causes a synchronization loop.

Application Integration uses universal resource names (URNs) to identify source systems. In the `SourceSystemIDOutbound` URN mapping, the URL value holds the allowed list, and in the `SourceSystemIDSkip` URN mapping, the URL value holds the skip list. By default, the URL value in both URN mappings is `infac360sf_src_Salesforce`.

To export records from your source systems, add those source systems to the URL value in the `SourceSystemIDOutbound` URN mapping.

For more information about predefined assets for processing outbound data in real time, see "Predefined assets for processing outbound data in real time" on page 56.

For more information about configuring the Application Integration URN Mappings for outbound data, see "Configure Application Integration URN Mappings for real-time outbound data synchronization" on page 89.


Search for similar records before creating a record in Salesforce

When you create records in Salesforce, you can search for similar records in Customer 360 SaaS and import them into Salesforce. To achieve this functionality, you can download and install the unmanaged Salesforce package named Informatica Customer 360 Extension for Salesforce. The unmanaged Salesforce package includes a configurable Lightning component that seamlessly integrates with Customer 360 SaaS.

Based on the search results, you can perform the following tasks:

- If a similar record exists, you can choose to import the existing record to Salesforce. When you import the record from Customer 360 SaaS to Salesforce, a record is created in Salesforce.
- If the record exists in Salesforce, you can view the record in Salesforce.
- If there are no similar records in Customer 360 SaaS, create a record in Salesforce.

The following image shows how you can search for similar records before creating a record in Salesforce:

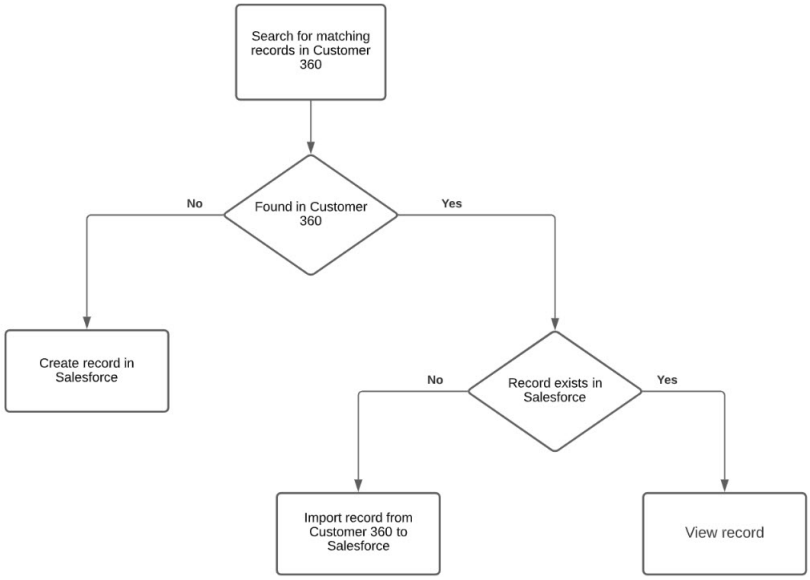

For more information about the unmanaged Salesforce package, see “Searching for similar records in Customer 360 SaaS using a Lightning component in Salesforce” on page 90.

CHAPTER 3

Customer 360 Extension for Salesforce assets

Customer 360 Extension for Salesforce is available as a package for installation on request.

The package includes the following predefined assets:

- Business entities
- Batch jobs
- Data Integration assets
- Application Integration assets
- Pages
- Relationships
- Hierarchies
- Reference data assets
- Source system
- Runtime Secure Agent group
- Connections

Note: Importing Customer 360 Extension for Salesforce assets overwrites the existing Customer 360 assets and your customization. Ensure to import the extension assets before you customize the Customer 360 data model.

Data model attributes

Customer 360 Extension for Salesforce includes additional fields and reference data for the Organization and Person business entities.

Organization business entity model

Organization business entity stores information about an organization. This business entity contains some basic fields and some field groups.

General fields of the Organization business entity

The general fields store basic information about an organization, such as name of the industry and website.

The following table lists the properties and describes the general fields of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Company Logo	imageUrl	Text	255	NA	URL of the image for an organization.
Company Type	companyType	Lookup	NA	CompanyType	Type of ownership for an organization. For example, private, public, or subsidiary.
Country of Incorporation	countryOfIncorporation	Lookup	NA	Country	Country of incorporation of an organization.
Date of Incorporation	dateOfIncorporation	Date Time	NA	NA	Date when an organization was incorporated.
Industry	X_infac360sf_industry	Lookup	NA	infac360sf_Industry	Name of the industry associated with an organization. For example, Agriculture, Advertising.
Name	name	Text	255	NA	Full name of an organization.
Number of Employees	numberOfEmployees	Integer	NA	NA	Total number of employees in an organization.
Site	X_infac360sf_site	Text	80	NA	Location of the organization. For example, New York.
State of Incorporation	stateOfIncorporation	Lookup	NA	State	State where an organization was registered.
Website	X_infac360sf_website	Text	255	NA	URL to access the website of an organization.
Year Started	X_infac360sf_yearStarted	Integer	4	NA	The year when an organization was legally established.

Account field group of the Organization business entity

The Account field group stores the account details of an organization, such as account number and account name.

The following table lists the properties and describes the Account field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Name	X_infac360sf_accountName	Text	255	NA	Name of an account of an organization.
Account Number	X_infac360sf_accountNumber	Text	40	NA	An account number assigned to the account of an organization.
Account Source	X_infac360sf_accountSource	Lookup	NA	infac360sf_AccountSource	Source of an organization account record. For example, advertisement or website.
Account Type	X_infac360sf_accountType	Lookup	NA	AccountType	Type of account. For example, channel partner, or technology partner.
Rating	X_infac360sf_rating	Lookup	NA	infac360sf_Rating	Prospect rating of an account. For example, hot, warm, or cold.

Address field group of the Organization business entity

The Address field group stores the postal addresses of an organization. A postal address is a physical address associated with an organization. An organization can have multiple addresses.

The following table lists the properties and describes the Address field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	200	NA	Line 1 of the address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address. For example, active or inactive.
Address Type	addressType	Lookup	NA	AddressType	Type of address. For example, organization, high-rise building, or home.
City	city	Text	50	NA	City of the postal address.
Coordinate System	coordinateSystem	Text	100	NA	A coordinate system that's used to determine the location of the address.
Country	country	Lookup	NA	Country	Country code of the postal address. For example, Australia or the United States.
County	county	Text	50	NA	County of the postal address.
Default Indicator	defaultIndicator	Boolean	NA	NA	Flag to indicate whether the address is the default address.
End Date	effectiveEndDate	Date Time	NA	NA	The date when an address ceases to be effective.
Enriched Indicator	enrichedIndicator	Lookup	NA	AddressEnrichedIndicator	Validation status of the address. For example, error, valid, or not validated.
Latitude	latitude	Text	20	NA	Latitude for the address.
Location Coordinate Description	locationCoordinateDesc	Text	50	NA	Location of the address using a coordinate system.
Longitude	longitude	Text	20	NA	Longitude of the address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Postal Code Extension	postalCodeExtension	Text	10	NA	The postal code extension of the address.
Start Date	effectiveStartDate	Date Time	NA	NA	The date when an address becomes effective.
State	state	Lookup	NA	State	State of the postal address. For example, if the country is the United States, the state can be California or Florida.
Usage Type	usageType	Lookup	NA	AddressUsageType	The type to specify the intended use of an address. For example, business or personal.
Verification Message	statusMessage	Text	255	NA	Message that the address validation service generates to indicate how valid and trusted the address is.
Verification Status Code	statusCode	Text	255	NA	Validation status of the postal address.

Alternate Name field group of the Organization business entity

The Alternate Names field group stores the details of alternate names. Alternate names can be alias, previous name, doing business as, and maiden name.

The following table lists the properties and describes the Alternate Name field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Alternate Name	name	Text	255	NA	An alternative name for an organization.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date when an alternative name ceases to be effective.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date from when the alternative name is valid.
Name Type	nameType	Lookup	NA	AlternateNameType	Type of an alternative name. For example, doing business as, alias, business name, and trading name.

Document field group of the Organization business entity

The Document field group stores the details of the documents of an organization.

The following table lists the properties and describes the Document field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Document Link	documentLink	Text	255	NA	URL to access the document.
Document Name	documentName	Text	255	NA	Name of the document.
Document Type	documentType	Lookup	NA	DocumentType	Type of the document. For example, application form, claim form, or policy.
File Name	fileName	Text	255	NA	Physical name of the file.
Valid From	validFrom	Date	NA	NA	Date from when the document becomes valid.
Valid To	validTo	Date	NA	NA	Date until when the document is valid.

Email field group of the Organization business entity

The Email field group stores information about the electronic addresses, such as email addresses or URL of the websites.

The following table lists the properties and describes the Email field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the electronic address is primary or default.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date when an electronic address ceases to be effective.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date when an electronic address becomes effective.
Electronic Address	electronicAddress	Text	255	NA	Electronic address of an organization.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the email address. For example, active, blocked, or not in use.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the address verification service verified the address.
Hygiene Status	hygieneStatus	Text	255	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or spam.
Net Protect Code	netProtectCode	Text	255	NA	Net protect codes identify the service or appliance that monitors a given network.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Usage Type	usageType	Lookup	NA	ElectronicAddressUsage Type	The intended use or purpose of the electronic address. For example, business, work, or personal.
Verification Message	validateMessage	Text	255	NA	A message that the electronic address validation service generates to indicate how valid and trusted the address is.
Verification Status Code	validationStatusCode	Text	255	NA	Validation status of the electronic address.

Financial field group of the Organization business entity

The Financial field group stores financial information of an organization.

The following table lists the properties and describes the Financial field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Amount	amount	Double	NA	NA	Amount of finance.
Currency	currency	Lookup	NA	Currency	Currency in which the financial information is collected.
Finance Info Type	financeInfoType	Lookup	NA	FinanceInfoType	Type of financial information. For example, equity, annual income, and debt.
Financial Reliability	financialReliability	Lookup	NA	FinanceReliability	Reliability of the financial data. For example, actual or estimate.
Time Period	timePeriod	Text	255	NA	Financial period for which the data is collected.
Time Period Type	timePeriodType	Lookup	NA	TimePeriodType	Type of the financial period. For example, quarterly or yearly.
Unit	financialUnit	Lookup	NA	FinancialUnit	The unit of the financial amount. For example, thousands, millions, or billions.

Identifier field group of the Organization business entity

The Identifier field group stores the identifier details of an organization, such as identifier type and identifier value.

The following table lists the properties and describes the Identifier field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	DateTime	NA	NA	The date when an identifier ceases to be effective.
Effective Start Date	effectiveStartDate	DateTime	NA	NA	The date when the ID was issued.
Identifier Type	idType	Lookup	NA	AlternateIdType	Type of identifier.
Identifier Value	altIdValue	Text	50	NA	Value of the identifier, such as D-U-N-S number or National Provider Identifier.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority issuing the identifier.
Status	IdentifierStatus	Lookup	NA	IdentifierStatus	The status of the identifier. For example, effective, disqualified, expired, and temporary.

Indicator field group of the Organization business entity

The Indicator field group stores the indicator types based on which you want to identify an organization.

The following table lists the properties and describes the Indicator field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Indicator Type	indicatorType	Lookup	NA	IndicatorType	Classification of the type of indicator, such as promoter, detractor, minority-owned, women-owned, locally based, and small business.
Indicator Value	value	Text	255	NA	Actual value of the indicator.

Insurance field group of the Organization business entity

The Insurance field group stores the insurance details of an organization, such as the name of the insurance provider and policy number.

The following table lists the properties and describes the Insurance field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Currency	currency	Lookup	NA	Currency	Currency for the premium payment and claim settlement.
Effective End Date	effectiveEndDate	Date	NA	NA	The date when the insurance coverage ceases to be effective.
Effective Start Date	effectiveStartDate	Date	NA	NA	The date when the insurance coverage becomes effective.
Insurance Holder	insuranceHolder	Text	255	NA	Name of the insurance holder.
Insurance Provider	insuranceProvider	Text	255	NA	The company that provides the insurance.
Insurance Sub Type	insuranceSubType	Lookup	NA	InsuranceSubType	Insurance subtype. For example, if the insurance type is lenders mortgage, the subtype might be extended lenders mortgage.
Insurance Type	insuranceType	Lookup	NA	InsuranceType	The type of insurance, such as commercial auto, lenders mortgage, or shipping.
Policy Number	insurancePolicyNumber	Text	100	NA	Insurance policy number.
Status	insuranceStatus	Text	255	insuranceStatus	Status of the insurance. For example, active or expired.
Unit	unit	Lookup	NA	FinancialUnit	Specifies the unit for the amount. For example, thousands, millions, or billions.
Value	insuranceValue	Double	NA	NA	Amount insured.

Key People field group of the Organization business entity

The Key People field group stores information about the key executives in an organization. The key executives are important people in an organization. For example, the key executives include the chief executive officer and chief financial officer of the organization.

The following table lists the properties and describes the Key People field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Executive Type	executiveType	Lookup	NA	ExecutiveType	Type of executive, such as executive chairman, non-executive chairman, or chief executive officer.
Name	name	Text	255	NA	Name of the executive.
Designation	designation	Text	255	NA	Designation of the executive.

Phone field group of the Organization business entity

The Phone field group stores the phone details of an organization.

The following table lists the properties and describes the Phone field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Cell Prefix	cellPrefix	Text	255	NA	Prefix that must prepend the National Significant Number for inbound international calls.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the phone number is the default number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Indicates whether an organization wants to receive unsolicited phone calls from marketers.
Effective End Date	effectiveEndDate	DateTime	NA	NA	The date until when the phone number is effective.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date from when the phone number is effective.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the phone number validation service verified the phone number.
International Format	internationalFormat	Text	50	NA	International format for the phone number.
International Prefix	internationalPrefix	Text	255	NA	Prefix used to select an international telephone circuit.
ISO	iso	Text	2	NA	ISO country code.
National Destination Code	nationalDestinationCode	Text	255	NA	Code that identifies a numbering area within a country or a group of countries.
National Destination Code Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether the phone number includes the National Destination Code.
National Format	nationalFormat	Text	50	NA	National format for the phone number.
National Prefix	nationalPrefix	Text	255	NA	The digit or combination of digits that must be dialed before an area or city code.
Phone Number	phoneNumber	Text	255	NA	Phone number of a person.
Phone Number Extension	phoneNumberExtension	Text	255	NA	Extension to phone number.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, landline, mobile, home, or business.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, personal, business, and customer service.
Prefix Number	prefixNumber	Text	255	NA	Country dialing code.
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as the phone number is publicly available or active.
Validation Message	validationMessage	Text	255	NA	Validation message that the phone number validation service returns.
Validation Status	validationStatusCode	Text	255	NA	Validation status that the phone number validation service returns.

Segment field group of the Organization business entity

The Segment field group stores the segment of an organization. Segmentation can help marketers design targeted campaigns.

The following table lists the properties and describes the Segment field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Segment Name	segmentValue	Lookup	NA	SegmentValue	Name of the category or segment. A segment type can have segment values.
Segment Type	segmentType	Lookup	NA	SegmentType	Type of segment of an organization. For example, income, age, or geography.

Social Media field group of the Organization business entity

The Social Media field group stores information about the social media identifiers of an organization.

The following table lists the properties and describes the Social Media field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Type	socialHandleType	Lookup	NA	SocialHandleType	Type of social media platform, such as Facebook or Twitter.
Social Media Handle	socialMediaHandle	Text	255	NA	Social media identifier or name of an organization.

Status field group of the Organization business entity

The Status field group stores the statuses of an organization.

The following table lists the properties and describes the Status field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status Type	statusType	Lookup	NA	OrgStatusType	Status type of an organization.
Status Value	statusValue	Lookup	NA	OrgStatusValue	Status value of an organization.

Stock field group of the Organization business entity

The Stock field group stores information about the stock exchanges where an organization trades.

The following table lists the properties and describes the Stock field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country in which the stock exchange is located.
Stock Exchange	stockExchangeName	Text	255	NA	Name of the stock exchange that trades the shares.
Ticker Symbol	tickerSymbol	Text	255	NA	Abbreviation used to identify the publicly traded shares of an organization.

Tax Details field group of the Organization business entity

The Tax Details field group stores tax-related information of an organization, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the properties and describes the Tax Details field group of the Organization business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country of taxation.
Currency	currency	Lookup	NA	Currency	Currency in which the tax is paid.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date on which the tax period ends.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date on which the tax period starts.
State	state	Lookup	NA	State	The state within the country of taxation.
Tax Authority	taxAuthority	Lookup	NA	TaxAuthority	Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department.
Tax Number	taxNumber	Text Field	255	NA	A unique number that identifies a healthcare organization for tax purposes.
Tax Number Type	taxNumberType	Lookup	NA	TaxNumberType	Type of tax number. The types can be an Individual Taxpayer Identification Number (ITIN), (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN).
Tax Paid	taxPaid	Text Field	255	NA	Tax amount that an organization has paid.
Taxpayer Type	taxPayerType	Lookup	NA	TaxPayerType	Type of taxpayer. For example, individual, company, partnership, or trust.

Person business entity model

Person business entity stores information about a person. This business entity contains some basic fields and some field groups.

General fields of the Person business entity

The general fields store basic information about a person, such as name and department.

The following table lists the additional general fields that the Person business entity contains:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Assistant Name	X_infac360sf_assistantName	Text	255	NA	Name of the assistant of a person.
Birth Date	birthDate	Date Time	NA	NA	Date of birth of a person.
Birth Place	birthPlace	Text	255	NA	Place of birth of a person.
Department	X_infac360sf_department	Text	255	NA	Name of the department to which a person belongs. For example, finance, logistics, or sales.
Designation	designation	Text	255	NA	Designation or position of a person.
Email Opt Out Indicator	X_infac360sf_emailOptOutIndicator	Boolean	NA	NA	Indicates whether a person has opted out from receiving emails.
First Name	firstName	Text	255	NA	First name of a person.
Full Name	fullName	Text	255	NA	Full name of a person.
Gender	gender	Lookup	NA	Gender	Gender of a person.
Image	image	Text	255	NA	URL of the image of a person.
Industry	X_infac360sf_industry	Lookup	NA	infac360sf_Industry	Name of the industry associated with the organization. For example, Agriculture or Advertising.
Is Contact	X_infac360sf_isContact	Boolean	NA	NA	Indicates whether the person is a contact in Salesforce.
Is Customer	X_infac360sf_isCustomer	Boolean	NA	NA	Indicates whether the person is a customer in Salesforce.
Last Name	lastName	Text	255	NA	Last name of a person.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Marital Status	maritalStatus	Lookup	NA	MaritalStatus	Marital status of a person. For example, single, married, or divorced.
Middle Name	middleName	Text	255	NA	Middle name of a person.
Prefix Name	prefixName	Lookup	NA	PrefixName	Prefix for the name of a person. For example, Dr, Mr, or Mrs.
Suffix Name	suffixName	Lookup	NA	SuffixName	Suffix for the name of a person. For example, Sr, Jr, II, or III.
Title	title	Text	255	NA	Title of a person.
Year Started	X_infac360sf_yearStarted	Integer	4	NA	The year when the organization was legally established.

Account field group of the Person business entity

The Account field group stores the account details of a Person Account, such as account number and account name.

The following table lists the properties and describes the Account field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Number	X_infac360sf_accountNumber	Text	40	NA	Name of an account of a person.
Account Name	X_infac360sf_accountName	Text	255	NA	An account number assigned to the account of a person.
Account Source	X_infac360sf_accountSource	Lookup	NA	infac360sf_AccountSource	Source of a person account record. For example, advertisement or website.
Account Type	X_infac360sf_accountType	Lookup	NA	AccountType	Type of account. For example, channel partner, or technology partner.

Address field group of the Person business entity

The Address field group stores the postal addresses of a person. A postal address is a physical address associated with a person. A person can have multiple addresses.

The following table lists the properties and describes the Address field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	200	NA	Line 1 of the address.
Address Line 2	addressLine2	Text	200	NA	Line 2 of the address.
Address Line 3	addressLine3	Text	200	NA	Line 3 of the address.
Address Status	addressStatus	Lookup	NA	AddressStatus	Status of the address. For example, active or inactive.
Address Type	addressType	Lookup	NA	AddressType	Type of address. For example, organization, high-rise building, or home.
City	city	Text	50	NA	City of the postal address.
Coordinate System	coordinateSystem	Text	100	NA	A coordinate system that's used to determine the location of the address.
Country	country	Lookup	NA	Country	Country code of the postal address. For example, Australia or the United States.
County	county	Text	50	NA	County of the postal address.
Default Indicator	defaultIndicator	Boolean	NA	NA	Flag to indicate whether the address is the default address.
End Date	effectiveEndDate	Date Time	NA	NA	The date when an address ceases to be effective.
Enriched Indicator	enrichedIndicator	Lookup	NA	AddressEnrichedIndicator	Validation status of the address. For example, error, valid, or not validated.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Latitude	latitude	Text	20	NA	Latitude for the address.
Location Coordinate Desc	locationCoordinateDesc	Text	50	NA	Location of the address using a coordinate system.
Longitude	longitude	Text	20	NA	Longitude of the address.
Postal Code	postalCode	Text	10	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	10	NA	The postal code extension of the address.
Start Date	effectiveStartDate	Date Time	NA	NA	The date when an address becomes effective.
State	state	Lookup	NA	State	State of the postal address. For example, if the country is the United States, the state can be California or Florida.
Usage Type	usageType	Lookup	NA	AddressUsageType	The type to specify the intended use of an address. For example, business or personal.
Verification Message	statusMessage	Text	255	NA	Message that the address validation service generates to indicate how valid and trusted the address is.
Verification Status Code	statusCode	Text	255	NA	Validation status of the postal address.

Alternate Name field group of the Person business entity

The Alternate Names field group stores the details of alternate names. Alternate names can be alias, previous name, doing business as, and maiden name.

The following table lists the properties and describes the Alternate Name field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Alternate Name	alternateName	Text	255	NA	An alternative name for a person.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date when an alternative name ceases to be effective.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date from when the alternative name is valid.
Alternate Name Type	alternateNameType	Lookup	NA	AlternateNameType	Type of an alternative name. For example, doing business as, alias, business name, and trading name.

Assistant Phone field group of the Person business entity

The Assistant Phone field group stores the phone details of a customer's assistant, such as phone number.

The following table lists the properties and describes the Assistant Phone field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Phone Number	phoneNumber	Text	20	NA	Phone number of the customer's assistant.

Citizenship field group of the Person business entity

The Citizenship field group stores the details of citizenship of a person, such as country and status of citizenship.

The following table lists the properties and describes the Citizenship field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Citizen of Country	citizenOfCountry	Lookup	NA	Country	Country to which a person belongs.
Citizenship Status	citizenshipStatus	Text	255	NA	Status of the citizenship.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	Date Time	NA	NA	Expiry date of citizenship.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date from when the citizenship is valid.
Supporting Document Name	supportingDocumentName	Text	255	NA	Name of the supporting document that proves the citizenship.

Demographics field group of the Person business entity

The Demographics field group stores the demographic details of a person.

The following table lists the properties and describes the Demographics field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Demographic Type	demographicType	Lookup	NA	DemographicType	Type of demographic factors. For example, ethnicity, income level, age, and profession.
Demographic Value	demographicValue	Lookup	NA	DemographicValue	Demographic values for a demographic type. For example, if ethnicity is a demographic type, then Hispanic and Asian are demographic values.

Documents field group of the Person business entity

The Document field group stores the details of the documents of a person.

The following table lists the properties and describes the Document field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Document Link	documentLink	Text	255	NA	URL to access the document.
Document Name	documentName	Text	255	NA	Name of the document.
Document Type	documentType	Lookup	NA	DocumentType	Type of the document. For example, application form, claim form, or policy.
File Name	fileName	Text	255	NA	Physical name of the file.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Valid From	validFrom	Date	NA	NA	Date from when the document becomes valid.
Valid To	validTo	Date	NA	NA	Date until when the document is valid.

Education field group of the Person business entity

The Education field group stores the education details of a person. The education details can include the name of the institution where a person graduated and address of the institution.

The following table lists the properties and describes the Education field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Address Line 1	addressLine1	Text	255	NA	Line 1 of the address of the educational institution.
Address Line 2	addressLine2	Text	255	NA	Line 2 of the address of the educational institution.
City	city	Text	255	NA	City in which the institution is located.
Country	country	Lookup	NA	Country	Country in which the institution is located.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of the qualification.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of the qualification.
Institution Name	institutionName	Text	255	NA	Name of the institution.
Postal Code	postalCode	Text	255	NA	Postal code of the address.
Postal Code Extension	postalCodeExtension	Text	255	NA	Postal code extension of the address.
Qualification Name	qualificationName	Text	255	NA	Name of the qualification.
Qualification Status	qualificationStatus	Lookup	NA	QualificationStatus	Status of the qualification.
Qualification Type	qualificationType	Lookup	NA	QualificationType	Type of qualification, such as illiterate, certification, diploma, bachelor, master, or doctoral.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
State	state	Lookup	NA	State	State in which the institution is located.
Student Number	studentNumber	Text	255	NA	Student number in the institution.

Email field group of the Person business entity

The Email field group stores information about the electronic addresses of a person, such as email addresses or URL of the websites.

The following table lists the properties and describes the Email field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the electronic address is primary or default.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date when an electronic address ceases to be effective.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date when an electronic address becomes effective.
Electronic Address	electronicAddress	Text	255	NA	Electronic address of a person.
Electronic Address Status	electronicAddressStatus	Lookup	NA	ElectronicAddressStatus	Status of the email address. For example, active, blocked, or not in use.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the address verification service verified the address.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Hygiene Status	hygieneStatus	Text	255	NA	Hygiene status for the electronic address. For example, safe to send, invalid, or spam.
Net Protect Code	netProtectCode	Text	255	NA	Net protect codes identify the service or appliance that monitors a given network.
Usage Type	usageType	Lookup	NA	ElectronicAddressUsage Type	The intended use or purpose of the electronic address. For example, business, work, or personal.
Verification Message	validateMessage	Text	255	NA	A message that the electronic address validation service generates to indicate how valid and trusted the address is.
Verification Status Code	validationStatusCode	Text	255	NA	Validation status of the electronic address.

Employment field group of the Person business entity

The Employment field group stores the employment details of a person, such as the employer name, the type of employment, and the status of employment.

The following table lists the properties and describes the Employment field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Designation	designation	Text	255	NA	Designation of a person.
Effective End Date	effectiveEndDate	Date Time	NA	NA	End date of employment.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	Start date of employment.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Employer Name	employerName	Text	255	NA	Name of the employer.
Employment Status	employmentStatus	Lookup	NA	EmploymentStatus	Status of employment, such as active, inactive, resigned, and terminated.
Employment Type	employmentType	Lookup	NA	EmploymentType	Type of employment, such as permanent, contract, and part-time.
Line of Business	lineOfBusiness	Text	255	NA	Line of business, such as retail or mortgage.
Location	location	Text	255	NA	Location of the employer.

Financial field group of the Person business entity

The Financial field group stores financial information of a person.

The following table lists the properties and describes the Financial field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Amount	amount	Double	NA	NA	Amount of finance.
Currency	currency	Lookup	NA	Currency	Currency in which the financial information is collected.
Finance Info Type	financeInfoType	Lookup	NA	FinanceInfoType	Type of financial information. For example, equity, annual income, and debt.
Financial Reliability	financialReliability	Lookup	NA	FinanceReliability	Reliability of the financial data. For example, actual or estimate.
Time Period	timePeriod	Text	255	NA	Financial period for which the data is collected.
Time Period Type	timePeriodType	Lookup	NA	TimePeriodType	Type of the financial period. For example, quarterly or yearly.
Unit	financialUnit	Lookup	NA	FinancialUnit	The unit of the financial amount. For example, thousands, millions, or billions.

Identifier field group of the Person business entity

The Identifier field group stores the identifier details of a person, such as identifier type and identifier value.

The following table lists the properties and describes the Identifier field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Effective End Date	effectiveEndDate	DateTime	NA	NA	The date when an identifier ceases to be effective.
Effective Start Date	effectiveStartDate	DateTime	NA	NA	The date when the ID was issued.
Alternate Identifier Type	alternateIdentifierType	Lookup	NA	AlternateIdType	Type of identifier.
Alternate Identifier Value	alternateIdentifierValue	Text	50	NA	Value of the identifier, such as D-U-N-S number or National Provider Identifier.
Issuing Authority	issuingAuthority	Lookup	NA	IssuingAuthority	Authority issuing the identifier.
Status	IdentifierStatus	Lookup	NA	IdentifierStatus	The status of the identifier. For example, effective, disqualified, expired, and temporary.

Indicator field group of the Person business entity

The Indicator field group stores the indicator types based on which you want to identify a person.

The following table lists the properties and describes the Indicator field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Indicator Type	indicatorType	Lookup	NA	infac360sf_PersonIndicatorType	Classification of the type of indicator, such as contact or customer.
Indicator Value	value	Text	255	NA	Actual value of the indicator.

Insurance field group of the Person business entity

The Insurance field group stores the insurance details of a person, such as the name of the insurance provider and policy number.

The following table lists the properties and describes the Insurance field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Currency	currency	Lookup	NA	Currency	Currency for the premium payment and claim settlement.
Effective End Date	effectiveEndDate	Date	NA	NA	The date when the insurance coverage ceases to be effective.
Effective Start Date	effectiveStartDate	Date	NA	NA	The date when the insurance coverage becomes effective.
Insurance Holder	insuranceHolder	Text	255	NA	Name of the insurance holder.
Insurance Provider	insuranceProvider	Text	255	NA	The company that provides the insurance.
Insurance Sub Type	insuranceSubType	Lookup	NA	InsuranceSubType	Insurance subtype. For example, if the insurance type is lenders mortgage, the subtype might be extended lenders mortgage.
Insurance Type	insuranceType	Lookup	NA	InsuranceType	The type of insurance, such as commercial auto, lenders mortgage, or shipping.
Policy Number	insurancePolicyNumber	Text	100	NA	Insurance policy number.
Status	insuranceStatus	Text	255	insuranceStatus	Status of the insurance. For example, active or expired.
Unit	unit	Lookup	NA	FinancialUnit	Specifies the unit for the amount. For example, thousands, millions, or billions.
Value	insuranceValue	Double	NA	NA	Amount insured.

Lifestyle field group of the Person business entity

The Lifestyle field group stores the details of the lifestyle of a person.

The following table lists the properties and describes the Lifestyle field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Lifestyle Type	lifestyleType	Lookup	NA	LifestyleType	Type of lifestyle. For example, alcohol consumption or tobacco consumption.
Lifestyle Value	lifestyleValue	Text	255	NA	Frequency of a lifestyle. For example, frequent, moderate, or never.

Loyalty field group of the Person business entity

The Loyalty field group stores loyalty account details of a person .

The following table lists the properties and describes the Loyalty field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Account Number	accountNumber	Text	255	NA	Loyalty account number.
Account Status	accountStatus	Lookup	NA	LoyaltyAccountStatus	Status of the account. For example, active or inactive.
Account Type	accountType	Lookup	NA	LoyaltyAccountType	Type of loyalty accounts. For example, elite, silver, gold, or platinum.
Effective End Date	effectiveEndDate	Date	NA	NA	End date of the loyalty account.
Effective Start Date	effectiveStartDate	Date	NA	NA	Start date of the loyalty account.
Redemption Preferences	redemptionPreferences	Lookup	NA	RedemptionPreferences	Preference for the redemption of loyalty points. For example, cash back or credit.

Phone field group of the Person business entity

The Phone field group stores the phone details of a person.

The following table lists the properties and describes the Phone field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Cell Prefix	cellPrefix	Text	255	NA	Prefix that must prepend the National Significant Number for inbound international calls.
Default Indicator	defaultIndicator	Boolean	NA	NA	Indicates whether the phone number is the default number.
Do Not Call Indicator	doNotCallIndicator	Boolean	NA	NA	Indicates whether a person wants to receive unsolicited phone calls from marketers.
Effective End Date	effectiveEndDate	DateTime	NA	NA	The date until when the phone number is effective.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date from when the phone number is effective.
Enriched Indicator	enrichedIndicator	Boolean	NA	NA	Indicates whether the phone number validation service verified the phone number.
International Format	internationalFormat	Text	50	NA	International format for the phone number.
International Prefix	internationalPrefix	Text	255	NA	Prefix used to select an international telephone circuit.
ISO	iso	Text	2	NA	ISO country code.
National Destination Code	nationalDestinationCode	Text	255	NA	Code that identifies a numbering area within a country or a group of countries.

Display Name	Internal ID	Field Type	Length	Reference Data	Description
National Destination Code Indicator	nationalDestinationCodeIndicator	Boolean	NA	NA	Indicates whether the phone number includes the National Destination Code.
National Format	nationalFormat	Text	50	NA	National format for the phone number.
National Prefix	nationalPrefix	Text	255	NA	The digit or combination of digits that must be dialed before an area or city code.
Phone Number	phoneNumber	Text	255	NA	Phone number of a person.
Phone Number Extension	phoneNumberExtension	Text	255	NA	Extension to phone number.
Phone Type	phoneType	Lookup	NA	PhoneType	Type of phone. For example, landline, mobile, home, or business.
Phone Usage Type	phoneUsageType	Lookup	NA	PhoneUsageType	Usage type of the phone. For example, personal, business, and customer service.
Prefix Number	prefixNumber	Text	255	NA	Country dialing code.
Status	status	Lookup	NA	PhoneStatus	Status of the phone number, such as the phone number is publicly available or active.
Validation Message	validationMessage	Text	255	NA	Validation message that the phone number validation service returns.
Validation Status	validationStatusCode	Text	255	NA	Validation status that the phone number validation service returns.

Segment field group of the Person business entity

The Segment field group stores the segment of a person. Segmentation can help marketers design targeted campaigns.

The following table lists the properties and describes the Segment field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Segment Value	segmentValue	Lookup	NA	SegmentValue	Name of the category or segment. A segment type can have segment values.
Segment Type	segmentType	Lookup	NA	SegmentType	Type of segment of a person. For example, income, age, or geography.

Social Media field group of the Person business entity

The Social Media field group stores information about the social media identifiers of a person.

The following table lists the properties and describes the Social Media field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Social Media Type	socialHandleType	Lookup	NA	SocialHandleType	Type of social media platform, such as Facebook or Twitter.
Social Media Handle	socialMediaHandle	Text	255	NA	Social media identifier or name of a person.

Specialization field group of the Person business entity

The Specialization field group stores information about the specialties or specializations of a person.

The following table lists the properties and describes the Specialization field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Board Certification Flag	boardCertificationFlag	Boolean	NA	NA	Indicates whether the board certification is active or not.
Specialty	specialty	Text	255	NA	Name of specialty.
Specialty Type	specialtyType	Lookup	NA	SpecialityType	The type to specify the specialty of a person. For example, construction, educational services, and finance and insurance.

Status field group of the Person business entity

The Status field group stores the statuses of a person.

The following table lists the properties and describes the Status field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Status Type	statusType	Lookup	NA	OrgStatusType	Status type of a person.
Status Value	statusValue	Lookup	NA	OrgStatusValue	Status value of a person.

Tax Details field group of the Person business entity

The Tax Details field group stores tax-related information of a person, such as the taxpayer type, tax authority, taxpayer identification number, and amount of tax paid.

The following table lists the properties and describes the Tax Details field group of the Person business entity:

Display Name	Internal ID	Field Type	Length	Reference Data	Description
Country	country	Lookup	NA	Country	Country of taxation.
Currency	currency	Lookup	NA	Currency	Currency in which the tax is paid.
Effective End Date	effectiveEndDate	Date Time	NA	NA	The date on which the tax period ends.
Effective Start Date	effectiveStartDate	Date Time	NA	NA	The date on which the tax period starts.
State	state	Lookup	NA	State	The state within the country of taxation.
Tax Authority	taxAuthority	Lookup	NA	TaxAuthority	Tax authority. For example, Internal Revenue Service (IRS), HM Revenue and Customs (HMRC), and Inland Revenue Department.
Tax Number	taxNumber	Text Field	255	NA	A unique number that identifies a person for tax purposes.
Tax Number Type	taxNumberType	Lookup	NA	TaxNumberType	Type of tax number. The types can be an Individual Taxpayer Identification Number (ITIN), (EIN), Inland Revenue Department (IRD) number, and Permanent Account Number (PAN).
Tax Paid	taxPaid	Text Field	255	NA	Tax amount that a person has paid.
Taxpayer Type	taxPayerType	Lookup	NA	TaxPayerType	Type of taxpayer. For example, individual, company, partnership, or trust.

Predefined batch jobs

Use the predefined batch jobs to ingress the Salesforce account records, contact records, person account records, relationships, and hierarchies to Customer 360. After you process the imported records in Customer 360, you can use the predefined batch jobs to export the processed records to Salesforce.

After you process the records in Customer 360, you can update the records in Salesforce. To update the Salesforce records, you can export a complete record or export only limited fields of a record. The fields for limited export includes Customer 360 ID and system time stamp.

When you export the processed records from Customer 360 to Salesforce, you can create records in Salesforce.

Each job uses a taskflow to run a mapping task. Each mapping task includes a mapping that maps the Salesforce fields with the Customer 360 business entity fields. You can use the person account job assets in the person account-enabled Salesforce environment. In the Salesforce environment where the person account is not enabled, you can skip the import of the person account job assets.

Note: When you export data from Customer 360 to Salesforce, the export job extracts all the data in the first run and only incremental data on subsequent runs.

Predefined batch jobs of the Organization business entity

The following table lists the predefined jobs and their related taskflow, mapping task, and mapping of Organization business entity:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_account_organization_inbound_delta	infac360sf_tf_salesforce_account_organization_inbound_delta	- infac360sf_mt_salesforce_account_organization_inbound_root - infac360sf_mt_salesforce_account_organization_inbound_stock - infac360sf_mt_salesforce_account_organization_inbound_finance - infac360sf_mt_salesforce_account_organization_inbound_address - infac360sf_mt_salesforce_account_organization_inbound_account - infac360sf_mt_salesforce_account_organization_inbound_phone	- infac360sf_m_salesforce_account_organization_inbound_root - infac360sf_m_salesforce_account_organization_inbound_stock - infac360sf_m_salesforce_account_organization_inbound_finance - infac360sf_m_salesforce_account_organization_inbound_address - infac360sf_m_salesforce_account_organization_inbound_account - infac360sf_m_salesforce_account_organization_inbound_phone	Imports incremental data from the Salesforce Accounts object to the Organization business entity.
infac360sf_ingress_salesforce_account_organization_inbound_initial	infac360sf_tf_salesforce_account_organization_inbound_initial	- infac360sf_mt_salesforce_account_organization_inbound_root - infac360sf_mt_salesforce_account_organization_inbound_stock - infac360sf_mt_salesforce_account_organization_inbound_finance - infac360sf_mt_salesforce_account_organization_inbound_address - infac360sf_mt_salesforce_account_organization_inbound_account - infac360sf_mt_salesforce_account_organization_inbound_phone	- infac360sf_m_salesforce_account_organization_inbound_root - infac360sf_m_salesforce_account_organization_inbound_stock - infac360sf_m_salesforce_account_organization_inbound_finance - infac360sf_m_salesforce_account_organization_inbound_address - infac360sf_m_salesforce_account_organization_inbound_account - infac360sf_m_salesforce_account_organization_inbound_phone	Imports complete data from the Salesforce Accounts object to the Organization business entity.

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_export_salesforce_organization_account_outbound	infac360sf_tf_salesforce_organization_account_outbound	infac360sf_mt_salesforce_organization_account_outbound	infac360sf_m_salesforce_organization_account_outbound	Exports data from the Organization business entity to the Salesforce Accounts object.
infac360sf_export_salesforce_organization_account_limited_outbound	infac360sf_tf_salesforce_organization_account_limited_outbound	infac360sf_mt_salesforce_organization_account_limited_outbound	infac360sf_m_salesforce_organization_account_limited_outbound	Exports limited data from the Organization business entity to the Salesforce Accounts object for synchronization.

Predefined batch jobs of the Person business entity

The following table lists the predefined jobs and their related taskflow, mapping task, and mapping of Person business entity:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_contact_person_inbound_initial	infac360sf_tf_salesforce_contact_person_inbound_initial	- infac360sf_mt_salesforce_contact_person_inbound_root - infac360sf_mt_salesforce_contact_person_inbound_phone - infac360sf_mt_salesforce_contact_person_inbound_email - infac360sf_mt_salesforce_contact_person_inbound_address - infac360sf_mt_salesforce_contact_person_inbound_assistantPhone	- infac360sf_m_salesforce_contact_person_inbound_root - infac360sf_m_salesforce_contact_person_inbound_phone - infac360sf_m_salesforce_contact_person_inbound_email - infac360sf_m_salesforce_contact_person_inbound_address - infac360sf_m_salesforce_contact_person_inbound_assistantPhone	Imports complete data from the Salesforce Contacts object to the Person business entity.
infac360sf_ingress_salesforce_contact_person_inbound_delta	infac360sf_tf_salesforce_contact_person_inbound_delta	- infac360sf_mt_salesforce_contact_person_inbound_root - infac360sf_mt_salesforce_contact_person_inbound_phone - infac360sf_mt_salesforce_contact_person_inbound_email - infac360sf_mt_salesforce_contact_person_inbound_address - infac360sf_mt_salesforce_contact_person_inbound_assistantPhone	- infac360sf_m_salesforce_contact_person_inbound_root - infac360sf_m_salesforce_contact_person_inbound_phone - infac360sf_m_salesforce_contact_person_inbound_email - infac360sf_m_salesforce_contact_person_inbound_address - infac360sf_m_salesforce_contact_person_inbound_assistantPhone	Imports incremental data from the Salesforce Contacts object to the Person business entity.

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_personaccount_person_inbound_initial	infac360sf_tf_salesforce_personaccount_person_inbound_initial	- infac360sf_mt_salesforce_personaccount_person_inbound_root - infac360sf_mt_salesforce_personaccount_person_inbound_phone - infac360sf_mt_salesforce_personaccount_person_inbound_account - infac360sf_mt_salesforce_personaccount_person_inbound_finance - infac360sf_mt_salesforce_personaccount_person_inbound_assistantPhone - infac360sf_mt_salesforce_personaccount_person_inbound_email - infac360sf_mt_salesforce_personaccount_person_inbound_address	- infac360sf_m_salesforce_personaccount_person_inbound_root - infac360sf_m_salesforce_personaccount_person_inbound_phone - infac360sf_m_salesforce_personaccount_person_inbound_account - infac360sf_m_salesforce_personaccount_person_inbound_finance - infac360sf_m_salesforce_personaccount_person_inbound_assistantPhone - infac360sf_m_salesforce_personaccount_person_inbound_email - infac360sf_m_salesforce_personaccount_person_inbound_address	Imports complete data from the Salesforce Person Accounts object to the Person business entity.
infac360sf_ingress_salesforce_personaccount_person_inbound_delta	infac360sf_tf_salesforce_personaccount_person_inbound_delta	- infac360sf_mt_salesforce_personaccount_person_inbound_root - infac360sf_mt_salesforce_personaccount_person_inbound_phone - infac360sf_mt_salesforce_personaccount_person_inbound_account - infac360sf_mt_salesforce_personaccount_person_inbound_finance - infac360sf_mt_salesforce_personaccount_person_inbound_assistantPhone - infac360sf_mt_salesforce_personaccount_person_inbound_email - infac360sf_mt_salesforce_personaccount_person_inbound_address	- infac360sf_m_salesforce_personaccount_person_inbound_root - infac360sf_m_salesforce_personaccount_person_inbound_phone - infac360sf_m_salesforce_personaccount_person_inbound_account - infac360sf_m_salesforce_personaccount_person_inbound_finance - infac360sf_m_salesforce_personaccount_person_inbound_assistantPhone - infac360sf_m_salesforce_personaccount_person_inbound_email - infac360sf_m_salesforce_personaccount_person_inbound_address	Imports incremental data from the Salesforce Person Accounts object to the Person business entity.

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_export_salesforce_person_contact_outbound	infac360sf_tf_salesforce_person_contact_outbound	infac360sf_mt_salesforce_person_contact_outbound	infac360sf_m_salesforce_person_contact_outbound	Exports data from the Person business entity to the Salesforce Contacts object.
infac360sf_export_salesforce_person_personaccount_outbound	infac360sf_tf_salesforce_person_personaccount_outbound	infac360sf_mt_salesforce_person_personaccount_outbound	infac360sf_m_salesforce_person_personaccount_outbound	Exports data from the Person business entity to the Salesforce Person Accounts object.
infac360sf_export_salesforce_person_contact_limited_outbound	infac360sf_tf_salesforce_person_contact_limited_outbound	infac360sf_mt_salesforce_person_contact_limited_outbound	infac360sf_m_salesforce_person_contact_limited_outbound	Exports limited data from the Person business entity to the Salesforce Contacts object for synchronization.
infac360sf_export_salesforce_person_personaccount_limited_outbound	infac360sf_tf_salesforce_person_personaccount_limited_outbound	infac360sf_mt_salesforce_person_personaccount_limited_outbound	infac360sf_m_salesforce_person_personaccount_limited_outbound	Exports limited data from the Person business entity to the Salesforce Person Accounts object for synchronization.

Predefined batch jobs of Salesforce relationships

The following table lists the predefined jobs and their related taskflow, mapping task, and mapping for Salesforce relationships:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_accountpartnerrel_inbound_delta	infac360sf_tf_salesforce_accountpartner_partnerrel_inbound_delta	infac360sf_mt_salesforce_accountpartner_partnerrel_inbound	infac360sf_m_salesforce_accountpartner_partnerrel_inbound	Imports incremental data from the Salesforce Account Partner Relationship object to the Customer 360 Account Partner Relationship object.
infac360sf_ingress_salesforce_accountpartnerrel_inbound_initial	infac360sf_tf_salesforce_accountpartner_partnerrel_inbound_initial	infac360sf_mt_salesforce_accountpartner_partnerrel_inbound	infac360sf_m_salesforce_accountpartner_partnerrel_inbound	Imports complete data from the Salesforce Account Partner Relationship object to the Customer 360 Account Partner Relationship object.

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_contact_contactrel_inbound_initial	infac360sf_tf_salesforce_contact_contactrel_inbound_initial	infac360sf_mt_salesforce_contact_contactrel_inbound	infac360sf_m_salesforce_contact_contactrel_inbound	Imports complete Account to Contact Relationship data from the Salesforce Contact object to the Customer 360 Contact object.
infac360sf_ingress_salesforce_contact_contactrel_inbound_delta	infac360sf_tf_salesforce_contact_contactrel_inbound_delta	infac360sf_mt_salesforce_contact_contactrel_inbound	infac360sf_m_salesforce_contact_contactrel_inbound	Imports incremental Account to Contact Relationship data from the Salesforce Contact object to the Customer 360 Contact object.

Predefined batch jobs of Salesforce account hierarchy

The following table lists the predefined batch jobs and their related taskflow, mapping task, and mapping for Salesforce account hierarchy:

Job Name	Taskflow	Mapping Task	Mapping	Description
infac360sf_ingress_salesforce_account_hierarchy_inbound_initial	infac360sf_tf_salesforce_account_hierarchy_inbound_initial	infac360sf_mt_salesforce_account_hierarchy_inbound	infac360sf_m_salesforce_account_hierarchy_inbound	Imports complete data from the Account Hierarchy in Salesforce into the Salesforce Account Hierarchy object.
infac360sf_ingress_salesforce_account_hierarchy_inbound_delta	infac360sf_tf_salesforce_account_hierarchy_inbound_delta	infac360sf_mt_salesforce_account_hierarchy_inbound	infac360sf_m_salesforce_account_hierarchy_inbound	Imports incremental data from the Account Hierarchy in Salesforce into the Salesforce Account Hierarchy object.

Predefined assets for processing inbound data in real time

Use the predefined assets to synchronize Salesforce data with Customer 360 SaaS in real time.

Real time data integration allows to synchronize Salesforce data with Customer 360 SaaS instantaneously using processes and connectors.

The following table lists the predefined assets to use for real-time inbound data synchronization:

Asset Name	Asset Type	Description
infac360sf-appconn-salesforce-contact-contactrel-inbound-rt	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_salesforce_contact_contactrel_inbound_rt connector.
infac360sf-appconn-salesforce-contact-crossref-inbound	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_salesforce_contact_crossref_inbound connector.
infac360sf-appconn-salesforce-account-inbound-rt	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_salesforce_account_inbound_rt connector.
infac360sf-app-conn-get-person	App Connection	App connection that defines the actions to retrieve Person business entity records from Business 360.
infac360sf-app-conn-ListRefDataSets	App Connection	App connection that defines the actions to list the available reference data sets in Business 360.
infac360sf-app-conn-LoadRefData	App Connection	App connection that defines the actions to load reference data into Business 360.
Customer360	App Connection	App connection to the Customer 360 environment that the inbound integration processes use to access business entity data.
infac360sf-appconn-salesforce-personaccount-crossref-inbound	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_salesforce_personaccount_crossref_inbound connector.
infac360sf-app-conn-GetOrganization	App Connection	App connection that defines the actions to retrieve Organization business entity records from Business 360.
infac360sf-app-conn-search	App Connection	App connection that defines the actions to search for records in Business 360.
infac360sf-appconn-salesforce-account-crossref-inbound	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_salesforce_account_crossref_inbound connector.
Salesforce	App Connection	App connection to Salesforce that the inbound integration processes use to read source records.

Asset Name	Asset Type	Description
infac360sf-app-conn-GetCrosswalkMapping	App Connection	App connection that defines the actions to retrieve crosswalk mapping information from Business 360.
infac360sf-appconn-customer360-login	App Connection	App connection that defines the actions to use with the Business 360 POST request or the infac360sf_srvconn_customer360_login connector.
infac360sf_srvconn_salesforce_account_crossref_inbound	Service Connector	Service connector that connects to Business 360 to look up or create cross-reference records for Salesforce account records in real time.
infac360sf_srvconn_salesforce_personaccount_crossref_inbound	Service Connector	Service connector that connects to Business 360 to look up or create cross-reference records for Salesforce person account records in real time.
infac360sf_srvconn_customer360_login	Service Connector	Service connector that authenticates to Customer 360 to obtain a session for the inbound integration processes.
infac360sf_srvconn_salesforce_contact_contactrel_inbound_rt	Service Connector	Service connector that connects to Business 360 to insert Salesforce contact relationship records in real time.
C360SaaSConnector_LoadRefData	Service Connector	Service connector that loads reference data into Business 360.
infac360sf_srvconn_salesforce_contact_crossref_inbound	Service Connector	Service connector that connects to Business 360 to look up or create cross-reference records for Salesforce contact records in real time.
C360SaaSConnector_GetCrosswalkMapping	Service Connector	Service connector that retrieves crosswalk mapping information from Business 360.
C360SaaSConnector_GetOrganization	Service Connector	Service connector that retrieves Organization business entity records from Business 360.
C360SaaSConnector_Search	Service Connector	Service connector that searches for records in Business 360.
C360SaaSConnector_ListRefDataSets	Service Connector	Service connector that lists the reference data sets available in Business 360.
C360SaaSConnector_GetPersonAccount	Service Connector	Service connector that retrieves Person business entity records from Business 360.
infac360sf_srvconn_salesforce_account_inbound_rt	Service Connector	Service connector that connects to Business 360 to insert or update Salesforce account records in real time.

Asset Name	Asset Type	Description
infac360sf_proc_GetOrganization	Process	Retrieves Organization business entity records from Business 360.
infac360sf_proc_GetTargetValueFromCrosswalkMapping	Process	Retrieves the target value from the crosswalk mapping in Business 360.
infac360sf_proc_GetCrosswalkMapping	Process	Retrieves the crosswalk mapping from Business 360.
infac360sf_proc_salesforce_contact_person_inbound_rt	Process	Synchronizes the Salesforce contact records with the Person business entity in real time.
infac360sf_proc_CAITokenManagement	Process	Manages the authentication tokens that the Cloud Application Integration processes use to connect to Business 360.
infac360sf_proc_RunShellScriptToLoadRefData	Process	Runs a shell script to load reference data into Business 360.
infac360sf_proc_get_person	Process	Retrieves Person business entity records from Business 360.
infac360sf_proc_salesforce_contact_contactrel_inbound_rt	Process	Synchronizes the Salesforce contact relationships with the Contact Relationship business entity in real time.
infac360sf_proc_GetCrosswalkId	Process	Retrieves the crosswalk ID for a record from Business 360.
infac360sf_proc_salesforce_account_organization_inbound_rt	Process	Synchronizes the Salesforce account records with the Organization business entity in real time.
infac360sf_proc_OrganizationXrefCheck	Process	Checks whether a cross-reference exists for an Organization business entity record in Business 360.
infac360sf_proc_crosswalk_refdata	Process	Manages the crosswalk reference data used to map Salesforce values to Business 360 values.
infac360sf_proc_LoadRefData	Process	Loads reference data into Business 360.
infac360sf_proc_PersonXrefCheck	Process	Checks whether a cross-reference exists for a Person business entity record in Business 360.
infac360sf_proc_salesforce_personaccount_person_inbound_rt	Process	Synchronizes the Salesforce person account records with the Person business entity in real time.

Predefined assets for processing outbound data in real time

Use the predefined assets to synchronize records from Customer 360 SaaS to Salesforce in real time. Real-time data integration uses processes and connectors to complete the records synchronization.

Before you use these assets, install Informatica Customer 360 Extension for Salesforce Real-time Outbound, an unmanaged Salesforce package. For more information, see Chapter 1, “Introducing Customer 360 Extension for Salesforce” on page 8.

The following table lists the predefined assets to use for real-time outbound data synchronization:

Asset Name	Asset Type	Description
infac360sf-appconn-salesforcestreamingevent	App Connection	App connection that connects to Salesforce to publish records to a platform event in real time.
infac360sf-appconn-triggerprocess-outbound	App Connection	App connection that defines the actions to use with the MDM SaaS POST request or the infac360sf_srvconn_triggerprocess_outbound connector.
infac360sf-appconn-BusinessEventKafka	App Connection	App connection that connects to Kafka to consume publishing events in real time.
infac360sf_srvconn_triggerprocess_outbound	Service Connector	Service connector that triggers the Application Integration process to run on an event basis.
infac360sf_proc_trigger_kafka_salesforce_outbound_rt	Process	Wrapper process that calls the main Application Integration process on an event basis after a message is created in a Kafka topic.
infac360sf_proc_kafka_sf_outbound_rt	Process	Main process that consumes the actions from Kafka and sends the data to a platform event in Salesforce.

Field mapping

The Data Integration mappings map the fields of Customer 360 and Salesforce. Based on the mappings, the Salesforce data is stored in Customer 360.

The following table lists the Salesforce objects and the Customer 360 assets to which they are mapped:

Salesforce Object Name	Customer 360 Asset	Customer 360 Asset Type
Accounts	Organization	Business entity
Contacts	Person	Business entity
Person Accounts	Person	Business entity
Account to Contact Relationship	Contact	Relationship
Account to Partner Relationship	Partner	Relationship
Account Hierarchy	Salesforce Account Hierarchy	Hierarchy

Mapping of Organization business entity and Salesforce Accounts object fields

The fields from the Salesforce Accounts objects are mapped to the Organization business entity for data integration.

General fields of the Organization business entity

The following table lists the Salesforce Accounts object fields that are mapped to the General fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
Name	Name	name
NumberOfEmployees	Number Of Employees	numberOfEmployees
Industry	Industry	X_infac360sf_industry
OwnershipType	Company Type	companyType
Site	Site	X_infac360sf_site
Website	Website	X_infac360sf_website
YearStarted	Year Started	X_infac360sf_yearStarted

Address field group of the Organization business entity

The following table lists Salesforce Accounts object fields that are mapped to the Address field group fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
BillingStreet	Address Line 1	addressLine1
ShippingStreet	Address Line 1	addressLine1
BillingCity	City	city
ShippingCity	City	city
BillingState	State	state
ShippingState	State	state
BillingCountry	Country	country
ShippingCountry	Country	country
BillingPostalCode	Postal Code	postalCode
ShippingPostalCode	Postal Code	postalCode

Accounts field group of the Organization business entity

The following table lists the Salesforce Accounts object fields that are mapped to the Accounts field group fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
Account Number	Account Number	X_infac360sf_accountNumber
Name	Account Name	X_infac360sf_accountName
Account Source	Account Source	X_infac360sf_accountSource
Type	Account Type	X_infac360sf_accountType
Rating	Rating	X_infac360sf_rating

Financial field group of the Organization business entity

The following table lists the Salesforce Accounts object field that is mapped to the Financial field group field:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
AnnualRevenue	Amount	amount

Phone field group of the Organization business entity

The following table lists the Salesforce Accounts object fields that are mapped to the Phone field group fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
Fax	Phone Number	phoneNumber
Phone	Phone Number	phoneNumber

Stock field group of the Organization business entity

The following table lists the Salesforce Accounts object fields that are mapped to the Stock field group fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
TickerSymbol	Ticker Symbol	tickerSymbol

Mapping of Person business entity and Salesforce Contacts object fields

The fields from the Salesforce Contacts and Person Accounts objects are mapped to the Person business entity for data integration.

General fields of the Person business entity

The following table lists the Salesforce Contacts and Person Accounts object fields that are mapped to the General fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
AssistantName	Assistant Name	X_infac360sf_assistantName
HasOptedOutOfEmail	Email Opt Out Indicator	X_infac360sf_emailOptOutIndicator
Department	Department	X_infac360sf_department
Industry	Industry	X_infac360sf_industry
FirstName	First Name	firstName
MiddleName	Middle Name	middleName
LastName	Last Name	lastName
PersonTitle	Title	title
PersonBirthDate	Birth Date	birthDate
Salutation	Prefix Name	prefixName
Suffix	Suffix Name	suffixName

Account field group of the Person business entity

The following table lists the Salesforce Person Accounts object fields that are mapped to the Account field group fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
AccountNumber	Account Number	X_infac360sf_accountNumber
Name	Account Name	X_infac360sf_accountName
AccountSource	Account Source	X_infac360sf_accountSource
Type	Account Type	X_infac360sf_accountType

Address field group of the Person business entity

The following table lists the Salesforce Contacts and Person Accounts object fields that are mapped to the Address field group fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
BilllingStreet	Address Line 1	addressLine1
MailingStreet	Address Line 1	addressLine1
PersonMailingStreet	Address Line 1	addressLine1
PersonOtherStreet	Address Line 1	addressLine1
ShippingStreet	Address Line 1	addressLine1
OtherStreet	Address Line 1	addressLine1
BillingCity	City	city
MailingCity	City	city
ShippingCity	City	city
OtherCity	City	city
PersonMailingCity	City	city
PersonOtherCity	City	city
BillingState	State	state
MailingState	State	state
ShippingState	State	state
OtherState	State	state
PersonOtherState	State	state
BillingCountry	Country	country
MailingCountry	Country	country
ShippingCountry	Country	country
OtherCountry	Country	country
PersonOtherCountry	Country	country
BillingPostalCode	Postal Code	postalCode
MailingPostalCode	Postal Code	postalCode
ShippingPostalCode	Postal Code	postalCode

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
OtherPostalCode	Postal Code	postalCode
PersonOtherPostalCode	Postal Code	postalCode

Assistant Phone field group of the Person business entity

The following table lists the Salesforce Contacts and Person Accounts object fields that are mapped to the Assistant Phone field group fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
AssistantPhone	Phone Number	phoneNumber
PersonAssistantPhone	Phone Number	phoneNumber

Email field group of the Person business entity

The following table lists the Salesforce Contacts and Person Accounts object fields that are mapped to the Email field group fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
Email	Electronic Address	electronicAddress
PersonEmail	Electronic Address	electronicAddress

Indicator field group of the Person business entity

The following table lists the Salesforce Person Accounts object fields that are mapped to the Indicator field group fields:

Salesforce Display Name	Customer 360 Display Name	Customer 360 Internal ID
IsPersonAccount	Is Customer	X_infac360sf_isCustomer

Phone field group of the Person business entity

The following table lists the Salesforce Contacts and Person Accounts object fields that are mapped to the Phone field group fields:

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
DoNotCall	Do Not Call Indicator	doNotCallIndicator
Fax	Phone Number	phoneNumber
HomePhone	Phone Number	phoneNumber

Salesforce Field Name	Customer 360 Display Name	Customer 360 Internal ID
MobilePhone	Phone Number	phoneNumber
OtherPhone	Phone Number	phoneNumber
PersonHomePhone	Phone Number	phoneNumber
PersonMobilePhone	Phone Number	phoneNumber
PersonOtherPhone	Phone Number	phoneNumber
Phone	Phone Number	phoneNumber

Mapping of Salesforce Account to Contact relationship and Customer 360 Contact relationship

The following table lists the mapping of the Salesforce and Customer 360 fields for importing and exporting account to contact relationships:

Salesforce Field	Customer 360 Field	Description
Id, AccountId	sourcePKey	The values of Id and AccountId fields of Salesforce, concatenated and separated by an underscore, are mapped to the sourcePKey of the Customer 360 relationship object.
AccountId	Contact>_from >id> sourcePKey	The AccountId field of Salesforce is mapped to the sourcePKey of the `from` object of the Contact relationship.
Id	Contact>_to> id> sourcePKey	The Id field of Salesforce is mapped to the sourcePKey of the `to` object of the Contact relationship.

The following table lists the Customer 360 fields that specify the source system when you import and export the account to contact relationships:

Customer 360 Field	Description
sourceSystem	The source system for the contact relationship.
Contact>_from >id> sourceSystem	The source system for the `from` record.
Contact >_to> id> sourceSystem	The source system for the `to` record.

Mapping of Salesforce Account to Partner relationship and Customer 360 Partner relationship

The following table lists the attribute mapping of Salesforce and Customer 360 fields for importing and exporting account to partner relationships:

Salesforce Field	Customer 360 Field	Description
Id	sourcePKey	The Id field of Salesforce is mapped to the sourcePKey of the Customer 360 relationship object.
AccountId	Contact>_from >id> sourcePKey	The AccountId field of Salesforce is mapped to the sourcePKey of the `from` object of the Partner relationship.
Id	Contact >_to> id> sourcePKey	The Id field of Salesforce is mapped to the sourcePKey of the `to` object of the Partner relationship.

The following table lists the Customer 360 fields that specify the source system when you import and export the account to contact relationships:

Customer 360 Field	Description
sourceSystem	The source system for the contact relationship.
Contact>_from >id> sourceSystem	The source system for the `from` record.
Contact >_to> id> sourceSystem	The source system for the `to` record.

Mapping of Salesforce Account hierarchy to Customer 360 Organization hierarchy

The hierarchy mapping uses two instances of an account object to identify the name of the parent node in the hierarchy.

The following table lists the attribute mapping of Salesforce and Customer 360 fields for importing account hierarchies:

Salesforce Field	Customer 360 Field	Description
ParentId	sourcePKey	The ParentId field of Salesforce is mapped to the root sourcePKey of the Customer 360 hierarchy object.
Name1	name	The value of the name field of the second account instance and the hierarchy string, concatenated and separated by an underscore, are mapped to the name field of Customer 360.

Salesforce Field	Customer 360 Field	Description
ParentId	rootsourcePKey	The ParentId field of Salesforce is mapped to the root sourcePKey field of the Customer 360 hierarchy object.
ParentId, Id	Child >sourcePKey	The values of the ParentId and Id fields of Salesforce, concatenated and separated by an underscore, are mapped to the sourcePKey of the child node in the hierarchy.
Id	Child >child>sourcePKey	The Id field of Salesforce is mapped to the sourcePKey of the child node in the hierarchy.
ParentId	Child>parent>sourcePKey	The ParentId field of Salesforce is mapped to the sourcePKey of the parent node in the hierarchy.

The following table lists the Customer 360 fields that specify the source system when you import account hierarchies:

Customer 360 Field	Description
rootSourceSystem	The source system for the Salesforce account hierarchy.
Child > child > sourceSystem	The source system for the child node in the hierarchy.
Child > parent > sourceSystem	The source system for the parent node in the hierarchy.

Match Model

When you search for matching records before creating a record, the fuzzy match strategy uses the match model configuration.

Customer 360 Extension for Salesforce uses the predefined match model, `Match model for Search Match`, to search for matching Organization and Person business entity records.

The following table describes the properties of the predefined match model for the Organization and Person business entities:

Business Entity	Descriptive Rule Rank	Match Objective	Match Strategy	Required Match Fields	Optional Match Fields	Description
Organization	1	Resolve Duplicates	Fuzzy	Exact match fields: - AlternateIdentifier.altIdValue - AlternateIdentifier.idType - PostalAddress.country - PostalAddress.state Fuzzy match fields: - Organization_Name	Use the following field types and field names for a fuzzy match: - Telephone_Number, PhoneCommunication.phoneNumber - Postal_Area, PostalAddress.postalCode - Address_Part2, PostalAddress.city - Address_Part1, PostalAddress.addressLine1	Strongly similar address, alternate ID, and organization name.
Person	1	Resolve Duplicates	Fuzzy	Exact match fields: - ElectronicAddress.electronicAddress - PostalAddress.state - PostalAddress.country Fuzzy match fields: - fullName	Use the following field types and field names for a fuzzy match: - Telephone_Number, Phone.phoneNumber - Postal_Area, PostalAddress.postalCode - Address_Part2, PostalAddress.city - Address_Part1, PostalAddress.addressLine1	Strongly similar address and person name.

CHAPTER 4

Deploying Customer 360 Extension for Salesforce

To deploy Customer 360 Extension for Salesforce, you must configure Salesforce, download the extension package, import assets into Customer 360 SaaS, update the predefined connections, and install the extension.

To import the extension assets, ensure that you log in with the Designer user role.

Downloading and extracting Customer 360 Extension for Salesforce

To get the Customer 360 Extension for Salesforce package, contact Informatica Global Customer Support.

After you download the Customer 360 Extension for Salesforce package, extract the package on your computer. The package contains predefined data model attributes, Data Integration assets, Application Integration assets, batch jobs, relationships, and custom pages for Customer 360 SaaS.

The extracted package contains the following files and folders:

File or Folder Name	Description
1_MDM_Assets.zip	Contains the following attributes: - Data model attributes - Relationships. - Reference data assets. - Source system for Salesforce. - Custom pages for Customer 360 SaaS.
2_DI_Assets	Contains the Data Integration assets and connections that you can use to import Salesforce records to Customer 360 SaaS or export Customer 360 records to Salesforce.
3_MDM_Job_Assets	Contains the job assets to synchronize Salesforce records with Customer 360 SaaS in batches.

File or Folder Name	Description
4_CAI_Assets	Folder that contains the following files: - 4_CAI_Assets_RT_Inbound.zip. Contains the Application Integration assets and connections that you use to synchronize records from Salesforce to Customer 360 SaaS. - 4_CAI_Assets_RT_Outbound.zip. Contains the Application Integration assets and connections that you use to synchronize records from Customer 360 SaaS to Salesforce.
Reference Data	Contains files that store code lists and values related to Salesforce.
Secure Agent Files	Contains the lookup source files and the parameter values for the Data Integration mappings.
Unmanaged Salesforce Package	Folder that contains the Custom Labels.zip file. The Custom Labels.zip file contains the custom labels that the Salesforce Lightning component in the unmanaged package uses.

Importing the Customer 360 Extension for Salesforce assets

After you extract the Customer 360 Extension for Salesforce package, import Customer 360 Extension for Salesforce assets to Customer 360 SaaS. Importing the assets overwrites the existing Customer 360 SaaS assets and your customization.

Before you customize the Customer 360 SaaS data model, ensure that you import the extension assets.

Note: Before importing the data model, pages, and reference data assets, ensure that you are assigned to the Designer, MDM Designer, Reference 360 User, and Reference 360 Business Steward user roles, and not to the Admin user role.

1. In Business 360 Console, click **Explore** > **Customer360** > **Import**.
2. Import the data model attributes, reference data assets, source system, and predefined custom pages.
   a. Navigate to the following file:

      <Extracted extension package>/1_MDM_Assets.zip

   b. Click **Open**.

      The **Import Assets** page lists the assets in the file.

   c. Ensure that all the assets are selected, and click **Import**.

   d. On the **My Import/Export Logs** page, verify that the import job is successful.
3. Import the Data Integration assets and the connections.
   a. In Data Integration, click **Explore** > **Customer360** > **Salesforce Extension** > **Import**.

   b. Navigate to the following file:

      <Extracted extension package>/2_DI_Assets.zip

   c. Click **Open**.

      The **Import Assets** page lists the assets in the file.

d. Ensure that all the assets are selected, and then select **Publish Taskflow(s) after import**.

e. Click **Import**.

f. On the **My Import/Export Logs** page, verify that the import job is successful.

4. Import the job assets.

a. In Business 360 Console, click **Explore** > **Import**.

b. Navigate to the following file:

`<Extracted extension package>/3_MDM_Job_Assets.zip`

c. Click **Open**.

The **Import Assets** page lists the assets in the file.

d. Ensure that all the assets are selected, and click **Import**.

e. On the **My Import/Export Logs** page, verify that the import job is successful.

Adding a Secure Agent

After you import the job assets, add a Secure Agent to the predefined Secure Agent group.

1. In Administrator, click **Runtime Environments**.
2. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Add or Remove Secure Agents**.
3. In the **Available Agents** list, select the Secure Agent that you want to add to the group, and click **Select**.
4. Expand the **Actions** menu for the `infa_extension_runtime` Secure Agent group, and select **Enable or Disable Services, Connectors**.
5. From the **Services** tab, select the services to enable for the Secure Agent group.
6. From the **Connectors** tab, select the connectors to enable for the Secure Agent group.
7. Click **Save**.

Adding lookup files

To import reference data CSV files to the Secure Agent, add the lookup files related to Salesforce in the Secure Agent machine.

1. Navigate to the following directory:

`<Extracted extension package>\Reference Data`

2. Copy the following files to the local directory where you store the flat file connection:

- `Country_ISO_Conversion.csv`
- `State_ISO_Conversion.csv`

Importing parameter files

Import the list of user-defined parameters and their associated values for Cloud Data Integration mappings.

To import parameter files, save the parameter files in the Secure Agent Installation directory.

Copy the parameter files from the source directory to the target Secure Agent installation directory:

Source: `<Extracted extension package>\Secure Agent Files\Parameter Files\<Source System>`

Target: `<Secure Agent Installation Directory>\apps\Data_Integration_Server\data\userparameters`

Optionally, if you want to use a configured path for the target location, see Parameter file location.

CHAPTER 5

Installing Customer 360 Extension for Salesforce

Use Customer 360 Extension for Salesforce to configure Salesforce to synchronize records with Customer 360 SaaS in batches or real-time and to search for similar records in Customer 360 SaaS before you create a record.

Configuring the flat file connection

After you import the Customer 360 Extension for Salesforce assets, to access the flat files from the Secure Agent, configure the flat file connection.

▶ Configure the flat file connection.

a. In Administrator, click **Connections**.

b. Click `infac360sf_conn_flatfile`.

c. Verify the directory to store the flat file.

Default is `C:\ReferenceData`.

d. Test the connection, and ensure that the connection is successful.

Configuring Salesforce for MDM SaaS

Create custom fields for accounts and contacts in Salesforce to store Customer 360 SaaS values. You can store the last date and time at which the record synchronized with Customer 360 SaaS. You can also store the ID of the Customer 360 SaaS master record. Use this ID to retrieve the master record from Customer 360 SaaS.

1. Log in to Salesforce.
2. To create a custom field for accounts or contacts, based on the Salesforce environment that you use, perform one of the following steps:

- In Salesforce Classic, perform the following tasks:

a. From the user menu, click **Setup**.

b. Under **App Setup**, expand **Customize** > **Accounts**, and click **Fields**.

c. In the **Account Custom Fields & Relationship** section, click **New**.

- In Lightning Experience, perform the following tasks:

a. Click **Setup**.

The **Setup Home** page appears.

b. Under **PLATFORM TOOLS**, click **Objects and Fields** > **Object Manager**.

The **Setup Object Manager** page appears.

c. Click **Accounts** | **Contacts**.

d. On the side bar, click **Fields & Relationships**, and then click **New**.

3. To create the `Customer360 Id` custom field, perform the following steps:

a. Select **Text**, and then click **Next**.

b. Set the field label to `Customer360 Id` and field label to `Customer360_Id`.

The field name is auto-populated with `Customer360_Id`.

c. Set the length of the field to `100`, and then click **Next**.

d. Select the profiles to which you want to grant edit access to the field, and then click **Next**.

e. Add the custom field to the required layouts.

f. Click **Save and New**.

4. To create the `Customer360 Sync Date` custom field, perform the following steps:

a. Select **Date/Time**, and then click **Next**.

b. Set the field name to `Customer360_Sync_Date`.

c. Set the field label to `Customer360 Sync Date`.

d. Set the default value to `DATETIMEVALUE("1900-01-01 00:00:00")`, and then click **Next**.

e. Select the profiles to which you want to grant edit access to the field, and then click **Next**.

f. Add the custom field to the required layouts.

g. Click **Save**.

Providing field-level access for Salesforce objects

Customer 360 Extension for Salesforce uses the standard attributes of Salesforce that are available out-of-the-box across all editions of Salesforce. If you customize the field-level security of an out-of-the-box Salesforce attribute, the Cloud Data Integration jobs might fail. During failure, the session log contains the names of such attributes. To make these attributes available in the Cloud Data Integration mappings, change the field-level security of these attributes in Customer 360 SaaS.

1. Log in to Salesforce.
2. Based on the Salesforce environment that you use, perform one of the following steps:

In Salesforce Classic, perform the following tasks:

a. From the user menu, click **Setup**.

b. Under **App Setup**, expand **Customize** > **Accounts**, and click **Fields**.

c. In the **Account Custom Fields & Relationship** section, select the field.

In Lightning Experience, perform the following tasks:

a. Click **Setup**.

b. Under **PLATFORM TOOLS**, click **Objects and Fields** > **Object Manager**.

c. On the **Setup Object Manager** page, click **Accounts**.

d. On the side bar, click **Fields & Relationships**, and then select the field.

The **Details** page of the field appears.

3. Click **Set Field-Level Security**.
4. Select the **Visible** check box for the Salesforce user profile that you use to access Salesforce.
5. Click **Save**.
6. From the **Details** page of the field, click **View Field Accessibility**.
7. Select the field to provide field accessibility.

To edit the field, ensure that you configure the user role for the Salesforce user profile.

a. Based on the Salesforce environment that you use, perform one of the following tasks:

In Salesforce Classic, perform the following tasks:

1. From the user menu, click **Setup**.
2. Under **Administration Setup**, click **Manage Users** > **Profiles**.

In Lightning Experience, perform the following tasks:

1. Click **Setup**.
2. Under **ADMINISTRATION**, click **Users** > **Profiles**.

b. Click the Salesforce user profile to which you want to assign permissions.

c. From the **Custom Field-Level Security** section, click **View** for the custom field that you want to edit permissions.

d. To edit permissions for the profile, click **Edit**.

e. Assign permissions and click **Save**.

Adding code values and crosswalks to the reference data assets

You can import the code values and crosswalks in to the reference data assets using Reference 360. Add the reference data values to the reference data assets.

1. To access the Administrator service, assign the **Reference 360 Business Steward** role to the user.

a. In Administrator, click **Users**.

b. Select the user name to assign the role.

c. In the **Assigned User Groups and Roles** section, enable the Reference 360 Business Steward role.

d. Click **Save**.

2. To import data into Reference 360, upload the CSV file with code values.
   a. In Reference 360, from the **Explore** page, select the reference data to which you want to add the code values.
   b. Click the **Import Values** icon.

      The **Upload File** page of the **Import Values** wizard appears.
   c. To select a file to upload, drag a CSV source file, or click **Browse** and select the source file.

      The first 10 rows of records appear in the preview section.
      The following table lists the code values and the location:

Reference Data Asset	Code Value File Location
AccountType	<Extracted extension package>/Reference Data/AccountType
AddressType	<Extracted extension package>/Reference Data/AddressType
AlternateIdType	<Extracted extension package>/Reference Data/AlternateIdType
CompanyType	<Extracted extension package>/Reference Data/CompanyType
infac360sf_AccountSource	<Extracted extension package>/Reference Data/infac360sf_AccountSource
infac360sf_Industry	<Extracted extension package>/Reference Data/infac360sf_Industry
infac360sf_PersonIndicatorType	<Extracted extension package>/Reference Data/infac360sf_PersonIndicatorType
infac360sf_Rating	<Extracted extension package>/Reference Data/infac360sf_Rating
PhoneUsageType	<Extracted extension package>/Reference Data/PhoneUsageType

   d. Click **Next**.

      The **Map Fields** page appears.

3. After you select the file to import, the import process automatically maps the possible columns to the suitable target fields. You can either use the system suggested mapping or modify the mapping as required.
   a. On the **Map Fields** page of the **Import Values** wizard, verify the system suggested mapping of fields.
   b. To manually map any field, perform one of the following tasks:
      - Drag a source column to a target field.
      - Select a source column and a corresponding target field, and click **Map Selected**.

      The import process maps the field accordingly.
   c. Verify the mapping of all fields and ensure that all the required fields are mapped.

d. Click **Next**.

The **Preview and Import File** page appears.

4. After you map the fields, use the preview section to review and verify the mapping, and then import the data.

a. On the **Preview and Import File** page of the **Import Values** wizard, verify the mapping.

If the preview does not return desired results, you can go back to the **Map Fields** page to map the fields again.

b. To import the file, click **Import**.

The import process starts. You get a notification after the import process is complete.

Note: For more information about importing code values, see Import data.

5. Import the value mappings of a crosswalk.

a. In Reference 360, click **Explore**, search and open the crosswalk.

The following table lists crosswalks and their location:

Crosswalk	Location
Salesforce Country	**Country** > **Salesforce Country**
Country_ISO_Conversion	**Country** > **Enterprise Country** > **Salesforce Country to Enterprise Country**
Salesforce State	**State** > **Salesforce State**
State_ISO_Conversion	**State** > **Enterprise State** > **Salesforce State to Enterprise State**

b. Click **Open**.

c. Click the **Import Values** icon.

The **Upload File** page of the **Import Values** wizard appears.

d. To select a file to upload, drag a CSV source file, or click **Browse** and select the source file.

The following table lists the crosswalks of the reference data set and the location:

Reference Data Asset	Crosswalk File Location
SalesForceCountry	`<Extracted extension package>/Reference Data/SalesForceCountry`
Country_ISO_Conversion	`<Extracted extension package>/Reference Data/Country_ISO_Conversion`
SalesForceState	`<Extracted extension package>/Reference Data/SalesForceState`
State_ISO_Conversion	`<Extracted extension package>/Reference Data/State_ISO_Conversion`

e. Click Next.

The **Map Fields** page appears.

6. Repeat steps 3 through 4.

Processing data in batches

You can process Salesforce contact records, person account records, relationship records, and hierarchy records with Customer 360 SaaS in batches.

Using the parameter file

A parameter file is a list of user-defined parameters and their associated values. Use the parameter file to define values that you want to update without having to edit the mapping task. The parameter values are applied when the task runs.

The Customer 360 Extension for Salesforce package contains the following parameter file in the Secure Agent files directory for the Data Integration mappings:

`infac360sf_salesforce_param.param`

For more information about importing the parameter file, see "Importing the Customer 360 Extension for Salesforce assets" on page 68.

Configuring the Customer 360 connection

After importing the assets, configure the Customer 360 connection.

1. In Administrator, click **Connections**.
2. Click `infac360sf_conn_customer360`.
3. Test the connection, and ensure that the connection is successful.

Configuring the Salesforce connection

After you configure the Customer 360 connection, configure the Salesforce connection.

1. On the **Connections** page, click `infac360sf_conn_salesforce`.
2. Click **Edit**, and enter the credentials to access Salesforce.
3. Test the connection, and ensure that the connection is successful.

Configuring Business 360 FEP Connector

You can use Business 360 FEP Connector to write Salesforce data into MDM SaaS. If the input values for Salesforce integer fields are null, Business 360 FEP Connector converts the null values to 0 in MDM SaaS.

1. In Administrator, click **Connections**.
2. Click `infac360sf_conn_customer360`.
3. Test the connection.

   The connection might fail with the following error:
   `The test connection for infac360sf_conn_customer360 failed. Unable to fetch connector attributes, Ensure adapter ID is valid[com.infa.adapter.mdmflat].`
4. If the connection fails, verify and ensure that the connection is successful.
   a. Verify the license used.
   b. Ensure that the connector is enabled for the Secure Agent group.
   c. Restart the Secure Agent.

Synchronizing source and target objects of mappings

Before you run the predefined mappings, ensure that you synchronize the source and target objects of the inbound and outbound mappings. Synchronizing source and target objects helps you avoid import and export failures.

1. Synchronize the source objects for all the inbound mappings.
    a. In Data Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
    b. Navigate to an inbound mapping. For example, **infac360sf_m_salesforce_contact_person_inbound_phone**.
    c. On the **Design** page, select a source object of the mapping.
    d. On the **Source** tab, select the **infac360sf_conn_salesforce** connection.
    The **p_src_system_connection** connection is selected by default.
    e. On the **Fields** tab, click the **Synchronize** icon.
    The **Synchronize** window appears.
    f. Select **All fields**, and click **Synchronize**.
    g. On the **Source** tab, select the **p_src_system_connection** connection, and click **Save**.
    h. Repeat steps 1 through 7 for other inbound mappings.
2. Synchronize the target objects for all the outbound mappings.
    a. In Data Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
    b. Navigate to an outbound mapping. For example, **infac360sf_m_salesforce_person_contact_outbound**.
    c. On the **Design** page, select the target object of the mapping.
    d. On the **Target** tab, select the **infac360sf_conn_salesforce** connection.
    e. On the **Target Fields** tab, click the **Synchronize** icon.
    f. Select the fields to synchronize.
    g. On the **Target** tab, select the **p_src_system_connection** connection, and click **Save**.
    h. Repeat steps 1 through 7 for other outbound mappings.

Exporting value mappings of crosswalk (optional)

If you have changed the crosswalk values in Reference 360, export the value mappings of the Country and State crosswalks to a CSV file.

1. In Reference 360, under **Explore**, expand **Country** > **Enterprise Country** > **Salesforce Country to Enterprise Country**.
2. Click the **Export Mappings** icon.
3. Enter the file name as `Country_ISO_Conversion.csv` and click **Export**.
4. Click **Explore** > **State** > **Enterprise State** > **Salesforce State to Enterprise State**.
5. Click the **Export Mappings** icon.
6. Enter the file name as `State_ISO_Conversion.csv` and click **Export**.
7. Save the downloaded files in the following directory:

    `<infac360sf_conn_flatfile Configuration Directory>`

Associating picklist fields with reference data code lists

To associate the picklist fields with the reference data code lists for the Organization and Person business entities, configure the Salesforce source system.

1. In Business 360 Console, click **Explore** > **Customer360** > **Salesforce Extension**.
2. Click the **Salesforce** source system.
3. To associate the picklist fields with the reference data code lists for a business entity, click the **Add an asset** icon.
4. Select the business entity.
   You can select the Organization or Person business entity to associate the picklist fields with the reference data code.
5. Click **Select**.
   The **Select an Asset** page opens.
6. Select the corresponding code list for a picklist field.
   The following table shows the picklists with the associated code lists for the business entities:

Picklist	Code List
Address:Country	Salesforce Country
Address:State	Salesforce State

7. Click **Save**.

Exporting records created in Customer 360 to Salesforce

To enable exporting of records created in Customer 360 to Salesforce, perform the following steps:

1. In Data Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
2. Navigate to an outbound mapping. For example, **infac360sf_m_salesforce_person_contact_outbound**.
3. On the **Design** page, select the target object of the mapping.
4. On the **Target** tab, select the **Upsert (Update or Insert)** operation.
5. Select the **Use ID Lookup** option.
6. From the ID list, select **Id**, and click **Save**.

Configuring change data capture

Customer 360 Extension for Salesforce uses the change data capture option to identify the changed records and process them in the incremental data loads. By default, the change data capture option uses the date and time when the record was last modified and the date and time when the record was last synchronized with Customer 360.

You can change the default condition to identify the data change based on your requirement.

Default change data capture condition

The default condition contains multiple conditions joined by the OR operator.

The following expression shows the default condition:

```
lastmodifieddate>$$LastExtractedDate OR (customer360_Sync_Date__c<$
$v_previous_session_start_time OR customer360_Sync_Date__c=NULL)
```

The expression uses the following conditions:

- `lastmodifieddate>$$LastExtractedDate`. Identifies records that are created or updated after the maximum timestamp of the previously processed records.
- `customer360_Sync_Date__c<$$v_previous_session_start_time`. Identifies the records failed during the previous incremental load.
- `customer360_Sync_Date__c=NULL`. Includes all records for the initial load. It also identifies records failed during the initial load.

The default condition considers all three scenarios.

Customizing change data capture condition

You can customize the default condition based on your requirements. You can parametrize the condition to override the default condition by passing a different condition to the in-out parameter.

You can customize the condition by using one of the following methods:

- Update the v_source_filter_condition in the parameter file of the mapping task.
- Edit the current value of the v_source_filter_condition in the mapping task.
  1. On the **Explore** page, navigate to the mapping task.
  2. Click **Edit**.
     The mapping task wizard opens.
  3. Navigate to the **In-Out Parameters** page.
  4. From the **Action** column and in the row that contains the parameter, click **Edit**.
     The **Edit In-Out Parameter** dialog box opens.
  5. Set the value.
  6. Click **OK**.

By default, the mapping task retains the value set during the previous run.

Customizing the parameters for change data capture

You can customize the parameters in the parameter file of a mapping task based on your requirement.

The input parameters can be configured only by editing the mapping task. The in-out parameters can be configured through parameter files or by editing the mapping task.

The following table lists the in-out parameters that you can configure in the mapping task:

Name	Data Type	Length	Default Value	Description
LastExtractedDate	String	255	1900-01-01T00:00:00Z	Date and timestamp of the last time mapping run. For the first mapping run, the parameter uses the default value. The parameter stores the updated maximum value after every run.
v_previous_session_start_time	String	255	1900-01-01T00:00:00Z	Start time of the previous run of the mapping task. Uses the timezone of the Secure Agent on which you run the taskflows.
v_source_filter_condition	String	1000	lastmodifieddate>$$LastExtractedDate OR (customer360_Sync_Date__c<$$v_previous_session_start_time OR customer360_Sync_Date__c=NULL)	Condition that identifies the changed records and processes them in the initial and incremental data loads.

Running the jobs

After integrating Salesforce and Customer 360, you can run the ingress and export jobs.

For more information about the list of available jobs, see "Predefined batch jobs of the Organization business entity" on page 48 and "Predefined batch jobs of the Person business entity" on page 50.

Processing inbound data in real time

You can synchronize Salesforce contact records, person account records, and account-to-contact relationships with Customer 360 SaaS in real time. Records created or updated in Salesforce can be accessed immediately in Customer 360 SaaS.

To configure Salesforce to process records in real time, perform the following tasks:

1. Install the Salesforce managed package in the Salesforce organization.
   For more information about the Salesforce managed package, see Installing the Salesforce Managed Package.
2. Import the Application Integration assets for real-time inbound data synchronization.
   For more information about importing Application Integration assets for real-time inbound data synchronization, see " Importing the Application Integration assets for real-time inbound data synchronization" on page 81.
3. Configure the Salesforce connection.
   For more information about configuring Salesforce connection, see " Configuring the Salesforce connection" on page 81.
4. Configure the Customer 360 connection.

For more information about configuring Customer 360 connection, see "Configuring the Customer 360 connection" on page 81.

5. Configure Application Integration URN mappings for real-time inbound data synchronization.
   For more information about configuring Application Integration URN mappings for real-time inbound data synchronization, see "Configuring Application Integration URN mappings for real-time inbound data synchronization" on page 82.
6. Publish the Application Integration assets for real-time inbound data synchronization.
   For more information about publishing the Application Integration assets for real-time inbound data synchronization, see "Publishing the Application Integration assets for real-time inbound data synchronization" on page 82.
7. Create Salesforce flows for each asset.
   For more information about creating Salesforce flows, see "Creating Salesforce flows" on page 83.

Importing the Application Integration assets for real-time inbound data synchronization

After you install the Salesforce managed package, import the Application Integration assets to Customer 360 SaaS.

Before you import the assets, extract the extension package. For more information about extracting the extension package, see "Downloading and extracting Customer 360 Extension for Salesforce" on page 67.

1. In Application Integration, click **Explore** > **Import**.
2. Navigate to the following file:
   `<Extracted extension package>/4_CAI_Assets/4_CAI_Assets_RT_Inbound.zip`
3. Click **Open**.
   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and click **Import**.
5. On the **My Import/Export Logs** page, verify that the import job is successful.

Configuring the Salesforce connection

After you import the assets, configure the Salesforce connection.

1. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension** > **Salesforce**.
2. To authenticate the Salesforce connection using OAuth, select **OAuth** in the **Authentication Type** list.
3. On the **Properties** tab, configure the connection properties.
4. Click **Save**.
5. Test the connection, and ensure that it's successful.
6. Expand the **Actions** menu, and click **Publish**.

Configuring the Customer 360 connection

After you configure the Salesforce connection, configure the Customer 360 connection.

1. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension** > **Customer360**.

2. On the **Properties** tab, provide the following details:
   - IcsLoginUrl. Provide the URL to log in to Informatica Intelligent Cloud Services in the following format:
     `https://dmp-us.informaticacloud.com/ma`
   - User name. The user name to log in to the Informatica Intelligent Cloud Services URL. The user name is typically an email address.
   - Password. The password associated with the user name.
3. Click **Save**.
4. Expand the **Actions** menu, and click **Publish**.

Configuring Application Integration URN mappings for real-time inbound data synchronization

After you configure connections, create the source system URN mappings to deploy the real-time inbound assets to the cloud.

1. In Application Integration Console, click **Deployed Assets**, and select **Cloud**.
2. Click the **URN Mappings** tab.
3. Create the following URN mappings:

URN	Sample URL
Customer360URL	https://<POD name>-mdm.dm-<POD region>.informaticacloud.com
Reference360URL	https://<POD name>-mdm.dm-<POD region>.informaticacloud.com/rdm-service
SourceSystemID	infac360sf_src_Salesforce

For more information about URN Mappings, see *Monitor* in the Application Integration help.

Updating the runtime environment

Update the runtime environment to run the Secure Agent on the Cloud Server.

1. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension** > **infac360sf_proc_GetCrosswalkId**.
2. Expand the **Actions** menu, and click **Publish**.

   The infac360sf_proc_GetCrosswalkId process publishes successfully.
3. On the **Design** page, click **Start**.
4. In the **infac360sf_proc_GetCrosswalkId Properties** section, click **Start**.
5. Set the **Run On** field value to **Cloud Server**.
6. Click **Save**.

Publishing the Application Integration assets for real-time inbound data synchronization

After you configure the Customer 360 URLs in the Application Integration assets, publish the assets.

Note: To avoid caching issues, use the incognito mode in your browser when you work with the Application Integration assets.

1. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
2. Select an asset, expand the **Actions** menu, and click **Publish**.
   Publish the assets in the following order:
   1. C360SaaSConnector_ListRefDataSets
   2. infac360sf-app-conn-ListRefDataSets
   3. infac360sf_proc_GetCrosswalkId
   4. C360SaaSConnector_GetCrosswalkMapping
   5. infac360sf-app-conn-GetCrosswalkMapping
   6. infac360sf_proc_GetCrosswalkMapping
   7. infac360sf_proc_GetTargetValueFromCrosswalkMapping
   8. infac360sf_srvconn_salesforce_account_inbound_rt
   9. infac360sf-appconn-salesforce-account-inbound-rt
   10. infac360sf_proc_salesforce_account_organization_inbound_rt
   11. infac360sf_srvconn_salesforce_personaccount_inbound_rt
   12. infac360sf-appconn-salesforce-personaccount-inbound-rt
   13. infac360sf_proc_salesforce_personaccount_person_inbound_rt
   14. infac360sf_srvconn_salesforce_contact_inbound_rt
   15. infac360sf-appconn-salesforce-contact-inbound-rt
   16. infac360sf_proc_salesforce_contact_person_inbound_rt
   17. infac360sf_srvconn_salesforce_contact_contactrel_inbound_rt
   18. infac360sf-appconn-salesforce-contact-contactrel-inbound-rt
   19. infac360sf_proc_salesforce_contact_contactrel_inbound_rt

Creating Salesforce flows

After you publish the assets, set up Salesforce outbound messages, and create a Salesforce flow for each process to send the outbound message when a record is created or updated.

Setting up Salesforce outbound messages

Before you configure the Salesforce flows, set up the outbound messages for each Salesforce object.

1. Log in to your Salesforce account.
2. Click the quick access menu ( ), and then click **Setup**.
   The **Setup Home** page appears.
3. Under **PLATFORM TOOLS**, click **Process Automation** > **Workflow Actions** > **Outbound Messages**.
   The **Understanding Workflow** page appears.
4. Select **Don't show me this page again**, and click **Continue**.
   The **Outbound Messages** page appears.
5. Click **New Outbound Message**.
6. Select the object with the fields that you want to include in the message.

The following table lists the Salesforce objects and the corresponding processes for which you must create outbound messages:

Salesforce Object	Process
Account	`infac360sf_proc_salesforce_account_organization_inbound_rt`
Person account	`infac360sf_proc_salesforce_personaccount_person_inbound_rt`
Contact	Create outbound messages for the following processes: - `infac360sf_proc_salesforce_contact_person_inbound_rt` - `infac360sf_proc_salesforce_contact_contactrel_inbound_rt`

7. Click **Next**.
   The **Configure Outbound Message** page appears.

Configuring an outbound message for Salesforce objects

After you select the Salesforce object, enter the details of an outbound message and select the fields that you want to include in the message.

1. In the **Configure Outbound Message** page, for the **Name** field, enter a name for the outbound message.
   For example, enter the name `infac360sf_msg_account_outbound`.
2. In the **Unique Name** field, enter a unique name for the outbound message.
3. In the **Description** field, enter a description for the outbound message.
4. In the **Endpoint URL** field, enter the endpoint URL. To get the endpoint URL from Application Integration, perform the following tasks:
   a. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
   b. For each of the following processes, perform steps 3 through 5:
      - infac360sf_proc_salesforce_contact_person_inbound_rt
      - infac360sf_proc_salesforce_contact_contactrel_inbound_rt
      - infac360sf_proc_salesforce_account_organization_inbound_rt
      - infac360sf_proc_salesforce_personaccount_person_inbound_rt
   c. Select the process.
   d. From the **Actions** menu, select **Properties Detail**.
   e. Copy the **Salesforce Outbound Message URL** to use as the endpoint URL.
5. Select **Send Session ID**.
6. In the **Account fields to send** section, add the required fields from **Available Fields** to **Selected Fields**.
7. Click **Save**.

Building Salesforce flows

After you specify Salesforce outbound messages for the workflow action, create Salesforce flows for each process.

1. Log in to your Salesforce account.
2. Click the quick access menu ( ), and then click **Setup**.

The **Setup Home** page appears.

3. Under **PLATFORM TOOLS**, click **Process Automation** > **Flows**.
   The **Flows** page opens.
4. Click **New Flow**.
   The **New Flow** dialog box appears.
5. Select **Record-Triggered Flow** and click **Create**.
6. Select the object whose records trigger the flow.
7. To configure the trigger, enable **A record is created or updated**.
8. To set the entry conditions, select **Formula Evaluates to True**.
9. In the **Formula** field, enter a condition for the object.
   For more information about the processes for Salesforce objects, see the table in "Setting up Salesforce outbound messages" on page 83.

   The following table lists the conditions that you can configure for each process:

Application Integration Process	Condition
infac360sf_proc_salesforce_account_organization_inbound_rt	OR(AND (ISNEW(), {! $Record.RecordType.DeveloperName} = 'Business_Account', ISBLANK({! $Record.Customer360_Id__c}), ISBLANK({! $Record.Customer360_Sync_Date__c})) , AND (NOT(ISNEW()), {! $Record.RecordType.DeveloperName} = 'Business_Account', NOT(ISCHANGED({! $Record.Customer360_Sync_Date__c})), NOT(ISCHANGED({!$Record.Customer360_Id__c})), NOT(ISBLANK({!$Record.Customer360_Id__c})), NOT(ISBLANK({! $Record.Customer360_Sync_Date__c}))))
infac360sf_proc_salesforce_personaccount_person_inbound_rt	OR(AND (ISNEW(), {! $Record.RecordType.DeveloperName} = 'PersonAccount', ISBLANK({! $Record.Customer360_Id__c}), ISBLANK({! $Record.Customer360_Sync_Date__c})) , AND (NOT(ISNEW()), {! $Record.RecordType.DeveloperName} = 'PersonAccount', NOT(ISCHANGED({! $Record.Customer360_Sync_Date__c})), NOT(ISCHANGED({!$Record.Customer360_Id__c})), NOT(ISBLANK({!$Record.Customer360_Id__c})), NOT(ISBLANK({! $Record.Customer360_Sync_Date__c}))))

Application Integration Process	Condition
infac360sf_proc_salesforce_contact_person_inbound_rt	OR(AND (ISNEW(), ISBLANK({!$Record.Customer360_Id__c}), ISBLANK({!$Record.Customer360_Sync_Date__c})) , AND (NOT(ISNEW()), NOT(ISCHANGED({!$Record.Customer360_Sync_Date__c})), NOT(ISCHANGED({!$Record.Customer360_Id__c})), NOT(ISBLANK({!$Record.Customer360_Id__c})), NOT(ISBLANK({!$Record.Customer360_Sync_Date__c}))))
infac360sf_proc_salesforce_contact_contactrel_inbound_rt	OR (AccountId <> '', ISCHANGED(AccountId))

10. To validate the syntax, click **Check Syntax**.
11. Click **Done**.
12. To add an action to run immediately after the flow is triggered, click **Add element** icon.
13. Click **Action**.
    The **New Action** dialog box appears.
14. Select **Outbound Message**.
15. From the **Action** bar, select the outbound message.
16. Enter the label and API name.
    For example, enter `infac360sf_msg_account_outbound`.
17. Click **Done**, and click **Save**.
    The **Save the flow** dialog box appears.
18. Enter the flow label and flow API name.
    For example, enter `infac360sf_msg_account_outbound`.
19. Click **Save**, and then click **Activate**.
20. Repeat steps 3 through 19 for all Salesforce objects.

Testing the integration for real-time inbound data synchronization

After you create the Salesforce flows, test the integration between Salesforce and Customer 360 SaaS.

Create or update a record in Salesforce. The Application Integration process synchronizes the record to Customer 360 SaaS. Verify that the record appears with the updated data in Customer 360 SaaS.

Processing outbound data in real time

You can synchronize Organization and Person records from Customer 360 SaaS to Salesforce Account, Person Account, and Contact records in real time. Records created or updated in Customer 360 SaaS can be immediately accessed in Salesforce.

Before you configure real-time outbound data synchronization, set up your Kafka streaming platform.

To configure Customer 360 SaaS and Salesforce to process outbound data in real time, perform the following tasks:

1. Install the unmanaged Salesforce package for real-time outbound data synchronization.
2. Configure the custom metadata type.
3. Configure the prerequisite connectors for real-time outbound data synchronization.
4. Import the Application Integration assets for real-time outbound data synchronization.
5. Create a publishing event.
6. Configure a streaming ingestion and replication task.
7. Configure the Application Integration URN Mappings for real-time outbound data synchronization.
8. Publish the Application Integration assets for real-time outbound data synchronization.

Installing the unmanaged Salesforce package for real-time outbound data synchronization

Install the unmanaged Salesforce package to deploy the platform event, custom metadata type, and Apex triggers required in Salesforce for real-time outbound synchronization with Customer 360 SaaS.

Before you begin, perform the following prerequisites:

- Ensure that the Salesforce organization uses the Enterprise or Professional edition.
- Ensure that you have administrator rights to install an unmanaged Salesforce package.
- Ensure that you have enabled the State and Country/Territory picklists for address fields.

1. To access the unmanaged Salesforce package, use the following URLs:
   - Production environment.
     `https://login.salesforce.com/packaging/installPackage.apexp?p0=04tKY0000005SpHYAU`
   - Sandbox environment.
     `https://test.salesforce.com/packaging/installPackage.apexp?p0=04tKY0000005SpHYAU`

   The Salesforce login page appears.
2. Enter your user credentials, and click **Log In**.

   The **Install Informatica Customer 360 Extension for Salesforce Real-time Outbound** page appears.
3. Select **Install for All Users**.
4. Click **Install**.
5. To see detailed components of the package, click **View Components**.
6. After the installation is complete, click **Done**.

   If the installation takes a long time, a message appears stating that you will receive an email when the installation is complete.

   The **Installed Packages** page lists Informatica Customer 360 Extension for Salesforce Real-time Outbound.

Configuring the custom metadata type

Configure the custom metadata type in Salesforce to define real-time outbound data processing settings, such as record creation behavior and default record type.

1. From **Setup**, enter `Custom Metadata Types` in the Quick Find box.
2. Click **Custom Metadata Types**.

3. To manage the custom metadata records in **Customer 360 Real-time Outbound Config**, click **Manage Records**.

   The Customer 360 Real-time Outbound Config page appears.
4. To edit **Real-time Outbound Config**, click **Edit**.
5. Enter the details in the following fields:

Field Name	Description
Create Record If Not Found	Create a record in Salesforce when the record you want to update doesn't exist. By default, this option isn't selected.
Record Type for New Accounts.	Specify the API name of the Salesforce record type that you want to assign to a new Account record.

6. Click **Save**.

Configure the prerequisite connectors for real-time outbound data synchronization

Real-time outbound synchronization requires connectors between Customer 360 SaaS, Kafka, and Salesforce. The connectors capture a change in a Customer 360 SaaS record and publish it to Salesforce.

Configure the following connectors:

- Configure Business 360 Events Connector.

  For more information about Business 360 Events Connector, see *Business 360 Events Connector* in the Data Integration Connectors help.
- Configure Salesforce Streaming Event Connector.

  For more information about Salesforce Streaming Event Connector, see *Salesforce Streaming Event Connector* in the Application Integration help.
- Configure Kafka Connector on the Secure Agent.

  For more information about Kafka Connector, see *Kafka Connector* in the Application Integration help.

Import the Application Integration assets for real-time outbound data synchronization

After you configure the prerequisite connectors, import the Application Integration assets to Customer 360 SaaS to set up the predefined processes and connections required for real-time synchronization with Salesforce.

Before you import the assets, extract the extension package. For more information about extracting the extension package, see "Downloading and extracting Customer 360 Extension for Salesforce" on page 67.

1. In Application Integration, click **Explore** > **Import**.
2. Navigate to the following file:

   ```
   <Extracted extension package>/4_CAI_Assets/4_CAI_Assets_RT_Outbound.zip
   ```
3. Click **Open**.

   The **Import Assets** page lists the assets in the file.
4. Ensure that all the assets are selected, and click **Import**.

5. On the **My Import/Export Logs** page, verify that the import job is successful.

Creating a publishing event

Create a publishing event to specify the business entity changes that trigger real-time data export from Customer 360 SaaS to Salesforce. For example, you can create an event to trigger when Customer 360 SaaS business entity records are created or updated.

In Business 360 Console, create a publishing event for the business entity records that you want to synchronize.

For more information about creating a publishing event, see "Create a publishing event" in *Defining publishing events*.

Configuring a streaming ingestion and replication task

After you create a publishing event, configure a streaming ingestion and replication task to stream real-time change events from Business 360 Events to Kafka.

In Data Integration, use the streaming ingestion and replication task wizard to configure a streaming ingestion and replication task.

For more information about configuring a streaming ingestion and replication task, see *Streaming Ingestion and Replication* in the Data Ingestion and Replication help.

In the task wizard, complete the following steps:

1. Define the basic information of a task, such as the task name, project location, and runtime environment.
2. Configure the source.

   For **Connection**, select the **Business 360 Events** connection, that you configured, and then configure the source properties.
3. Configure the target.

   For **Connection**, select the **Kafka** connection that you configured, and then configure the target properties.
4. Save the task.

Configure Application Integration URN Mappings for real-time outbound data synchronization

After you configure the streaming ingestion and replication task, create the source system URN mappings to deploy the real-time outbound assets to the cloud.

1. In Application Integration Console, click **Deployed Assets**, and select **Cloud**.
2. Click the **URN Mappings** tab.

3. Create the following URN mappings:

URN	Sample URL
SourceSystemID	infac360sf_src_Salesforce
SourceSystemIDOutbound	infac360sf_src_Salesforce
SourceSystemIDSkip	infac360sf_src_Salesforce

For more information about URN Mappings, see *Monitor* in the Application Integration help.

Publishing the Application Integration assets for real-time outbound data synchronization

After you configure the URN mappings in Application Integration, publish the assets to deploy the real-time outbound processes and service connectors to your runtime environment.

Note: To avoid caching issues, use the incognito mode in your browser when you work with the Application Integration assets.

1. In Application Integration, click **Explore** > **Customer360** > **Salesforce Extension**.
2. To publish an asset, select the asset to publish, expand the **Actions** menu, and select **Publish**.

   Publish the assets in the following order:

   1. infac360sf_srvconn_triggerprocess_outbound
   2. infac360sf-appconn-salesforcestreamingevent
   3. infac360sf-appconn-BusinessEventKafka
   4. infac360sf-appconn-triggerprocess-outbound
   5. infac360sf_proc_trigger_kafka_salesforce_outbound_rt
   6. infac360sf_proc_kafka_sf_outbound_rt

Testing the integration for real-time outbound data synchronization

After you publish the Application Integration assets for real-time outbound data synchronization, test the integration between Customer 360 SaaS and Salesforce.

Create or update a record in Customer 360 SaaS whose source system is configured for real-time outbound data synchronization. The Application Integration process publishes the record to Salesforce. Verify that the record appears with the updated data in Salesforce.

Searching for similar records in Customer 360 SaaS using a Lightning component in Salesforce

Use an unmanaged Salesforce package named Informatica Customer 360 Extension for Salesforce to enhance the data onboarding experience in Salesforce. The unmanaged Salesforce package includes a

configurable Lightning component that seamlessly integrates with Customer 360 SaaS to detect and import similar records from Customer 360 SaaS. The unmanaged Salesforce package also contains predefined permission set, named credential, field sets, custom labels, custom metadata types, and custom metadata records configured for the Salesforce Account object.

Download, install, and set up the unmanaged Salesforce package in your Salesforce environment to use the Lightning component. You can use the Lightning component with the Account object by default. However, you can customize the component for other Salesforce objects by using custom metadata types in the unmanaged Salesforce package.

Installing the unmanaged Salesforce package for searching for similar records in Salesforce

Install the unmanaged package to deploy the Informatica Customer 360 Extension for Salesforce components in your Salesforce environment.

Before you begin, perform the following prerequisites:

- Ensure that the Salesforce organization uses the Enterprise or Professional edition.
- Ensure that you have administrator rights to install an unmanaged Salesforce package.
- Ensure that you have enabled the State and Country/Territory picklists for address fields.

1. To access the unmanaged Salesforce package, use the following URLs:
   - Production environment.
     `https://login.salesforce.com/packaging/installPackage.apexp?p0=04tfo000000IZP7`
   - Sandbox environment.
     `https://test.salesforce.com/packaging/installPackage.apexp?p0=04tfo000000IZP7`

   The Salesforce login page appears.
2. Enter your user credentials, and click **Log In**.

   The **Install Informatica Customer 360 Extension for Salesforce** page appears.
3. In the Installation Key field, enter `NOV2025RELEASESBC` as the installation key.
4. Select one of the following options:
   - Install for Admins Only. Only administrator users in the environment can search and import records from Customer 360 SaaS.
   - Install for All Users. All users in Salesforce can search and import records from Customer 360 SaaS.
   - Install for Specific Profiles. Select specific user profiles and allow users with those profiles to search and import records from Customer 360 SaaS.
5. Click **Install**.

   The **Approve Third-Party Access** dialog box appears with the Intelligent Data Management Cloud website details.
6. Grant access to the Intelligent Data Management Cloud website, and click **Continue**.
7. To view detailed components of the package, click **View Components**.
8. After the installation is complete, click **Done**.

   If the installation takes a long time, a message appears stating that you will receive an email when the installation is complete.

   The **Installed Packages** page lists Informatica Customer 360 Extension for Salesforce.

Setting up the unmanaged Salesforce package

After you install the unmanaged Salesforce package, configure the Salesforce environment to use the Lightning component that is included in the package.

To configure the unmanaged Salesforce package, perform the following tasks:

1. Assign the predefined permission set to users.
2. Configure an external credential principal in the named credential.
3. Update remote site settings.
4. Verify whether a platform cache partition exists in the Salesforce environment.
5. Deploy the custom labels.
6. Configure a button on a Salesforce object to launch the Lightning component.
7. Test the Lightning component.

Assigning the predefined permission set to users

In Salesforce, a permission set specify what the users can do within an organization. The unmanaged Salesforce package includes a predefined permission set that provides access to the Informatica Customer 360 Extension for Salesforce Lightning component and Intelligent Data Management Cloud. Assign the permission set to the users.

1. From **Setup**, enter `Permission Sets` in the Quick Find box.
2. Click **Permission Sets**.

   The **Permission Sets** page appears.
3. Click **Infa Mdm SBC Permissions**.

   The permission set details appear.
4. Click **Manage Assignments** > **Add Assignments**.
5. Select the users for whom you want to assign the permission set, and click **Next**.
6. Click **Assign**.

Configuring the named credential

To configure the named credential, you must configure an external credential principal to map the named credential to.

1. From **Setup**, enter `Named Credentials` in the Quick Find box.
2. Click **Named Credentials**.

   The **Named Credentials** page appears.
3. Click **Infa MDM Login NC**.

The **Infa MDM Login NC** page appears with the following prepopulated details:

Field Name	Value
Label	Infa MDM Login NC
Name	Infa_MDM_Login_NC
URL	https://dmp-us.informaticacloud.com
External Credential	Infa MDM Login EC

4. To update the details, click **Edit**. Save the changes.
5. In the **External Credential** field, click **Infa MDM Login EC**.

   The **Infa MDM Login EC** page appears.
6. In the **Principals** section, click the **Actions** menu for the **Infa MDM Creds** parameter and then click **Edit**.
7. In the **Authentication Parameters** section, click **Add**.

   The **Parameter 1** section appears.
8. Specify the Intelligent Data Management Cloud (IDMC) username as the authentication parameter.

   In the **Parameter 1** section, enter `username` in the **Name** field and an IDMC username in the **Value** field.
9. In the **Authentication Parameters** section, click **Add**.

   The **Parameter 2** section appears.
10. Specify the Intelligent Data Management Cloud (IDMC) password as the authentication parameter.

    In the **Parameter 2** section, enter `password` in the **Name** field and the password associated with the IDMC username in the **Value** field.
11. Click **Save**.

Updating remote site settings


The unmanaged Salesforce package includes a predefined remote site settings. To enable the Lightning component to access Intelligent Data Management Cloud (IDMC), update the remote site URL to your MDM SaaS application base URL.

1. From **Setup**, enter **Remote Site Settings** in the Quick Find box.
2. Click **Remote Site Settings**.
3. To update the **Infa_MDM_baseAPI_URL** remote site, click **Edit**.

   The **Remote Site Edit** page appears.
4. In the **Remote Site URL** field, enter the MDM SaaS application base URL.

   To find the MDM SaaS application base URL, log in to IDMC, and click **Customer 360**.

The following image shows the base URL of the MDM SaaS application:

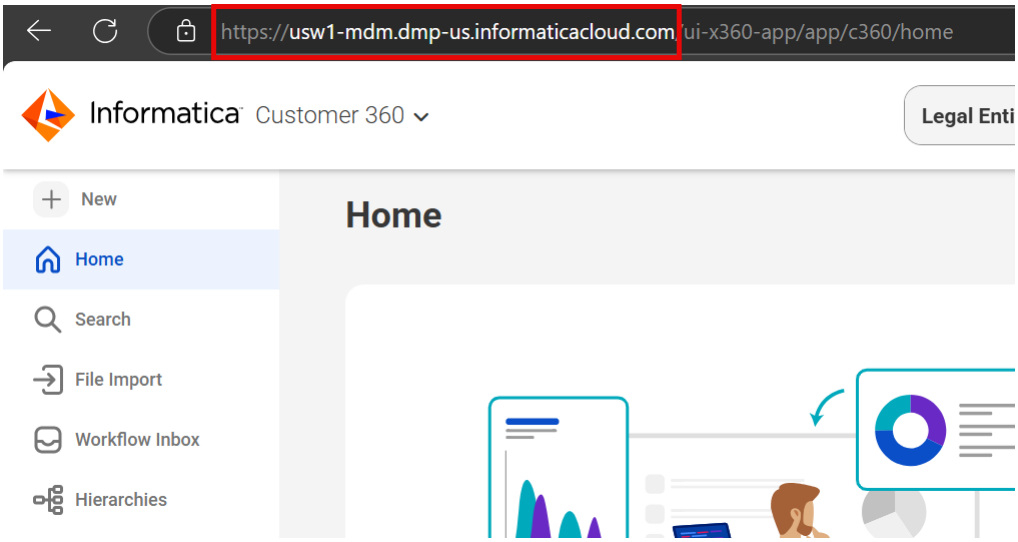

5. Click **Save**.

Creating a cache partition

Ensure that the Salesforce organization has a default platform cache partition. If a platform cache partition isn't included, create a platform cache partition. Ensure that you allocate a session cache for Organization with a minimum value of 1.

For more information about creating a platform cache partition, see the *Salesforce* documentation.

Deploying custom labels in Salesforce

The extension package includes sample custom labels specific to the Account object for the Lightning component in the unmanaged Salesforce package. Use the custom labels to enter the display name of the MDM SaaS field group and section title in a custom metadata record. Custom label values are separated by a semi-colon. Use the semi-colon as the delimiter when updating a custom label or during translation.

To deploy the custom labels in Salesforce, perform the following tasks:

1. Open your browser and go to `https://workbench.developerforce.com`.
2. Select the Salesforce environment where the unmanaged package is installed.
3. Agree to the terms of service, and click **Login with Salesforce**.

   If you are already logged in to Salesforce, proceed to step 5.
4. Enter your user credentials, and click **Log In**.
5. If prompted, click **Allow** to let Workbench access the Salesforce environment.

   The **Workbench** home page appears.
6. On the **migration** tab, click **Deploy**.
7. Click **Choose File**.
8. Navigate to the following file:

   `<Extracted extension package>/Unmanaged Salesforce Package/Custom Labels.zip`
9. Click **Open**.
10. Select **Single Package** and click **Next**.

The deployment summary page appears.

11. Review and click **Deploy**.

    The **Metadata API Process Status** page appears. Verify that the deployment status is marked as succeeded.

Configuring the Lightning component

To launch the Lightning component that searches for similar records in Customer 360 SaaS, you can either override the New button on the Accounts page or create a custom button.

1. From **Setup** > **Object Manager** > **Account**, click **Buttons, Links, and Actions**.
2. To override the New button on the **Accounts** page, perform the following tasks:
   a. For the **New** label, click the down arrow, and select **Edit**.

      The **Override Standard Button or Link** page for the New label appears.

   b. For **Lightning Experience Override**, select **Lightning component**, and select `c:InfaMdmSbc`.

   c. Click **Save**.

   Similarly, you can override the New button for other Salesforce objects.

   Note: To configure the Lightning component for other Salesforce objects by overriding the New button, select the preferred object in step 1.a instead of **Account**.
3. Optionally, to create a custom button on the **Accounts** page and add it to the **List View** button layout, perform the following tasks:
   a. Click **New Button or Link**.

      The **Account Custom Button or Link** page appears.

   b. Specify details for the custom button, such as label, name, and description.

   c. Select **List Button** as the display type.

   d. In the formula editor, enter the following relative URL:

      ```
      /lightning/cmp/c__InfaMdmSbc?c__newactionoverride=false&c__objectApiName=Account
      ```

      This URL launches the Lightning component `InfaMdmSbc` with the specified parameters for `newactionoverride` and `objectApiName`.

   e. Click **Save**.

   f. On the left pane, click **List View Button Layout**.

   g. For the **List View** layout, click the down arrow, and select **Edit**.

      The **Edit Search Layout** page appears with the Account list view.

   h. In the **Custom Buttons** section, select the custom button from **Available Buttons**, and click **Add** to move it to **Selected Buttons**.

   i. Click **Save**.

   Similarly, you can create custom buttons for other Salesforce objects.

   Note: To configure the Lightning component for other Salesforce objects by creating a custom button, select the preferred object in step 2.a instead of **Account**. In step 2.d, specify `objectApiName` of the object in the formula editor.

Testing the Lightning component

After you configure the Lightning component, test the component to ensure that the component works as expected.

1. From **App Launcher**, find and open an application that has the **Accounts** tab configured.
2. On the **Accounts** tab, click **New** or the custom button that you configured to launch the Lightning component.

   The **New Account** dialog box appears.
3. Select a record type, and click **Next**.

   The prompt to select a record type appears only when the Account object has record types configured.
4. Specify the details, and click **Search**.

   If Customer 360 SaaS contains similar records, a list of those records appears.
5. Select a record to view its details, and perform one of the following tasks:
   - If the record exists in Salesforce, click **Open** to view the record in Salesforce.
   - If the record exists in Customer 360 SaaS, click **Import** to import the record.
6. If similar records aren't found, perform one of the following tasks:
   - To create a new record in Salesforce, click **Create New**.
   - To search for another record in Customer 360 SaaS, click **Back** and refine your search criteria.

Customizing the unmanaged Salesforce package

The unmanaged Salesforce package, includes the custom metadata types that define the structure of application metadata for the Lightning component in Salesforce. Each custom metadata type includes custom metadata records that are configured for the Account object. You can edit the existing custom metadata records or create new custom metadata records to customize the package for other Salesforce objects.

The unmanaged Salesforce package includes the following custom metadata types:

Informatica MDM SaaS Configuration

Defines object-level settings that map a Salesforce object to its corresponding MDM SaaS business entity. Each record in this metadata type contains the configuration for a Salesforce object and its integration with an MDM SaaS business entity.

Informatica MDM SaaS Field Setting

Defines field-level mappings between the fields of a Salesforce object and the corresponding fields in the MDM SaaS business entity. Each record in this metadata type specifies how each field in a Salesforce object corresponds to a field in an MDM SaaS business entity.

Informatica MDM SaaS Layout Setting

Defines how information is displayed and organized in the Lightning component for Salesforce objects. The Lightning component renders fields dynamically on each screen based on these layout definitions.

The Informatica MDM SaaS Layout Setting custom metedata type includes the following layout types:

- Search screen fieldset. Defines the fields and layout that users see when performing searches in the Lightning component. This layout configuration helps users quickly identify records by displaying the most relevant information in a concise format.

- Draft screen fieldset. Defines how fields appear when users create a record through the Lightning component. This layout configuration ensures that users have all necessary fields organized logically to facilitate data entry.

You can create various records by specifying field lists and grouping for different layout views.

Note: If you configure record types for Salesforce objects, map each Salesforce object record type to an MDM SaaS business entity.

Customizing an Informatica MDM SaaS Configuration custom metadata record

You can edit the existing custom metadata records or create new custom metadata records to customize the unmanaged Salesforce package for other Salesforce objects.

1. From **Setup**, enter `Custom Metadata Types` in the Quick Find box.
2. Click **Custom Metadata Types**.
3. To manage the custom metadata records in **Informatica MDM SaaS Configuration**, click **Manage Records**.

   The **Informatica MDM SaaS Configurations** page appears with the list of custom metadata records.
4. To create a new custom metadata record, click **New**. To edit an existing metadata record, click **Edit**.

   The **Informatica MDM SaaS Configuration** page appears.
5. Specify details in the following fields:

Field Name	Description
Label	Name of the custom metadata record in Salesforce.
Informatica MDM SaaS Configuration Name	Unique name of the custom metadata record in Salesforce.
Business Entity	Internal ID of a business entity in MDM SaaS that you map with a Salesforce object. **Note:** If you configure record types for Salesforce objects, map each Salesforce object record type to an MDM SaaS business entity.
Record Type	Record type of a Salesforce object that you map with an MDM SaaS business entity. **Note:** If you haven't configured any record types for Salesforce objects, leave this field blank.
Salesforce Object Name	API name of a Salesforce object for which you configure the custom metadata record.
Source System	Internal ID of the source system in MDM SaaS.

Field Name	Description
Search Mode	Type of search to perform, such as search or match. If you select Search, the Search API searches for similar records based on the search criteria. If you select Match, the Search Match API searches for matching records based on the match model configuration.
Display Field 1	Internal ID of a business entity field in MDM SaaS that you want to use as the name of the record on the search results screen.
Display Field 2	Internal ID of a business entity field in MDM SaaS that you want to use to include additional details for a record on the search results screen.
Display Field 3	Optional. Internal ID of a business entity field in MDM SaaS that you want to use to include additional details for a record on the search results screen.
Display Field 4	Optional. Internal ID of a business entity field in MDM SaaS that you want to use to include additional details for a record on the search results screen.

6. Click **Save**.

Customizing an Informatica MDM SaaS Field Setting custom metadata record

You can edit the existing Informatica MDM SaaS Field Setting custom metadata records or create new custom metadata records to customize the unmanaged package for other fields in a Salesforce object.

1. From **Setup**, enter `Custom Metadata Types` in the Quick Find box.
2. Click **Custom Metadata Types**.

   The **Custom Metadata Types** page appears.
3. To manage the custom metadata records in **Informatica MDM SaaS Field Setting**, click **Manage Records**.

   The **Informatica MDM SaaS Field Settings** page appears with the list of custom metadata records.
4. To create a new custom metadata record, click **New**. To edit an existing metadata record, click **Edit**.

   The **Informatica MDM SaaS Field Setting** page appears.
5. Specify details in the following fields:

Field Name	Description
Label	Name of a custom metadata record in Salesforce.
Informatica MDM SaaS Field Setting Name	Unique name of a custom metadata record in Salesforce.
Informatica MDM SaaS Configuration	Informatica MDM SaaS Configuration that you map to the custom metadata record.

Field Name	Description
Salesforce Field API Name	API name of the Salesforce field for which you configure the custom metadata record.
Internal ID of MDM SaaS Field	Internal ID of the business entity field in MDM SaaS that you map to the Salesforce field. **Note:** Map only one MDM SaaS business entity field to each Salesforce field.
Display Name of MDM SaaS Field Group	Name of the field group in the MDM SaaS business entity. **Note:** Use the custom labels, which are included in the extension package, to enter display name values. You can create new custom labels based on your requirements. To access custom labels, enter `Custom Labels` in the Quick Find box, and then select **Custom Labels**. A list of custom labels appears. The custom label values are separated by a semi-colon. For example, the **InfaMdm_RecordDetailSections** custom label contains three values, such as billing address, phone, and mailing address, separated by a semi-colon. To select billing address as the display name, enter `InfaMdm_RecordDetailSections#1`, #1 indicates the order in which billing address is listed. Similarly, to select phone as the display name, enter `InfaMdm_RecordDetailSections#2`.
Internal ID of MDM SaaS Field Group	Internal ID of the field group in the MDM SaaS business entity.
MDM SaaS Field Group Column Order	Display order of columns for fields that belong to a field group within an MDM SaaS business entity. For example, if you want a column to appear first, specify `1`. **Note:** If a field is not part of any field group, leave this field blank.
MDM SaaS Crosswalk ID	Crosswalk identifier for the MDM SaaS business entity picklist. **Note:** • When the code values between Salesforce and MDM SaaS don't match, create crosswalks for reference data sets in both systems and specify the crosswalk identifier. • Leave the field blank if the code values are same across both systems.

6. Click **Save**.

Customizing an Informatica MDM SaaS Layout Configuration custom metadata record

You can edit the existing custom metadata records or create new custom metadata records to customize the unmanaged Salesforce package for different layout views for the Lightning component.

1. From **Setup**, enter `Custom Metadata Types` in the Quick Find box.
2. Click **Custom Metadata Types**.

   The **Custom Metadata Types** page appears.
3. To manage the custom metadata records in **Informatica MDM SaaS Layout Setting**, click **Manage Records**.

   The **Informatica MDM SaaS Layout Settings** page appears with the list of custom metadata records.
4. To create a new custom metadata record, click **New**. To edit an existing metadata record, click **Edit**.

   The **Informatica MDM Layout Setting** page appears.
5. Specify details in the following fields:

Field Name	Description
Label	Name of the custom metadata record in Salesforce.
Informatica MDM SaaS Layout Setting Name	Unique name of the custom metadata record.
Informatica MDM SaaS Configuration	Informatica MDM SaaS Configuration that you map to the custom metadata record.
Layout Type	Indicates whether the layout type is search screen fieldset or draft screen fieldset.
Section Title	Name of the section. Use the custom labels, which are included in the extension package, to enter section title values. You can create new custom labels based on your requirements. **Note:** To access custom labels, enter `Custom Labels` in the Quick Find box, and then select **Custom Labels**. A list of custom labels appears. Custom label values are separated by a semi-colon.
Field Set Name	API name of the field set that is created for the section. **Note:** To access **Account** field sets, go to **Object Manager** > **Account** > **Field Sets**, and find the required field set.
Section Order	Sequence in which a section appears on the search or draft screen layout. For example, to make a section appear first, specify `1`.

6. Click **Save**.

INDEX

A

assets
  Data Integration 52, 53

C

change data capture condition 78

D

Data Integration
  assets 52, 53
  mapping 57

I

Informatica Global Customer Support
  contact information 7
Informatica Intelligent Data Management Cloud
  web site 6

J

jobs
  export 52, 53
  import 52, 53
  predefined 52, 53
  run 80

M

maintenance outages 7
mapping
  Data Integration 57
  field 57

S

status
  IDMC 7
system status 7

T

trust site
  description 7

U

upgrade notifications 7

W

web site 6