Informatica® Cloud Business 360 Console
October 2026

Configure Survivorship

Informatica Cloud Business 360 Console Configure Survivorship
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-16

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- Intelligent Data Management Cloud Communities 5
- IDMC Marketplace 5
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: Introduction to survivorship 7

Chapter 2: Key survivorship concepts 8

Source ranking 8

Rule 9

Source last updated date 12

Block survivorship 12

Deduplication criteria 12

Chapter 3: Dynamic fields survivorship 14

Survivorship for a dynamic field definitions attribute 14

Survivorship for a dynamic field values attribute 15

Chapter 4: Order of execution for survivorship configuration 16

Chapter 5: Configuring survivorship 17

Rules and guidelines for survivorship 17

Step 1. Select objects 18

Step 2. Rank source systems 18

Step 3. Configure survivorship rules 19

Chapter 6: Configuring deduplication for field group entries 21

Chapter 7: Viewing survivorship configuration of attributes 22

Chapter 8: Editing survivorship rules 23

Chapter 9: Editing identical survivorship configurations 25

Select the fields with identical survivorship configurations 25

Edit identical survivorship rules simultaneously 26

Edit identical source rankings simultaneously 27

Chapter 10: Clearing survivorship configuration. 29

Chapter 11: Examples of survivorship. 30

Source records. 30

Survivorship based on default source ranking. 31

Survivorship based on deduplication. 32

Survivorship based on source ranking with block survivorship on the field group. 33

Survivorship based on deduplication on nested field group with block survivorship on the nested field group 34

Survivorship based on source ranking and deduplication with block survivorship on the nested field group. 34

Survivorship based on the minimum survivorship rule. 35

Survivorship based on deduplication with block survivorship on the nested field group and minimum survivorship rule 36

Survivorship based on deduplication and block survivorship on the nested field group with minimum survivorship rule 37

Index. 39

Preface

Use *Configure Survivorship* to configure survivorship rules and source ranking for the business entity fields.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.


The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Introduction to survivorship

Survivorship is the process of creating a master record or the most trusted version of a record from multiple matching source records. The survivorship process begins after the matching process identifies the matching source records. You must run a match and merge job to create master records based on the survivorship configuration. To configure survivorship, you define survivorship rules and rank source systems from which records originate.

The following image shows field data in records from three different source systems being consolidated into a single master record.

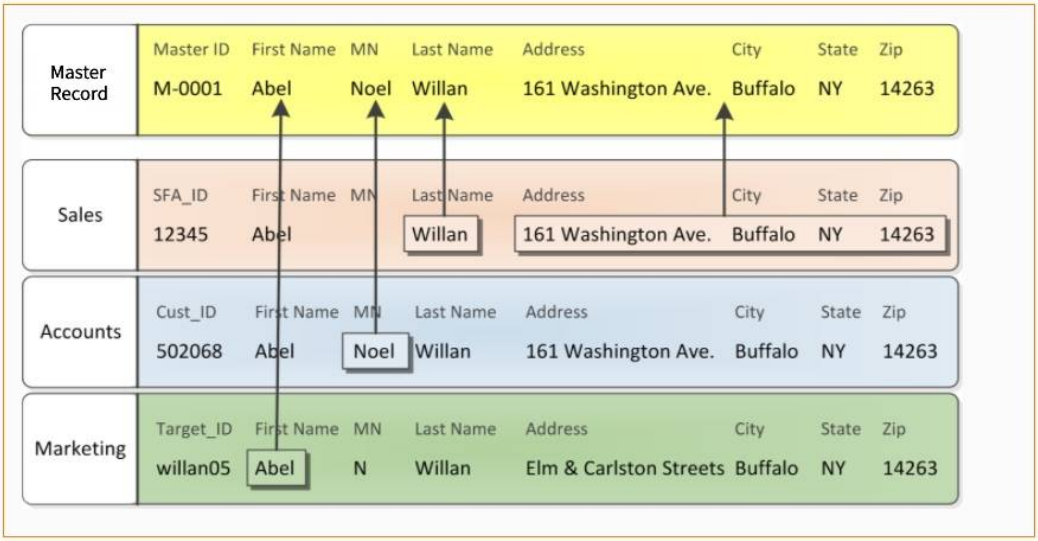

CHAPTER 2

Key survivorship concepts

Survivorship configurations contain rules, source system ranks, block survivorship and deduplication criteria. You must configure survivorship for business entities before users create records.

The survivorship configuration of a field determines the trust score, which indicates the confidence level in the field values. A higher trust score indicates greater confidence in the field value. Before you configure survivorship, understand key concepts, such as source ranking, rules, the source last updated date, block survivorship, and deduplication criteria.

Source ranking


Determines the reliability of source systems. Based on the accuracy and credibility of data that source systems provide, you can assign ranks. A higher rank indicates that the data from that source system is more reliable than the data from a source system with a lower rank.

For example, you can consider the HR source system as the most reliable source system and rank it as 1. In this case, data from the HR source system becomes reliable data for the master record.


You rank source systems based on the reliability of data in different fields. For example, in one source ranking, you can rank a source system as 1 because it provides reliable customer addresses. In another ranking, the same source system can be assigned a lower rank for customer names.

Each ranking is saved with a different label for identification. For example, if you assign rank 1 to source system A and rank 2 to source system B, the system labels the source ranking as Rank 2. If you modify the ranking and assign rank 1 to source system B and rank 2 to source system A, the system labels the modified source ranking as Rank 3 after you apply the changes. The system continues to assign labels incrementally, such as Rank 4 and Rank 5, to every new ranking that you apply.

The following image shows a source ranking labeled as Rank 5 and displays the ranks of the source systems, Default and OpenAI:

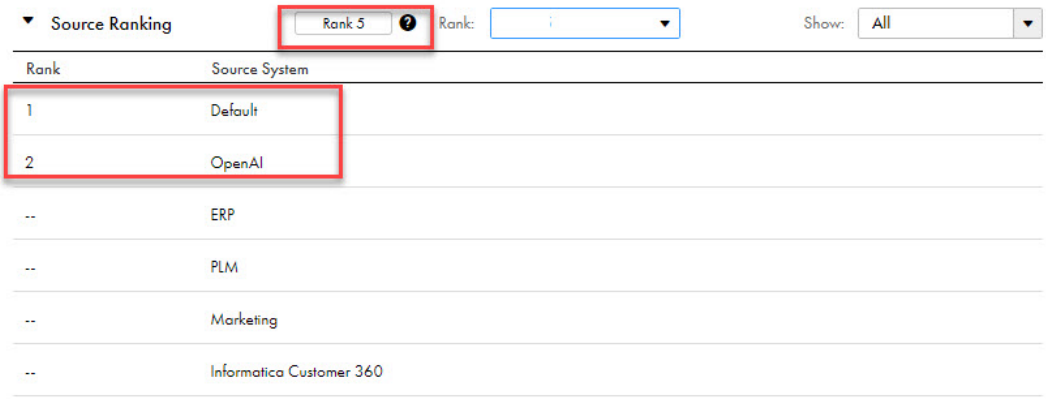

The following image shows a source ranking labeled as Rank 3 and displays the ranks of the source systems, Default, ERP, and PLM:

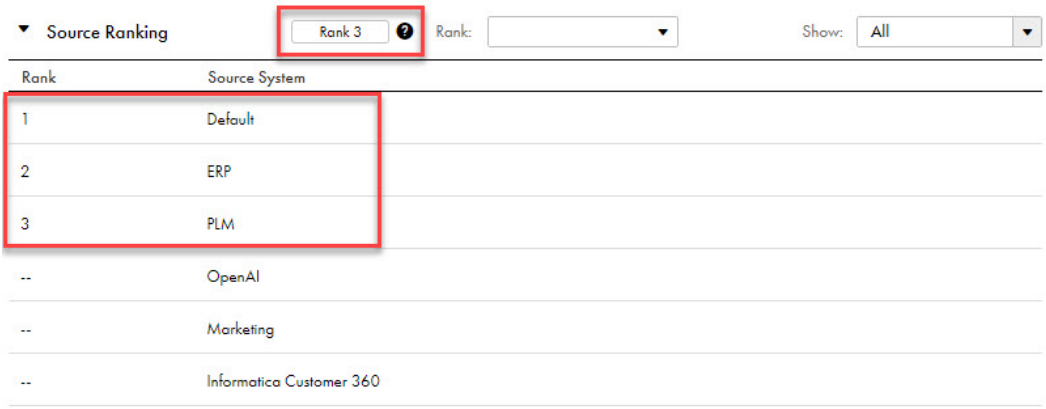

Informatica Customer 360 is the default source system for all actions that you perform in the MDM SaaS user interface.

Note: By default, MDM SaaS labels the Informatica Customer 360 source system as Rank 0 and the Default source system as Rank 1.

Rule

Defines the conditions for one or more fields and field groups or all the fields in the business entity to survive. Based on the survivorship configuration, a rule identifies the trusted value for a field. You can add, edit, or delete survivorship rules.

The conditions to determine the survivorship of fields and field groups can be based on their values or on other root field values.

You can configure the following types of survivorship rules:

Decay


Identifies the trusted value based on the trust levels and the decay rate of the field values. The trust levels indicate the confidence you have in the source system. The decay rate indicates the rate at which

the trust level must decrease over a period of time. You can configure different trust levels and decay rates for each source system.

When the trust level of a source system decreases, the rule identifies another source system with a higher trust level during that time period.

For example, configure the decay rule for the price field group in the Informatica Customer 360 source system with maximum and minimum trust scores of 80 and 40. When you set the decay period to 10, it indicates that the trust score decays from maximum to minimum over that period.

The following image shows the decay rule configuration for the price field group:

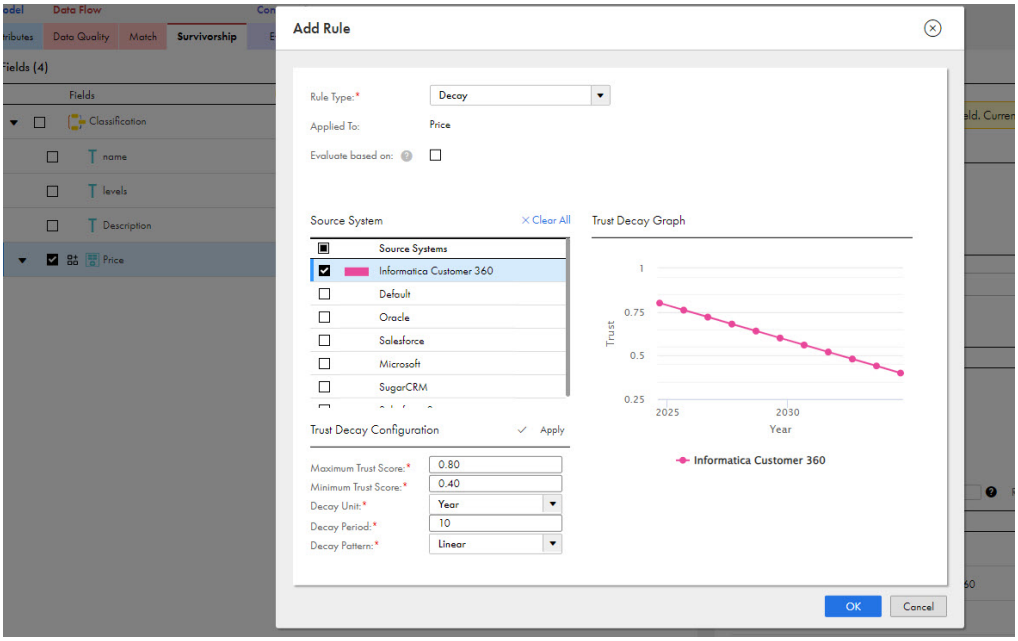

You can configure a decay rule for fields and field groups based on their trust scores or the trust scores of other root fields.

For example, you want patient ID values to survive based on the trust score associated with the age of patients. To accomplish this requirement, configure a decay rule for the Patient ID field based on the Age field. The patient ID of the record that contains the highest trust score for age survives.

If you use a picklist, the code value of the picklist determines survivorship.

Maximum

Identifies the maximum value of a field as the trusted value.

The following table lists the maximum value for different types of fields:

Field Type	Value
Boolean	True
Date	Latest time stamp.
Date and Time	Latest time stamp.
Double	Highest numeric value.

Field Type	Value
Decimal	Highest numeric value.
Integer	Highest numeric value.
Text	Maximum string value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.
Picklist	Maximum code value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.
Business Entity Record	Maximum business ID value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.

You can configure a maximum rule for fields and field group based on their values or values of other root fields. If you use a picklist, the code value of the picklist determines the survivorship.

For example, you want to survive the patient ID value based on the age of the patient. To accomplish this requirement, configure a maximum rule for the Patient ID field based on the Age field.

Minimum

Identifies the minimum value of a field as the trusted value.

The following table lists the minimum value for different types of fields:

Field Type	Value
Boolean	False
Date	Earliest time stamp.
Date and Time	Earliest time stamp.
Double	Lowest numeric value.
Decimal	Lowest numeric value.
Integer	Lowest numeric value.
Text	Minimum string value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.
Picklist	Minimum code value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.
Business Entity Record	Minimum business ID value based on lexicographical sort order. Sorting is case-sensitive. In sorted data, uppercase letters come before lowercase letters.

You can configure a minimum rule for fields and field group based on their values or values of other root fields. If you use a picklist, the code value of the picklist determines the survivorship.

For example, you want to survive the patient ID value based on the age of the patient. To accomplish this requirement, configure a minimum rule for the Patient ID field based on the Age field.

Source last updated date

Helps identify the value to survive during merge process. When you ingress incremental changes from source systems, the `Source Last Updated Date` field determines the survivorship of a field value. If the trust score and source ranking have the same value, the source last updated date field determines the survivorship of the field.

Note: If you disable the `Source Last Updated Date` field of the source record, the trust score, source ranking, and last updated date determine survivorship.

Block survivorship

Allows fields and field groups nested within a field group to be treated as a single unit or block. When you enable a field group to survive as a block, the survivorship configuration applies to all the fields and field groups within the block.

By default, a field group is treated as a block. All fields and field groups that are nested within a field group have the same survivorship configuration and survive as a block. Field group entries from a patch record survive as a block. You can disable a field group from surviving as a block and set specific configurations for fields and field groups nested within it. Even though you disable a field group from surviving as a block, field groups nested within the field group survive as a block. You can disable the nested field group from surviving as a block and configure individual survivorship configurations for the fields within the nested field group.

For example, consider a bank field group with a bank name, bank account number, and bank address. If you disable block survivorship for the bank field group, you can configure different survivorship rules for the bank name and account number.

In the current release, each field group within a dynamic field values attribute is considered a block.

If you enable block survivorship, any existing survivorship configuration of fields and nested field groups is overridden.

Deduplication criteria

Use the deduplication criteria to identify and merge duplicate field group values. You can specify fields within a field group as the criteria for deduplication. The field group values survive based on survivorship rules.

You can set deduplication criteria for mandatory fields, nested field groups, and optional fields. The identification of duplicate values isn't case-sensitive.

For example, consider an address field group to which you apply deduplication criteria to address line 1 and postal code. Duplicate field values of address line 1 and postal code entries are identified and are merged into one.

The following table lists the address line 1 and postal code values:

Display Name	Field Value	Field Value	Field Value
Address Line 1	131 Toronto Street	134 Toronto St	134 Toronto St
Postal Code	L5V158	L5V159	L5V159

The following table lists the address line 1 and postal code values after deduplication is applied:

Display Name	Field Value	Field Value
Address Line 1	131 Toronto Street	134 Toronto St
Postal Code	L5V158	L5V159

CHAPTER 3

Dynamic fields survivorship

To survive the best version of dynamic fields, you can configure survivorship for the dynamic field definitions and dynamic field values attributes.

When you configure survivorship, a dynamic field definitions attribute appears as a single object. A dynamic field values attribute appears as an expandable element in the tree, similar to a nested field group, and lists all the fields and field groups of the dynamic pool.

Survivorship for a dynamic field definitions attribute

You can configure survivorship for a dynamic field definitions attribute as a single object. You can use source system ranks and survivorship rules for the survivorship configuration.

You can set a decay rule for dynamic field definitions based on other root fields. Based on the rules and source system ranks, all the dynamic field definitions and their properties from the trusted record survive.

For example, a match pair has a record from the ERP source system and another record B from the PLM source system. The ERP source system is ranked higher than the PLM source system. When you merge the match pair, all the dynamic field definitions and their properties in the record from the ERP source system survive in the master record.

The following table lists dynamic field definitions and their properties in the match pair and the merged master record:

Dynamic Field Definitions	Record from ERP	Record from PLM	Master Record
Color	Required Inherits to child	Not required Doesn't inherit to child	Required Inherits to child
Resolution	Not required Doesn't inherit to child	Required Inherits to child	Not required Doesn't inherit to child
Dimensions	Required Doesn't inherit to child	-	Required Doesn't inherit to child
Manufacturer	-	Not required Doesn't inherit to child	-

Survivorship for a dynamic field values attribute

You can configure survivorship for a dynamic field values attribute that appears as an expandable element in the tree, similar to a nested field group. A dynamic field values attribute lists all the fields and field groups of the dynamic pool.

In the current release, each field group within a dynamic field values attribute is considered a block. All fields and field groups that are nested within a dynamic field group have the same survivorship configuration and survive as a block. You can also configure rules for dynamic field value attributes based on their values or those of other root fields.

CHAPTER 4

Order of execution for survivorship configuration

To identify the most trusted field values from multiple source records, MDM SaaS uses the survivorship configuration. The survivorship configuration includes survivorship rules and source system ranking. MDM SaaS also uses the source last updated date and last updated date in MDM SaaS to identify the trusted values.

The following image shows the order of execution for survivorship configuration:



The following table lists the order in which survivorship configurations are executed:

Survivorship configuration	Description
Survivorship rules	The field value that satisfies the survivorship rule survives. If fields have the same value or trust score, MDM SaaS proceeds to the next comparison. For example, when a minimum rule is applied to the availability date field, the value with the earliest time stamp survives. Consider two source records with availability date values of Jan 1, 2024, and Jan 3, 2024. The value of Jan 1, 2024, survives. However, if records share the same date or trust score, MDM SaaS can't determine which field value to survive since there isn't a single value that can be trusted. In such cases, MDM SaaS proceeds to the next comparison.
Source system ranking	If trust scores differ, the value from the highest-ranked source system survives. If trust scores are equal, MDM SaaS proceeds to the next comparison.
Source last updated date	The field value that belongs to a record with the most recent source last updated date survives. However, when records have the same source last updated date, MDM SaaS can't determine the value to survive. In such cases, MDM SaaS proceeds to the next comparison.
Last updated record in MDM SaaS	The field value that belongs to a record with the most recent update in MDM SaaS survives. However, when records have the same last updated date, MDM SaaS can't determine the value to survive. In such cases, MDM SaaS proceeds to the next comparison.
Latest created record in MDM SaaS	The field value of the record that was most recently created in MDM SaaS survives.

CHAPTER 5

Configuring survivorship

To create a trusted master record from multiple source records, configure survivorship. When you configure survivorship, you rank source systems by their reliability and configure survivorship rules.

You can rank source systems and configure survivorship rules for business entities. When you configure survivorship for a business entity, all fields and field groups of the business entity inherit the configuration. Additionally, you can configure survivorship for specific fields and field groups that differ from the configuration for the business entity.

By default, a field group is treated as a block. All fields and field groups that are nested within a field group have the same survivorship configuration and survive as a block. Field group entries from a patch record survive as a block. You can disable a field group from surviving as a block and set specific configurations for fields and field groups nested within it. Even though you disable a field group from surviving as a block, field groups nested within the field group survive as a block. You can disable the nested field group from surviving as a block and configure individual survivorship configurations for the fields within the nested field group.

To configure survivorship, perform the following tasks:

1. Select business entities, field groups, or fields that you want to configure survivorship for.
2. Rank source systems based on reliability.
3. Configure survivorship rules for business entities, field groups, or fields.

Rules and guidelines for survivorship

Consider the following rules and guidelines for survivorship:

- The survivorship configuration uses the current downgrade trust score that you define for data quality. If the downgrade trust score for a field is lower than the survivorship trust score, the system considers the downgrade trust score for survivorship.
- To ensure that changes you make from the user interface survive, assign Informatica Customer 360 the highest source rank. For example, if a source system that you defined ranks higher than Informatica Customer 360, a field group entry that you delete from the user interface doesn't survive because Informatica Customer 360 doesn't take precedence.
- If you disable block survivorship for a field group, parent picklists and their dependent picklists must have the same survivorship rules.
- Ensure that block survivorship is enabled for a field group that has a DaaS rule association for real-time address verification.
- If an attribute has survivorship rules and data quality rules with trust score downgraded, the survivorship rules take precedence over the data quality rules.

- When you enable a field group to survive as a block, the configuration of the block takes precedence over that of individual fields and nested field groups.
- MDM SaaS applies deduplication criteria to field group values before applying survivorship rules and source system ranking.
- After one of the duplicate field values or field group entries survive based on specific fields within a field group that are set as the deduplication criteria, you can't override field values within the field group. You can't override field values if a source system has a different field group ID from another source system.
- In hierarchical and non-hierarchical relationships, the most recently updated relationship attribute value survives. For example, in the Employee relationship, if John's effective start date was initially November 20, 2025, and later updated to November 24, 2025, the November 24, 2025 start date survives.

Step 1. Select objects

You can configure survivorship rules and rank source systems for business entities, fields, field groups, or nested field groups. To configure survivorship, you start by selecting one of these objects.

1. On the **Explore** page, open the business entity, and click the **Survivorship** tab.
2. Select a business entity, fields, or field groups, and click **Edit All**.

   When you search for a field or a field group that belongs to another field group, the parent field group appears as a search result. You can expand the parent field group to view the field or field group that you search for.
3. If you select a business entity, select one of the following options:
   - Override field configuration. Applies the configuration to all fields and field groups and overrides their existing configuration to inherit business entity configuration.
   - Retain field configuration. Applies the configuration to fields and field groups that don't have separate configurations.
4. If you select fields or field groups nested within a field group, perform the following steps:
   1. Select the parent field group.
   2. Clear **Survive as a block**, and click **Apply**.
   3. Clear the field group or nested field group that you disabled from surviving as a block, and select the fields or nested field groups.
   4. If you select multiple fields and nested field groups, click **Edit All**.

Step 2. Rank source systems


After you select the objects that you want to configure survivorship for, rank the source systems that contribute values to the business entity.

1. To add or remove a source system from the source ranking, select the source system, and click **Add** or **Remove** in the **Source Ranking** section.
2. To change the source ranking, select a source system, and use the up or down arrow.

The system saves the source ranking and assigns a label to each source ranking. If your source ranking matches the existing ranking, the label automatically appears.

3. To use an existing source ranking, select a source ranking from the **Rank** list.

   The following image shows the list of source rankings and the label, Rank 3, generated for the new source ranking:

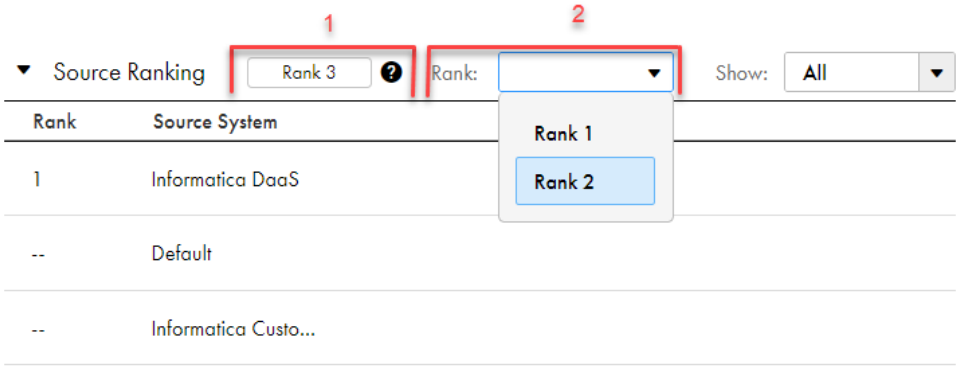

   1. Rank 3 is the label assigned to the source ranking of the Informatica DaaS source system.
   2. Rank list with existing source rankings, Rank 1 and Rank 2.

4. Click **Apply**, and then click **Save**.

Step 3. Configure survivorship rules

After you rank the source system, configure a survivorship rule to determine the best version of the truth for the selected objects.

1. To configure a survivorship rule for the selected objects, click **Add Rule** in the **Rule** section.
   The **Add rule** dialog box appears.
2. From the Rule Type list, select one of the following rule types:

Rule Type	Description
Decay	Identifies the trusted value based on maximum and minimum trust scores of a source system and the rate at which the scores decay.
Maximum	Identifies the trusted value based on the maximum value of a field. Not applicable to business entities and dynamic field definitions attributes. Applies to field groups only if it survives based on the value of a root field.
Minimum	Identifies the trusted value based on the minimum value of a field. Not applicable to business entities and dynamic field definitions attributes. Applies to field groups only if it survives based on the value of a root field.

3. If you selected the decay rule, configure trust decay for the source systems.
   a. Select the source systems for which you want to configure the decay rule.
   b. Configure the following trust decay properties for the source systems:

Trust Decay Property	Description
Maximum Trust Score	The score to determine the start of trust decay. Enter a value from 0 through 1.
Minimum Trust Score	The minimum trust score that the source system can have. The value must be equal to or less than the maximum trust score.
Decay Unit	The time unit of the decay period.
Decay Period	Time taken for the trust score to decay from the maximum to the minimum score. The maximum value for the decay units is 999.
Decay Pattern	The pattern in which the trust score decreases during the decay period. You can view the decay pattern in the trust decay graph. You can configure one of the following decay patterns: - Linear. Shows a straight line from the maximum to minimum trust score. - Rapid Initial Slow Later. Shows a concave curve. Trust score decreases rapidly at the beginning of the decay period and slows down towards the end of the decay period. - Slow Initial Rapid Later. Shows a convex curve. Trust score decreases slowly at the beginning of the decay period and decreases rapidly towards the end of the decay period.

   c. Click **Apply**.

      The trust decay graph appears.

   If you select multiple source systems with different decay units, the highest decay unit of the selected source systems is used to display graphs for all the source systems. For example, if the selected source systems have days, hours, and minutes as decay units, the graph uses days to plot graphs for all source systems.

4. To configure survivorship based on the value of another root field, select **Evaluate based on**, and select a root field.
5. Click **OK**.
6. Click **Apply**, and then click **Save**.

CHAPTER 6

Configuring deduplication for field group entries

To identify and merge duplicate field group entries, you can set fields within a field group or its nested field groups as deduplication criteria.

1. From the **Explore** page, open the business entity.
2. On the **Survivorship** page, select the field group for which you want to configure deduplication.
3. From the list in the **Deduplication** section, select fields that you want to use as deduplication criteria.
4. Click **Apply**, and then click **Save**.

CHAPTER 7

Viewing survivorship configuration of attributes

You can view the survivorship configuration of a business entity field on the **Attributes** tab.

1. From the **Explore** page, open the business entity.
2. On the **Attributes** tab, click the field that you want to view the survivorship configuration for.
3. On the **Properties** panel, click **Survivorship**.

   The survivorship configuration of the field appears.

CHAPTER 8

Editing survivorship rules

After you configure a survivorship rule for a field, you can update the survivorship rule based on your requirement. After you update the survivorship configuration, trust scores of the business entity records aren't recalculated. When users edit the records, the trust scores are recalculated for the records.

1. Open the business entity from the **Explore** page.
2. On the **Survivorship** tab, select the field.
3. To edit a survivorship rule for the selected object, in the **Rule** section, click the **Edit** icon.
   The **Rule Configuration** dialog box appears.
4. From the Rule Type list, select the rule type.
5. If you selected the decay rule, configure trust decay for the source systems.
   a. Select the source systems for which you want to configure the decay rule.
   b. Configure the following trust decay properties for the source systems:

Trust Decay Property	Description
Maximum Trust Score	The score to determine the start of trust decay. Enter a value from 0 through 1.
Minimum Trust Score	The minimum trust score that the source system can have. The value must be equal to or less than the maximum trust score.
Decay Unit	The time unit of the decay period.
Decay Period	Time taken for the trust score to decay from the maximum to the minimum score. The maximum value for the decay units is 999.
Decay Pattern	The pattern in which the trust score decreases during the decay period. You can view the decay pattern in the trust decay graph. You can configure one of the following decay patterns: - Linear. Shows a straight line from the maximum to minimum trust score. - Rapid Initial Slow Later. Shows a concave curve. Trust score decreases rapidly at the beginning of the decay period and slows down towards the end of the decay period. - Slow Initial Rapid Later. Shows a convex curve. Trust score decreases slowly at the beginning of the decay period and decreases rapidly towards the end of the decay period.

c. Click **Apply**.

The trust decay graph appears.

If you select multiple source systems with different decay units, the highest decay unit of the selected source systems is used to display graphs for all the source systems. For example, if the selected source systems have days, hours, and minutes as decay units, the graph uses days to plot graphs for all source systems.

6. To configure survivorship based on the value of another root field, select **Evaluate based on**, and select a root field.
7. Click **OK**, and then click **Apply**.
8. Click **Save**.

CHAPTER 9

Editing identical survivorship configurations

When fields and field groups, dynamic field definitions, and dynamic field values attributes have the same source ranking and survivorship rules, you have the option to edit these configurations simultaneously. After you update the survivorship configuration, trust scores of the business entity records aren't recalculated. When users edit the records, the trust scores are recalculated for the records.

You can easily identify fields and field groups with the same survivorship configurations by an icon. To edit identical survivorship configurations of multiple fields and field groups simultaneously, perform the following tasks:

- Select the fields and field groups with identical survivorship configurations.
- Edit survivorship rules for the selected fields and field groups simultaneously.
- Edit source rankings for the selected fields and field groups simultaneously.

Select the fields with identical survivorship configurations

Before you edit fields and field groups with identical survivorship configurations, you need to identify and select these fields and field groups.

1. On the **Explore** page, open the business entity, and click the **Survivorship** tab.

2. To select fields and field groups that have identical survivorship rules and source rankings, click the **Select fields with identical rules** icon.



Fields and field groups that have identical survivorship configurations are highlighted and selected.

Edit identical survivorship rules simultaneously

After you select the fields with identical survivorship configurations, you can edit the identical survivorship rules of the fields and field groups simultaneously.

1. To edit the survivorship rules of the fields and field groups, in the **Rule** section, click **Edit**.
   The **Edit rule** dialog box appears.
2. From the Rule Type list, select one of the following rule types:

Rule Type	Description
Decay	Identifies the trusted value based on maximum and minimum trust scores of a source system and the rate at which the scores decay.
Maximum	Identifies the trusted value based on the maximum value of a field. Not applicable to business entities and dynamic field definitions attributes. Applies to field groups only if it survives based on the value of a root field.
Minimum	Identifies the trusted value based on the minimum value of a field. Not applicable to business entities and dynamic field definitions attributes. Applies to field groups only if it survives based on the value of a root field.

3. If you selected the decay rule, configure trust decay for the source systems.
   a. Select the source systems for which you want to configure the decay rule.

b. Configure the following trust decay properties for the source systems:

Trust Decay Property	Description
Maximum Trust Score	The score to determine the start of trust decay. Enter a value from 0 through 1.
Minimum Trust Score	The minimum trust score that the source system can have. The value must be equal to or less than the maximum trust score.
Decay Unit	The time unit of the decay period.
Decay Period	Time taken for the trust score to decay from the maximum to the minimum score. The maximum value for the decay units is 999.
Decay Pattern	The pattern in which the trust score decreases during the decay period. You can view the decay pattern in the trust decay graph. You can configure one of the following decay patterns: - Linear. Shows a straight line from the maximum to minimum trust score. - Rapid Initial Slow Later. Shows a concave curve. Trust score decreases rapidly at the beginning of the decay period and slows down towards the end of the decay period. - Slow Initial Rapid Later. Shows a convex curve. Trust score decreases slowly at the beginning of the decay period and decreases rapidly towards the end of the decay period.

c. Click **Apply**.

The trust decay graph appears.

If you select multiple source systems with different decay units, the highest decay unit of the selected source systems is used to display graphs for all the source systems. For example, if the selected source systems have days, hours, and minutes as decay units, the graph uses days to plot graphs for all source systems.

4. To configure survivorship based on the value of another root field, select **Evaluate based on**, and select a root field.
5. Click **OK**.
6. Click **Apply**, and then click **Save**.


Edit identical source rankings simultaneously

After you select the fields with identical survivorship configurations, you can edit identical source rankings of the fields and field groups.

1. To add or remove a source system from the source ranking, select the source system, and click **Add** or **Remove** in the **Source Ranking** section.
2. To change the source ranking, select a source system, and use the up or down arrow.

   The system saves the source ranking and assigns a label to each source ranking. If your source ranking matches the existing ranking, the label automatically appears.
3. To use an existing source ranking, select a source ranking from the **Rank** list.

The following image shows the list of source rankings and the label, Rank 3, generated for the new source ranking:

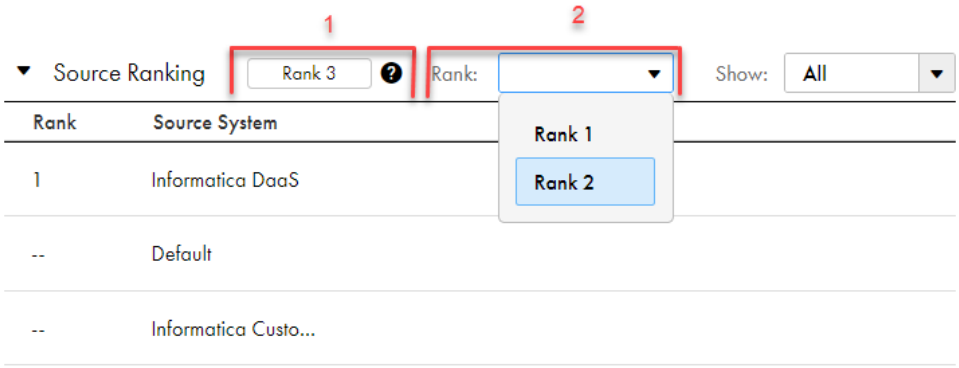

1. Rank 3 is the label assigned to the source ranking of the Informatica DaaS source system.
2. Rank list with existing source rankings, Rank 1 and Rank 2.

4. Click **Apply**, and then click **Save**.

CHAPTER 10

Clearing survivorship configuration

You can clear the survivorship configuration of all the fields and field groups of a business entity or clear the survivorship configuration of one or more fields and field groups.

You can clear survivorship configurations such as rules, source ranking, and deduplication criteria. When you clear the survivorship configuration of fields and field groups, these fields and field groups inherit the survivorship configuration of the business entity. If a field group is disabled from surviving as a block, it remains disabled even after you clear the survivorship configurations.

You can clear survivorship configurations of a business entity or its fields and field groups on the Survivorship page.

The following table lists the tasks and actions to clear survivorship configurations:

Clear Survivorship Configuration Task	Actions
Clear for all the fields and field groups of a business entity.	Click **Clear All** and confirm the action.
Clear for multiple fields and field groups of a business entity.	Select the fields and field groups. Click **Clear All** and confirm the action.
Clear for a single business entity field.	Select the field and click **Clear**.
Clear for fields and field groups that share the same survivorship configuration.	To select fields, click the **Select fields with identical rules** icon. Click **Clear All** and confirm the action.

CHAPTER 11

Examples of survivorship

When you have multiple source records, MDM SaaS chooses the best values from each to create a reliable master record based on the survivorship configuration. The survivorship configuration includes source system ranking, deduplication settings, block survivorship setting, and survivorship rules.

In the examples, consider two source records that originate from different source systems. You can explore how the values of the root fields, field groups, and nested field groups survive through different source rankings, survivorship rules, block survivorship settings and deduplication strategies.

Source records

Consider two source records that belong to Sales and Marketing. Prices is a field group, and Price details is a nested field group within the Prices field group. You use the default source ranking where Sales is ranked 1 and Marketing is ranked 2. By default, block survivorship is enabled for the Prices field group.

The following record is from Sales:

Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A011	USD	6
					A012	USD	7
		A02	Competitive Price	Competitive Price of Pasta	A021	USD	8

The following record is from Marketing:

Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	B011	USD	5
					B012	CAD	8
		B02	Competitive Price	Competitive Price of Pasta	B021	CAD	9
					B022	USD	9

Survivorship based on default source ranking

When you apply the default source ranking, where Sales is ranked 1, and Marketing is ranked 2, the Sales source system takes precedence because it is ranked 1. Field groups allow multiple values, and the resulting master record contains values from both the Sales and Marketing source systems.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
			B01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	CAD	8
			B02	Competitive Pasta	Competitive Price of Pasta	B021	CAD	9
						B022	USD	9
Source record from Sales	**Barilla Spaghetti Pasta**	**9**	**A01**	**Selling Price**	**Selling Price of Pasta**	**A011**	**USD**	**6**
						A012	**USD**	**7**
			A02	**Competitive Price**	**Competitive Price of Pasta**	**A021**	**USD**	**8**

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Source record from Marketing	Barilla Spaghetti	8	**B01**	**Selling Price**	**Selling Price of Pasta**	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	**Competitive Price**	**Competitive Price of Pasta**	**B021**	**CAD**	**9**
						B022	**USD**	**9**

Survivorship based on deduplication

Apply the default sourcing ranking and deduplication based on the Price type field. The resulting master record eliminates duplicate values of price type.

The following table lists the master record with highlighted values from the Sales source system:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
Source record from Sales	**Barilla Spaghetti Pasta**	**9**	**A01**	**Selling Price**	**Selling Price of Pasta**	**A011**	**USD**	**6**
						A012	**USD**	**7**
			A02	**Competitive Price**	**Competitive Price of Pasta**	**A021**	**USD**	**8**
Source record from Marketing	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	CAD	8
			B02	Competitive Price	Competitive Price of Pasta	B021	CAD	9
						B022	USD	9

Survivorship based on source ranking with block survivorship on the field group

Apply the default source ranking, deduplication based on the Price type field. Remove block survivorship on the Prices field group. Block survivorship is enabled for the Price details nested field group.

The resulting master record contains the values from the Prices field group that has deduplicated values for unique selling and competitive prices. However, the Price details nested field group is not deduplicated, so the master record contains values from the Sales and Marketing source systems.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
						B011	USD	5
						B012	CAD	8
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
						B021	CAD	9
						B022	USD	9
Source record from Sales	**Barilla Spaghetti Pasta**	**9**	**A01**	**Selling Price**	**Selling Price of Pasta**	**A011**	**USD**	**6**
						A012	**USD**	**7**
			A02	**Competitive Price**	**Competitive Price of Pasta**	**A021**	**USD**	**8**
Source record from Marketing	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	Competitive Price	Competitive Price of Pasta	**B021**	**CAD**	**9**
						B022	**USD**	**9**

Survivorship based on deduplication on nested field group with block survivorship on the nested field group

Apply the default source ranking, and deduplication based on the Price type and Currency fields without block survivorship on the Prices field group. Block survivorship is enabled for the Price details nested field group. The resulting master record contains unique Price type and Currency values.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A012	USD	7
						B012	CAD	8
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
						B021	CAD	9
Source record from Sales	**Barilla Spaghetti Pasta**	**9**	**A01**	**Selling Price**	**Selling Price of Pasta**	A011	USD	6
						A012	**USD**	**7**
			A02	**Competitive Price**	**Competitive Price of Pasta**	**A021**	**USD**	**8**
Source record from Marketing	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	**CAD**	**8**
			B02	Competitive Price	Competitive Price of Pasta	**B021**	**CAD**	**9**
						B022	USD	9

Survivorship based on source ranking and deduplication with block survivorship on the nested field group

Apply Marketing source ranking for the Price details field group. Other fields use default source ranking and deduplication based on Price type and Currency. Remove block survivorship on the Prices field group. Block

survivorship is enabled for the Price details nested field group. The resulting master contains Price type and Currency unique to the Marketing source system.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	CAD	8
			A02	Competitive Price	Competitive Price of Pasta	B021	CAD	9
						B022	USD	9
Source record from Sales	**Barilla Spaghetti Pasta**	**9**	**A01**	**Selling Price**	**Selling Price of Pasta**	A011	USD	6
						A012	USD	7
			A02	**Competitive Price**	**Competitive Price of Pasta**	A021	USD	8
Source record from Marketing	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	Competitive Price	Competitive Price of Pasta	**B021**	**CAD**	**9**
						B022	**USD**	**9**

Survivorship based on the minimum survivorship rule

Apply the default source ranking and the minimum survivorship rule to the Name and GTIN fields based on the minimum GTIN value. The resulting master record contains the Name field value based on the minimum GTIN field value.

Block survivorship is enabled for the Prices field group, and deduplication is not applied.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti	8	A01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
			B01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	CAD	8
			B02	Competitive Pasta	Competitive Price of Pasta	B021	CAD	9
						B022	USD	9
Source record from Sales	Barilla Spaghetti Pasta	9	**A01**	**Selling Price**	**Selling Price of Pasta**	**A011**	**USD**	**6**
						A012	**USD**	**7**
			A02	**Competitive Price**	**Competitive Price of Pasta**	**A021**	**USD**	**8**
Source record from Marketing	**Barilla Spaghetti**	**8**	**B01**	**Selling Price**	**Selling Price of Pasta**	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	**Competitive Price**	**Competitive Price of Pasta**	**B021**	**CAD**	**9**
						B022	**USD**	**9**

Survivorship based on deduplication with block survivorship on the nested field group and minimum survivorship rule

Apply the default source ranking and deduplication based on the Price type. Remove block survivorship on the Prices field group. Block survivorship is enabled for the Price details nested field group. Apply the minimum survivorship rule to the Name, GTIN, Prices field group, and Price details nested field group based on the minimum GTIN value.

The resulting master record contains the Name, GTIN, Prices, Price details field, and field group values based on the minimum GTIN value. However, the Price details nested field group is not deduplicated.

The following table lists the master record with highlighted values from both Sales and Marketing source systems:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
						B011	USD	5
						B012	CAD	8
			B02	Competitive Price	Competitive Price of Pasta	A021	USD	8
						B021	CAD	9
						B022	USD	9
Source record from Sales	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	**A011**	**USD**	**6**
						A012	**USD**	**7**
			A02	Competitive Price	Competitive Price of Pasta	**A021**	**USD**	**8**
Source record from Marketing	**Barilla Spaghetti**	**8**	**B01**	**Selling Price**	**Selling Price of Pasta**	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	**Competitive Price**	**Competitive Price of Pasta**	**B021**	**CAD**	**9**
						B022	**USD**	**9**

Survivorship based on deduplication and block survivorship on the nested field group with minimum survivorship rule

Apply the default source ranking and deduplication based on the Price type and Currency field values. Remove block survivorship on the Prices field group. Block survivorship is enabled for the Price details nested field group. Apply the minimum survivorship rule to the Name, GTIN, Prices field group, and Price details nested field group based on the minimum GTIN value.

The resulting master record contains Name, GTIN, Prices, and Price details field group values based on the minimum GTIN value, as well as unique Price type and Currency.

The following table lists the master record with highlighted values from the Marketing source system:

Record type	Name	GTIN	Prices field group ID	Price type	Price description	Price details nested field group ID	Currency	Amount
Master record	Barilla Spaghetti	8	B01	Selling Price	Selling Price of Pasta	B011	USD	5
						B012	CAD	8
			B02	Competitive Pasta	Competitive Price of Pasta	B021	CAD	9
						B022	USD	9
Source record from Sales	Barilla Spaghetti Pasta	9	A01	Selling Price	Selling Price of Pasta	A011	USD	6
						A012	USD	7
			A02	Competitive Price	Competitive Price of Pasta	A021	USD	8
Source record from Marketing	**Barilla Spaghetti**	**8**	**B01**	**Selling Price**	**Selling Price of Pasta**	**B011**	**USD**	**5**
						B012	**CAD**	**8**
			B02	**Competitive Price**	**Competitive Price of Pasta**	**B021**	**CAD**	**9**
						B022	**USD**	**9**

INDEX

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5