Informatica® Cloud Business 360 Console
October 2026

Define Business Events

Informatica Cloud Business 360 Console Define Business Events
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-21

Table of Contents

Preface 6

Informatica Resources 6

- Informatica Documentation 6
- IDMC web site 6
- Intelligent Data Management Cloud Communities 6
- IDMC Marketplace 6
- Informatica Knowledge Base 7
- IDMC Trust Center 7
- Informatica Global Customer Support 7

Chapter 1: Defining business events 8

Types of workflows 8

Chapter 2: Defining business events based on external workflows 10

List of predefined workflows 10

Configuring custom workflows using Application Integration processes 11

- MDM Multi-Step Approval Template 11
- Create a process 12
- Define the input fields 12
- Define the output fields 12
- Define a Service step 12
- Define additional process steps 13
- Rules and guidelines for updating Application Integration processes defined within business events 14

Defining business events with external workflows 14

- Create a user-triggered event 15
- Create a system-generated event 17
- Configure workflow tasks 18
- Define workflow task properties 19
- Editing user-triggered events 20
- Disabling and enabling business events based on external workflows 20

Chapter 3: Defining business events based on native workflows 21

Configuring native workflows 21

List of native workflow templates 21

Workflow components and tools 22

- Gateway components 23

Create a workflow 24

- Designing a workflow 24
- Assigning task owners to a user task 27

Configuring conditions for a user task. . . . 28
Assigning change owners to a workflow. . . . 29
Validating and publishing a workflow. . . . 30
Editing a workflow. . . . 30
Service tasks. . . . 31
Application Integration service tasks. . . . 32
Prerequisites of processes for service tasks. . . . 32
Configure properties for Application Integration service tasks. . . . 34
Input details for Application Integration service tasks. . . . 34
Conditions for connections for Application Integration service tasks. . . . 35
Read Rule Association Status service tasks. . . . 36
Configure properties for Read Rule Association Status service tasks. . . . 37
Input details for Read Rule Association Status service tasks. . . . 37
Conditions for connections for Read Rule Association Status service tasks. . . . 40
Read Record Data service tasks. . . . 41
Configure properties for Read Record Data service tasks. . . . 42
Input details for Read Record Data service tasks. . . . 42
Conditions for connections for Read Record Data service tasks. . . . 45
Expressions. . . . 55
Boolean. . . . 56
List. . . . 57
Numeric. . . . 58
Lookup. . . . 58
String. . . . 59
Defining business events with native workflows. . . . 59
Configuring workflow skip check. . . . 60
Create a business event. . . . 60
Configuring an event condition for a record. . . . 62
Configuring an event condition for a relationship. . . . 64
Configuring an event condition for a hierarchy. . . . 65
Viewing and editing business events. . . . 65
Disabling and enabling business events based on native workflows. . . . 65

Chapter 4: Defining publishing events. . . . 67

Create a publishing event. . . . 67
Business event payloads. . . . 68
Event payload parameters - version 2 (Recommended). . . . 70
Event payload parameters - version 1 (Deprecated). . . . 73
Publishing business events in real time. . . . 76
Step 1. Configure a Secure Agent as a runtime environment. . . . 76
Step 2. Create the source and target connections. . . . 76
Step 3. Create a publishing event. . . . 76
Step 4. Create a streaming ingestion and replication task. . . . 76

Index. 78

Preface

Follow the instructions in *Define Business Events* to define business events. Learn how to define event scenarios, workflow tasks, and task properties for business events.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Defining business events

To trigger workflows for reviewing actions on business entity records and relationships or publish events to external targets, define business events.

To ensure that business managers review and approve data before it becomes master data, define business events. These events trigger workflows that consist of multiple tasks linked together.

Define business events for the following actions:

- Actions that users perform, such as creating, updating, and unmerging records, or creating and updating hierarchies.
- Actions that MDM SaaS performs, such as identifying matches that require manual review.

The review tasks that business events create require human intervention. The business process is completed only when the users with user roles associated with the review tasks take appropriate actions.

To publish events from the business applications to external targets, define publishing events after you define user-triggered and system-generated events.

For more information about how to define publishing events, see Chapter 4, “Defining publishing events” on page 67.

Types of workflows

To define business events, use external workflows that you create as processes in Application Integration or native workflows that you design in MDM SaaS.

You can use the following workflows to define business events:

- Native workflows. You can define business events based on native workflows that you design in MDM SaaS.

  For more information about how to define business events based on native workflows, see “Defining business events with native workflows” on page 59.

  : Effective in the April 2026 release, the ability to create native workflows and use them in business events is available for preview.

  Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

- External workflows. You can define business events based on external workflows that you create as processes in Application Integration.

  For more information about how to define business events based on external workflows, see "Defining business events with external workflows" on page 14.

CHAPTER 2

Defining business events based on external workflows

You can define business events based on predefined workflows or custom external workflows.

Based on your requirements, you can use the following workflows:

- Predefined workflows. You can use the predefined workflows in MDM SaaS.

  For more information about predefined workflows, see "List of predefined workflows" on page 10.
- Custom external workflows. You can create processes in Application Integration and configure them as custom external workflows in MDM SaaS.

  For more information about configuring custom external workflows, see "Configuring custom workflows using Application Integration processes" on page 11.

List of predefined workflows

You can use the predefined workflows to define business events.

The following predefined workflows are available in MDM SaaS:

- MDM One Step Approval
- MDM Two Step Approval
- MDM Four Step Approval

One-step approval workflows require one approver, whereas two-step approval workflows require two approvers. For two-step approval workflows, if the first approver approves the changes, then the second approver can approve or reject the changes. If the first approver rejects the changes, the changes are not sent to the second reviewer and are not published. Four-step approval workflows require four approvers.

Configuring custom workflows using Application Integration processes

If you do not want to use any predefined approval workflows, define workflows in Cloud Application Integration as processes. Processes contain sets of instructions that automate your business requirements.

When a predefined approval workflow doesn't meet your requirements, you can use a Cloud Application Integration process as a custom workflow. Use a custom workflow to enhance the approval process with additional features, such as skipping approval levels or performing data enrichment. You can include multiple steps in a workflow, arranged both sequentially and in parallel, with the ability to skip tasks and return to any previous step in the workflow.

To use Cloud Application Integration processes as workflows, add at least one Service step that's a generic user task or an originator user task. These user tasks indicate that the process requires user interaction as part of the workflow. Generic user tasks define actions for users included in the workflow. Originator user tasks define actions for users who trigger a workflow with their activity.

You can use the predefined MDM Multi-Step Approval Template to design a process. For more information about the predefined template, see “MDM Multi-Step Approval Template ” on page 11.

For example, you might want to define a process that has three approval steps where three approvers review the record.

To define a process with a Service step that is set to Generic User Task or Originator User Task, perform the following tasks in Application Integration:

1. “Create a process” on page 12
2. “Define the input fields” on page 12
3. “Define the output fields” on page 12
4. “Define a Service step” on page 12
5. “Define additional process steps” on page 13

MDM Multi-Step Approval Template

The MDM Multi-Step Approval Template is a predefined process that you use as a template to design your own processes. Don't use the MDM Multi-Step Approval Template as your process.

The MDM Multi-Step Approval Template has example steps that demonstrate how to create an approval process with a Start step, Service steps, and additional process steps. The template includes examples of parallel and sequential steps. You can review the template and then create a process based on your requirements.

You can find the template in the `Business360` folder.

Copy the MDM Multi-Step Approval Template

You can create a copy of the template and then modify it to fit your business needs. Don't use the MDM Multi-Step Approval Template as your process.

1. In Application Integration, select the MDM Multi-Step Approval template, click **Actions**.
2. Click **Copy To...**.
3. Select a folder, and then click **Select**.

   A copy of the template appears in the selected folder.

4. Rename and modify the copied template to fit your business needs.
5. To publish the template, click **Actions**, and then click **Publish**.

Create a process

Use Cloud Application Integration to create a process. For more information about creating a process, see the Cloud Application Integration help.

1. In Application Integration, select **New**.

   The **New Asset** dialog box appears.
2. Select **Processes** > **Process**, and then click **Create**.

Define the input fields

Define the required input fields for the process on the **Start** step.

1. In the **Properties** panel, on the **General** tab, type a unique name, and then click the **Input Fields** tab.
2. Add the following input fields with their types:

Input Field	Type
input	Text
template	Template. You can find **Template** when you click **More types** > **Custom Types**.
taskTypes	Task Types. You can find **Task Types** when you click **More types** > **Custom Types**.

Define the output fields

Define the required output fields for the process on the **Start** step. The output field values are set when the process executes and are then available in the steps that follow. These output fields don't appear in lists until the values are returned from a process. You define a name and type for the output fields for use in a process.

1. In the **Properties** panel, click the **Output Fields** tab.
2. Add the following output fields with their types:

Output Field	Type
approved	Text
approvedBy	Text

Define a Service step

Add a Service step and set the service action to Generic User Task or Originator User Task.


1. To add a Service step to the process, drag the **Service** step from the palette on the left to the canvas.
2. In the **Properties** panel, on the **General** tab, enter a unique name, and then click the **Service** tab.
3. Set the following properties for the service:

Property	Value
Service Type	System Service
Action	**MDM** > **HumanTask** > **Generic User Task** or **MDM** > **HumanTask** > **Originator User Task**.


4. Click the **Input Fields** tab.
5. Configure values for the following input fields:

Input Field	Value
TaskName	Unique name of the Service step that you specified in step 2. This name appears on the **Workflow Inbox** page for business users when a business event triggers a workflow that includes this task.
Template	template. The template field that you added to the **Input Fields** tab of the Start step.
TaskTypes	taskTypes. The taskTypes field that you added to the **Input Fields** tab of the Start step.
Change List	input. The input field that you added to the **Input Fields** tab of the Start step.
Task Actions	List of actions that the users can perform with this step. Use a semicolon as a delimiter. For example, `Send for Translation;Send Back to Originator;Release`. You can also use the action text to provide more information on the next process step. The output that returns from each task action must be handled within the process.

The following image shows a sample configuration of input fields:

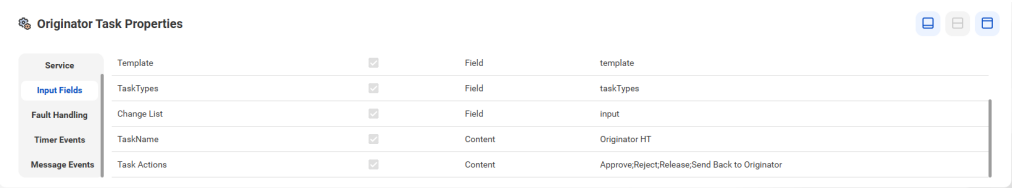

The following image shows a sample task with multiple actions for reviewers:

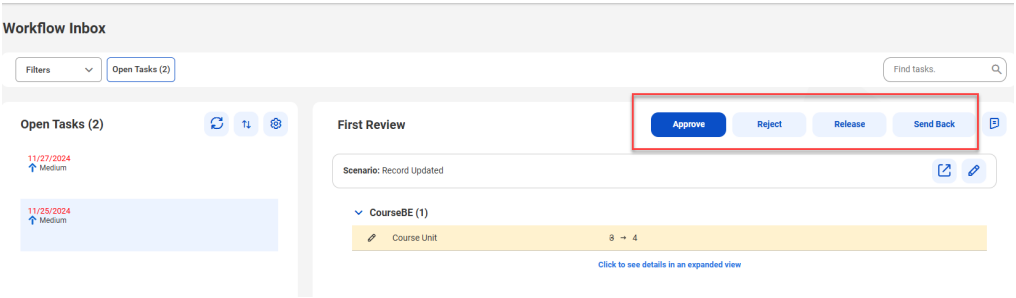

Define additional process steps

Define additional process steps to access data, services, and perform related orchestration activities. Each process step completes and returns information about the last approver and the last action taken by the approver.

The following fields store the step values that the additional process steps return:

Field	Description
LastAction	The last task action, such as approve, reject, or send back.
LastApprover	The identifier of the user who took the last action.

For more information about adding process steps, see *Adding Process Steps* in the *Cloud Application Integration* help.

After you add all additional process steps, save and then publish the process.

Rules and guidelines for updating Application Integration processes defined within business events

Consider the following rules and guidelines when you update Application Integration processes defined within a business event:

- Before you update a process defined within a business event, ensure that all workflow tasks associated with the process are completed.
- After you update a process and publish it, ensure that the workflow that uses the process reflects the changes in Business 360 Console.

Defining business events with external workflows

When you define a business event based on external workflows, you define the details of the event and the external workflow that the event triggers.

Decide on the user roles, event actions, and assets for which you want to trigger a workflow. Then define the event, workflow tasks, and workflow properties.

Note: Tasks created after the November 2023 release expire after 365 days if they are inactive or unattended. Tasks created before the November 2023 release don't expire even if they are inactive or unattended. For more information about expiration of tasks, see the *Introducing Human Tasks* chapter in the Human Tasks help.

You can define business events with predefined workflows in MDM SaaS or custom external workflows that you create in Application Integration.

Note: Ensure that the process contains at least one Service step with its service action property set to Generic User Task or Originator User Task. Additional workflows are available for the user-triggered events and not for the system-generated events.

For more information about predefined workflows, see "List of predefined workflows" on page 10.

For more information about configuring Application Integration processes for user-triggered business events, see "Configuring custom workflows using Application Integration processes" on page 11.

For example, you might define a business event as a business user creating a record for the Person, Item, or Supplier business entity. You might want the business event to trigger a two-step approval workflow where data stewards and then managers must review and approve the new record.

When multiple business events are configured for the same triggering actions and event sources, MDM SaaS uses the most recently updated business event. To manage which business event is used, enable or disable business events as needed.

For more information, see "Disabling and enabling business events based on external workflows" on page 20.

To define a user-triggered or system-generated business event, perform the following tasks:

1. Create one of the following types of business event:
   - "Create a user-triggered event" on page 15
   - "Create a system-generated event" on page 17
2. "Configure workflow tasks" on page 18
3. "Define workflow task properties" on page 19

Note: The workflow inbox is shared across IDMC. If user roles and privileges aren't set up correctly, users with privileges in multiple services might be able to see tasks from multiple services in the workflow inbox.

To publish events from the business applications to external targets, define publishing events after you define user-triggered and system-generated events.

For more information about how to define publishing events, see Chapter 4, "Defining publishing events" on page 67.

You can delete business events that you no longer need. Before you delete business events, you must remove the dependencies associated with the business events. You can't restore business events after you delete them. Also, you can't reuse the internal IDs of deleted business events.

Create a user-triggered event

Create a user-triggered event and define event details, such as actions and fields, that trigger a workflow.

For example, you might want a workflow triggered when business users create or update a business entity record or hierarchy. You can also trigger a workflow for changes related to specific fields and field groups. You can create rules for the selected fields and field groups so that the workflow is triggered only when a field or field group meets the specified criteria.

1. Click **Business Events**.

   The **Business Events** page appears.
2. Click **Add Event** > **User-Triggered Event**.

   The **Event Details** page appears.
3. Enter a name for the event.
4. On the **Event** page, specify whether to initiate a workflow after the triggering actions are performed.

Option	Description
Required	Sends the updates to reviewers for approval. When users click **Send for Approval**, MDM SaaS creates a review task. If you don't specify any fields to trigger workflows, any update in the record goes through the approval process. If you specify any fields to trigger workflows, the event triggers the workflow only for those fields, and the users can save the changes to other fields without the approval process.

Option	Description
Optional	Allows users to save their changes without approval or send their changes to reviewers for approval. When users click **Submit**, their changes are saved without the approval process. When users click **Send for Approval**, MDM SaaS creates a review task. **Note:** When the workflow is optional and users delete a record, users see the **Delete** and **Send for approval** buttons.

5. From the **Affected Users Roles** list, select user roles to which the business event applies.
6. In the **Event Scenarios** section, click **Add Event Scenario**, and then configure an event scenario.
   a. From the **Asset** list, click the asset picker icon. Find and select the asset to trigger a workflow.

      For example, to trigger a workflow when users create or update records of the Organization, Category, or Item business entity type, select **Organization**, **Item**, or **Category**. To trigger a workflow when users create or update hierarchies based on the Regions hierarchy model, select **Regions**.

      The asset is selected.

   b. From the **Actions** list, select the actions to trigger a workflow.

      The following table describes the supported actions for which you can trigger a workflow:

Action	Description
Create	User creates a record or hierarchy. The event triggers a workflow when users create a record or set values for specific fields and field groups.
Update	User updates a record or hierarchy. The event triggers a workflow when users update a record or set values for specific fields and field groups.
Delete	User deletes a record or hierarchy. **Note:** If you configure fields to trigger a workflow for this action, the workflow ignores the configuration.
Unmerge	User unmerges a record. **Note:** If you configure fields to trigger a workflow for this action, the workflow ignores the configuration.
Manual Merge	User merges a record. **Note:** If you configure fields to trigger a workflow for this action, the workflow ignores the configuration.

   c. If you select the Create or Update action, from the **Fields** column, click **Add** to add specific fields based on which you want to trigger a workflow.
   d. Optionally, in the **Add Fields** wizard, select the fields to trigger a workflow for the selected actions, and click **Next**.

      You can't select fields from a field group that's nested within a field group. If you add multiple fields, the workflow is triggered when users modify the values of any of the added fields.

e. Optionally, to trigger a workflow for the selected fields and field groups only when they meet a specific criteria, click **Add a rule**.

Note: If you add multiple rules for a field, a workflow is triggered when the conditions of all the rules are met. For example, you add multiple rules for the Tax field, such as Country equals USA and State equals California. A workflow is triggered when the Tax field value changes and the country and state are USA and California.

f. From the **Fields** list, select a field based on which you want to create the rule.

g. From the **Operator** list, select an operator for the rule.

h. Enter a value to complete the rule. Values are not case sensitive.

A green checkmark appears next to the selected field when the rule is complete and valid.

i. Optionally, add additional rules.

j. To apply the rules, click **Finish**.

Note: When you configure rules for fields that are enriched with data from Dun & Bradstreet, MedPro, and Global Legal Entity Identifier Foundation (GLEIF) through extensions, MDM SaaS business applications don't trigger workflow for these fields.

7. Optionally, add additional event scenarios.
8. Click **Next**.

The **Workflow Tasks** page appears. For more information about configuring workflow tasks, see "Configure workflow tasks" on page 18.

Rules and guidelines for creating a user-triggered event

Consider the following rules and guidelines when you create a user-triggered event:

- The rules created for dependent attributes, such as State picklist, are ignored if rules are created for their parent attributes, such as Country picklist.
- You can't select business entity record attributes, dynamic field definition attributes, or dynamic field value attributes to trigger a workflow. To trigger a workflow for these attributes, configure the business event without adding fields to the event scenarios.
- To create a business event for any changes to related records, ensure that you configure the business event without adding fields to the event scenarios.

Create a system-generated event

Create a system-generated event and define the details of the event that triggers a workflow. For example, you might want a workflow triggered when the system identifies potential matches that require review.

Note: The workflow inbox of an organization can contain up to 100 open system-generated tasks for each business entity.

1. Click **Business Events**.

The **Business Events** page appears.

2. Click **Add Event** > **System-Generated Event**.

The **New Event** page appears.

3. Enter a name for the event.

4. In the **Event Scenarios** section, click **Add Event Scenario**, and then configure an event scenario.
   a. Click the asset picker icon, and then select the asset to trigger a workflow.

      The asset type is populated based on the asset you select.
   b. Select the following action to trigger the event:

Action	Description
Resolve Potential Matches	System suggests potential matches.

5. Optionally, add additional event scenarios.
6. Click **Next**.

   The **Workflow Tasks** page appears.

Configure workflow tasks

After you create an event, select the workflow that you want the event to trigger and the user roles responsible for each task in the workflow. For example, you might want to trigger a two-step-approval workflow where data stewards and then managers must approve the changes.

1. On the **Workflow Tasks** page, in the **Name** list, select the workflow to trigger.

Workflow Name	Description
MDM One Step Approval	One approver must review and then approve or reject the changes.
MDM Two Step Approval	Two approvers in consecutive order must review and then approve or reject the changes. After the prior approver accepts the changes, the next approver can approve or reject the changes.
MDM Four Step Approval	Four approvers in consecutive order must review and then approve or reject the changes. After the prior approver accepts the changes, the next approver can approve or reject the changes.
Additional Workflows	A Cloud Application Integration process that contains at least one Service step with the service action property set to Generic User Task or Originator User Task. This option is available for the user-triggered events and not for the system-generated events.

2. If you select **Additional Workflows**, perform the following tasks:
   a. Select a process that contains a Service step that is set to Generic User Task or Originator User Task. For more information about configuring a Cloud Application Integration process for a user-triggered business event, see "Configuring custom workflows using Application Integration processes" on page 11.
   b. In the **Tasks** section, select a task.
   c. Optionally, in the **Task Details** section, type a task label.

      This label appears as a task name on the **Workflow Inbox** page. If you don't configure a label, the task name configured in the Service step of the Cloud Application Integration process appears on the **Workflow Inbox** page.

For more information about configuring the task name, see "Define a Service step" on page 12.

d. Select the user roles that can approve the workflow tasks.

e. To configure additional tasks, repeat steps 2 through 4.

f. Optionally, in the **Page Settings** section, select a View and edit page type for each event action that you selected.

When users open a task from the Workflow Inbox and a page is associated with an event action, it displays the record data. Otherwise, the event action displays the record data in the default layout assigned to the user.

3. If you select any predefined workflow, select the user roles that can approve the workflow tasks.
4. Click **Save**.

The **Workflow Properties** page appears.

Define workflow task properties

Define the default workflow task properties, such as the title, description, priority, and due date. You can also add variables to task titles and descriptions. When a Business 360 application creates tasks, the tasks use the specified properties and are dynamically populated with the business event, record, and business entity information. For example, you might want the task title to include the record name and business event name.

1. On the **Workflow Properties** page, define a title.
   - To manually define a title, enter a title.
     For example, you might enter `Updated record`.
   - To define a title with variables, select the variables.
   - To manually define a title with variables, enter a title with variables.
     For example, you want the title to be `Task was created for <record name> for business event <event name> triggering the change list <changelist id>`

     Enter the following title: `Task was created for {$recordName} for business event {$businessEventName} triggering change list {$changeListId}`
   - Optionally, enter a description or select variables for the description.

   The following table describes the variables that you can enter:

Variable	Variable Name	Description
{$changeListId}	Changelist ID	Unique identifier associated with the submitted changes.
{$businessEventGuid}	Business Event GUID	Internal identifier of the business event.
{$businessEventName}	Business Event Name	Name of the business event associated with the task.
{$recordGuid}	Record GUID	Internal ID of the business entity.

Variable	Variable Name	Description
{$recordName}	Record Name	Name of the record associated with the task, such as John Smith or Informatica.
{$businessEntityType}	Business Entity Type	Business entity associated with the task, such as Person or Organization.

2. From the **Priority** list, select a priority for the task.
3. In the **Due In** field, enter the amount of days after the task is created that the task is due.
4. Click **Save**.

   The event appears on the **Business Events** page.

Editing user-triggered events

After you define business events, you can edit event details and workflow task and associated properties.

To edit a business event, open the event from the Explore page. You can change event details, such as the name, affected user roles, and event scenarios. You can also update the workflow that's triggered for the event.

After you edit a business event that triggers a custom approval workflow by changing the Cloud Application Integration process, the records that are in the pending state can't be approved. Before you edit the business event configuration to use a different process, ensure that records aren't waiting for approval. If you accidentally change the process without managing pending records, contact Informatica Global Customer Support.

Disabling and enabling business events based on external workflows

When multiple business events have the same event scenarios, MDM SaaS uses the most recently updated business event. To control which business event MDM SaaS uses, you can enable or disable business events.

Business events are enabled by default. However, you can disable business events when you create them.

You can disable business events in the following cases:

- You have multiple business events for the same actions and want to prioritize a specific one. In this case, disable the other business events, especially those that are more recently created or updated than the business event you want to keep.
- You configure a new business event but want to use it later.

To enable or disable an existing business event, select the appropriate option on the Events tab of the business entity or on the Business Events page.

When you enable a disabled business event, MDM SaaS uses it only if it's the most recently updated business event applicable for the changes.

CHAPTER 3

Defining business events based on native workflows

You can define business events based on native workflows.

Native workflows are custom workflows that you configure in Business 360 Console. The intuitive interface of the workflow canvas simplifies and streamlines the process of designing workflows. You can easily add workflow components, such as manual and automated tasks, conditions, and task outcomes to a workflow. In addition, a validation panel alerts you to any errors in the workflow and provides detailed information about them.

To use native workflows in business events, configure the workflows and then define business events with the workflows.

Configuring native workflows

You can configure native workflows from scratch or from templates in Business 360 Console and use them in business events.

A native workflow includes a sequence of tasks to manage and approve records and relationship data. You can add a task to a workflow to orchestrate human intervention or steps that MDM SaaS performs. Each task in a workflow acts as a proof that the step has been triggered in the workflow.

To create a native workflow, perform the following steps:

1. Create a workflow and define its properties.
2. Design the workflow using the components on the workflow canvas.
3. Validate and publish the workflow.

List of native workflow templates

You can create a native workflow from scratch or from a predefined template.

When you create a workflow from a template, you can edit the predefined components and customize the workflow without any restrictions.

You can use one of the following templates:

- One-Step Approval. Consists of a user task connected to a decision gateway with two outcomes.
- Two-Step Approval. Consists of two sequential user tasks in separate swimlanes and their task outcomes.
- Four-Step Approval. Consists of four sequential user tasks in separate swimlanes and their task outcomes.
- Two-Step Approval with Requestor Review. Consists of two sequential user tasks in separate swimlanes. The first user task can be assigned to a reviewer, and the second user task routes the changes back to the workflow requestor.

Workflow components and tools

You can use the tools and components on the canvas to create workflows.

The following table describes the components and steps needed to complete a business process:

Component	Description
Swimlane	Partitions a set of steps in a workflow and visually distinguishes task responsibilities between different user roles.
Start	Starts a workflow.
User Task	Sends tasks for human approval. For example, you might want to add a user task step to a loan approval process.
Decision Gateway	For example, approve the request if it meets the requirements, reject if not, or return if more information is required.
Parallel Gateway	A gateway pair that enables multiple tasks to run concurrently. A parallel gateway pair consists of a divergent and convergent gateway. A divergent gateway splits an incoming path into several concurrent outgoing paths, whereas a convergent gateway joins all the incoming paths into a single outgoing path.
Connections	Connects components in a workflow.
End	Marks the completion of a workflow.
Terminal End	Explicitly ends a workflow. Use in parallel gateways to terminate all active tasks and end the workflow.

You can use the following tools when you design workflows:

Hand tool.

Moves the workflow around the canvas when zoomed in. This tool is useful in large workflows where components are not all visible at once.

Space tool.

Adjusts spacing between components and creates or removes space both horizontally and vertically in a workflow. This tool is helpful to maintain a clean and organized layout when you add new components or rearrange existing ones.

Select tool.

Selects one or more components in a workflow.


Gateway components

You can add gateway components to workflows to configure task outcomes or enable multiple tasks to run concurrently.

You can add the following gateways to workflows:

- Decision gateways. Add decision gateways after tasks to run only one task outcome.
- Inclusive gateways. Add inclusive gateways after tasks to run one or more task outcomes.
- Parallel gateways. Add parallel gateways before tasks to run multiple tasks concurrently.

Consider the following workflow for a product onboarding process:

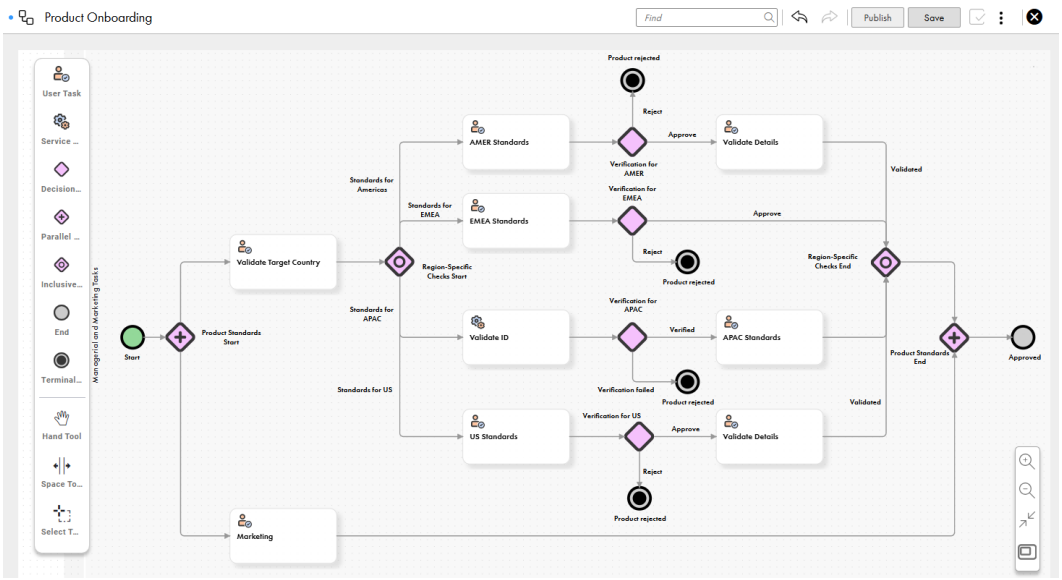

The workflow includes multiple tasks to evaluate product details based on regional standards. A separate task outome is added for the US because the product standards differ from those of the other countries in the AMER region.

The gateways in the workflow enable the following tasks:

- The Product Standards parallel gateway enables the tasks to verify regional and marketing standards to run in parallel and avoid delays.
- The Region-Specific Checks inclusive gateway enables the execution of one or more task outcomes based on the target country. For example, a product with target country US is checked based on the standards for both the Americas and the US.
- The decision gateways for specific regions, such as the Verification for AMER, Verification for EMEA, Verification for APAC, and Verification for US decision gateways, enable the execution of one task outcome based on the output from the preceding tasks.

Create a workflow

If you have the Workflow privilege in Administrator, then you can create, read, and update native workflows. You can create a native workflow from scratch or from a predefined template.

1. In Business 360 Console, click **New**.
2. In the **New Asset** dialog box, click **Business Process** > **Workflow**.
3. Click **Create**.
4. In the **Workflow** dialog box, enter the name and description of the workflow.
5. Select whether to create a workflow from scratch or from a predefined template.
6. If you select **Template**, select one of the following templates:
   - One-Step Approval. A workflow with one approval step.
   - Two-Step Approval. A workflow with two approval steps.
   - Four-Step Approval. A workflow with four approval steps.
   - Two-Step Approval with Requestor Review. A workflow with one approval step and one step that sends the changes back to the requestor for revision.
7. Select the related asset, such as the business entity or hierarchy, for which you want to trigger the workflow, and the location where you want to save the workflow, and click **OK**.

   If you start from scratch, the blank workflow canvas appears. If you select a template, the workflow canvas opens with the predefined components. You can edit the template to customize it.

Designing a workflow

1.

   By default, the canvas has three swimlanes. You can add and delete swimlanes.

   Note: Remove any empty swimlanes from a workflow before you publish the workflow.
2. Drag the **Start** component from the palette to the swimlane.


   You can delete, cut, copy, and paste components. You can also undo, redo, and search for components in a workflow.
3. Select the **Start** component, and enter a name and an optional description.
4. Drag one of the following components to the swimlane:

Component	Purpose
User Task	Manages the actions a human can take when they approve tasks. **Note:** Add at least one user task to a workflow.

   An internal ID that you can use as an identifier for the task is automatically generated.

5. If you add a user task, configure the properties of the user task.

The following image displays the **Properties** tab of a user task:

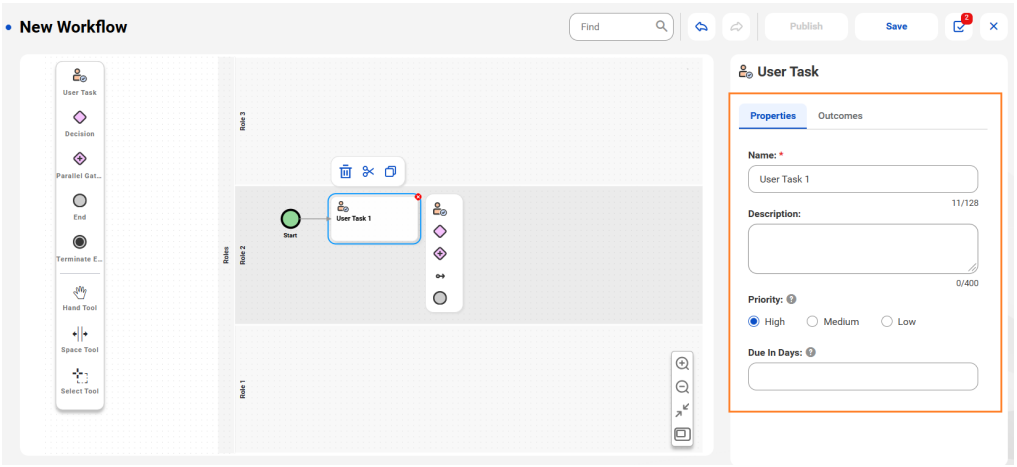

The following table describes the properties that you can configure for a user task:

Property	Description
Name	Name of the user task.
Internal ID	A system-generated unique identifier that you can use in expressions. You can modify the identifier.
Description	A short description that explains the user task.
Priority	Level of importance or urgency assigned to the task. Select one of the following values: - High - Medium - Low
Due in days or due date	Number of days in which the task is due. If the user doesn't complete the task within the period, the task remains in an overdue status. Maximum value is 14. Toggle the icon and enter an expression that resolves to the user task's due date.

6. To add a task outcome for a user task, perform the following steps:
   a. Click the **Outcomes** tab.
   b. Enter a name.
   c. Click **Save**.
   d. Click **Add** to add more task outcomes.


   You can create a list of possible decisions that a task owner can take on tasks.

   For example, you can add Approve, Reject, and Return as possible outcomes for a task. Task owners can approve a request if it meets the requirements, reject if not, or return if more information is required. If a request is returned, then another user task can be added to re-evaluate the request and to resubmit the request if it meets the requirements, or discard if not.

   Note: Add at least one user task to a workflow. You can't save workflows that include user tasks without outcomes.

7. If you add a service task, perform the following steps:
    a. Add a **Service Task** component.
    b. Configure the properties of the service task.
    c. Configure the input values for the service task.
8. To allow a workflow to take different paths, add a **Decision Gateway** or **Inclusive Gateway** component.
9. If you add a **Decision Gateway**, perform the following steps:
    a. Select the **Decision Gateway** component, and enter a name and an optional description.
    b. Select an outgoing connection from the **Decision Gateway** component.

    The **Properties** tab of an outgoing connection from a decision gateway component appears.

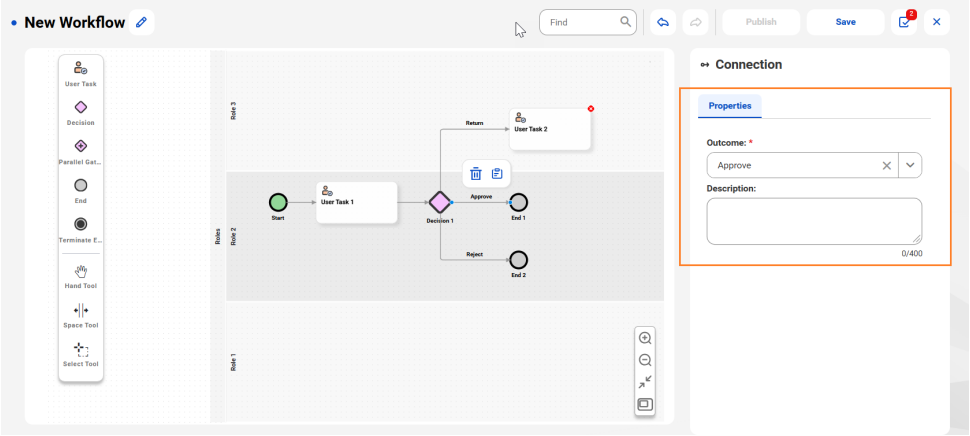


    c. Select an outcome.

    The task outcomes defined in the user task appear in the **Outcome** list.
    d. Specify an optional description.
10. If you add an **Inclusive Gateway** component, configure conditions for the outgoing connections from the component.
11. To run multiple tasks concurrently, perform the following tasks:
    a. Enter names and optional descriptions for the start and end components of the parallel gateway.

b. Select the outgoing connections from the **Parallel Gateway** start component and add tasks.

The **Properties** tab of a **Parallel Gateway** start component appears.

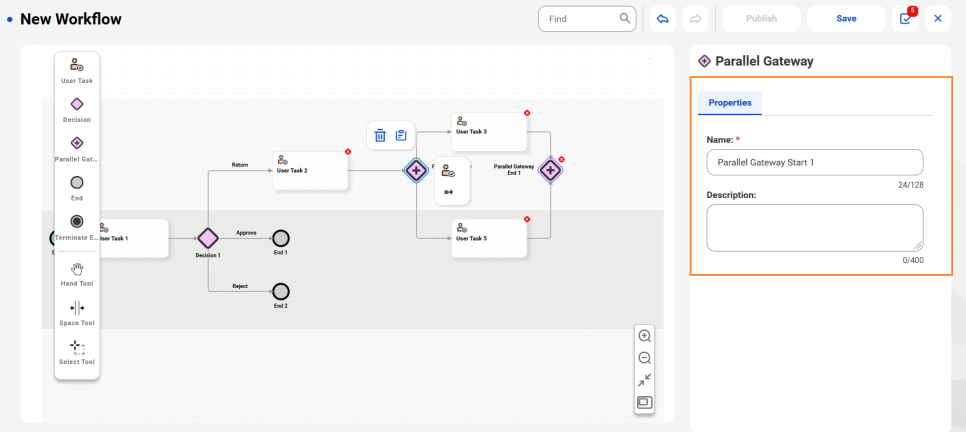

Optionally, between the divergent and convergent gateway pair that comprises a parallel gateway component, you can add another parallel gateway, decision gateway, or inclusive gateway component.

You can add a maximum of three consecutive levels of parallel gateway components, or three decision gateway or inclusive gateway components.

For example, in a loan approval process, after the initial application review, a parallel gateway splits the workflow into independent concurrent tasks. These tasks include credit risk assessment, KYC documentation collection, and legal compliance checks. Within these tasks, you can add an additional parallel gateway for credit risk assessment to concurrently analyze different risk factors. You can also add a decision gateway to the credit risk assessment task to branch the process further based on whether additional documentation is required.

12. Optionally, to explicitly end the workflow, add a **Terminal End** component to the parallel gateway.

    The **Terminal End** component terminates all active tasks and ends the workflow.

13. Add more user tasks, service tasks, decision gateways, inclusive gateways, and parallel gateways based on your business requirement.

Assigning task owners to a user task

You can assign the user roles assigned as task owners to a swimlane as task owners for a user task or enter an expression to dynamically assign task owners to a user task.

1. Select a user task, and click the **Access** tab.
2. To add specific user roles from the list of task owners assigned to the swimlane, click **Add**.
3. To add user roles dynamically through expressions, turn on the toggle button and enter an expression.

   Use expressions in the following format:

   ```
   "roles":["<user role ID 1>","<user role ID 2>","<user role ID 3>"]
   ```

   For example, the following sample expression assigns the Customer 360 Data Steward and Customer 360 Manager user roles as task owners to a user task:

   ```
   "roles":["alrSLdz7mh0bafCABDy284","6SLE7giOlEYfRlKjFamecr"]
   ```

   To find the ID for a user role, open the user role in Administrator. The characters after the userRolesAsset parameter in the URL represent the user role ID.

   Note: You can't save a workflow if you add IDs of user roles that aren't assigned as task owners to the swimlane.


Configuring conditions for a user task

To run two or more task outcomes for user tasks, use inclusive gateways after the user tasks. To determine the outcomes of outgoing connections from inclusive gateways to other components in the workflow, configure conditions.

A condition is a simple expression that uses the internal ID and output of the user task.

For more information about expressions, see "Expressions" on page 55.

Consider the following portion of a workflow for a product onboarding process:

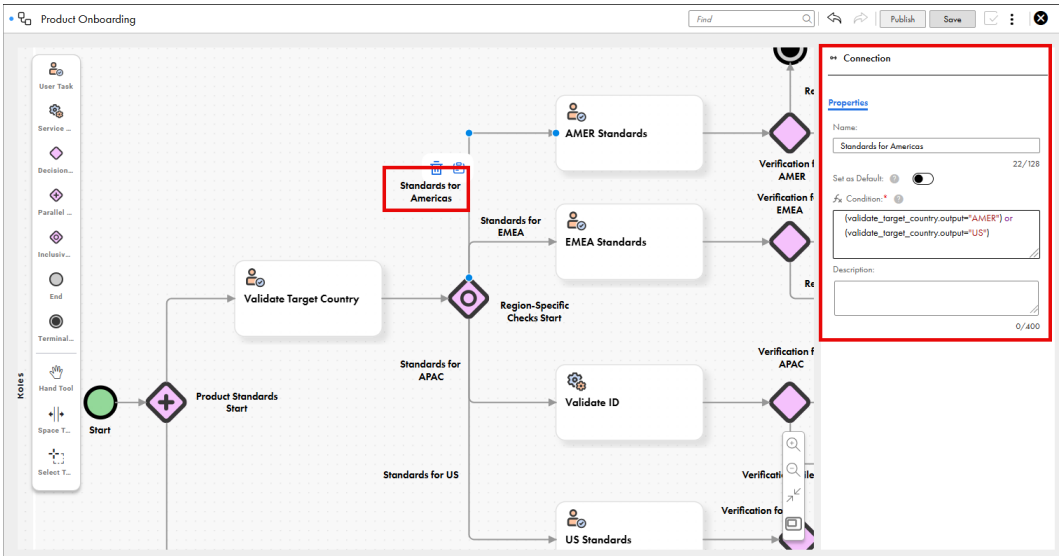

The US has more product standards than those required for other countries in the Americas region, so a separate task outcome is added for the US. A product with US as the target country needs to pass the standards for the AMER region and the US.

The Region-Specific Checks inclusive gateway determines the task outcomes based on the output value. The possible outcomes of the Validate Target Country user task are AMER, EMEA, APAC, and US. If the outcome of the Validate Target Country user task is US, the gateway runs the task outcomes for both the AMER region and the US.

The following sample conditions are added to the connections from the Region-Specific Checks inclusive gateway to the tasks or task outcomes to be run:

- `(validate_target_country.output="AMER") or (validate_target_country.output="US")` to the AMER Standards user task.
- `validate_target_country.output="US"` to the US Standards user task.

Similarly, the following sample conditions can be added to the other connections from the Region-Specific Checks inclusive gateway to the remaining tasks or task outcomes:

- `validate_target_country.output="EMEA"` to the EMEA Standards user task.
- `validate_target_country.output="APAC"` to the Validate ID service task.

Note: When you use a connection as the default one when no other outgoing connection conditions are met, you don't have to add a condition to it.

Configure conditions for a user task

To run two or more task outcomes for user tasks, configure conditions for the inclusive gateways after user tasks.

1. Select an outgoing connection from a user task, and enter a name for it.
2. Enter a condition that uses the internal ID and outcome of the user task.

   To configure a condition for a task outcome that's run for one or more user task outcomes, enter a condition that uses all the relevant user task outcomes.
3. Optionally, to set a connection as the default connection when conditions in other outgoing connections aren't met, turn on the **Set as Default** toggle.

Assigning change owners to a workflow


You can dynamically assign an owner to every change that passes through the workflow. You can then view the change owner listed against the changes in the history page for records.

You can also assign a default change owner when the change owner value doesn't resolve to a valid user. The default change owner is assigned if the user task specified in the Change Owner field is bypassed because of decision or inclusive gateways.
Note: Configure the default change owner for a user task that isn't bypassed by gateways.

To assign a change owner and a default change owner, configure expressions in the end component. Each expression specifies the internal ID of a user task whose reviewer is to be assigned as the change owner.

For more information about expressions, see "Expressions" on page 55.

For example, consider a workflow for a customer onboarding process:

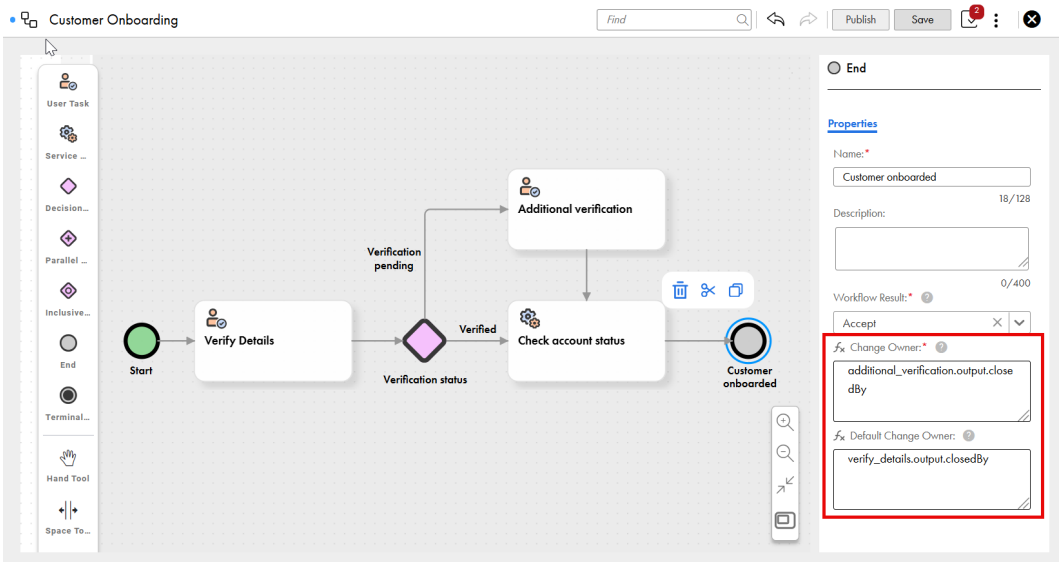

The `additional_verification.output.closedBy` expression assigns the user who completes the Additional verification user task as the change owner. Similarly, the `verify_details.output.closedBy` expression assigns the user who completes the Verify Details user task as the default change owner.

The user who completes the Additional verification user task is assigned as the change owner. However, if the Verify Details user task has Verified as its outcome, then the Additional verification user task is bypassed by the Verification status decision gateway. In this case, the user who completes the Verify Details user task is assigned as the change owner.

You can also assign the requestor as the change owner or default change owner. The requestor user role is associated with the user who initiates the workflow. To assign the requestor as the change owner or default change owner, use the `SYSTEM.initiatedBy` expression.

Validating and publishing a workflow

When you design a workflow, the Validations panel displays validation errors that the workflow components return. After fixing the validation errors, you can publish the workflow. Saving a workflow changes its status to Draft. Workflows containing validation errors can be saved but can't be published.

1. Click the **Validations** icon in the toolbar.

   The **Validations** panel appears with errors grouped by components.

2. Click an error.

   The cursor moves to the erroneous component. Take the required corrective action to resolve the error. The **Validations** panel refreshes each time you correct an error.

3. Click **Save** to save the workflow, and then click **Publish**.


Editing a workflow

1. Edit the workflow.
2. To save the workflow as a draft, click **Save**.
3. To check if the workflow has errors, click the **Validations** icon in the toolbar.
4. To publish the workflow, click **Publish**.

Service tasks

Use service tasks to automate tasks that MDM SaaS performs efficiently and in a scalable manner. You can define task outcomes based on the outputs of service tasks.

Consider the following workflow for a loan application process:

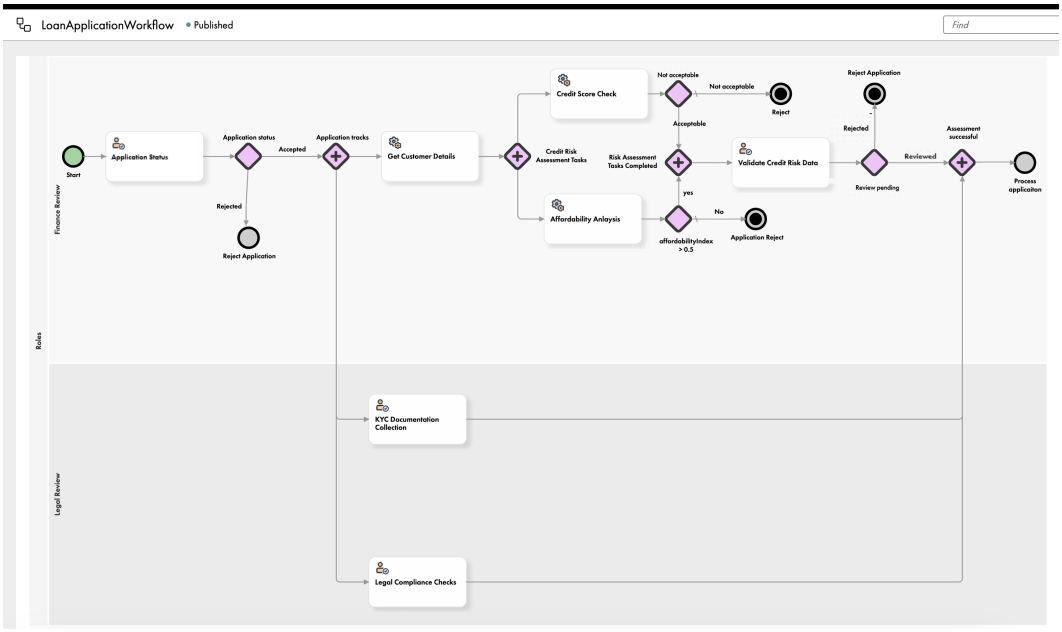

The workflow consists of multiple tasks that run concurrently, such as credit score and affordability check, KYC document collection, and legal compliance checks. Manually determining customer details and checking credit score and affordability can be repetitive and time-consuming. Service tasks automate these repetitive tasks, and the data is then verified manually. Service tasks help streamline the loan application process.

You can use the following types of service tasks in native workflows:

- Application Integration service tasks: Runs Application Integration processes to automate repetitive tasks.

  For more information about Application Integration service tasks, see "Application Integration service tasks" on page 32.

- Read Rule Association Status service tasks: Determines task outcomes based on rule association statuses.

  For more information about Read Rule Association Status service tasks, see "Read Rule Association Status service tasks" on page 36.


- Read Record Data service tasks: Determines task outcomes based on record data.

  For more information about Read Record Data service tasks, see "Read Record Data service tasks" on page 41.

Application Integration service tasks

Application Integration service tasks use Application Integration processes to automate tasks that MDM SaaS performs efficiently and in a scalable manner.

Consider the following workflow for a loan application process:

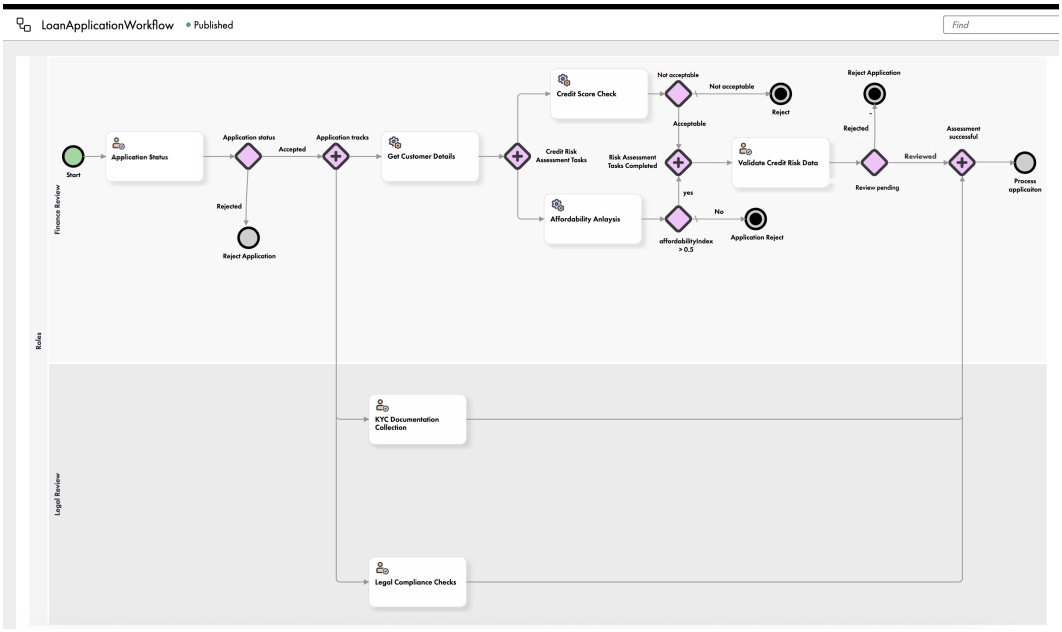

The workflow consists of multiple tasks that run concurrently, such as credit score and affordability check, KYC document collection, and legal compliance checks. Manually determining customer details and checking credit score and affordability can be repetitive and time-consuming. The tasks can be automated using the service tasks, and the data is verified manually. The service tasks help streamline the loan application process.

To configure an Application Integration service task, drag a service task component to the required swimlane and perform the following steps:

1. “Configure properties for Application Integration service tasks” on page 34.
2. “Configure input details for Application Integration service tasks” on page 35.
3. “Configure conditions for Application Integration service tasks” on page 36.

Note: Select an Application Integration process that contains at least a Service step. Also, add an array of tasks to the input payload from MDM SaaS to the process and the output payload from the process to MDM SaaS. For more information about the prerequisites of processes, see “Prerequisites of processes for service tasks” on page 32.

Prerequisites of processes for service tasks

When you create a process in Application Integration and use it in service tasks, ensure that the process meets the following requirements:

- The process contains at least one Service step to orchestrate the service task.
- The input payload from MDM SaaS to the process contains an array of tasks . Each task in the array includes the `taskId` parameter.

- The output payload from the process to MDM SaaS contains an array of tasks . The output payload includes the `taskId` parameter for each executed task in the array.
- The process responds within 60 seconds.

Note: A process might be used in service tasks across multiple workflows. The arrays of tasks in the input and output payloads supports simultaneous execution of multiple service tasks that use the same process.

Input payload format

The input payload from MDM SaaS to the process must contain an array of tasks to support the execution of multiple service tasks that use the same process at a time. Each task in the array must include the `taskId` parameter.

A process might be used in service tasks across multiple workflows. The array of tasks in the input payload supports the execution of multiple service tasks that use the same process at the same time.

The following JSON snippet shows the input payload that MDM SaaS sends to a process:

```
[
    {
        "taskId": "124",
        "customerId": "CUST-002913”
    },
    {
        "taskId": “134",
       "customerId": "CUST-004582"
    }
]
```

Task IDs 124 and 134 represent two instances of a service task or two service tasks that use the same processes. The process accepts customer IDs as input.

Output payload format

The output payload from the process to MDM SaaS must contain an array of tasks to support the execution of multiple service that use the same process tasks at a time. The output payload must contain the `taskId` parameter for each executed task in the array.

A process might be used in service tasks across multiple workflows. The array of tasks in the output payload supports the execution of multiple service tasks that use the same process at the same time.

The following JSON snippet shows the output payload that a process sends to MDM SaaS:

```
[
  {
    "taskId": "124",
    "customerID": "CUST-002913",
    "score": {
      "creditScore": 712,
      "scoreModel": "VantageScore 4.0",
      "scoreBand": "Good",
      "scoreConfidence": 0.86,
      "scoreTimestamp": "2025-12-14T13:45:02Z",
      "bureau": "Experian",
      "isInternalSource": false
    },
    "riskFactors": [
      {
        "code": "RF-DTI",
        "description": "Elevated debt-to-income ratio",
        "severity": "Medium",
        "weight": 0.3
      },
      {
        "code": "RF-UTIL",
```

```
        "description": "High revolving utilization",
        "severity": "Low",
        "weight": 0.15
      }
    ]
  },
  {
    "taskId": "134",
    "customerID": "CUST-004582",
    "score": {
      "creditScore": 684,
      "scoreModel": "VantageScore 4.0",
      "scoreBand": "Fair",
      "scoreConfidence": 0.79,
      "scoreTimestamp": "2025-12-20T10:17:45Z",
      "bureau": "Equifax",
      "isInternalSource": true
    },
    "riskFactors": [
      {
        "code": "RF-PAYHIST",
        "description": "Recent late payments",
        "severity": "Medium",
        "weight": 0.27
      },
      {
        "code": "RF-CREDITMIX",
        "description": "Limited credit mix",
        "severity": "Low",
        "weight": 0.12
      }
    ]
  }
]
```


Task IDs 124 and 134 represent two instances of a service task or two service tasks that use the same processes. The process retrieves credit score details for the customer IDs that were shared in the input payload.

Configure properties for Application Integration service tasks

Application Integration processes used in service tasks must meet certain requirements. If processes don't meet the requirements, the service tasks and the respective workflows fail.

For more information about the requirements for processes, see "Prerequisites of processes for service tasks" on page 32.

1. Select a service task on the workflow canvas.
2. From the list of service task types, select **CAI Service Tasks**.
3. Enter a name for the service task.
4. Optionally, enter a custom internal ID and add a description.
5. To configure a process, click **Select**, and then select a process that contains at least one Service step.


   A list of the available published processes appears.

Input details for Application Integration service tasks

After you select a process, define the fields to use as inputs for the process. Add multiple input fields to an Application Integration service task if the process you select contains multiple input fields. Each set of input

details consists of a key, which is an ID that matches an input field of the selected process, and an expression that defines the expected value for the key.

Consider the example of the workflow for loan approval:

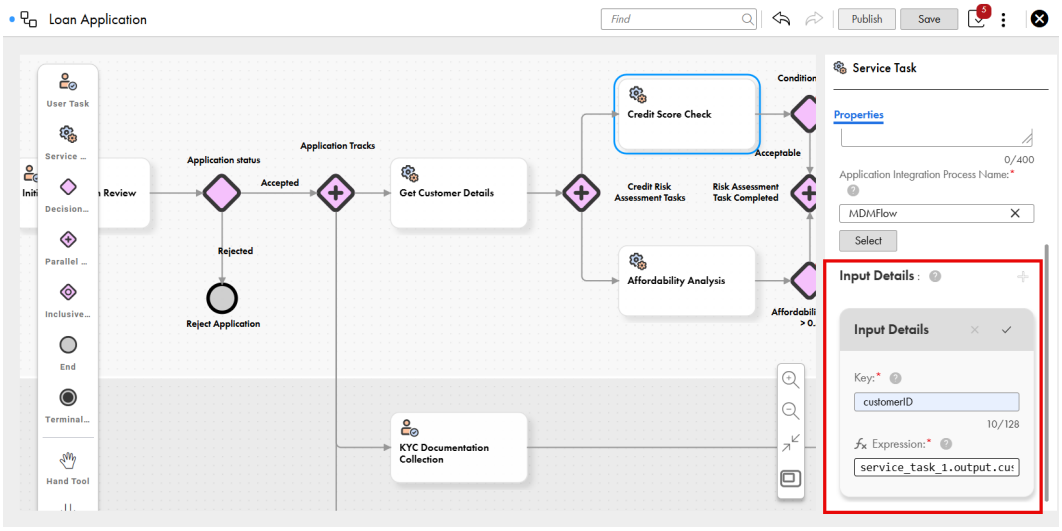

The Credit Score Check service task uses the customer ID as the input key. The expression specifies that the Get Customer Details service task provides the customer ID.

For more information about expressions, see "Expressions" on page 55.

Note: If the selected Application Integration process doesn't need any input values, you don't have to configure input details. For example, when you configure a service task for a bank admin to send promotion emails about loans to all their customers, you don't have to configure any input details for the service task.

Configure input details for Application Integration service tasks

Use input fields of the selected Application Integration process as keys and expressions as their values.

1. Select a service task on the workflow canvas.
2. On the **Input Details** tab, enter a key that matches the input field of the selected Application Integration process.
3. Enter an expression that returns a value for the key.

   For more information, see "Expressions" on page 55.
4. Configure additional input details as key-value pairs.


Conditions for connections for Application Integration service tasks

To design different paths in workflows, use gateways after service tasks. To determine the outcomes of outgoing connections from gateways to other components in the workflow, configure conditions.

Conditions are simple expressions that use the internal IDs of service tasks and output fields of Application Integration processes to determine the outcomes of connections.

For more information about expressions, see "Expressions" on page 55.

Consider the example of the workflow for the loan approval process:

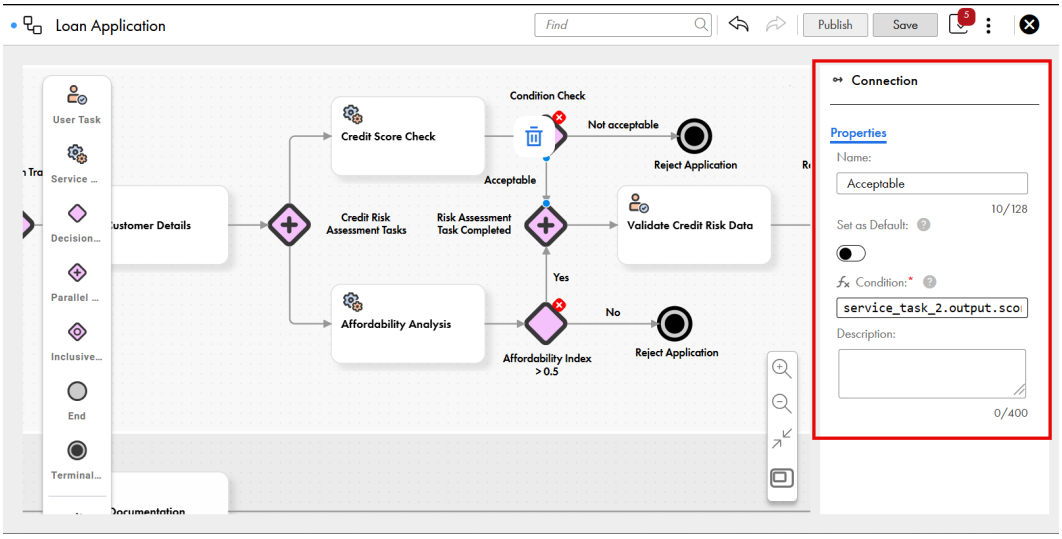

The Condition Check decision gateway determines the task outcome based on the output value of the Credit Score Check service task. If the output value is acceptable, then the loan approval process continues to the next step. If the value isn't acceptable, then the loan application is rejected.

The following sample condition goes to the next step if the Experian credit score is greater than 600:

```
service_task_2.output.score.creditScore>600 and service_task_2.output.score.bureau="Experian"
```

Note: If you want to set a connection as the default connection when conditions in other outgoing connections aren't met, then you don't have to configure a condition for the connection.

Configure conditions for Application Integration service tasks

To design different paths in workflows, configure conditions for gateways after service tasks.


1. On the workflow canvas, select an outgoing connection from a service task, and enter a name for it.
2. Enter a condition that uses the internal ID of the service task and the output field of the process.
3. Optionally, to set a connection as the default connection when conditions in other outgoing connections aren't met, turn on the **Set as Default** toggle.

Read Rule Association Status service tasks

You can use Read Rule Association Status service tasks to orchestrate task outcomes based on the validation statuses of rule associations defined in Enrichment and Validation Orchestrator.

For more information about Enrichment and Validation Orchestrator, see *Orchestrating data enrichment and validations*.

Consider the following workflow for a product onboarding process:

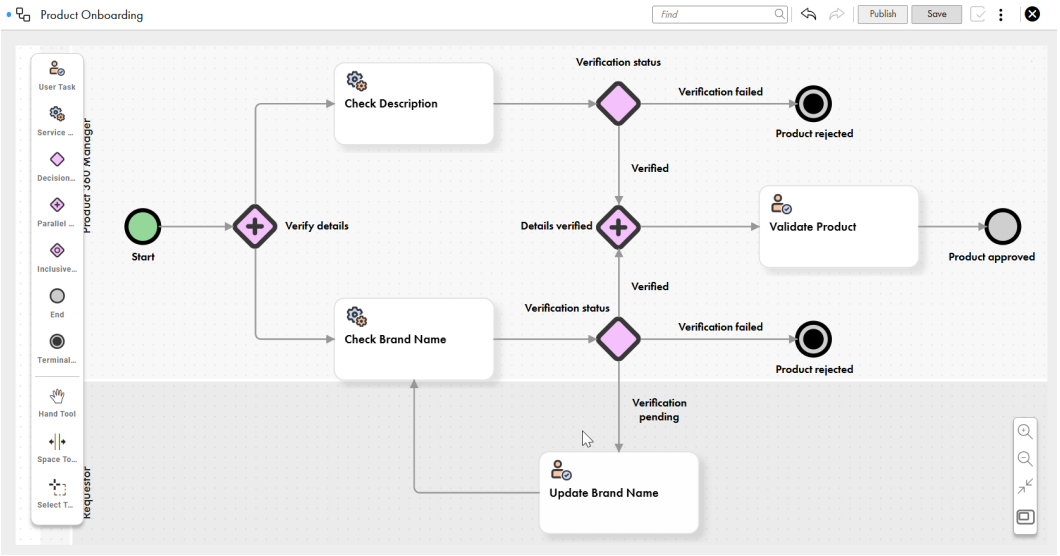

The workflow includes multiple tasks to evaluate product details. The Check Description and Check Brand Name service tasks check the statuses of the rule associations for the product description and brand name fields. The service tasks return the statuses of the rule associations configured as input for the service tasks. Task outcomes, such as onboarding the product, updating its details, or rejecting it, are then determined according to the rule association statuses.

To configure a Read Rule Association Status service task, drag a service task component to the required swimlane and perform the following steps:

1. "Configure properties for Read Rule Association Status service tasks" on page 37.
2. "Configure input details for Read Rule Association Status service tasks" on page 39.
3. "Configure conditions for Read Rule Association Status service tasks" on page 41.

Configure properties for Read Rule Association Status service tasks

To identify the service task in the workflow, configure the basic properties of the Read Rule Association Status service task, such as task name and internal ID.

1. Select a service task on the workflow canvas.
2. From the list of service task types, select **Read Rule Association Status**.
3. Enter a name for the service task.
4. Optionally, enter a custom internal ID and add a description.

Input details for Read Rule Association Status service tasks

After you configure the properties of a service task, configure input details to identify the rule associations and their validation statuses for the service task.


Input details for Read Rule Association Status service tasks consist of evaluation criteria. Evaluation criteria identify rule associations based on objective groups and severity types of rule associations. To check the statuses of rule associations from different objective groups, add multiple evaluation criteria to a Read Rule Association Status service task. You can configure a task outcome for each evaluation criteria.

Each evaluation criteria consists of the following details:

- Criteria Name. Name of the evaluation criteria.
- Objective Groups. Objective groups for identification of rule associations and their validation statuses that you use to configure task outcomes.
- Objectives. Objectives from the selected objective groups for identification of rule associations and their validation statuses. If you don't specify any objectives, the service task uses all the objectives in the selected objective groups.
- Severity Type. Severity levels of rule associations for identification. Rule associations can have a severity type of error, warning, or information. You can identify rule associations of all three severities, only error and warning severities, or only error severity.
- Set Rule Associations Without Status. Status to use when identified rule associations don't have any status because they didn't run. You can set the status to Success, Failed, or Unknown.
- Set the Exception Status as Failed. Indicates whether the status of the evaluation criteria can be set to Failed when an identified rule association has the Exception status. When you enable it, the evaluation criteria status is set to Failed. Otherwise, the status remains as Exception.

For example, a workflow to evaluate product details can have Read Rule Association service tasks to check details of the product, such as brand name and description..

The following image shows the evaluation criteria configuration for a sample product onboarding workflow:

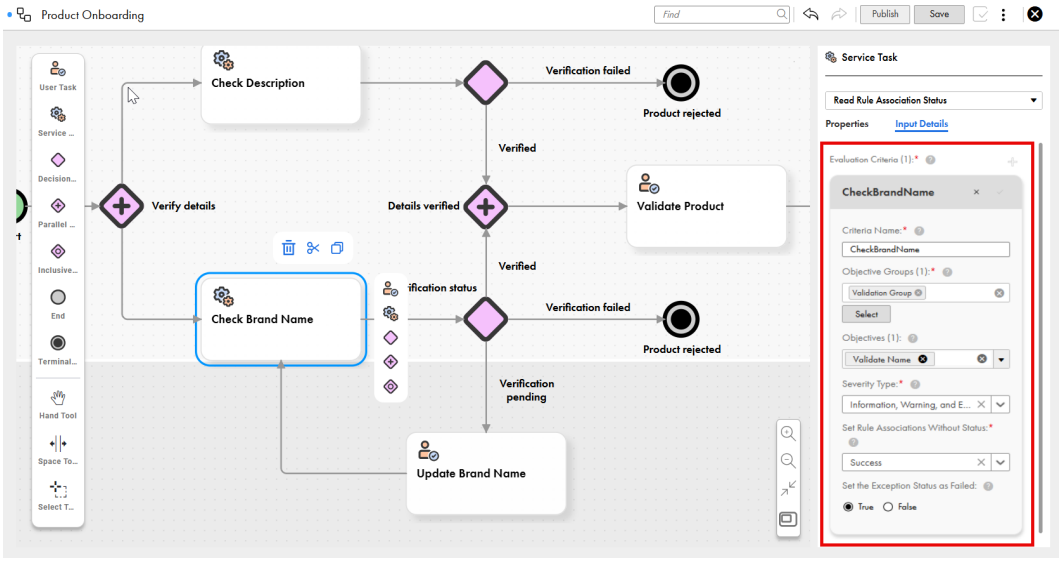

In this example, the evaluation criteria checks the statuses of rule associations with information, warning, and error severity types from the Validate Name objective in the Validation Group objective group. If a rule association didn't run and has no status, its status defaults to Success. If a rule association has an Exception status, it remains in the Exception status.

Based on the statuses of rule associations that an evaluation criteria identifies, the service task assigns a status to the evaluation criteria. You can then configure a task outcome based on that status.

For more information about evaluation criteria statuses, see "Evaluation criteria status" on page 39.

Evaluation criteria status

Each evaluation criteria returns a status based on how you configure the criteria and the statuses of rule associations that the criteria identifies. You can configure a task outcome for each evaluation criteria status.

An evaluation criteria can have one of the following statuses in the following order of priority:

- Exception: If one of the rule associations returns the Exception status, then the evaluation criteria has the Exception status.
- Failed: If one of the rule associations has the Failed status, then the evaluation criteria returns the Failed status.
- Unknown: If one of the rule associations has no status because it didn't run for the record or it's disabled, then the evaluation criteria returns the Unknown status.
- Success: If all the rule associations ran successfully, then the evaluation criteria returns the Success status.

The order of priority ensures that the criteria has the Exception status even if one rule association has the Exception status. If all rule associations run successfully, then the criteria returns the Success status.

Evaluation criteria has different statuses based on the combination of statuses they return:

- If an evaluation criteria has all the possible statuses, then it returns the Exception status.
- If an evaluation criteria has the failed, unknown, and success statuses, then it returns the Failed status.
- If an evaluation criteria has the unknown and success statuses, then it returns the Unknown status.

Note: You can configure an evaluation criteria to override the Unknown and Exception statuses of rule associations. If you select the success or failed option for the **Set Rule Associations Without Status** field while configuring the evaluation criteria, then the evaluation criteria can't return the Unknown status. Similarly, if you turn on the **Set the Exception Status as Failed** toggle, then the evaluation criteria can't return the Exception status.

Configure input details for Read Rule Association Status service tasks

Configure evaluation criteria to identify rule associations and their validation statuses. You can configure a task outcome for each evaluation criteria.

1. Select a service task on the workflow canvas.
2. On the **Input Details** tab, enter a name for the criteria.
3. Select objective groups whose rule associations you want to use.
4. Select the objectives that you want to use from the selected objective groups.

   If you don't select any objectives, the service task uses all the objectives in the selected objective groups to identify rule associations.
5. Select a severity type based on which you want to identify rule associations.
6. Select the status to assign to rule associations without statuses.
7. Optionally, to set the evaluation criteria to the Failed status when an identified rule association returns the Exception status, enable **Set the Exception Status as Failed**.

   For more information, see "Evaluation criteria status" on page 39.
8. Configure additional evaluation criteria that can use different objective groups.


Conditions for connections for Read Rule Association Status service tasks

To design different paths in workflows, use decision gateways or inclusive gateways after service tasks. To determine the outcomes of outgoing connections from the gateways to other components in the workflow, configure conditions.

A condition is a simple expression that uses the internal ID of a service task, criteria names, and criteria results. Conditions use the results of evaluation criteria to determine task outcomes.

For more information about expressions, see "Expressions" on page 55.

Consider the example of the workflow for the product onboarding process:

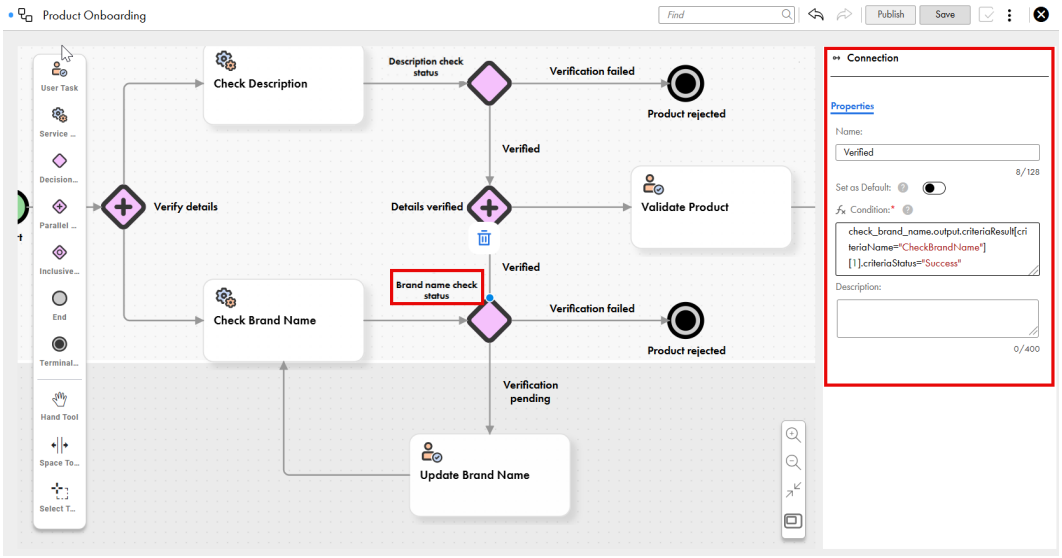

The Brand name check status decision gateway determines the task outcome based on the output value of the Check Brand Name service task.

The following sample condition is added to the connection to configure the workflow to proceed to the next step in the product onboarding process if the evaluation criteria returns the Success status:

```
check_brand_name.output.criteriaResult[criteriaName="CheckBrandName"]
[1].criteriaStatus="Success"
```

Similarly, the following sample conditions can be added to other connections from the Brand name check status decision gateway based on the evaulation criteria statuses:

- `check_brand_name.output.criteriaResult[criteriaName="CheckBrandName"][1].criteriaStatus="Exception"` for the Exception status.
- `check_brand_name.output.criteriaResult[criteriaName="CheckBrandName"][1].criteriaStatus="Failed"` for the Failed status.
- `check_brand_name.output.criteriaResult[criteriaName="CheckBrandName"][1].criteriaStatus="Unknown"` for the Unknown status.

Note: If you want to set a connection as the default connection when conditions in other outgoing connections aren't met, then you don't have to configure a condition for the connection.

Configure conditions for Read Rule Association Status service tasks

To design different paths in workflows, configure conditions for the decision gateways or inclusive gateways after service tasks.


1. On the workflow canvas, select an outgoing connection from a service task, and enter a name for it.
2. Enter a condition that uses the internal ID of a service task, a criteria name, and a criteria result.
3. Optionally, to set a connection as the default connection when conditions in other outgoing connections aren't met, turn on the **Set as Default** toggle.

Read Record Data service tasks

Use Read Record Data service tasks to orchestrate task outcomes based on record data. Configure business entity fields as input for the service task. The value of the field in the record determines task outcomes.

For example, you want to configure task outcomes based on US home address or Canadian billing address details in customer records.

The following image shows a sample customer onboarding workflow with a Read Record Data service task and an inclusive gateway:

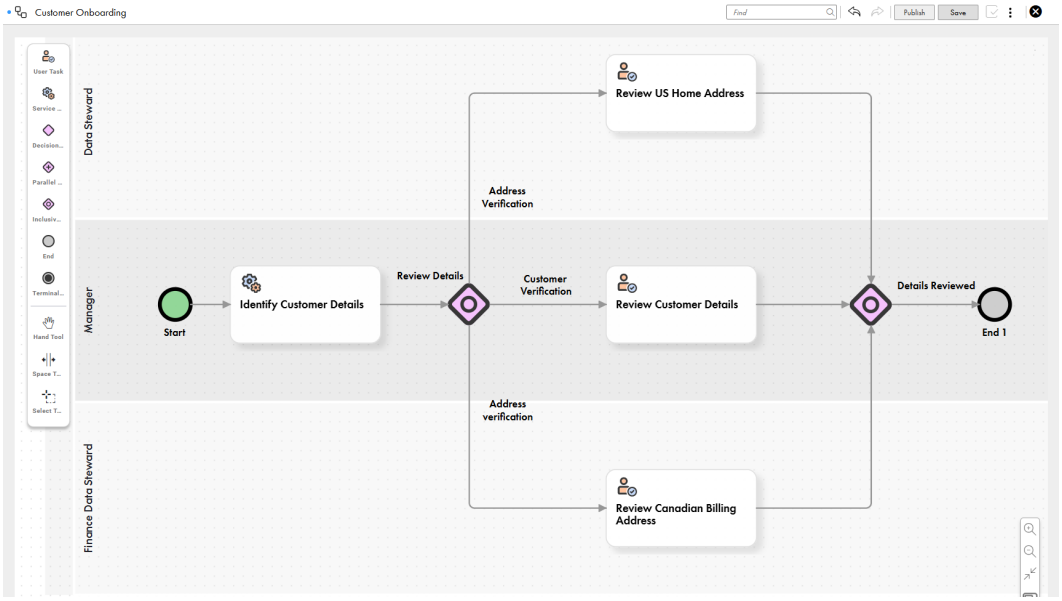

The Identify Customer Details service task checks the values of the business entity fields that you configure as its input. The service task returns a value that determines task outcomes, such as reviewing US home addresses, Canadian billing addresses, and reviewing all other customer details.

To configure a Read Record Data service task, drag a service task component to the required swimlane and perform the following steps:

1. “Configure properties for Read Record Data service tasks” on page 42.
2. “Configure input details for Read Record Data service tasks” on page 45.
3. “Configure conditions for Read Record Data service tasks” on page 55.

Configure properties for Read Record Data service tasks

To identify the service task in the workflow, configure the basic properties of the Read Record Data service task, such as task name and internal ID.

1. Select a service task on the workflow canvas.
2. From the list of service task types, select **Read Record Data**.
3. Enter a name for the service task.
4. Optionally, enter a custom internal ID and add a description.

Input details for Read Record Data service tasks

After you configure the properties of the service task, configure the business entity fields that you want the service task to check. You can add multiple business entity fields to a Read Record Data service task.

You can configure the following details for a business entity field:

- Key. Unique alphanumeric ID for the business entity field.
- Expression. Expression that specifies the value to evaluate the key. It specifies the business entity field value to be returned by the service task.
- Output Type. Type of output that the expression returns. Use the single value option for a root field and the multiple values option for fields in field groups. If you use the single value option for fields in field groups, the service task returns only the first value in the list. If you use the multiple values option for root fields, the service task returns the value of the root field as a list, which affects the format of the Condition value.


  For more information, see “Conditions for connections for Read Record Data service tasks” on page 45.

Consider a workflow that evaluates customer details.

The workflow uses the following configuration:

- A business entity field to identify the Address field group that contains multiple address types.
- A key to identify the business entity field in conditions that orchestrate task outcomes for the service task.
- A filter attribute in the expression that specifies the home address type.
- A value attribute in the expression that specifies that the service task returns the countries from the home addresses.
- The multiple values output type that returns all addresses of the home type.

The following image shows the business entity fields configured for the Identify Customer Details service task:

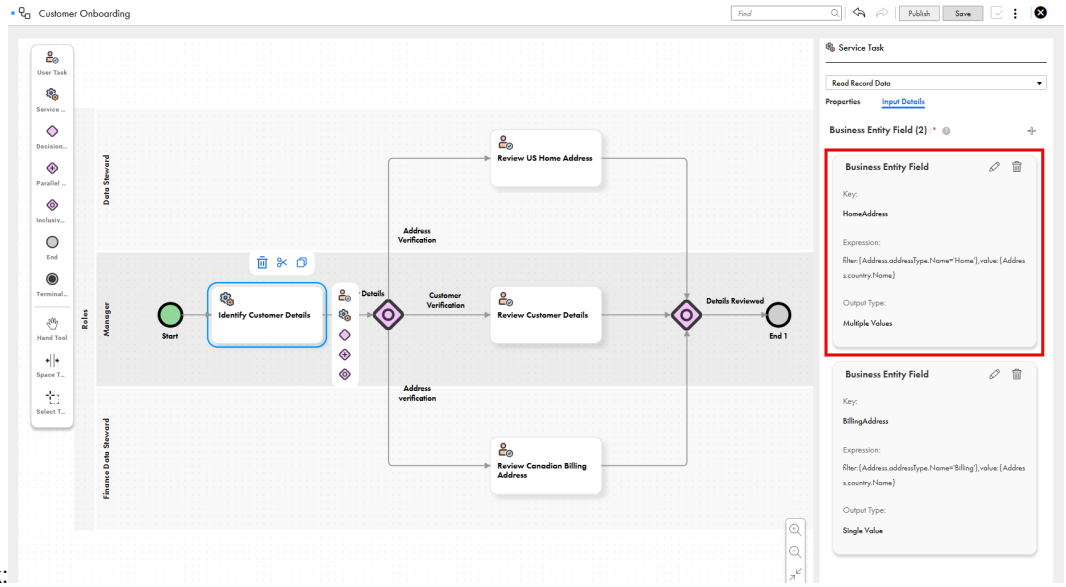

The business entity field that has HomeAddress as its key value uses the Address Type field, which is a picklist in the Address field group. The filter part of the expression filters home addresses and the value part returns countries from the home addresses. The multiple values output type is selected because customers might add multiple home addresses. The service task returns the countries from all the home addresses as a list.

Expression format for root fields

An expression contains a filter attribute and a value attribute. Ensure that the expression for a root field includes the internal ID of the business entity field that you want the service task to check.

Use the following format:

```
filter:{},value:{<Internal ID of the root field>}
```

For example, use the following expression for the Age field that has `age` as its internal ID:

```
filter:{},value:{age}
```

Consider the following rules and guidelines for root fields:

- Don't add any filters for root fields.
- Append `.Name` or `.Code` to the internal IDs of picklists and dependent picklists.

  For example, use the following expression for a root picklist:

  ```
  filter:{},value:{placeOfBirth.Name}
  ```


  Note: Append `.Code` to the internal IDs of multilingual picklists and multilingual dependent picklists. You can't append `.Name` for multilingual picklists and multilingual dependent picklists.

  For example, use the following expression for a multilingual root picklist field:

  ```
  filter:{},value:{placeOfBirth.Code}
  ```

For example, you can retrieve specific root field values from a customer record, such as those for age or height.

The following image shows a root field expression with an empty filter attribute and the Age field specified in the value attribute:

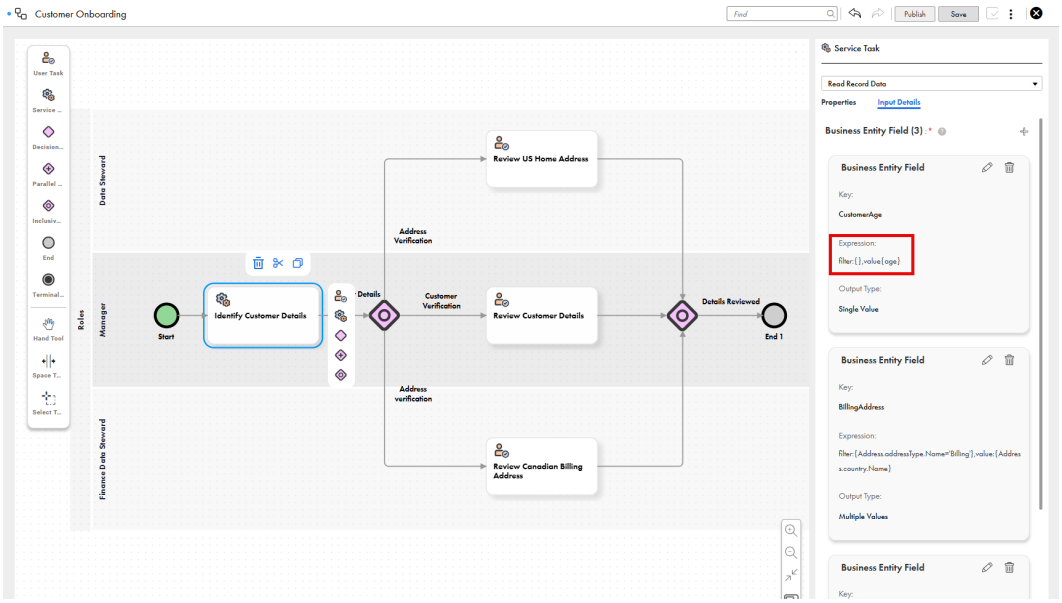

The value attribute contains the internal ID of the Age field. The filter attribute is empty because the field is a root field. The filter attribute is empty because root fields don't require filters. The service task returns the Age field value.

Expression format for fields in field groups

An expression contains a filter attribute and a value attribute. Ensure that the expression for a field in a field group includes the internal ID of the field group and the nested field that you want the service task to check. You can also configure a business entity field to filter the values in the field group.

Use the following format:

```
filter:{<Full path to the field>.<Internal ID of the field>='<filter value>'},value:
{<Full path to the field>.<Internal ID of the field>}
```

For example, use the following expression to return countries from home addresses, where the Address Type field is part of the Address field group:

```
filter:{Address.addressType.Name='Home'},value:{Address.country.Name}
```

Consider the following rules and guidelines for fields in field groups:

- Use the filter portion of the expression to filter specific values. You can add multiple filters, separated by commas.
- Enclose the filter value in single quotes (').
- Append `.Name` or `.Code` to the internal IDs of picklists and dependent picklists.


  Note: Append `.Code` to the internal IDs of multilingual picklists and multilingual dependent picklists in field groups. You can't append `.Name` for multilingual picklists and multilingual dependent picklists.

  For example, use the following expression when the Address Type and Country picklists in the Address field group are multilingual:

  ```
  filter:{},value:{Address.addressType.Code='addrs'},value:(Address.country.Code}
  ```

For example, you can retrieve specific field values from field groups in a customer record, such as those for address type or contact number type.

The following image shows the Input Details tab with filter expressions applied to picklists in the Address field group:

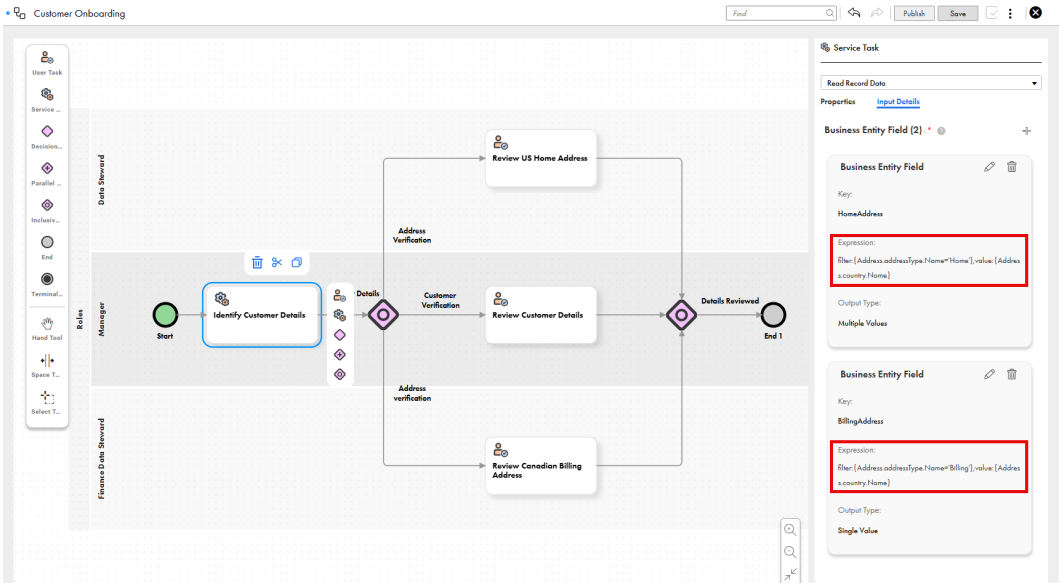

The business entity fields configured for the Identify Customer Details service task are part of the Address field group. The filter portion specifies the home or billing address type, and the value portion specifies that the service task returns the values for the Country field.

The business entity field that has `HomeAddress` as its key returns the countries from all the home addresses. The business entity field that has `BillingAddress` as its key returns the countries from all the billing addresses.

Configure input details for Read Record Data service tasks

Configure business entity fields to check their values.

1. Enter an alphanumeric value as a key.
2. Enter an expression that defines the value for the key.
3. Optionally, configure more business entity fields to check the values of additional fields.

Conditions for connections for Read Record Data service tasks

To design different paths in workflows, use gateways after service tasks. To determine the outcomes of outgoing connections from the gateways to other components in the workflow, configure conditions. Conditions use business entity field values to determine task outcomes.

Note: To run the task outcomes for all conditions that are met, use an inclusive gateway after a Read Record Data service task.

A condition uses a simple expression that uses the following components:

- Internal ID of the service task
- Key that you configured for the business entity field
- Condition parameter for the field type
- Expected value for the field

The format of a condition varies based on the field type and whether it's a root field or field in a field group. For root fields, a condition checks whether the value that the service task returns for a business entity field is the same as the expected value. For fields in field groups, a condition checks whether the list of values that the service task returns for a business entity field contains the expected value.

The following table lists the field types and their respective attribute values:

Field Type	Condition Parameter
Text and boolean fields	`stringValue`
Decimal, double, and integer fields	`numericalValue`
Date fields	`dateValue`
Date and time fields	`dateTimeValue`
List of text or boolean fields	`stringValueList`
List of decimal, double, or integer fields	`numericalValueList`
List of date fields	`dateValueList`
List of date and time fields	`dateTimeValueList`

Text and Boolean fields

Use conditions to configure task outcomes based on a single value for a text or Boolean field. For root fields with string values, a condition checks whether the value that the business entity field returns is the same as the expected value that you specify.

For fields in field groups that contain lists of string values, configure conditions in a different format.

For more information, see "List of text or Boolean fields" on page 51.

Consider the following rules and guidelines regarding conditions for root fields with string values:

- Use only the equal to (=) operator.
- Enclose string values within double quotes ("").
- Add `true` or `false` as the expected value when you check for Boolean values.

Configure conditions for root fields with string values in the following format:


```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].stringValue!=null and <internal ID of the service task>.output.result[key="<value of the
Key field>"][1].stringValue="<expected value>"
```

For example, a workflow to evaluate customer details can include a string value in a root field, such as region. The condition determines the task outcome based on the region.

The following condition checks whether the Region field, with the key value `region`, contains the value Europe:

```
identify_customer_details.output.result[key="region"][1].stringValue!=null and
identify_customer_details.output.result[key="region"][1].stringValue="Europe"
```

The following image shows the Connection properties panel with the sample condition:

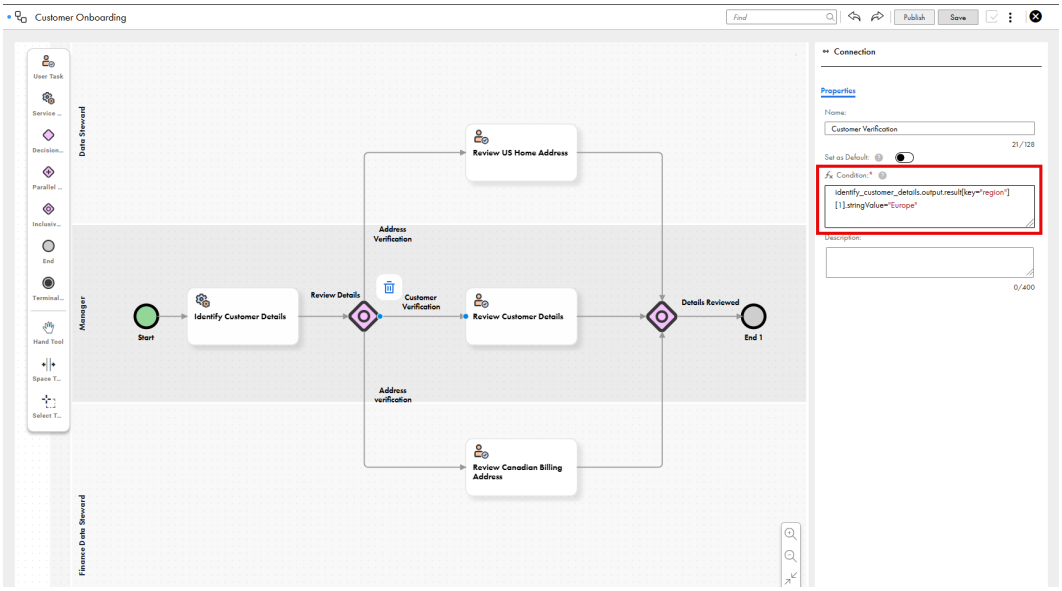

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, Europe.

Decimal, double, and integer fields

Use conditions to configure task outcomes based on a single value for decimal, double, or integer fields. For root fields with numeric values, a condition checks whether the value that the business entity field returns is the same as the expected value that you specify.

For fields in field groups that contain lists of numeric values, configure conditions in a different format.

For more information, see "List of decimal, double, or integer fields" on page 52.

You can use the following comparison operators for root fields with numeric values:

- Equal to (=)
- Not equal to (!=)
- Less than (<)
- Less than or equal to (<=)
- Greater than (>)
- Greater than or equal to (>=)
- Between <value 1> and <value 2>

Configure conditions for root fields with numeric values in the following format:


```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].numericalValue!=null and <internal ID of the service task>.output.result[key="<value of
the Key field>"][1].numericalValue<comparison operator><expected value>
```

For example, a workflow to evaluate customer details can include a numeric value in a root field, such as age. The condition determines the task outcome based on the age.

The following condition checks whether the Age field, with the key value `age`, has a value that's greater than or equal to 16:

```
identify_customer_details.output.result[key="age"][1].numericalValue!=null and
identify_customer_details.output.result[key="age"][1].numericalValue>=16
```

The following image shows the Connection properties panel with the sample condition:

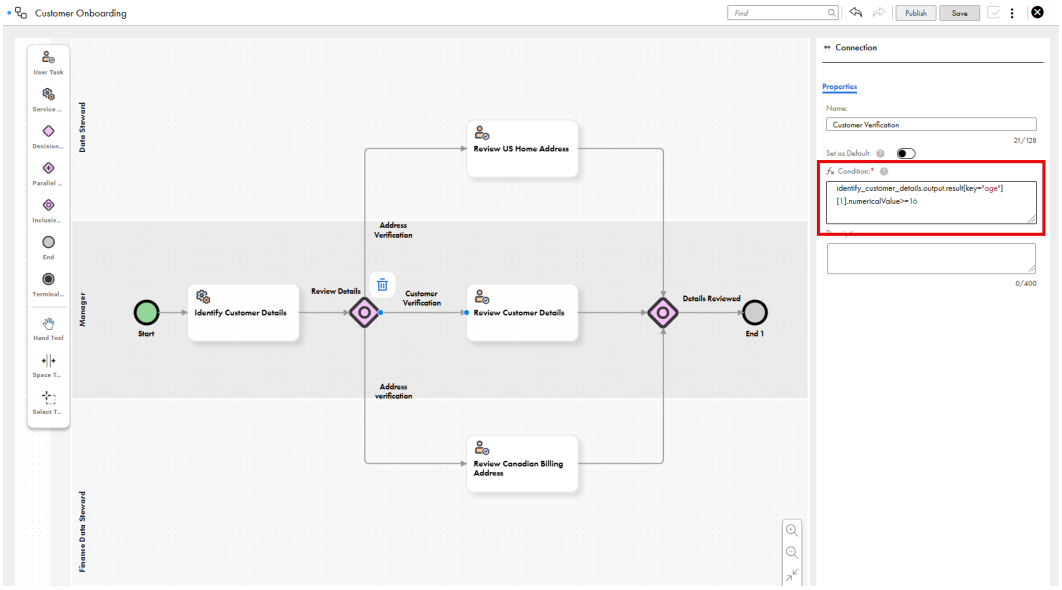

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value of 16 or above.

Date fields

Use conditions to configure task outcomes based on a single value for date fields. For root fields with date values, a condition checks whether the value that the business entity field returns is the same as the expected value that you specify.

For fields in field groups that contain lists of date values, configure conditions in a different format.

For more information, see "List of date fields" on page 53.

You can use the following comparison operators for root fields with date values:

- Equal to (=)
- Not equal to (!=)
- Less than (<)
- Less than or equal to (<=)
- Greater than (>)
- Greater than or equal to (>=)
- Between <value 1> and <value 2>

Configure conditions for root fields with date values in the following format:

```
<internal ID of the service task>.output.result[key="<value of the Key field>"][1].dateValue!
=null and date(<internal ID of the service task>.output.result[key="<value of the Key
field>"][1].dateValue)<comparison operator>date("<expected date>")
```


Enter dates in the YYYY-MM-DD format and enclose them in double quotes ("").

For example, a workflow to evaluate customer details can include a date value in a root field, such as date of birth. The condition determines the task outcome based on the date of birth.

The following condition checks whether the Date of Birth field, with the key value `dateOfBirth`, contains a value that's on or after April 12, 2010:

```
identify_customer_details.output.result[key="dateOfBirth"][1].dateValue!=null and
date(identify_customer_details.output.result[key="dateOfBirth"]
[1].dateValue)>=date("2010-04-12")
```

The following image shows the Connection properties panel with the sample condition:

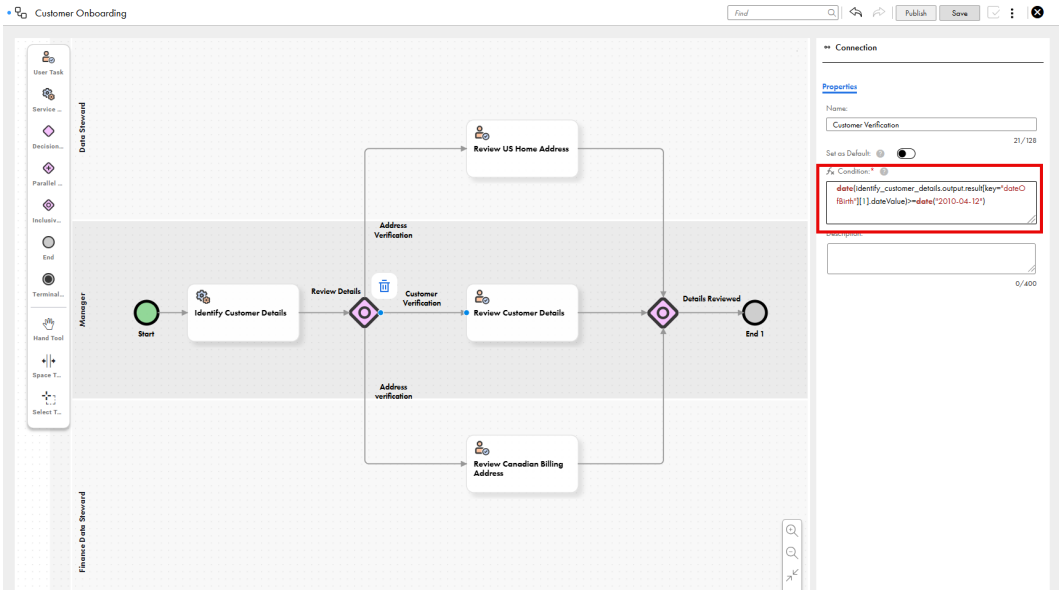

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value of April 12, 2010 or later.

Date and time fields

Use conditions to configure task outcomes based on a single value for date and time fields. For root fields with date and time values, a condition checks whether the value that the business entity field returns is the same as the expected value that you specify.

For fields in field groups that contain lists of date and time values, configure conditions in a different format.

For more information, see "List of date and time fields" on page 54.

You can use the following comparison operators for root fields with date and time values:

- Equal to (=)
- Not equal to (!=)
- Less than (<)
- Less than or equal to (<=)
- Greater than (>)
- Greater than or equal to (>=)
- Between <value 1> and <value 2>

Configure conditions for root fields with date and time values in the following format:

```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].dateTimeValue!=null and date and time(<internal ID of the service
task>.output.result[key="<value of the Key field>"][1].dateTimeValue)<comparison
operator>date and time("<expected date and time>")
```

For example, a workflow to evaluate customer details can include a date and time value in a root field, such as date and time of account registration. The condition determines the task outcome based on the date and time of account registration.


The following condition checks whether the Date and Time of Registration field, with the key value `dateAndTimeOfRegistration`, contains a value that is on or after April 12, 2010 at 10:30:00 AM IST:

```
identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue!=null and date and
time(identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue)>=date and time("2010-04-12T05:00:00+00:00")
```

You can enter date and time values in different ways. In the sample condition, the time is converted into UTC. 10:30AM in IST is 5:00 AM in UTC.

For more information, see "Date and time format for root fields" on page 50.

The following image shows the Connection properties panel with the sample condition:

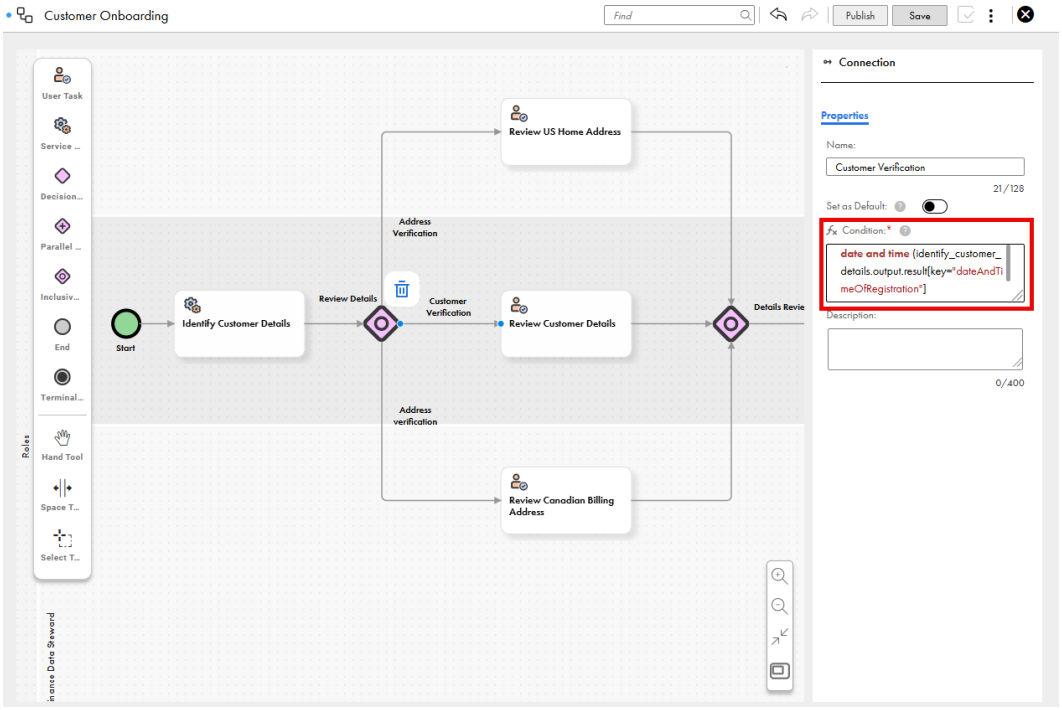

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, 5:00 AM UTC on April 12, 2010.

Date and time format for root fields

Enter date values in the YYYY-MM-DD format, and time in one of the following formats:

- Convert the date and time value to UTC. Specify the expected date and time value with the UTC offset.

For example, the following condition checks whether the Date and Time of Registration field, with the key value `dateAndTimeOfRegistration`, contains a value equal to September 1, 2026 at 5:00:00 AM UTC:

```
identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue!=null and date and

time(identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue)=date and
          time("2026-09-01T05:00:00+00:00")
```

If the time isn't in UTC time standard, convert the time to UTC time standard and add it to the condition.

- Use a timezone offset. Specify the expected date and time value with your timezone offset.

  For example, the following condition checks whether the Date and Time of Registration field, with the key value `dateAndTimeOfRegistration`, contains a value equal to September 1, 2026 at 10:30:00 AM in the UTC+05:30 timezone:

```
identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue!=null and date and
          time(date and
time(identify_customer_details.output.result[key="dateAndTimeOfRegistration"]
[1].dateTimeValue),
          "Z") = date and time(@"2026-09-01T10:30:00+05:30",
    "Z")
```

List of text or Boolean fields

Use conditions to check whether a list of text or Boolean values that a business entity field returns contains a specific value, and configure a task outcome based on the result.

For root fields that contain string values, configure conditions in a different format.

For more information, see "Text and Boolean fields" on page 46.

Configure conditions for fields that contain a list of string values in a field group in the following format:

```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].stringValueList!=null and list contains(<internal ID of the service
task>.output.result[key="<value of the Key field>"].stringValueList,"<expected value>")
```

Enclose the expected value within double quotes ("").


To check for Boolean values, add `true` or `false` as the expected value.

For example, a workflow to evaluate customer details includes string values in field groups, such as countries from multiple home addresses. The condition determines the task outcome based on the countries.

The following condition checks whether the list of home address countries, with the key value `homeAddressCountries`, contains the value United States:

```
identify_customer_details.output.result[key="homeAddressCountries"][1].stringValueList!
=null and list
contains(identify_customer_details.output.result[key="homeAddressCountries"].stringValueL
ist,"United States")
```

The following image shows the Connection properties panel with the sample condition:

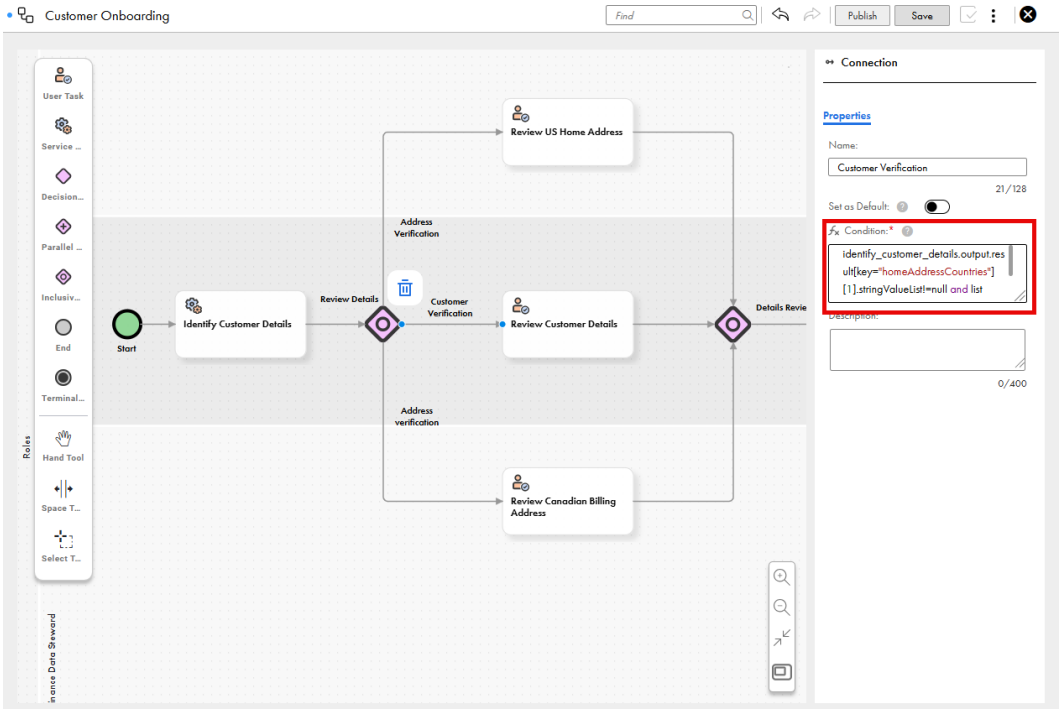

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, United States.

List of decimal, double, or integer fields

Use conditions to check whether a list of decimal, double, or integer values that a business entity field returns contains a specific value, and configure a task outcome based on the result.

For root fields that contain numeric values, configure conditions in a different format.

For more information, see "Decimal, double, and integer fields" on page 47.

Configure conditions for a list of fields that contain numeric values in a field group in the following format:


```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].numericalValueList!=null and list contains(<internal ID of the service
task>.output.result[key="<value of the Key field>"].numericalValueList,<expected value>)
```

For example, a workflow to evaluate customer details includes numerical values in field groups, such as credit scores from multiple credit bureaus. The condition determines the task outcome based on the credit scores.

The following condition checks whether the list of credit scores, with the key value `creditScoreList`, contains a specific value:

```
identify_customer_details.output.result[key="creditScoreList"]
[1].numericalValueList!=null and list
contains(identify_customer_details.output.result[key="creditScoreList"].numericalValueLis
t,700)
```

The following image shows the Connection properties panel with the sample condition:

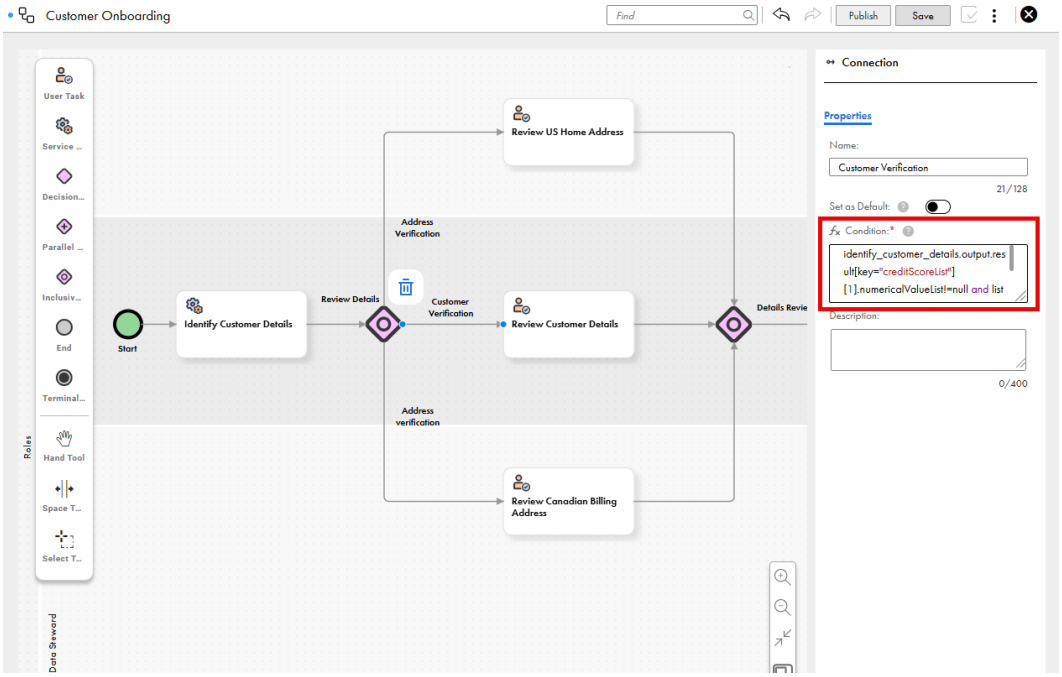

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, 700.

List of date fields

Use conditions to check whether a list of date values that a business entity field returns contains a specific value, and configure a task outcome based on the result.

For root fields that contain date values, configure conditions in a different format.

For more information, see "Date fields" on page 48.

Configure conditions for a list of fields that contain date values in a field group in the following format:

```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].dateValueList!=null and list contains(<internal ID of the service
task>.output.result[key="<value of the Key field>"].dateValueList,"<expected date>")
```


Enter dates in the YYYY-MM-DD format and enclose them in double quotes ("").

For example, a workflow to evaluate customer details includes date values in field groups, such as expiry dates from multiple identification documents. The condition determines the task outcome based on the expiry dates.

The following condition checks whether the list of identification document expiry dates, with the key value `identificationDocExpiryDates`, contains a specific date:

```
identify_customer_details.output.result[key="identificationDocExpiryDates"]
[1].dateValueList!=null and list
contains(identify_customer_details.output.result[key="identificationDocExpiryDates"].date
ValueList,"2025-04-12")
```

The following image shows the Connection properties panel with the sample condition:

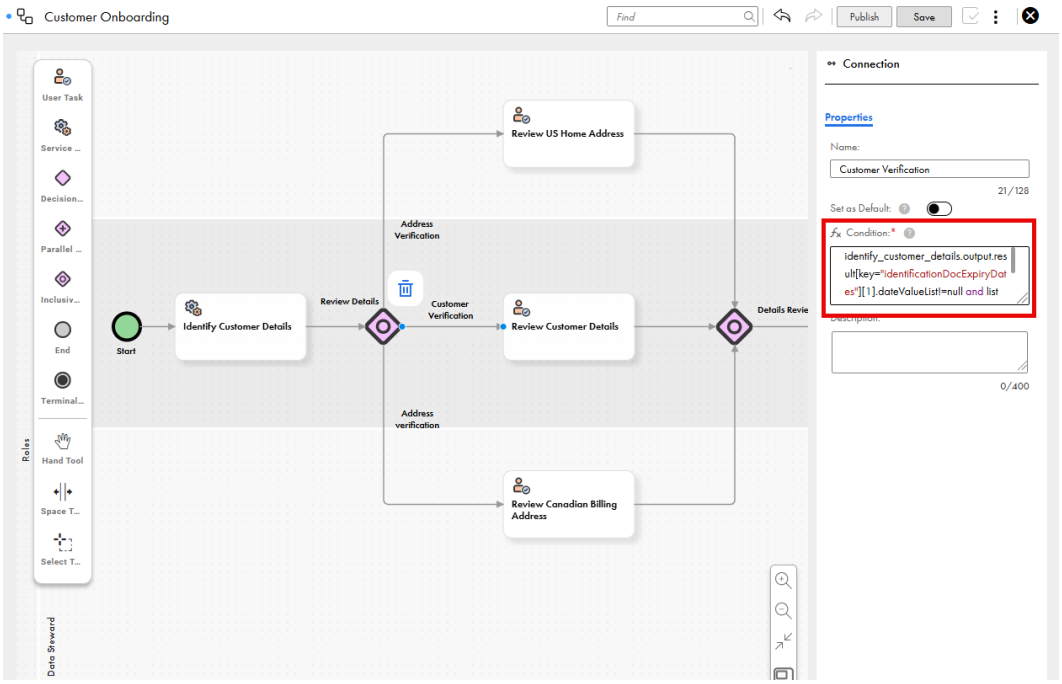

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, April 12, 2025.

List of date and time fields

Use conditions to check whether a list of date and time values that a business entity field returns contains a specific value, and configure a task outcome based on the result.

For root fields that contain date and time values, configure conditions in a different format.

For more information, see “Date and time fields” on page 49.

Configure conditions for a list of fields that contain date and time values in a field group in the following format:

```
<internal ID of the service task>.output.result[key="<value of the Key field>"]
[1].dateTimeValueList!=null and list contains(<internal ID of the service
task>.output.result[key="<value of the Key field>"].dateTimeValueList,"<expected date
and time>")
```


Enter date and time in UTC, with the UTC offset. For example, September 1, 2026 at 5:00:00 AM UTC becomes `2026-09-01T05:00:00+00:00`.

For example, a workflow to evaluate customer details includes date and time values in field groups, such as timestamps from multiple verification appointments. The condition determines the task outcome based on the timestamps.

The following condition checks whether the list of verification appointment timestamps, with the key value `verificationAppointmentTimestamps`, contains a specific date and time:

```
identify_customer_details.output.result[key="verificationAppointmentTimestamps"]
[1].dateTimeValueList!=null and list
contains(identify_customer_details.output.result[key="verificationAppointmentTimestamps"]
.dateTimeValueList,"2025-04-12T05:00:00+00:00")
```

The following image shows the Connection properties panel with the sample condition:

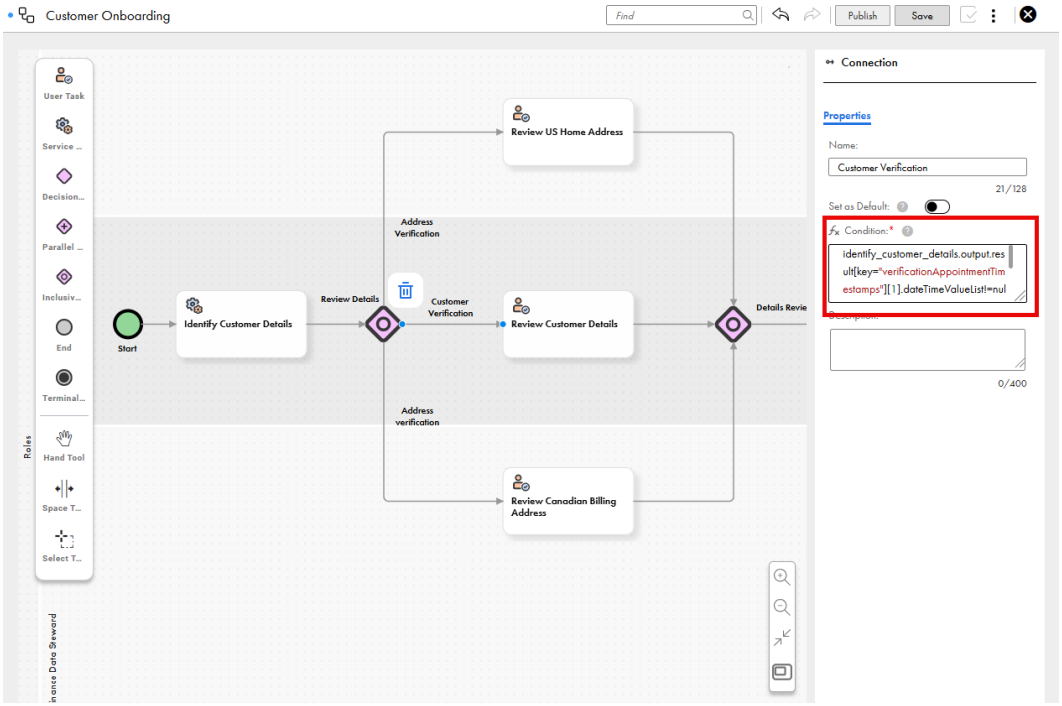

The Review Details inclusive gateway determines the task outcomes based on the output value of the Identify Customer Details service task. The workflow proceeds to the next step in the customer onboarding process if the business entity field contains the expected value, 5:00 AM UTC on April 12, 2025.

Configure conditions for Read Record Data service tasks

To determine the path that a workflow takes after a Read Record Data service task runs, configure conditions on outgoing connections from decision and inclusive gateways.

1. On the workflow canvas, select an outgoing connection from a service task, and enter a name for it.
2. Enter a condition that uses the internal ID of the service task, the key that you configured for the business entity field, and an expected value for the field.
3. Set a connection as the default connection.

   If you don't set a default connection and no conditions are met, the workflow fails.

Expressions

You can use the following types of expressions:

- Boolean
- List
- Numeric
- Lookup
- String

Boolean

Use Boolean expressions to determine whether a condition is met.

A Boolean expression can have one of following output values:

- `true`. Indicates that the condition is met.
- `false`. Indicates that the condition isn't met.

Compare two values

Use equality, inequality, and other relational conditions to compare two values.

The following table lists the operators that you can use to compare two values:

Name	Operator	Supported Value Types	Example

Equal to	=
	Note: If the canvas interface is translated to a language other than English, use `==`.
		Any value	Consider the following conditions:
			Compare numeric values
			`service_task_2.output.score.creditScore = 5`
			If the value of the `service_task_2.output.score.creditScore` expression is `5`, the result of the condition is `true`.
			Compare a value with a null value
			`service_task_2.output.score.bureau = null`
			If the value of the `service_task_2.output.score.bureau` expression is not `null`, the result of the condition is `false`.
			Compare null values
			`null = null`
			The result of the expression is `true`.

Not equal to	!=	Any value	Consider the following conditions:
			Compare numeric values
			`service_task_2.output.score.creditScore != 5`
			If the value of the `service_task_2.output.score.bureau` expression is `5`, the result of the condition is `false`.
			Compare a value with a null value
			`service_task_2.output.score.bureau != null`
			If the value of the `service_task_2.output.score.bureau` expression is not `null`, the result of the condition is `true`.
			Compare null values
			`null != null`
			The result of the expression is `false`.

Name	Operator	Supported Value Types	Example
Less than	<	Numeric. Enter a numeric value that can be an integer or a decimal.	Consider the following condition: `service_task_2.output.score.creditScore < 6` If the value of the `service_task_2.output.score.creditScore` expression is less than `6`, the result of the condition is `true`.
Less than or equal to	<=	Numeric. Enter a numeric value that can be an integer or a decimal.	Consider the following condition: `service_task_2.output.score.creditScore <= 11` If the value of the `service_task_2.output.score.creditScore` expression is less than or equal to `11`, the result of the condition is `true`.
Greater than	>	Numeric. Enter a numeric value that can be an integer or a decimal.	Consider the following condition: `service_task_2.output.score.creditScore > 7` If the value of the `service_task_2.output.score.creditScore` expression isn't greater than `7`, the result of the condition is `false`.
Greater than or equal to	>=	Numeric. Enter a whole or decimal number.	Consider the following condition: `service_task_2.output.score.creditScore >= 20` If the value of the `service_task_2.output.score.creditScore` expression is greater than or equal to `20`, the result of the condition is `true`.

Ensure that the you compare values of the same type.

List

Use List expressions to manage a list of values. You can create a list, add values to a list, and also combine multiple lists.

Create a list

To create a list of values, use the following format:

```
[value1,value2,value3]
```

For example, to create a list of numeric values, use the following expression:

```
[service_task_1.output.score.creditScore,service_task_2.output.score.creditScore,service_
task_3.output.score.creditScore]
```

Retrieve a value in the list

To retrieve a value at a specific position within a list, use the following format:

```
[list][index]
```

For example, if you used the following expression to retrieve the second element in a list :

```
[service_task_1.output.score.creditScore,service_task_2.output.score.creditScore,service_
task_3.output.score.creditScore][2]
```

If the index starts at 1, the result of the expression is the value of `service_task_2.output.score.creditScore`.

Typically, the index of a list starts at 1.

Numeric

Use numeric values or perform arithmetic operations to derive numerical values.

You can use a numeric value, such as `7`, `3.14`, `8.24`, `300`, directly in your expression.

The following table describes the types of arithmetic operations that you can perform with numeric expressions:

Name	Description	Operator	Example
Addition	Adds value to another value.	+	Consider the following expression: `service_task_2.output.score.bureau + 3` If the value of `service_task_2.output.score.bureau` is 2, the result of the expression is `5`.
Subtraction	Subtracts a value from another value.	-	Consider the following expression: `3 - service_task_2.output.score.bureau` If the value of `service_task_2.output.score.bureau` is 2, the result of the expression is `1`.
Multiplication	Multiplies a value by another value.	*	Consider the following expression: `5 * service_task_2.output.score.bureau` If the value of `service_task_2.output.score.bureau` is 3, the result of the expression is `15`.
Division	Divides a value by another value.	/	Consider the following expression: `service_task_2.output.score.bureau / 2` If the value of `service_task_2.output.score.bureau` is 6, the result of the expression is `3`.
Exponentiation	Raises a value to the power of another value.	**	Consider the following expression: `service_task_2.output.score.bureau ** 3` If the value of `service_task_2.output.score.bureau` is 2, the result of the expression is `8`.

Lookup

Use a lookup expression to get a value that is associated with a key.

To retrieve values that are associated with a key, use the following format:

```
<servicetask>.output.<key>
```

In lookup expression, enter values for the following parameters:

- <servicetask>. Identifier of the service task for which you want to define the expression.
- <key>. Key for which you want to retrieve the data.

If the value that you want to retrieve doesn't exist, the result of the expression is `null`.

For example, consider the following response from an Application Integration process for a service task with the ID, service_task1:

```
[
{
 "taskId": "service_task1"
  "requestId": "req-7f3a9b1b-4de2-4f0f-9f8a-9f2fdb80c1b2",
  "customer": {
    "customerId": "CUST-002913",
    "nationalId": "ABCDE1234F",
    "fullName": "Kathy Smith",
    "dob": "1993-07-21"
  },
]
```

To retrieve the value of the `fullname` parameter, use the following expression:

```
service_task1.output.customer.fullname
```

The result of the expression is `Kathy Smith`.

String

Use string values in various ways within any expression.

You can use a string value such as ice, cream, directly in your expression.

Combine string values

You can add multiple string values to create a new string value that contains characters of all the strings.

Consider the following expression:

```
service_task_2.output.score.scoreBand + "-Score"
```

If the value of `service_task_2.output.score.scoreBand` is `Good`, the result of the expression is `Good-Score`.

Defining business events with native workflows

To ensure that relevant stakeholders review and approve data before it becomes master data, define business events with native workflows that you configure in Business 360 Console. To share business events with external targets after you define the business events, configure publishing events.

You can define business events for user-triggered actions, such as changes that users make to records, relationships, or hierarchies through business applications and REST API. You can also define business events for actions that MDM SaaS performs, such as identifying potential matches that require manual review.

The review tasks that the events create require human intervention. Stakeholders provide input for review tasks in the workflow. A workflow ensures that the right people can provide input, challenge, and approve actions on business events. A business process is considered complete only when the assigned users complete the review tasks by taking appropriate actions.

When you define an event for an asset, you can configure event conditions to trigger any published workflow that you select. When you configure business events for create and update actions on record data, you can choose to skip workflows for data that rule associations have successfully validated or enriched. If the data validation or enrichment fails, MDM SaaS routes the changes to the workflow.

For more information, see "Configuring workflow skip check" on page 60.

Note: Tasks created for native workflows expire after 90 days if they are inactive or unattended and the respective workflows are aborted. If you want to extend the duration, contact Global Customer Support. However, if you don't complete tasks or extend their expiration and the task inbox becomes full, then new tasks aren't created.

When multiple business events are configured for the same triggering actions and event sources, MDM SaaS uses the most recently updated business event. To manage which business event is used, enable or disable business events as needed.

For more information, see "Disabling and enabling business events based on native workflows" on page 65.

Configuring workflow skip check

Configure business events for create and update actions on record data to skip workflows when rule associations successfully validate or enrich the record data.

You can configure workflow skip check in one or both of the following ways:

- Reuse the configuration from the workflow. Use rule associations from the evaluation criteria configured for Read Rule Association Status service tasks. You can also specify which objective groups and objectives to use.
- Add custom configuration. Add the objective groups that you want to use. You can also specify whether to use all or some of the objectives in the objective group.

If all the rule associations succeed, the workflow is skipped. If the changes meet the event conditions for other business events, the respective workflows might be triggered. If any rule association fails to validate or enrich data, the changes are routed to the configured workflow.

Create a business event

You can create business events for actions that users perform, such as creating, updating, and unmerging records, or creating and updating relationships. You can also create events for the actions that MDM SaaS performs, such as identifying potential matches for manual review.

For example, you might want to trigger a workflow when users create or update a business entity record or hierarchy. You can also trigger a workflow for changes related to specific fields, field groups, and attributes. You can create rules for the selected fields and field groups or attributes so that the workflow is triggered only when the field, field group, or attribute meets the specified criteria.

For create and update actions on record data, configure business events to skip workflows when rule associations successfully validate or enrich the data.

For more information, see "Configuring workflow skip check" on page 60.

1. Click **New**.

   The **New Asset** dialog box appears.
2. Click **Business Process** > **Business Event**.
3. Click **Create**.

   The **Business Event** dialog box appears.
4. Enter a name for the event.
5. Click the asset picker icon, select an asset to trigger a workflow, and click **OK**.

   If you select a business entity, you can add actions taken on record data and relationships as event conditions. If you select a hierarchy, you can add actions taken on the hierarchy as event conditions.

6. In the **Event Details** section, select the status of the business event.

   To use the business event when the event conditions are met, set it to the enabled status. To use the event in future, disable it.

   You can enable an event on the **Business Events** page or on the **Events** tab of the selected business entity.

   For more information about the business event status, see "Disabling and enabling business events based on native workflows" on page 65.

7. In the **Event Conditions** section, specify when to trigger a workflow.

Options	Description
Required	Sends the updates to reviewers for approval. When users click **Send for Approval**, MDM SaaS creates a review task. You can trigger a workflow when users edit specific fields of a record or attributes of a relationship. If you don't specify any fields or attributes to trigger workflows, all changes require approval. If you specify any fields or attributes, the workflow is triggered only when users make changes to those fields or attributes. Users can save changes to other fields or attributes without approval.
Optional	Allows users to save their changes without approval or send their changes to reviewers for approval. When users click **Submit**, users can save their changes without approval. When users click **Send for Approval**, MDM SaaS creates a review task. **Note:** When workflow trigger is optional and users delete a record, users see the **Delete** and **Send for approval** buttons.

   Note: You can't configure optional workflow trigger option for the Resolve Potential Matches triggering action for record data. For match pairs, stakeholder review is mandatory.

8. Click **Add an event condition** for an asset.
9. Configure event conditions for the selected asset.
   - Add actions taken on record data, relationships, or both record data and relationships as event conditions when you select a business entity as the asset.

     For more information about configuring an event conditions for a record, see "Configuring an event condition for a record" on page 62.
     For more information about configuring an event condition for a relationship, see "Configuring an event condition for a relationship" on page 64.
   - Add actions taken on a hierarchy as event conditions when you select a hierarchy as the asset.

     For more information about configuring an event condition for a hierarchy, see "Configuring an event condition for a hierarchy" on page 65.
10. Optionally, to skip workflows when rule associations successfully validate or enrich record data, perform the following steps to configure workflow skip check:
    a. To use the configuration from the Read Rule Association Status service tasks in the workflow, select the option in the **Workflow Skip Check** section.
    b. To add custom configuration, click **Add objective group** and select the relevant objective groups.
    c. Optionally, specify which objectives from the objective group to include.
    d. Specify whether to consider rule associations without statuses as successful or failed.
    e. Specify the severity levels of the rule associations to be considered for workflow skip check.
    f. Specify whether to consider rule associations with exception status as failed.
11. Click **Next**.

The **Workflow** page appears.

12. Click the asset picker icon, and select a workflow.
13. Perform one of the following steps based on the business event configuration:
    - Click **Next** if you configured workflow skip check using the configuration from Read Rule Associations service tasks.
    - Click **Save** if you didn't configure workflow skip check or added only custom configuration for workflow skip check.

    If you configured workflow skip check using Read Rule Association Status service tasks, configuration details appear on a new page.

    If you didn't configure workflow skip check, the new business event is saved.
14. Review the configuration details for workflow skip check.
15. Optionally, click **Edit** to select which objective groups and objectives from Read Rule Association Status service tasks to include, then click **Save**.

Configuring an event condition for a record

When you configure a business event for a business entity, you can specify event conditions based on actions taken on record data, relationships, or both. You can also specify the event sources, such as business applications and REST APIs through which these actions are performed.

For more information about configuring an event condition for a relationship, see "Configuring an event condition for a relationship" on page 64.

1. In the **Record Data** section on the **Event** page, select the triggering actions and event sources.

   The following table describes the user and system actions on record data that can trigger workflows:

Triggering Action	Event Sources	Description
Create	Business applications REST API	When users create records, the event triggers a workflow. By default, the event applies to all fields, but you can configure it to trigger the workflow only when users enter values in specific fields or field groups.
Update	Business applications REST API	When users update records, the event triggers a workflow. By default, the event applies to all fields, but you can configure it to trigger the workflow only when users enter values in specific fields or field groups.
Delete	Business applications REST API	When users delete records, the event triggers a workflow.
Unmerge	Business Applications REST API	When users unmerge source records from master records, the event triggers a workflow.

Triggering Action	Event Sources	Description
Manual Merge	Business Applications REST API	When users merge two records, the event triggers a workflow.
Resolve Potential Matches	Match pairs	When MDM SaaS identifies potential matches for manual review, the event triggers a workflow.

2. If you select business applications or REST API as an source, select the affected user roles.
3. If you selected the Create action, Update action, or both the actions, click **Customize** in the **Fields** column.

   The option to configure specific fields for which you want to trigger a workflow is also available if you selected the Delete action along with the Create or Update action.
4. To add specific fields for which you want to trigger a workflow, perform the following tasks:
   a. Select the fields and dynamic field values to trigger a workflow for the selected actions, and click **Next**.

      You can't select dynamic field definitions or fields from field groups nested within other field groups.

      Note: If you add multiple fields, the workflow is triggered when users modify any of those fields.
   b. In the **Select Dynamic Fields** dialog box, select the dynamic fields that you want.
   c. To trigger a workflow only when the value of a selected field meets a specific criteria, click **Add a rule**.
   d. From the list of fields, select the field for which you want to create the rule.
   e. From the **Operator** list, select an operator for the rule.
   f. Enter a value to complete the rule.

      Values aren't case-sensitive.

      A green checkmark appears next to the selected field when the rule is complete and valid.
   g. Optionally, add additional rules.

      Note: If you add multiple rules for a field, a workflow is triggered when the conditions of all the rules are met. For example, you set two rules for the Tax field, such as Country equals USA and State equals California. When the Tax field value changes and both conditions match, the event triggers a workflow.
   h. To add the fields and apply the rules, click **Finish**.

      Note: When you configure rules for fields that are enriched with data from Dun & Bradstreet, MedPro, and Global Legal Entity Identifier Foundation (GLEIF) through extensions, MDM SaaS business applications don't trigger workflows for these fields.
5. Optionally, add more conditions.

   If you select the merge, unmerge, or delete triggering actions for record data, you can't add additional conditions.

Configuring an event condition for a relationship

When you configure a business event for a business entity, you can specify event conditions based on actions taken on record data, relationships, or both. You can also specify the event sources, such as business applications and REST APIs through which these actions are performed.

For more information about configuring an event condition for a record, see "Configuring an event condition for a record" on page 62.

1. In the **Relationships** section on the **Event** page, select the triggering actions and event sources.

   The following table describes the user actions on relationships that can trigger workflows:

Triggering Action	Event Sources	Description
Create relationship	Business applications REST API	When users create non-hierarchical relationships between records, the event triggers a workflow. By default, the event applies to all attributes, but you can configure it to trigger the workflow only when users enter values in specific attributes.
Update relationship	Business Applications REST API	When users update non-hierarchical relationships between records, the event triggers a workflow. By default, the event applies to all attributes, but you can configure it to trigger the workflow only when users enter values in specific attributes.
Delete relationship	Business Applications REST API	When users delete non-hierarchical relationships between records, the event triggers a workflow.

2. Select all relationships or a specific relationship type.

   The list of relationships appear based on the selected business entity.

3. If you select business applications or REST API as an source, select the affected user roles.

4. If you selected the Create relationship action, the Update relationship action, or both for only a specific relationship type, click **Customize** in the **Attributes** column.

   The option to configure specific fields for which you want to trigger a workflow is also available if you selected the Delete relationship action along with at least one of the other actions.

5. To add specific attributes for which you want to trigger a workflow, perform the following tasks:

   a. Select the attributes to trigger a workflow for the selected actions, and click **Next**.

      Note: If you add multiple attributes, the workflow is triggered when users modify any of those attributes.

   b. To trigger a workflow only when the value of a selected attribute meets a specific criteria, click **Add a rule**.

   c. From the list of attributes, select the attribute for which you want to create the rule.

   d. From the **Operator** list, select an operator for the rule.

   e. Enter a value to complete the rule.

      Values aren't case-sensitive.

      A green checkmark appears next to the selected attribute when the rule is complete and valid.

   f. Optionally, add additional rules.

Note: If you add multiple rules for an attribute, a workflow is triggered when the conditions of all the rules are met.

g. To add the attributes and apply the rules, click **Finish**.

6. Optionally, add more conditions.

Configuring an event condition for a hierarchy

When you configure a business event for a hierarchy, you can specify event conditions based on actions taken on the hierarchy. You can also specify the event sources, such as business applications and REST APIs through which these actions are performed.

1. In the section for hierarchies on the **Event** page, select the triggering actions and event sources.

   The following table describes the user actions on hierarchies that can trigger workflows:

Triggering Action	Event Sources	Description
Create association	Business Applications REST API	When users create hierarchies, the event triggers a workflow.
Update association	Business Applications REST API	When users update hierarchical relationships between records, the event triggers a workflow.
Delete association	Business Applications REST API	When users delete hierarchical relationships between records, the event triggers a workflow.

2. If you select business applications or REST API as an source, select the affected user roles.
3. Optionally, add more conditions.

Viewing and editing business events

You can view all the business events for your organization and their details on the Business Events page.

You can filter the events by name, type, affected business entity and roles, and workflow. You can also sort the events by name, event type, workflow, and when they were updated.

To edit an event, navigate to the event from the list. You can edit the properties and details of the events, such as the name, affected user roles, and event conditions. You can also update the workflow that the business event uses.

Disabling and enabling business events based on native workflows

When multiple business events have the same triggering actions and sources, MDM SaaS uses the most recently updated business event. To manage which business event is used, enable or disable business events. To control which business event MDM SaaS uses, you can enable or disable business events.

Business events are enabled by default. However, you can disable business events when you create them.

You can disable business events in the following cases:

- You have multiple business events for the same triggering actions and event sources, and want to prioritize a specific one. In this case, disable the other business events, especially those that are more recently created or updated than the business event you want to keep.

- You configure a new business event but want to use it later.

  For more information, see “Create a business event” on page 60.

To enable or disable an existing business event, select the appropriate option on the Events tab of the business entity or on the Business Events page.

When you enable a disabled business event, MDM SaaS uses it only if it's the most recently updated business event applicable for the changes.

CHAPTER 4

Defining publishing events

When you define a publishing event, you define the details of the event, the days in which the event must expire, and the version of the payload metadata to use.

Decide on the actions and assets for which you want to trigger event publishing to an external target.

For example, you might define a publishing event to publish events related to actions such as create, update and delete of the Person business entity records. When a Person business entity record is created, updated, or deleted, these actions trigger the publishing event. You can use the Business 360 Events Connector to access these events in the MDM SaaS data store.

For more information about Business 360 Events Connector, see Business 360 Events Connector.

You can publish events in real time or in batches. To publish events in batches, you can define a publish business events job. For more information about defining publish business events jobs, see *Defining publish business events jobs*.

For more information about publishing events in real time, see "Publishing business events in real time" on page 76.

Create a publishing event

Create a business event and define the details of the event to trigger event publishing. For example, you might want to trigger event publishing when business entity records are created and updated.

1. Click **Business Events**.
2. On the **Business Events** page, click **Add Event** > **Publishing Event**.
3. On the **New Event** page, specify the following event details:

Event Detail	Description
Display Name	Name of the publishing event.
Internal ID	Unique business event identifier, that's generated based on the display name that you enter. You can't change the internal ID after you create the business event.

Event Detail	Description
Expires In	Duration for which the event is retained in the MDM SaaS data store. Specify a whole number.
Version	Version of the event payload metadata. To create a publishing event for the create, update, delete, merge, unmerge, purge, and restore actions, select v2. The v1 version is deprecated. Default is v2.

4. In the **Event Scenarios** section, click **Add Event Scenario**, and then configure an event scenario.
   a. Click the asset picker icon, and then select the asset for which you want to trigger event publishing.

      The asset type is populated based on the asset you select.
   b. From the **Actions** list, select the actions to trigger event publishing.

      The following table describes actions that trigger events publishing:

Action	Description
Created	Publishes events when records are created.
Updated	Publishes events when records are updated.
Deleted	Publishes events when records are soft-deleted.
Merged	Publishes events when records are merged.
Unmerged	Publishes events when records are unmerged.
Purged	Reserved for future use.
Restored	Publishes events when deleted records are restored to the active state.

5. Optionally, add additional event scenarios.
6. Click **Next**.
7. On the **Payload** page, select the parameters that you want to appear in the JSON payload.
8. Optionally, you can edit the JSON property name of the parameters that you selected. Click the property name, enter a value, and then press **Enter**.

   For more information about payload parameters, see "Business event payloads" on page 68.
9. Optionally, to review the structure of the event payload metadata, copy the JSON schema or download it.

Business event payloads

When business events are published from MDM SaaS applications to targets that Cloud Data Integration supports, event payloads are generated in the JSON format. The event payloads contain parameters that represent information related to the business events. You can use event payloads to audit, track changes, generate reports, or integrate with downstream systems.

For example, you can create records in a business application and propagate the records with all or some fields to a downstream billing system. Also, when you merge and unmerge records in a business application,

you can capture these events for processing by downstream systems. The Publish Business Events jobs generate event payloads that contain information related to events, such as event type, asset details, contributing source records, and event metadata.

When you configure a publishing event, you can also configure the data that you want to appear in event payloads.

When records are validated or enriched, event payloads include an update event that indicates whether the record has passed or failed the validation, or the validation or enrichment process failed with an exception.

When you ingress records with business IDs, versions 1 and 2 of the event payloads include an update event. Additionally, version 1 of the event payload incorrectly includes two create events, and version 2 incorrectly includes a create and merge event that you can ignore.

Event payload parameters - version 2 (Recommended)

The payload metadata contains parameters that capture the publishing events for the create, update, delete, merge, unmerge, and restore actions.

The following table describes the v2 version of the payload parameters:

Parameter Name	JSON Property Name	Description
Active Business ID	activeBusinessId	Unique identifier of the master record. When records are merged, the active business ID is the surviving business ID of one of the master records. For example, two master records with business IDs MDM1 and MDM 2 are merged. If the surviving business ID is MDM1, then the active business ID of both master records is MDM1. The business ID of the master record that's updated is the same as it's active business ID MDM1. The business ID of the master record that didn't survive during the merge has the business ID MDM2. When a record is created, updated, deleted, unmerged, and restored, the active business ID is the same as the business ID.
Affected XREFs	affectedXrefs	Object that contains details about the source records that the event affects. The object contains the following source record parameters: - sourceSystemId. Internal ID of the source system that the source record belongs to. - sourcePKey. Primary key of the source record that was used to load the record into the MDM SaaS data store, such as 6242171e87eb93605aeb80e3. - businessId. Unique identifier of the source record, such as MDM00000016V7K. - xrefType. Type of source record. The parameter can have one of the following values: - DATA. Source record that's created when a record is created. - PATCH. Source record that's created when a record is updated. - DELETED. Source record that's created when a record is deleted. - ANCHOR. For internal use only. - xrefChange. The type of event that affected the source record such as create, update, delete, merge, or unmerge. - membershipChange. Indicates whether the source record is added or removed as a contributor to the record. The parameter can have the following values: ADDED, REMOVED, or NONE.
Asset Internal ID	assetId	Unique identifier of an asset. For example, the ID of the predefined Organization business entity in Customer 360 SaaS is c360.organization. Custom assets can have default or custom IDs, such as customer.

Parameter Name	JSON Property Name	Description
Asset Type	assetType	Type of asset, such as a business entity or relationship. The parameter values are BUSINESS_ENTITY or RELATIONSHIP.
Business ID	businessId	Unique identifier of the record, such as MDM00000016V7K.
BVT Changed	bvtChanged	Indicates whether the best version of the truth for a master record has changed. The parameter values are true or false.
Change List ID	changeListId	Unique identifier to track a set of changes or changes that are part of an approval workflow, such as 87698623465834e32af8. If changes to a business entity record don't go through an approval workflow, the value is null.
Changed Fields	changedFields	List of business entity fields that are updated.
Correlation ID	correlationId	Unique identifier of the event, such as ffd74e22-2f9f-4184-b3d3-4792bfb08b5a.
Data Diff	dataDiff	Object that contains the business entity fields that are updated and the type of update that occurred as a result of the event along with the old and new value of the field. The object contains the following parameters of the field: - fieldPath. Path to the updated field. - changeType. Type of update to the field. The parameter can have the following values: - CREATED. The field is created. A field can be created in the following scenarios: - A new master record is manually created. - An unmerged record becomes a new master record. - A new field is manually added to a record. - A new field is added to a record as a result of a merge action. - A deleted field is restored. - DELETED. The field is deleted. - UPDATED. The field is changed. A field can be changed as a result of a merge or unmerge action, or a field is manually updated with a new value. - oldValue. Value of the field before the update. - newValue. Value of the field after the update.
Date of Change	dateOfChange	Date when the record was updated. The date is in epoch format, such as 1648498462137.

Parameter Name	JSON Property Name	Description
Event Type	eventType	Type of event, such as create, update, delete, and merge. The parameter can have one of the following values: - MASTER_CREATED. Indicates that a master record was created. - MASTER_UPDATED. Indicates that a master record was updated. If the record data is enriched, a MASTER_UPDATED event is always generated immediately after a MASTER_CREATED event for the same record. - MASTER_DELETED. Indicates that a record was soft-deleted. - MASTER_MERGED. Indicates that records were merged to form a master record. - MASTER_UNMERGED. Indicates that records were unmerged from a master record. - MASTER_PURGED. Indicates that a record was deleted permanently. - MASTER_RESTORED. Indicates that a previously deleted record was restored to the active state.
Implied Operation	impliedOperation	Original event that a user triggers. For example, if the user triggered a create event that's part of a workflow and the workflow contains several events, the implied operation is create.
Members	members	Object that contains contributing source records of the event. When multiple records merge, a new record is created. The event payload associated with the new record can have multiple contributing source records within the members object. The object contains the following source record parameters: - sourceSystemId. Internal ID of the source system that the source record belongs to. - sourcePKey. Primary key of the source record that was used to load the record into the MDM SaaS data store, such as 6242171e87eb93605aeb80e3. - businessId. Unique identifier of the source record, such as MDM00000016V7K.
Merged Business IDs	mergedBusinessIds	Array that contains the business IDs of master records that didn't survive during a merge.
Payload	payload	Object that contains the user-defined fields of the record.
Review	review	Indicates whether the event triggered an approval workflow. If the event triggered an approval workflow, the parameter can have one of the following values: APPROVED or REJECTED.
Source System Internal ID	sourceSystem	Internal ID of the source system where the event occurred. For example, if the event occurred in Customer 360 SaaS, the internal ID is c360.default.system.

Parameter Name	JSON Property Name	Description
Record States	states	Object that contains details about the state of the record after the event. The object contains the following parameters: - base. Indicates the state of the record. The parameter can have the following values: - ACTIVE. The record is active after the event. - DELETED. The record was deleted and inactive after the event. - validation. Indicates the validation status of the record. The parameter can have the following values: - PASSED. Record has passed validation. - FAILED. Record has failed validation. - EXCEPTION. The validation or enrichment process failed to complete due to errors, such as connection timeouts or lack of response from the validation service. - SKIPPED. Record was not validated and validation might occur again at a later time.
User Name	userName	User name of the user who triggered the event, such as john or john.smith@abc.com.

Event payload parameters - version 1 (Deprecated)

Version 1 of the payload metadata is deprecated. When you define a new publishing event, use version 2. The v1 version of the payload metadata contains parameters that capture the publishing events for the create, update, and delete actions.

The following table describes the v1 version of the payload parameters:

Parameter Name	JSON Parameter Name	Description
Change List ID	changeListId	Unique identifier to track a set of changes or changes that are part of an approval workflow, such as 87698623465834e32af8. If changes to a business entity record don't go through an approval workflow, the value is null.
Changed Data	changedData	List of business entity fields that are updated.
Asset Internal ID	entityGuid	Unique identifier of the asset. For example, the ID of the predefined Organization business entity in Customer 360 SaaS is c360.organization. Custom assets can have default or custom IDs, such as customer.
Asset Type	entityType	Type of asset, such as a business entity. The parameter value is BusinessEntity.

Parameter Name	JSON Parameter Name	Description
Event Type	eventType	Type of event, such as create, update, or delete. The parameter can have one of the following values: - RECORD_CREATED. Indicates that a record was created. - RECORD_UPDATED. Indicates that a record was updated or deleted. See the softDeleteHint parameter to determine whether the record was deleted. If the record data is enriched, a RECORD_UPDATED event is always generated immediately after a RECORD_CREATED event for the same record. When you run the reprocess master data job to recalculate trust scores of master records, multiple RECORD_UPDATED event payloads with empty dataDiff parameters are generated. Ensure that you filter out these events with the empty dataDiff parameters. - RECORD_DELETED. Indicates that a source record was unmerged from a master record. The RECORD_CREATED and RECORD_UPDATED events occur along with the RECORD_DELETED events. - RECORD_APPROVED_CREATED. Indicates that a created record went through an approval workflow and was approved. - RECORD_APPROVED_UPDATED. Indicates that an updated or deleted record went through an approval workflow and was approved. - RECORD_APPROVED_DELETED. Indicates that a record was unmerged to form new records. The original record that's unmerged is treated as deleted. These records went through an approval workflow and were approved.
Lineage Hint	lineageHint	Indicates whether lineage exists when merge or unmerge operations result in create, update, or delete events.The parameter can have the following values: - MERGED. Indicates that an update event merged a record with other records. The record is part of the lineage of another record it merged into. - ACTIVATED. Indicates that an update event unmerged a record from another record and activated the record as a separate record.

Parameter Name	JSON Parameter Name	Description
Members	members	Object that contains the list of contributing source records of the event. When multiple records merge, a new record is created. The event payload associated with the new record can have multiple contributing source records within the members object. The object contains the following source record parameters: - sourceSystemId. Internal ID of the source system that the source record belongs to. - sourcePKey. Primary key of the source record that was used to load the record into the MDM SaaS data store, such as 6242171e87eb93605aeb80e3. - businessId. Unique identifier of the source record, such as MDM00000016V7K.
Meta	meta	Additional metadata about the event. The metadata contains information such as the internal ID of the business entity that the event was triggered for, internal identifier of the business entity record, and the user name of the user who created the asset.
Parent	parent	Object with two record identifier parameters. When records merge, the new master record that's created becomes the parent of the contributing records. Records for which a create event is published don't have a parent and the parameter value is null. The object contains the following parameters of the parent record: - internalId. Internal identifier of the new master record that records merge into, such as 6242171e87eb93605aeb80e2. - businessId. Unique identifier of the new master record that records merge into, such as MDM00000016V7K.
Payload	payload	Object that contains the user-defined fields of the record.
Soft Delete Hint	softDeleteHint	Indicates whether a record is active or soft-deleted. You can restore soft-deleted records. The parameter can have one of the following values: DELETED or RESTORED. For example, when you delete a record from an MDM SaaS business application, the record is soft-deleted and exists in the system. In this case, the value of the eventType parameter is RECORD_UPDATED and the value of the softDeleteHint parameter is DELETED.
Source System Internal ID	sourceSystem	Internal ID of the source system where the event occurred. For example, if the event occurred in Customer 360 SaaS, the internal ID is c360.default.system.
User Name	userName	User name of the user who triggered the event, such as john or john.smith@abc.com.

Publishing business events in real time

You can publish events from MDM SaaS to streaming targets that Cloud Data Integration supports in real time. For example, after a user creates a record in MDM SaaS, you can publish the details to a Kafka topic.

To publish business events in real time, perform the following tasks:

- "Step 1. Configure a Secure Agent as a runtime environment" on page 76
- "Step 2. Create the source and target connections" on page 76
- "Step 3. Create a publishing event" on page 76
- "Step 4. Create a streaming ingestion and replication task" on page 76

Step 1. Configure a Secure Agent as a runtime environment

In Administrator, configure a Secure Agent that is up and running as a runtime environment to run a streaming ingestion and replication task.

Ensure that you enable the following IDMC and connectors for the Secure Agent group:

- Data Integration
- Mass Ingestion-Streaming
- Business 360 Events Connector
- Streaming connectors, such as Kafka, Amazon S3, and flat files

For more information about Secure Agent, see *Runtime Environments* in the Administrator help.

For more information about enabling or disabling services and connectors for a Secure Agent group, see *Enabling or disabling services and connectors for a Secure* in the Administrator help.

Step 2. Create the source and target connections

In Administrator, create the source and target connections.

When you create the source connection, select **Business 360 events** as the connection type, and select the runtime environment. When you create the target connection, select a streaming connector as the connection type, and select the runtime environment.

For more information about creating connections, see *Configuring a connection* in the Administrator help.

Step 3. Create a publishing event

In Business 360 Console, create a publishing event.

For more information about creating publishing events, see "Create a publishing event" on page 67.

Step 4. Create a streaming ingestion and replication task

In Data Integration, create a streaming ingestion and replication task to publish business events in real time.

1. In Data Integration, click **New**.

   The **New Asset** dialog box appears.
2. Select **Data Ingestion and Replication** > **Streaming Ingestion and Replication Task**, and click **Create**.

3. On the **Definition** page, select the Secure Agent that you configured as a runtime environment. For more information about configuring a Secure Agent as a runtime environment, see "Step 1. Configure a Secure Agent as a runtime environment" on page 76.
4. On the **Source** page, select the source connection that you created and the publishing event as the business object. For more information about creating the source and target connections and creating a publishing event, see "Step 2. Create the source and target connections" on page 76 and "Step 3. Create a publishing event" on page 76.
5. On the **Target** page, select the target connection that you created. For more information about creating the source and target connections, see "Step 2. Create the source and target connections" on page 76.
6. Optionally, add transformations and set the runtime options.
7. Save the task, and then click **Deploy**.

After you deploy the task, a streaming ingestion and replication job runs on the Secure Agent. You can monitor the progress, performance, and status of the job in Operational Insights.

Note: If the connection resets while a streaming ingestion and replication job runs, MDM SaaS might republish the same business event payloads. To handle duplicate payloads, filter them in your downstream application.

For more information about configuring a streaming ingestion and replication task, see *Configuring a streaming ingestion and replication task* in the Data Integration help.

INDEX

B

business event
  creating 15
  defining 14
  publishing event 67

I

Informatica Global Customer Support
  contact information 7
Informatica Intelligent Data Management Cloud
  web site 6

M

maintenance outages 7

P

publishing event
  about 67
  creating 67

S

status
  IDMC 7
system status 7

T

trust site
  description 7

U

upgrade notifications 7
user task
  business events, configuring 11

W

web site 6
workflow properties
  business events, defining 19
workflow tasks
  business events, configuring 18