Informatica®

Informatica® Multidomain MDM
10.5 HotFix 5

Data Director Configuration Manager Online Help

Informatica Multidomain MDM Data Director Configuration Manager Online Help
10.5 HotFix 5
February 2026

© Copyright Informatica LLC 1998, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-02-10

Table of Contents

Preface 8

Informatica Resources 8

- Informatica Network 8
- Informatica Knowledge Base 8
- Informatica Documentation 9
- Informatica Product Availability Matrices 9
- Informatica Velocity 9
- Informatica Marketplace 9
- Informatica Global Customer Support 9

Chapter 1: Getting Started 10

Starting the Informatica Data Director Configuration Manager 10

Language Display 10

Home Page 11

- Screen Areas 11
- Command Bar 11

Saving Changes Manually 12

Chapter 2: IDD Applications 13

IDD Applications 13

Managing IDD Applications 13

Configuring Applications 14

Chapter 3: Creating a New IDD Application 15

Basic Steps 15

IDD Application Properties 16

Chapter 4: Editing an IDD Application 17

Basic Steps 17

About Editing 17

Command Buttons 18

IDD Application Properties 18

Chapter 5: Configure Logical ORS Databases 19

Logical ORS and Physical ORS Databases 19

Add a Logical ORS Database 19

Bind a Logical ORS to a Physical ORS Database 19

Chapter 6: Subject Area Overview 21

Subject Area Configuration 22

Schema Representation in the Hub Store. . . . 22
Subject Area Hierarchy. . . . 23
Subject Areas. . . . 23
Subject Area Groups. . . . 23
Subject Area Children and Grandchildren. . . . 23
Relationships Among Subject Areas. . . . 23
Types of Relationships. . . . 24
Match Paths. . . . 24
Subject Areas Tab. . . . 24
Tree Levels. . . . 25
Navigating the Tree. . . . 25

Chapter 7: Configure a Subject Area Group. . . . 26

Configure a Subject Area Group. . . . 26
Basic Steps. . . . 26
Add a Subject Area Group. . . . 26
Edit a Subject Area Group. . . . 26
Delete a Subject Area Group. . . . 27
Subject Area Group Properties. . . . 27

Chapter 8: Configure a Subject Area. . . . 28

Configure a Subject Area. . . . 28
Basic Steps. . . . 29
Add a Subject Area. . . . 29
Edit a Subject Area. . . . 29
Delete a Subject Area. . . . 29
Subject Area Properties. . . . 29
Properties Tabs. . . . 30
Configure the Layout. . . . 31
Change the Number of Columns in the Form View. . . . 31
Change the Columns to Display. . . . 31
Configure the Column Layout. . . . 31
Configure Match Settings. . . . 35
Match Settings. . . . 35
Configure Search. . . . 36
Configure Match Columns. . . . 36
Configure Search on Child Entities. . . . 36
Configure Data Security. . . . 37
Setting Security Filter to Restrict the List of Values for the Lookup Fields. . . . 37
Configure Data Masking. . . . 38
Configure Cleanse Functions. . . . 39
About Cleanse Functions. . . . 39
Inline Cleanse Functions. . . . 39

Inputs and Outputs. . . . 39
When Cleanse Functions are Invoked. . . . 39
Custom Data Validation. . . . 39
Edit the Cleanse Function for a Column. . . . 40
Configure Labels. . . . 40
Configure Task Assignments. . . . 41
Configure the Order of Subject Area Child Tabs. . . . 41

Chapter 9: Configure a Subject Area Child. . . . 42

Basic Steps. . . . 42
Add a Subject Area Child. . . . 42
Edit a Subject Area Child. . . . 42
Delete a Subject Area Child. . . . 42
Configure the Layout. . . . 43
Configure Cleanse Functions. . . . 43
Subject Area Child Properties. . . . 43
Properties Tabs. . . . 44

Chapter 10: Configure a Subject Area Grandchild. . . . 45

Basic Steps. . . . 45
Add a Subject Area Grandchild. . . . 45
Edit a Subject Area Grandchild. . . . 45
Delete a Subject Area Grandchild. . . . 46
Configure the Layout. . . . 46
Configure Cleanse Functions. . . . 46
Subject Area Grandchild Properties. . . . 46
Properties Tabs. . . . 47

Chapter 11: Deleting an IDD Application. . . . 48

Basic Steps. . . . 48
Consequences of Deleting an IDD Application. . . . 48

Chapter 12: Exporting an IDD Application. . . . 49

Basic Steps. . . . 49
About Exporting. . . . 49
Manual Configuration After Exporting. . . . 49
Importing After Exporting. . . . 49

Chapter 13: Validating an IDD Application Configuration. . . . 50

Basic Steps. . . . 50
About Validation. . . . 50
Why Validate an IDD Application Configuration. . . . 50
When to Validate an IDD Application Configuration. . . . 51

Validation Results. . . . 51
Validation Levels. . . . 51
Interpret Validation Results. . . . 52

Chapter 14: Migrate Bundle. . . . 53

Basic Steps. . . . 53
About the Migrate Bundle. . . . 53

Chapter 15: Changing the Application State. . . . 54

Basic Steps. . . . 54
About the Application State. . . . 54
Application States. . . . 54
Application Deployment. . . . 55

Chapter 16: Importing IDD Application Components. . . . 56

Basic Steps. . . . 56
About Importing. . . . 56
Import Options. . . . 57

Chapter 17: Redeploying an IDD Application. . . . 58

Redeploying an IDD Application. . . . 58

Chapter 18: Clearing the Cache for an IDD Application. . . . 59

Basic Steps. . . . 59
Metadata Cache for IDD Applications. . . . 59

Chapter 19: Testing a Deployed IDD Application. . . . 60

Testing a Deployed IDD Application. . . . 60
Basic Steps. . . . 60
Tips for Testing. . . . 60

Chapter 20: IDD Application Components. . . . 61

IDD Application Components. . . . 61
IDD Configuration File. . . . 61
IDD Bundles. . . . 62
Metadata Bundles. . . . 62
Messages Bundles. . . . 62
Error Code Bundles. . . . 62
Online Help Files. . . . 62
IDD Help. . . . 62
Custom IDD Help. . . . 63
Application Logo. . . . 63
User Exits Implementation. . . . 63

Chapter 21: Binding Controls to IDD Applications. 64

Basic Steps. 64

Adding a Control. 64

Editing a Control. 64

Deleting a Control. 65

Showing the URL. 65

Deploying Controls. 65

Uploading a ZIP file with Control Data. 65

Control Properties. 66

Chapter 22: Generate Business Entity and Business Entity Services Configuration Files. 67

Generate Business Entity and Business Entity Services Configuration Files Overview. 67

Generating Business Entity and Business Entity Services Configuration Files. 68

Index. 69

Preface

Informatica Data Director (IDD) is a web-based utility used to add, modify, and manage IDD applications.

An IDD application is the main configuration and deployment unit for IDD implementations. An IDD application is what business users see when they launch and log into IDD.

For comprehensive information about IDD configuration, including the overall process, design considerations, manual configuration tasks, and supplemental reference information, see the *Multidomain MDM Data Director Implementation Guide*.

For information about business entity configuration and Entity 360 framework configuration, see the *Multidomain MDM Provisioning Tool Guide*.

This online help focuses only on the portion of the IDD application implementation process that involves the use of the IDD Configuration Manager.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Velocity

Informatica Velocity is a collection of tips and best practices developed by Informatica Professional Services and based on real-world experiences from hundreds of data management projects. Informatica Velocity represents the collective knowledge of Informatica consultants who work with organizations around the world to plan, develop, deploy, and maintain successful data management solutions.

You can find Informatica Velocity resources at http://velocity.informatica.com. If you have questions, comments, or ideas about Informatica Velocity, contact Informatica Professional Services at ips@informatica.com.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:
https://www.informatica.com/services-and-training/customer-success-services/contact-us.html.

To find online support resources on the Informatica Network, visit https://network.informatica.com and select the Support option.

CHAPTER 1

Getting Started

This chapter includes the following topics:

- Starting the Informatica Data Director Configuration Manager, 10
- Language Display, 10
- Home Page, 11
- Saving Changes Manually, 12

Starting the Informatica Data Director Configuration Manager

To start the Informatica Data Director Configuration Manager, use a supported web browser.

1. Open a supported web browser.

   For information about supported web browsers, see the Product Availability Matrix on the Informatica My Support Portal at https://mysupport.informatica.com/community/my-support/product-availability-matrices.

2. In the address bar, enter the following URL to access the IDD Configuration Manager login page:

   ```
   http://<MDM Hub host>:<port number>/bdd/config/
   ```

3. Enter the login name and password, and then click **Log In**.

   You must log in as a user that has all privileges for all base objects. For more information about configuring user privileges, see the *Multidomain MDM Security Guide*.

The Informatica Data Director Configuration Manager launches and the Applications page appears.

Language Display

You can change the user interface to a different language of the IDD Configuration Manager.

You can change the language of the user interface for the Login page. IDD Configuration Manager stores the information about the language you last used for the Login page. When you view the Login page the next time, IDD Configuration Manager displays the last used language of the user interface.

After you log in, the IDD Configuration Manager displays all the elements of the interface such as control buttons, forms, menus, and navigation links in the language that you selected for the login page.

Note: English is the only available language for version 9.6 of MDM Multidomain Edition for Microsoft SQL Server.

Home Page

After you log in, the IDD Configuration Manager displays the home page.

Screen Areas

The home page includes the following areas.

Area	Description
Objects Tree	Hierarchy of defined objects. - **Application List** - List of configured IDD applications - **Control Types** - List of configured control types.
Command Bar	Available commands (described below).
Properties Pane	Properties of the selected item in the objects tree. - **Applications** - List of configured IDD applications and their properties - *Application*- Edit screen for the selected application. - **Control Types** - List of configured control types. - *Control Type* - Edit screen for the selected control type.
Deployment Status	Deployment status of the selected IDD application in the application list.
Help	Click to display online help for the IDD Configuration Manager.
Log Out	Click to log out of the IDD Configuration Manager.
Languages	Use to change the language of the user interface.
About	Provides version information of the Informatica MDM Data Director and the environment information of the Informatica MDM hub.

Related Topics:

- "IDD Applications" on page 13

Command Bar

The available command bar depends on your selection in the objects tree (within the applications list or control types list).

Applications

Command	Description	See
Add	Add a new IDD application.	Chapter 3, "Creating a New IDD Application" on page 15
Edit	Edit the configuration of the selected IDD application.	Chapter 4, "Editing an IDD Application" on page 17
Delete	Delete the selected IDD application.	Chapter 11, "Deleting an IDD Application" on page 48
Export	Export an IDD application configuration (ZIP file).	Chapter 12, "Exporting an IDD Application" on page 49
Validate	Validate the selected IDD application.	Chapter 13, "Validating an IDD Application Configuration" on page 50
Application State	Change the state of the IDD application: full, limited, or not deployed.	Chapter 15, "Changing the Application State" on page 54
Import	Import an IDD application configuration.	Chapter 16, "Importing IDD Application Components" on page 56
Re-deploy	Redeploy an IDD application.	Chapter 17, "Redeploying an IDD Application" on page 58
Clear Cache	Clears the metadata cache for the selected IDD application.	Chapter 18, "Clearing the Cache for an IDD Application" on page 59

Control Types

Note: Available only if the Informatica Data Controls (IDC) feature is licensed for your MDM Hub implementation.

Note: Informatica Data Controls is not available for version 9.6 of MDM Multidomain Edition for Microsoft SQL Server.

Command	Description
Add	Add a new control type.
Edit	Edit the configuration of the selected control type.
Delete	Delete the selected control type.

Saving Changes Manually

Whenever you make changes, you must save them explicitly by clicking **Save**. The IDD Configuration Manager does not automatically save changes for you.

CHAPTER 2

IDD Applications

This chapter includes the following topics:

- IDD Applications, 13
- Managing IDD Applications, 13
- Configuring Applications, 14

IDD Applications

An *IDD applicatio*n is the main configuration and deployment unit for IDD implementations. An IDD application is what business users see when they launch and log onto IDD.

Refer to the *Multidomain MDM Data Director Implementation Guide* for comprehensive information about IDD configuration, including the overall IDD implementation process, design considerations, manual configuration tasks, and supplemental reference information. This online help focuses only on the portion of the IDD application implementation process that involves the use of the IDD Configuration Manager.

Managing IDD Applications

To manage IDD applications, you need to perform the following tasks:

- Creating a New IDD Application
- Editing an IDD Application
- Deleting an IDD Application
- Exporting an IDD Application
- Validating an IDD Application Configuration
- Changing the Application State
- Importing IDD Application Components
- Redeploying an IDD Application
- Clearing the Cache for an IDD Application
- Testing a Deployed IDD Application

Configuring Applications

- Configure Subject Areas
  - Configure a Subject Area
  - Configure a Subject Area Group
  - Configure a Subject Area Child
  - Configure a Subject Area Grandchild
- Configure Tasks
- Binding Controls to IDD Applications (available if your Informatica MDM Hub implementation has a Informatica Data Controls license)

  Note: Informatica Data Controls is not available for version 9.6 of MDM Multidomain Edition for Microsoft SQL Server.

CHAPTER 3

Creating a New IDD Application

This chapter includes the following topics:

- Basic Steps, 15
- IDD Application Properties, 16

Basic Steps

To create a new IDD application:

1. On the IDD Configuration Manager home page, click the **Add** button.
2. In the Add Application dialog, specify the IDD application properties.
3. Add one or more logical ORS databases:
    1. In the Applications tree click on the application that you added.
    2. Click the **Add** button in the Logical ORS Databases section.
    3. Specify the Name of a logical ORS database then choose the ORS database from the drop-down list.
4. Click **Save**.
5. Bind each logical ORS database to a physical ORS database. For each logical ORS, click the associated drop-down list and select a physical ORS. When you are finished, click **Save**.

The IDD Configuration Manager displays the newly-added IDD application in the Applications List.

Related Topics:

- "IDD Application Properties" on page 16
- "Configure Logical ORS Databases" on page 19
- "Editing an IDD Application" on page 17

IDD Application Properties

A new IDD application is defined by the following properties.

Property	Description
Name	Internal (system) name for this IDD application. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name that is displayed to end users of this IDD application.
Description	Brief description of the IDD application.
Logical ORS Databases	One or more logical ORS databases associated with this IDD application.
Session Timeout (Minutes)	Session timeout set in minutes for the IDD application.
Default Locale	Locale of the IDD application.

CHAPTER 4

Editing an IDD Application

This chapter includes the following topics:

- Basic Steps, 17
- About Editing, 17
- Command Buttons, 18
- IDD Application Properties, 18

Basic Steps

To edit an existing IDD application:

1. In the objects tree, select the name of the IDD application that you want to edit.
2. Click **Edit**. The IDD Configuration Manager displays the Edit Application screen for the selected IDD application.
3. Edit the IDD application properties.
4. Click **Save** to save your changes.

Tip: To return to the IDD Configuration Manager home page without saving any changes, click **Applications** at the top of the Applications list.

About Editing

Use the Edit command to display the Edit Application screen, which allows you to view and modify the configuration for the selected IDD application. It guides you through the configuration details, loading metadata about the physical ORS to present the available options.

Command Buttons

The following command buttons are available in the Edit Application screen.

Button	Description
Save	Saves the latest changes to the database. If the application state is anything but **Not Deployed**, then the IDD application is redeployed after it is saved.
Validate	Runs validation on the current IDD application configuration and displays the validation report.
Bind ORS	Used to change the logical/physical ORS binding.

Related Topics:

- "Configure Logical ORS Databases" on page 19

IDD Application Properties

A new IDD application is defined by the following properties.

Property	Description
Name	Internal (system) name for this IDD application. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name that is displayed to end users of this IDD application.
Description	Brief description of the IDD application.
Logical ORS Databases	One or more logical ORS databases associated with this IDD application.
Session Timeout (Minutes)	Session timeout set in minutes for the IDD application.
Default Locale	Locale of the IDD application.

CHAPTER 5

Configure Logical ORS Databases

This chapter includes the following topics:

- Logical ORS and Physical ORS Databases, 19
- Add a Logical ORS Database, 19
- Bind a Logical ORS to a Physical ORS Database, 19

Logical ORS and Physical ORS Databases

An IDD application configuration declares one or more logical ORS databases. A *logical ORS database* is an IDD configuration pointer to a physical ORS database in the Hub Store that is configured in the Hub Console. All Informatica MDM Hub objects that are referenced in a configuration are always in the context of a specific logical ORS. For an IDD configuration to be valid, the objects it references must exist in a physical ORS.

Before an IDD application is added or imported, the logical ORS databases it declares must be bound to a physical ORS that is registered with the Informatica MDM Hub. This binding is used:

- to validate the configuration
- by the IDD Configuration Manager to fetch metadata about the ORS, and
- as the ORS that the running IDD application connects to

Add a Logical ORS Database

You can add a logical ORS database while adding a new IDD application.

Related Topics:

- "Creating a New IDD Application" on page 15

Bind a Logical ORS to a Physical ORS Database

You can bind a logical ORS database while adding a new IDD application, importing an IDD application, and while editing an existing application.

When creating a new application, the IDD Configuration Manager prompts you to add a logical ORS, and then to bind the logical ORS to a physical ORS database. Select a physical ORS from the list, then click **Save**.

When editing an existing application, click **Bind ORS**, select a physical ORS from the list, and click **Save**. You can bind all logical ORSes to a physical ORS database in one dialog.

CHAPTER 6

Subject Area Overview


This chapter includes the following topics:

- Subject Area Configuration, 22
- Schema Representation in the Hub Store, 22
- Subject Area Hierarchy, 23
- Relationships Among Subject Areas, 23
- Subject Areas Tab, 24

Subject Area Configuration

In Informatica Data Director, data is organized in hierarchical structure of subject areas. Use the Subject Areas tab in the Edit Application pane of the IDD Configuration Manager Application page to configure subject areas.

The following image shows the subject area tab for a subject area configuration based on the sample Operational Reference Store:

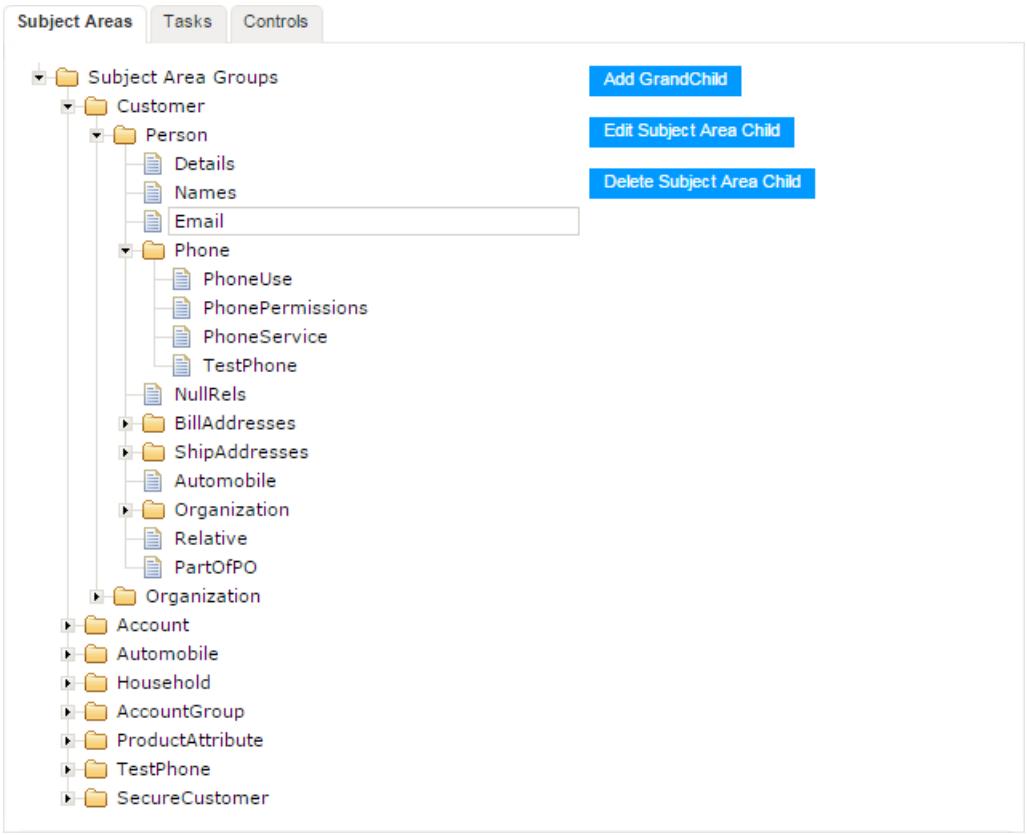

Schema Representation in the Hub Store

The Hub Store maintains detailed metadata about tables and relationships defined in an ORS. This metadata includes relationships between base object tables that can represent:

- references to lookup tables
- links between a parent and related child data
- links between subject areas

The Hub Store provides some of the metadata that allows IDD to understand how relationships should be treated. For example, IDD uses the setting of the base object lookup indicator (configured in the Schema Manager) to treat a related table as a lookup with a pre-populated drop-down list of values from which IDD application users select an item.

For other relationships, an IDD application might require additional information in order to correctly understand the relationships – whether they should be interpreted as relationships among tables in a subject

area, or relationships between subject areas. The IDD Configuration Manager is used to specify this additional relationship information for IDD.

Tip: Whenever changes are made to your schema in the Hub Console (such as adding a column to a base object, or changing package or query definitions), be sure to clear the cache to ensure that these changes are reflected in the Data Director. In addition, consider clearing your browser cache or reloading the page so that your browser environment is up to date.

Related Topics:

- "Clearing the Cache for an IDD Application" on page 59

Subject Area Hierarchy

In an IDD application, data is organized around a hierarchy of subject areas. The subject area hierarchy includes the following components:

1. Subject area group
2. Subject area
3. Subject area child
4. Subject area grandchild

Subject Areas

The subject area is a core organizing concept for an IDD application. Other terms or concepts that are related to, or similar to, the subject area include: business object, business entity, and hierarchical entity. IDD uses the subject area definition to determine how to treat each foreign key relationship in an ORS.

Subject Area Groups

Each subject area belongs to a subject area group, which defines the base object that its subject areas have as their root (also called the primary object). A subject area group can contain one or more subject areas. For example, an ORS using a Party model (a single base object representing different entity types) will have a subject area group with multiple subject areas.

Subject Area Children and Grandchildren

Subject areas can contain child and grandchild objects.

- A subject area can be the parent object to one or more child objects (subject area children).
- A subject area child object can be the parent to one or more child objects (subject area grandchildren).

Relationships Among Subject Areas

In an IDD application, relationships between subject areas are based on the relationships that are configured between base objects in the Hub Store using the Schema Manager in the Hub Console, as described in the *Multidomain MDM Configuration Guide*.

Types of Relationships

One:Many Child Relationships

For one:many relationships, the child record has a direct foreign key to the primary object. IDD supports two kinds of one:many relationships.

Relationship	Description
One:Many	The list of child records will be displayed in a tab below the primary data.
Logical One:One	The expectation is that there should be only one child record for each primary object. The data is shown in the form with the primary object. If there is more than one child, the IDD application provides a means to resolve this.

Many:Many Child Relationships

For many:many relationships, the child record is related to the primary object through a relationship table. IDD supports two kinds of many:many relationships:

Relationship	Description
Part Of	The child record belongs to the primary object. When adding a child, both the relationship and child records are added.
Reference	The child is another subject area. When adding a child, only a relationship record is added. The IDD user must search for the subject area child to be related. In order to edit the child data, the subject area for that child must be opened. This child can be linked through a standard relationship Base Object or an HM relationship Base Object.

Match Paths

Subject area child and grandchild objects in IDD are defined using match paths, which are configured using the Schema Manager in the Hub Console. See the *Multidomain MDM Configuration Guide* for more information about the Schema Manager. You need to create a match path component in the parent base object for all child objects that you need to display in the IDD application (even if you do not do any matching across these objects) because the IDD application uses the match path component to retrieve child object information.

Before you add a child to a subject area, you must create a new match path for that child. Defining such a match path does not incur performance overheads.

Subject Areas Tab

In the Edit Application window, the Subject Areas tab displays the subject area hierarchy in a tree format.

Tree Levels

The tree in the Subject Areas tab contains the following levels:

Tree Level	Description
Subject Area Group	Root node. Subject area groups defined for this application. All members of this subject area group share the same logical ORS and primary base object.
Subject Area	Subject areas associated with a subject area group.
Subject Area Child	Subject area children associated with a subject area.
Subject Area Grandchild	Subject area grandchildren associated with a subject area child.

Related Topics:

- "Configure a Subject Area Group" on page 26
- "Configure a Subject Area" on page 28
- "Configure a Subject Area Child" on page 42
- "Configure a Subject Area Grandchild" on page 45

Navigating the Tree

The following are the various actions that you can perform when you navigate the tree structure:

- Hover your mouse over an item in the hierarchy for a tooltip that shows the item's properties.
- Expand a folder to display its child items.
- Collapse a folder to hide its child items.
- When you select an item in the list, the Add, Edit, and Delete buttons change to reflect the commands you can execute for the currently-selected item.
- If an object is displayed in red, it means that the object has an associated validation issue.

CHAPTER 7

Configure a Subject Area Group

This chapter includes the following topics:

- Configure a Subject Area Group, 26
- Basic Steps, 26

Configure a Subject Area Group

A subject area group is a set of one or more subject areas that have the same base object as their root (also called the *primary object*). It identifies the logical ORS to which all member subject areas belong, all sharing the same primary table.

Basic Steps

Add a Subject Area Group

1. In the Subject Areas tree, select the Subject Area Groups (root node).
2. Click **Add Subject Area Group**.
3. Configure the properties as necessary.
4. Click **OK**.

Edit a Subject Area Group

1. In the Subject Areas tree, select a subject area group.
2. Click **Edit Subject Area Group**.
3. Change the properties as necessary.
4. Click **OK**.

Delete a Subject Area Group

1. In the Subject Areas tree, select a subject area group.
2. Click **Delete Subject AreaGroup**.
3. Click **Yes** when prompted to confirm deletion.

Subject Area Group Properties

The Subject Area Group window displays the following properties:

Property	Description
Name	Internal (system) name for this subject area group. Use only alphabetic characters and numbers - other characters are not allowed. All names can contain numbers, alphabetic and underscore characters.
Display Name	Name of this subject area group that is displayed to end users of this IDD application.
Logical ORS	Logical ORS for this subject area group.
Primary Table	Primary object for all members of this subject area group.
Search Only	If selected, designates that all members of this subject area group are available for search only in this IDD application. Subject areas are visible when creating a foreign key from another subject area (search is used to find the record to relate). However, this IDD application cannot create or update data in these subject areas.

CHAPTER 8

Configure a Subject Area

This chapter includes the following topics:

- Configure a Subject Area, 28
- Basic Steps, 29
- Subject Area Properties, 29
- Properties Tabs, 30
- Configure the Layout, 31
- Configure Match Settings, 35
- Configure Search, 36
- Configure Data Security, 37
- Configure Data Masking, 38
- Configure Cleanse Functions, 39
- Configure Labels, 40
- Configure Task Assignments, 41
- Configure the Order of Subject Area Child Tabs, 41

Configure a Subject Area

A subject area represents a collection of data that should be treated as a unit from a business perspective. A subject area has:

- a single root record in a base object
- some number of child records (via one:many and many:many relationships)
- possibly some number of grandchild records

If the subject area group contains more than one subject area, each subject area defines the HM entity type or sub-type qualifier that identifies the subject area. You also specify:

- the package used to display search results
- the match rule set and match type to use for duplicate checks
- the columns from the Primary table that are part of this subject area

Basic Steps

Add a Subject Area

1. In the Subject Areas tree, select the subject area group to which you want to add the subject area.
2. Click **Add Subject Area**.
3. Configure the properties as needed.
4. Click **OK**.

Edit a Subject Area

1. In the Subject Areas tree, select a subject area.
2. Click **Edit Subject Area**.
3. Configure the properties as needed.
4. Click **OK**.

Delete a Subject Area

1. In the Subject Areas tree, select a subject area.
2. Click **Delete Subject Area**.
3. Click **Yes** when prompted to confirm deletion.

Subject Area Properties

The Subject Area window displays the following properties.

Property	Description
Name	Internal (system) name for this subject area. Must be unique within this IDD application. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name of this subject area that is displayed to end users of this IDD application.
HM Entity Type	Hierarchy Manager entity type, which entity types define the kinds of objects that can be related. Must be configured in the Hierarchies tool in the Hub Console. See the *Multidomain MDM Configuration Guide* for more information.
Subtype Column	Column used for the subtype filter. Type code (category) for this subject area. For example, the type of address - shipping, mailing, or street address. Automatically set if an HM Entity Type is selected.
Potential Matches Link Column	Potential Matches link column, defines which column from a layout must be displayed as a hyperlink that opens a Potential Match entity in a new Data View tab.

Property	Description
Subtype Value	Value used for the subtype filter. Automatically set if an HM Entity Type is selected.
Search Result Display Package	Display package used to show the search results. Must be created in the Packages tool of the Hub Console. See the *Multidomain MDM Configuration Guide* for more information.
Default Approval Task	Define default approval task type, so that you can configure various workflow for each subject area.
Show XREF	If selected, this IDD application displays a child tab for the subject area that displays the cross references for the primary object.

Properties Tabs

Tab	Description
Layout	Configures which columns from the base object are available in the IDD application for display and edit, what type of UI component to use and, if it is a lookup, whether the lookup data is localized.
Match Settings	Configures the match rule set and match type to use for duplicate checks.
Search	Configures search properties.
Data Security	Configures role-based, row-level security for the subject area.
Data Masking	Configures hiding of critical information from IDD users who are not authorized to access that information.
Cleanse	Configures any cleanse functions to be used for cleanse and validation.
Label	Configures how a label is generated for the subject area.
Task Assignment	Configures how tasks are assigned - to which role or user each type of task is assigned.
Order of Children	Configure the order of subject area children in the subject area's Data View.

Related Topics:

- "Configure the Layout" on page 31
- "Configure Match Settings" on page 35
- "Configure Search" on page 36
- "Configure Data Security" on page 37
- "Configure Cleanse Functions" on page 39
- "Configure Labels" on page 40
- "Configure the Order of Subject Area Child Tabs" on page 41

Configure the Layout

Click the **Layout** tab to configure the layout.

Tip: The instructions in this section apply to the Layout tab for subject areas, subject area children, and subject area grandchildren.

Change the Number of Columns in the Form View

1. Edit the item you want to configure (subject area, subject area child, or subject area grandchild).
2. Click the drop-down list next to **Number of columns in form view** and select the number of columns you want.
3. Click **OK** to save your changes.

Change the Columns to Display

1. Edit the item you want to configure (subject area, subject area child, or subject area grandchild).
2. On the Layout tab, click **Change Column Selection**.
3. In the Column Selection dialog, select the number of column you want to display for this item (subject area, subject area child, or subject area grandchild), and the order in which you want to display them.
4. Click **OK** to save your changes.

Configure the Column Layout

1. Edit the item you want to configure (subject area, subject area child, or subject area grandchild).
2. On the Layout tab, select the column you want to configure.
3. Click **Edit Layout**.
4. Configure the layout properties.
5. Click **OK** to save your changes.

Change the Column Order

1. Edit the item you want to configure (subject area, subject area child, or subject area grandchild).
2. On the Layout tab, select a column in the list and move it to a different location by clicking a command button (Up, Down, First, or Last).
3. Click **OK** to save your changes.

Column Layout Properties

Setting	Description
Column Name	Name of the selected column.
Edit Style	Specifies how the column will be displayed to the IDD application user. One of the following values: - Field - Text area - Checkbox - Calendar or Long Calendar (for date fields)
Field Size	Specifies the display size. One of the following values: - Full Width - Large - Medium - Small
Line Break	If selected, forces a line break after this column in the form view.
Required	If selected, makes this a required field. The IDD application user must supply a value - empty or null values are not allowed.
Hidden	If selected, specifies this field as hidden. You might select this, for example, when using a field with a cleanse function but not having it be visible to IDD application users. In order to use the cleanse function, the column must be selected here, but selecting Hidden will hide the column from the IDD application user.
Editable	If selected, specifies whether this field can be edited. You might use this, for example, for a field that is automatically populated with the results of a cleanse function - such as a Full Name field that is populated by a cleanse function that creates a string from first name + middle name + last name.
Show In HM	If selected, specifies this field is shown in Hierarchy Manager. You can select this, for example, when using a field for which you need to view the hierarchy.

Configure Edit Style

You can configure edit style to define controls for fields of the base object. The following types of edit styles can be configured: Field, Text area, Checkbox, Calendar, and Long calendar.

The following table provides information about edit styles that you can configure for the supported data type.

Data Type	Edit Style
DATE	Calendar and Long calendar
INT and CHAR(1)	Field, Text area, and Checkbox
Others	Field and Text area

Note:

- If you select the Checkbox edit style and the column data type is CHAR(1), you must define the values that correspond to the base object value. There are three couples of values that you can setup for a Checkbox: 1/0 value, Y/N value or T/F value. Based on the couple of values selected, the corresponding value will be saved to the base object.

- If you select the Checkbox edit style and the column data type is INT, only integer values 0 and 1 can correspond to the base object value.
- Checkbox control is available only in the edit mode of the data view, else only the appropriate value, for example either **Yes** or **No** is displayed to the user.

Lookup Localization Properties

An IDD application automatically populates a drop-down list of acceptable values for columns that are configured in the Schema Manager as lookups. IDD also supports localization of the lookup display values. In this tab, you select the table that provides the localized display values for the lookup column. See the *Multidomain MDM Data Director Implementation Guide* for more information.

Specify the following settings:

Setting	Description
Localized Lookup Table	Table that contains localized display values for a lookup column.
Lookup Foreign Key	Foreign key to the code column in the lookup table.
Language Code	ISO two-character language code.
Country Code	ISO two-character country code.
Localized Name	Localized lookup display value. The IDD application first looks for a lookup name in the localized table based on the IDD application user's selected locale (language and / or country). If a name is not found, then the lookup name from the lookup table is used.

Sibling Reference Properties

A sibling reference is foreign key relation between children related to the same primary object.

Certain data models include foreign key references among the records in a subject area. For example, a party has a list of addresses. Another child record of that party needs to reference one of the addresses that belongs to the party.

Specify the following settings:

Property	Description
Subject Area Child	Name of the child referenced by this column.
Label	Text displayed in the 'Sibling reference' column is combination of columns from the referenced child record. This defines how this text should be generated when data exists in the referenced child record. The default pattern is {0} - the subject area name. To specify the label format, select a column, then click **Append to Label**. **Syntax**:{0} is always the subject area name. The columns in the label are {1}, {2}, and so on. **Example**: {0} : {2}, {1}. If the columns are First Name and Last Name, then the result might be Person : Doe, John.
Task Format	Title label for a sibling record. To specify the label format, select a column, then click **Append to Task Format**. The task format is used as the title for a manual merge task.

Property	Description
Exists No Attributes Format	Used when a sibling record has no data to populate the pattern. The default pattern is {0} - the subject area name.
New Format	When the subject area object is new. The default pattern is New {0} - New subject area name.
Available Columns	Available columns in the sibling record.
Selected Columns	Columns that have been selected for inclusion in the label format (after **Append to Label** or **Append to Task Format** is clicked).

Dependent Lookup Properties

In a dependent lookups data model, a foreign key relation exists between two lookup tables. For example, in a dependent lookup, an IDD application user could select the party type and, once selected, the IDD application would display a list of party subtypes based on the user selection.

Property	Description
Depends on Column	Layout column to use as the master lookup column.
Lookup Foreign Key	Column in the dependent lookup table to use as the foreign key.

Default Value Properties

You can specify role-based default values for a field. When an IDD application user adds an entity, the field is populated with a default value based on their role. For example, you could have the Country field automatically populated with "China" for users with the ManageChinaData role.

Click **Add** to associate a default value with one or more roles, and specify the following information.

Property	Description
Default Value	Default value for this field. Must be a valid value for the field.
Available Roles	List of available roles to assign this default value.
Selected Roles	List of role(s) assigned to this default value.

You can specify a separate value for each role, and you can assign the same default value to multiple roles. You can also edit and delete default value associations. For more information about configuring roles using the Roles tool in the Hub Console, see the *Multidomain MDM Configuration Guide*.

Configure Match Settings

Click the **Match Settings** tab to configure the match settings for a subject area. The match settings define the criteria that the match process uses to identify duplicate records.

When you add a record or when you select the Find Duplicates action, the match process runs and identifies any duplicate records. The match process calls the `SearchMatch` API to search for duplicate records. For more information about the SearchMatch API, see the *Multidomain MDM Services Integration Framework Guide*.

Match settings require a match rule set. A match rule set can contain match rules that automatically merge duplicate records and match rules that specify a manual merge for duplicate records. You configure match rules and match rule sets in the Schema Manager of the Hub Console. For more information, see the *Multidomain MDM Configuration Guide*.

Match Settings

Select the match settings that you want to apply.

The following table describes the match settings:

Match Setting	Description
Match Rule Set for duplicate check	The name of a match rule set. If you leave this setting blank, the match process uses the match rule set that you defined as the default match rule set. If you select **Match Type = NONE**, you must specify a match rule set that has the **Enable Search By Rules** option enabled. If you leave this setting blank, and the default match rule set does not have the **Enable Search By Rules** option enabled, the match process uses the selected record and generates match rules based on all the columns that have data. The generated match rules use the Fields match purpose. For more information about match purposes, see the *Multidomain MDM Configuration Guide*.
Match Type	The match rules that you want to apply from the match rule set. Select one of the following match types: - BOTH. Applies the automatic and the manual merge match rules. - AUTO. Applies the automatic merge match rules. - NONE. Applies the automatic and the manual merge match rules. If you selected exact-match columns in the **Selected Match Columns** list, and a selected record contains a value for that exact-match column, the match process identifies duplicate records based on the exact-match column plus the match rules.
Available Match Columns	A list of columns that are marked as match columns in the base object record. For more information about match columns, see the *Multidomain MDM Configuration Guide*.
Selected Match Columns	Optional. Restricts the search for duplicate records to a subset of the available match columns. If a match rule refers to a match column that is not in this list, the match process processes the rule with a null value for the match column. This list becomes part of the `SearchMatch` request. If the list is empty, the `SearchMatch` request includes all available match columns. **Note:** If you use the Smart Search feature, select all the fields that you want to configure as searchable. Smart search searches these fields to find the specified string value.

Tip: Informatica Data Director uses the `SearchMatch` API with `matchType=NONE` for extended searches. For more information about extended searches, see the *Informatica MDM Multidomain Edition Informatica Data Director Implementation Guide*.

Example of Match Type = NONE

In the base object record, you define the BIRTH_DATE column as an exact-match column. In the **Match Settings** tab, you select NONE as the **Match Type** and you add the BIRTH_DATE column to the **Selected Match Columns** list.

When you create a record, the match process searches for duplicate records based on the value in BIRTH_DATE plus the match rules. If null matching is enabled, the match process can match a null value in the BIRTH_DATE field.

Configure Search

Click the **Search** tab to configure search for a subject area. Use the following tabs to configure search.

Tab	Description
Match Columns	Constrains the match columns used with the searchMatch API for searches.
Search on Child	Configures search on additional base objects that are not part of the subject area to be used for searching. Settings include match path component, name, display name, and the search child layout.

Configure Match Columns

Click the **Match Columns** tab under the Search tab to configure the match columns used with the searchMatch API for searches.

Setting	Description
Available Match Columns	Available match columns for this subject area.
Selected Match Columns	Constrains the match columns that are used with the searchMatch API for duplicate checks.

Configure Search on Child Entities

Click the **Search** tab, and then click the **Search on Child** tab under the Search tab to configure searching additional base objects that are not part of the subject area to be used for searching. This can include searching on cross references of base objects in the subject area, or base objects that are related, but not part of the subject area. For example, if there is a party-to-party relationship (with a match path defined), you can search for party A that is related to party B.

Click **Add** to specify the following search attributes.

Setting	Description
Match Path Component	Match path that points to the child that is not part of the subject area to search.
Name	Logical name of the child that is not part of the subject area to search.

Setting	Description
Display Name	Display name of the child that is not part of the subject area to search.
Search Child Layout	Layout columns that will be included in the Query Builder for search.

You can also edit and delete search settings defined here.

Related Topics:

- "Configure the Layout" on page 31

Configure Data Security

Click the **Data Security** tab, to configure data security for a subject area.

Defines role-based, row-level security for the subject area. Restricts access to data records in this subject area. Each restriction is assigned based on user role membership.

Click **Add** to define the following security filter attributes.

Setting	Description
Match Path Component	Match path to the child base object.
Column	Column on which to apply the data filter.
Filter Value	Value to use for the data filter.
Available Roles	Security roles that are defined in the Informatica MDM Hub. Roles are configured using the Roles tool in the Hub Console. See the *Multidomain MDM Configuration Guide* for more information.
Selected Roles	Security roles that will be affected by this filter.

You can also edit and delete security filter settings defined here.

Setting Security Filter to Restrict the List of Values for the Lookup Fields

Based on the user role you can restrict the list of values for the lookup fields using data security settings. For example, using the data security filters you can restrict the user with the role of a SalesManager - CA to view and create records only for gender type - Male (M).

Perform the following steps to set security filter to restrict the list of values for the lookup fields.

1. In the IDD configuration manager, select the IDD application that you want to edit and click the **Edit** button.
2. Click the **Subject Areas** tab.
3. Select the subject area that you want to edit and click the **Edit Subject Area** button.

4. In the **Subject Area** window, click the **Data Security** tab.
5. Click the **Add** button to add a new data security filter.
6. In the **Security Filter** window, select the **Match Path Component,** for example, **<root>**.
7. Select the **Column Name**, for example, **Gender Cd**.
8. Enter the **Filter Value**.

   Note: You must use Key (code) value for lookup columns. For example, Key value **M** for Male.
9. In the **Available Roles** Section, select the user role to which you want to add this data security filter and click the **Copy** button.

   Note:

   - If you want to set this data security filter to all the user roles in the **Available Roles** section click the **Copy All** button.
   - If you want to remove a user role from the **Selected Roles** section, select the user role and click the **Remove** button.
   - If you want to remove all the selected user roles in the **Selected Roles** section, click the **Remove All** button.
10. Click **OK**.

Configure Data Masking

Click the **Data Masking** tab, to configure data masking.

Click **Add** to define the data masking attributes.

Setting	Description
Column	Column on which to apply masking (or data masking).
Mask Pattern	Parts of expression that must be masked.
Test Data	The field for entering sample value.
Masked Value	Represents the text entered in Test Data field with applied mask, defined in Mask Pattern.
Available Roles	Security roles that are defined in the Informatica MDM Hub. Roles are configured using the Roles tool in the Hub Console. See the *Multidomain MDM Configuration Guide* for more information.
Selected Roles	Security Roles that will use data masking. If Selected Roles list is empty, then data masking is applied to all roles except Admin.

You can define a mask for each field in a column layout. Mask can be specified for a single role, for a set of roles or for all non- admin users. When you specify a mask, all or part of the value is replaced with asterisk (*).

This mechanism is used for hiding critical information from IDD users that are not authorized to access that information.

Configure Cleanse Functions

Click the **Cleanse** tab to apply a cleanse function to a column.

Tip: The instructions in this section apply to the Cleanse tab for subject areas, subject area children, and subject area grandchildren.

About Cleanse Functions

A cleanse function can be applied to data values in an entity to standardize or verify the data. Cleanse libraries and cleanse functions are configured using the Cleanse Functions tool in the Hub Console.

Inline Cleanse Functions

IDD can call the cleanse API for each base object record before it is saved. This is sometimes referred to as an *inline cleanse function*. The cleanse function can perform regular data cleansing and standardization, and/or custom validations on the data. The configured cleanse function is called before data is saved.

Inputs and Outputs

The IDD Configuration Manager provides a means for connecting base object records to the inputs and outputs of a cleanse function. The data in the base object record is updated with the outputs from the cleanse function.

Tip: Only those base object columns that are included in the layout in the subject area can serve as cleanse function inputs or outputs. If you want to use a column for a cleanse function but not display the column to IDD application users, select (check) the column's Hidden check box.

Related Topics:

- "Column Layout Properties" on page 32

When Cleanse Functions are Invoked

A cleanse function is called when:

- Primary data - IDD application user clicks the **Save** button
- Child data - IDD application user clicks the **Apply** button in the Edit dialog

The data the IDD user has entered in the subject area attributes is fed into the cleanse function as configured. The base object record is then updated by the outputs from the cleanse function.

Custom Data Validation

A cleanse function can be used to perform custom data validation. Validation results are processed if the cleanse function has a validationStatus output parameter.

- If the validationStatus parameter is blank, there are no validation errors and the process can continue.
- If there are validation errors, the validationStatus parameter will include a series of validation messages describing the inputParameter name and a message. Each validation error is then associated with an input value on the IDD application UI.

Edit the Cleanse Function for a Column

1. Edit the item you want to configure (subject area, subject area child, or subject area grandchild).
2. Click the **Cleanse** tab.
3. On the Cleanse tab, click the Cleanse Library drop-down list and select the cleanse library that contains the cleanse function that you want to use for this column.
4. Click the Cleanse Function drop-down list and select a cleanse function.
5. Configure input and output parameters for the selected cleanse function.
   - For each input parameter, select the column to use as the source of data.
   - For each output parameter, select the column to use as the target of data.

Configure Labels

Click the **Label** tab to define the columns and format to use to generate labels for this subject area - for example, as the name of the Data View tab or the title of a task associated with this subject area. Columns can come from either the primary object or one of the logical child one-to-one objects.

Specify the following settings:

Setting	Description
Label	When a subject area object already exists and there is some data to populate the pattern. The default pattern is {0} - the subject area name. To specify the label format, select a column, then click **Append to Label**. **Syntax:** {0} is always the subject area name. The columns in the label are {1}, {2}, and so on. **Example:** {0} : {2}, {1}. If the columns are First Name and Last Name, then the result might be Person : Doe, John.
Task Format	Title label for a manual merge task. To specify the label format, select a column, then click **Append to Task Format**. The task format is used as the title for a manual merge task. **Note:** If you want to use any special character such as colon for specifying the **Task Format**, you must specify the task format within single quotation marks or apostrophes. For Example: 'Org:'
Exists No Attributes Format	When a subject area object already exists but there is no data to populate the pattern. The default pattern is {0} - the subject area name.
New Format	When the subject area object is new. The default pattern is New {0} - New subject area name.
Available Columns	Available columns in this subject area.
Selected Columns	Columns that have been selected for inclusion in the label format (after **Append to Label** or **Append to Task Format** is clicked).

Configure Task Assignments

Click the **Task Assignment** tab to configure the task assignments (roles or users) for each kind of task for a subject area.

Select a task type and click **Add** to add it to the Subject Area and specify the following settings in the Task Assignment dialog.

Setting	Description
Task	Task type for which you want to configure the assignment.
Role	If selected, indicates that the assignee is a role.
User	If selected, indicates that the assignee is a user.
Assignee	Specific role or user (as appropriate) to which tasks of this type may be assigned.

You can also edit and delete task assignments defined here.

See the *Multidomain MDM Data Director Implementation Guide* for more information.

Configure the Order of Subject Area Child Tabs

Click the **Order of Children** tab to configure the order of subject area children in the subject area's Data View. To change the order of child tabs, select the child you want to move, and then choose the appropriate command button (Up, Down, First, or Last).

Setting	Description
Name	Name of the child subject area.
Child Type	Type of child relationship.

CHAPTER 9

Configure a Subject Area Child

This chapter includes the following topics:

- Basic Steps, 42
- Subject Area Child Properties, 43
- Properties Tabs, 44

Basic Steps

You can also configure the layout and configure cleanse function after you add a subject area child.

Add a Subject Area Child

1. In the Subject Areas tree, select the subject area to which you want to add the subject area child.
2. Click **Add Subject Area Child**.
3. Configure the properties.
4. Click **OK**.

Edit a Subject Area Child

1. In the Subject Areas tree, select a subject area child.
2. Click **Edit Subject Area Child**.
3. Change the properties you want (see below).
4. Click **OK**.

Delete a Subject Area Child

1. In the Subject Areas tree, select a subject area child.
2. Click **Delete Subject Area Child**.
3. Click **Yes** when prompted to confirm deletion.

Configure the Layout

Click the **Layout** tab to configure the layout.

Tip: The instructions in this section apply to the Layout tab for subject areas, subject area children, and subject area grandchildren.

Configure Cleanse Functions

Click the **Cleanse** tab to apply a cleanse function to a column.

Tip: The instructions in this section apply to the Cleanse tab for subject areas, subject area children, and subject area grandchildren.

Subject Area Child Properties

The **Subject Area Child** window displays the following properties.

Property	Description
Name	Internal (system) name for this subject area child. Must be unique within this IDD application. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name of this subject area child that is displayed to end users of this IDD application.
Child Type	Type of child relationship. One of the following values: - 1 to 1 - 1 to many - part of - reference - part of primary object - allows you to show columns from the primary object in a form view in a child tab. This is useful when the base object has many columns and you want to partition some of them in a child tab.
Match Path to Child	Which match path leads to the child table. The match path list is populated based on the relationship type selection.
Default View	Specifies whether the child records should be displayed in the Table view or the Form view.
HM Entity Type	Only for a child whose child type is REFERENCE. Hierarchy Manager entity type, which entity types define the kinds of objects that can be related. Must be configured in the Hierarchies tool in the Hub Console.
Subtype Column	Column used for the subtype filter. Automatically set if an HM Entity Type is selected.
Subtype Value	Value used for the subtype filter. Automatically set if an HM Entity Type is selected.

Related Topics:

- "Relationships Among Subject Areas" on page 23
- "Match Paths" on page 24

Properties Tabs

Feature	Description
Layout	Configures which columns from the base object are available in the IDD application for display and edit, what type of UI component to use and, if it is a lookup, whether the lookup data is localized.
Cleanse	Configures any cleanse functions to be used for cleanse and validation

CHAPTER 10

Configure a Subject Area Grandchild

This chapter includes the following topics:

- Basic Steps, 45
- Configure the Layout, 46
- Configure Cleanse Functions, 46
- Subject Area Grandchild Properties, 46
- Properties Tabs, 47

Basic Steps

You can configure the layout and cleanse functions after you add a subject area grandchild.

Add a Subject Area Grandchild

1. In the Subject Areas tree, select the subject area child to which you want to add the subject area grandchild.
2. Click **Add GrandChild**.
3. Configure the properties.
4. Click **OK**.

Edit a Subject Area Grandchild

1. In the Subject Areas tree, select a subject area grandchild you want to edit.
2. Click **Edit GrandChild**.
3. Change the properties.
4. Click **OK**.

Related Topics:

- "Subject Area Grandchild Properties" on page 46

Delete a Subject Area Grandchild

1. In the Subject Areas tree, select a subject area grandchild you want to delete.
2. Click **Delete GrandChild**.
3. Click **Yes** when prompted to confirm deletion.

Configure the Layout

Click the **Layout** tab to configure the layout.

Tip: The instructions in this section apply to the Layout tab for subject areas, subject area children, and subject area grandchildren.

Configure Cleanse Functions

Click the **Cleanse** tab to apply a cleanse function to a column.

Tip: The instructions in this section apply to the Cleanse tab for subject areas, subject area children, and subject area grandchildren.

Subject Area Grandchild Properties

The **Subject Area Grandchild** window displays the following properties.

Property	Description
Name	Internal (system) name for this subject area grandchild. Must be unique within this IDD application. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name of this subject area child that is displayed to end users of this IDD application.
Child Type	Type of child relationship. One of the following values: - 1-Many - Logical 1-to-1 - Part of - Reference
Match Path to Child	Which match path leads to the child table. The match path list is populated based on the relationship type selection.

Property	Description
Default View	Specifies whether the child records should be displayed in the Table view or the Form view. Available only if Child Type is Reference, 1-Many, or Part of.
Subtype Column	Column used to filter records. Example: Gender. The HM Entity Type property is also shown for the Reference relation type.
Subtype Value	Value in the Subtype Column used to filter records. Example: M (for male) or F (for female)

Properties Tabs

Feature	Description
Layout	Configures which columns from the base object are available in the IDD application for display and edit, what type of UI component to use and, if it is a lookup, whether the lookup data is localized.
Cleanse	Configures any cleanse functions to be used for cleanse and validation.

CHAPTER 11

Deleting an IDD Application

This chapter includes the following topics:

- Basic Steps, 48
- Consequences of Deleting an IDD Application, 48

Basic Steps

To delete an IDD application:

1. In the objects tree, select the name of the IDD application that you want to delete.
2. Click **Delete**.
3. Click **Yes** to confirm deletion.

The IDD Configuration Manager removes the deleted IDD application from the Applications List.

Consequences of Deleting an IDD Application

- Once deleted, an IDD application cannot be recovered.
- Before deleting, consider saving a backup by exporting the configuration.

CHAPTER 12

Exporting an IDD Application

This chapter includes the following topics:

- Basic Steps, 49
- About Exporting, 49

Basic Steps

To export an IDD application:

1. In the objects tree, select the name of the IDD application that you want to export.
2. Click **Export**. The IDD Configuration Manager creates the ZIP file.

   When prompted, select whether to open or save the ZIP file.

About Exporting

Exporting an IDD application creates a backup of its configuration. A single ZIP file contains the entire contents of the IDD application configuration.

Related Topics:

- "IDD Application Components" on page 61

Manual Configuration After Exporting

The IDD Configuration Manager does not yet expose all of the available configuration options – some functionality must be configured manually by exporting and editing the XML configuration file directly. For more information, see the *Multidomain MDM Data Director Implementation Guide*. Once you have made changes, then you can re-import the exported file back into the IDD Configuration Manager.

Importing After Exporting

You can import this ZIP file to create a new IDD application or update components in an existing application.

Related Topics:

- "IDD Application Components" on page 61

CHAPTER 13

Validating an IDD Application Configuration

This chapter includes the following topics:

- Basic Steps, 50
- About Validation, 50
- Validation Results, 51

Basic Steps

To validate an IDD application configuration:

1. In the applications list, select the name of the IDD application that you want to validate.
2. Click **Validate**.

   The IDD Configuration Manager validates the selected IDD application and displays the validation results in a separate window.
3. Review the results in the Validation Results window.
4. Click **OK**.

About Validation

Why Validate an IDD Application Configuration

An IDD application configuration is loosely coupled with the metadata in an ORS. The configuration contains references to objects in an ORS. Changes to an ORS (the addition, modification, or removal of base objects, columns, cleanse functions, and so on) are not automatically reflected in the IDD configuration. For this reason, the IDD validation process is necessary and must be repeated periodically.

When to Validate an IDD Application Configuration

Validation is run in the following circumstances:

- when requested by the user in the IDD Configuration Manager
- when importing an IDD configuration
- before deploying an application, when the application server is started up

Validation Results

Note: An IDD application with a Fatal Error validation status cannot be deployed.

The Validation Results window displays the following information:

- Validation Status - The most recent validation status for the application. The validation status is a single value that represents the highest (most severe) error that has been found.
- Individual Issues - Table containing the following information about any issues encountered during validation.

Column	Description
Error Code	Error code associated with the validation issue.
Validation Level	Severity of the validation issue.
Message	Message that describes the validation issue.

Note: An object with an associated validation issue is displayed in red in the Subject Areas tree.

Related Topics:

- "Validation Levels" on page 51
- "Subject Area Configuration" on page 22

Validation Levels

Validation levels determine the severity of any issues encountered during the validation process.

Validation Level	Description
Not Validated	The IDD application has not been validated.
No Error	No errors or warnings were found during validation.
Information	Provides information to the user. No configuration changes are required.
Warning	A configuration might need to be changed, but should cause no run-time problems.
Error	A configuration error must be fixed. Run-time problems can be expected.

Validation Level	Description
Critical Error	Same as Error, but indicates a problem that requires even more urgent attention.
Fatal Error	An error that prevents the IDD application from running at all. The application will not be deployed under any circumstance.

Interpret Validation Results

Review the list of validation issues, if any, and determine on an issue-by-issue basis whether and what specific changes are required to your configuration.

CHAPTER 14

Migrate Bundle

This chapter includes the following topics:

- Basic Steps, 53
- About the Migrate Bundle, 53

Basic Steps

1. In the list of IDD applications, select the name of the IDD application metadata that you want to migrate to business entity services.
2. Click **Migrate Bundle**.

   The **Migrate BES Metadata Sucessful** message appears.
3. Click **Close**.

About the Migrate Bundle

Clicking the Migrate Bundle button localizes the metadata of records that belong to a subject area and are migrated to business entity records.

CHAPTER 15

Changing the Application State

This chapter includes the following topics:

- Basic Steps, 54
- About the Application State, 54

Basic Steps

1. In the list of IDD applications, select the name of the IDD application that you want to deploy or undeploy.
2. Click (or hover over) **Application State**.
3. Select the application state to change to.
4. If you have deployed an IDD application, test the IDD application.

About the Application State

The application state is controlled by the user in the IDD Configuration Manager. It stores the intended deployment for the IDD application.

Application States

The application state can be one of the following values:

Name	Description
Not Deployed	IDD application is not deployed. Useful when the application is in development. Changes can be made and saved without the additional overhead of deploying the application.
Limited Deployment	IDD application is deployed, but only users that are administrators can log in. The application will not show up in the list of available applications. You must access the application using its full URL.
Full Deployment	IDD application is deployed for full use. It shows up in the list of applications and any authorized users can run the application.

Application Deployment

Deployment is the process of taking an IDD configuration and making it available as an IDD application.

Applications with Fatal Errors Cannot Be Deployed

An IDD application can be deployed even if the configuration contains errors. Only fatal errors will prevent an IDD application from being deployed. It can be useful to deploy an IDD application that contains errors when building out an application, allowing the implementer to test parts of the configuration while other parts are incomplete.

Deployment Events

Deployment occurs in response to the following events:

Event	Description
Application Server Startup	All applications with **Limited Deployment** or **Full Deployment** are first validated. If the validation level is not Fatal Error, then the application is deployed. At this time, only a partial validation is run to check for fatal errors.
Import / Save	Any time an application is imported or saved, it is also deployed (unless its state is **Not Deployed**).

CHAPTER 16

Importing IDD Application Components

This chapter includes the following topics:

- Basic Steps, 56
- About Importing, 56
- Import Options, 57

Basic Steps

To import IDD application components:

1. If you are importing an application component, then in the objects tree, select the name of the IDD application into which you want to import an application component.
2. Click (or hover over) **Import**.
3. Select the import option.
4. When prompted, select the application component(s) to import.
5. Click **Import**.

The Data Director imports the selected component and validates the objects.

Related Topics:

- "Import Options" on page 57

About Importing

Use the Import command to create or update an IDD application using one or more external configuration files.

Import Options

The Import command provides the following three import options - two for importing a full application, and one for importing a component into an existing application.

Import Option	Description
Import IDD configuration only (XML)	Create a new IDD application by importing the IDD configuration XML. This can also be used to replace an existing IDD application with the same name. If so, the existing application is entirely replaced (as if you performed a delete followed by an import).
Import complete IDD application (Zip)	Create a new IDD application by importing a Zip file containing the various component files (XML, resource bundles, help files, and so on).
Import to existing IDD application	Update an existing IDD application by importing an individual file. This is used to add or replace any of the component files of the IDD application.

Related Topics:

- "IDD Application Components" on page 61

CHAPTER 17

Redeploying an IDD Application

This chapter includes the following topic:

- Redeploying an IDD Application, 58

Redeploying an IDD Application

Clicking the Re-deploy button will redeploy the selected IDD application. This button is active when the application is in either the full or limited deployment state. Clicking Re-deploy removes the application from the Java Memory Model (JMM) and attempts to deploy it again.

The Status column indicates whether the application is successfully deployed. When an IDD application is selected, the Deployment Status panel at the bottom of the tab displays its application state, along with some error information (if there is an error).

Related Topics:

- "Changing the Application State" on page 54

CHAPTER 18

Clearing the Cache for an IDD Application

This chapter includes the following topics:

- Basic Steps, 59
- Metadata Cache for IDD Applications, 59

Basic Steps

To clear the metadata cache for an IDD application:

1. In the list of IDD applications, select the name of the deployed IDD application for which you want to clear the cache.
2. Click **Clear Cache**.
3. When prompted with a results message, click **Close**.

Metadata Cache for IDD Applications

The MDM Hub metadata for an IDD application is stored in the cache. If you make configuration changes to metadata objects through the Hub Console, click **Clear Cache** to force IDD to reload the metadata.

Examples of configuration changes to metadata objects include a new column added to a base object associated with a subject area, or an edited cleanse function definition.

CHAPTER 19

Testing a Deployed IDD Application

This chapter includes the following topic:

- Testing a Deployed IDD Application, 60

Testing a Deployed IDD Application

Once you have saved all configuration changes and deployed an IDD application, you can launch it from within the IDD Configuration Manager for testing.

Related Topics:

- "Changing the Application State" on page 54

Basic Steps

1. In the objects tree, click the URL for the IDD application that you want to test.
2. Log into the IDD application.
3. Go through the IDD application and exercise all the features that you have configured - subject areas, tasks, search, and so on.

Tips for Testing

- If Hub metadata has changed, clear the IDD cache. See Chapter 18, "Clearing the Cache for an IDD Application" on page 59.
- Manually clear browser cookies and other browser cache.
- If necessary, stop and start the application server running Informatica MDM Hub.
- To test deployed IDC controls, refer to the *Multidomain MDM Data Director Implementation Guide*.

CHAPTER 20

IDD Application Components

This chapter includes the following topics:

- IDD Application Components, 61
- IDD Configuration File, 61
- IDD Bundles, 62
- Metadata Bundles, 62
- Messages Bundles, 62
- Error Code Bundles, 62
- Online Help Files, 62
- Application Logo, 63
- User Exits Implementation, 63

IDD Application Components

An IDD application is stored in the system database (C_REPOS_DS_CONFIG) as a ZIP file containing component files. This section describes the files contained in this ZIP file. The IDD Configuration Manager creates this ZIP file when an application is exported.

This ZIP file can also be imported into the IDD Configuration Manager to create a new IDD application. You can also import individual components into an existing IDD application configuration - components are listed in the Configuration type drop-down list in the Import to existing IDD application dialog.

IDD Configuration File

The BDDConfig.xml file is the main configuration file for the application. It must conform to the siperian-BDD-config*.xsd XML schema.

IDD Bundles

Resource bundles with the labels for objects defined in the IDD application (such as subject areas).

- **Default:** `BDDBundle.properties`
- **Localized:** `BDDBundle_XX.properties`, where `XX` is the two-letter ISO code for the locale. For a list of locale codes, see the *Multidomain MDM Data Director Implementation Guide*.

Metadata Bundles

Resource bundles with the labels for objects defined in the ORS (such as base objects, columns, and so on).

- **Default:** `MetadataBundle.properties`
- **Localized:** `MetadataBundle_XX.properties`, where `XX` is the two-letter ISO code for the locale.

Messages Bundles

Resource bundles with text displayed in the IDD application.

- **Default:** `MessagesBundle.properties`
- **Localized:** `MessagesBundle_XX.properties`, where `XX` is the two-letter ISO code for the locale.

Error Code Bundles

Resource bundles with the text for error messages generated by an IDD application.

- **Default:** `ErrorCodeBundle.properties`
- **Localized:** `ErrorCodeBundle_XX.properties`, where `XX` is the two-letter ISO code for the locale.

Online Help Files

IDD Help

Default help that describes the features of an IDD application.

- **Default:** `BDDHelp.zip`
- **Localized:** `BDDHelp_XX.zip`, where `XX` is the two-letter ISO code for the locale.

Custom IDD Help

Help that has been customized so that it is specific and unique to a particular IDD application. In addition to providing implementation-specific usage instructions, this help file can provide any relevant information, such as an organization's procedures and policies.

- **Default:** `CustoBDDHelp.zip`
- **Localized:** `CustomBDDHelp_XX.zip`, where `XX` is the two-letter ISO code for the locale.

Application Logo

A replacement for the logo image that the IDD application displays in the upper left of the screen. The size for the Informatica logo is 147 pixels wide by 31 pixels high. For best results, the replacement logo should have similar dimensions.

Any of the following file names and types are supported:

- `logo.gif`
- `logo.png`
- `logo.jpg`
- `logo.jpeg`

User Exits Implementation

Custom, Java-code based user exits.

CHAPTER 21

Binding Controls to IDD Applications

This chapter includes the following topics:

- Basic Steps, 64
- Control Properties, 66

Basic Steps

Adding a Control

1. On the Controls tab, click **Add**.
2. Specify the control properties.
3. Click **OK** to save this new control.

Related Topics:

- "Control Properties" on page 66

Editing a Control

1. On the Controls tab, select the control that you want to edit.

   Enter the result of your step here (optional).
2. Click **Edit**.
3. Specify the control properties.
4. Click **OK** to save changes.

Related Topics:

- "Control Properties" on page 66

Deleting a Control

1. On the Controls tab, select the control that you want to delete.
2. Click **Delete**.
3. Click **Yes** to confirm deletion.

Showing the URL

This button displays the URL needed to launch this control from a third-party application. You can embed this URL in any third-party application that will invoke this control.

1. On the Controls tab, select the control you want.
2. Click **Show URL**.
3. If prompted, select a subject area group.
4. If you want, copy the URL text and embed it in your third-party application.
5. Click **Close**.

Deploying Controls

Controls are deployed when you deploy an IDD application. If the associated IDD application is currently deployed, then updated controls are automatically deployed when you save changes to them. These control instances are hosted in the same Java Memory Model (JMM) as the application instance within the same application server environment .

Related Topics:

- "Application Deployment" on page 55

Uploading a ZIP file with Control Data

1. Click **Browse**.
2. Navigate to the ZIP file that you want to upload, and then select it.
3. Click **Open**.

Control Properties

Property	Description
Name	Internal (system) name for this control. Use only alphabetic characters and numbers - other characters are not allowed.
Display Name	Name of this control that is displayed to end users.
Control Type	Type of control.

CHAPTER 22

Generate Business Entity and Business Entity Services Configuration Files

This chapter includes the following topics:

- Generate Business Entity and Business Entity Services Configuration Files Overview, 67
- Generating Business Entity and Business Entity Services Configuration Files, 68

Generate Business Entity and Business Entity Services Configuration Files Overview

You can use Configuration Manager to generate business entity and business entity services configuration files based on the Informatica Data Director application configuration.

You must configure business entity to configure and use the Entity 360 framework in Informatica Data Director. You must configure business entity and business entity services to work with business entity in the MDM Hub. The simplest way to configure business entity and business entity services is to use Configuration Manager to generate the configuration files.

business entity in the MDM Hub are similar to subject areas in Informatica Data Director. The Configuration Manager creates a business entity configuration file based on the configuration of the Informatica Data Director subject areas. The business entity and business entity services are immediately available in the MDM Hub after Configuration Manager generates the configuration files.

If you have more than one Informatica Data Director application configuration for an Operational Reference Store and subject area names in the applications are duplicated, set the Informatica Data Director global property `IDD2COCSConverter.prefixCoNames` to `true`. When `IDD2COCSConverter.prefixCoNames` is `true`, the conversion process names the business entity using the subject area name prefixed with the Informatica Data Director application name. The prefix ensures that each business entity in the Operational Reference Store has a unique name. Ensure you set `IDD2COCSConverter.prefixCoNames` to `true` before you generate any business entity and business entity services configuration.

Generating Business Entity and Business Entity Services Configuration Files

To generate business entity and business entity services configuration files, use the Informatica Data Director Configuration Manager.

1. In the Configuration Manager **Applications** pane, select the Informatica Data Director application whose configuration you want to generate into a business entity and business entity service configuration.
2. Click **Generate Business Entity Schema**.

   Configuration Manager generates the business entity and business entity service configuration.
3. Configuration Manager displays messages of issues encountered while generating the business entity and business entity services configuration. The messages indicate if Configuration Manager resolved the issue during the generation process and describes the changes Configuration Manager made to resolve the issue. If Configuration Manager did not fix the issue, note the issue and the suggested action you can take to resolve the issue.

INDEX

A

application logo 63
application state 54

B

business entity configuration
  generating a configuration file 67
business entity service configuration
  generating a configuration file 67

C

Column Layout Properties 32
controls
  adding 64
  deleting 65
  deploying 65
  editing 64
  properties of 66
  uploading ZIP 65
  URL 65

D

deploying IDD applications 54

E

error code bundles 62

F

full deployment 54

H

home page 11

I

IDD applications
  adding 15
  application state 54
  components 61
  deleting 48
  deploying 54
  editing 17
IDD applications *(continued)*
  launching 60
  logo 63
  properties of 16, 18
  testing 60
IDD bundles 62
IDD configuration file 61
IDD Configuration Manager
  home page 11

L

limited deployment 54
logo 63
logo image 62

M

message bundles 62

N

no deployment 54

O

online help files 62

S

Setting Security Filter 37
subject area children
  about 23
  adding 42
  deleting 42
  editing 42
  overview 42
  properties 43
subject area grandchildren
  about 23
  adding 45
  deleting 46
  editing 45
  overview 45
  properties 46
subject area groups
  about 23
  adding 26
  deleting 27
  editing 26
  overview 26

subject area groups *(continued)*
properties 27
subject areas
about 23
adding 29
child tabs 41
cleanse functions 39, 43, 46
data security 37
deleting 29
Edit Style 32
editing 29
hierarchy 23
labels 40
layout 31, 43, 46
match paths 24
subject areas *(continued)*
match settings 35
overview 28
properties 29
relationship types 24
search 36
tab 24
task assignments 41
tree 25

T

testing a IDD application 60