

Informatica MDM – Product 360

Media Manager – User manual, Nativ

Version 10.5 HotFix 5 (English)

Informatica Informatica MDM - Product 360 - Media Manager
Version 10.5 HotFix 5

© Copyright Informatica LLC 1993, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be tradenames or trademarks of their respective owners.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Table of Contents

1 Product 360 Media Manager - Introduction 8

1.1 Typographic conventions 8
1.2 Notes on use 8
1.3 Shortcuts 9
1.4 Search information 9

2 Administration 11

2.1 Product 360 Media Manager system data 11
2.2 Product 360 Media Manager volumes 21
2.3 Print templates 22
2.3.1 Creating print templates 23
2.3.2 Report editor 24
2.4 Product 360 Media Manager user system 27
2.4.1 Introductory example 28
2.4.2 Managing employees 30
2.4.3 Managing service providers 31
2.4.4 Managing customers 32
2.4.5 Managing users 36
2.4.6 Managing user groups 39
2.4.7 Modifying user rights 42
2.4.8 Managing resources 43
2.5 Applications 43
2.6 Transfer media 45
2.7 Cost centers 45
2.8 Color codes 46
2.9 Icon identifiers 47
2.10 Manage languages 47
2.11 Forms 48
2.12 Basic concepts of media production 49
2.12.1 Activities 50
2.12.2 Production states 52
2.12.3 Materials 54
2.12.4 Material/activity assignment 55
2.13 Jobs 55
2.14 Creating a resubmission for a job 57
2.15 Job groups 58
2.16 Production group templates 59
2.17 Info Center 60
2.18 Monitoring automatic modules 62
2.19 Viewing logged in users 64

2.20 Statistics....65
2.20.1 Evaluating production costs....65
2.20.2 Evaluating job costs....67
2.21 Service....69
2.22 Process Watcher....70
2.22.1 Settings....71
2.22.2 Application example....71
3 Medias....73
3.1 MEDIAS objects....73
3.1.1 Indexing....74
3.1.2 Previews of MEDIAS objects....76
3.1.3 Linked MEDIAS objects....77
3.1.4 Structuring MEDIAS objects....77
3.1.4.1 Managing file types....78
3.1.4.2 Managing classes....80
3.1.4.3 Managing groups....80
3.1.4.3.1 Moving groups....81
3.1.4.3.2 Assigning MEDIAS objects to groups....82
3.1.4.3.3 Creating meta data structures for the group....83
3.1.4.4 Managing access levels....84
3.2 MEDIAS content system....85
3.2.1 Searching for MEDIAS objects....86
3.2.2 Using wildcards....88
3.2.3 Searching with the Context module....89
3.2.4 Editing history....89
3.2.5 Adapting the MEDIAS content system....90
3.2.6 Adding new MEDIAS objects....91
3.2.7 Adding MEDIAS objects using the folder structure....93
3.2.8 Basic functions....94
3.2.9 Modifying MEDIAS objects....95
3.2.10 Modifying multiple MEDIAS objects....97
3.2.11 Converting/delivering an object....98
3.2.12 Services in the MEDIAS content system....99
3.2.13 Manually including views or PDF proxies of objects in the system....102
3.2.14 Integrating components into applications....103
3.2.15 Managing media purchase orders....103
3.2.16 Action basket in the Medias module....105
3.2.17 Share MEDIAS objects....106
3.3 Audit Trail....107
3.3.1 Activating the Audit Trail....107
3.3.2 Using the Audit Trail....108
3.3.3 Technical background....109
4 Production....111
4.1 Job production....112
4.1.1 Managing jobs....112

4.1.2 Selecting a job directly....115
4.1.3 Editing history....116
4.1.4 Editing a job using the job bag....117
4.1.4.1 Menu functions in the job bag....118
4.1.4.2 Icons in the job bag....122
4.1.5 Checking a job....123
4.1.6 Transferring job components directly to the MEDIAS database....124
4.1.7 Adding job components....124
4.1.7.1 Creating new components by adding templates....125
4.1.7.2 Creating new components by adding a sample file....125
4.1.7.3 Adding old job files....126
4.1.7.4 Adding MEDIAS objects to production....128
4.1.8 Editing job components....129
4.1.8.1 Editing job components in an application....130
4.1.8.2 Importing an image to an image container in InDesign....131
4.1.8.3 Unlocking a component for editing....132
4.1.9 Creating a job group....132
4.1.10 Checking InDesign documents....133
4.1.11 Action basket in Production module....135
4.1.11.1 Using the action basket....135
4.1.11.2 Special features of the action basket....135
4.1.12 Converting/Delivering in the pipeline....136
4.2 Production monitoring....137
4.2.1 Viewing production times....137
4.2.2 Viewing production materials....138
4.2.3 Production progress for a job component....139
4.2.3.1 Changing the characteristics of a component....141
4.2.3.2 Modifying the properties of multiple components....142
5 Media Publisher....143
5.1 Relationships in the Media Publisher module....143
5.2 Automatic mode....143
5.3 Managing publishing projects....144
5.3.1 Frame settings....147
5.3.2 Image attributes....148
5.3.3 Text attributes....149
5.3.4 Product attributes....150
5.4 Managing publishing lists....151
5.5 Managing publishing elements....153
5.6 Managing server languages....154
6 Pipeline....156
6.1 Default settings....157
6.2 Managing pipelines....158
6.2.1 Pipeline for image conversions....160
6.3 Action basket in Pipeline module....162

6.4 Asynchronous DALiM TWiST calls 162
6.4.1 Creating asynchronous DALiM TWiST calls 163
6.4.2 Processing an asynchronous DALiM TWiST call 165
6.4.3 Structure of the called TWiST workflow and the underlying TWiST template 166
7 Hotfolder 168
7.1 Default settings for the Hotfolder module 168
7.2 Managing hotfolders 170
7.2.1 Providing in a directory 171
7.2.2 Adding to MEDIAS 172
7.2.3 Unpacking a ZIP file 174
8 Workflow Manager 176
8.1 Terminology used 177
8.2 Administrative functions 177
8.3 Workflow basic elements 178
8.3.1 Watchpoint 178
8.3.2 Startpoint 180
8.3.3 Checkpoint 182
8.3.4 Actionpoint 185
8.3.5 Taskpoint 188
8.4 Default settings 189
8.5 Creating a workflow 189
8.5.1 System-based example workflow 191
8.5.2 Task-based example workflow 194
8.5.3 Further example workflows 196
8.6 Derivatives 199
8.7 Workflow for derivatives 200
8.8 Defining an alternative derivative pipeline 202
9 Archive 204
9.1 Manual archiving and restoration 205
9.1.1 Tape archiving and restoration of jobs 205
9.1.2 Tape archiving and restoration of MEDIAS objects 206
9.1.3 CD/MO archiving and restoration of MEDIAS objects 208
9.1.3.1 Archiving 209
9.1.3.2 Restoration 210
9.1.4 Resetting the medium 210
9.2 Automatic data migration 211
9.3 Action basket in Archive module 212
9.4 DiMM tools 212
9.5 Information for HELIOS users 212
10 XML Connector 213
10.1 Managing the XML connector 213
10.2 Logs and transactions 217

10.3 Special features of the XML Connector module 217
10.4 Special points to note when importing XML files 218
10.5 Special points to note when connecting two Product 360 Media Manager systems 218
10.6 Importing Product 360 Desktop data 219
10.7 Import Derivate 220
10.8 Exporting Product 360 Media Manager data 222
11 Interface 223
11.1 ASCII interface 223
11.2 Transfer rules 224
Index 225

1 Product 360 Media Manager - Introduction

Product 360 Media Manager is an enterprise solution for Media Asset Management and Web to print. Product 360 Media Manager enables unstructured data such as images, videos, graphics, drawings, and documents to be managed centrally and used multiple times as required.

Note: The contents of the PDF and HTML versions of the documentation are identical. You can therefore select the format that you find easier to read: Either online as a PDF or HTML version or offline by printing the PDF version.

To make it easier for you to understand the connections in Product 360 Media Manager, you will find hyperlinks to related topics at all relevant points. For this reason, we recommend using an online version in preference to a printed version.

Enjoy working with Product 360 Media Manager 10.5!

1.1 Typographic conventions

This documentation observes the following conventions:

1. Instructions are numbered step by step.
2. This is the second step in the instructions.
   - System responses are indicated with an arrow.

- Designations of items that appear on screen appear in inverted commas: "User name".
- Designations of buttons or menu options are highlighted in color: **Delete** or **Medias > Manage objects**.
- Paths, file names and console inputs, particularly those found in the Administration 11 section, are shown in a different font for immediate identification: `C:\Program Files\.`

From time to time, appropriate markups are used in the text to indicate special notes, tips or warnings, as the following examples demonstrate:

Note: Here you will find notes about specific features.

Tip: Here you will find tips and assistance.

Caution: Here you will find warnings about sources of errors and how to avoid them

1.2 Notes on use

Product 360 Media Manager uses displays and controls that will be familiar to you from other applications. Many windows contain the same standard functions, which can be called up using icons:

Icon	Meaning
	Performs a search using the parameters entered on the "Search fields" and "Other search fields" tabs. Note that lists in Product 360 Media Manager are empty when first opened and you need to click on to display the complete list.
	Prints the results of a search.
	Deletes the results of a search and the entries made for the search parameters.
	Deletes the selected data record.
	Opens a window in which you can edit the data for the data record.
	Opens a window in which you can enter the data for a new data record.
	Copies the selected data record.
	Displays information about the selected data record.
	Accepts the selected data record as a selection.
	Ends the current action and closes the window.

1.3 Shortcuts


In Product 360 Media Manager you can create shortcuts in every module.

1. Select **File > Shortcut assignments** to open the "Shortcut keys" window.
2. In this window, you can:
   - Assign new shortcuts.
   - Modify or delete shortcuts.
   - Clicking on **Overview** displays a list of all shortcuts. You can copy these to the clipboard and then paste them into a text editor and print them.

1.4 Search information

Overviews and selection lists generally provide you with several options for finding objects in Product 360 Media Manager:

- To perform a **general search** click on in the menu bar without entering any search criteria.

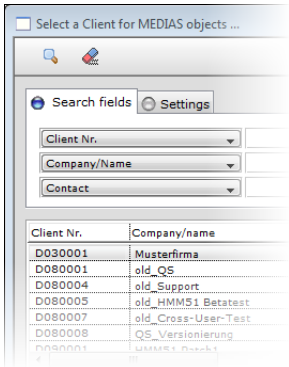

Customer selection

⇨ All objects of an object type that are saved in the database are displayed. The open dialog box specifies the relevant object type.


- To **search selectively for particular objects** enter search criteria in the relevant input box. Click on in the menu bar.



Input box

⇨ All objects of an object type that match the criteria are extracted from the database.

- To search selectively for a particular object type, select the relevant search term from the available list boxes. Click on in the menu bar.



List box selection

⇨ All objects of the selected object type that are saved in the database are displayed.

- To **search selectively for particular objects** select the relevant search term from the available list boxes and enter search criteria in the associated input boxes. Click on in the menu bar.



List box selection with search

⇨ All objects of an object type that match the criteria are extracted from the database.

Note: The search is not case-sensitive.

- A **further reduction** is achieved by selecting (☑) or deselecting (☐) the boxes or option buttons displayed (◉).

⇨ All objects of an object type that match the extended criteria are extracted from the database.

The latest version of Product 360 Media Manager provides the option of searching by date or period in addition to search terms for identification (key, ID, number), for names, for field content (numerical, alphanumerical or logical values).

The option of linking multiple field selections and search criteria provides you with a comprehensive search matrix and, at the same time, allows you to access data selectively according to your individual configuration.

Tip: The search options for MEDIAS objects are even more extensive and are therefore described separately.


2 Administration

Caution: Note that the Administration module is intended for administrators and experienced users. End users should only use the module after consultation with their administrator and should contact their administrator with any problems in this area, as improper handling and operation of the software and procedures described can damage the data stock and cause data losses.

2.1 Product 360 Media Manager system data

The system data defines the environment in which Product 360 Media Manager is run.

1. Select **System > System parameters** to call up the "Modify system data" window.
   - This opens the "Modify system data" window. This is divided into several tabs. It allows you to control the basic operation of Product 360 Media Manager.

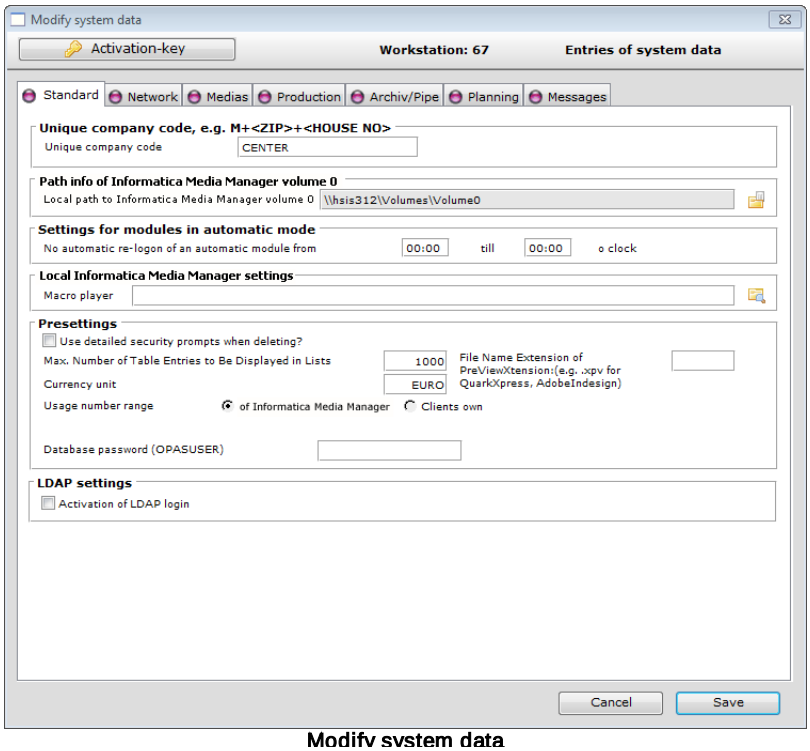

Modify system data

On the "Standard" tab, you can make basic settings that apply to all modules of Product 360 Media Manager .

2. Enter a "Company code". This is not freely selectable but is defined by your activation key.
3. Click on to define the local path to the main directory (`Volume0`) on your file server.

Note: Note that this directory has to be mounted locally for this to work.

4. Enter corresponding times to suppress automatic new login of an automatic module for a particular period of the day. This can be useful in conjunction with the Process Watcher module and for automated maintenance work that occurs every day.

5."Macro player": Enter the path to the Product 360 Media Manager macro player.

6.In the "Presettings" area, you can define whether a detailed confirmation prompt is to be used when deleting, as well as the currency and number range you want to use.


7.The procedure for assigning a new database password is as follows:

- Enter the new password in the "Database password" field.
- Press the TAB key to display the password confirmation field.
- Enter the password again in the "Confirmation" field.
- Click on **Save** to save the new password.

8.The "LDAP settings" area is only displayed if you have the necessary license. Here you can activate (☑) or deactivate (☐) login to the LDAP server.

"Network" tab

On the "Network" tab, you define the network environment for Product 360 Media Manager and make settings for the behavior of cross-platform items, particularly file names.

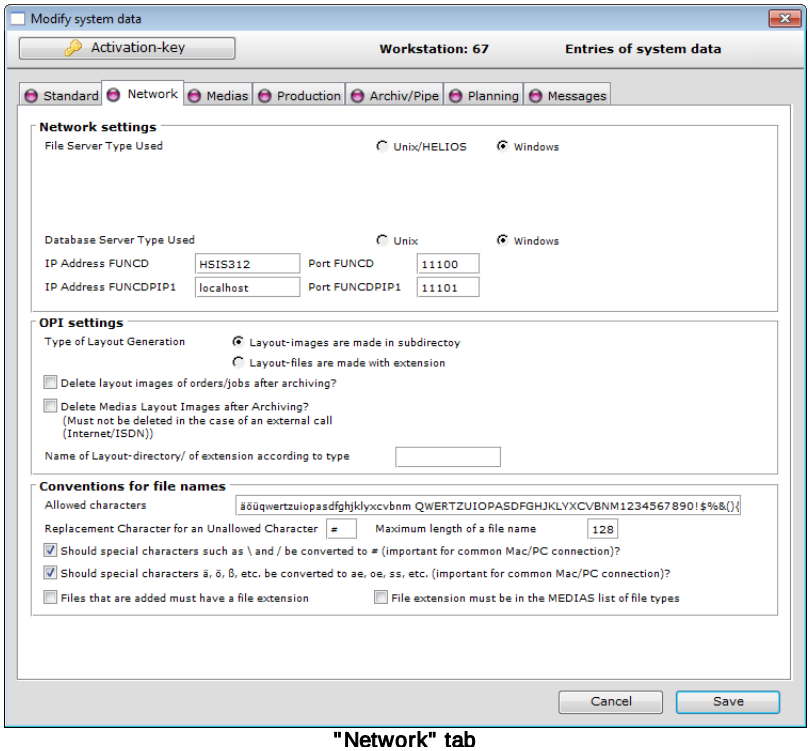

"Network" tab

1.In the "Network settings" area, you define where and in which environments the Product 360 Media Manager tools are located.

- Depending on the "File server type" you can specify the "UNIX path to Helios EtherShare" or the "NT path to NT Pipe Tools".
- If you set the "File server type" to "Unix/Helios", you may also need to enable the "Did you activate the Unicode conversion in all Helios volumes?" and "Give UNIX group rights to directories" option.

- You can also specify the database server type you are using. The options available are "Unix" and "Windows NT".
- You must also enter the IP address and the port for the FUNCD on your file server. The entry for the FUNCD on the first pipeline computer depends on whether it is available in your environment. If you do not have a first pipeline computer, leave the input fields blank.

2. In the "OPI settings" area you can regulate the behavior of Product 360 Media Manager in terms of the Open Prepress Interface (OPI).
   - You can either create the layout files in subdirectories or with extensions.
   - You can specify whether you want the layout files for production jobs to be deleted once they have been archived.
   - You can also specify whether you want the layout images for MEDIAS objects to be deleted once they have been archived.

Note: Note that these layout images may not be deleted if MEDIAS objects are retrieved from external locations, for example ISDN or the Internet.

   - For Helios, you can enable the "Is HELIOS OPI NOT installed" option if required.
   - In addition, you can define the directory or extension for the layout images.

3. In the "Conventions for file names" area, you can define the guidelines that will ensure that the files on your file server will be processed in a standardized way by Windows and Macintosh systems.
   - Create a list of "Allowed characters". This includes all the characters that the names of files managed by Product 360 Media Manager can contain.
   - You can also define a "Replacement character for character not allowed".
   - The "Maximum length of a file name" can be up to 128 characters in Product 360 Media Manager.


Note: Note that higher values than "128" will automatically be reduced accordingly.

   - Specify whether special characters will be converted into "#" characters.
   - Accents can also be converted into standard characters.
   - You can also specify that files added to Product 360 Media Manager must have an extension that is in the "MEDIAS list of file types". You will find more information about this list in the documentation for the Medias module.

"Medias" tab

On the "Medias" tab, you can specify the guidelines for the behavior of the Medias module.

Note: The "Medias" tab is only available if you have a license for the Medias module.

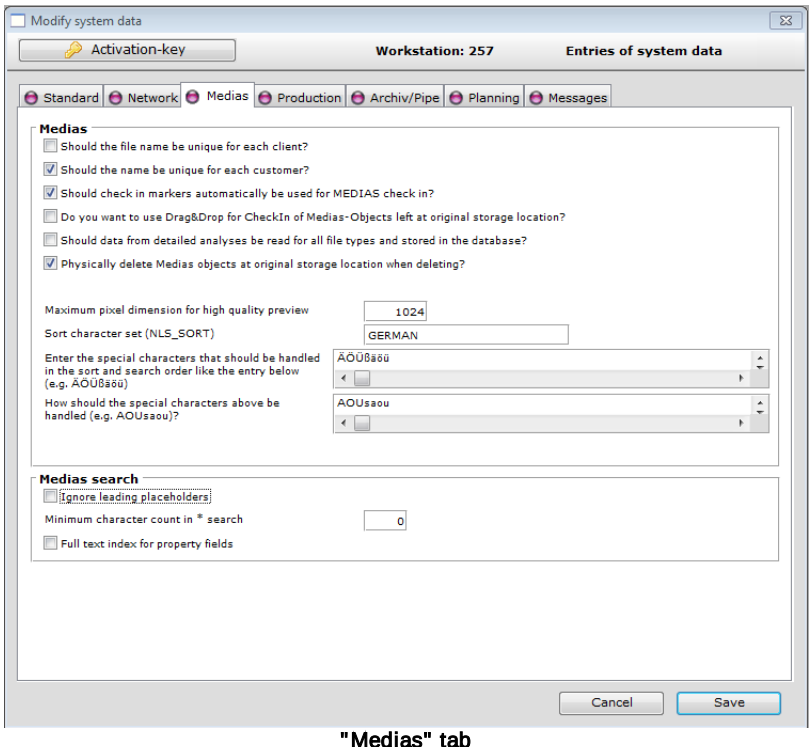

"Medias" tab

1. In the "Medias" area, you can define general default settings for MEDIAS objects.
   - You use "Should the file name be unique for each customer?" to specify whether a file name can exist multiple times in the same customer area in the Medias module.

Note: If you enable this option, versioning of MEDIAS objects is no longer available.

   - "Should the name be unique for each customer?" allows you to use the same designation for MEDIAS objects multiple times within a customer area.
   - Enabling "Should check in marker automatically be used for MEDIAS check in?" means that when MEDIAS objects are checked in, a marker with a time stamp is automatically set for those MEDIAS objects.

Note: This function requires a license for the Pipeline module.

   - "Only read in resource fork for Photoshop files" specifies that the previews for Photoshop files are extracted from the resource fork rather than being explicitly calculated.
   - "Should MEDIAS objects checked in using drag & drop be left at the original storage location?" is used to specify that when checking in using drag & drop, the file is checked in from the original storage location and is not copied onto the file server first.
   - "Should data from the detailed analysis be read for all file types and saved in the database? (individual settings for file types also possible)" enables you to perform an analysis for each MEDIAS object checked in, regardless of its file type.
   - You can specify physical deletion of MEDIAS objects at the original storage location here.
   - In the input box next to "Maximum pixel dimension for high quality preview", specify the maximum pixel dimension for the scaling.
   - In the "Sort character set (NLS_SORT)" input box you can enter a country-specific character set by which the Product 360 Media Managerdatabase sorts screen displays.

- In the next two fields, you can specify special characters and their corresponding standard characters for sorting screen displays in the database.


2. In the "Medias search" area, you can define default settings for searching for MEDIAS objects.

- "Ignore leading placeholders" can be used to specify that placeholder characters at the beginning of a search term are not taken into account.
- The "Minimum number of characters for search" is the value from which the search begins while you are making the entry.
- The "Full text index for property fields" is only important when using an MSSQL database. The SQL Server Management Studio includes an option of creating a custom full text index. Enabling this option allows you to include this in the search for MEDIAS objects.

"Production" tab

On the "Production" tab, you can specify the basic settings for the Production module.

Note: The "Production" tab is only available if you have a license for the Production module.

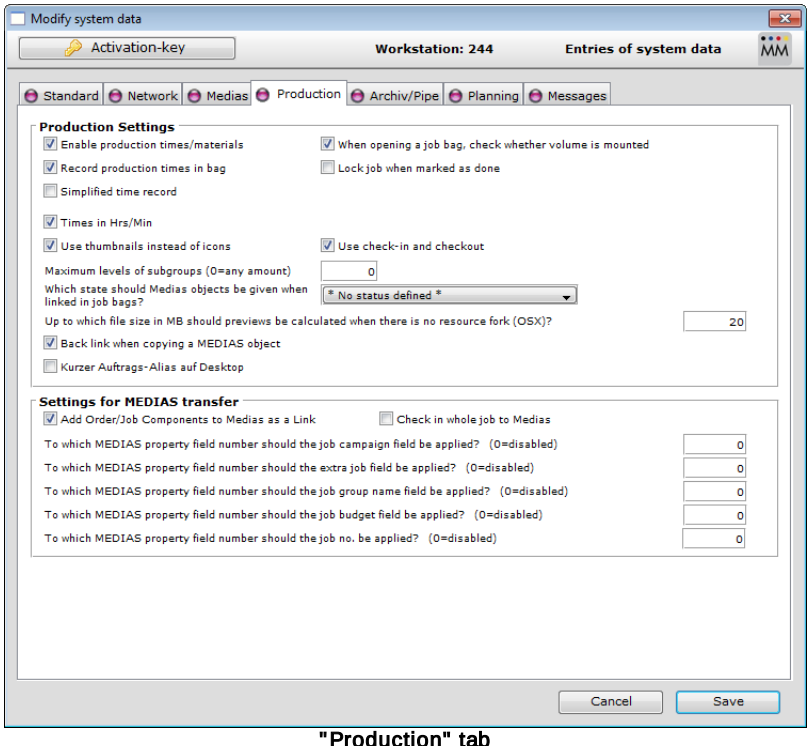

"Production" tab

1. In the "Production settings" area, you can define how Production behaves.

- Use "Enable production times/materials" to enable recording of time and material consumption while you are using the Production module. Based on this data, Product 360 Media Manager can also calculate the costs for a production job.
- "Record production times in bag": If you enable this option, a dialog box is opened each time a production component is edited, and in this dialog box the user has to enter information about the activity performed, the cost center and the status of the production component.

- "Simplified time recording" specifies that instead of a complex dialog box before editing a production component, a dialog box is displayed when opening the job bag, in which the user has to enter information about time recording. In this case, the dialog box when editing a production component is greatly simplified.
- You can use "Times in Hrs/Min" to specify that times may not be entered in decimal format.
- "Use thumbnails instead of icons" enables larger thumbnails to be displayed instead of smaller icons in the job bag.
- "When opening a job bag, check whether volume is mounted" checks the availability of the volume on which the job is located when you open each job bag.
- "Lock job when marked as finished" locks the job, thus preventing further changes.
- "Use check in and check out" is used to regulate the availability of the corresponding menu option in the Production module. If a production component is checked out, it is reserved for the user who is currently editing it and no other user can work on it during this time.
- "Maximum levels of subgroups (0 = any)" defines how many levels of subgroups can be created in a job bag. Subgroups are comparable with folders in a file system. If the number of levels were limited to "3", a path could consist of a maximum of the volume or main directory, two folders and the file name. The value "0" does not limit the number of levels.
- You can define what status MEDIAS objects should be assigned when linking to a job bag.
- You can also specify the maximum file size in MB that can be calculated in a preview if the resource fork is not available.

Note: Note that this setting is only effective on Apple Macintosh systems.

- "Back link when copying a MEDIAS object": When a job component is copied to MEDIAS, a reference to this MEDIAS object is created in the job bag.


2. In the "Settings for MEDIAS transfer" area, you can configure the rules for transferring job components to Medias. 73

Note: The "Settings for MEDIAS transfer" area is only available if you have a license for the Medias module.

- You can "Add job components as a link in Medias" instead of copying them.
- If you select "Add whole job to Medias" you do not need to explicitly select individual files for transfer to Medias. Instead, the Service 69 module copies or links to entire job bags.
- You can also specify the MEDIAS property field to which you want to transfer different items of meta data from a job bag.

"Archive/pipe" tab

On the "Archive/pipe" tab, you can specify the basic settings for the Archive 204 and Pipeline 156 module.

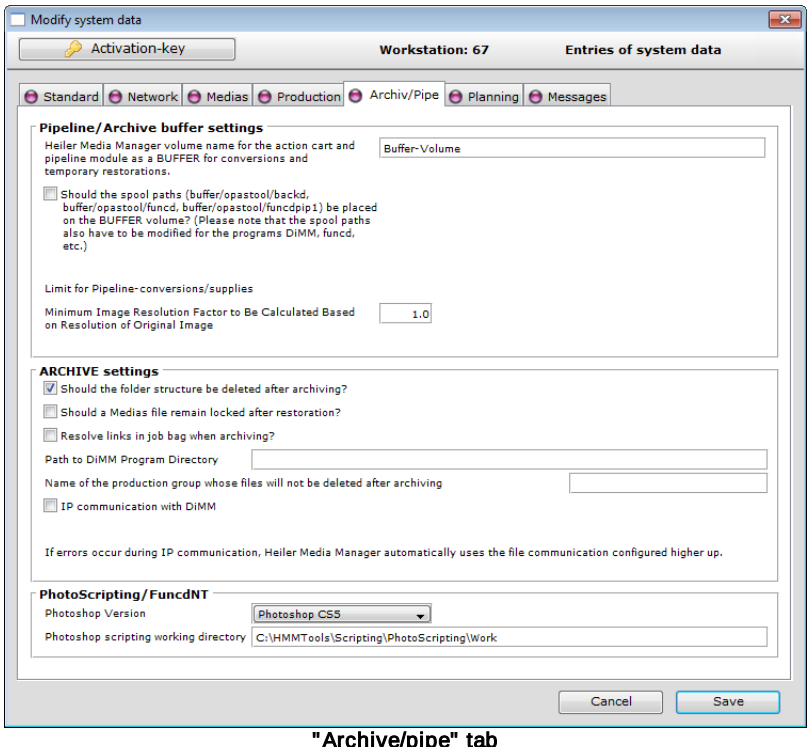

"Archive/pipe" tab

1. In the "Pipeline/Archive buffer settings" area, you can define where on the file server the Product 360 Media Manager file buffer is located.
   - In the first input box, you must enter a Product 360 Media Manager volume as the buffer for the Pipeline module and the action basket.

Note: Make sure that there is sufficient free space on this volume.

If you are using Helios, this volume should be an independent EtherShare volume to prevent inconsistency in the Helios desktop database. This EtherShare volume should only be used for buffering.

   - "Should the spool paths be placed on the BUFFER volume?": If you are using Helios, you should enable this option. Copy the entire "opastool" folder to the "buffer" folder on the buffer volume. If this does not already exist, you need to create it first. This also affects the DiMM and Funcd setup.
   - "Limit values for pipeline conversions/provisions": The factor specifies how much higher the resolution can be after a conversion than in the original image.

2. In the "ARCHIVE settings" area, you can define the rules and environment for the Archive module.
   - "Should the folder structure be deleted after archiving?" is used to delete not only archived MEDIAS objects and job components but also the folder structure in which they were previously stored.
   - "Should a Medias file remain locked after restoration?" controls the status of this kind of file.
   - "Resolve links in job bag when archiving?" is used to control the handling of jobs with links.

- In the "Path to DiMM" field, you must enter the path to DiMM from the perspective of the file server.
- You use "Name of the production group whose files will not be deleted after archiving" to specify a job group from your jobs, which will be retained on the file server in spite of a job and all its files being deleted.
- "IP communication with DiMM" replaces file communication with the faster option of direct communication with the DiMM server. To do this, you must enter the IP address at which the DiMM server can be contacted under "TCP/IP address DiMM".


Note: If IP communication fails, file communication is automatically used to ensure that operation can continue. However, this is only possible at the beginning of communication with the DiMM server. If an error occurs during processing of a current command, it will not be completed successfully.

- Under "TCP/IP port DiMM" you need to enter the port at which the DiMM server waits for incoming commands.

"Planning" tab

On the "Planning" tab you can specify the basic settings for the Planning module.

Note: The "Production" tab is only available if you have a license for the Planning module.

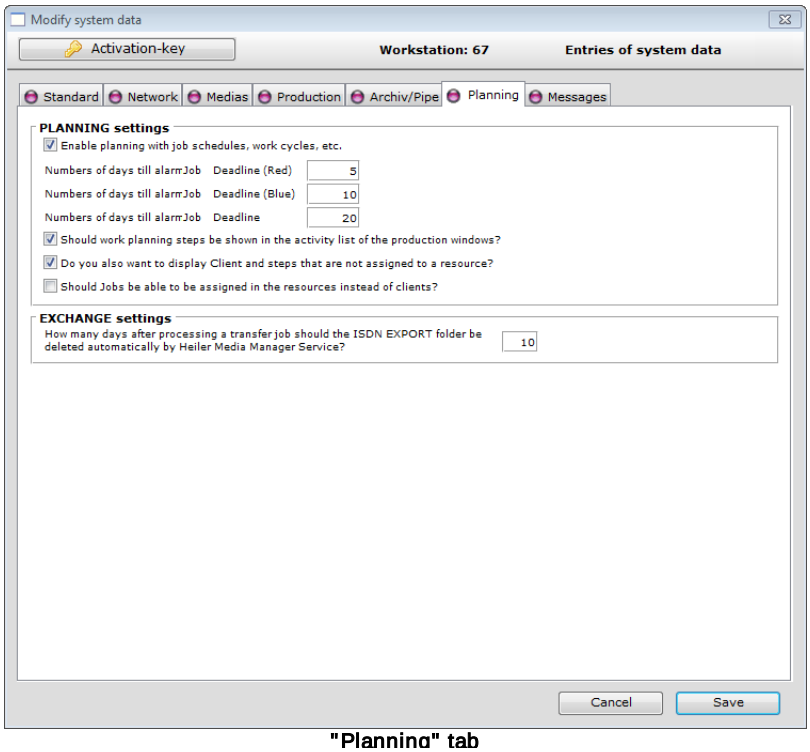

"Planning" tab

1. In the "PLANNING settings" area, you can define basic rules for the Planning module.
   - To use the module, you must "Enable planning with job schedules, work cycles etc. ".


- You can define the number of days before the completion date of a job as of which the job is marked in red, blue or green in the overview and selection list. This makes it easier to identify how urgently a job needs to be processed.
- If you enable "Should work planning steps be shown in the activity list for production windows?", only the work steps and/or activities from the associated work schedule are displayed and not all work steps and activities available to the user.
- Enable "Should customers, budgets and work steps that are not assigned to any resource also be displayed in production?" if you also want customers, budgets, and work steps with no resource assignment to be displayed in the overview lists.
- Enabling "Should jobs be able to be assigned in the resources instead of customers?" allows you to assign a particular job to a resource. This makes your work easier in that you do not have to remember which customer belongs to a particular job. A user that is assigned to a resource is then given access to a corresponding job for a customer.

2. In the "EXCHANGE settings" area, you can define rules for exchanging data using transfer jobs.
   - Under "After how many days after processing a transfer job should the ISDN EXPORT folder be automatically deleted by Product 360 Media Manager Service?" enter the number of days after which a customer EXPORT folder is to be deleted by the Service module.

"Messages" tab

On the "Messages" tab, you can specify the basic settings for sending e-mails in Product 360 Media Manager.

Note: The "Messages" tab is only available if you have a license for the Workflow Manager module.

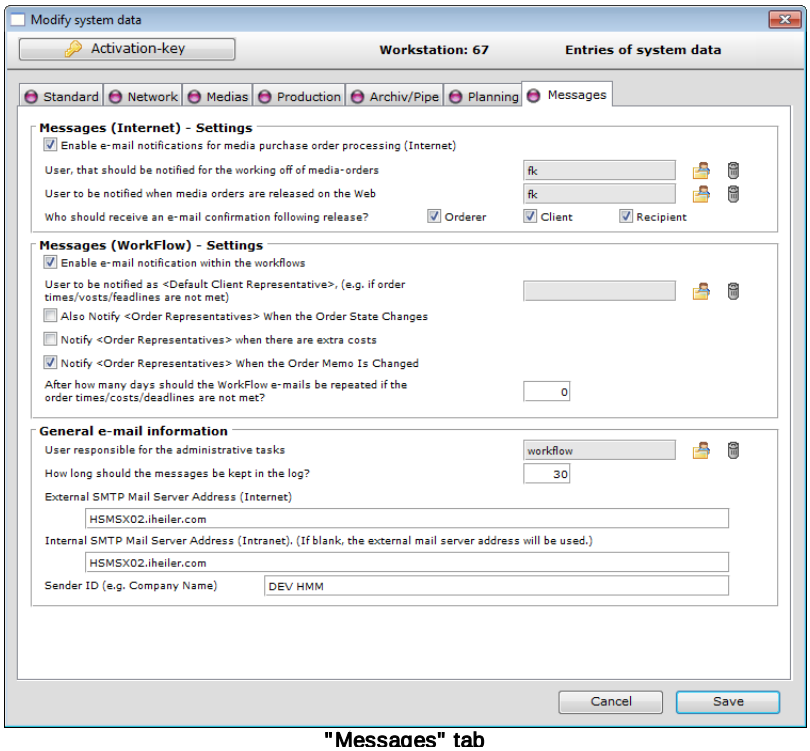

"Messages" tab

1. For all user selection fields, clicking on or assigns a user or deletes the assignment.
2. In the "Messages (Internet) settings" area you can set the rules for sending Web-related e-mails.
   - In general, you can "Enable e-mail notifications for media purchase order processing (Internet)" or disable it.
   - You can select a user for notification for processing and release of media purchase orders.
   - You can also specify who will receive an e-mail confirmation when a media purchase order is released. You can select from "Purchaser", "Customer" and "Recipient".
3. In the "Messages (workflow) settings" area you can set the rules for sending workflow-related e-mails.
   - In general, you can "Enable e-mail notification within the workflows" or disable it.
   - You can select a user to be notified, for example if a job becomes critical in terms of its costs or deadlines.
   - You can specify that the people responsible for jobs should be notified if the status of a job changes, extra costs are incurred or the memo for a job is changed.
   - You can define the number of days after which e-mails indicating that limits for jobs have been exceeded will be resent.
4. In the "General e-mail information" area, you can set the environment options for sending e-mails.
   - First of all, you should enter the user responsible for administrative tasks in Product 360 Media Manager.

- You can also define the length of time for which sent messages will be logged.
- Enter the name or IP address of the external and internal SMTP server.

Note: If no internal SMTP server is specified, the external SMTP server will be used instead.

- You can enter a "Sender ID" for the e-mails sent by Product 360 Media Manager.


Note: E-mails generated automatically by Product 360 Media Manager have the e-mail address of the "admin" user as the sender.

2.2 Product 360 Media Manager volumes

In Product 360 Media Manager, volumes are locally mounted releases on your file server, in which Product 360 Media Manager stores all common files that are used.

Note: The "Create new volume" and "Modify volume" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **System > Product 360 Media Manager** volumes.
   - The "Product 360 Media Manager volumes overview" window opens. This is used to manage the volumes in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to call up the "Create new volume" window.

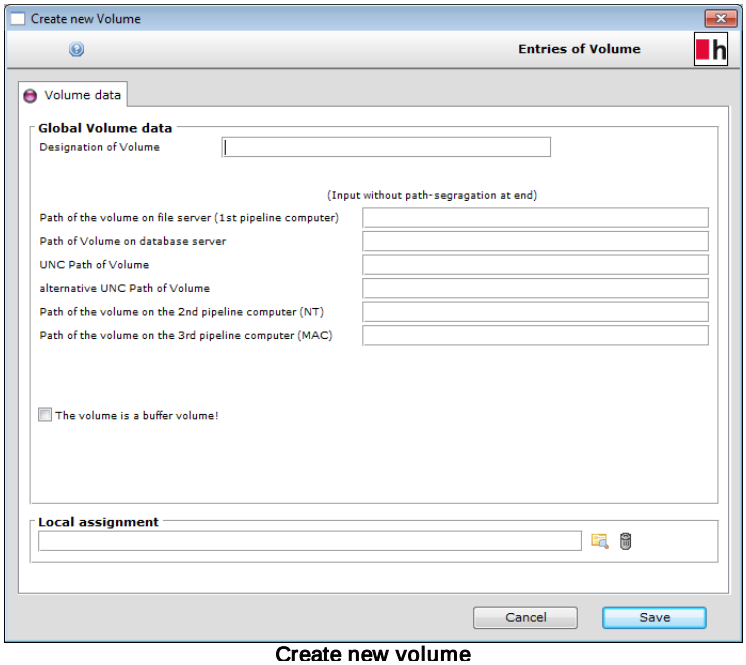

Create new volume

3. In the "Global volume data" area, enter the application information that is valid for all workstations.
   - First enter the "Designation of volume".
   - The paths for the file server and the database server are essential.
   - Specifying the UNC paths is optional.

- If you are using a 2nd or 3rd pipeline computer, you must also enter the path to the volume for this computer.
- If the volume is used for spooling data, select "The volume is a buffer volume".

Note: When you create a buffer volume, an additional input box is automatically displayed. Enter a local temporary directory on the file server here, e.g. `C:\temp`.

4. If you are using Product 360 Media Manager at distributed locations, you must also select the correct server location.
   - Enter the UNC path to this volume in the "Local assignment" area.
   - Click on to specify the local path to the volume.
   - Click on if no volume is available on this workstation.

Note: You need to enter the local assignment of the Product 360 Media Manager volumes on every workstation.

If you are using the same paths on every workstation, you can copy the file `local.ini` from the Product 360 Media Manager directory and paste it into the Product 360 Media Manager directory on all other workstations.

5. Click on **Save** to save your entries.

2.3 Print templates

A printed overview list is beneficial in various situations. The latest version of Product 360 Media Manager comes with a wide variety of print templates, which you can adapt as required to fit in with your corporate identity.


Note: If you want to use an internal font, this must be installed locally. The same applies to the logo, which you can adapt by selecting **Master > Report logo**.

The number of print templates available differs, as they depend on the context and the currently active module.

This section describes both the report editor and how to edit existing print templates.


2.3.1 Creating print templates

To manage print templates, call up the report overview list by selecting **System > Manage reports**.

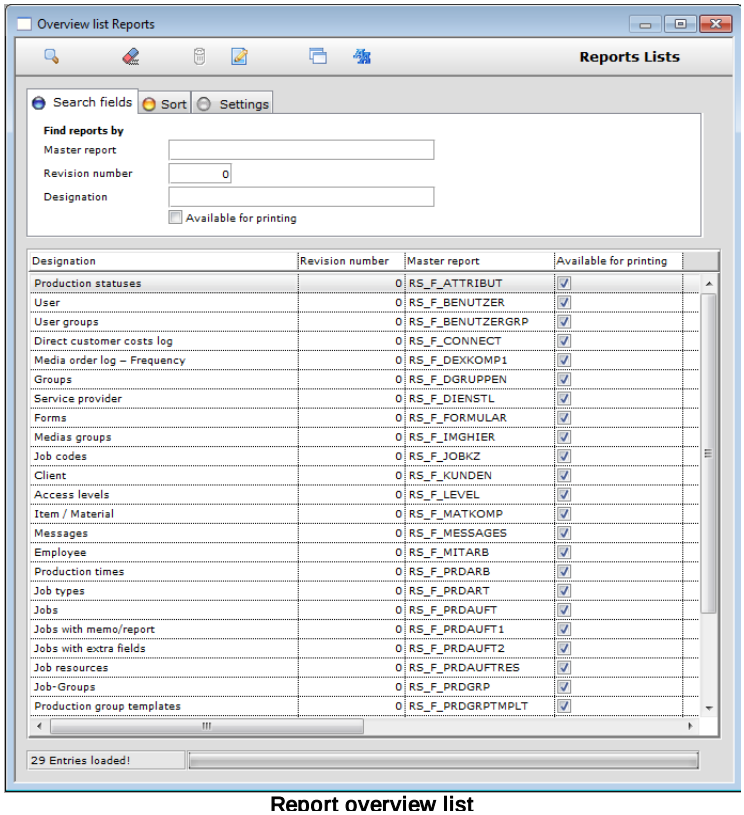

Report overview list

All print templates supplied are created as "master reports" and cannot be edited. They can be identified by the revision number "0". To create your own templates, select an appropriate master report in the list and duplicate it using .

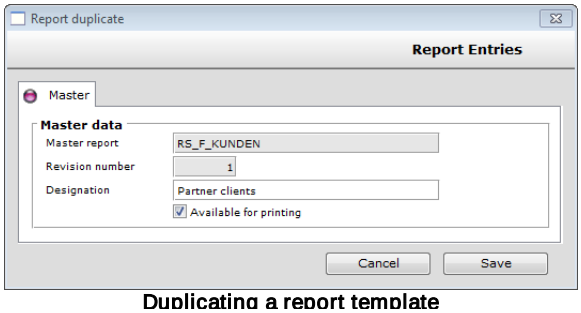


Duplicating a report template

Enter a descriptive name and **save** the settings. In the overview list, the revision number is automatically set to "1".

You can sort this list by the individual column headings (***Sorting*** tab). On the ***Settings*** tab you can save particular changes and search options

To preconfigure the report editor, you can use a font management dialog box to select the fonts to be used in your reports. Select to open this dialog box.

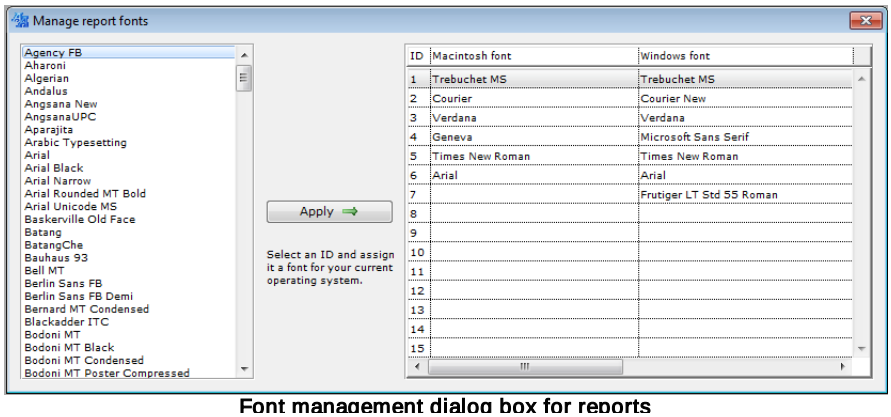

Font management dialog box for reports

All installed fonts are listed in the selection window on the left. The procedure is as follows:


1. In the right-hand table, select the entry or ID to which you want to link the relevant font.
2. Select the font in the selection window
3. and click on **Use**.

The font you have just selected is assigned to the selected ID and the corresponding operating system. Most current fonts (open type and true type) are supported by both the Windows platform and the Macintosh operating system. Older fonts in postscript format are identified by their file extension (Windows: PFB or PFM, Macintosh: PFM, AFM) and assigned to the corresponding operating system.

Caution: The selected font must be available on all workstations running the same operating system. It is **not** provided or transferred by Product 360 Media Manager.


2.3.2 Report editor

Double-clicking on a print template calls up the report editor. This is only active if the currently selected print template has a revision number greater than "0" and therefore is not a master report.

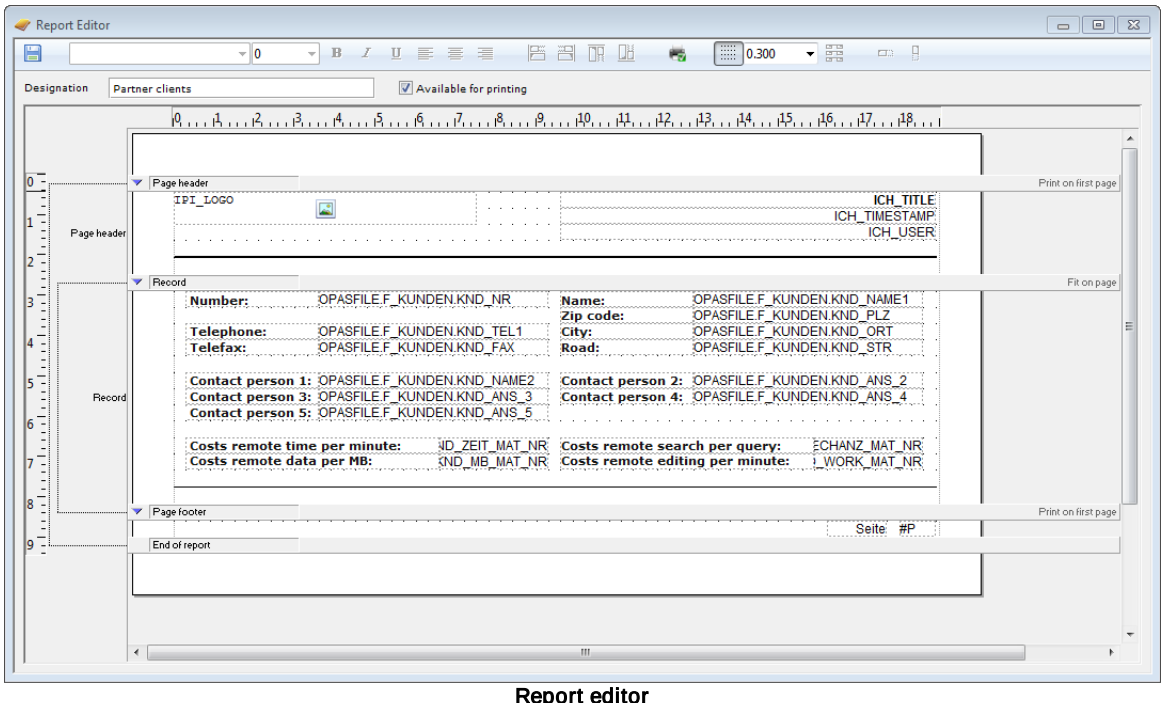


Report editor

The editor provides a split view of the print template: header, actual data record, and footer. If you move the cursor over an arrow ( ) and it changes to a hand shape, you can click on it to show or hide individual parts of the screen.

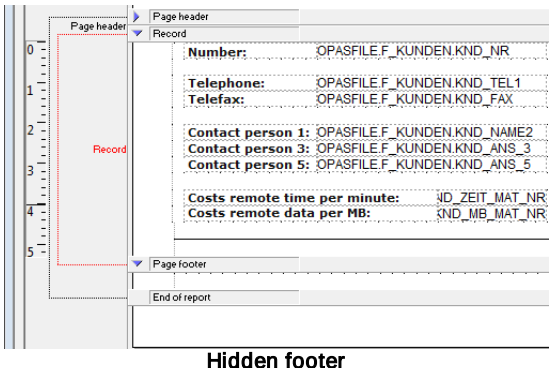




Hidden footer

You can enlarge or reduce the individual areas by positioning the gray separators as required with the cursor.

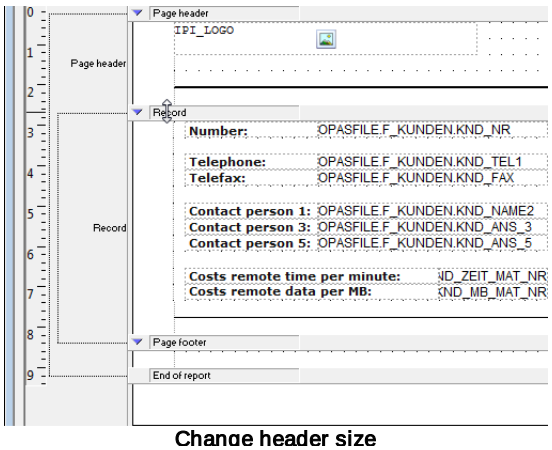

Change header size

The fields displayed can be divided into two types: ***Field label*** and ***field content***. By default, the ***label*** is formatted in bold and is freely configurable. The ***content*** is based on data fields from the database and is populated according to the variable values. The preset label normally makes the meaning clear.

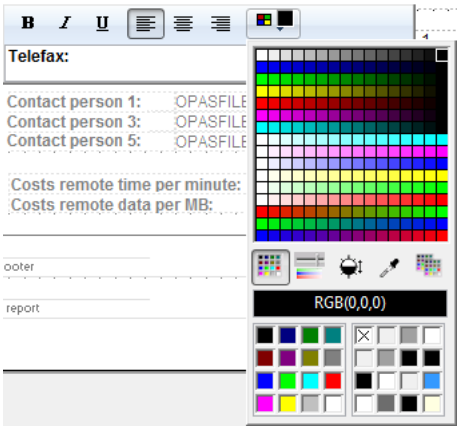You have the following configuration options here:	
	Clicking on this icon saves all changes and creates a print template.
	The full range of text formatting functions is only available if you have clicked on a variable.
	If you have selected a ***field label*** only the font and size are enabled in the text formatting functions. For further editing, double-click on the field. A separate editor opens. This editor closes if you click in another area of the screen and the settings are applied automatically.
	If you have selected more than one object, these alignment elements are active. Clicking on the corresponding element aligns all selected objects to the same line.
	This button is used to call up the printer configuration dialog box.
	These elements relate to the grid display. The first element is a switch for showing/ hiding the grid. You can select the appropriate grid size from the subsequent selection list. The last element is used for vertical alignment of fields along the grid lines.
	These formatting elements are only active if a variable is selected. They make the relevant field expandable. If you do not anticipate being able to estimate the extent of the database content retrieved, this functionality allows the field to be expanded vertically or horizontally.

2.4 Product 360 Media Manager user system

There are three user types in Product 360 Media Manager – **Employee, Service provider** and **Customer.** Each of these user types sees a slightly different view of the data in Product 360 Media Manager so that it meets the relevant user type's requirements as closely as possible. For example, a user with the type "Customer" can only view the data for his or her relevant customer area, while a user with the type "Employee" can view all customer areas.

However, the procedure for creating a user is always the same. You start by defining user information for an employee, service provider or customer (these correspond to a real person or company). You then create a user and link this user with the user information you have just defined.

If you require a large number of different users with the same user rights in Product 360 Media Manager, you can group these users together in a user group to avoid having to enter the same user rights manually for each. A user can be a member of several different user groups. For example, you can create a user group with the default rights for the Medias and Production modules and then assign individual users to either one or both user groups. If an individual user requires a specific additional right, you can assign this right to that user alone. User and user group rights are added together. It is not possible to revoke an assigned right by revoking it for either the user or the user group to which the user belongs. Instead, the right must be deactivated both for the user and for the user group to which the user is assigned.

Both customers and users can be assigned to one or more resources. In turn, resources can be assigned to individual work steps in the workflows in the Planning module.

The use of resources regulates an individual user's view of the jobs for a customer and of the customer itself, which is also assigned to the resource. In other words, in the Job overview list, a user of a resource will only see those jobs that belong to the relevant customer.

The same applies to work steps to which the resource is assigned in the Planning module. Once again, the user will only see those work steps from a job to which his or her resource is assigned.

This has the following benefits in the Production module: When selecting a job a user sees only those jobs assigned to him. Under Timetables, a user sees not only the jobs assigned to him but also his work steps.


Note: You do not have to use the resources in Product 360 Media Manager. If you grant a user the authorization "User can list all customers/jobs/work steps (without resources)" he can view all jobs, customers and work steps with no restrictions. This setting can be useful for an administrator or a head of department, for example.

2.4.1 Introductory example

This section describes the general process for creating a new user in Product 360 Media Manager. For details of the different types of users, refer to the Managing employees, Managing service providers and Managing customers sections.


This section gives an example of how to create a customer and the corresponding user. Follow the steps below:

1. Select **Personnel/Clients > Clients** to open the "Client overview list".
2. Click on to create a new customer.
   - The "Create new customer" window opens.

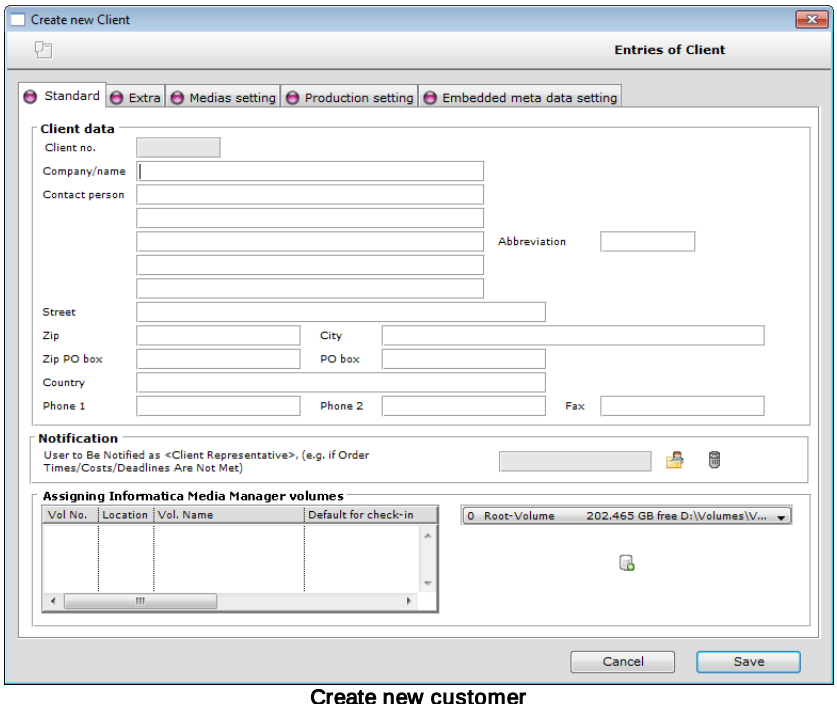

Create new customer

3. Enter the information about your customer.
4. Click on **Save** to save your entries.
   - A new customer is created.
5. Close the "Customer overview list".
6. Select **Employees/Customers > Users** to open the "User overview list".
7. Click on to create a new user.
   - The "Create new user" window opens.

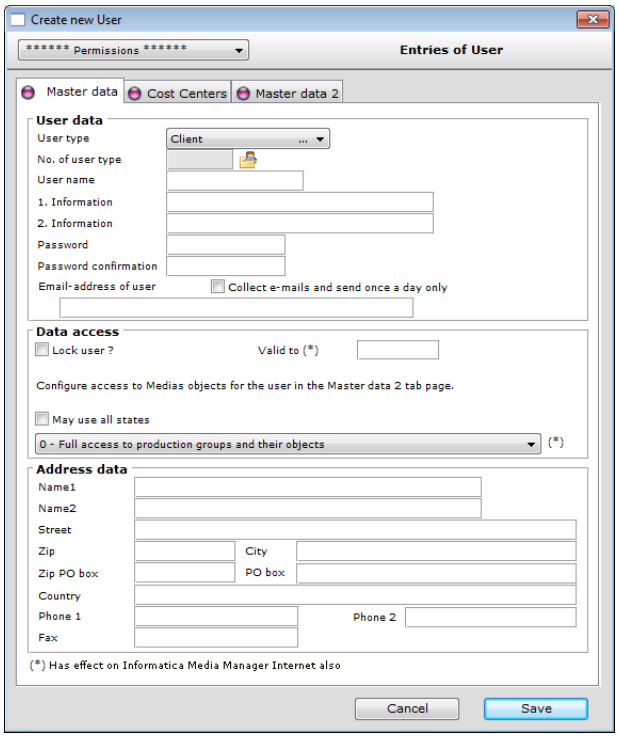

Create new user


8. Under "User type", select "Customer".
9. Click on to open the "Customer selection list".
10. Select the customer you have created in the "Customer selection list".
11. Click on to assign it to the new user.
12. Enter additional information in the "Create new user" window. The "Rights" list box at the top edge of the window takes you to the settings for the user rights for the individual Product 360 Media Manager modules.
13. Click on **Save** to save your entries.
    - Your new "Customer" type user is now ready to use.

Caution: The user rights assigned have an impact on the screen display. To avoid unnecessary confusion for users, the associated fields in the dialog boxes are not displayed if the user does not have authorization for them.

2.4.2 Managing employees

Note: The "Create new employee" and "Modify employee" windows have the same content. The process is thus described using the example of creating a new employee.

1. Select **Personnel/Client > Employees**.
   - The "Employee overview list" opens. It is used to manage the employees in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new employee.
   - The "Create new employee" window opens.

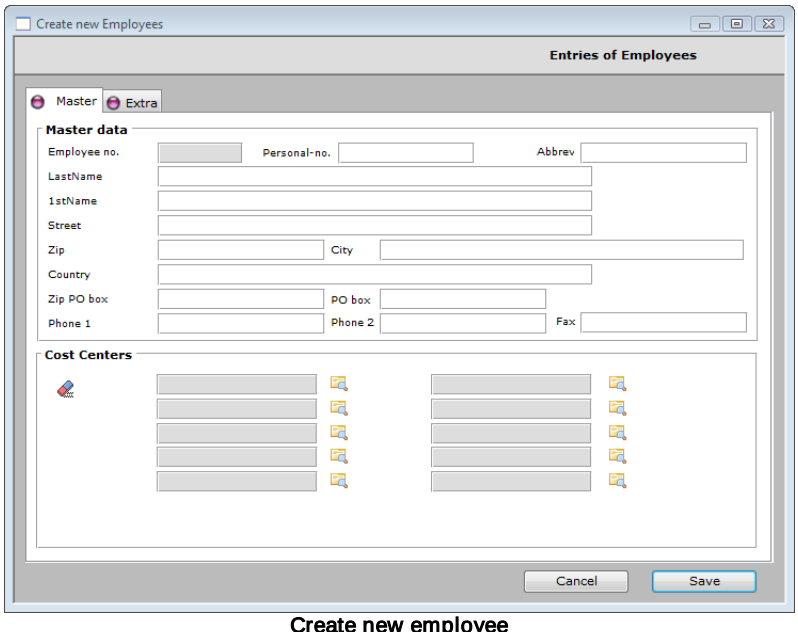

Create new employee

3. The "Master data" area on the "Master" tab is used to enter basic information about the employee.
   - The "Employee no." is assigned automatically by Product 360 Media Manager.
   - All other information, e.g. "Personnel no.", "ID" or "City", can be freely assigned.
4. In the "Cost centers" area, you can link cost centers with the employee.
   - To assign a cost center to the employee, click on .
   - In the "Cost center selection list", select the cost center you want to use.
   - To cancel all cost center assignments, click on .
5. Go to the "Extra" tab.
   - The "Communication information" area is used to store information about communication with the employee.
   - In the "Bank data" area, you can enter the employee's bank details.
   - In the "Job data" area, you can enter details of how long the employee works for and what his "Hourly rate" is.
6. Click on **Save** to save your entries.


2.4.3 Managing service providers

Note: The "Create new service provider" and "Modify service provider" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **Personnel/Client > Service providers**.
   - The "Service provider overview list" window opens. This is used to manage the service providers in Product 360 Media Manager. This window provides you with standard functions.

2.Click on to create a new service provider.

➪ The "Create new service provider" window opens.

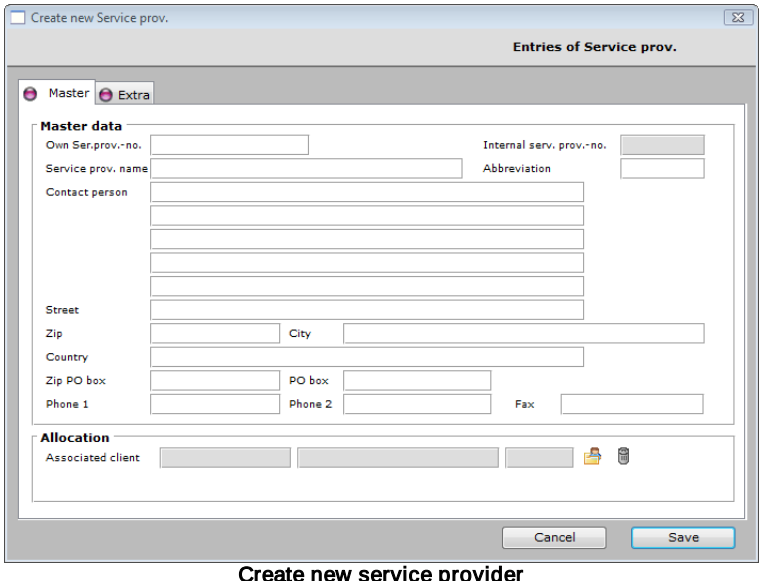

Create new service provider

3.In the "Master data" area on the "Master" tab, you can enter basic information about the service provider:

- The "Internal service provider no." is assigned automatically by Product 360 Media Manager.
- All other information, e.g. "Own service provider no.", "Abbreviation" or "City", can be freely assigned.

4.Under "Allocation", you can link a customer with the service provider.

- To assign a customer to the service provider, click on .
- In the "Client selection list", select the customer you want to use.
- To cancel all customer assignments, click on .

5.Go to the "Extra" tab.

- The "Communication info" area is used to store information about communication with the service provider.
- In the "Bank data" area, you can enter the service provider's bank details.
- In the "Job data" area, you can enter details of how long the service provider works for and what his "Hourly rate" is.

6.Click on **Save** to save your entries.

2.4.4 Managing customers


Note: The "Create new customer" and "Modify customer" windows have the same content. The process is thus described using the example of creating a new customer.

1.Select **Employees/Customers > Customers**.

➪ The "Customer overview list" window opens. This is used to manage the customers in Product 360 Media Manager. This window provides you with standard functions.

2.Click on to create a new customer.

➪ The "Create new customer" window opens.

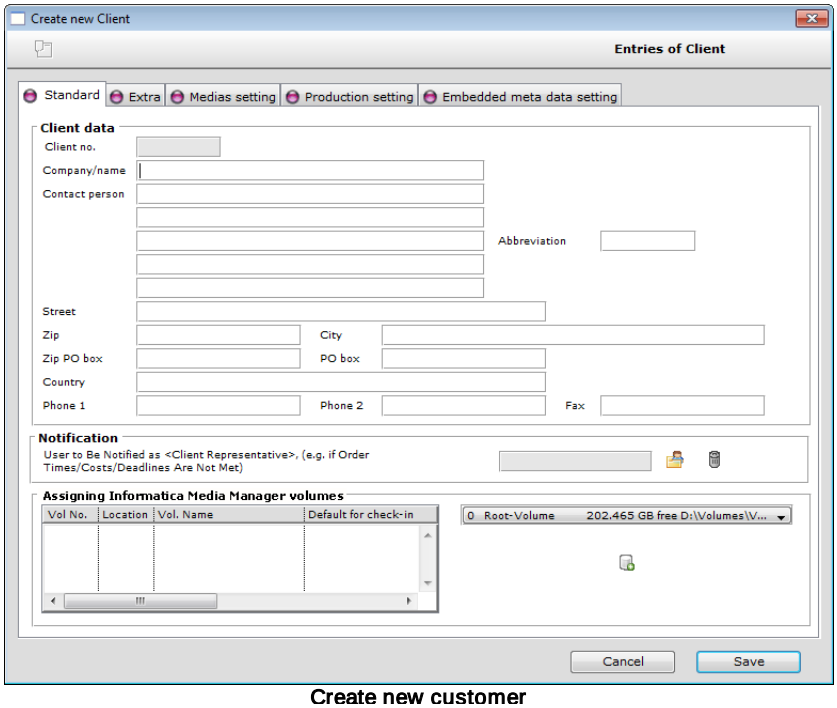

Create new customer

3.In the "Customer data" area on the "Standard" tab, you can enter the basic information about the customer. You can complete each field in this area with the information of your choice.

4.In the "Notification" area, you can specify a user who will be responsible for the customer:

- Click on .
- In the "User selection list", select the user you want to use.
- If you have selected the incorrect user, click on to cancel the assignment.

5.In the "Product 360 Media Manager volume assignment" area, the customer is assigned the volumes on which data from its Medias area will be stored:

- To do this, select the relevant Product 360 Media Manager volume in the drop-down list on the right.
- Click on .

Caution: Note that Product 360 Media Manager volumes added cannot be removed from the assignment later.

6.Go to the "Extra" tab.

- In the "Bank data" area, you can enter the customer's bank details.
- The "Communication info" area is used to store information about communication with the customer.

- In the "Miscellaneous" area, you can enter the "Remote costs" and define the rules for parallel access from the Internet. Clicking on gives you information about the available parallel access.
  Either enter the number of users who can simultaneously log in for the customer or alternatively enter "0" or "-1". To block access via the Internet, enter "-2".

7. Go to the "Medias settings" tab.

Note: The "Medias settings" tab is only available if you have a license for the Medias module.

- "Activate context search?" activates the context search for text objects, e.g. PDF or Word files. You must also explicitly activate the context search for each file type you want to use in Medias as this function influences the speed of your database.
- Using "In progress" you activate the display of in the editing screens for MEDIAS objects, which you can use to make a corresponding attribute assignment.
- You can use various option buttons in the section below to specify how you want Product 360 Media Manager to handle file names that are or sound the same.
- If you want new MEDIAS objects created to be automatically assigned to categories, select the field by clicking on . This displays the input box in which you can enter the corresponding value for the maximum number of objects per category.
- If you want to implement a versioning workflow, two options are available:

  a. Enable release workflow
     A field to specify whether an object has been checked is added to the editing screens. Subsequent release for the current version is necessary. The relevant status can be set manually or using a workflow.

  b. Automatically release first version
     A field to specify whether an object has been checked is added to the editing screens. Subsequent release for the current version is not necessary. The relevant status is set automatically and releases every first version as checked.
- If you want to use a specific preview size for a customer that differs from the default set in the system data, select the field by clicking on . This displays the input box in which you can enter the corresponding value for the maximum resolution.
- If you want this customer to be able to access the Audit trail function, you can enable it here.

Note: The context search requires the Context module.

- If you enable "In progress?", MEDIAS objects that are currently being edited will be marked accordingly in Medias.
- You can use "How should identical or similar file names be added?" to define the way in which Product 360 Media Manager deals with identical and similar file names.

a. Enter as a new version and NO application of previous version meta data when file name is the same WITH extension
   The file extension, e.g. ".bmp" is taken into account. The file is entered as a new version of the existing file but the meta data from the old version is not applied.
b. Enter as a new version and apply previous version meta data when file name is the same WITH extension
   The file extension, e.g. ".bmp" is taken into account. The file is entered as a new version of the existing file and the meta data from the old version is applied.
c. Add with artificial name (<Name>-1,<Name>-2, etc.) when file name is the same WITH extension
   The file extension, e.g. ".bmp", is taken into account. The file is given the same name as the previous version with a consecutive number but does not take that file's meta data.
d. Overwrite old file when file name is the same WITH extension
   The file extension, e.g. ".bmp", is taken into account. The file replaces the previous version and takes its meta data.
e. Enter as a new version and NO application of previous version meta data when file name is the same WITHOUT extension
   The file extension, e.g. ".bmp" is not taken into account. The file is entered as a new version and does not take the meta data of the previous version.
f. Enter as a new version and apply previous version meta data when file name is the same WITHOUT extension
   The file extension, e.g. ".bmp" is not taken into account. The file is entered as a new version and takes the meta data of the previous version.

Note: Note that the term "meta data" covers all the information you assign to your objects: from indexing to image credits to group classification.

- You can use "Enable automatic category assignment and new creation for this customer when adding to Medias?" to automatically create categories on your file server (as subdirectories in the file system). This improves performance if you are using a large number of objects in your Product 360 Media Manager database.
- In "Max. number of objects per category (min. 500)", you can set a value above which a new category (subdirectory) is created on your file server. The minimum value is "500".
- Under "Product 360 Desktop Web services", you enter the URL of the Web service, to ensure that the usage of MEDIAS objects in Product 360 Desktop is checked before they are deleted.

8. Go to the "Production settings" tab.

Note: The "Production settings" tab is only available if you have a license for the Production module.

- If you are using the "Enable customer-specific extra fields?" option, you can choose to overwrite the global definition of the extra job fields and also to assign the extra job fields to MEDIAS property fields when transferring a job component to Medias.
- In the large fields, enter the designations you want to use for your extra job fields.
- In the small fields, enter the number of the MEDIAS property field to which you want to transfer the corresponding information from the job.
- Clicking on allows you to define property fields for jobs, in a similar way as for MEDIAS groups.

9. If you are editing an existing customer, switch to the "Embedded meta data setting" tab.
   - To extract embedded meta data, e.g. IPTC or Exif, enable the option in the "Collect meta data" area.

Note: "IPTC" is the abbreviation for "International Press Telecommunication Council". This organization passed the IPTC-NAA standard on embedding text information in the headers of image files and on specifying the classification of image data from external agencies: IPTC data includes the object description, heading, title, city, state, client code and department. It is used for various purposes, including assigning images to particular categories or indexing them when importing them into a database.

   - To create an assignment, select an entry in the table
   - In the "In property field" list box, select the property field to be assigned to the table entry. To cancel an assignment to a property field, select the table entry and then select the value "No assignment" in the drop-down list.


Note: If your table is still blank, you have not yet added any MEDIAS objects with embedded meta data or importing of meta data is not activated for the corresponding data type.

10. Click on **Save** to save your entries.

2.4.5 Managing users

Note: The "Create new user" and "Modify user" windows have the same content. The process is thus described using the example of creating a new hotfolder.

1. Select **Employees/Customers > Users** to open the "User overview list".
   - The "User overview list" window opens. This is used to manage the users in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new user.
   - The "Create new user" window opens.

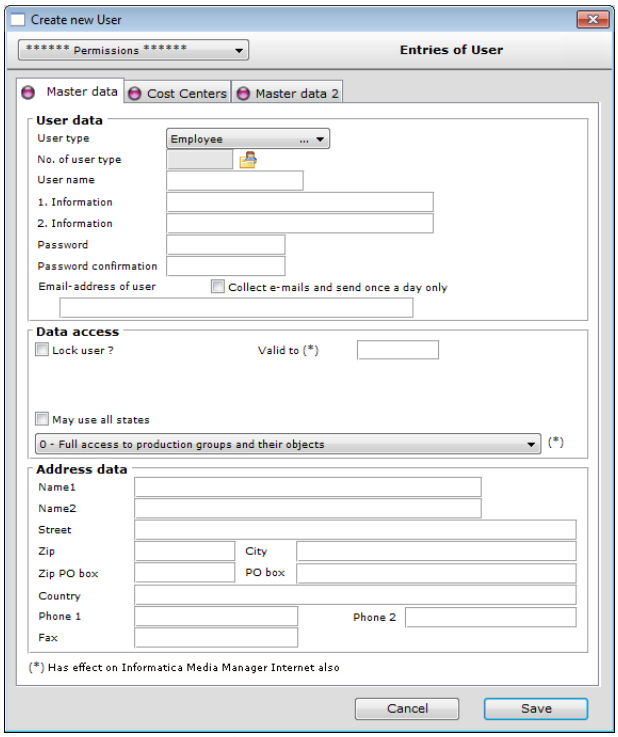

Create new user

3. In the "User data" area on the "Master data" tab, enter the basic information for the user. To do this, first select "Employee", "Service provider" or "Customer" in the "User type" field.
4. In the "No. of user type" field, assign the new user an employee, a service provider or a customer. To do this, click on and then transfer the data record you want to use from the drop-down list.
5. Under "User name", enter the name the user will use to log into Product 360 Media Manager. In the "1. Information" and "2. Information" fields, you can enter comments about the user.
6. You must enter the user's password once under "Password" and a second time under "Password confirmation" to rule out any spelling or typing errors.
7. Complete the "E-mail address of user" field so that Product 360 Media Manager can send e-mails to the user. The "Collect e-mails and send once a day only" setting means that the user will receive all relevant e-mails as a ZIP file at the same time each day, rather than spread out over the course of the day.

Note: To use this function, the Pipeline module must be configured to process the action basket in automatic mode.

8. In the "Data access" area, you can specify which MEDIAS objects and job components a user can access.
   - "Lock user" prevents the user from logging into Product 360 Media Manager again. If the user tries to log in, he/she will be automatically advised to contact the system administrator.
   - "May use all statuses" specifies whether a user is permitted to set every status.

Note: This option is only available if you have a license for the Planning module.

- You can use "Access to production groups and their job components" to specify which production groups the user has access to.

Note: For users whose user type is defined as "Customer" and "Employee" the "Data access" area differs from that available to users defined as "Service provider", as it is also used to configure access to MEDIAS objects. Make these settings on the "Master data 2" tab.

9. Under "Address data", enter the contact details for the user. The entries in these fields are user-defined.
10. To assign rights to the user, click on the "Rights" drop-down list and select the relevant area.

Note: Note that you have to save the user data first. You will be prompted to do this if necessary.

11. Go to the "Cost centers" tab. Here you can assign cost centers to the user, which are, in turn, used to define the activities available to the user.
12. Click on .
13. From the "Cost center selection list", select the relevant cost center to assign it to the user. Clicking on cancels all cost center assignments.
14. Go to the "Master data 2" tab.
15. The "Simple" option allows you to use access levels to control a user's access rights for the corresponding customer's MEDIAS objects.
    - Under "Level 1" and "Level 2", click on to define two access levels that are linked to a particular condition using the "Access" drop-down list.
    - **Access equal to/greater than level 1:** This link allows the user to use all MEDIAS objects with an access level corresponding to at least "Level 1". For example, if "Level 1" has the value "50", all MEDIAS objects with the value "50", "60" or "100" can be used. MEDIAS objects with a value lower than "50", e.g. "35", cannot be used. In this case, "Level 2" is irrelevant.
    - **Access from level 1 to level 2:** This link allows the user to use all MEDIAS objects with access levels that lie within "Level 1" and "Level 2". For example, if "Level 1" has the value "50" and Level 2 has the value "100", the user can use all MEDIAS objects that have the value "50", "70" or "100". MEDIAS objects with a value outside of this range, e.g. "25" or "125", cannot be used.
    - **Access level 1 and level 2:** This link allows the user to use all MEDIAS objects with access levels that have the exact value of "Level 1" or "Level 2". For example, if "Level 1" has the value "50" and "Level 2" has the value "100", the user can use all MEDIAS objects that have the value "50" or "100". MEDIAS objects with other values, e.g. "35", "55" or "150", cannot be used.

16.The "Extended" option allows you to define more complex rules for access to MEDIAS objects.

- In the lower section, create and edit the rules using the expressions ">=", "<=" and "=". For example, this allows you to create rules that give a user access to levels 3, 5 and 7 but not to levels 4 and 6.
- Select an access level by clicking on .
- Click on to add a new rule.
- Click on to edit a selected rule.
- Click on to apply the changed rule.

17.The "Activate private access levels" option allows you to specify that the newly created user can only see private files with the corresponding permissions.

18.Click on **Save** to save your entries.

2.4.6 Managing user groups

Note: The "Create new user group" and "Modify user group" windows have the same content. The process is thus described using the example of creating a new workflow.


1.Select **Employees/Customers > User groups**.

The "User group overview list" window opens. This is used to manage the user groups in Product 360 Media Manager. This window provides you with standard functions. The following functions are also available:

- : Select the users you want to add to the user group.
- : Select the users you want to remove from the user group.
- : Displays the users in a user group.
- : Creates default user groups with the corresponding rights for use in the Web front-end.

2.Click on to create a new user group.

The "Create new user group" window opens.

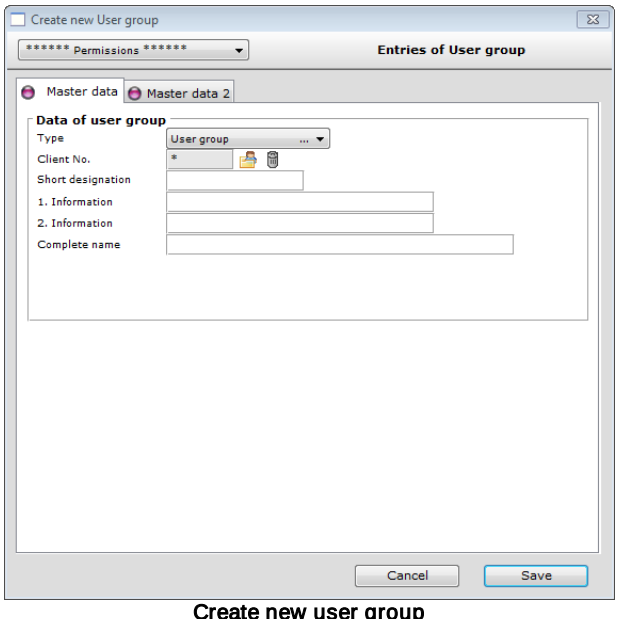

Create new user group

3. In the "User group data" area on the "Master data" tab, enter the basic information for the user group. You cannot change the type.
4. Select a customer under "Client No." if you only want the user group to be available for one customer. Otherwise, the user group can be used for all customers.
5. Enter the name of the user group under "Short designation". In the "1. Information" and "2. Information" fields, you can enter comments.
6. To assign rights to the user group, click on the "Rights" drop-down list and select the relevant area.
7. Go to the "Master data 2" tab.
8. The "Simple" option allows you to use access levels to control a user's access rights for the corresponding customer's MEDIAS objects.
   - Under "Level 1" and "Level 2", click on to define two access levels that are linked to a particular condition using the "Access" drop-down list.
   - **Access equal to/greater than level 1:** This link allows the user to use all MEDIAS objects with an access level corresponding to at least "Level 1". For example, if "Level 1" has the value "50", all MEDIAS objects with the value "50", "60" or "100" can be used. MEDIAS objects with a value lower than "50", e.g. "35", cannot be used. In this case, "Level 2" is irrelevant.
   - **Access from level 1 to level 2:** This link allows the user to use all MEDIAS objects with access levels that lie within "Level 1" and "Level 2". For example, if "Level 1" has the value "50" and Level 2 has the value "100", the user can use all MEDIAS objects that have the value "50", "70" or "100". MEDIAS objects with a value outside of this range, e.g. "25" or "125", cannot be used.

- **Access level 1 and level 2:** This link allows the user to use all MEDIAS objects with access levels that have the exact value of "Level 1" or "Level 2". For example, if "Level 1" has the value "50" and "Level 2" has the value "100", the user can use all MEDIAS objects that have the value "50" or "100". MEDIAS objects with other values, e.g. "35", "55" or "150", cannot be used.

9. The "Extended" option allows you to define more complex rules for access to MEDIAS objects.
   - In the lower section, create and edit the rules using the expressions ">=", "<=" and "=". For example, this allows you to create rules that give a user access to levels 3, 5 and 7 but not to levels 4 and 6.
   - Select an access level by clicking on .
   - Click on to add a new rule.
   - Click on to edit a selected rule.
   - Click on to apply the changed rule.

Note: Note that you have to save the user group data first. You will be prompted to do this if necessary.

10. Click on **Save** to save your entries.


2.4.7 Modifying user rights

The rights selection field takes you to the window in which you can enable or disable authorizations for specific modules.



Rights selection field

All windows for modifying user rights have a similar structure. They have one or more tabs, on which the rights are listed.

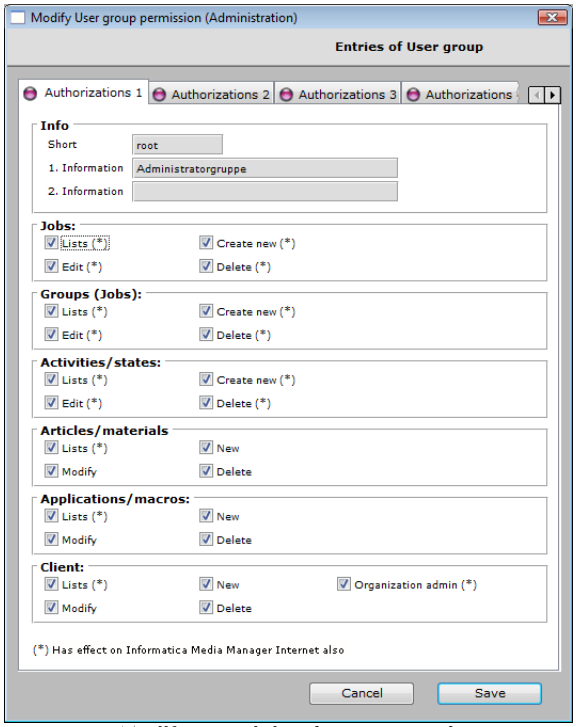

Modify user rights (management)

For a user to be able to use the Product 360 Media Manager Web front-end, he must have at least the following rights:

Window	Area	Rights
User rights (management)	Activities/statuses	Lists
	Customers	Lists
User rights (Medias)	MEDIAS components	Lists
	MEDIAS groups/classes/categories/data types	Lists
User rights (pipeline/workflow)	Pipelines/Products/Hotfolders and conversions	Lists


Note: You can specify a user as organization admin here. They have administrator rights for the assigned customer.

Caution: The user rights assigned have an impact on the screen display. To avoid unnecessary confusion for users, the associated fields in the dialog boxes are not displayed if the user does not have authorization for them.

2.4.8 Managing resources

Note: The "Create new resource" and "Modify resource" windows have the same content. The process is thus described using the example of creating a new resource.

1. Select **Personnel/Client > Resources/teams**.
   - The "Resource overview list" is used to manage the resources in Product 360 Media Manager. This window provides you with standard functions. The following functions are also available:
   - Clicking on Benutzer hinzufügen or Benutzer entfernen allows you to assign individual users to the resources or cancel the assignment. To view information about the users of a resource, click on Information (user).
   - Clicking on Kunden hinzufügen or Kunden entfernen allows you to assign individual customers to the resources or cancel the assignment. To view information about the customers for a resource, click on Information (customer).
   - You can also add a user to a resource as a member for a limited time: Vertretung. Membership then covers the period defined by your entries in the "From" and "To" fields.
2. Click on to create a new resource.
   - The "Create new resource" window opens.

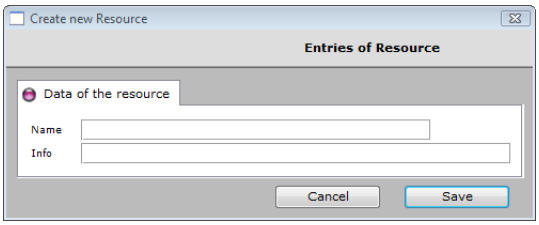

3. In the "Name" field, enter a designation for the resource.
4. In the "Info" field, enter a description of the resource.
5. Click on **Save** to save your entries.

2.5 Applications

Applications define programs that can be used to edit and complete individual components of a job in the Production module. Examples of applications include Adobe Photoshop, and Adobe InDesign. The use of applications is totally independent of Product 360 Media Manager. You can use any application in your system.


Note: The "Create new application" and "Modify application" windows have the same content. The process is thus described using the example of creating a new hotfolder.

1. Select **Main > Applications** to open the "Application overview list".

The "Application overview list" window opens. This is used to manage the applications in Product 360 Media Manager. The "*At Work*", "*No application*" and "*No MEDIAS*" applications listed are defaults, which are assigned to production components when they are added if they cannot be correctly assigned to a particular application. You cannot delete or change these two defaults. This window provides you with standard functions.

2. Click on to create a new application.

The "Create new application" window opens.

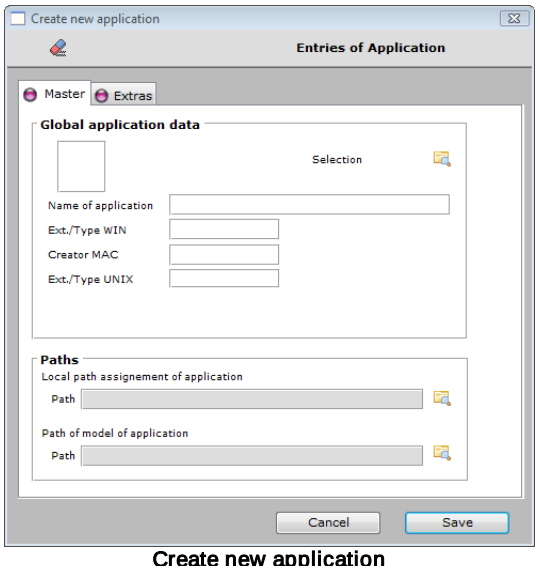

Create new application

3. In the "Global application data" area of the "Main" tab, enter the application information that is valid for all workstations.

- First, enter the "Name of application".
- In the "Ext./Type WIN" field, enter the Windows file extension.
- The "Creator MAC" field contains the MAC creator of the file type.
- In the "Ext./Type UNIX" field, enter the UNIX extension.
- Click on to search the file system for a file containing the icon for the application. This icon is then loaded into the field provided on the left of the screen.
  Alternatively, you can use the Copy & Paste function to copy any bitmap graphic into the field.

Note: Under Macintosh, you can obtain an icon for the application by selecting the application in the Finder and pressing `[Apple]+I` on your keyboard. In the window that opens, click on the application icon and press `[Apple]+C` on your keyboard to copy the icon to the clipboard. You can then paste the icon into the relevant field in Product 360 Media Manager by pressing `[Apple]+V`.

4. In the "Paths" area, enter the local application data, (i.e. the data that applies to the current workstation only).

- Click on to specify the local path to your application.

- Click on to select a sample file. This file is then used when the application is started, without the user having to open a file. This is important for creating new production components by adding a sample file.

Note: It is best to store the sample file on a volume that can be accessed by all users to enable file sharing.


5. You use the "Extras" tab to control what happens when a production component is called up when an application is already open. These settings only affect Windows systems.
6. Click on **Save** to save your entries.

2.6 Transfer media

In Product 360 Media Manager data carriers that do not have a permanent connection to the system, such as CD-ROMs, DVD-ROMs, USB sticks, removable drives or ZIP drives, and are used to exchange data with external locations are referred to as **transfer media.**

Note: The "Create new transfer medium" and "Modify transfer medium" windows have the same content. The process is thus described using the example of creating a new transfer media.

1. Select **Master > Transfer media**.
   - The "Transfer media overview list" window opens. It is used to manage the transfer media in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new transfer media.
   - The "Create new transfer medium" window opens.

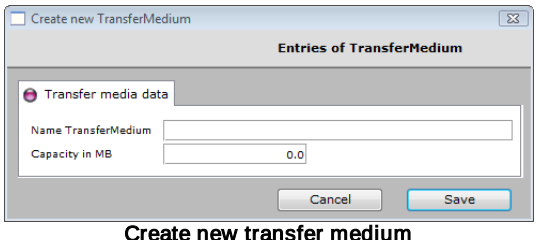

Create new transfer medium


3. In the "Transfer medium name" field, enter a name for the transfer medium.
4. In the "Capacity in MB" field you can enter the capacity of the transfer medium in MB.
5. Click on **Save** to save your entries.

2.7 Cost centers

Cost centers can be assigned activities and users. A cost center is used to regulate the activities available to a user. This means that in the Production module, a user will only see those activities assigned to him through the cost center. Thus, you can limit and control the activities available to a user.

Note: The "Create new cost center" and "Modify cost center" windows have the same content. The process is thus described using the example of creating a new cost center.

1. Select **Master > Cost centers**.
   - The "Cost center overview list" window opens. It is used to manage the cost centers in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new cost center.
   - The "Create new cost center" window opens.

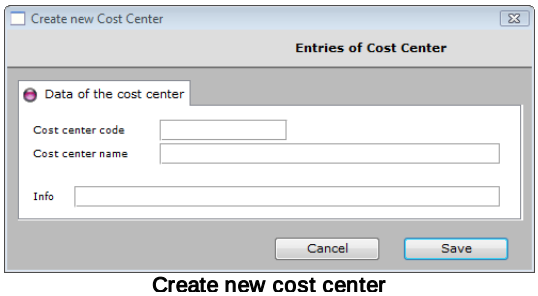


Create new cost center

3. In the "Cost center code" field, enter the code of your choice for the cost center.
4. In the "Cost center name" field, enter a name for the cost center.
5. In the "Info" field, you can enter additional information about the cost center.
6. Click on **Save** to save your entries.

2.8 Color codes

If you have defined color codes, you can assign them to individual steps using drag and drop in the dates overview in the Production module. The assigned color is then displayed in the dates overview and in the workflow for the production status of the relevant work step or activity. It is used as a color signal, for example to indicate that the status of a work step is critical.

1. Select **System > Color signs**.
   - The "Modify color ident" window opens.
2. Enter the name in the field provided to assign a designation to a color.

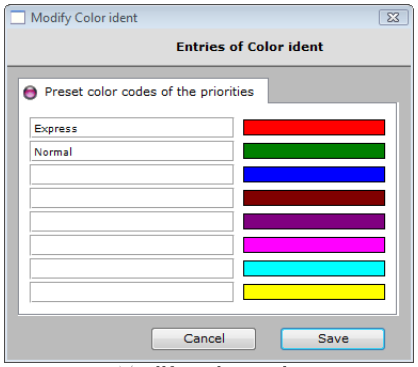


Modify color code

2.9 Icon identifiers

In Product 360 Media Manager you can maintain a set of defined icons that are used in specific situations, e.g. to indicate production statuses. You can define a maximum of ten icons.

1. Select **System > Symbol signs**.
   - The "Icon IDs" window opens.
2. To do this, drag the desired icon from the selection on the right-hand side to one of the ten placeholders on the left-hand side.

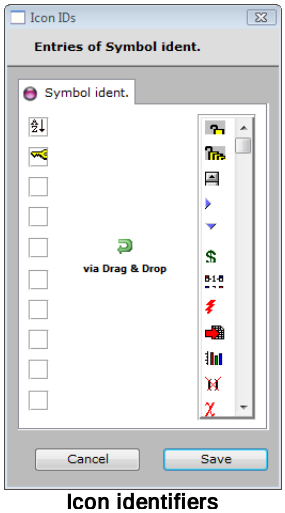


Icon identifiers

2.10 Manage languages

You can define additional languages for indexing in Product 360 Media Manager.

1. Select **System > Manage languages**.
   - The "Language overview list" window opens. This window provides you with standard functions.
2. Click on to create a new language.
   - The "Create new language" window opens.

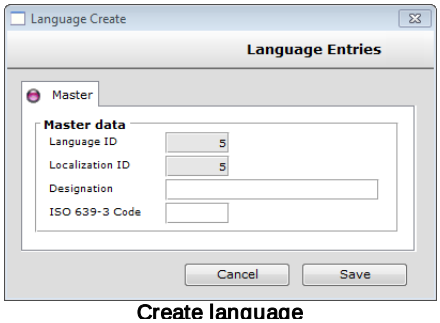


Create language

3. Enter a name.
4. Enter the name in lower case, as specified in ISO 639-3 (http://www.sil.org/iso639-3/codes.asp).
5. Click on **Save** to save your entries.

- A database language migration is carried out. The new language is added to the overview list.

The matrix is extended of the new language, according to the existing languages. You should now edit the name in the other languages used in your system by calling up the "Change language" window and make the corresponding settings.

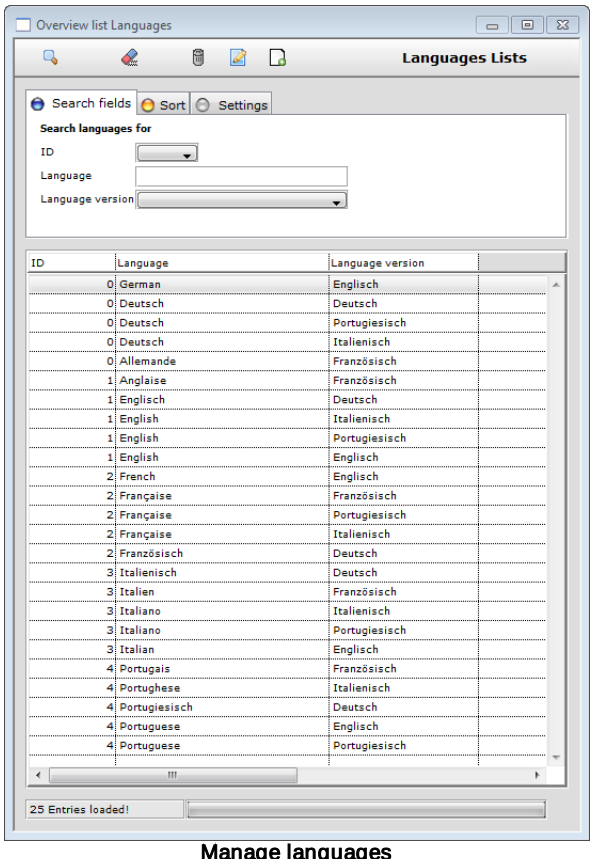


Manage languages

2.11 Forms

Forms enable you to save templates, which you can edit or complete when creating a new job or use later as job memos in the Production module. This allows you to store individual job forms for the Production module.

Note: The "Create new form" and "Modify form" windows have the same content. The process is thus described using the example of creating a new form.

1. Select **Master > Forms**.
   - The "Form overview list" window opens. It is used to manage the forms in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new form.
   - The "Create new form" window opens.

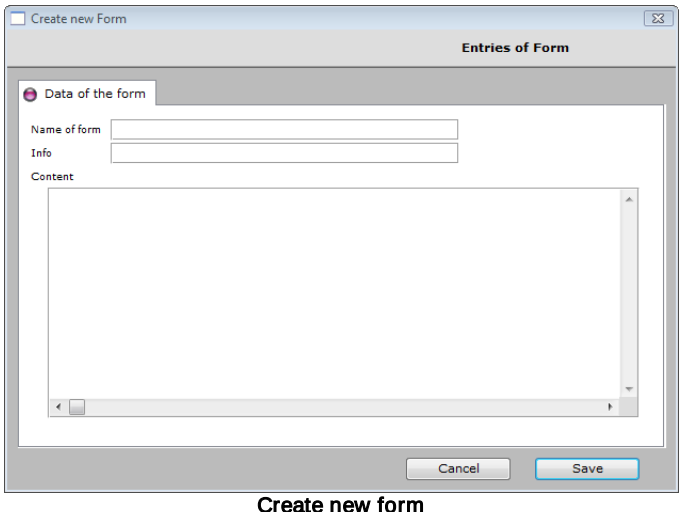

Create new form

3. In the "Name of form" field, enter a name of your choice for the form.
4. In the "Info" field, you can enter a short description of the form.
5. In the "Content" field, you enter the form itself.
6. Click on **Save** to save your entries.

2.12 Basic concepts of media production

Production using Product 360 Media Manager involves completion of job components, such as images, graphics or layouts. The role of the Product 360 Media Manager system in this area is to support production through data organization and to support the data lifecycle with the digital job bag.

Data organization refers to the structuring of data in such a way that it can easily be found, e.g. in named folders, and so that the assignment of the data is clearly visible, e.g. to a job.

The **data lifecycle** refers to the traceable lifecycle of job components and their individual statuses during production. Notifications may be triggered when these statuses change. An example of this is the lifecycle of an image, from when it is first scanned, through image retouching and, finally, incorporation into a layout. During these processes, that data lifecycle outlines who has worked on this component, when and for how long, the costs resulting from the individual activities and the production status the component had at any particular time.

Options for defining and assigning production statuses and for sending the related notifications by e-mail are essential for mapping a data lifecycle. Product 360 Media Manager provides these options and also allows notifications to be sent when critical statuses arise in the system, e.g. if costs, due dates or deadlines are exceeded or additional expenses are posted.

Note: You require a license for the Workflow Manager module to use the notification functions.

For example, you can select a user who is responsible for all jobs for all customers or only for individual customers or individual jobs. An e-mail can be sent automatically to the job representative when production times, deadlines or costs are exceeded or when other events occur.

If the production status of a job changes, an e-mail can also be sent to the assigned user with the relevant information. If you assign the user "Team Leader Repro" to the status "Job ready for repro", the Team Leader Repro will receive an e-mail notification each time a job is assigned this status. The necessary settings need to be made in the Administration module in the "Modify system data" window, and in the administration settings for customers, jobs and statuses.

The digital job bag contains all necessary tasks for the job itself and the data relating to the lifecycle of the job components.

Some technical administrative tasks are required to ensure that production is executed correctly. These include the configuration of activities, such as "Execute image retouching", with the corresponding hourly rates for calculating and billing for the production times and costs. In addition, you must create the production statuses, e.g. "Image retouching in progress" or "Image retouching finished", and the production materials assigned to the activity, i.e. consumables such as paper or ink, which are relevant to the data lifecycle. To edit the components of a job, you also need to define applications and macros.

Finally, the job and its assignment to a customer have to be created. The job contains the components to be completed, such as images graphics and layouts, as well as links to the Medias database. The production components are located in a structured form in the folder for the job and its job groups.

2.12.1 Activities

Activities define work operations during production. You can create them to meet your requirements and give them names, for example "Retouch image", "Create technical illustration" or "Edit video". An activity can be assigned one or more production statuses, for example "Color corrected" or "Image retouching finished".

Each activity can be assigned a material consumption for one or more materials, for example "Film material" or "Proof printer paper". The materials are managed in the same way as other master data. The material consumption can relate to the duration of the activity, e.g. 2 meters of material per hour of activity, it can be a constant quantity, e.g. 1 sheet of paper per "Print out preview" activity, or it can relate to the size of the production component to be edited, e.g. 2 cartridges of printer ink per 1 GB of data. Each production job can also be assigned additional material consumptions manually.


In general, activities do not have to be assigned materials. In addition, you can use the default "In progress" and "Finished" statuses generated when creating a new activity and you do not need to create alternative or additional production statuses. Production planning is becoming increasingly important and the options and features described here are intended to illustrate the capabilities of Product 360 Media Manager. You can integrate these functions gradually into your operational and production organization.

Note: You can attach a corresponding e-mail notification to these statuses. When a job reaches a defined status, the assigned user is sent an e-mail notification. You require a license for the Workflow Manager module to use e-mail notifications.

In Product 360 Media Manager the activity "*WORK STEP*" is preset with the Code "0" and cannot be deleted. The designation cannot be changed either. This work step can be used to define general statuses, which you can assign to a job group, a job in production or work steps from a work schedule. Statuses that are assigned to other activities can only be assigned to the individual job components in production.

Note: The "Create new activity" and "Modify activity" windows have the same content. The process is thus described using the example of creating a new activity.

1. Select **Master > Activities**.
   - The "Activity/status overview list" window opens. It is used to manage activities and statuses in Product 360 Media Manager. This window provides you with standard functions. The following functions are also available:
   - : Opens the "Job status overview list" in which you can define a status for the selected activity.
   - : Opens the "Material/activity assignment overview list", in which you can assign production materials to the selected activity.
2. Click on to create a new activity.
   - The "Create new activity" window opens.

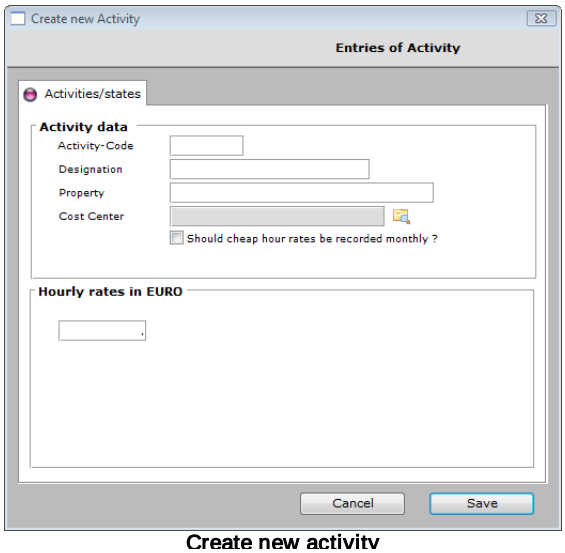

Create new activity

3. In the "Activity data" area, enter the master data for the activity.
   - Enter the "Activity code", the "Designation" and the "Property" for the activity.
   - Click on to assign the activity a cost center.
   - In addition, instead of a generally applicable hourly rate you can enter hourly rates valid for a particular month.

Note: Note that for hourly rates valid for a month, you also need to enter the year in which you want them to apply.

4. In the "Hourly rates in EURO" area, you enter the hourly rates for the activity, either general rates or valid for a particular month.
5. Click on **Save** to save your entries.

2.12.2 Production states

The production state classifies the state of a production component after completion of a particular activity. You can assign an activity to more than one production state, for example "Color corrected", "Final correction prepared" and "Color correction finished". However, at least one state must be assigned. When you create a new activity an "In progress" and "Finished" state are generated automatically. You can change these as required. The sequence of the production states associated with an activity can be identified using consecutive numbers. This indirectly stipulates to the user which work and production states a production component has to achieve and in what order to ensure correct and optimum production.

Note: The "Create new state" and "Modify state" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **Master > Activities**.
   - The "Activity/status overview list" window opens.
2. Click on to display the activities.


3.Select a data record.

4.Click on .

- The "Production status overview list" window opens. This is used to manage states and their sequence for activities in Product 360 Media Manager. This window provides you with standard functions.

5.Click on to create a new production status.

- The "Create new state" window opens.

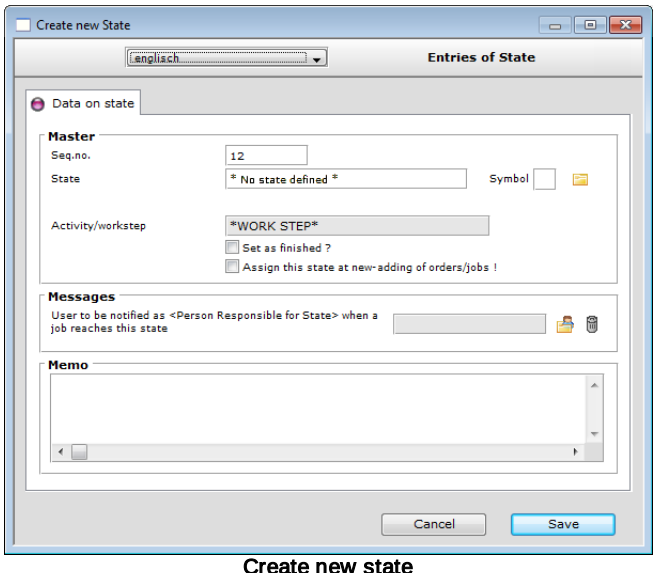

Create new state

6.In the "Master" area, you can enter the master data for the state.

- Under "Seq. no." enter the number you want the status to have in the sequence of states. If this number is already allocated to another status in the sequence, you can move this status back one number when you save the new status so that your new status is in the correct position.
- Under "State", enter an appropriate designation for the state.
- Clicking on allows you to assign an icon from your list of defined icon identifiers using drag and drop.
- Under "Activity/workstep", you will find the designation of the activity to which the status is assigned.
- Once the activity attains this status, it can be "Set as finished".

7.Under "Messages" you can assign a user to the state, who will then receive an e-mail notification when this state is attained.

8.Under "Memo", you can enter additional comments about the state. For example, you could enter tips and instructions explaining the state.

9.Click on **Save** to save your entries.


Note: You can attach a corresponding e-mail notification to these states. When a job reaches a defined state, the assigned user is sent an e-mail notification. You require a license for the Workflow Manager module to use e-mail notifications.

2.12.3 Materials

In Product 360 Media Manager materials are defined as the consumables required for production. Product 360 Media Manager can manage material stocks and the purchase and selling prices. Materials are assigned to activities and can be invoiced to a customer according to the associated costs.

Note: The "Create new article/material" and "Modify article/material" windows have the same content. The process is thus described using the example of creating a new material.

1. Select **Master > Materials/Articles**.
   - The "Material/Item overview list" window opens. It is used to manage materials in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new material.
   - The "Create new article/material" window opens.

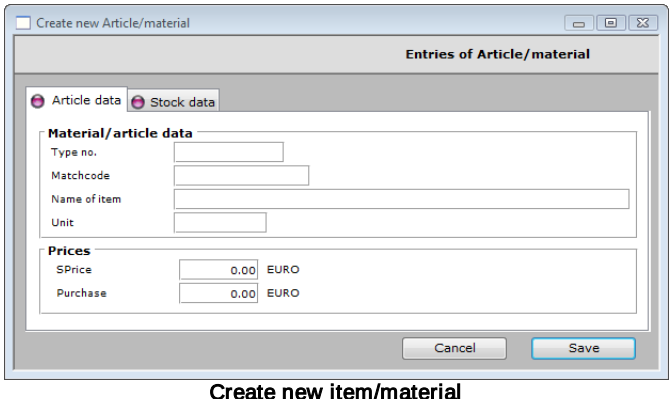


Create new item/material

3. In the "Material/article data" area on the "Article data" tab, enter the master data for the material.
   - First assign an type number.
   - You can specify the "Matchcode" of your choice but it must be unique. This matchcode is used, for example, for fast entry of frequently used materials.
   - The "Name of item" should give a concise description of the material.
   - The "Unit" in which the material is to be counted must also be specified (for example, "unit", "page" or "kilogram").
4. In the "Prices" area, enter the selling price and purchase price of the material.
5. Enter in the "Stock data" tab the stocks and limits for warehouse quantities.
6. Click on **Save** to save your entries.

2.12.4 Material/activity assignment

Note: The "Create new activity/material assignment" and "Modify activity/material assignment" windows have the same content. The process is thus described using the example of creating a new assignment.

1. Open the "Activity/status overview list". 50
2. Select a data record.
3. Click on .
   - The "Material/activity assignment overview list" window opens. It is used to manage activities 50 that are assigned materials 54 in Product 360 Media Manager. This window provides you with standard functions. 8
4. Click on to create a new assignment.
   - The "Create new activity/material assignment" window opens.

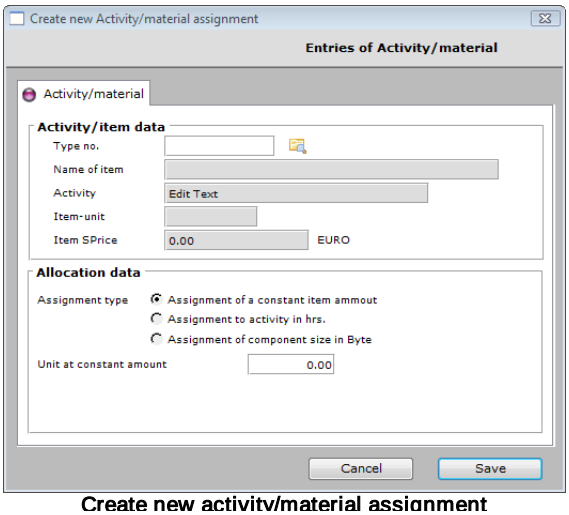

Create new activity/material assignment

5. The "Activity/item data" area is used to record the master data.
6. Under "Type no.", enter a valid item number or click on to choose an item from a list.
7. In the "Allocation data" area, you need to specify the costs caused by the item.
8. First select an "Assignment type".
9. Then enter the desired consumption in the corresponding input field.
10. Click on **Save** to save your entries.

2.13 Jobs

Production jobs form the basis for production using the Production 111 module. Each production job is uniquely assigned to a customer 27 and consists of both technical production data (such as customer specifications 32 and deadlines) and the production components to be edited and created.


Note: The "Create new job" and "Modify job" windows have the same content. The process is thus described using the example of creating a new job.

1.Select **Master > Jobs**.

➪The "Job overview list" window opens. This is used to manage jobs in Product 360 Media Manager. This window provides you with standard functions.

2.Click on to create a new job.

➪ The "Create new job" window opens.

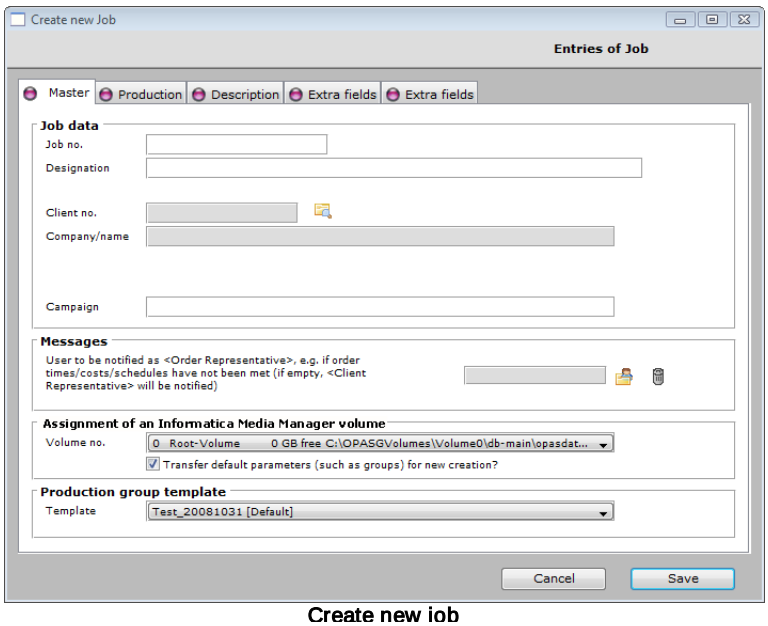

Create new job

3.In the "Job data" area of the "Master" tab, enter the master data for the job.

- First assign a job number.
- The "Designation" is freely selectable.
- Click on to select the customer for which the job is produced. The customer name is automatically added to the "Company/Name" field.

Note: The customer number must never be blank because a job must always be assigned to a customer.

4.You can also specify a "Campaign" to which the job is assigned.

5.Under "Messages", you can define a person responsible for the job, who is to be informed if the status of the job becomes critical.

- Click on to assign a user as the person responsible for the job.
- Click on to cancel the assignment.

6.Under "Product 360 Media Manager volume assignment" define the volume on which the job data will be saved.

- Select the relevant volume from the "Volume no." drop-down list. The list also provides information about how much memory (in gigabytes) is available on the various volumes.
- If you wish, you can enable the "Transfer default parameters (such as groups) for new creation" option.

7. In the"Production group template" area, select a template for the job groups to specify a default structure for the organization of production components. The templates for the job groups are created using **System > Production group templates**.
8. Go to the "Production" tab.
   - In the "Production data" area, you schedule the job. To do this, specify when production is to start and end.

Tip: Specifying the completion date is optional. However, this information is useful for final costing.

   - You can also specify whether the job is "In progress" or "Finished".
   - Under "Times/Costs" you can define the times and costs used to cost the job.

Note: The target values are optional entries. However, the "Finished in %" value is calculated from the target and actual values. This enables better monitoring of whether the job is progressing as planned.

   - In the "Production status" area, you can assign a "monitoring activity" and a "status" to the job.
9. Go to the "Description" tab.
   - In the "Description/Info" area, you can enter a text describing the job.
   - Click on to select a prepared form for the text.
   - Click on to copy the text you have entered to the clipboard. You can then copy the text from the clipboard, into e-mail or text documents, for example.
10. Go to the "Additional fields" tab. In the "Additional fields" area, you can enter additional information about the job in the fields provided. The additional fields are user-defined fields, which are defined using **System > User-defined fields**.
11. Click on **Save** to save your entries.

2.14 Creating a resubmission for a job

You can create a resubmission for a job. You can manage resubmissions in the Info Center.

1. Select **Master > Jobs**.
   - The "Job overview list" window opens.
2. In the pop-up menu for the relevant job, select **Create resubmission**.
   - The "Create my resubmission" window opens.
3. Enter a priority and a date for the resubmission.
4. If necessary, add a memo.
5. Click on **Save**.
   - The resubmission is created and can be viewed in the Info Center.

2.15 Job groups

Job groups are used to divide jobs into various areas. The job groups are used exclusively for organizing production components. For example, you can create groups within a job for the various pages in a catalog or for different types of source files, such as graphics, texts and layouts.


The status is the most important characteristic of the job groups. The status provides you with information about the current state of a production component, group or job. The status can only be changed in the Production and Archive modules.

The status can have one of three possible values:

- "-" indicates that the job, group or production component can be processed.
- "s" indicates that the job, group or production component is locked.
- "a" indicates that the job, group or production component is archived.

Note: The "Create new job group" and "Modify job group" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **Master > Job groups**.
   - The "Job group overview list" window opens. This is used to manage job groups in Product 360 Media Manager. This window provides you with standard functions.
2. Click on to create a new job group.
   - The "Create new job group" window opens.

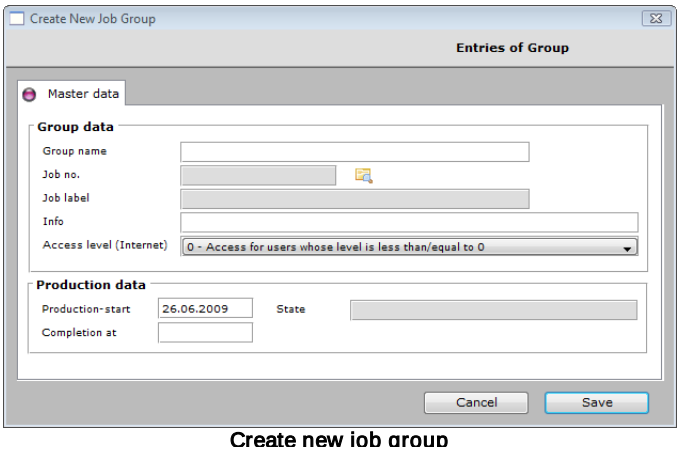

Create new job group

3. In the "Group data" area, you can enter the master data for the job group.
   - Under "Group name", you must enter a short description of the job group, e.g. "Images" or "Drawings".
   - Click on to assign the job group to a job.
   - In the "Info" field, enter a more detailed description of the job group than that in the "Group name" field.

- The "Access level (Internet)" list allows you to regulate access to the job group in the Product 360 Media Manager Web application. For example, if you select the value "2 - Access for users whose level is less than/equal to 2", users at level "0", "1" or "2" can access this job group, while users at levels "3" and "4" cannot access the job group.

4. If you have selected a valid job in the "Job no." field in the "Group data" area, additional data about the job is displayed in the "Production data" area.
5. Click on **Save** to save your entries.

Creating a resubmission for a job group


1. Select **Master > Job groups**.
   - The "Job group overview list" window opens.
2. Open the pop-up menu for a data record.
3. Select the "Create resubmission" option to add the job group to your resubmissions in the Info Center 60.

2.16 Production group templates

Production group templates are used as templates for the structure of a job 55 when it is initially created.

Note: The "Create new production group template" and "Modify production group template" windows have the same content. The process is thus described using the example of creating a new customer.


1. Select **System > Production group templates**.
   - The "Production group template overview list" window opens.

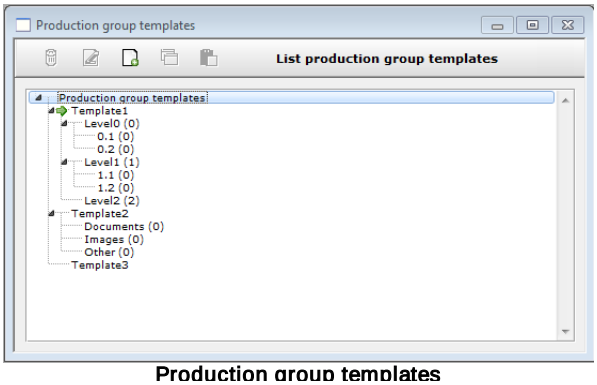

Production group templates

All available production group templates are displayed in a hierarchical tree view. The number in brackets represents the access level in the Web application. This window provides you with standard functions 8.

2. Click on to create a new production group template.
   - The "Create new production group template" window opens.

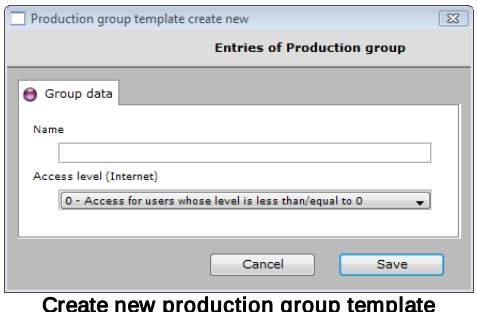

Create new production group template

3. Enter a name.
4. Define the access level. This option is only available for subgroups.
5. Click on **Save** to save your entries.

You can create several product group templates but one template must be defined as the default.


2.17 Info Center

The Info Center in Product 360 Media Manager informs you of news and events. It lists all the job components, job groups, jobs, MEDIAS objects, MEDIAS groups and products that you have selected for resubmission. The Info Center also shows a user's most recently used objects.

The Info Center contains a task list and displays messages from Internet discussion forums. You can also read your e-mails from Product 360 Media Manager in the Info Center.

Note: To use "MyMessages" and "MyTasks" you require a license for the Workflow Manager module. To use "MyFollowUp" and "MyHistory" you require a license for the Medias or Production modules. To use "MyComments" you require a license for the Internet Administration Console module.

1. Select **Master > Info Center**.
   - The "Info Center" window opens. This window provides you with standard functions. Additional functions are available depending on what you select in the left navigation bar.

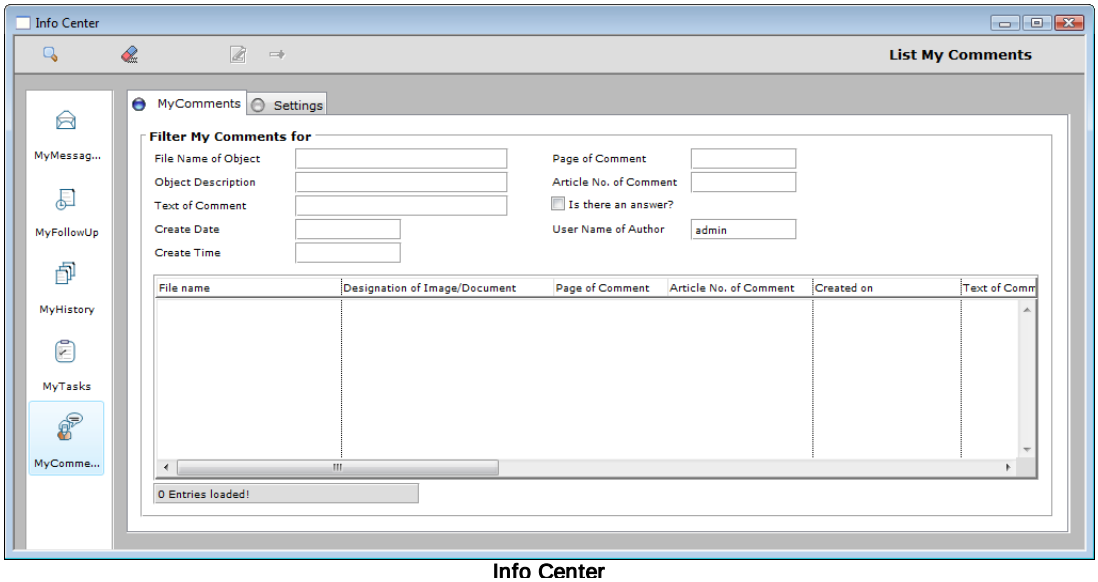

Info Center


Note: To view the Info Center automatically each time you launch Product 360 Media Manager, select "Open Info Center after login when launching Product 360 Media Manager?" on the "Settings" tab.

2. Select **MyMessages** to display your personal messages.
3. Select **MyFollowUp** to display your personal resubmissions.
   - To edit a selected entry, click on .
     - The "Modify MyFollowUp" window opens.
   - In the "Master data" area, you can edit the parameters for your follow-up:
     a. Set the priority using a value from A to Z.
     b. Enter important information in the "Memo" field.
     c. Enable "Completed" if your resubmission is complete.
     d. Click on to provide the resubmission to another user.
     e. The "Additional information" area describes the object that is the subject of the resubmission.
   - Provided you are in the Administration or Production module, you open a selected object by clicking on .
   - If you have selected an entry of "Job" type and you are in the Production module, you can open the corresponding job bag by clicking on .
4. Select **MyHistory** to display objects you have recently used.
   - Provided you are in an appropriate module, you open a selected object by clicking on .
   - If you have selected an entry of "Job" type and you are in the Production module, you can open the corresponding job bag by clicking on .
5. Select **MyTasks** to display the tasks that have been assigned to you.
   - Provided you are in an appropriate module, you open a selected object by clicking on .
   - If you have selected an entry of "Job" type and you are in the Production module, you can open the corresponding job bag by clicking on .
   - : Opens the flowchart for the workflow, provided you have the appropriate authorization.
   - : Sets the status of the task to "Completed".
   - : Sets the status of the task to "Skipped/Refused".
   - : Sets the status of the task to "In progress".
6. Select **MyComments** to display discussion postings you have made.
   - Provided you are in an appropriate module, you open a selected object by clicking on .
   - If you have selected an entry of "Job" type and you are in the Production module, you can open the corresponding job bag by clicking on .

2.18 Monitoring automatic modules


In the Administration module, you can monitor the status of modules running in automatic mode. This is done using the "Module status" overview.

1. Select **System > Module status**.
   - The "Module status" window opens. This involves querying the status of the individual modules, which means that the operation can take some time. On the "Summary" tab, you will see the status of the individual modules in the Product 360 Media Manager system.

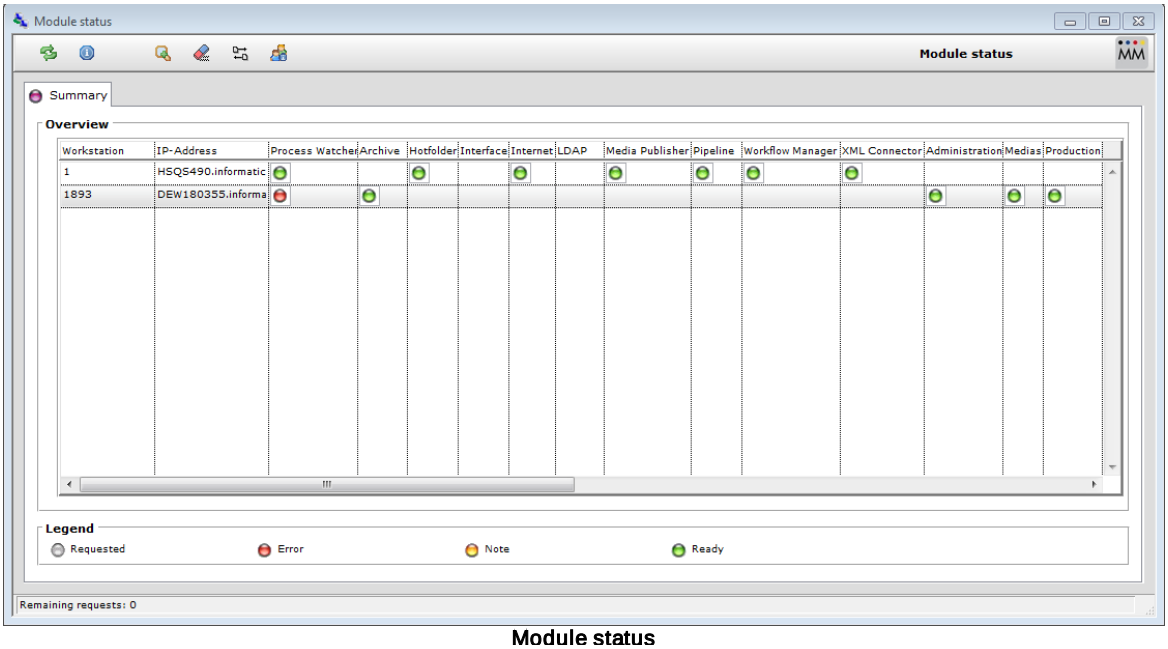

Module status

2. Select the entry for a workstation.
3. Click on .
   - The "Station <No.> module status" window opens.

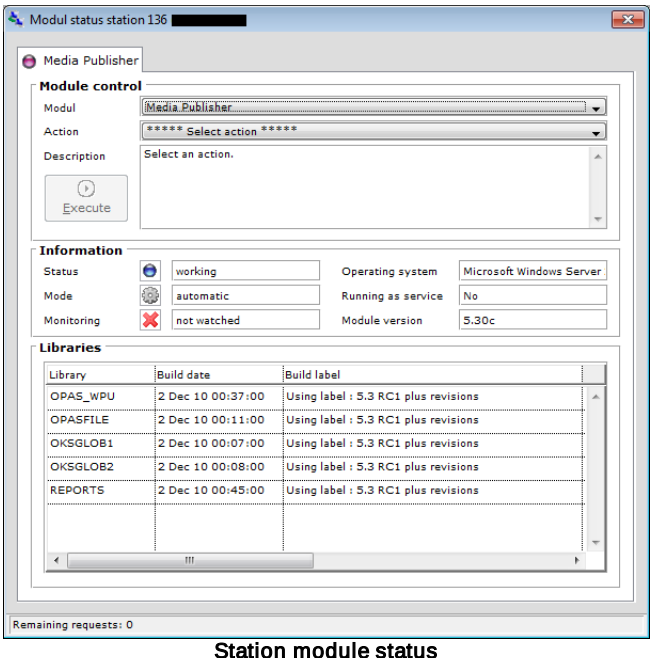


Station module status

4. Select the relevant module in the "Module monitoring" section, e.g. Process Watcher.
   - The "Information" section at the bottom displays the information for the selected module.
5. In the "Action" list box, select the "Configure module" option.
6. Click on **Execute**.
   - The dialog box for the module settings opens.
7. Change the settings for the module.
8. Click on **Save**.

2.19 Viewing logged in users


In the Administration module you can display all users who are logged in on a workstation. This is done using the "Module status" overview.

1. Select **System > Automatic module status**.
   - The "Module status" window opens. This involves querying the status of the individual modules, which means that the operation can take some time. On the "Summary" tab, you will see the status of the individual modules in the Product 360 Media Manager system.

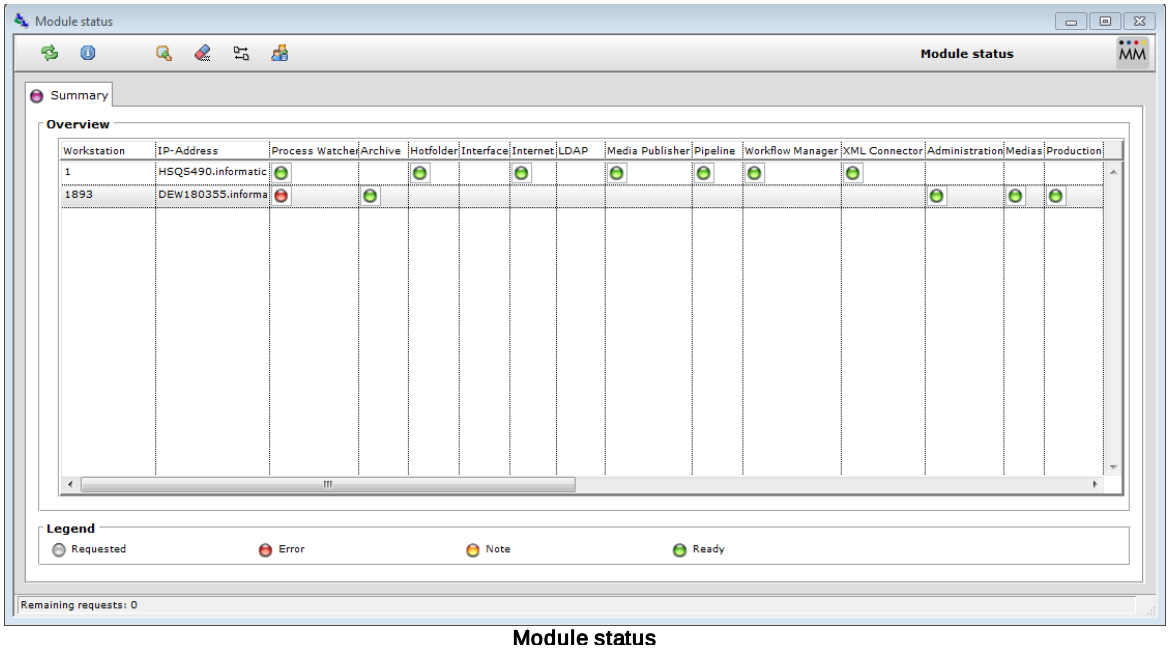

Module status

2. Select the entry for a workstation.
3. Click on .
   - The "Logged in users" window opens.

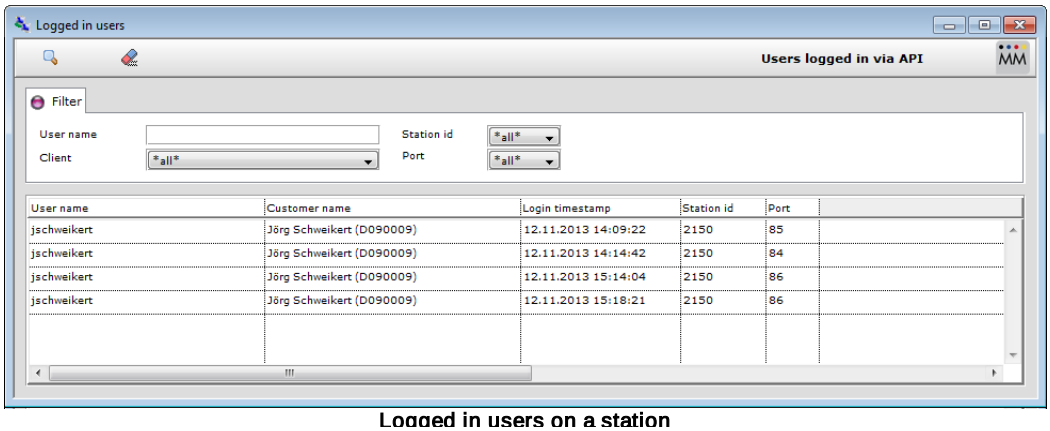

Logged in users on a station

4. You can compile an individually filtered display here.

2.20 Statistics

You can use the statistics to evaluate the production costs. The production costs are calculated from the production times and the production materials. The **production times** are the individual processing times for the production components of a job. During processing in production, all accrued product data is automatically recorded, e.g. how an activity with a particular hourly rate has been carried out on a component. The **production materials** represent the consumable materials used in production. The material consumption can be recorded directly during processing by an activity or manually.


The statistics also allow you to evaluate the jobs themselves, i.e. compare actual data (times and costs) with target data. When analyzing the jobs, you can analyze finished and unfinished jobs in respect of their target and actual data (times and costs).

2.20.1 Evaluating production costs

Production times

You can call up the production times for a particular job or for all jobs. This section describes how to open the production times for a single job.


1. Select **Statistics > Production times analysis > Production times of jobs**.
   - The "Select a job for production times..." window opens.
2. Click on .
3. Double-click on the desired job.
   - The "Statistics of accrued production times" window opens. This window provides you with standard functions. The following functions are also available:
   - : Saves the data in a format that can be read by Excel, i.e. the fields are separated by tabs.
4. Click on to display the production times.
   - The production times are displayed. The top section of the window shows the net total of accrued costs and the total hours. The individual lines can be differentiated by Normal and Extra costs. This selection is specified by the employee when entering the costs.

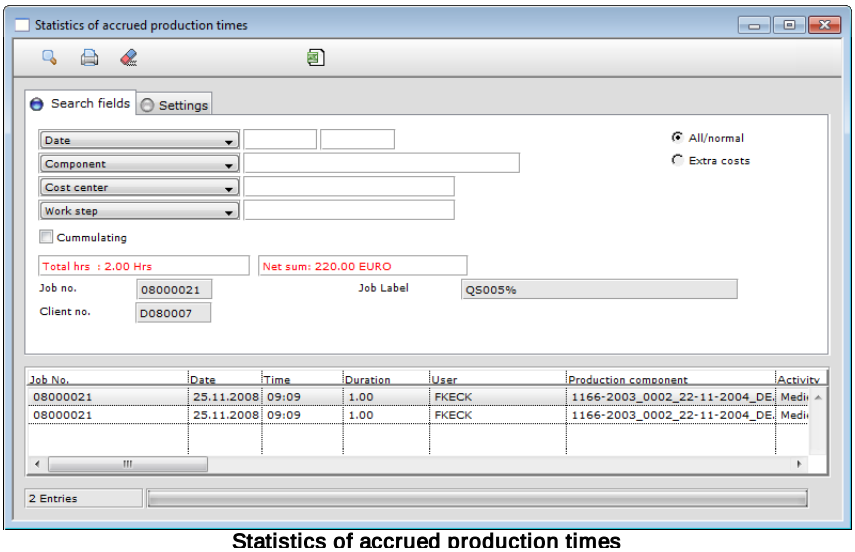

Statistics of accrued production times

Production materials

1. Select **Statistics > Production materials analysis**.
   - The "Select a job for production materials..." window opens.
2. Click on .
3. Double-click on the desired job.
   - The "Statistics of accrued production materials" window opens. This window provides you with standard functions.
4. Click on to display the production times.
   - The production materials are displayed. The top section of the window shows the net total of accrued costs of the lines found.

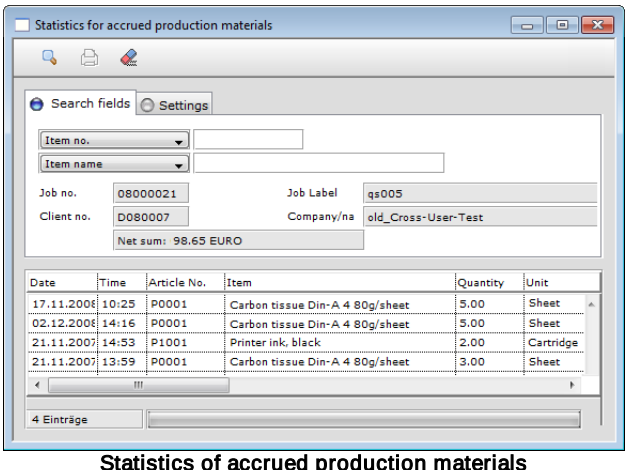


Statistics of accrued production materials

2.20.2 Evaluating job costs

Analysis of jobs

1. Select **Statistics > Analysis jobs**.
   - The "Analysis of jobs" window opens.
2. Select either the "Finished?" or "Not finished?" checkbox to display finished or unfinished jobs.
3. Also select the "Status analysis" checkbox to evaluate the times and costs for the job.
4. Click on .
   - The jobs are displayed.

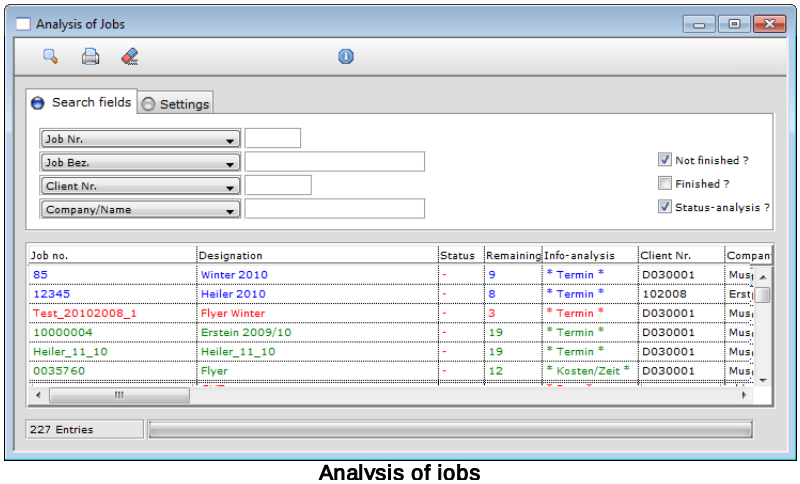

Analysis of jobs

The "Remaining days" column shows the remaining time before the completion date. The "Info analysis" column shows codes for the status of the jobs:


- *Date*: The completion date of the job will soon be reached
- *Costs*: The actual costs exceed the target costs of the job
- *Time*: The actual times exceed the target times for the job

Evaluation of direct client costs

Direct client costs refer to the times and costs that a remote user in the Product 360 Media Manager system causes. How long a user was logged in for and how many times he performed a search, i.e. how many times he clicked on in the Medias module, are logged. The volume of data (in MB) is also logged, e.g. downloaded from the Internet, etc.

1. Select **Statistics > Analysis of direct client costs**.
   - The "Direct client cost overview list" window opens. This window provides you with standard functions. The following functions are also available:
   - : Saves the data in a format that can be read by Excel, i.e. the fields are separated by tabs.
   - : Sets the "Billed" flag
2. Click on .
   - The client costs are displayed.
   - The "View" drop-down list can be used to switch between the different views of the list.

- The "Rating of time" drop-down list can be used to specify how time is grouped.
- Selecting the "Show only connected?" option shows you who is currently logged in.
- The "Costs" drop-down list can be used to display client costs already billed.
- You can delete a line in the overview of direct client costs ("Normal" view) by clicking on .

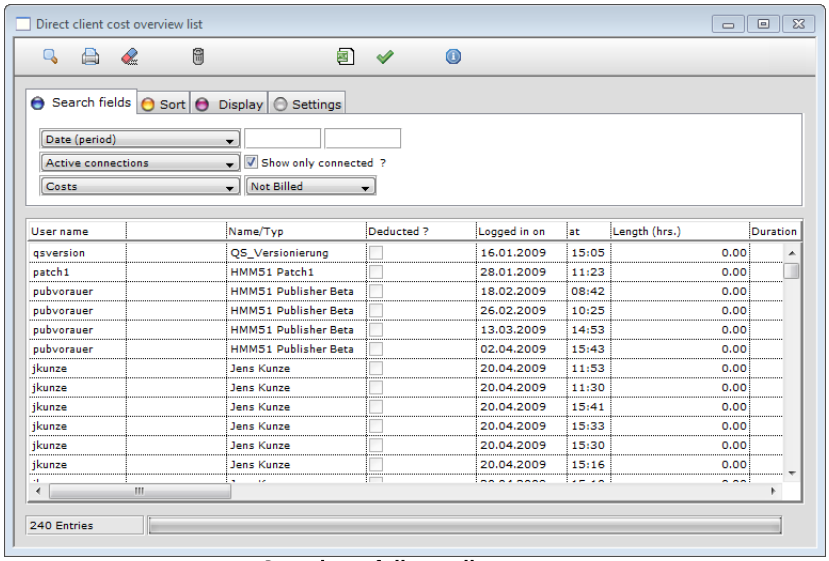


Overview of direct client costs

Evaluation of media purchase orders

As with the evaluation of direct client costs, you can view the media purchase orders:

1. Select **Statistics > Check media orders**.
   - The "Statistics of media orders" window opens. This window provides you with standard functions. The following functions are also available:
   - : Saves the data in a format that can be read by Excel, i.e. the fields are separated by tabs.
   - : Changes the status of the selected MEDIAS objects
   - : Displays a preview
2. Click on .
   - The media purchase orders and direct downloads are displayed.

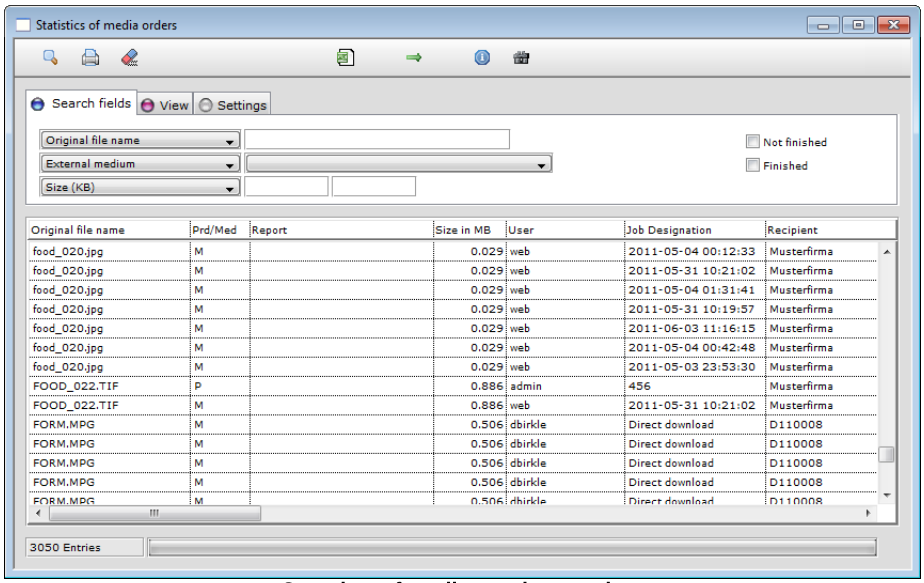

Overview of media purchase orders

2.21 Service

Caution: The Service module is designed for administrators and experienced users. End users should only use the module after consultation with their administrator. Improper handling can cause damage to the data and result in data losses.

The Service module checks production jobs and MEDIAS data for completeness. In other words, it checks whether all components of a job have been added to the database. If a file exists in the job folder but has not been added to the database, the file is added automatically. At the same time, the Service module performs certain service tasks, e.g. emptying the customer's ISDN export folder and transferring the job components marked for addition to MEDIAS to the MEDIAS database. Checks can be triggered manually or automatically at particular times.

Note: To use this module, you must log into your Unix or NT file server as a user with permission to copy files in all jobs.

The following logs are currently kept (<File> stands for the current file name Year+Month+Day):

File name	Log
<file>.prt	Log of path references
<file>.chk	Log of checks on the jobs, containing only entries for problems encountered during the check
<file>.med	Log of checks on the Medias area, containing only entries for problems encountered during the check
<file>.w??	Log of problems during processing of service jobs, containing only entries for errors during processing ?? indicates the type of processing 1 = Addition of selected job components to Medias

File name	Log
	2 = Deletion of superfluous ISDN EXPORT folders

You can list the current logs under **Logs**.

Tip: The log with the extension `.prt` is important, for example where the path is determined depending on the customer and job number. This can be necessary, for example in an emergency caused by a database server hardware failure if you need to know where a job is physically located on which volume or disk.

The following entries are possible:

- Time for automatic checking of production jobs (consistency check)
- Your password for the service module (default: oks)
- Path at which the log files written will be stored
- Checks to allow
- Option of keeping a log for the checks (consistency checks)
- Option of automatically adding files that are not contained in the production database
- Option of logging the paths for customers and jobs in the consistency check
- Option of including finished jobs in the consistency check
- Reorganization of job statistics
- Checking the MEDIAS area
- Processing service tasks
- Option of automatically adding job components to Medias as a copy or link for locked and finished jobs
- Option of automatically deleting files in the ISDN EXPORT folders after a set number of days after processing

2.22 Process Watcher

Caution: The **Process Watcher** module is designed for administrators and experienced users. End users should only use the module after consultation with their administrator. Improper handling can cause damage to the data stock and result in data losses.

The Process Watcher module is used to monitor modules in automatic mode. In case of problems, the Process Watcher module restarts those modules if required. Use of this module is described using the example of the Hotfolder module.

Caution: The Process Watcher module can be used exclusively as a client module. It must be set up on the station on which the automatic module to be monitored is running.


The following modules can be monitored:

- Pipeline 156
- Hotfolder 168
- Internet Administration Console
- Interface 223
- Media Publisher 143
- XML Connector 213
- Workflow Manager 176

2.22.1 Settings

When you start the Process Watcher module, it immediately goes into automatic mode. In order to make the required settings, you must first exit automatic mode and close the "Automatic mode" window.

1. To exit automatic mode, click on **Stop** and then on **Close**.
2. To specify which modules you want to be monitored on the local station, select **Process watcher > Process watcher settings**.
   - The "Process monitoring" window opens.

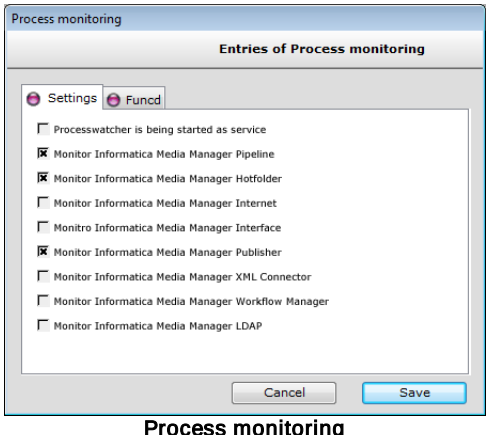

Process monitoring

3. On the "Settings" tab, specify whether the Process Watcher is to be started as a service. Further information can be found in the **Product 360 Media Manager installation manual.**
4. Select which module you want to monitor.
5. On the "Funcd" tab, specify whether you also want this to be monitored.
6. Click on **Save** to save your settings.
7. Start automatic mode by selecting **Process watcher > Automatic mode according to default settings**.


2.22.2 Application example

1. The Hotfolder module can be running for a long time, unnoticed by the user. For safety, you connect the Process Watcher module to monitor it.

- If there is a system-related failure of the Hotfolder module, the Process Watcher module restarts it.
- This configuration enables you to set up the Hotfolder module in such a way that the module closes itself, e.g. after adding 1000 files. When monitored by the Process Watcher module, the module will then be restarted automatically.
- To do this, open the default settings for the Hotfolder module and set the number of processing entries to 1000.

2. If you also want the Process Watcher module to monitor the Internet Administration Console module, select **Process watcher > Process watcher default settings**.

   ⇨ The "Entries of process monitoring" window opens.

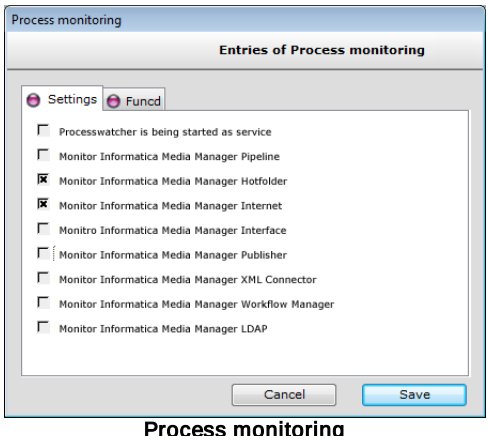

Process monitoring

3. Activate monitoring.

Note: As the Process Watcher and Internet Administration Console modules have to be running on the same client, the IP address is fixed.

3 Medias

Medias refers to both the content and media database integrated into Product 360 Media Manager and the Medias module, which represents the primary user interface for the media database.

The Medias content and media database is used for customer-based management of MEDIAS objects.

Database-supported indexing of MEDIAS objects prevents the same object from being saved several times and also makes it much easier to search, assign and provide the data. Property fields, classes and hierarchical groups allow you to structure the MEDIAS objects in the database.

Customers and employees can also store their MEDIAS objects in user-defined folder structures. When adding objects to the content and media database, you can transfer the designations of the folders to the indexing. In addition, automatic indexing of MEDIAS objects using ASCII files makes it easy to update the data stock.

Note: Provided you have a license for the XML Connector module, you can also use this module to perform automatic indexing. In contrast to indexing using ASCII files, group assignments are possible in this case.

Comprehensive search functions make it easier to find the MEDIAS objects.

The MEDIAS objects in Product 360 Media Manager are managed based on customers. Each customer has their own area on the file server and in the database, known as the customer area. All objects are stored and managed in the customer areas.

Note: You can also simultaneously execute queries across all customer areas for searching and research purposes.

Note: The Medias module provides you with access to the Info Center.

Note: To manage print templates, call up the Report overview list by selecting **Master > Manage reports**.

Caution: The screen display varies depending on the assigned user rights. To avoid unnecessary confusion for users, the associated fields in the dialog boxes are not displayed if the user does not have authorization for them.

3.1 MEDIAS objects

Adding files to the content and media database also involves structuring and indexing of the files. This converts them into MEDIAS objects.

Medias differentiates between the following types of MEDIAS objects:

- Documents

- Images
- Videos
- Sounds
- Fonts
- Internet objects
- Color profiles
- Graphics and drawings
- General objects

Tip: You can hold data for a customer, e.g. image data, in the content and media database for recurring advertising campaigns and then use it in production.

To produce jobs using Product 360 Media Manager you must have a license for the Production module.


3.1.1 Indexing

The content and media database stores technical information, the storage location and a preview of the MEDIAS objects and also contains property fields and data about the group in which the MEDIAS object is located.

Each MEDIAS object has up to 110 property fields: A property field can be a figure, a price, a text or a list of possible values. You can specify whether completing a property field is optional or mandatory. The property fields are used to assign meta data to the MEDIAS objects. This makes it much easier to search for these objects. You can flexibly adapt property fields to different conditions. For example, you can agree with one customer that the first property field will contain the product description, while for another customer it is used for the item number.

As the conventional property fields limit the maximum input to 3000 characters, depending on the selected type, additional fields have been added. These can be found at positions #101 to #110. Here, you can choose between the field types "General" with the familiar restriction, or "Long text", which does not have any limit on the number of characters. These fields can be used for both the automatic indexing service and the ASCII export. When searching for MEDIAS objects, they can only be used with the "contains" operator.

After selecting a customer, you can specify the indexing of MEDIAS objects for that customer in the MEDIAS content system under **Structures > Default structure of customer's media objects**.

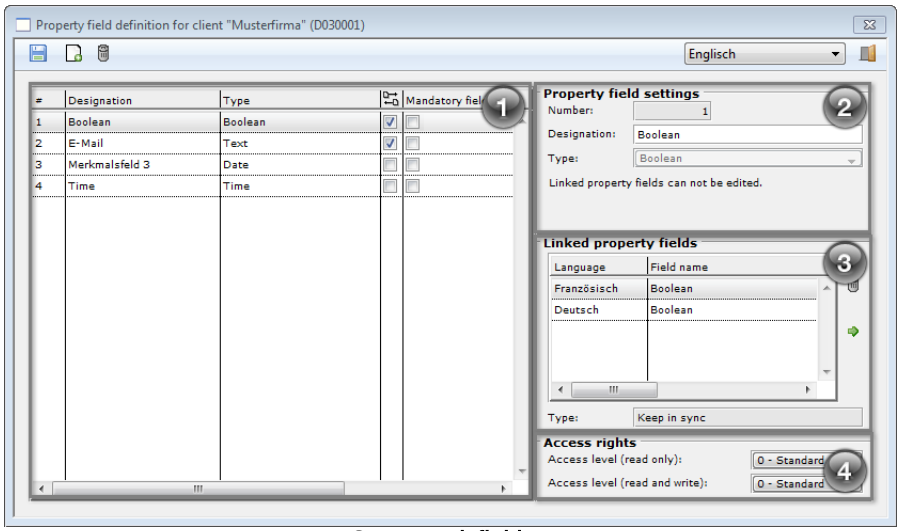

Structure definition

1	The overview list is a table that shows all available property fields for each language. Here, you can delete existing property fields (), create new ones (), save changes ( ) and define fields as mandatory fields. You can also see whether fields are linked to one another (). To edit these fields, the link must be cancelled.	
2	**Property field properties** Here, you can define which property fields are optional and which are mandatory. You can also specify whether you want fields to be excluded from the search, to reduce the scope of the search. The property fields can be configured as follows:	
	Number:	The number is assigned when creating a new property field and cannot subsequently be edited.
	Name:	Enter a descriptive text.
	Type:	• **Selection list:** You have the option of creating a selection list for a text field and giving it a name. The specified values are then available for indexing. • **Boolean:** A property field can contain the logical values "True" or "False". • **Date:** You can enter a date for a property field. • **Decimal number:** You can use a property field to enter a decimal number. The decimal number may not have more than eight places before the decimal point and two places after it. • **Integer:** You can enter a whole number of any size in a property field. • **Multiple selection list:** You can assign a property field a multiple selection list and give it a name. The values specified in the selection list are then available for indexing.

		• **Text:** Text fields can contain any text. You define the maximum length of the text entered yourself. On the system side, the maximum is 3000 characters ("General"), but it can also be unlimited ("Long text") using property fields #101 to #110. You can also use regular expressions (🔧) to specify that the entry in the field must follow certain rules, e.g. an e-mail address must contain the @ character. When you select an existing rule, you can check it using a test character string. The positive or negative result is indicated by a symbol (✔/✖). • **Time:** You can enter a time for a property field. • **Invisible:** The property field is not displayed.
3	**Linked property fields:**	For property fields of ***Text*** type that apply to a region with the same language (e.g., Germany, Switzerland, Austria), linking makes sense. For properties that are checked for "true" or "false", the language is not important for the link. You can use the ***Keep synchronous*** type to ensure that changes to a property are applied in all linked languages.
4	**Access rights:**	Assign optional access levels for read only and for read and write access.

Note: Most property fields are checked for syntax with regular expressions or assigned formats (date, time, etc.) when entered in the corresponding dialog boxes. Some field entries are automatically corrected (date, time, number formats) while others generate an error message.

If you select **Structures > Structure of selected group** the Product 360 Media Manager product information system ensures that all meta data for groups, products and media with different characteristics in terms of data typing and inheritance will be stored in a structured way. Thus, mapping of all necessary product structures is guaranteed without restricting further classification of the same data for other areas, e.g. advertising and marketing. The synergies between this module and the Content & Media Asset Management module provides a basis for creating a user-friendly marketing and product information system.

Note: To use the functionality described you require a license for the Product Information module.

3.1.2 Previews of MEDIAS objects

When you add an image file to the database, previews of the image file are generated. Previews are used to view and conveniently select MEDIAS objects. Previews at three resolutions are calculated for each image file:

- 25 x 25 pixels: A small icon
- 110 x 110 pixels: Preview for the Tablet view
- Preview for the detail view, with a maximum size set using the system parameters

Note: You can only generate previews if you have a license for the Pipeline module.

In addition to previews, proxy objects can also be generated. These are a kind of preview for different file types, e.g., PDF documents, sound or video files.

Previews have different statuses and are assigned a corresponding flag. This enables you to search selectively for them. Use "Search for MEDIAS object" function to do this.

Note: The prerequisite for using the advanced search option is creation of a system-based workflow that assigns the objects this preview status.



Search by preview status

You can select particular objects in the search results and thus carry out a selective update. If no objects are selected, all objects found are retrieved for editing. If there are more than 100 objects, a precautionary dialog box is displayed, in which you confirm the operation. To re-import, select **Edit > Re-import selected objects**.

Note: The "Re-import selected objects" function is only active if the user has the rights to edit images.

3.1.3 Linked MEDIAS objects

If you are using the Production module, you can transfer individual files or all files for a job to Medias. Depending on the configuration of the system parameters, the production components are either left at their original storage location and recorded in the database as a link, or they are copied from their original storage location to the relevant customer area and added to the database as conventional MEDIAS objects.

Tip: If you want to use a particular manufacturer's logo frequently, add the corresponding object from the database to a job bag as a link. This means that if the logo changes, you do not have to update it manually in all jobs.

3.1.4 Structuring MEDIAS objects

To classify the MEDIAS objects in defined sets more effectively and to make it easier to search for MEDIAS objects, they are structured. In other words, they are stored in the database in categories, classes and hierarchical groups. In addition, they are differentiated by file types. This structuring method performs the following functions:

1. **Categories** are customer specific, unlike classes. Each customer has their own categories, in which their MEDIAS objects are classified. Categories correspond to the subdirectories in the relevant customer area on the file server.
2. **Classes** apply globally across all customers. They depend on the media type e.g. documents, images, videos or sounds: each media type has its own class.

3. **Hierarchical groups** can be arranged in a nested structure, just like the directory tree in a file system. Hierarchical groups can be assigned to a customer.

Tip: A MEDIAS object can be assigned to several different hierarchical groups. For example, you could assign a building plan to the two groups "Drawings" and "Building plans for houses". Since the hierarchical groups are selected from defined lists, errors when searching for objects can always be traced back to the selection of the wrong hierarchical groups.


4. **File types:** MEDIAS objects are arranged by their file type. This is important for subsequent processing of the objects. To ensure that the file is assigned to the correct file type when it is added, the Windows file type and the type and creator under Macintosh must be defined.

3.1.4.1 Managing file types

To create a new file type or modify a type that is already known in the system, open the file type overview list. This is where you can manage the file types in Product 360 Media Manager.

Note: The "Create new file type" and "Edit file type" windows have the same content. The process is thus described using the example of creating a new customer.

1. Select **Master > File types**.
   - The "File type overview list" opens. This window provides you with standard functions.
2. Click on to create a new file type.
   - The "Create new file type" window opens.

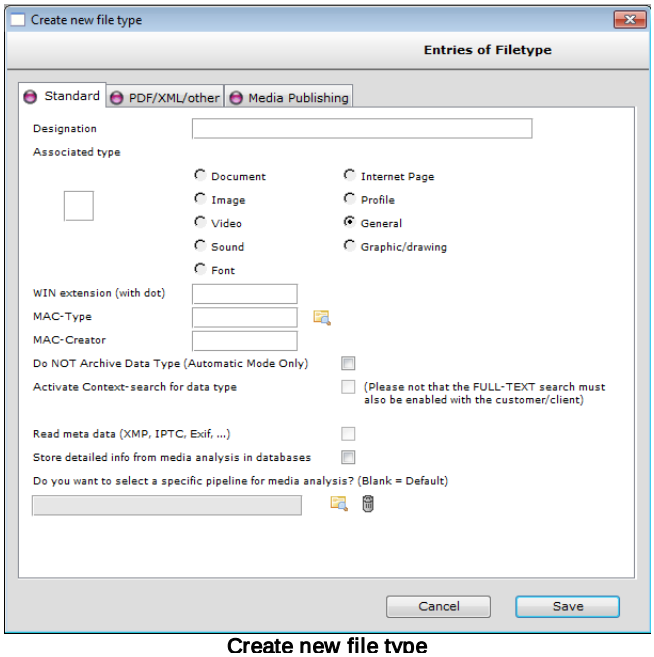

Create new file type

3. On the "Standard" tab, enter the name of the file type under "Designation".
4. Then select the type of file under "Associated type".
5. You can assign a symbol for the file type using copy and paste. If preview generation fails, this symbol is used instead.

6.The "WIN extension", "MAC type" and "MAC creator" fields allow the system to identify the file type of an object that is added using information from the file system.

Tip: Click on and specify an example file. This enables Medias to automatically determine the correct values for these three fields. The "MAC type" and "MAC creator" fields only need to be completed under Macintosh.

7.Specify whether data objects of this type will be automatically archived.

8.If necessary, enable the context search for objects of "Document" type.

Note: To use the context search, you require a license for the Context module. In addition, the context search must also be enabled in the Administration module for the corresponding customer.

9.Specify whether you want to read the meta data contained in the MEDIAS file.

10.Specify whether you want to save detailed information about the technical data from the media analysis in the database.

11.Click on to set a specific pipeline for media analysis on this file type. You can cancel this assignment by clicking on .

12.The default setting allows preview generation for all file types. To suppress preview generation, you can explicitly modify this functionality by selecting the read only property check box.

13.Go to the "PDF/XML/Other" tab.

14.In the "PDF" area, specify:

- Whether a proxy object will be generated when adding. If you select this option, you must specify a corresponding pipeline.
- Whether a context search will be performed with PDF.

15.In the "XML/Other" area, specify:

- Whether a proxy object will be generated when adding. If you select this option, you must specify a corresponding pipeline.
- Whether a context search will be performed with XML/Other

16.On the "Media publishing" tab, you can specify the following for various file types:

- Whether document information is read.
- Whether previews are generated and saved.
- Whether PDF proxy objects are generated (Office documents only).
- Whether image paths are updated (InDesign only).

Caution: In order for PDF proxy objects to be generated, reading of the document information must be enabled.


17.Click on **Save** to save your entries.

3.1.4.2 Managing classes

To create a new class or modify an existing class, open the class overview list. This is where you can manage the classes in Product 360 Media Manager.

Note: The "Create new class" and "Modify class" windows have the same content. The process is thus described using the example of creating a new class.

1. Select **Master > Classes**.
   - The "Class overview list" window opens. This window provides you with standard functions.
2. Click on to create a new class.
   - The "Create new class" window opens.

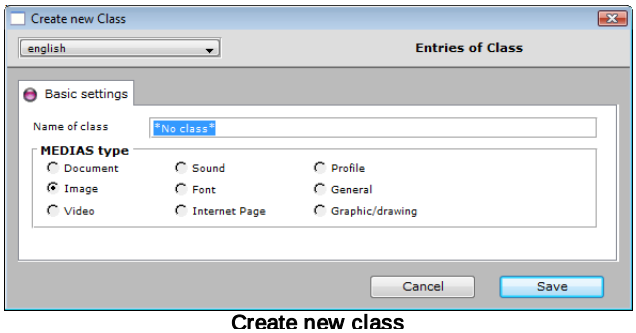

Create new class

3. Enter a name for the class under "Name of class".
4. In the"MEDIAS type" area, specify the type of MEDIAS objects the class relates to.
5. Click on **Save** to save your entries.


3.1.4.3 Managing groups

Note: The "Create new group" and "Modify group" windows have the same content. The process is thus described using the example of creating a new hotfolder.

1. Select **Main > Groups**.
   - The blank "MEDIAS group overview list" opens.
2. Click on .
   - After entering any filter criteria, the existing group items are displayed. This window provides you with standard functions. The following functions are also available:
   - : Open or close the selected hierarchy tree (if already open)
   - : Define meta data for this group
   - : Export structures
   - : Import structures
   - : Create empty container with the property fields of the selected group
3. Select the group below which you want to create the new group. If you want to select the top level group, select the line with "*" in the "Group designation" column.

4.Click on to create a new group.

➪ The "Create new group" window opens.

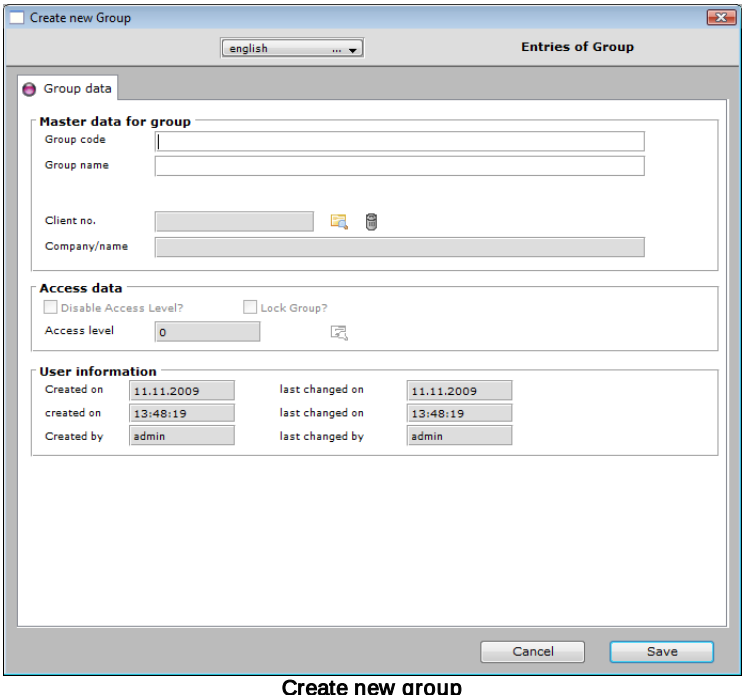

Create new group

5.In the "Group master data" area, enter a designation for your group in the "Group code" field. The group code uniquely defines the group and may not be used multiple times.

6.Enter the name of the group in the "Group name" field.

7.Click on in the "Client no." field to select the customer for which you want to create the group.

8.If required, you can disable the access level in the "Access data" area.

9.You can use the "Lock group" option to lock a group. Locked groups are not displayed in the Web interface, for example.

10.Under "Access level" you can set who sees the group.

11.The "User information" area shows who created the group, when and who was the last to modify it and when.

12.Click on **Save** to save your entries.

After saving, you can also define meta data structures for this group on the "Properties" tab.

3.1.4.3.1 Moving groups

In the "MEDIAS group overview list", you can move groups on the "Move groups" tab, i.e. change the hierarchy of the groups.


1.First select the group you want to move.

2.Transfer this group to the top field by clicking on .

➪ The relevant group is now selected as the group to be moved.

3.In the same way, select the group into which you want to move the first group you selected.

4.Click on ✔ under "Move" to move the group into the new group.

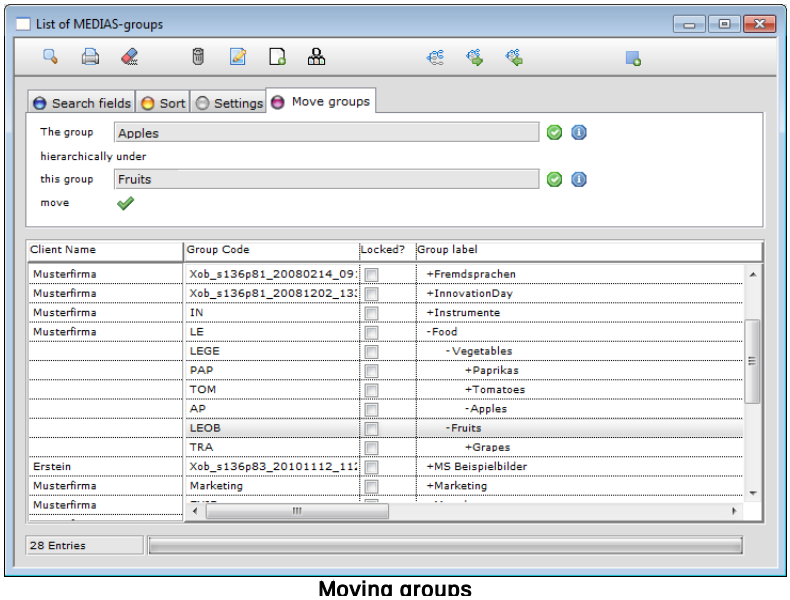

Moving groups

3.1.4.3.2 Assigning MEDIAS objects to groups

To assign media to groups:


1.Open **Medias > Manage objects**.

➪ The "Select a customer for MEDIAS objects ..." window opens.

2.Click on 🔍.

3.Select the corresponding customer from the list displayed.

➪ The MEDIAS content system is opened. The left half of the window displays the group structure that you have just created.

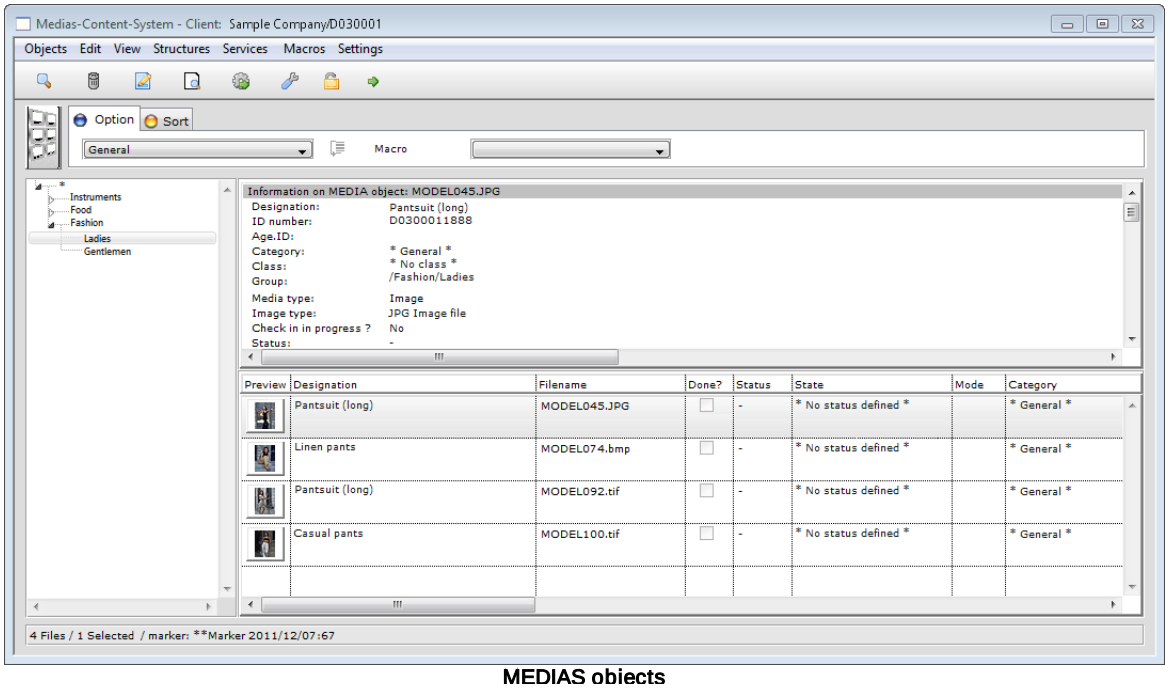

MEDIAS objects

4. After making changes, you can press the F5 key to refresh the view; the keyboard shortcut `Shift + F5` opens the associated subgroup. You can also select **Settings** to specify how this window will appear the next time it is called up.

Note: Groups that are not expanded are indicated by "▷" before the group name. You can double-click on one of these groups to display the sub-groups it contains. Double-clicking on one of these groups again hides its sub-groups.

5. Edit the MEDIAS objects whose group assignment you want to change as described under Modifying MEDIAS objects. Alternatively, you can simply assign objects to a group using drag & drop.

3.1.4.3.3 Creating meta data structures for the group

To assign flexibly defined meta data structures to groups and media:

1. Open **Medias > Manage objects**.
   - The "Select a customer for MEDIAS objects ..." overview list opens.
2. Click on to display an overview list.
3. Select a client.
   - The "MEDIAS content system" window opens.
4. Select a row.
5. Select **Structures > Structure of selected group** in the menu.
   - The "Modify structure definition" window opens.
6. Specify property fields by selecting the data type in the drop-down list. For modeling the property fields, there are ten different data types, which can be used as mandatory and optional fields.
   - Text field: Text fields can contain any text. You define the maximum length of the text entered yourself.
   - List box: You can create and name a list box for a property field. The values specified in the list box are then available for indexing.
   - Integer: You can use an integer of any size for a property field.
   - Float: You can enter a decimal number for a property field. The decimal number may not have more than eight places before the decimal point and two places after it.
   - Bool: You can use the logical values "true" and "false" for a property field.
   - Date: You can enter a date for a property field.
   - Time: You can enter a time for a property field.
   - MultiSelectList: You can assign a property field a MultiSelectList and give it a name. The values specified in the list box are then available for indexing.

Note: For each language installed, you can define up to 110 different property fields.

The validity of the values is checked, both against specified ranges and using XML schemas.

Note: The definition can be carried out automatically based on the XML data using the XML Connector module.

There are three different options for the area of validity of a structure:

1. Definition for this group only
2. Definition for all child groups until new definition is assigned
3. Definition for assigned media objects in this dominant group until new definition is assigned

MEDIAS objects can be assigned to groups under **Edit > Modify (object/group)** on the "Master data" tab. A single MEDIAS object can be assigned to several groups.

Note: If a MEDIAS object is assigned to multiple groups, one group can be designated as the dominant group. The property fields of the dominant group are then displayed in the MEDIAS content system view as part of the information for this MEDIAS object.

In the MEDIAS content system, you can view the defined property fields for a selected group and enter values on the "Properties" tab under **Edit > Modify (object/group)**.

Note: Property fields that are not given a name appear as neutral.

3.1.4.4 Managing access levels

The access levels for a customer control users' access to the related MEDIAS objects. The access levels are used to define access rights.


Every user is assigned an access level, which means that the user can only display and search for those objects that are in an area for which he or she has access rights.

Note: The "Create new level" and "Modify level" windows have the same content. The process is thus described using the example of creating a new access level.

1. Select **Master > Access levels** to open the access level overview list .
   - The "Select customer for access level …" window opens.
2. Click on to display an overview of customers.

Note: You can use the "Search fields", "Other search fields" and "More search fields" tabs to enter filter criteria for the search.

3. Select the relevant customer.
   - The "Access level overview list" window opens. This window provides you with standard functions.
4. Click on to create a new access level.
   - The window for creating an access level opens.

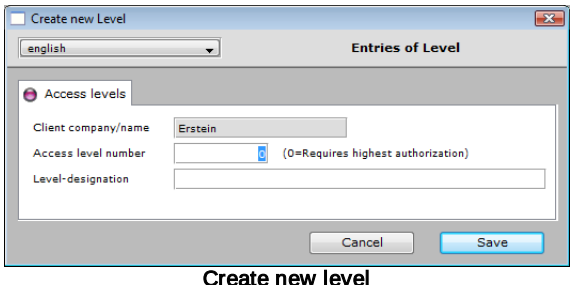

Create new level

5.Enter the "Access level number" for the access level.

6.Enter a "Level designation" that a user can use to identify the access level.

7.Click on **Save** to save your entries.

Tip: To create an access level that is very similar to an existing one, select the corresponding access level in the "Access level overview list" and click on . Then, all you need to do is make the necessary changes rather than creating the access level from scratch.

3.2 MEDIAS content system


The MEDIAS content system is the core element of Medias. This is where all the key work steps for maintaining your multimedia stock are carried out.

To access the MEDIAS content system:

1.Open **Medias > Manage objects**.

- The "Select a client" window opens.


2.Click on to display an overview of the clients.

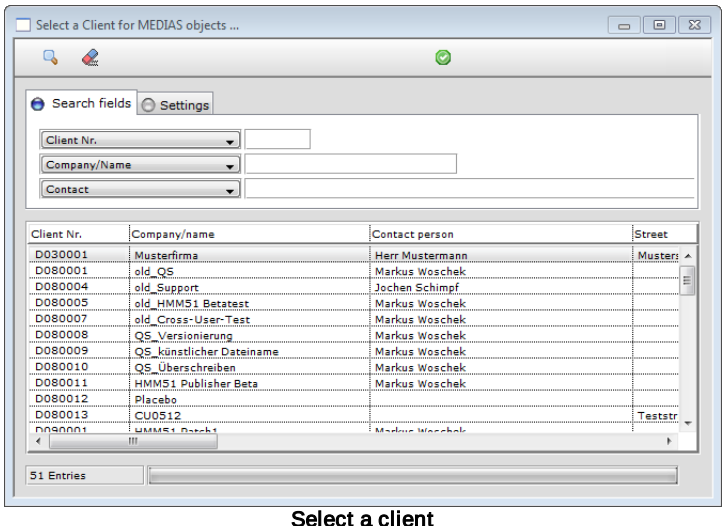

Select a client

3.Select a client.

- The "Medias content system" and "Search of MEDIAS objects …" windows are opened. In the "Search for MEDIAS objects" window, you can specify criteria that the objects to be displayed in the content system have to meet.

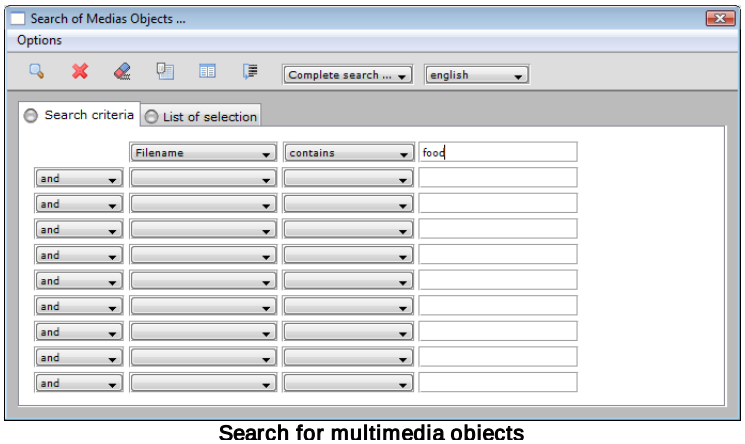

Search for multimedia objects


Note: The "sounds like" phonetic search condition allows you to find similar sounding entries. For example, if you enter the name "Meier", the search will not only find all instances of "Meier", but also of "Maier" and "Mayer".

3.2.1 Searching for MEDIAS objects

Note: To speed up the search process, property fields can be excluded from the search. Thus, if the search results do not meet your expectations, this could be the cause.

The MEDIAS content system provides a wide range of options for searching for MEDIAS objects. The "Search MEDIAS objects" window provides you with standard functions. The following functions are also available:


- You can save frequently used search queries by clicking on and retrieve them as required.



  a. In the window that opens, give your search query a name.

  b. Click on **Save**.


- Global settings for the "Selection lists" tab are made by clicking on .



- A window opens for you to specify the headings for the selection lists.
- Select an output group for the MEDIAS search. You must select the relevant customer group from the overview list of MEDIAS groups.
- Click on to start the search for the media assigned to the group.
- Clicking on allows you to change the sequence of the property fields.
- Specify the language.


The procedure for filtering using particular search criteria is as follows:

- On the "Search criteria" tab:
  a. In the first search field, use the drop-down menu to select a field label or a property to be used to filter the objects.
  b. In the second field, select the relationship between the selection in the first field and the text in the third field. In some cases, this is pre-assigned automatically.
  c. To link several filters, select the logical operator in the next line and continue as described above.




Advanced search


The following settings are available under **Options**:



- **Define search constraints:** Define the maximum number of objects in the search results.
- **Keep searching in current search results** Set whether you want to continue searching from the current search results.
- **Case-sensitive MEDIAS search** Set whether or not you want the search to be case sensitive.
- **Group-specific search:** Selecting this option excludes subgroups from a search in groups with a hierarchical structure.

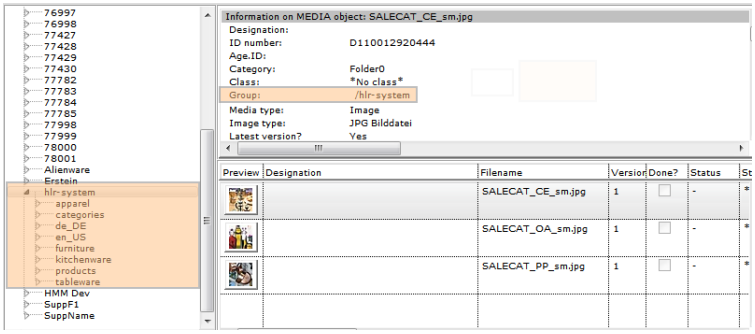

The group-specific search function is **active** here and only the selected group is used for the search.

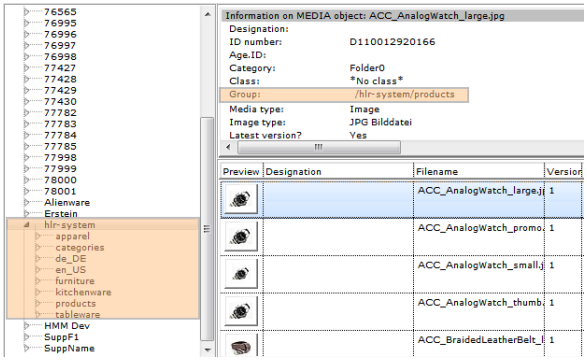

In this case, the group-specific search is **not selected**, which means that the search also includes subgroups

- **Display all versions:** This setting may not be enabled if you only want to search the current version of your data stock.
- **Enable page browsing:** If you enable this setting, two arrows for page browsing appear in the hit list.

Tip: Combine this option with "Define search constraints". This allows you to always display a manageable number of hits on a page and simply browse the pages as required.

- **Show all hits:** Display the total number of hits.
- **CMYK on:** If you enable this option, the individual components of an EPS file will be displayed.

3.2.2 Using wildcards

In Product 360 Media Manager, a wildcard is represented by the "%" character. It functions in the same way as the "*" character used in many Internet search engines and operating systems.

For example, you can search for a job number as follows.

- "1%": finds all jobs beginning with the number "1", e.g. "14052004".
- "%9%": finds all jobs containing the number "9", e.g. "14092004" or "19052004".
- "%2004%": finds all jobs containing the numerical sequence "2004", e.g. "14092004", "20041905" or "19200405".

Note: Note that the wildcard character must always be entered after a figure when searching in Product 360 Media Manager. A search for "1" would only return the job with the number "1", while a search for "1%" would return all jobs beginning with the number "1".

Wildcards can be used in all search queries.

3.2.3 Searching with the Context module

The Context module provides additional phonetic and context search functions.


Note: The context search must be enabled for the selected customer in the Administration module on the "Medias settings" tab under **Personnel/Client > Client**.

This setting allows you to perform a context search when adding new text objects, e.g. PDF or Word files, in the Medias module.

Note: First, you must define where a context search will be possible in the Medias module under **Master > File types**.

3.2.4 Editing history

In a media agency, it is usual for a user group to be involved in several customer jobs. Therefore, each user needs to know which customer objects have recently been edited. You can select **File > Last used** to open the editing history.



List of last customers edited


The information is user-specific and is sorted in date order, i.e. by the last editing time. A maximum of 10 entries is displayed. Each customer is only referenced once, even if several customer objects have been edited. The list is updated each time the module is opened and when changes are made to the MEDIAS content system.

Select **Delete entries** to clear the editing history.

Note: The customer name display depends on the system settings for the Medias module. If the use of number ranges is set, the customer name is preceded by corresponding prefixes.

3.2.5 Adapting the MEDIAS content system

You can adapt the MEDIAS content system to meet your requirements.

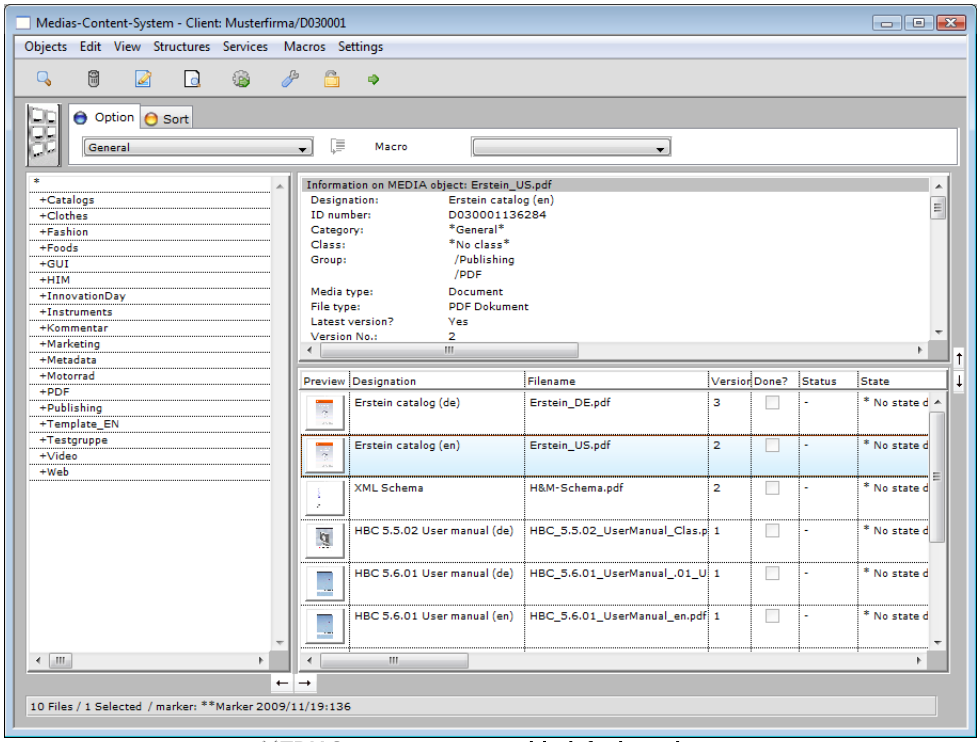


MEDIAS content system with default settings

1. You can enlarge and reduce the areas by dragging the scroll bar.
2. Under "Settings", you can specify whether or not the object area, the information area and the hierarchy area will be displayed.
3. You can choose from two options for the object view in the content area:
   - The Tablet view resembles a light table and cannot be adapted. You can activate the Tablet view under **View > As tablet**.

Note: It is not possible to simultaneously select multiple objects in the Tablet view.

   - The list view displays the MEDIAS objects in a table. The list view is fully adaptable to your requirements. You select the list view under **View > Default-1**. Select **Display > Arrange** to configure the list view:

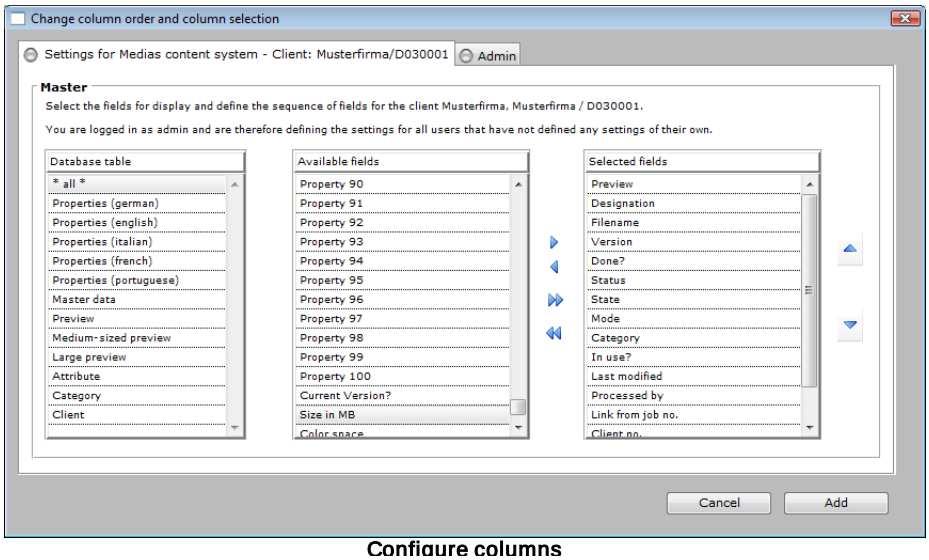

Configure columns

- The "Settings for Medias content system" tab is divided into three tables:
  a. By selecting an entry from the "Database table", you can reduce the values that can be seen in the "Available fields" table.
  b. The "Available fields" table shows all fields and you can add them to the "Selected fields" table using and and remove them from the table using and .
  c. The "Selected fields" table contains those fields you want to display in the list view in the MEDIAS content system. To adapt the order of the fields to your requirements, select the fields to be moved and click on and .
- On the "Admin" tab:
  a. Click on to save the changes you have just made, or click on to discard all the changes.
  b. To duplicate the selected data record, click on .

Tip: Duplicating a data record is useful if you want to create a new view based on an existing one.

  c. Click on to delete the selected data record.
  d. Select an available record and switch to the "Settings for Medias content system" tab to edit it.

Caution: The administrator must create customer-specific templates for all users. Users who are not administrators can only create templates for their own use.

4. Click on **Save** to save your entries.

3.2.6 Adding new MEDIAS objects

The main task of the MEDIAS content system is managing your MEDIAS objects. To use MEDIAS objects in Product 360 Media Manager, they must be in the database. The required files are identified by Medias, copied to the file server if necessary, indexed and then saved in the database.

Note: The name of the object is blank by default when adding. Click on to change the name.

Various options are available to you for adding the objects:


1. Open the MEDIAS content system as described under "MEDIAS content system".
2. In the MEDIAS content system, open **Edit > Add new objects**.
   - Add single file: Select **Single file** to add a selected file. You can decide whether the original file is to be copied or moved when it is added.

Note: Files can be added conveniently using drag and drop.

   - Select **Several files** to add several files simultaneously.
   - Select **From a folder** to select an entire folder to be added.
   - **Add new object to empty container**: Adds a new object to an empty container.
     a. Create empty container with customer property fields
     b. Create empty container with group property fields

Before you add new objects to your content and media database, you can define default values for this process.

1. Open the MEDIAS content system as described under "MEDIAS content system".
2. In the MEDIAS content system, select **Edit > Add new objects > Set default values for adding**.
   - The "Enter new default values for addition to MEDIAS" window opens.

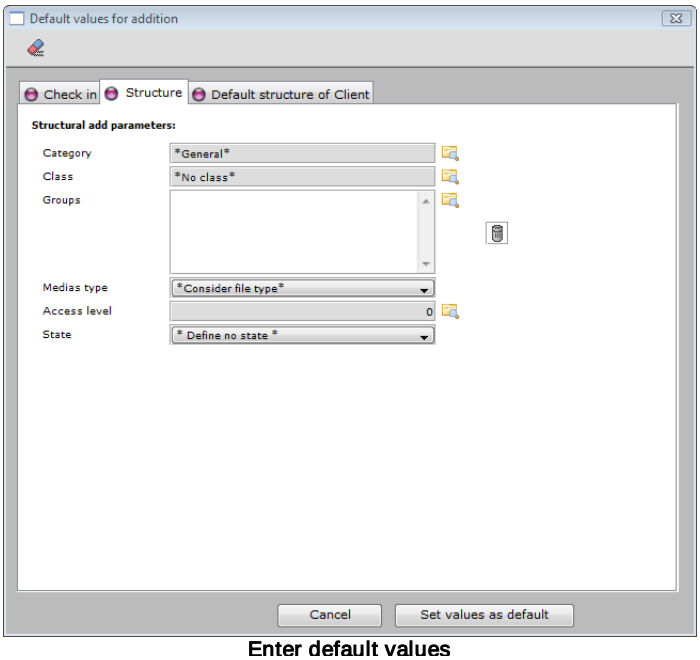

Enter default values

3. On the "Check in" tab, specify what you want to happen, for example if a file with the same name already exists. Should the system communicate directly with the user?
4. On the "Structure" tab, specify the category, class or group assignment.

5. Select whether you want the file type to be specified or automatically identified ("Consider file type").
6. On the "Default structure of client" tab, enter the property fields for the transfer. You can assign up to 100 property fields. The setting for whether a property field is defined as a text field or a list box is made in the Administration module.
7. Click on **Set values as default**.

The following options are also available:

- Under **Edit > Add new objects > Set check in marker for subsequent Medias check in** you can enter a keyword that will enable you to find the new objects you are adding more quickly later.
- To reset a check in marker, select **Edit > Add new objects > Clear and disable the current check in marker**.
- To delete the check in marker from the database components, select **Edit > Add new objects > Remove old check in marker from database objects**.
- If you want to change the resolution or the image quality, you can select **Edit > Rescan selected objects** to read in the corresponding objects again. In this way, you can also update previews if changes have been made to the original file on the file server.
- To delete MEDIAS objects from the content and media database, select the corresponding objects and select **Edit > Delete an object**.

3.2.7 Adding MEDIAS objects using the folder structure

The procedure for adding an entire directory including subdirectories is as follows:

1. Open **Medias > Manage objects**.
   - The "Select a customer for MEDIAS objects …" window opens.
2. Click on .
3. In the "Select a customer for MEDIAS objects …" window, select a customer.
4. Make sure that indexing is disabled under **Settings > Index directly when adding** in the "MEDIAS content system" window, as otherwise you will need to confirm the addition of each individual object.
5. If the Pipeline module is used to generate previews, you can enable **Settings > Add in background** to speed up the addition of the objects.
6. Select **Edit > Add new objects > From a folder**.
   - The "Find folder" window opens.
7. Select the main folder in your directory tree.
8. Use the folder names from the level of the main folder and higher for "Entry into hierarchical groups". More information can be found on the "Example" tab.
9. Click on **Check in with indexing** to start adding the objects with automatic indexing.

3.2.8 Basic functions

The following basic functions are available in the MEDIAS content system:


Function	Meaning
Edit > Move (category/object type)	Moves MEDIAS objects to a different category and assigns a MEDIAS type.
Edit > Select all (objects)	Selects all objects at once.
Edit > Copy to directory (check out)	Copies objects previously selected in the MEDIAS content system to a selected folder. The corresponding objects are assigned the status "Checked out", if is enabled. Otherwise, the copied objects are not assigned the status "Checked out". The files then remain editable for other users. To cancel "Checked out" status, click on .
Edit > Search and Replace	Searches for particular property fields and changes the entries if necessary. You can limit the scope of the search using various criteria.
Edit > Print	Prints selected MEDIAS objects after selecting the printing parameters.
Edit > Show path of an object	Shows the path for a previously selected object on the file server.
Edit > Add objects to media purchase order	Adds a selected object to a new, open media purchase order.
Edit > Restore from archive via action basket	Places selected MEDIAS objects in the action basket for restoration.
Objects > Refresh	Updates the view of the listed MEDIAS objects using the specified filter or search criteria.
Objects> Test the MEDIAS area	Performs a comparison of the entries in the database and the files on the file server. Checking the MEDIAS area monitors the Medias directories and the associated database entries. The check covers all categories and directories for a customer. The result of the check is displayed as a report. ⚠ Caution: After performing the check, if you are asked whether you want to add the identified files, this operation should always be performed from the platform from where these files were copied to the directories. Otherwise, incorrect database entries are possible.
Objects > Show current filter	Clicking on this option opens a report which you can see your currently defined filter for selecting objects.

Function	Meaning
Objects > Close	Closes the MEDIAS content system.
Settings > Display object area	If this function is enabled, an information window is displayed for the object selected in the results list.
Settings > Display information area	If this function is enabled, information about the media object is displayed. A valid license for the Product Information module is required to display information about products and groups.
Settings > Display hierarchy area	The Group hierarchy window is displayed. Select a group and then click on Refresh. Only objects that are assigned to that group will be displayed.
Settings > Display messages	If this function is enabled, dialog boxes such as "MEDIAS object already exists in one version - Do you wish to add this as a new version?" are displayed when adding objects.

3.2.9 Modifying MEDIAS objects

1. Open the MEDIAS content system as described under "MEDIAS content system" 85.
2. Select the object to be modified.
3. Select **Edit > Modify (object/group)** or click on .

   ➪ The "Modify MEDIAS object" window opens.

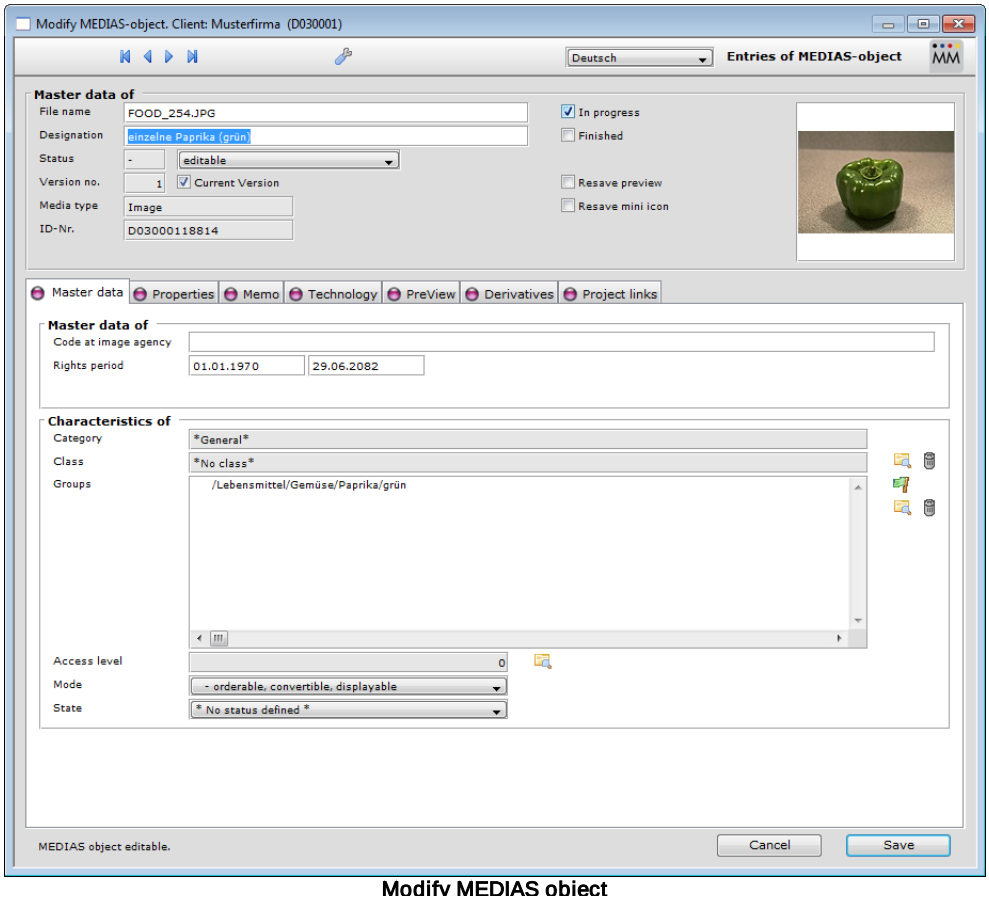

Modify MEDIAS object

4. The most important core data is fixed in the top section of the screen and are always available when scrolling through the tabs located below. Decide whether you want to save a new preview and/or mini icon. Editable fields for input are highlighted in white, while drop-down lists are indicated by ▾. All other data completes the information required.
5. On the "Master data" tab:
   - In the "MEDIAS object master data" area, modify the master data for the object.
   - In the "MEDIAS object properties" area, select a new class and group, if required, and set the access level, the mode and the status.
6. On the "Properties" tab, you can change the indexing. Depending on how the property fields (83) have been defined under **Structures > Default structure of customer's media objects**, models of different data types are available here.
7. On the "Memo" tab, you can enter a detailed memo text for the object.
8. On the "Technology" tab:
   - "File name": You can change the file name here.
   - "Designation": Enter a designation for the object.
   - The date and user who created or last modified the documents are extracts from the change log. The log itself is provided on a separate tab (see 12).
   - "Finished?": Modify the "Finished?" flag here.
   - "In progress?": Modify the "In progress?" flag here.
   - "Status": This option allows you to modify the status of the object. The possible statuses are as follows:
     a. "Open for editing"
     b. "Locked"
     c. "Archived": Set automatically by the Archive (204) module.
9. On the "Preview" tab, you will see the preview generated for the selected object. You can resave the high-resolution preview.
10. If meta data is available for the MEDIAS object, this is shown on an additional tab called "Embedded meta data".
11. If additional information exists for the MEDIAS object, this is displayed on an additional tab entitled "Document info".
12. If derivatives are available for the MEDIAS object, this is shown on an additional tab called "Derivatives". Selecting a derivative allows you to perform the following actions:
    - Display derivative: Opens the selected derivative with the default program in your operating system.
    - Display path: Specifies the UNC path to the derivative file.
    - Replace derivative: Allows you to manually specify a different file as a derivative. The "Replace manually" flag is automatically set to prevent the Workflow Manager module from overwriting the manually changed derivative.

- Reset derivative: Clears the "Replace manually" flag, allowing the Workflow Manager module to overwrite the derivative again.
- Delete derivative: Deletes the selected derivative after confirmation.


13. The "Change log" lists all actions if the audit trail functionality has been enabled.
14. The "Job links" tab lists all jobs with which the MEDIAS object is linked or in which it is required.

Note: To manually save a new preview for the object, select the "Re-save high preview?". Then use your imaging software, e.g. Adobe® Photoshop, to copy the new preview to the clipboard in your operating system. Return to Medias. Select the Preview window and paste the contents of the clipboard. Under Windows, this is done using the keyboard shortcut CTRL+V, in Macintosh it is Apple+V. Note that the image has to be in JPEG format. To finish, save the data.

3.2.10 Modifying multiple MEDIAS objects

To modify multiple objects at the same time:

1. Open the MEDIAS content system as described under "MEDIAS content system".
2. Select **Edit > Multiple modification of objects** or click on .
   - The "Modify properties of multiple MEDIAS objects" window opens.

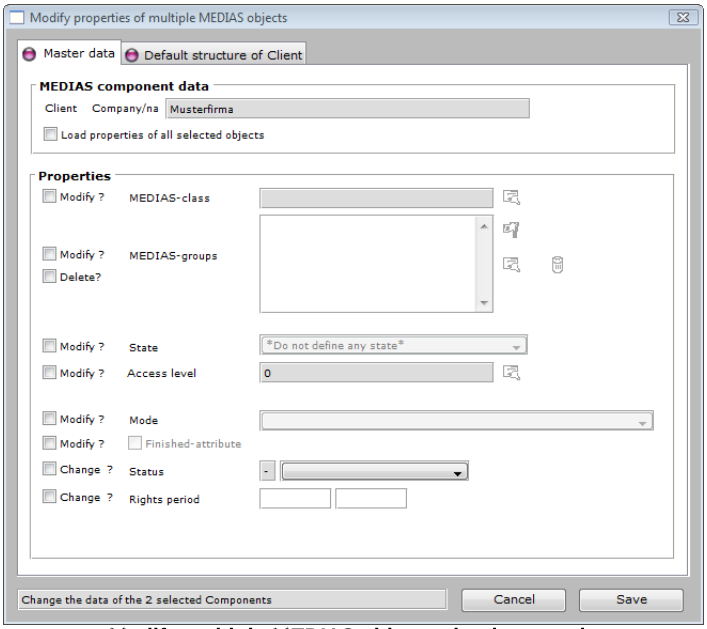


Modify multiple MEDIAS objects simultaneously

3. On the "Master data" tab, enable the "Modify" option for all properties to be modified and then make the planned changes.
4. On the "Default structure of client" tab, you can change the indexing. To do this, enable the "Modify" option for all property fields to be modified and make the corresponding changes.

3.2.11 Converting/delivering an object

If you have a license for the Pipeline module, you can convert and edit selected MEDIAS objects in a pipeline.

1. Open the MEDIAS content system as described under "MEDIAS content system".
2. Select **Edit > Convert/Deliver in Pipeline** or click on .
   - The "Inputs for processing/taking over of data" window opens.

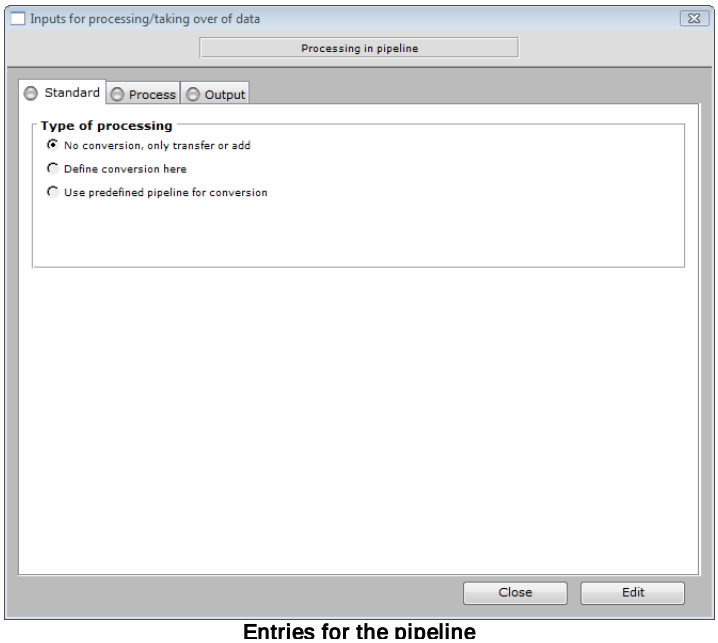

Entries for the pipeline

3. On the "Standard" tab, specify the type of processing:
   - "No conversion, only transfer or add": In this case, there is no "Conversion" tab.
   - "Define conversion here": In this case, the "Conversion" tab is used to define the conversion.
   - "Use predefined pipeline for conversion": The "Conversion" tab disappears and a field for selecting a pipeline is shown instead. Click on to open the "Pipeline selection window". Select the relevant pipeline and transfer it by clicking on .
4. Use the "Conversion" tab to define your conversion. Depending on the format, you can specify the color space and the resolution. Under HELIOS, you can also include available ICC color profiles in the calculation.

Note: You can only convert those file types that can also be selected as the target format. PDF files are an exception. They can only be used as a target format here.

5. On the "Process" tab, you can choose between "Process as soon as the button is clicked" or "Take in action basket".
6. Decide whether you want to charge nobody ("Charge nowhere") or a selected customer ("Charge selected client directly") for the processing time.
7. On the "Output" tab, specify the output options.
8. Specify where you want the data to be stored.

Note: For each of these storage options, a different symbol is activated in the "Select storage location" area. These open the relevant selection or overview list. Select and transfer an item to enter it in the input field.

9.Click on **Edit**.

3.2.12 Services in the MEDIAS content system

The MEDIAS content system provides you with the following additional services under **Services**:

Check media use in job

Displays an overview of all jobs in which the selected objects exist as a reference.

Media analysis > Selected object/Select file

Analyze the selected object/file. All available information is displayed in a report.

Automatic indexing

Automatic indexing serves to update the current data in the database using ASCII or Excel files.

Note: Excel files, which contain worksheets, must first be saved as tab-delimited text files.

Note the following:

1.In the ASCII files, the first row must contain the column titles. All column values must be separated by tabs.

2.In the window that opens after you select the ASCII file, you can assign the various columns to the property fields.

3.The list on the left shows the column titles of the selected ASCII file. First, you must specify which column is to be used to uniquely identify the MEDIAS object. Click on to assign this column to the"Which column contains the ID of the database object?" field.

4.Next, select how the ID is to match the column. This can be done using the file name, a particular property field, or the name of a MEDIAS object. You can then assign the other columns to the relevant property fields.

5.Click on **Save** to update the objects in the database.

Note: Once transfer schemas have been assigned, they can be saved and reloaded in the "Manage assignment" area.

Export database

This function enables you to export an area of your database, e.g. for external editing. A license for the View module is required for external processing.

1.Select **Services > Export database**.

The "Parameters for Medias export" window opens.

2.Here, you can specify whether you want to export all objects or only previously selected objects for the selected customer.

3.You also have the option of exporting the detailed data and/or layouts.

4.Click on **Start**.

Caution: An export performed under Windows cannot be processed on a Macintosh system. The data from an export performed on a Macintosh system can also be processed under Windows.

Depending on its size, it can take up to several hours to export the database.

5.You will then be prompted to specify a directory for the export.

➪The necessary data is copied. The View display and indexing module is copied to the same directory.

Import database changes

1.In Medias, use **Medias > Manage objects** to select the customer with changed data records.

2.Navigate to **Services > Import database changes** in the MEDIAS content system.

3.Specify where the changed flat-file database is located.

Note: For example, under Windows you will find these in the following folder structure: `[...]\View - Informatica Media Manager\db-main\opasdata\db\opasdb1.df1.`

➪ Medias now shows how many changed data records have been added.

4.Start the import by confirming this number.

Do touch

This function is only available for HELIOS under Sun Solaris. It allows image data to be read in again.


Publish objects/media

Outputs the database content as an ASCII file.

1.To do this, select the objects to be published.

2.Navigate to **Services > Publish objects/media**.

➪ The "ASCII publish project" window opens.

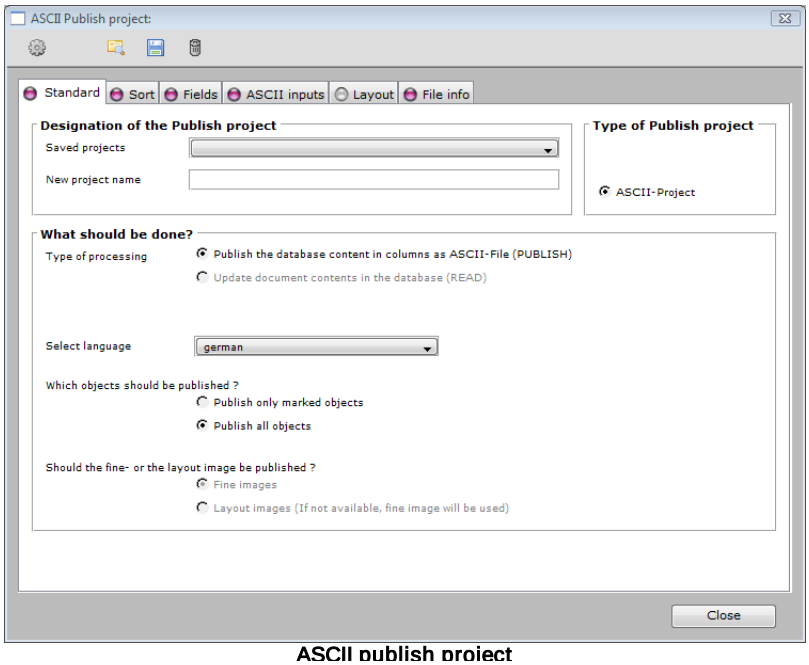

ASCII publish project

3.You can give the project a name on the "Standard" tab.

4.Select a language.

5.Set whether you want to publish all objects or only the selected ones.

6.On the "Sorting" tab, you can sort the exported data records by columns by clicking on and .

7.On the "Fields" tab, select the database fields to be exported by clicking on and .

8.The "ASCII inputs" tab provides you with complete information about the ASCII export.

Note: All tab stops, carriage returns and line feeds are removed from the exported ASCII texts.

9.On the "Layout" tab, you will see an example of a group of fields with an ASCII text.

10.Specify the target folder and a file name for the ASCII file to be exported on the "File info" tab.

11.To do this, click on to select the relevant storage location and file name.

12.Click on to save your settings.

13.Click on to export the ASCII file.

14.Confirm the export in the subsequent window by clicking on **Yes**.

- The selected database fields will now be available to you at the specified storage location.

Update paths for DBPublish

Updates the local paths to your MEDIAS objects. Updating the local paths is essential for the dbpublish module to function correctly.

Select objects without proxy

Selects all MEDIAS objects for which no proxy object exists.

3.2.13 Manually including views or PDF proxies of objects in the system

PDF proxies for documents can be incorporated into the system manually. The procedure is as follows:

1. Start the Pipeline module.
2. Navigate to **Pipelines > Pipeline management**.
3. Enter the administrator password.
   - This opens an overview list of the existing pipelines.
4. Click on to create a new pipeline.
   - The "Create new pipeline" window opens.
5. Give your pipeline a name under "Designation".
6. Under "Mode", select "Only data type conversion".
7. Under "Data type", select "Documents".
8. Select "Should a file type extension be added to the new file name?"
9. Under "File type extension of new file name", enter ".pdf".
10. Click on **Save** to save your entries.

You now need to assign this pipeline to the relevant document types.

1. In Medias, open **Master > File types**.
   - The "File type overview list" window opens.
2. Filter out the objects of "Document" type using "Associated type".

Note: Note that manual proxies can only be assigned to files of the type "Document".

3. Select a file type to which you want to assign a manually included proxy.
4. Click on .
5. On the "PDF/XML/Other" tab, select the option "Should a proxy document also be created (as a PDF) when adding?".
6. Select the pipeline you created at the beginning of the process.
7. Click on **Save** to save your entries.

Now select the document in the MEDIAS content system for which you want to manually include a proxy:

1. Display the path to the relevant object by selecting **Edit > Show path of an object**, e.g. `Y:\db-main\opasdata\d030001\medias\docus\manual_proxies.txt`.
2. Create a folder called `$pdf` at the location where this object is stored, if one does not already exist.
3. Copy an associated PDF file with a name that is the same as your object, e.g. `manual_proxies.pdf`, to the `$pdf` folder.
4. Select the object `manual_proxies.txt` and navigate to **Edit > Rescan selected objects**.

- A preview of the first page of the file is generated for the object `manual_proxies.txt`. The system uses the same file as a proxy object for the context search and for multi-page views on the Internet.

3.2.14 Integrating components into applications

If you want to export a MEDIAS object, e.g. an image, from Medias to the image container in an InDesign document, you have two options:

First option:

1. Select an image container in the InDesign document.
2. Switch to the MEDIAS objects in the MEDIAS content system.
3. Click on the MEDIAS object you want to integrate.
4. Navigate to **Macros > Import image -> InDesign**.
   - The object is loaded to the image container you previously selected.

Note: If you also want to load the layout image, you must first enable **Macros > Use layout image**.

Second option (only available in Windows):

1. Open the MEDIAS content system as described under "MEDIAS content system".
2. Click on the object to be integrated in the MEDIAS content system.
3. Navigate to **Edit > Show path of an object**.
4. Click on **Copy to clipboard**.
5. Now select the image container in the InDesign document.
6. Open the dialog box for importing an image file by pressing the keyboard shortcut CTRL+D.
7. Paste the file path for the MEDIAS object.
8. Click on **Open** to import the selected image file.


3.2.15 Managing media purchase orders

Note: The "Create new media purchase order" and "Modify media purchase order" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Open **Media ordering > Media purchase orders**.
   - The "Media purchase order overview list" window opens. This window provides you with standard functions. The following functions are also available:
   - : Releases the purchase order
   - : Processes the purchase order
   - : Resets the purchase order
   - : Shows the cart belonging to the purchase order

2.Click on to create a new media purchase order.

➪ The "Create new media order" window opens.

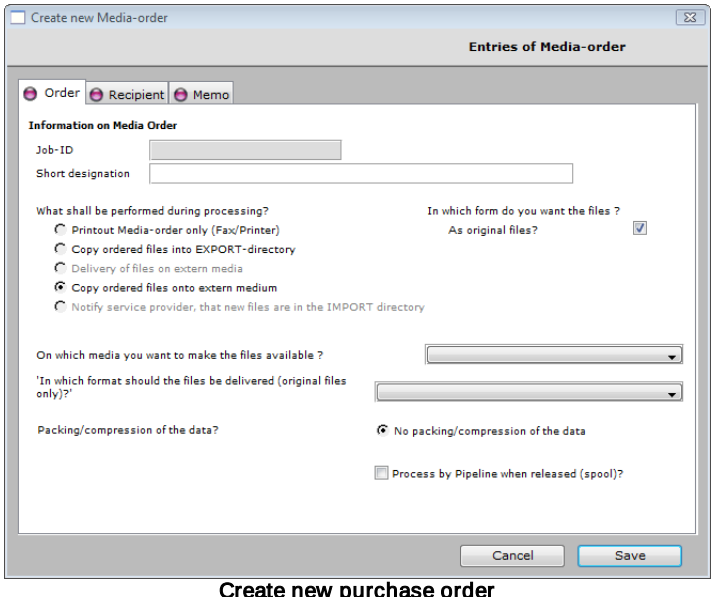

Create new purchase order

3.On the "Order" tab:

- Enter a short description for your purchase order.
- A job ID is assigned automatically.
- Specify what needs to be done during processing.
- Specify the medium on which you want to provide the files.
- Specify the format in which you want to provide the files.
- Set whether or not the data will be compressed and packed.

4.On the "Recipient" tab:

- Specify the recipient of the ordered media.
- The recipient can be an existing customer or service provider or an "external address" that has not yet been entered.

4.On the "Memo" tab, add relevant additional information to the job.

5.Click on **Save**.


➪ The shopping cart for the media purchase order is opened. This window provides you with standard functions. The following functions are also available:

- : Marks the selected component as finished
- : Marks the selected component as not finished.
- : Preview of a component

6.To add the selected MEDIAS objects to the purchase order, go to the MEDIAS content system for the relevant customer. This is opened as described under "MEDIAS content system".

7.Select the corresponding objects in the MEDIAS content system.

8.Transfer them by clicking on **Edit > Add objects to media purchase order**.

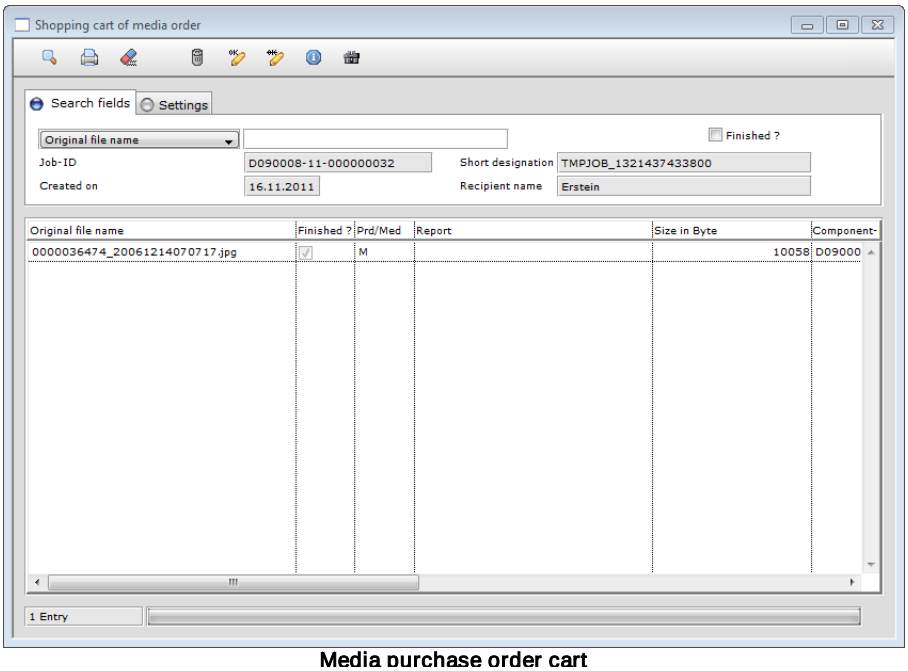

Media purchase order cart

7. Now close the media purchase order shopping cart.
   - A release prompt appears for the job.
8. Acknowledge this message by clicking on **Yes**.
   - The job is now released. The user who is to be notified of release will then receive an e-mail.
9. Click on **Yes** to start processing the job.
   - A report then appears specifying which files are available in the export directory to be picked up.
10. You are then asked whether you want this data to be copied to the export directory.
    - Confirm this by clicking on **Start**.
11. You now need to confirm the final provision of the data in the export directory. To do this, click on **Start**.

3.2.16 Action basket in the Medias module

If you want to add MEDIAS objects to your new job but they are already archived or not available in the required format, you can use the action basket to add these archived objects directly by selecting them in the action basked or using the pipeline. This saves both the data for the objects is saved and their purpose at the same time. In this way, you can collect together all the required MEDIAS objects and process them at a time of your choice or automatically in the action basket.

The action basket is a kind of shopping basket in which you collect all the files that are required for management and processing operations. You can access the action basket in Medias by selecting **Basket > Action basket**. You will only see the action basket set up for your specific workstation. The one exception is the Archive module, where you can view all archive action baskets for all workstations.


The action basket provides you with standard functions. The following functions are also available:

- : Select all listed entries
- : Process selected entries
- : Show error trigger and Finished status
- : Show preview and additional information for the selected objects
- : View report on selected objects - all data for editing the objects is displayed

3.2.17 Share MEDIAS objects

If you want to share MEDIAS objects you have two options:

- Toolbar
- Context menu

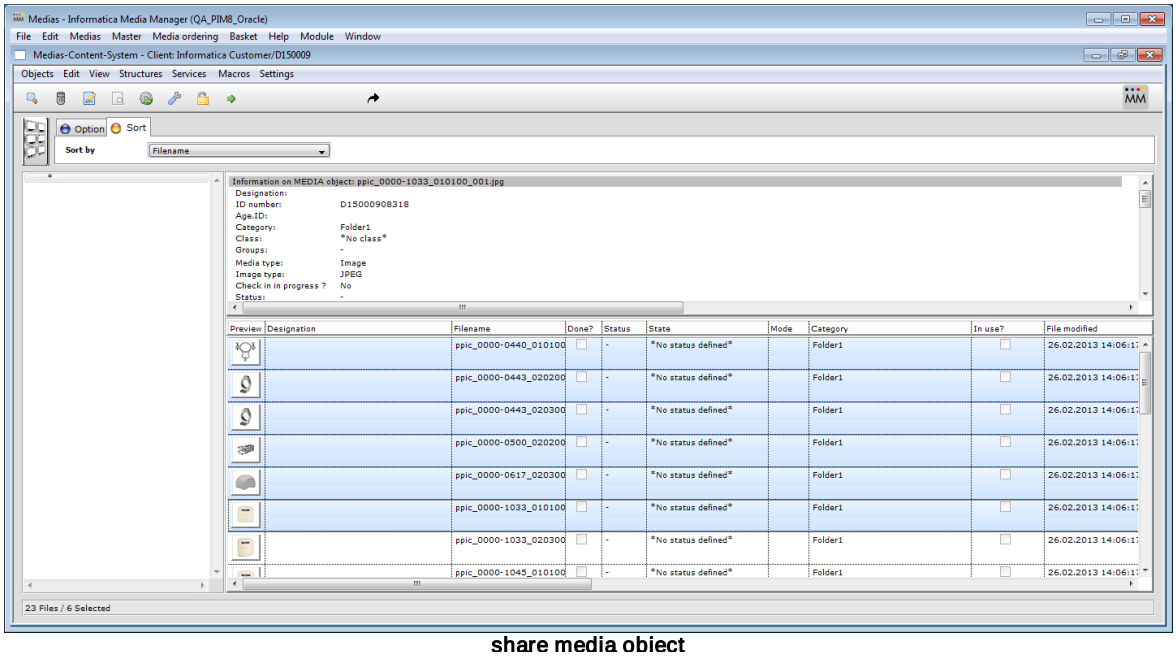

share media object

1.Open the MEDIAS-Content-System as described under „MEDIAS-Content-System“.

2.Select the objects which you want to share.

3.By clicking on you can share the corresponding object or objects. Open the context menu **Edit > Share objects alternatively**.

4.A click on the link that was sent leads even unregistered users to the selected object.

Note: The user has the option to download the object. It is possible to share up to one hundred objects.

Note: Administrators are not allowed to share MEDIAS objects. User rights are set via the Administration (see Administration "Managing users"36).

In order for the user to share MEDIAS-objects, the user rights (Medias) “Send links to media asses, media orders and collections” in the user rights has to be ticket.

To share Production components, activate “Send links to components and groups” user rights (Production).

Make sure to specify the right Informatica Media Manager web URL in the system parameters.

3.3 Audit Trail

The term **audit trail** originates in the United States, and indicates a series of checks used in accounting. An audit trail includes the recording of each individual stage in a transaction, and can be used to trace the complete sequence of actions in a purchase, sale, customer complaint, or the delivery of goods, thereby simplifying problem management.

These days, many companies have to work to international standards. This relates to both data security and long-term availability. Compliance with legal requirements is also essential, for example, in terms of access authorization concepts and statutory archiving periods. Internal reviews and evaluations may require access to modifications made to your data set at any time. Procedures that follow the same principle as an audit trail in accounting are used for this purpose, i.e. **audit logging**109 or, in the case of complete logging, **history logging**110.

Product 360 Media Manager supports these requirements by facilitating the tracking of errors and their causes in data maintenance and helping you to distinguish between similar errors and similar causes. The following chapters describe how these functions are implemented in Product 360 Media Manager.

Essentially, you can only use the Audit Trail functionality if you have activated it in the customer settings107.

3.3.1 Activating the Audit Trail

Note: The Audit Trail functionality is integrated into the standard installation of Product 360 Media Manager. The configuration of the Audit Trail server and database is described in a separate installation manual. Settings that affect the security concept must be made by an adequately trained employee.

Basic information


Audit Trail represents an important core function of Product 360 Media Manager. Its task is to log all data modifications to MEDIAS objects made in Product 360 Media Manager in a separate database. This type of logging covers both changes made by users and automatic system operations triggered by workflows.

Essentially, modifications of all entities specified in the repository can be monitored. Note, however, that the term "modification" not only covers actual *changes* to data, but also its *creation* and *deletion*.

By default, the Audit Trail monitors modifications to entities of Medias objects. If a Medias object is deleted, the corresponding data records are also removed from the database.

Activating the Audit Trail

1. Open Administration
2. Select **Employees/Customers > Customers**.
   - ⇨ The "Customer overview list" window opens.
3. Search for the relevant customer using the standard functions.
4. Select the "Medias settings" tab.

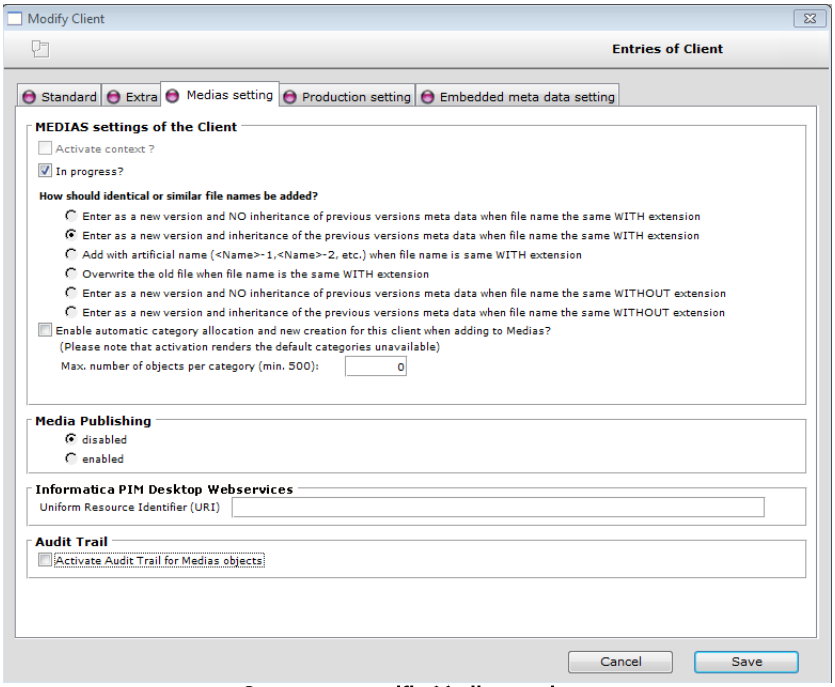


Customer-specific Medias settings

5. In the "Audit Trail" area, check the relevant entry and save the configuration.

3.3.2 Using the Audit Trail

In Product 360 Media Manager the default configuration of the Audit Trail ensures that all modifications to Medias objects are continuously transferred to a history log and displayed in an overview table. You can access this using a separate tab in the editing screens for the objects.

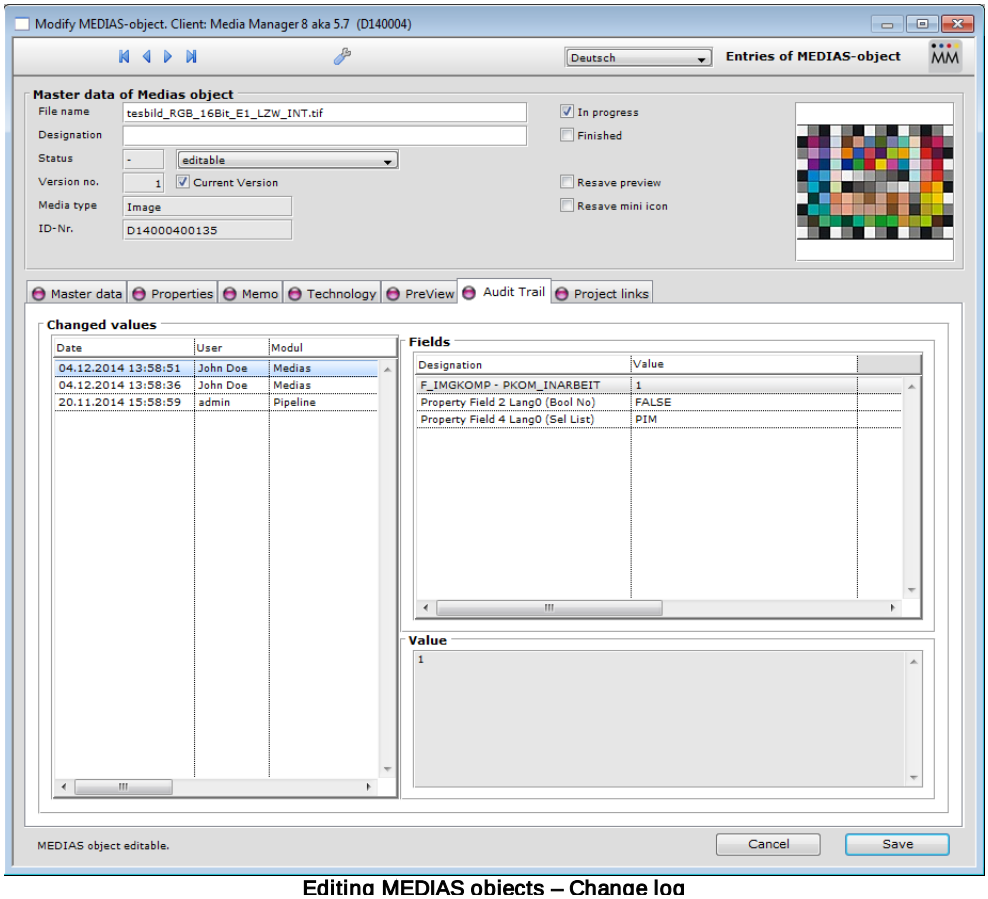

Editing MEDIAS objects – Change log

All object-related modifications are listed in an overview table on the left. Selecting an entry in this table displays details in the top right. Changes to the content are listed underneath.

3.3.3 Technical background

Audit logging

Auditing is an investigative procedure that evaluates processes in terms of their fulfillment of requirements and compliance with guidelines. Audits (from the Latin word for "hearing") are conducted in a wide range of areas within a company, for example, quality management, production sequences, data protection, customer management, etc. An audit analyzes the current situation and compares the initial objectives with what has been achieved. In most cases, the data is saved in a relational database management system.

An **audit log** is the simplest form in which chronological information about the data set is saved. When the data is accessed, additional information about *what*, *who* and *when* is also written to the database. It is important to be aware that only the initial creation and the most recent editing of the data is recorded for evaluation at a later stage. This collection of data can be used as a starting point for evaluating permissions for further actions. This enables mapping of the company's internal review of processes by managers.

Audit trails take the simple concept of an audit log one step further. An audit trail creates a copy of the data set with details of the user making the change and a time stamp each time a write operation is executed. As a result, an inspection or review of the relevant users and their actions can be implemented. In addition, an audit trail enables tracking of the sequence of actions and simplifies the process of a system or data restore in the event of loss or if malicious action (fraud) is detected. Typically, a complete audit trail allows you to choose between a progressive approach, where you track all actions from the cause to the result (effect), and a retrograde approach, where you work backwards from the effect to the starting point. The process of an audit trail and the corresponding data should only be accessible to certain system users with the required authorization.

History logging

The term **history logging** (also known as temporal data storage) refers to the storage of the history of data in a database over time. History logging allows you to detect which value was valid at which point in time in the past or will be valid at a future point in time.

```
Source:
 http://wirtschaftslexikon.gabler.de/Definition/audit-trail.html
 http://www.enzyklopaedie-der-wirtschaftsinformatik.de/wi-enzyklopaedie/lexikon/
     daten-wissen/Business-Intelligence
 http://www.onpulson.de/lexikon/269/audit-trail/
 http://www.oio.de/public/java/auditierung-jpa-historisierung-hibernate-audit-
     artikel.htm
 http://www.sigs.de/publications/js/2003/05/demelt_JS_05_03.pdf
```

4 Production

Production refers to the completion of job components for specific jobs,e.g. images, graphics or layouts. The Product 360 Media Manager system supports this kind of production with data organization and data workflows based on the digital job bag.

Data organization refers to the structuring of data in such a way that it can easily be found, e.g. in named folders, and the assignment of the data, e.g. to a job, is clearly defined.

The term **data workflow** refers to the traceable lifecycle of job components and the various statuses they acquire over the course of production. An example of this is the lifecycle of an image, from when it is first scanned, through image retouching and, finally, incorporation into an InDesign document. During this cycle, the data workflow indicates who has worked on this job component, when, and for how long; the costs incurred by the various activities and the component's production status at any given point in time.

Options for defining and assigning production statuses and for sending the related notifications by e-mail are essential for mapping a workflow. Product 360 Media Manager provides these options and also allows notifications to be sent when critical statuses arise in the system, e.g. if deadlines, production times and cost limits are exceeded or additional expenses are posted.


For example, you can select a user who will be responsible for all jobs for all customers or only for individual jobs or individual customers. Product 360 Media Manager can automatically send an e-mail to the job representative when production times, deadlines or costs are exceeded.

In addition, when the production status of jobs changes, an e-mail is sent to the appropriate user. For example, if you assign the "Team leader repro" user to the production status "Job ready for repro", an e-mail is sent to that user each time a job reaches this production status. The necessary settings are made in the Administration module under **System > System parameters** on the "Messages" tab or when managing customers, jobs and production statuses.

The **digital job bag** contains all essential details about a job, as well as data relating to the data workflow for the job components.

Some tasks need to be performed in advance to ensure that production is executed correctly. These include setting up activities with the associated hourly rates for calculation and billing of production times, and the corresponding production statuses and production materials linked to the activities. These are normally consumable materials that are important for the data workflow of the job components.

The job bag also contains the job itself and its assignment to a customer. The job contains the job components to be completed, such as images graphics, InDesign documents or links to the Medias database ("MEDIAS links"). The job components are located in a structured form in the folder for the job or its job groups. Job groups are used for more detailed classification of a job, e.g. images or texts.

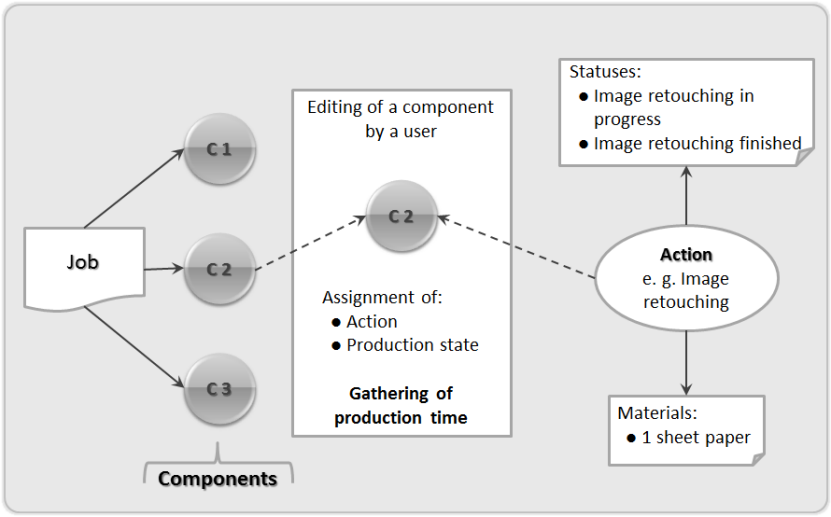

Job and job components

Note: The Production module provides you with access to the Info Center.

Note: To manage print templates, call up the Report overview list by selecting **Master > Manage reports**.

Caution: The screen display varies depending on the assigned user rights. To avoid unnecessary confusion for users, the associated fields in the dialog boxes are not displayed if the user does not have authorization for them.

4.1 Job production

Production of a job refers to the job-specific editing of the job components it contains. The job components can either be included in the job already, created or selected from the Medias media database. Examples would be creating a InDesign document within a job, inserting an image from the Medias module, creating a graphic or setting a text in the InDesign document. As part of editing, all data involved in production is recorded, such as the activity, production duration or production status after editing.

Note: To simplify production, the **Master > Jobs** option from the Administration module is also available in the Production module. If you are working as an advertising agency, this option does not appear.


4.1.1 Managing jobs

Note: The "Create new job" and "Modify job" windows have the same content. The process is thus described using the example of creating a new job.

1. Select **Master > Manage jobs**.
   - The "Job overview list" window opens. Here, you can create new jobs and also modify, copy or delete existing jobs. This window provides you with standard functions.

- For all jobs counts that you can delete one or more of them by selecting them and clicking afterwards.

2. Click on to create a new job.
   - The "Create new job" window opens.

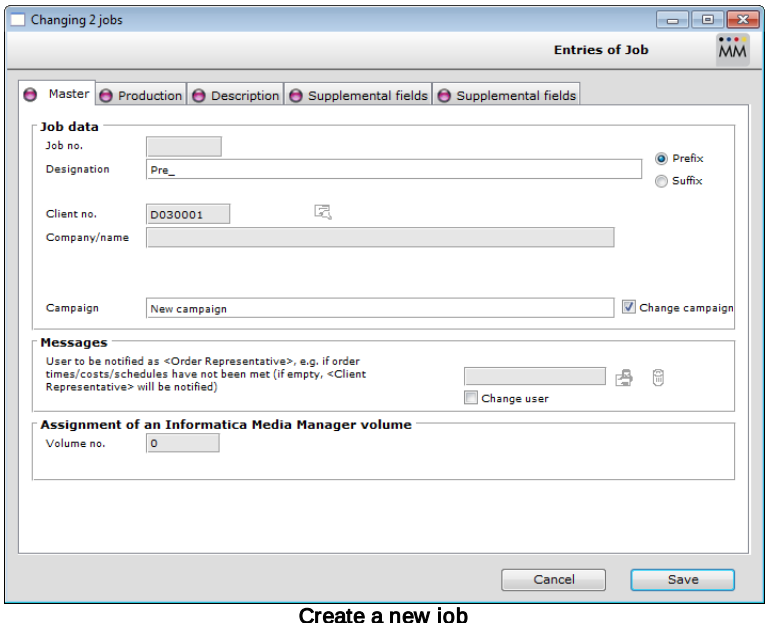

Create a new job

3. You should now assign a job number and a designation for your new job.

> **Note:** These can only be entered if Product 360 Media Manager is not running in a mode with pre-assigned customer and job numbers. If you cannot assign the job number manually, the job number is made up of a two-digit year code, e.g. "07" for 2007, and a sequential number.

4. You then select the relevant customer using and, if you wish, enter a designation under "Campaign".
5. In the "Messages" area, you can select a user who will be notified of key events, e.g. if job deadlines or costs are exceeded. If the field is left blank, the customer contact is notified.
6. Then assign the job to a Product 360 Media Manager volume.
7. On the "Production" tab, you can enter production data, e.g. deadlines or costs.
   - In the "Production data" area, you can define the dates for the "Production start" and "Completion". You can also enter the creation date and the date of the last edit. The corresponding check boxes allow you to set the "In progress?" and "Finished?" status. The entry "Finished in %" provides approximate information about the production status.

> **Note:** The value in the "Finished in %" field is calculated based on the "Target hours" and "Actual hours" and is continuously updated by Product 360 Media Manager during production.

- In the "Times/Costs" area, you can specify the number of "Target hours" planned for the job and how the "Target price/costs" are applied. These include not only working hours but also production materials and all other costs incurred in the course of the workflow recorded by Product 360 Media Manager. In this area, you can also query the"Actual hours" and the "Actual price/costs". Entering target values is not mandatory but is recommended to allow a meaningful product costing analysis.
- In the "Production status" area, you can specify the current production status of the job, e.g. "All job data transferred out" or "Job finished".

8. On the "Description" tab, you can enter information about the job in a Memo field.
   - To insert a previously created form, click on . Then select a form in the "Form selection list".
   - You can use to copy the description text to the clipboard, e.g. so that you can edit it in a word processing program or paste it into an e-mail.
9. On the "Extra fields" tabs, you can define additional fields of your choice.

Note: You can change the designations of the additional fields in the Administration module under **System > User-defined fields**. Note that the you must restart the Production module on your workstation for the changes to be visible.

Note: When recording a new job, an entry with the group designation "*Main project*" is automatically added to the job groups. This group entry is not visible in the group administration. It must be explicitly edited in the management functions for the job itself. The entry has an organizational function within Product 360 Media Manager and its database structure.


10. Click on **Save** to save the job.
    - The new job created will appear in the "Job overview list".
11. In the “Overview list jobs” you can open a job for editing by clicking on .

Note: If you select multiple jobs changes will be saved for all of them by ticking the check boxes.

4.1.2 Selecting a job directly

Select **Production > Production > Select via job** to open the job overview list. This window provides you with standard functions. The following functions are also available:

- : Change status/confirmation
- : Unlock locked job
- : Lock job only

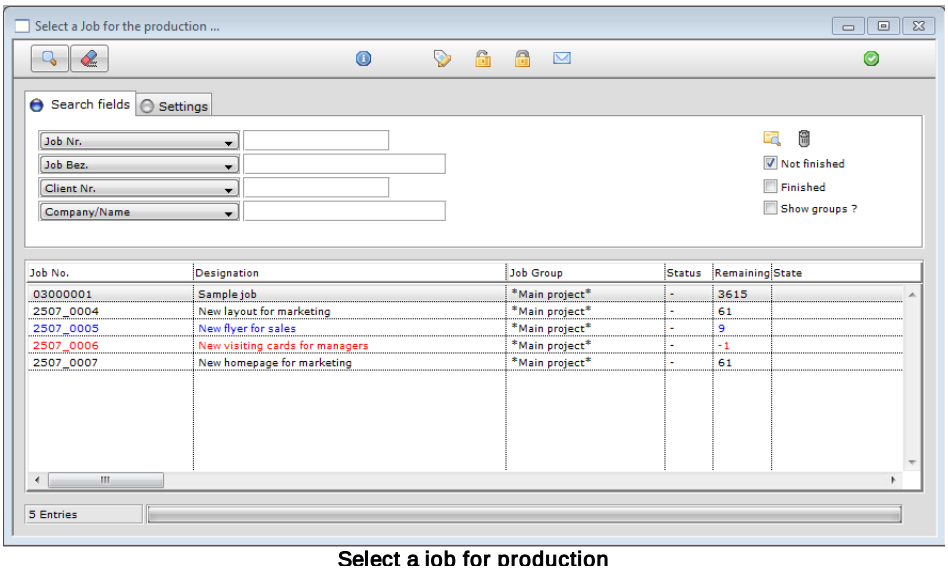

Select a job for production

Note: In the Administration module, you can define extra job fields using **System > User-defined fields** – these are then available on the "More search field" tabs (x2).


- For example, if you want to search for jobs by the associated job number Product 360 Media Manager allows you to use wildcards (placeholders) in your search.
- You can also use the "Finished" and "Not finished" options on the "Search fields" tab to filter the search for all jobs that are finished or not finished.
- The "Sorting" tab provides you with a range of sorting options, e.g. by "Company" or "Contact".
- The "Settings" tab allows you to adjust the behavior of the job search.

In addition to the general data for the job, such as job number, designation and status, the list contains additional information about the job itself. Clicking on the "Show groups?" option on the "Search fields" tab allows you to display the individual job groups in the jobs. The "Remaining days" column shows the time remaining in days until the completion deadline for the job.

Note: The "No. of days until alarm for job deadline" determines whether the relevant jobs are highlighted in green, blue or red. You can adjust this function in the Administration module under **System > System parameters** on the "Planning" tab.

- You can also use to show additional information about the selected job, e.g. the customer, deadlines or production status.

- allows you to assign production statuses and to change the deadlines for jobs or associated job groups. In the "Status?" field, you can only select the production statuses that are assigned to the general activity "*WORK STEP*". This function is equivalent to changing the production status in the job bag.

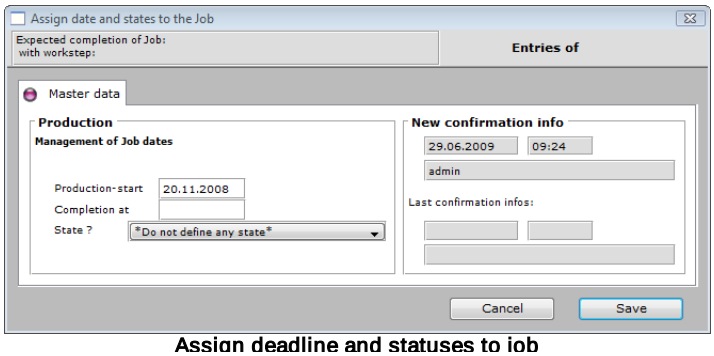

Assign deadline and statuses to job


- After the search, a selected job is transferred using or by double-clicking on the job. This opens the job bag.

Note: If only one job has been filtered, the associated job bag is opened immediately after filtering. If a job memo has previously been created (additional description of the job), this is displayed before the job bag is opened. It can be modified by the user provided that he has authorization to do so.

Tip: You can open several job bags simultaneously.

4.1.3 Editing history

In a media agency, it is usual for a user group to be involved in several customer jobs. Therefore, each user needs to know which projects have recently been edited. You can select **File > Last used** to open the editing history.



List of last projects edited


The information is user-specific and is sorted in date order, i.e. by the last editing time. A maximum of 10 entries are displayed. Each project is only referenced once, even if it has been edited multiple times. The list is updated each time the module is opened and when changes are made to the job bag.

Select **Delete entries** to clear the editing history.

Note: The project name display depends on the system settings for the Production module. If the use of number ranges is set, the name is preceded by corresponding prefixes.

4.1.4 Editing a job using the job bag

Once you have successfully selected a job, the actual production window opens and shows the job components, known as the job bag.

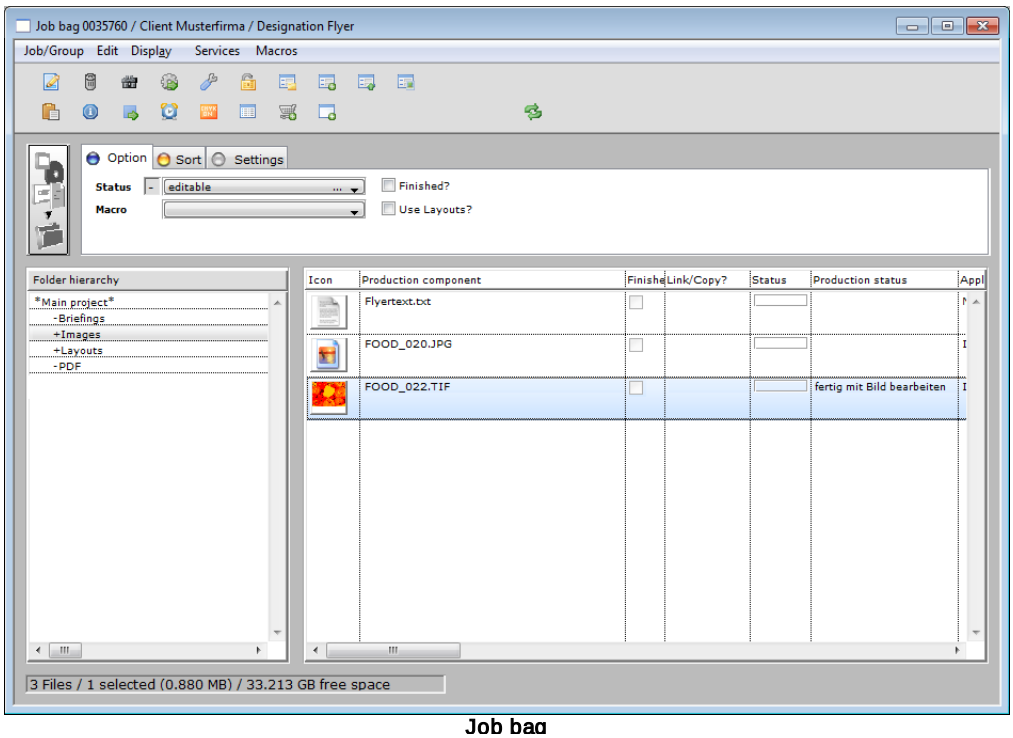

Job bag

Note: The screenshot above shows the additional buttons that can be activated. The simplified display is configured as standard. You can change this under **Job/Group > Show extra buttons**.

The job groups assigned to the job are listed in the "Folder hierarchy" area. Clicking on a job group in the list displays the job components contained in the selected job group in the "Production components" area.

The "Production components" area with the default "List with icon" setting contains the name of the file and an icon for the application assigned when the file was added. For image files and MEDIAS objects the icon is a low resolution preview of the original file. The bar at the bottom of the screen shows additional information, e.g. how much free disk space is available, or the total size of all files selected.

Those job components that contain a link to a MEDIAS object in the Medias database are identified as MEDIAS links.

Tip: If you have selected the thumbnail view in the system parameters, thumbnails are displayed instead of the icons in the job bag (see "System settings" in the Administration module).

Note: On Macintosh systems, you can select one or more job components and simply use the Drag&Drop function to drag several components into the Finder or an individual job component into an InDesign image container. When you drag the job component into the Finder, a copy is created in the relevant folder. To use the Drag&Drop function, hold down the mouse button until the egg timer disappears and the mouse pointer changes to a rectangular frame.

Double-clicking on a job component starts editing by calling up an Product 360 Media Manager editing window.

Above the "Production component" area, you will see the "Status list", the "Finished?" flag and the "Macro list". The "Macro list" displays the available macros. Selecting a macro sets and if necessary . For further information, refer to Converting/delivering to the pipeline.

The "Finished?" flag can be set manually for the job by an authorized user. Once the "Finished?" flag has been set, the job is checked for completeness (equivalent to **Job/Group > Check**).

The "Status list" displays the current status of the job or the selected job group. To change the status, click on another status in the "Status list". The archiving status "Archived" can only be assigned using the archiving menu. A prerequisite for archiving is that the job group or the entire job must first be locked. The "Status list" can contain the following attributes.

Status	Meaning
Open for editing	The job components in the job group or the entire job can be edited.
Locked	The job components in the job group or the entire job cannot be edited.
Archived	The job components in the job group or the entire job are archived.

When you assign the status "Locked", the job group or the entire job is checked for completeness.

4.1.4.1 Menu functions in the job bag

The following functions are available in the menu bar for the job bag:

Job/Group

Menu option	Meaning
Info	Displays the job data in a separate window.
Memo	Allows you to display and edit the job memo
Refresh	Used to rescan the job components
Disable preview generation	Disables the generation of previews when adding job components to the job bag, allowing them to be added more quickly
Check/update current group only	If you enable this option, when you call up the **Job/Group > Check** option only the currently selected group will be checked

Menu option	Meaning
Check	Used to check the job directories and the associated database entries. The check includes all groups and directories for the job. The result of the check is displayed as a report. Missing files are deleted from the database immediately.
Show duplicates	Displays duplicates in the job bag. Duplicates are identical file names with different capitalization. As this only happens in UNIX file server systems, e.g. Helios, you should avoid duplicates of this kind as they can generally cause problems in different applications.
Assign state	Allows you to modify or set production statuses and deadlines for a job group or the job.
Creating a job group	Allows you to create a job group within the current job
Automatic refresh	Allows you to automatically check the job bag against the job folder. In contrast to a normal check, in this case the number of files is checked and if it is different the corresponding files are added or the database entries are deleted.
Show messages	Clicking on this option enables you to display warning and error messages immediately when you select the corresponding action, e.g. when adding files. If the option is not enabled, a log of the actions is listed at the end.
Display supplemental buttons	Activates or deactivates the additional toolbar
Start FolderManager (Macintosh systems only)	Allows you to work directly in the folder alias for the job bag on the desktop. Changes are automatically updated when you click on the job bag again.
Check OPI	The layout images are included in the check.
Close	Closes the active job bag

Edit

Menu option	Meaning
Add new	Add one or more new files, a template, MEDIAS components etc.
Edit/Rename	Modify the job component
Delete	Deletes job components or files from the job bag
Duplicate	Copies a selected job component
Moving	Move the selected job components to a different job group in the same job

Menu option	Meaning
Copy to directory (check out)	Allows you to copy selected files in the job bag to a selected folder. The copied object is then assigned the status "Checked out" as long as the "Check out" option is enabled. Otherwise, the selected object can be copied to a selected folder without being assigned "Checked out" status. The file then remains editable for other users. To cancel the "Checked out" status, click on . This can only be done by the administrator or the user who actually checked out the object. To check the file back into production, first unlock and delete the old file and then add a new file of the same name. This cancels the "Checked out" status. The "Checked out" status is displayed in the overview list for every MEDIAS object.
Enable check out	If checking out is enabled, files can be checked out using the "Copy to directory" function described above, i.e. the files are given "Checked out" status and can no longer be edited by other users. If checking out is not enabled, the objects can only be copied to a selected folder, i.e. the files are not given "Checked out" status and can still be edited by other users.
Print	Allows you to print out the component list.
Show path	Displays the file and directory path for the selected job component.
Path call	Opens the directory in which the file for the selected job component is located
Searching	Allows you to search for file names
Select/Deselect for MEDIAS addition	Selects or deselects the job component(s) for automatic addition to the Medias module
Lock/Unlock component	Allows you to lock and unlock individual job components for further editing, provided you have the corresponding authorization.
Transfer to media order job	Used to add a selected file from the job bag to an open media purchase order.
Convert/Deliver in PIPELINE	Allows you to convert and edit selected files in the job bag using a defined pipeline. This requires a valid license for the Pipeline module

Show

Menu option	Meaning
As list	Displays the content of the job bag as a list
As list with icon	Displays the content of the job bag as a list with icons
As tablet	Displays the content of the job bag as a tablet

Menu option	Meaning
Enable/Disable folder hierarchy	Activates or deactivates the folder hierarchy
Show all files in main project	Displays all files in the main project
Arrange	…by file name …by application …by state …by date
View options	…CMYK on …Show MAC name
Sort group	…by folder/directory …by name

Services

Menu option	Meaning
InDesign (on Macintosh systems only)	Check, collect, exchange and assign images in InDesign.
Production times of job	Displays the overview list of production times for the current job. If you have the appropriate authorization, you can view, create or delete production times.
Production materials of the job	Displays the overview list of production materials for the current job. If you have the appropriate authorization, you can view, create or delete the materials.
Image analysis	If you are using HELIOS and the Pipeline module, you can use this option to perform an image analysis on a non-archived file. All information is displayed, for example color channels and color profiles.
Do touch	Forces an update of the Helios OPI layout image.
New previews via MEDIAS	Forces an update of the preview image for the job component.

Macros

Menu option	Meaning
Use layout image	When using OPI, you can use the layout image for the subsequent macro action here.
Your macros	Here, you can select and start the available macros.

4.1.4.2 Icons in the job bag

Icon	Meaning
	Display, change or rename file information
	Deletes a selected job component, together with the corresponding file. If the job component is a MEDIAS link, the link is deleted but the MEDIAS object itself is not.
	Opens a window and shows the detail view of the selected job components, if this exists or can be generated.
	Allows selected job components in the job bag to be converted and edited using a defined pipeline (requires a valid license for the Pipeline module)
	Edit one or more job components
	Unlock a checked out job component – this can only be done by the administrator or the user who checked out the job component. The function cancels the "Checked out" status for a job component
	Adds a multimedia component as a new job component. This can be a folder, a directory or a file. The name of the file can be changed directly when it is added.
	Adds a template file to the job bag
	Adds existing job components to the job bag
	Adds a MEDIAS object to the job bag
	Checks a InDesign document for missing images (Macintosh only)
	Copies the file path for the selected job component to the clipboard
	Allows you to display and edit the job memo
	Exports the job component into another application using a macro
	Allows you to manually post times for jobs
	This icon switches between "CMYK on" and "CMYK off". Here, you can activate or deactivate display of the job components for EPS master files and four-way separation. For example, if CMYK display is deactivated, display of the files `test.eps`, `test.eps.C`, `test.eps.M`, `test.eps.Y` and `test.eps.K` is reduced to display of the file `test.eps`, increasing the clarity
	Switches between "Icon", "List" and "Tablet" views
	This icon is only activated in the list or icon view. It allows you to add selected job components from the overview list to a media purchase order. The items window for a media purchase order must be open. Alternatively, this icon can be used to create a new media purchase order.
	This icon allows you to add a single file to the job bag


Icon	Meaning
	Used to export the file path for the layout image for a selected job component using a macro selected from the "Macro list". The icon is only available if the valid name of the layout images subdirectory is entered in the system parameters. When you click on the icon, the system searches for the layout image belonging to the selected job component in the layout images subdirectory. If it is found, its file path is transferred to the macro.
	Retrieve new previews from Medias

Tip: Use the memo function. It allows you to enter job-specific descriptions or comments about the job for yourself and your employees. Enter your short name and the date for future reference.

Note: Note that several job bags can be open at the same time. On Macintosh systems, a folder alias is automatically created on the Desktop for each job, which shows your specific job components. If you do not want this to happen, you can change the setting in the Administration module by selecting **System > System parameters** on the "Production" tab.

4.1.5 Checking a job

1. Open **Production > Production > Select via job**.
   - The "Show jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Select a job.
   - The "Job bag XXX" window opens.
4. Select **Job/Group > Check** to check a job.
   - When the check is complete, a report is displayed.

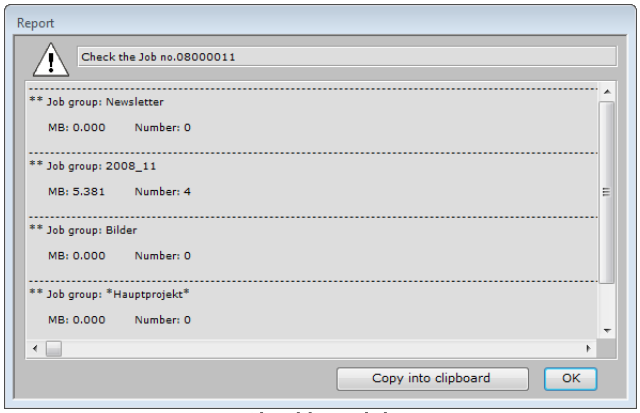

Checking a job

If files that were present in the database no longer exist, these are automatically deleted from the database.

Note: After the check, if you are asked whether you want to add the files found, make sure that this action is always carried out from the platform – Windows or Macintosh – from which the files were copied to the directories. Otherwise, particularly with long file names, the file name can be entered incorrectly in the database.

4.1.6 Transferring job components directly to the MEDIAS database

Selecting one or more production components in the job bag and using the relevant menu options allows you to select or deselect the marked production components for transfer to the Medias database. The transfer is carried out by the Service module. In the system parameters you can specify whether you want the production components to be transferred as a copy or a link. Linked MEDIAS objects explains the difference in more detail. Of course, production components can still be added using "Add from file" in the normal way. Transfers to Medias can also be carried out using the Pipeline module.

4.1.7 Adding job components

Adding a new job component involves copying the file to the job directory on a Product 360 Media Manager volume and automatic entry of certain data for the new job component in the digital job bag.

In addition, the file extension or the file type is used to assign a default application. For a MEDIAS link, the file is not copied, a link to the database entry for the MEDIAS object is merely entered.

If the new job component added is an image file, an attempt is made to generate a preview from the original file and to display this as an icon. The formats supported are described in more detail in the documentation for the Medias module. For a MEDIAS object, its preview is used. By default, the icon for the assigned application is shown. Preview generation can also be suppressed using the corresponding parameter in the system parameters.

You can add the following to a job:

- New job components by adding templates, e.g. adding a blank InDesign template to set up a InDesign document for the customer. In this case, the file name can be changed directly when it is added.
- An individual file, e.g. graphic or text.
- Multiple files at once, e.g. different text files.
- Existing job components, e.g. job components from a different job.
- MEDIAS objects, e.g. customer logos saved in the Medias database.

Note: The Product 360 Media Manager system detects whether the file selected for adding is already contained in the correct directory and, in this case, suppresses copying or moving of the file.

4.1.7.1 Creating new components by adding templates


Templates are the basis of production in digital businesses. They can be InDesign documents, Adobe Photoshop files or AutoCad drawings, each with specific default settings. You can create these templates yourself in your standard applications and store them anywhere on your hard disk or network server.

In digital production, it often happens that new files need to be created by different applications within a job. In order to be able to record all the data that occurs during production when creating the files, a new job component for a job should always be created in Product 360 Media Manager by adding a template file. This adds a largely blank job component to the job bag and ensures that all production data is recorded when the job component is subsequently edited, e.g. the type and duration of activities.

What is more, the use of well-designed templates saves you the unnecessary work of making certain default settings every time a file is re-generated.

Tip: Choose a suitable name for your personal template directory, e.g. `C:\TEMPLATES` under Windows or `TEMPLATES` under Macintos.

1. Open **Production > Production > Select via job**.
   - The "Display jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Select a job.
   - The "Job bag XXX" window opens.
4. Select **Edit > Add new > Using template** in the current production window.
5. Select a template file and confirm by clicking on **Open**.
   - The "Enter the new file name" window opens.

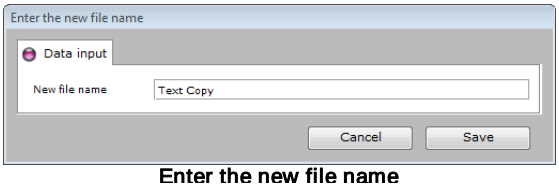

Enter the new file name

6. Enter a new file name.
7. Click on **Save**.

4.1.7.2 Creating new components by adding a sample file

First, you need to create templates for the applications that you use, such as Adobe Photoshop or InDesign. You can then select these in the Administration module by selecting "Template path for application" in the application properties under **Master > Applications**. You then have access to the templates for production purposes.

1. Open **Production > Production > Select by job**.

➪ The "Display jobs ..." window opens.

2. Click on .

➪ The jobs are displayed.

3. Select a job.

➪ The "Job bag XXX" window opens.

4. Open **Edit > Add new > Using sample**.

➪ The window for selecting and entering samples opens.

5. In the list of applications with sample files, select the one you want to use to create the new file.

6. Enter the new file name, as it will subsequently appear in the job.

7. Click on **Save**.

➪ After you enter the new name, the file is added and its associated production window is opened immediately. Here, you can enter details of the activity, the production status and the cost center for the job component.

4.1.7.3 Adding old job files

1. Open **Production > Production > Select by job**.

➪ The "Display jobs ..." window opens.

2. Click on .

➪ The jobs are displayed.

3. Select a job.

➪ The "Job bag XXX" window opens.


4. Open **Edit > Add new > Old job files**.

➪ The "Production components selection list" window opens. This window provides you with standard functions. The following functions are also available:

- : Shows a preview and additional information about the selected production component
- Opens the selected production component using an associated application.
- : Allows you to use the Pipeline module for automatic restoration and conversion (requires a valid license for the Pipeline and Archive modules)
- In addition, the "Settings" tab allows you to toggle between a view of the production components with and without icons. "Preview on/off" and "Info window on/off" show or hide additional information about the selected production component.

5. Click on .

➪ The production components are displayed.

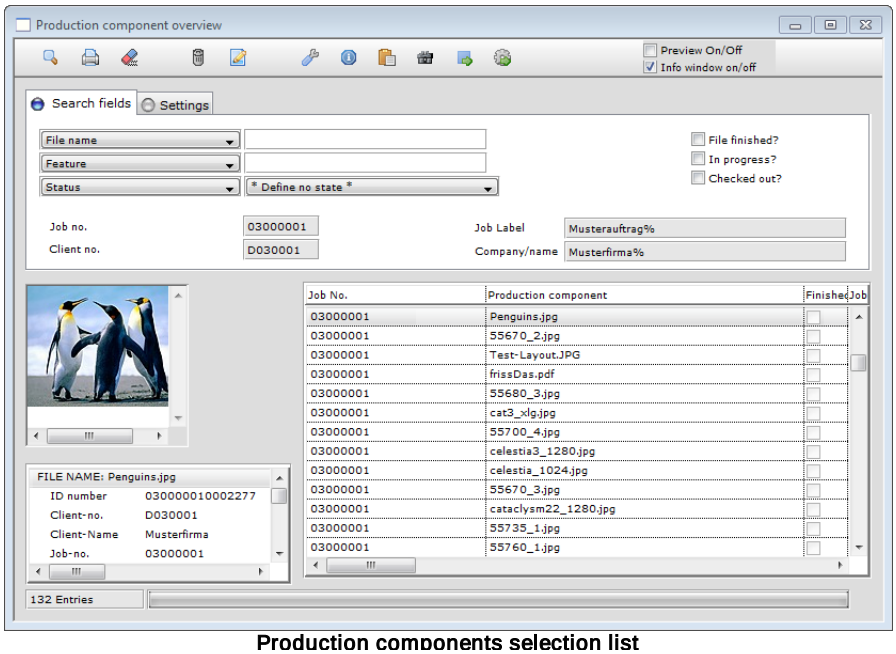

Production components selection list

6. Select a production component and transfer it using .

   ➪ Clicking on starts addition of the production components. To cancel this process, click several times on **Cancel** as the process can only be cancelled in a defined status.


Note: If you are transferring production components from archived jobs restoration must be carried out first. To automate this procedure, the archived production components are copied to the action basket, from where they can be restored either individually or collectively.

4.1.7.4 Adding MEDIAS objects to production

You can link or copy MEDIAS objects in the job bag. Like any other file, a MEDIAS object can be copied and added to the job bag. If you choose a link, on the other hand, only a link to a MEDIAS object from the Medias database is saved. This option allows you to store frequently used production components, e.g. drawings, documents, images, video sequences or sounds, in a single, central location.

If you want to edit a MEDIAS object, you need to copy it from the Medias database to an internal job for which you act as the customer, edit the object, delete the old MEDIAS object and add the edited MEDIAS object. This is the tried and tested procedure.

1. Open **Production > Production > Select by job**.
   - The "Display jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Select a job.
   - The "Job bag XXX" window opens.
4. Open **Edit > Add new > MEDIAS components**.
   - The "Search and query" window opens. This window provides you with standard functions. The following functions are also available:
   - : Provides a preview and detailed information about the MEDIAS object.
   - : Automatically edits and converts selected MEDIAS objects in a defined pipeline
   - : Edits the selected MEDIAS object

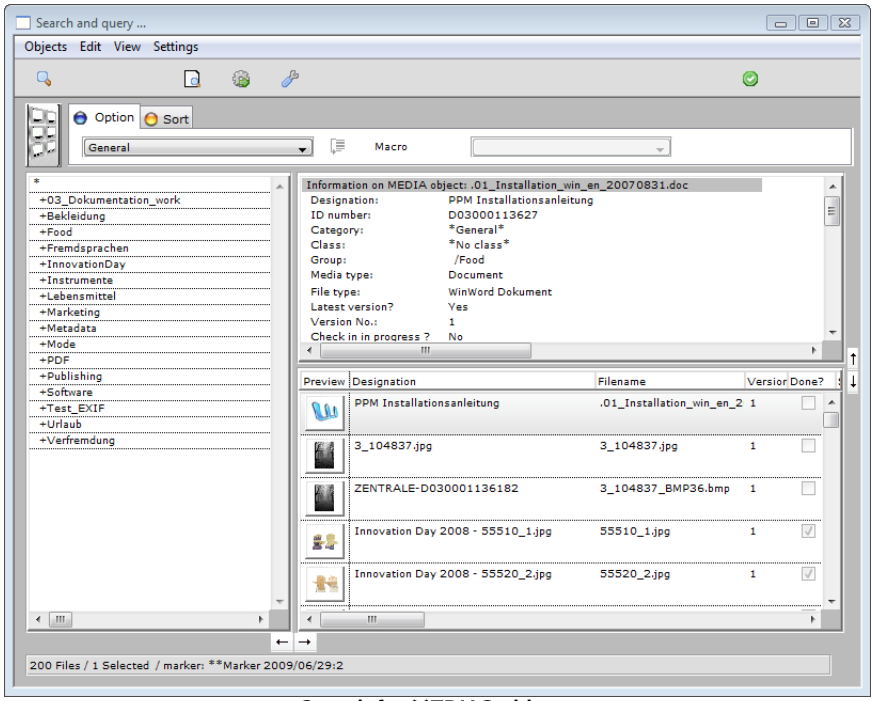

Search for MEDIAS objects

5. Search for the desired MEDIAS object.

Tip: A detailed description of searching for MEDIAS objects can be found in the documentation for the Medias module.

6. Select the MEDIAS object.
7. Click on or double-click on the object.
   - A message opens, asking whether you want to link or copy the MEDIAS object.
8. Click on either **Link** or **Copy**.
   - The MEDIAS object is linked or copied in the job bag.

Note: If you want to add archived MEDIAS objects, you must restore them first. To automate this procedure, the archived MEDIAS objects are copied to the action basket, from where they can be restored either individually or collectively.

4.1.8 Editing job components

Job components are edited using applications, e.g. InDesign documents using InDesign. When adding a job component to a job, Product 360 Media Manager attempts to read the ID of the associated application and assigns the available application to this job component.

The application itself is installed by the administrator on a local or server drive and is set up globally in the Product 360 Media Manager system. In order to edit job components from the Production module, Product 360 Media Manager must know the local path for the relevant applications. You should assign these local paths for the applications used once on your workstation, if the application is available locally and this has not already been done by your administrator.

Note: You can only change the file name of an added production component using or **Edit > Edit/Rename** and not directly in the file system.

Tip: If you cannot see the Windows names of components added under Macintosh on a Windows computer, you should check whether the settings on the "Network" tab under **System > System parameters** in the Administration module are correct.


When you edit components, e.g. InDesign documents, you should always save the overview under Macintosh. This is the only way that Product 360 Media Manager can generate an icon from the overview.

4.1.8.1 Editing job components in an application

1. Double-click on the desired job component in the job bag to start editing of the job component.

   ⇨ The editing window opens. This contains the following functions:

   - : File path for job component
   - : Copy file path for job component to clipboard
   - / : Stop or continue production time recording
   - : Start job component with linked application

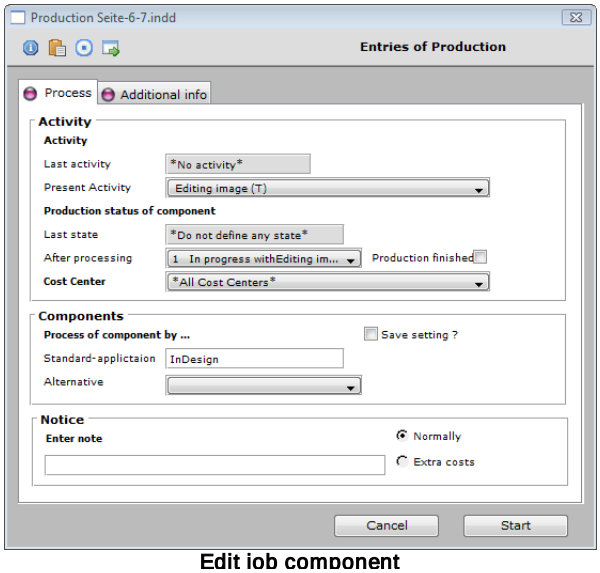

Edit job component

> **Note:** If the job component is already being edited by another user, is locked or has a "Finished" flag, a corresponding message is displayed.

2. In the editing window, you can enter various information about the job component. Here you specify the last time the component was edited, its current size in bytes and the type of the last activity, the current production status and the default application.
   - If you use cost centers, start by selecting the valid cost center from the "Cost Center" list.
   - Then select the activity you want to execute from the "Present activity" list.
   - From the list of production statuses next to "After processing", select the production status you want the job component to have after editing.
   - If necessary, select an alternative application under "Alternative". To save your settings, select the "Save setting?" checkbox.
3. The "Additional info" tab displays additional details of the job component to be edited, such as its size or the date on which it was last edited, as well as details of the underlying job.
4. Click on **Start**.

   ⇨ The application opens and the job component is loaded for editing.

> **Note:** Make sure that you do not close the open editing window during editing.

5. After editing, save the production component in your application. Do NOT use the "Save as" option.
6. Go to the editing window.
7. From the list of production statuses, select the one that is applicable for the job component after editing.
8. You can also manually assign the job component a "Production finished" flag to indicate which job components are finished and are available e.g. for delivery to the customer.
9. In addition, you can decide whether the activity that has been run involved a standard cost or an extra cost. You can enter a short note on this. Extra costs and the corresponding notes can be analyzed in the statistics.
10. Click on **Save** to save the production data entered in the editing window.
11. If the "Enable production times/materials?" option is selected on the "Production" tab in the system parameters in the Administration module, the production time can be acknowledged manually when saving.
    A window opens showing details of your production and the number of hours recorded for the activity executed. You can change the number of hours here if required. If you have made the relevant setting in the system parameters, the hours can be entered in hours and minutes rather than in decimal format. Click on **Save** to save the production data.

Note: If the job component is an image file, you will be asked when saving whether you want to use the edited job component to create a new preview for the production window or – if it is a MEDIAS link – also for the Medias database.

4.1.8.2 Importing an image to an image container in InDesign

Imagine the following situation: You are using the Product 360 Media Manager system to edit an InDesign document in the current job and you want to integrate an image component from the job into the InDesign document from the production window.

Macintosh

1. Select an image container in your InDesign document.
2. Switch to the job bag in Product 360 Media Manager.
3. Click on the image component you want to integrate.
4. Select **Macros > Import image -> InDesign**.
   - The production component is loaded to the image container you previously selected.

Note: If you want to load the layout image instead of the original, you need to select **Macros > Use layout image** first.

Windows

1. Click on the production component to be integrated in the job bag.
2. Click on .

3. Select the image container in your InDesign document.
4. Open the window for importing an image file by pressing the keyboard shortcut `CTRL+D`.
5. Next, place the cursor in the file name field and press `Ctrl + V` on your keyboard to copy the component path.
6. Click on **Open** to import the selected production component into your document.

4.1.8.3 Unlocking a component for editing

The "In progress" flag must be canceled manually if, for example, your computer or network server crashes unexpectedly while a component is being edited. Unless you first cancel the "In progress" flag manually, any attempt to edit the component again will fail as the system will assume that the component is already being edited by a user.

The procedure for unlocking a component is as follows:

1. Select the corresponding component in the job bag.
2. Click on .
   - The "Modify production component" window opens.
3. Open the "Production data and properties" tab.
4. In the "Production data" area, disable the "In progress" flag.
5. Click on **Save** to save the changes.

4.1.9 Creating a job group

If you want a job to consist of a large number of job components, it makes sense to divide the job into what are known as job groups. A job group could be called "Images", "Graphics", "Texts" or "Pages". The sole use of this division is to structure the job components and thus improve their clarity. Job groups are used to divide jobs into various areas. For example, a job could be divided as follows.

```
*Main project* (created automatically)
  > Images
    > Vector data
    > Bitmap data
  > Texts
    > Page 1-12
    > Page 13-24
    > Page 25-32
```

Note: When recording a new job, an entry with the group designation "*Main project*" is automatically added to the job groups. This group entry cannot be deleted in the group administration function, and can only be modified to a limited extent. It has to be explicitly managed via the job administration function. The group with the group designation "*Main project*" always represents the whole job.

1. Open **Production > Production > Select via job**.
   - The "Display jobs ..." window opens.

2.Click on .


➪ The jobs are displayed.

3.Select a job.

➪ The "Job bag XXX" window opens.

4.Open **Job/Group > Create job group**.

➪ The "Create new job group" window opens.

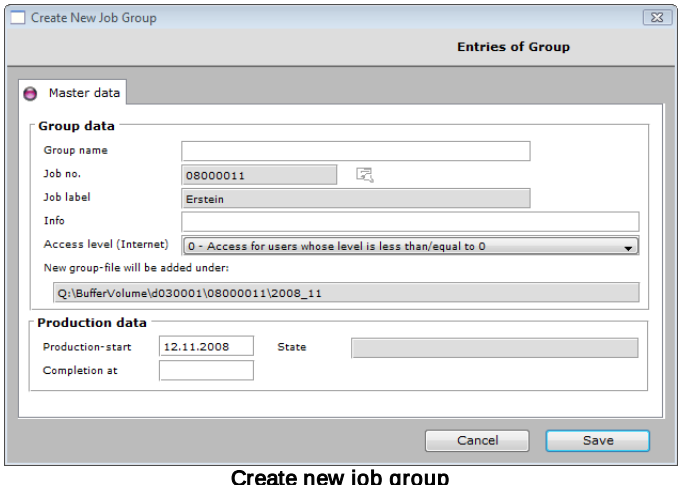

Create new job group

5.Enter a short description of the job group, e.g. "Images" or "Drawings", as the "Group name". The job number field is automatically filled with the number of the job that is currently in progress. You can also enter additional information and production deadlines.


6.Click on **Save** to save your entries.

Note: You can also create job groups by selecting **Master > Job groups** in the Administration module.

4.1.10 Checking InDesign documents

InDesign documents can be checked for missing images using **Services > InDesign > Check/ collect images** () in the production window. To do this, the document to be checked must be selected in the job bag and the Adobe InDesign program must be opened.

Note: This function is only available under Macintosh.

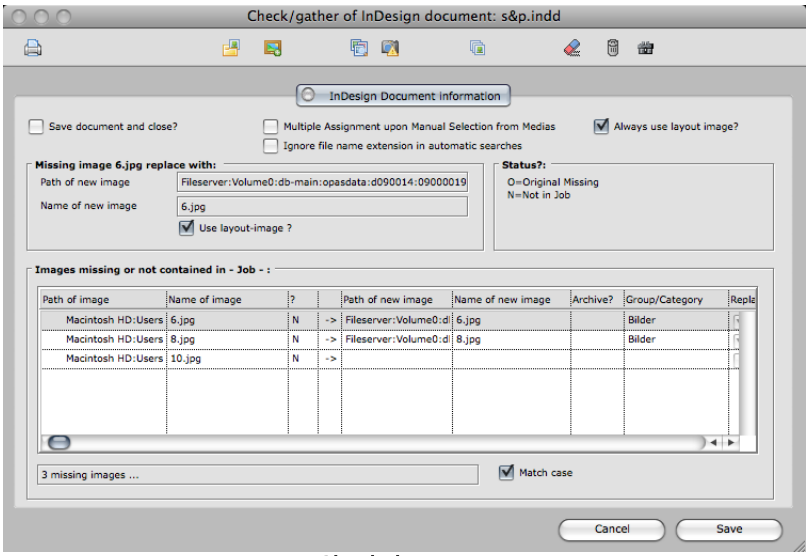

Check document

If missing images are identified, these are displayed in the list. There are now three different options for replacing the missing images.

- "Manual": Manual replacement of images by selecting an image.
- "Job": Search for the missing image in the current job – the image may have been moved to a different job group
- "MEDIAS": Search for the missing image in the MEDIAS area for the customer for the current job – the customer may have supplied the InDesign document with built-in layout images, which means that the path assignments are no longer correct

Button	Meaning
	Prints a list of the missing images
	Allows manual assignment of the missing image
	Selects a MEDIAS object for the selected image
	Searches the current job for the missing images
	Searches the customer's MEDIAS area for the missing images, not links
	Collects all images as fine or layout images for output
	Removes a set file path
	Deletes the complete entry on a line
	View new images

Note: Searching in the customer's MEDIAS area allows you to conveniently produce with external integration of OPI data. For example, a customer receives OPI data from the service provider or obtains it via a remote link. He then integrates this OPI data into his document. After this integration, he sends the document to his service provider for printing. He then opens a job and adds the document, which of course means that the path assignments are no longer valid. The service provider can now check the document for missing images and then search for and replace them in the customer's MEDIAS area. The document can then be printed.

When you select the images to be replaced, in the upper section of the window you can choose whether you want to replace them with the original or the layout image, if this is available. If several images with the same name are found, these are identified with the prefix "X". Before saving, you must ensure that you have only assigned one image for each old image, otherwise an error message will be displayed.

4.1.11 Action basket in Production module

An action basket is a kind of "shopping basket" to which the user can conveniently add all files to be restored and converted that are required during production. The files are then restored or converted at a time and for a purpose defined by the user.

4.1.11.1 Using the action basket

Imagine a situation in which you want to add old production components and MEDIAS objects to your new job. However, these are already archived or are not available in the format you want to use. You can now use the action basket to add these archived production components and MEDIAS objects directly when you select them or using a defined pipeline. This saves not only the data for the production components but also the purpose – in this case adding them to your new job. In this way, you can combine all the required production components and have them processed at a time you have specified or automatically using the Pipeline module in the action basket.


In general, archived or non-archived job components can be added to the action basket for the following actions in the Production module:

- Adding existing job components
- Adding MEDIAS objects for production
- Calling up **Edit > Convert/Deliver to PIPELINE** within the job bag or using

4.1.11.2 Special features of the action basket

The action basket is specified to the workstation, i.e. a user can only see the action basket set up for the current workstation and its content. The Archive module is an exception. In this case, you can view all baskets from all workstations.

The figure below shows the action basket for conversion and restoration.

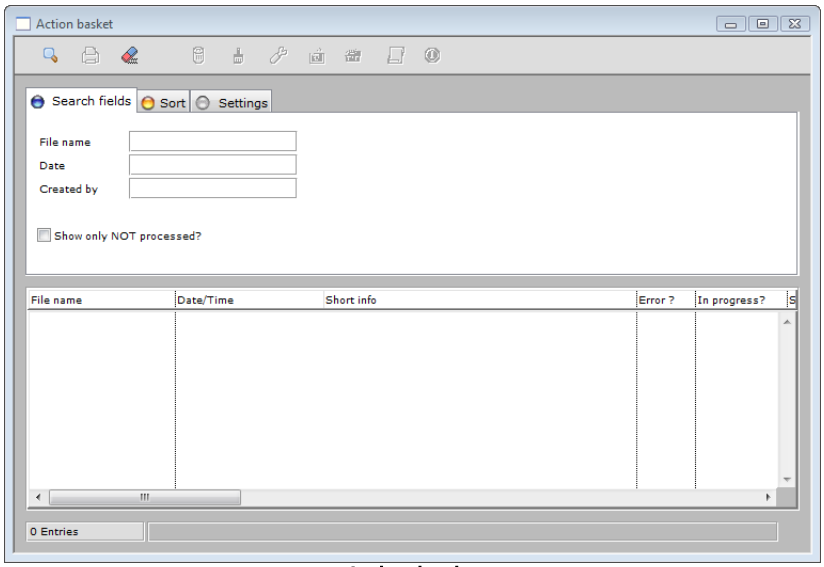

Action basket

You can open the action basket by selecting **Basket > Action basket**. This window provides you with standard functions. The following functions are also available:

- : Selects all entries in the list.
- : Clicking on this icon restores the selected components and processes them for the relevant purpose, e.g. they may be immediately added to the relevant job. Clicking displays the required media.
- : Reset error trigger and Finished status.
- : Show a component preview
- : Displays information about the individual item in the action basket in terms of editing, conversion, transfer and error analysis.

4.1.12 Converting/Delivering in the pipeline

If you have a valid license for the Pipeline module, you can convert, edit, restore and deliver files in job bags and in Medias media administration using a defined pipeline.

1. Open **Production > Production > Select via job**.
   - The "Display jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Select a job.
   - The "Job bag XXX" window opens.
4. In the job bag, click on (or select **Edit > Convert/Deliver in PIPELINE**).
   - The "Entries for editing/transferring data" window opens.
5. Follow the same procedure as that described under Converting/delivering an object.

4.2 Production monitoring


Production materials 54 can be posted directly to the job 55 to be selected in the production window using **Services > Production materials of the job** or **Production > Production materials**.

Production times 137 can either be recorded directly when editing the production components 130 or posted to the job to be selected in the production window using **Services > Production times of job** or **Production > Production times**.

4.2.1 Viewing production times

Production times are the individual processing times for the job components. During production, all accrued production data is automatically logged, e.g. activity 50 and associated hourly rate, duration, material consumption, users 36 involved in production, and others. You can manage this data under **Production > Production times**.

1. Open **Production > Production times**.
   - A blank drop-down list of jobs 55 appears.
2. Click on .
3. Select a job for which you want to view the production times.
   - The "Overview of accrued production times" window opens.

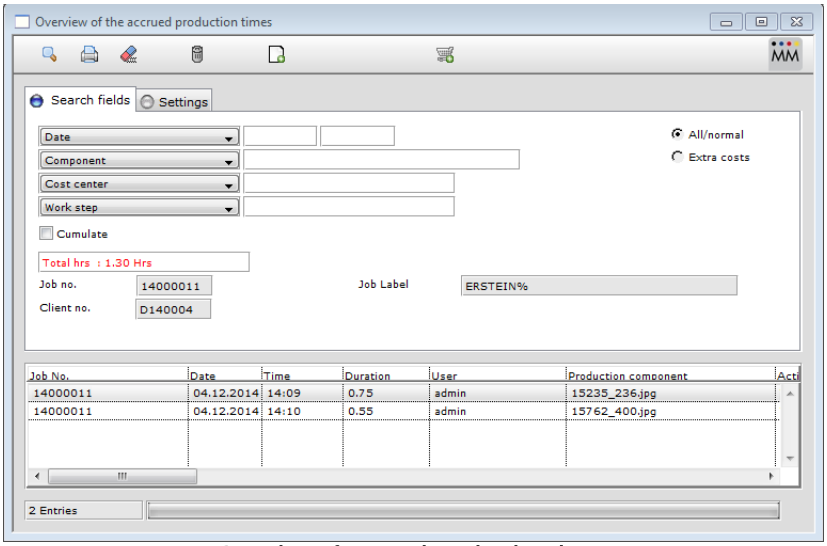


Overview of accrued production times

- Clicking on takes you to the "Overview of accrued production materials" for the same job.
- Clicking on allows you to manually post production times to the entire job. Here, you need to select the cost center 45 and the activity and then enter the processing time. You can enter times either in the format hh:mm or in decimal format, depending on the settings in the system parameters. Different entries can also be made for the date and time. You can decide whether the executed activity involved normal costs or additional costs, You can enter a short note on this. The extra cost and the note can, of course, be analyzed in the statistics.

- Selecting one or more items and clicking on allows you to delete the data for the selected production times. As a safeguard, the system outputs a message to check whether you really want to delete these production times.

An overview of the daily times can be opened and printed out under **Production > Daily time report**.

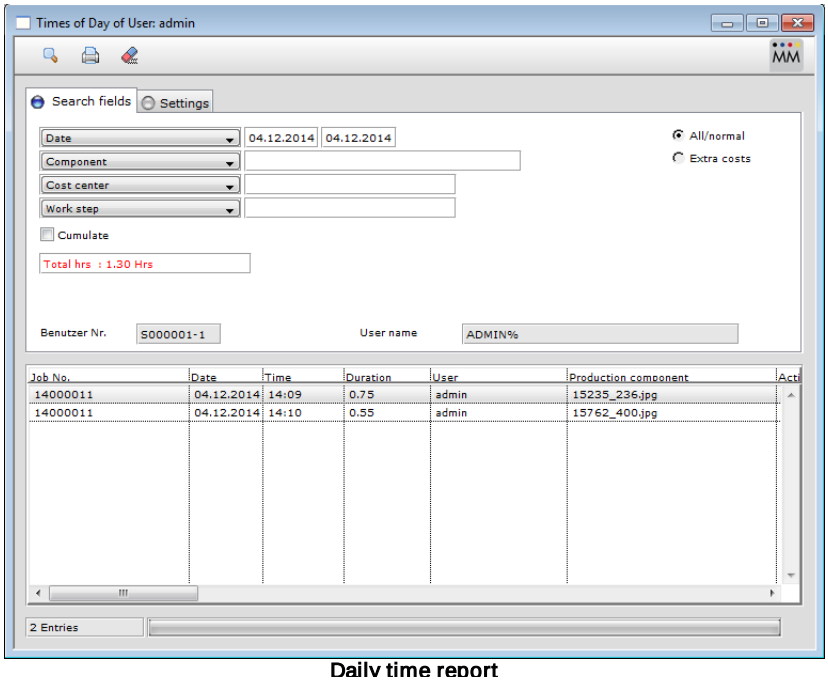


Daily time report

4.2.2 Viewing production materials

The production materials represent the consumable materials used in production. As already discussed, the consumption of materials can either be recorded directly when they are processed by an activity or entered manually. This section explains manual entry and management of consumable materials.

1. Open **Production > Production materials**.
   - The "Select a job for production materials ..." window opens.
2. Click on .
3. Select a job.
   - The "Overview of accrued production consumable materials" window opens.
   - Selecting one or more items and clicking on allows you to delete the data for the selected production materials.
   - The system asks you to confirm whether you really want to delete the production material data.
   - If the job is locked, you must set the status to "Open for editing" in the job bag for the relevant customer.
4. Clicking on opens the dialog box for entering new production material data.

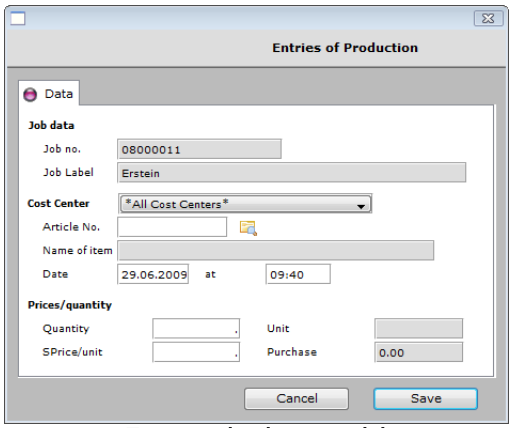

Enter production material

5. Enter a valid number for a material already recorded or click on to open the Material/Item selection list, where you can select an entry. When you select a valid material/item, additional details are displayed, including "Name of item", "Unit" and the price. You then have to enter the consumption quantity and you can also change the default "SPrice/unit". Material consumption can also be explicitly assigned to a cost center.

Note: In the Administration module, you can create materials and modify existing materials under **Main > Materials/Items**.


4.2.3 Production progress for a job component

1. Open **Master > Components > Components of job**.
   - The "Select a job for production components ..." window opens.
2. Click on .
3. Select a job for which you want to view the job components.
4. Click on again to retrieve all associated components.
   - The "Production component overview" window opens. It contains detailed information about the individual production components, e.g. the "Finished?" flag, the "Job status", job group, "Production status" and the "Link?" flag.

The "Production component overview" window provides you with standard functions. The following functions are also available:

- : Modifies several production components at the same time
- : Copies the file path to the clipboard
- : Displays a preview of the selected job component
- : Opens the selected job component using an associated application
- : Automatically edits/converts/transfers objects in the pipeline


The search options are also the same as the standard.

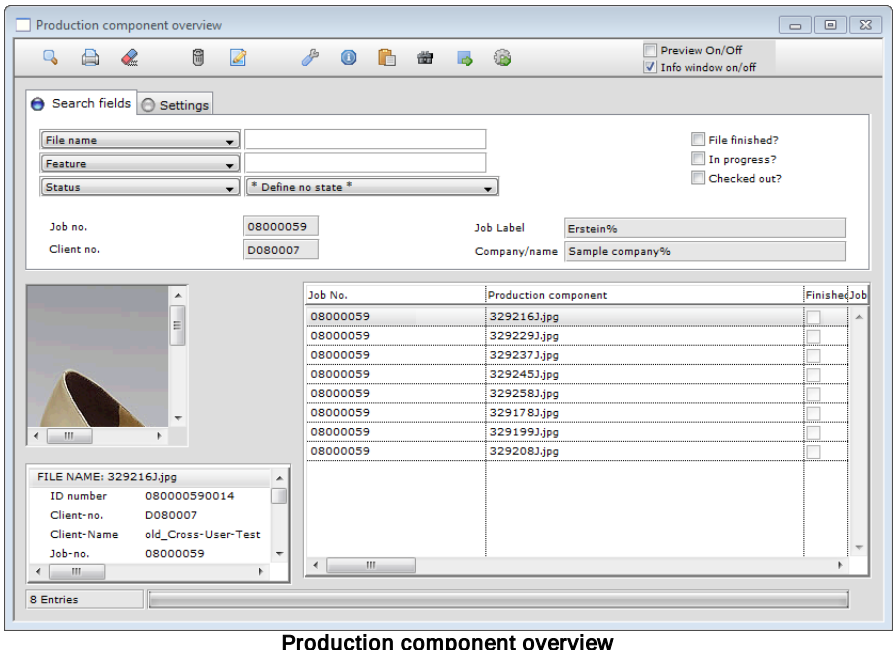


Production component overview

You can display this window in four different modes, which are controlled by selecting/deselecting the boxes in the menu bar:


1. With display of info window containing detailed information about the selected file




2. With a graphical preview in the list



3. With info window and graphical preview in the list




4. Pure overview in a table



Note: You can only change the file name of an added production component using in the production window or in the "Production component overview", not manually in the file system.

4.2.3.1 Changing the characteristics of a component

1. Open **Production > Production > Select by job**.
   - The "Display jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Double-click on the desired job.
   - The "Job bag XXX" window opens.
4. Select a production component.
5. Click on to open the "Edit production component" window.

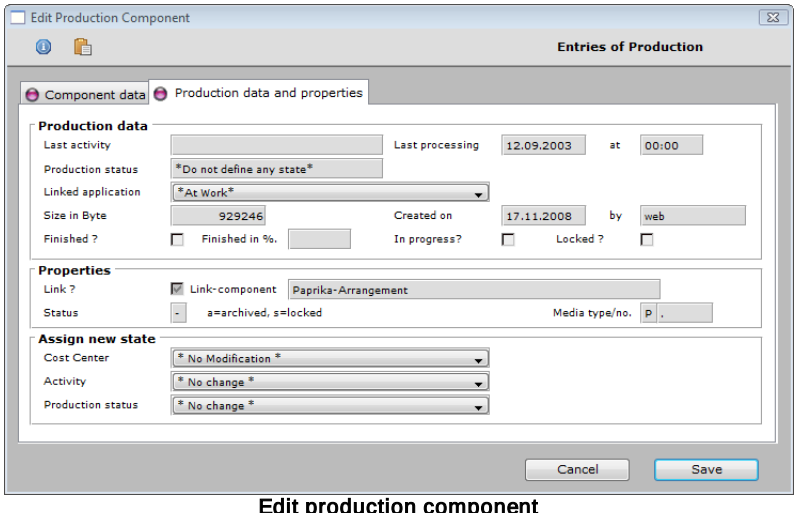


Edit production component

6. On the "Component data" tab, you can change the file name or add a characteristic text. You can only change the file name of a job component if it is not a MEDIAS link.
7. The "Production data and properties" tab shows additional information:
   - Production data, e.g. "Last activity", "Production status", "Size in bytes", etc.
   - You can also manually assign the "Finished?" flag to a job component. You can then see immediately in the production component overview list which job components are finished and are ready for use, e.g. delivery to the customer.
   - The "In progress?" flag can also be changed manually. This flag is automatically assigned when a job component is being edited and is deleted once editing is completed.
   - Under "Properties", you can see whether the job component is a MEDIAS link. Its status and "Media type/No." are also shown here.
   - In the "Assign new state" area, you can change the cost center, the assigned activity and the production status.

Note: The "In progress" flag must be manually canceled if, for example, your computer or network server crashes unexpectedly while a production component is being edited. When you try to edit the production component again after this kind of crash, editing is refused as the system assumes that the production component is still being edited by a user.

4.2.3.2 Modifying the properties of multiple components

1. Open **Production > Production > Select via job**.
   - The "Display jobs ..." window opens.
2. Click on .
   - The jobs are displayed.
3. Double-click on the desired job.
   - The "Job bag XXX" window opens.
4. You can use to simultaneously make changes to multiple selected production components. To do this, select multiple production components. To do this, drag your mouse over the relevant components or press CTRL or APPLE on your keyboard and use the mouse to select individual components. The technique for selecting components is the standard technique used for selection on your operating system.
   - The administration screen for simultaneously modifying the selected production components opens.

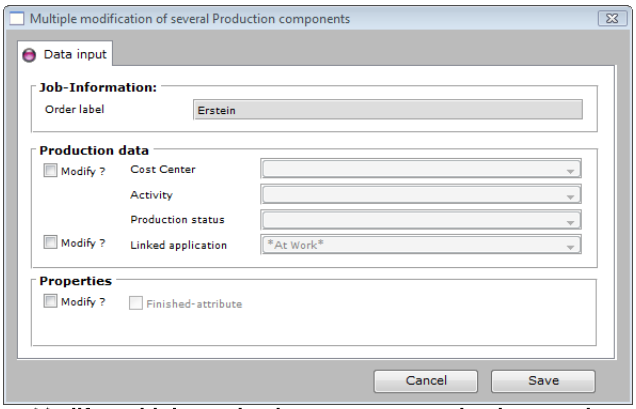

Modify multiple production components simultaneously

5. In this window, you can modify the cost center, the activity, the production status, the linked application and the Finished flag for the selected production components. To make a modification, check the "Modify?" checkbox next to each production component property you want to change. Only entries with the "Modify?" checkbox checked are included when saving.

Note: Multiple modification provides a quick method of editing the properties of production components. For example, it would make sense to modify the production status if you receive pre-edited data with a defined production status from your customer or an external partner company.

5 Media Publisher

The **Installation** manual contains information about the preparations for setting up the **Media Publisher** module.

This manual primarily refers to the use of the Media Publisher module in conjunction with the InDesign Scripting Server.

Information about operation of the Web application can be found in the **Product 360 Media Manager (Web) manual.**

Note: To manage print templates, call up the Report overview list by selecting **Publisher > Manage reports**.

5.1 Relationships in the Media Publisher module

The various data types in the Media Publisher module have specific relationships with one another. These relationships make it easier for you to organize your data, e.g. style templates and various publishing projects, and make it available to the user via the Web in various combinations.


The central element is formed by **publishing projects.** Each of these comprises a self-contained project that contains links to the source document, e.g. an Adobe InDesign file, as well as all relevant information, such as images, fonts, texts, user rights, possible output formats, frames, underlying product information and much more.

Publishing projects themselves consist of frames, which contain the texts and images, together with all settings for alignment, size and font style. All information about a frame that does not relate directly to the image, text or product information displayed is stored as **publishing elements.** Publishing elements are broken down into the smallest possible units of information. For example, there are publishing elements for the font size, font color, alignment and rotation of an image.

If you want to provide the user with specific formatting options on the Web, you can group together various publishing elements for a characteristic, e.g. text alignment, in a **publishing list.** The publishing list is linked with a frame in a publishing project and is presented to users on the Web to allow them to choose between the various options you want to provide.

5.2 Automatic mode

The following sections describe how to use the Media Publisher module. Essentially, you must always exit automatic mode before you can use the module. To do this, click on ✖ in the action basket.

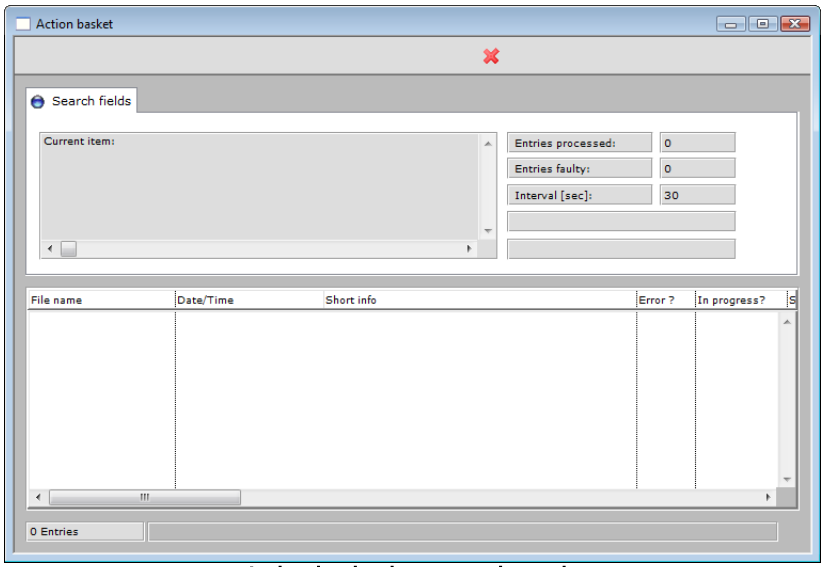

Action basket in automatic mode


5.3 Managing publishing projects

Note: To use this function, you require a user with the rights to "List MEDIAS components" and "Edit Media Publisher projects". You will find more information about user rights under Administration. 42

1. Select **Publisher > Projects**.
   - The "Publishing project overview list" window opens. Here, you can create projects and modify, copy or delete existing projects. This window provides you with standard functions. 8

Note: The "Create new publishing project" and "Modify publishing project" windows have the same content. The process is thus described using the example of creating a new publishing project.

2. Click on to call up the "Create new publishing project" window.

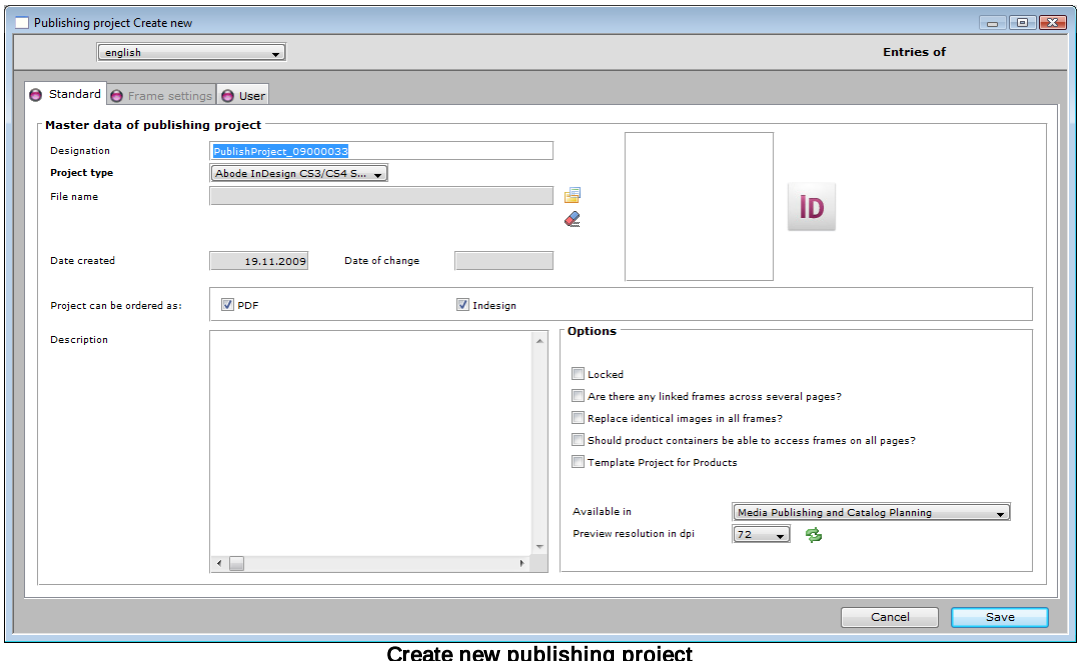

Create new publishing project

"Standard" tab

- "Designation" contains the name of the publishing project.
- "Project type" specifies the source file type for the publishing project. The choice here is limited to the licensed Scripting Engines.
- Under "File name" you can click on to specify a template document for the publishing project.
- "Project can be ordered as" specifies the formats in which the publishing project can be ordered.
- A logo is automatically generated when the document is read in. However, you have the option of inserting an image of your choice as a logo for the publishing project. To do this, click in the rectangular field next to "Logo" and insert an image via the clipboard using "Copy & Paste". You can remove an inserted image by clicking on .
- Under "Description" you can enter the text of your choice to summarize the content of the publishing project.
- Other options are also available (depending on your choice of project type):
  a. "Locked" ensures that a project cannot be used by a user on the Web.
  b. "Are there any linked frames across several pages?": Select this option if a frame covers several pages
  c. "Replace identical images in all frames?": For example, if you have a product logo on several pages, it can be replaced on all pages if required.
  d. "Should product containers be able to access frames on all pages?": Allows a product to update the frames on several pages.

e."Template project for products": Set the project as a template for presenting the product in the "Catalogs" module. This option is only available if you have a license for the module.

f. Under "Available in", select the Web front end modules in which the project can be used.

g.Under "Preview resolution in dpi" you enter the resolution of the preview.

"Frame settings" tab

Before you go to the "Frame settings" tab, you should set one or more users who will subsequently use the finished publishing project on the "Users" tab. The "Frame settings" tab is divided into further tabs.

"Users" tab

Note: You can define users' or user groups' access rights for individual frames on the "Frame settings" tab, but only once the users or user groups have been added to the project.

1.Click on to add a user or a user group.

The users or user groups added are listed under "Project access".

- To remove a user or user group from this list, select the relevant entry and click on .

2."Container/Frame access" lists the rights of the user or user group selected on the left for each individual frame on a page.

- You can use the corresponding icons to grant or withdraw rights for a page to or from a user or user group (or).
- Clicking on and allows you to navigate between the individual pages. Alternatively, you can enter the desired page number to the left of the slash that separates the current page number and the total number of pages.

"Assignments" tab

If you have selected the "Template project for products" option on the "Standard" tab, the "Assignments" tab is also displayed. Here, you specify the products to which the template will be linked.

1.Click on to add products to the template.


This opens the "Product overview list", in which you can select the products or product groups.

2.To delete a product assignment, first click on to allow the entries to be selected.

3.Then select an entry and click on .

5.3.1 Frame settings

On the left half of the "Frame settings" tab, you will find basic editing and navigation functions for the publishing project in the "Page frame" area.

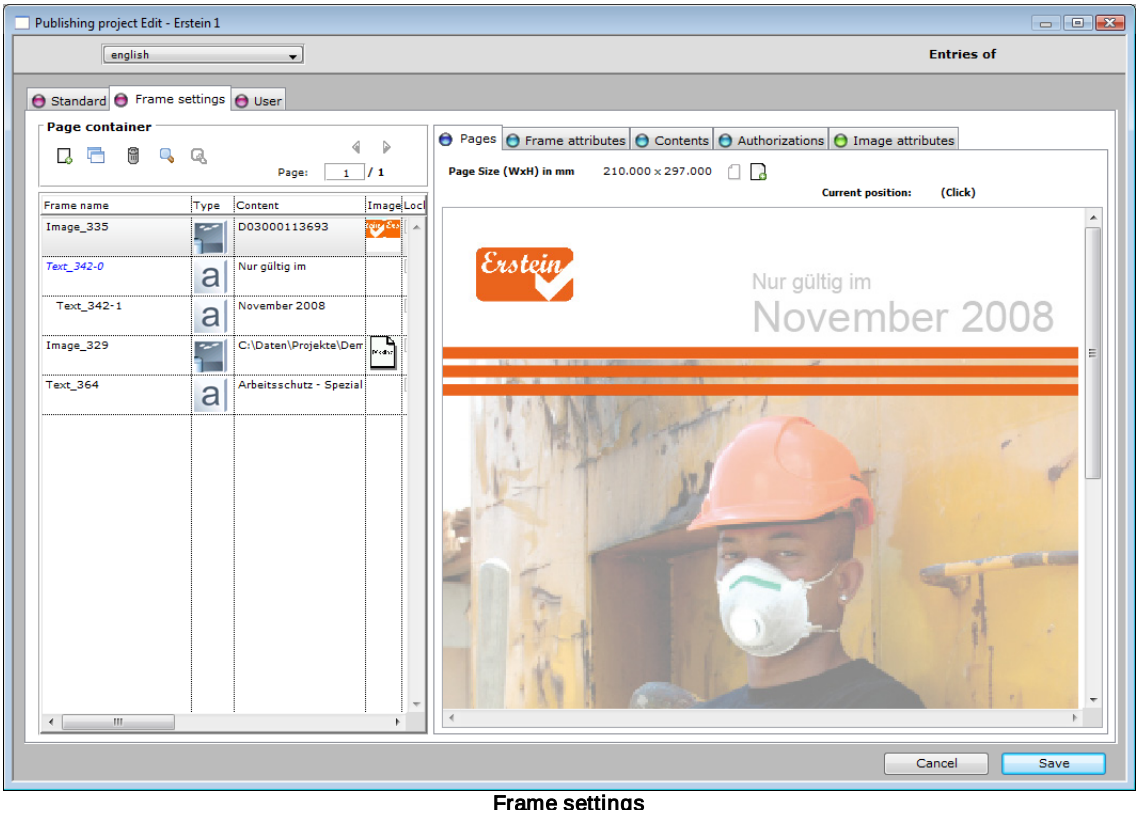

Frame settings

- Clicking on and allows you to navigate between the individual pages.
- To create, duplicate or delete selected frames, use , and .
- Clicking on opens the "Search for frame content" window. You can use this window to search the "frame content" and "frame name" on the current page or all pages for any text.
- If there are more hits for a search you have already started, you can find them by clicking on .
- To select a frame to be edited, simply select it in the list on the left of the window. Alternatively, you can click on any element in the page preview in the right half of the window to select the corresponding frame(s).
- If you find the list too long and complex, right click at any point in the list and adapt the filters used for the list as required in the pop-up menu.
- To select several entries in the list at the same time, either hold down the SHIFT or CTRL key and click on the entries in turn. However, this limits the editing options on the tabs in the right half of the window.

The "Frame attributes" tab

- You can modify the "Name of frame". The Media Publisher module automatically assigns names, but these are not descriptive designations. It is therefore useful to adapt the names for the end user.

- Under "Frame type" you will see the type, which can be "Selected image", "Freely defined text" and "Product/Item". Depending on this selection, you will either see the "Image attributes", "Text attributes" or "Product attributes" tab. The frame type is also indicated using a pictogram.
- In the "Positioning" area, you can see where the frame is located on the page. The position of the "upper left corner" and the "lower right corner" in millimeters are displayed. The zero point is the upper left corner of the page. In the upper right section of this area, you are provided with information about the dimensions of the current page.
- In the "Miscellaneous" area, you can enter a "Note/comment for the user" for the user on the Web.

"Contents" tab

- The content of the "Contents" type depends on the type of frame selected. With the exception of the "Product/Item" frame type, clicking on or displays additional information about the content of the frame or a different view of the content.
- If you have selected a "Product/Item" type frame, you will see information about the linked property fields and you can click on to go to the "Product attributes" tab.

"Authorizations" tab

There are two areas that specify the authorizations for a frame.

- The "General" area controls which positioning parameters can be modified and whether the frame has to be filled.
- The "User authorizations" area defines which user and/or user group is allowed to edit the frame properties or the content. The users or user groups are added and removed on the "Users" tab. You can also edit these rights on that tab.

Note: If you are creating a product container that can be moved by users on the Web, make sure that all frames assigned to the product can also be moved.

5.3.2 Image attributes

If the selected frame is an image frame, the "Image attributes" tab is available. Here, you can define the characteristics of the image frame and specify which setting options the user has for this frame on the Web.

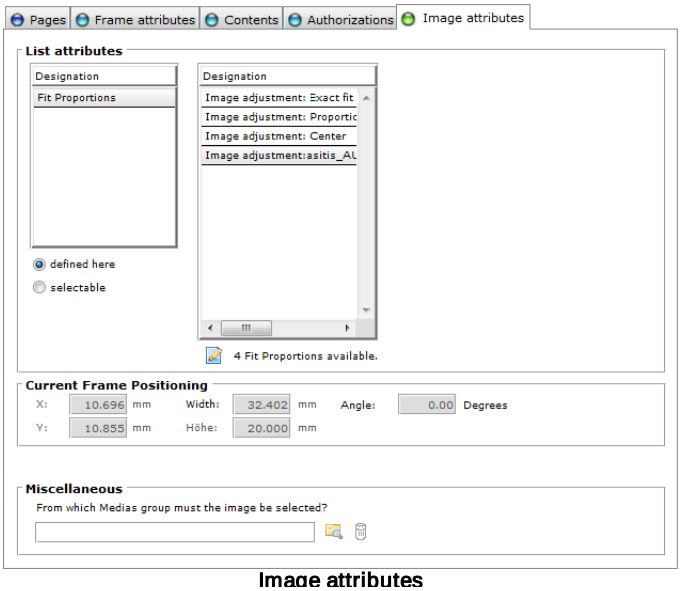



Image attributes

The "List attributes" area contains several characteristics for which you can define a fixed value or a list of possible options for users on the Web.

- In the left-hand list under "Designation" you will find the characteristics that can be defined for the selected image frame. Select the desired characteristic.
- If you are using the "Defined here" option, in the right-hand list under "Designation" you can define a value that will always be applicable for the current image frame. The user on the Web then has no choice of options and always has to use the specified value. To modify a particular publishing element or create a new element, click on . This opens the "Publishing element overview list", in which you can edit the relevant element.
- If you are using the "Selectable" option, in the right-hand list under "Designation" you can define a list from which the user on the Web can select a value for the selected characteristic. To modify a particular publishing list or create a new list, click on . This opens the "Publishing list of elements overview", where you can edit the relevant element.
- In the "Image position" area, as well as the position and size, you can specify the rotation of the frame under "Angle". This rotates it clockwise about its center point by the number of degrees you enter.
- In the "Miscellaneous" area, you can restrict the set of images that can be used. Click on to specify a group in the "MEDIAS group overview list".

5.3.3 Text attributes

If the selected frame is a text frame, the "Text attributes" tab is available. Here, you can define the characteristics of the text frame and specify which setting options the user has for this frame on the Web.

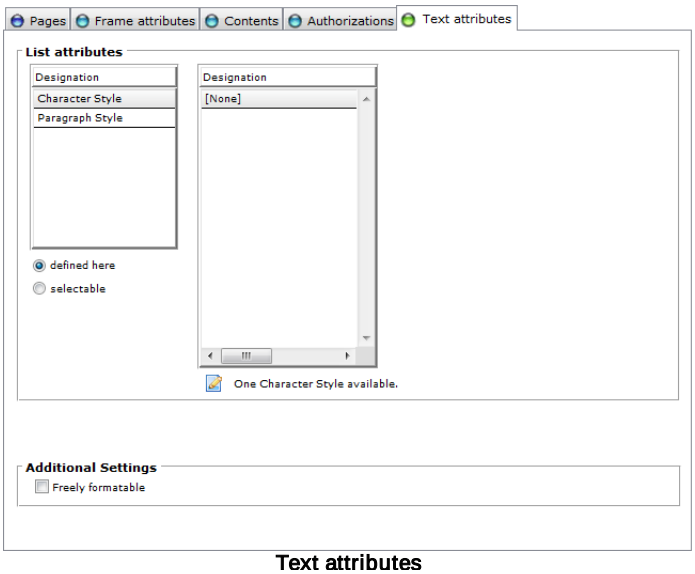

Text attributes


The "List attributes" area contains several characteristics for which you can define a fixed value or a list of possible options for the user on the Web.

- In the left-hand list under "Designation" you will find the characteristics that can be defined for the selected text frame. Select the desired characteristic.
- If you are using the "Defined here" option, in the right-hand list under "Designation" you can define a value that will always be applicable for the current text frame. The user on the Web then has no choice of options and always has to use the specified value. To modify a particular publishing element or create a new element, click on . This opens the "Publishing element overview list", 153 in which you can edit the relevant element.
- If you are using the "Selectable" option, in the right-hand list under "Designation" you can define a list from which the user on the Web can choose a value for the selected characteristic. To modify a particular publishing list or create a new list, click on . This opens the "Publishing list of elements overview", 151 where you can edit the relevant element.

5.3.4 Product attributes

To use the "Product attributes" tab effectively, you must create products in Product 360 Media Manager. You will find more information about creating products in the documentation for the Medias 73 module.

On the "Product attributes" tab, containers that are linked to a product container are assigned information from property fields.

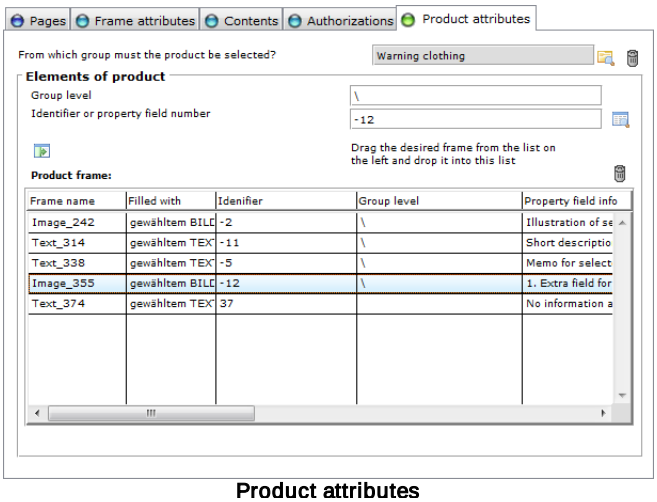

Product attributes

1. Click on to create a new container. It is automatically of the "Product/item" type.
2. First, you set the product group from which the products will be selected. All products from subgroups of the selected product group are also included. Click on and select the required product group. To cancel an assignment, click on .

Note: Note that all products must have the same structure definition as otherwise the defined property output will not function as required.

3. In the "Group level" field, you can specify which subgroup of a product group you want the property field number to relate to. For example, if the main group "Product" has the subgroups "Images", "Texts" and "Prices", you could enter "Texts" here if you want to only use property fields from the "Texts" product group in the corresponding linked container.

The procedure for linking a container with the product container and assigning content to it is as described below.

1. Select the relevant container from the "Page container" list and either use drag and drop or click on to add it to the "Product frame" list.
2. Select the added container and click on to assign the container the content of a property field.

Alternatively, you can link any container with a product container by switching to the "Pages" tab and selecting the desired container in the "Page container" list and dragging it to the product container.

To remove a linked container from the "Product container" list, click on .

5.4 Managing publishing lists


Note: This function requires a user with the right to "Edit Media Publisher lists". You will find more information about user rights under Administration. 42

1. Select **Publisher > Lists**.

The "Publishing list of elements overview list" window opens. Here, you can create lists of elements and modify, copy or delete existing lists. This window provides you with standard functions.

Note: The "Create new publishing list" and "Modify publishing list" windows have the same content. The process is thus described using the example of creating a new publishing list.

2. Click on to call up the "Create new publishing list" window.

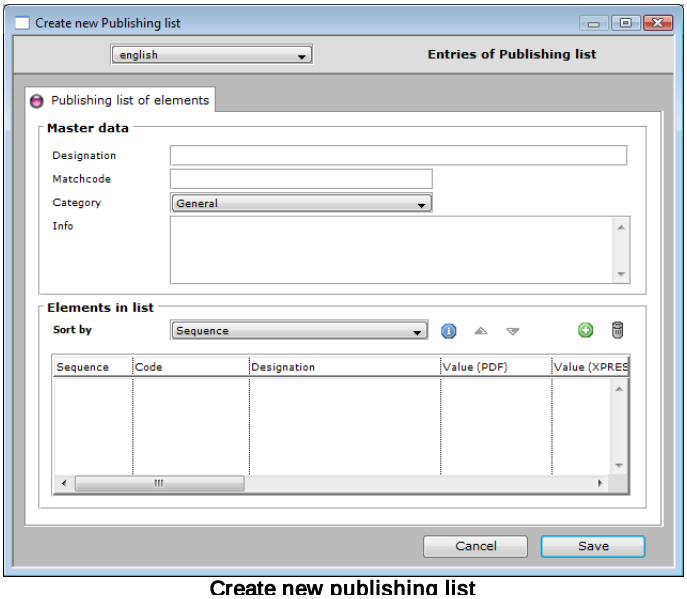

Create new publishing list

3. The "Master data" area is used to enter basic information.
   - You can use any "Designation" of your choice.
   - The "Match code" identifies the publishing list and must therefore be unique.
   - The "Category" defines which type of elements you want to appear in the publishing list.
   - In the "Info" field, you can save additional information about the publishing list.
4. The "Elements in list" area is used to add and remove publishing elements and to define their order.
   - Click on to open the "Publishing element selection window". Here, you can search for the element you want and add it to the publishing list.
   - Clicking on allows you to delete a selected element from the publishing list.
   - Under "Sort by" you can specify the criterion to be used to sort the elements in the publishing list when it is displayed for the user on the Web. If you have selected the "Internal sequence" option, you can specify the order of the elements by selecting an element and then using or to move it to the desired position. For more information about sorting, click on .
5. Click on **Save** to save your changes.

5.5 Managing publishing elements


Caution: Only very experienced users should attempt to edit publishing elements manually. Incorrectly defined elements can make projects unusable. A reliable and easy alternative to manual editing of publishing elements is to create the required style templates, e.g. in an InDesign document, add these as a project and then remove them again. The publishing elements imported while doing this are retained. This gives you greater control over the final result than when entering the corresponding values manually.

Note: To do this, you require a user with the right to "Edit Media Publisher elements". You will find more information about user rights under Administration.

1. Select **Publisher > Elements**.
   - The "Publishing element overview list" opens. Here, you can create elements and edit, copy or delete existing elements. This window provides you with standard functions. The following functions are also available:
   - You can use to find all elements that are not used in a publishing project.
   - You can use to create default elements.

Note: The "Create new publishing element" and "Modify publishing element" windows have the same content. The process is thus described using the example of creating a new publishing element.

2. Click on to call up the "Create new publishing element" window.

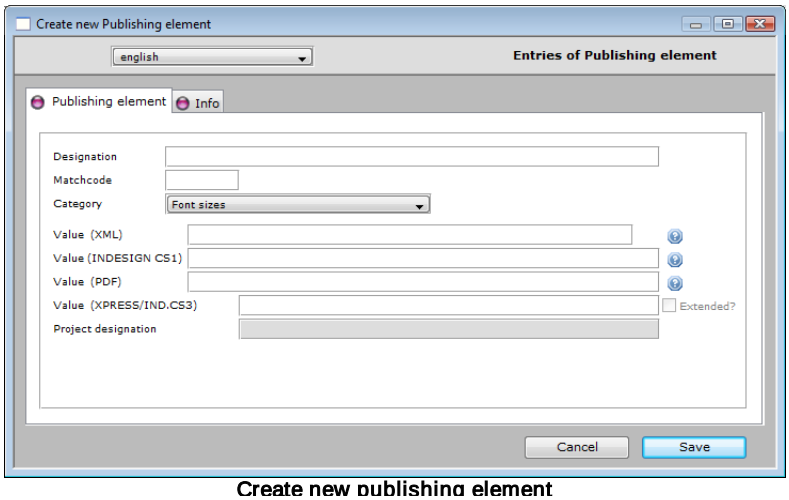

Create new publishing element

3. The publishing element is defined on the "Publishing element" tab.
   - You can use any "Designation" of your choice.
   - The "Match code" identifies the publishing element and must therefore be unique.
   - The "Category" defines the element type: font sizes, colors, character style or paragraph style.

- The "Value (XML)", "Value (INDESIGN CS1)", "Value (PDF)" and "Value (XPRESS/IND. CS3)" are used to enter the value that specifies the appearance of an element in the respective formats.

Category	Type	Value
Font sizes	PDF	Values greater than 1, e.g. 10.0
	InDesign	Values greater than 1, e.g. 10.0
	XML	Values greater than 1, e.g. 10.0
Colors	PDF	RGB in format "R color value, G color value, B color value", e.g. 0.000, 0.000, 100.000, or CMYK in format "C color value, M color value, Y color value, K color value", e.g. 0.000, 15.000, 50.000, 20.000
	InDesign	RGB in format "InDesign color field name, R color value, G color value, B color value", e.g. Text color, 0.000, 0.000, 100.000, or CMYK in format "InDesign color field name, C color value, M color value, Y color value, K color value", e.g. Text color, 0.000, 15.000, 50.000, 20.000
	XML	RGB in format "R color value, G color value, B color value", e.g. 0.000, 0.000, 100.000
Character style/Paragraph style	Enable "Extended?" after the "Value (XPRESS/IND. CS3)" field. On the additional "Value (XPRESS/IND.CS3) extended" tab, make the settings for the character or paragraph style.	

Note: The "Project designation" field contains information if the publishing element has been created by importing a template for a new project. In this case, the publishing element can only be used within that project.

4. On the "Info" tab, you can enter comments about the publishing element.
5. Click on **Save** to save your changes.

Note: As well as font sizes, colors, character and paragraph styles, there are other publishing elements that are fixed and cannot be edited. These are: text alignment, image alignment, image adjustment (proportions and size) and frame adjustment.

5.6 Managing server languages

For the rendering engine, you can specify the syllable division to be used when editing in the Web front end. The possible languages are managed in Media Publisher.

Note: The "Create syllable division" and "Modify syllable division" windows have the same content.


1.Select **Publisher > Server languages**.

- The "Syllable division overview list" opens. This window provides you with standard functions. Additionally with you load the languages from the server

2.Click on to retrieve the languages from the server.

- The available languages are displayed in the overview list.

3.Click on to open the "Create syllable division" window.

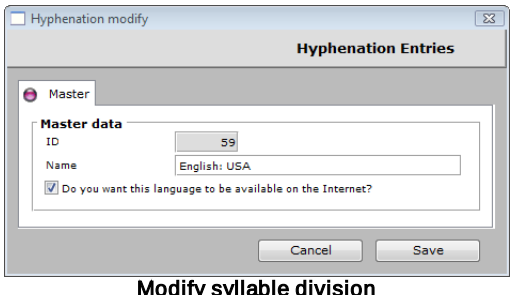

Modify syllable division

4.Enable the "Do you want this language to be available on the Internet?" option to use this syllable division in the Web front end.

5.Click on **Save** to save your changes.

6 Pipeline

The Pipeline is an additional module that allows various Product 360 Media Manager functions to be automated. Pipelines is the name given to predefined production processes.

For example, you could define a pipeline that converts a file into TIFF format and restores the original file. The converted file will then be transferred to the ordering party on the Internet. The conversion and delivery time and costs will be posted to the customer. At the same time, an e-mail will automatically be sent to the ordering party as soon as the requested data is available for collection. If a customer then orders particular data in TIFF format on the Internet, when the media purchase order is released the predefined production process is automatically started and processed.

You can either provide pipelines for universal use, for internal use only, for external use only or for a particular customer only.

The following functions can be automated:


- Retrieval of data to a customer's export folder via the Internet for media purchase orders, with e-mail notification sent to the ordering party where necessary.
- Processing of the action basket
- Restoration of archived data
- Data migration if the corresponding setting has been made in the Archive module
- Processing of defined pipelines
- Preparation of media purchase orders to be delivered on external media

Caution: In order for you to use the functions supported by the Pipeline module, the module must be running in automatic mode.

6.1 Default settings

First of all, you need to make various default settings. Before you can make any settings, you must click on ✖ in the "PIPELINE module automatic mode" window.

1. Select **Pipelines > Pipeline default settings** to open the "Edit default settings" window.
2. Enter the administrator password.
   - This opens the "Modify presetting" window.

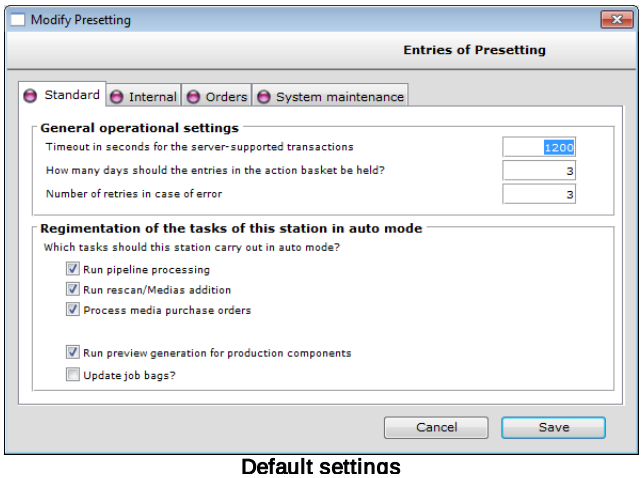

Default settings

3. On the "Standard" tab, make the basic settings for operating the Pipeline module on the current workstation:
   - In the "General operational settings" area, you can specify how entries in the action basket are processed.
     a. The "Timeout in seconds for server-supported transactions" specifies how long the Pipeline module waits for completion of actions performed on the file server. If this value is exceeded, the module cancels processing of a pipeline.
     b. Specify how long you want entries to remain in the action basket.
     c. Specify how often you want the module to repeat failed processing of entries from the action basket.
   - In the "Reglementation of the tasks of this station in auto mode" area, you can define which type of actions you want the Pipeline module to perform on the current workstation.
     a. Enable "Run pipeline processing" if you want the module to process defined pipelines on the corresponding workstation.
     b. Enable "Run rescan/MEDIAS addition" if you want previews and technical data for MEDIAS objects to be generated on the workstation.

⚠ **Caution:** This setting must be enabled on at least one workstation if you are using background addition in the Medias module.

     c. Enable "Process media purchase orders" of you want the module to process shopping carts on the workstation.

Caution: This setting must be enabled on at least one workstation if you want to use shopping carts efficiently in the Product 360 Media Manager Web application.

d. Enable "Run preview generation for production components" if your users want to be able to work very quickly in the Production module and it will not interfere with the operating process if the previews of the production components are created with a slight delay.

e. Select the "Update job bag?" option if you want the job components from the job bags to be re-imported using the Pipeline module.

4. Make the settings for internal jobs on the "Internal" tab.

- Select "Enable automatic mode for processing action basket".
- You can set processing to take place either at intervals or at a fixed time. Select the desired option and enter the corresponding information.

Note: Processing at intervals normally makes more sense as otherwise your users may have to wait a long time if an inconvenient processing time is set.

- If necessary, you can "Restore data automatically if archived".

5. On the "Orders" tab, you have the same setting options as on the "Internal" tab except that these settings apply to media purchase orders.

6. You can make system maintenance settings on the "System maintenance" tab. System maintenance creates a list of purchase orders that meet the specified criterion and deletes them. The maximum duration of the delete process is the time specified under System maintenance duration. If any time is still available for system maintenance, the action baskets are processed in the same way.

- The "Activate automatic system maintenance" option is disabled by default. Enable it if you want to use system maintenance.
- Enter a time for synchronization.
- Specify how long system maintenance can last in seconds. Values from 1 to 86000 are allowed.
- Enter the age in days after which media purchase orders are to be deleted. The minimum value is 1.

6.2 Managing pipelines


Note: The "Create new pipeline" and "Modify pipeline" windows have the same content. The process is thus described using the example of creating a new workflow.

The procedure for creating a new pipeline or modifying an existing pipeline is as follows:

1. Open **Pipelines > Pipeline management**.
2. Enter the administrator password.

➪The "Pipeline overview list" window opens. This window provides you with standard functions 8.

3.Click on to call up the "Create new pipeline" window.

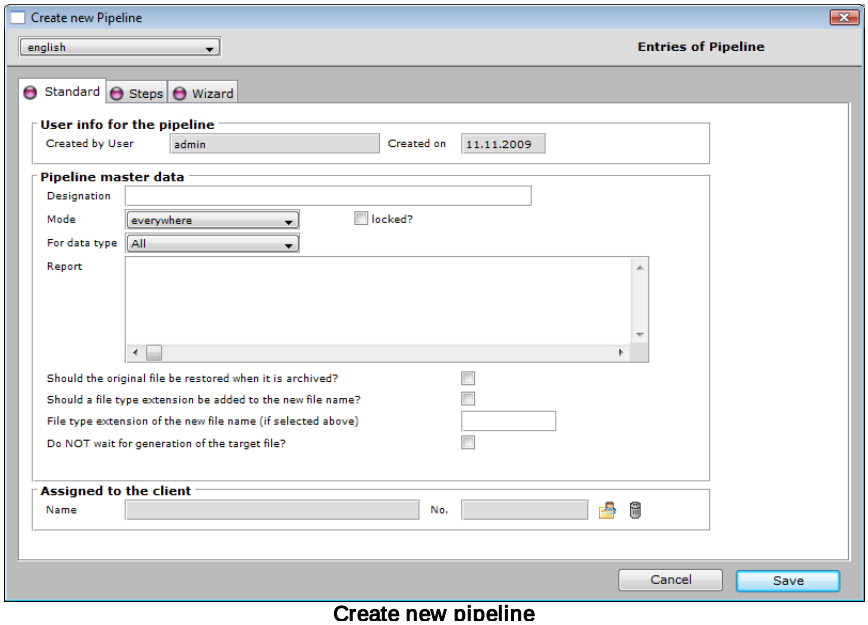

Create new pipeline

4.The "User info for the pipeline" area on the "Standard" tab shows who created the pipeline and when.

5.You make the basic settings on the "Pipeline master data" area on the "Standard" tab.

- Enter a "Designation" for the pipeline.
- Under "Mode", select the areas of Product 360 Media Manager in which you want the pipeline to be available.
- Enable "locked?" to deactivate a pipeline.
- Under "For data type" select the data type for which you want the pipeline to be available.
- A "Report" for the pipeline is generated automatically.
- Decide:

  a.whether you want archived files to be automatically restored.

  b.whether you want to add a file type extension to the new file name. If so, specify the extension.

  c.whether you want to not wait to generate the target file.

6.On the "Steps" tab, you can add new pipeline steps and remove old steps.

7.The "Wizard" tab provides a wizard to help you define conversions.


8.Click on **Save** to save your entries.

Tip: To create a new pipeline that is very similar to an existing one, select the corresponding existing pipeline and click on . This creates a copy of the selected pipeline, which you then just need to modify as required.

6.2.1 Pipeline for image conversions


You can define a pipeline to be used to convert images, e.g. to a different quality level. For example, you need this pipeline if you are using derivatives. To create the derivative itself, you must also set up the corresponding workflow.

1. Open **Pipelines > Pipeline management**.
2. Enter the administrator password.
   - The "Pipeline overview list" window opens. This window provides you with standard functions.
3. Click on to call up the "Create new pipeline" window.
4. Enter a name under "Pipeline master data" on the "Standard" tab.
5. Select the "everywhere" option as the mode.
6. Select the "Images" option under "For data type".
7. Enable the "Should a file type extension be added to the new file name?" option.
8. Enter the relevant file type extension below this, e.g. `.png`.

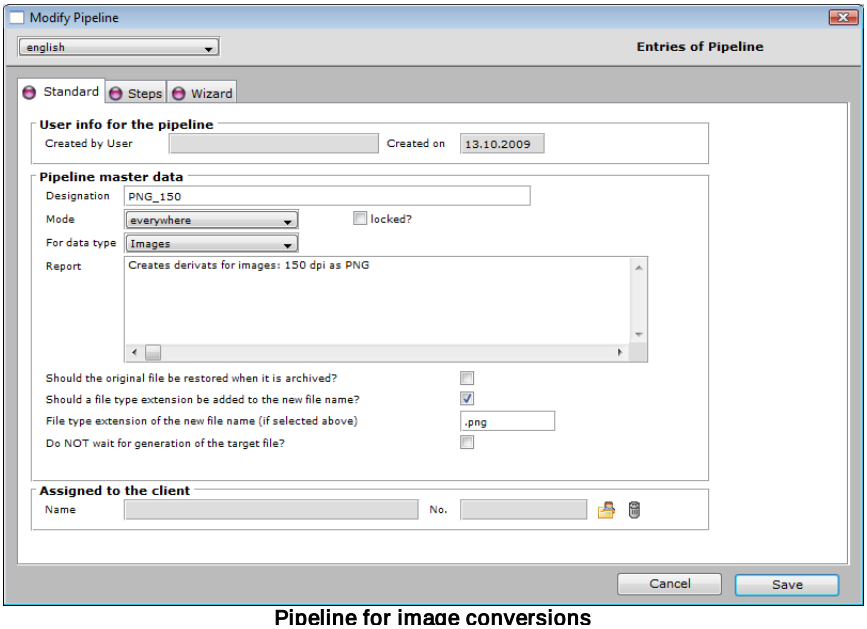

Pipeline for image conversions

9. Go to the "Wizard" tab.
10. Click on **Create new step**.
11. Under "Conversion steps" enable the "ImageMagick conversion" option.
    - The settings for the image conversion are displayed.

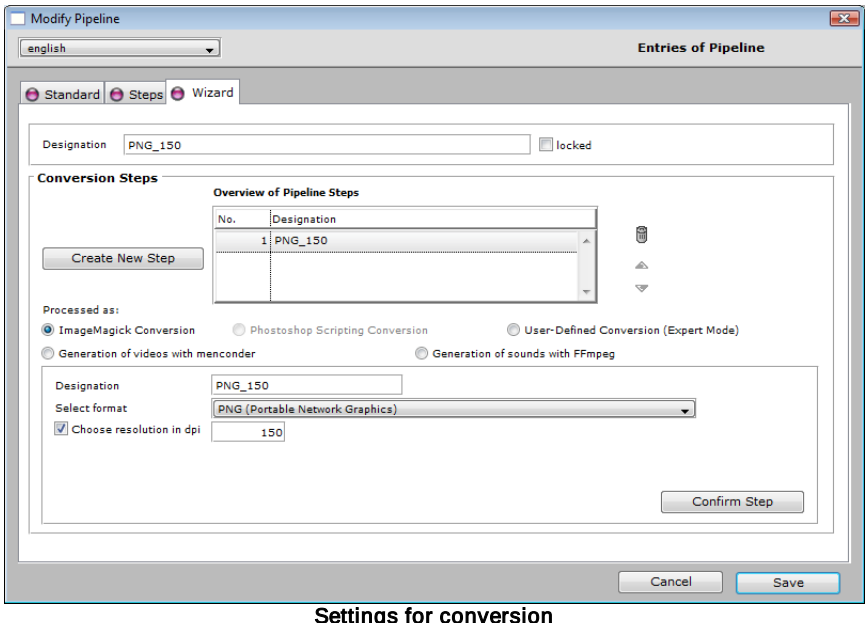


Settings for conversion

12. Make the settings for the conversion:
    - Enter a name.
    - Select the format for the new image.
    - Enable the "Choose resolution in dpi" option.
    - Enter the resolution, e.g. 150.
13. Click on **Confirm step**.
    - ⇨ The step is now displayed at the top in the overview of pipeline steps.
14. Click on **Save**.

6.3 Action basket in Pipeline module

The action basket is used to manage the jobs to be processed using the Pipeline module.

1. Select **Action basket > Action basket** to open the action basket:
2. Enter the administrator password.
   - The "Action basket" window opens.

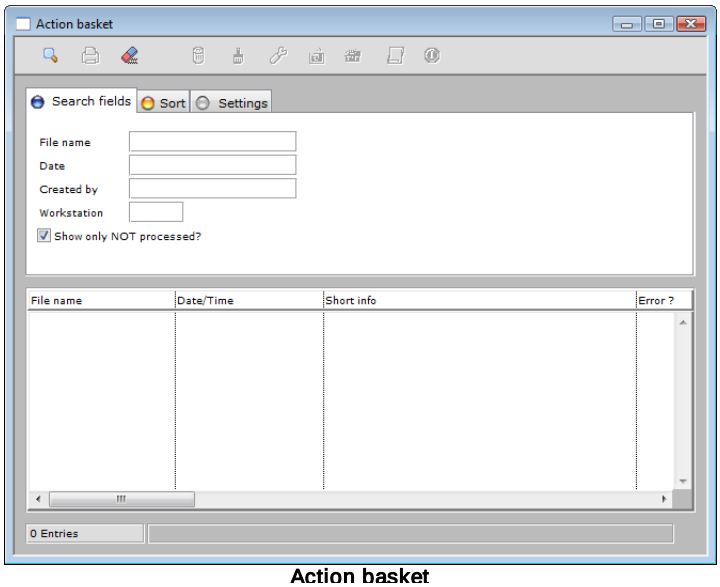

Action basket

You will find more information about using the action basket in the Medias 105 module.

In automatic mode, the action basket is monitored and processed in line with the specifications defined in the default settings 157. To activate automatic mode, select **Action basket > Start automatic mode**.

6.4 Asynchronous DALiM TWiST calls

TWiST is a software package for automation and management of workflows and processes in the pre-press and publishing environment. An asynchronous DALiM TWiST call enables a TWiST process to be created from the Pipeline module and allows the file edited by the Pipeline module to be added to it. The TWiST process created can optionally return a file to the module for further processing.

The DALiM TWiST call is referred to as asynchronous because while processing the call, the Pipeline module periodically checks the status of the TWiST process created and processes other pipelines in parallel.

Execution of an asynchronous DALiM TWiST Call primarily involves two computers:

1. The computer on which the module processing the call is running
2. The computer on which the TWiST server that is processing the TWiST process is running

Note: The TWiST server must be running on a Unix computer. It must also be possible to establish an HTTP connection between the two computers. The Pipeline module acts as the HTTP client and the TWiST server as the HTTP server.

Finally, the two computers must have read and write access to a common directory on a network drive.

6.4.1 Creating asynchronous DALiM TWiST calls


The procedure for creating an asynchronous DALiM TWiST call is as follows:

1. Open the "Create new pipeline" or "Modify pipeline" window (see "Creating and editing pipelines").
2. Go to the "Steps" tab.
   - click on to add the customized pipeline step at the end
   - click on to add the customized pipeline step at the current position
   - click on to modify the customized pipeline step

   ⇨ Enter the asynchronous DALiM TWiST call as one of the five commands.

Note: If the TWiST process that is created by the asynchronous DALiM TWiST call returns a file to the Pipeline module and an extension is needed for further processing, you first have to enter the relevant extension in the corresponding input field for the command.

3. Click on for the relevant command.
4. In the "Customized pipeline step wizard" window, select "OPAS_Async_DalimTwistCall template" from the template list.

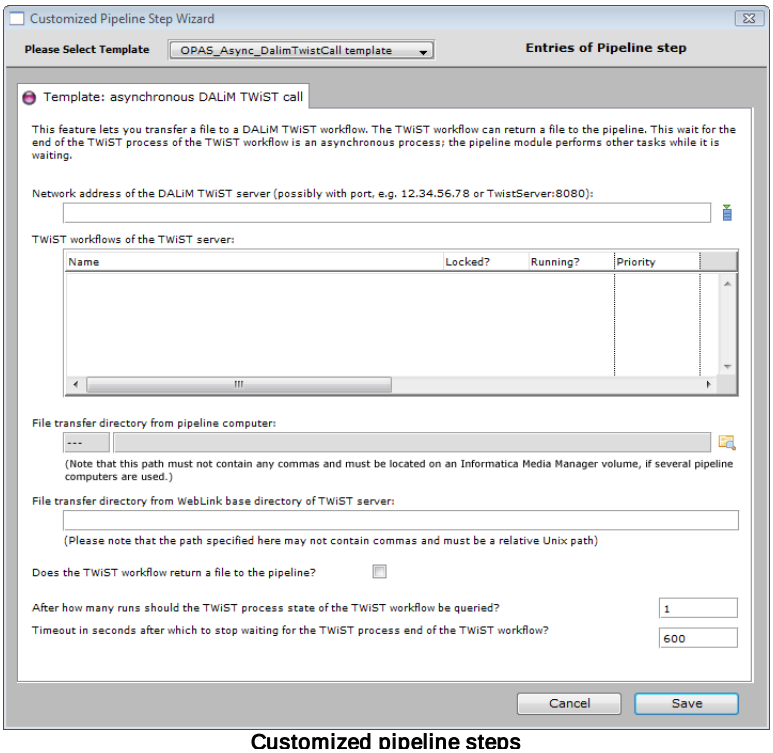

Customized pipeline steps

5.Enter the *'Network address of the DALiM TWiST server'*.

Note: The network address can be an IP address or a name, depending on how the server is set up. You may also have to specify the port number of the TWiST server. To do this, add a colon followed by the port number to the server name. The port number is usually "8080".

6.Click on to read the TWiST workflows provided by the specified TWiST server.

7.Select the TWiST workflow you want to use in the list.

Note: The TWiST workflow selected and the underlying TWiST template are subject to certain restrictions. You also have to take into account certain conventions that apply to the file transfer.

8.Specify the *'File transfer directory from WebLink base directory of TWiST server*.

Note: This directory is used to exchange files between the Pipeline module and the TWiST process created by the asynchronous DALiM TWiST call.

9.Click on to specify the file transfer directory relative to the Pipeline module first.

Note: Depending on where you want the current pipeline to be executed, the selection is subject to the following restriction:

- If the pipeline is only executed on the computer on which it is also edited, the file transfer directory does not have to be located on an Product 360 Media Manager volume. Only the TWiST server needs to have access to it.
- If the pipeline is also executed by modules on other workstations, the file transfer directory must always be located on an Product 360 Media Manager volume.

10.Enter the file transfer directory relative to the TWiST server specified above.

Note: What is required here is the relative UNIX path from the WebLink base directory of the TWiST server to the network directory that you have selected.

The WebLink base directory of the TWiST server depends on the installation of the TWiST server. It is stored in the text file `/symlnks/setup/webTwist.properties` or `/symlnks/setup/webTwist_2.properties` on the computer on which the TWiST server is running, in the form of a value assigned to the "com.dalim.twist.webTwist.rootDirectory" key.

To identify the WebLink base directory, search the text file for this key.

Tip: Creating a link to the file transfer directory in the WebLink base directory makes it easy to specify the directory. All you have to do then is to enter the name of this link in the input field for the file transfer directory relative to the TWiST server.

11.Specify whether or not the TWiST workflow selected above will return a file to the pipeline.

12.Specify the number of processing intervals after which you want the Pipeline module to check the status of the TWiST process created.

Note: Because every status check requires an HTTP request, with short processing intervals it makes sense to enter a value that is greater than the default "1".

13. Specify the wait time in seconds that will elapse before the end of the TWiST process.

Note: If the TWiST process is not yet completed by the end of this wait time, it is terminated and the pipeline ends with an error. The input value "0" stands for an unlimited wait time. This means that the TWiST process created will wait indefinitely.

6.4.2 Processing an asynchronous DALiM TWiST call

When the Pipeline module executes an asynchronous DALiM TWiST call, the following steps are performed consecutively:

1. First of all, it creates a copy of the file currently being edited in the selected file transfer directory. This copy is used as the input file for the TWiST process that is about to be created. The name of this file is in the format `OKSaaaaabbccddeeffgghhhh_I`. The blocks of lower-case letters are placeholders for equally-sized blocks of decimal digits. These blocks represent numbers and may be filled with zeros. The individual blocks have the following meanings:
   - The first block `aaaaa` represents the workstation number of the computer on which the Pipeline module is running. This number is filled from the left with zeros to five digits.
   - The next six blocks `bbccddeeffgg` represent the time at which processing of the asynchronous DALiM TWiST call began. Block `bb` consists of the last two digits of the number representing the year, `cc` is the month, `dd` is the day of the month, `ee` the hour, `ff` the minute and `gg` the second.
   - The last block `hhhh` is a counter.
   - The letter `I` at the end of the file name stands for "input".
2. Next, the Pipeline sends an HTTP request to the TWiST server to create a TWiST process from the selected TWiST workflow using the input file provided in the file transfer directory.
3. Once the TWiST process has been successfully created, the Pipeline module continues processing other pipelines. At the same time, it periodically checks the status and runtime of the TWiST process.
4. If, when creating the asynchronous DALiM TWiST call, you have specified that the TWiST workflow used will return a file to the pipeline, the Pipeline module searches for the corresponding file in the file transfer directory after successfully completing the TWiST process. Its name must be in the form `OKSaaaaabbccddeeffgghhhh_O`, and the blocks of lower case letters must be identical to those in the input file for the TWiST process. The name can include a `.TIF` or `.PDF` extension. The letter `O` at the end of the file name stands for "output".

Note: The Pipeline module ignores the optional extension. If an extension has been specified when creating the call, this is used in subsequent processing, otherwise any extension is removed from the name of the returned file.

5. If the runtime of the TWiST process exceeds the specified wait time, the Pipeline module deletes the TWiST process.
6. Whatever the result of the monitoring of the TWiST process, the Pipeline module deletes the input file for the TWiST process and any returned file from the file transfer directory.

6.4.3 Structure of the called TWiST workflow and the underlying TWiST template

Note: The exact structure of the name for the TWiST process created for an asynchronous DALiM TWiST call can be used when setting up the called TWiST workflow and the underlying TWiST template, e.g. to identify the workstation number of the calling Pipeline module.

The return of a file to the calling pipeline is described under Processing an asynchronous DALiM TWiST call. In order to adhere to the conventions explained there in relation to the TWiST workflow and its underlying TWiST template, follow the procedure below:

1. Do not change the file name during actual editing of the file, e.g. format conversion or color correction.

Note: Of course, you can still copy or move the file to a different directory.

2. After processing, when the file is ready to be returned to the pipeline, rename it before copying it to the file transfer directory.
3. Use the `CheckIncoming` Basic tool to rename the file:
4. Select **Twist Editor > Tools > Basic Tools > Action** in the TWiST editor.
5. In the configuration dialog box:
   - Enter "(.*)_I(.*)" as the standard format for identifying the name of the input file.
   - As the file type, enter an appropriate option for the TWiST workflow.

Note: The "All File Types" option does not perform a check to verify the file type.

   - Set the "No Change" option for possible conversions between upper case and lower case.
   - Enter "#1_O#2" as the standard format for identifying the name of the output file.
6. Use the `Move` Basic tool to copy the file to the file transfer directory:
   - Navigate to **Twist Editor > Tools > Basic Tools > Move** in the TWiST editor.
   - In the configuration dialog box:
     a. In the "MoveTo" area: Enter "localhost" under "Host" and under "Location" enter the absolute path to the file transfer directory relative to the computer on which the TWiST server is running.
     b. In the "Mode" area, select the option "cp".

- The output file will now be located in the directory expected by the pipeline.

Note: If you insert the two tools from the TWiST editor in the graphical representation of the TWiST template after actual editing of the file, i.e. where the file is to be returned to the pipeline, and execute them in turn, the TWiST template and the TWiST workflow created will follow the conventions.

Note: Another condition that applies to the called TWiST workflow and its underlying TWiST template is that the RemoveDone Basic tool must not be used. The reason for this restriction is that this tool automatically deletes a TWiST process in which it is used once the process has been successfully completed.

It the TWiST process has been created and is monitored by the Pipeline module when processing an asynchronous DALiM TWiST call, the module can no longer determine whether or not the TWiST process has been completed successfully.

7 Hotfolder

The **Hotfolder** module enables you to automatically monitor freely definable folders known as hotfolders. A hotfolder can be associated with various actions, e.g. adding files to a job 55 or converting files using a pipeline. When a new file arrives in this hotfolder, the Hotfolder module can execute various actions with the file, depending on the settings.

Examples

- You have configured a printer queue that does not send your data directly to a printer or RIP. Instead, it stores PostScript files in a certain spool directory. The PostScript files created include the associated job number in their file name.
  In the Hotfolder module, you have defined this spool directory as a hotfolder and specified that the PostScript files will be converted into PDF documents using the Pipeline 156 module and the PDF documents will then be added to the associated job. The relevant job number is automatically extracted from the file name. The same mechanism can be applied to the Medias 73 module.
- You have configured a printer queue that does not send your data directly to a printer or RIP. Instead, it stores PostScript files in a certain spool directory. The PS files created include the associated job number in their file name.
  In the Hotfolder module, you have defined this spool directory as a hotfolder and specified that the PS files will be converted into PDF documents using the Pipeline 156 module, taking into account various parameters, and then transferred to a subsequent PDF workflow, e.g. Agfa Apogee or HGM Prinergy. The Hotfolder module thus allows you to connect PDF workflows to your database-supported workflow.
- You monitor an ISDN folder and have made a setting to specify that all data received is to be added to the customer's MEDIAS area. In addition, new files are to be automatically assigned the status "New file in database" to enable direct searching and indexing via the Internet.
- You monitor an ISDN folder and have made a setting to specify that all data received is to be added to the customer's MEDIAS area. The new files should still be automatically assigned a version status, allowing different versions to be clearly identified.

Note: The Hotfolder module is designed for administrators and experienced users. Improper handling and operation of the software described can cause damage to the data stock and result in data losses.

Note: To manage print templates, call up the Report overview list 22 by selecting **Master data > Manage reports**.


7.1 Default settings for the Hotfolder module

The first time you start the Hotfolder module, it informs you that you need to make the default

settings required to operate the module. Once the default settings have been defined, the module starts immediately in automatic mode and waits for incoming tasks. If you have only activated automatic mode in the default settings during the current session, you can also access the mode by selecting **Hotfolder operation > Start automatic mode for station <number>**.

To modify the default settings later:

1. Exit automatic mode by clicking on ✖.
2. To make all the necessary default settings, select **Master data > Default settings for hotfolder operation**.
3. Enter the administrator password.
   - ⇨ This opens the "Modify presetting" window.

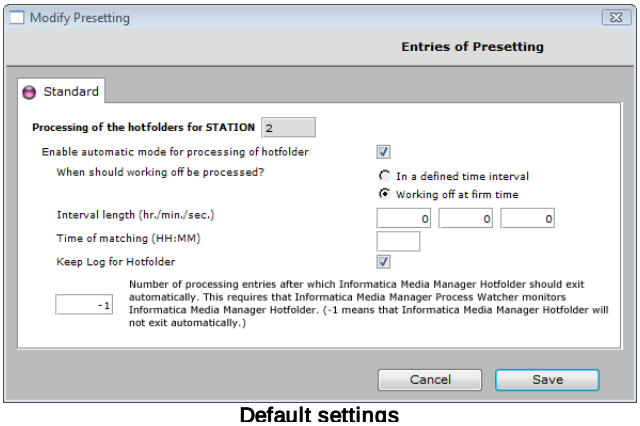

Default settings

4. Make the following settings:
   - For automatic mode to commence when you start the module, you must select the setting "Enable automatic mode for processing hotfolders".
   - You can set processing to take place either at intervals or at a fixed time. Choose your preferred option and then enter either the "Interval time" or the "Synchronization time".
   - You can also create a log for all actions carried out by the Hotfolder module. The log file name is based on the pattern `hotYYMMDD.prt` and is stored in the `proto` subdirectory in the local program folder for the module.
   - If you are using the Process Watcher module to monitor your automatic modules, you can specify the number of processing entries before the Hotfolder module is ended automatically.

⇨ **Note:** The hotfolders created must have a fixed assignment to your station number in the database. This also means that if the client computer is re-installed, the same workstation number has to be assigned in Product 360 Media Manager for you to be able to continue using your hotfolder definitions.

5. Click on **Save** to save your entries.


7.2 Managing hotfolders

Note: The "Create new hotfolder" and "Modify hotfolder" windows have the same content. The process is thus described using the example of creating a new hotfolder.

1. To view all hotfolders defined for the relevant workstation, select **Master data > Manage hotfolders for station <number>**.
2. Enter the administrator password.
   - This opens the "Hotfolder overview list". This is used to manage the hotfolders for a particular workstation in Product 360 Media Manager. This window provides you with standard functions.

Note: To edit the hotfolders for a different station, enter the corresponding number.

3. Click on to call up the "Create new hotfolder" window.
   - The "Create new hotfolder" window opens.

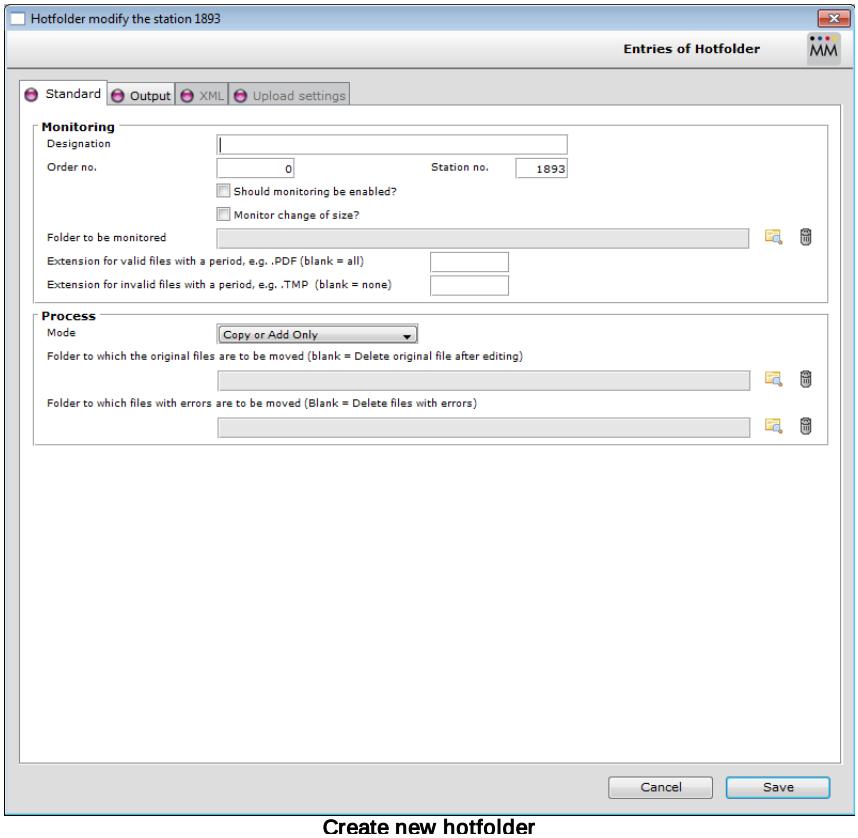

Create new hotfolder

4. On the "Standard" tab:
   - Select "Should monitoring be enabled?" if you want the hotfolder definition to be processed by the Hotfolder module on this workstation.
   - Enter a designation for the hotfolder definition.
   - You can then specify the position in the processing sequence. Hotfolder definitions with a lower number are processed before hotfolder definitions with a higher number.

- Specify the directory to which the hotfolder definition relates. To do this, click on and select the corresponding directory.

Note: The folder to be monitored must be located on a locally available Product 360 Media Manager volume. If the folder to be monitored is located on a Helios volume on which layout data is created, the directory must begin with `%0`.

- If you select "Should the resizing of files/folders be checked prior to the start of processing?", the Hotfolder module checks each file in the folder to be monitored at least twice before processing. The first check determines the size of the file, while the second compares the new size with the old. If the size has not changed, processing begins. If it has changed, the Hotfolder module determines the new size and checks it once again to make sure it does not change. This ensures that the file has been fully transferred into the folder to be monitored before processing begins.

Note: Each file must be checked twice for this function to work efficiently. Thus, in this case automatic operation is only useful at intervals but not at a specified time (see Default settings for the Hotfolder"_) module).


- Decide whether you want a particular file extension to be included or ignored.

5. On the "Processing" tab:
   - Specify whether you want files in the hotfolder not to be processed at all ("Only transfer or add"), or whether you want to "Process via pipeline".
   - Click on to select a directory to which you want to move the original files. If you do not specify a directory here, the original files will be deleted after processing.
   - Click on to select a directory to which you want to move the files in which an error occurred during processing. If you do not specify a directory here, these files will be deleted.
6. On the "Output" tab, you can specify where the data is to be stored: in a directory, in MEDIAS, or in a job.

7.2.1 Providing in a directory

Depending on which action the data in a hotfolder is used to run, different options are available to you.

1. Create a new hotfolder as described under Managing hotfolders.
2. Select the "Allocation to a directory" option.
3. Click on to specify a directory.

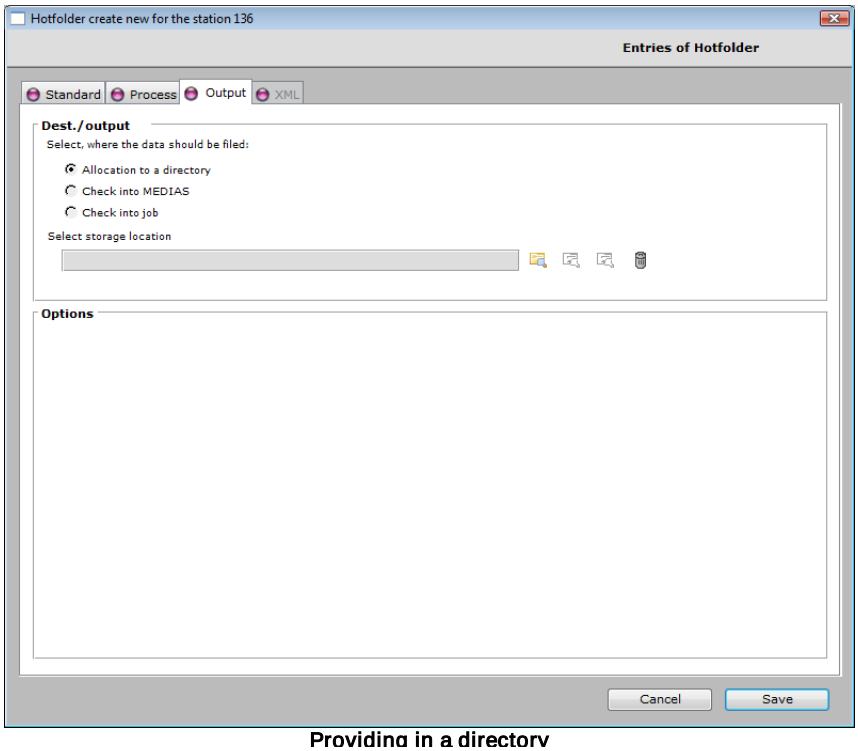

Providing in a directory

Tip: To delete a directory assignment, click on .

7.2.2 Adding to MEDIAS

Depending on which action the data in a hotfolder is used to run, different options are available to you.


1. Create a new hotfolder as described under Managing hotfolders.
2. Select the "Add to MEDIAS" option. Under "Target/Output", specify the criteria to be used to determine the relevant customer. You can select the customer manually, search for a pattern in the file name or use folders in the defined hotfolder for indexing.
3. To select the associated customer manually, select "Calculate from selection below".
   - Under "Options", define the "Status to be assigned to media object", the "Access level to be assigned to media object" and the "Group to which the object is to be assigned".
   - You can also specify a target directory if the customer's files are not located in the normal area of the file server.

Caution: This directory may not be the customer directory on the file server. It must be a different directory on an Product 360 Media Manager volume.

4. To determine the customer using a pattern in the file name, select "Calculate from file name following the pattern below".
   - Under "Options", select the status to be assigned to the object.

- To enable the Hotfolder module to identify the customer number in the file name, you must define a pattern: Enter the same number of underlined characters that appear before the customer number you are searching for in the file name. Then enter "X" characters corresponding to the length of the customer number.

5. To transfer the designations of directories in a folder structure to property fields, select "Calculate from selection and add folders".

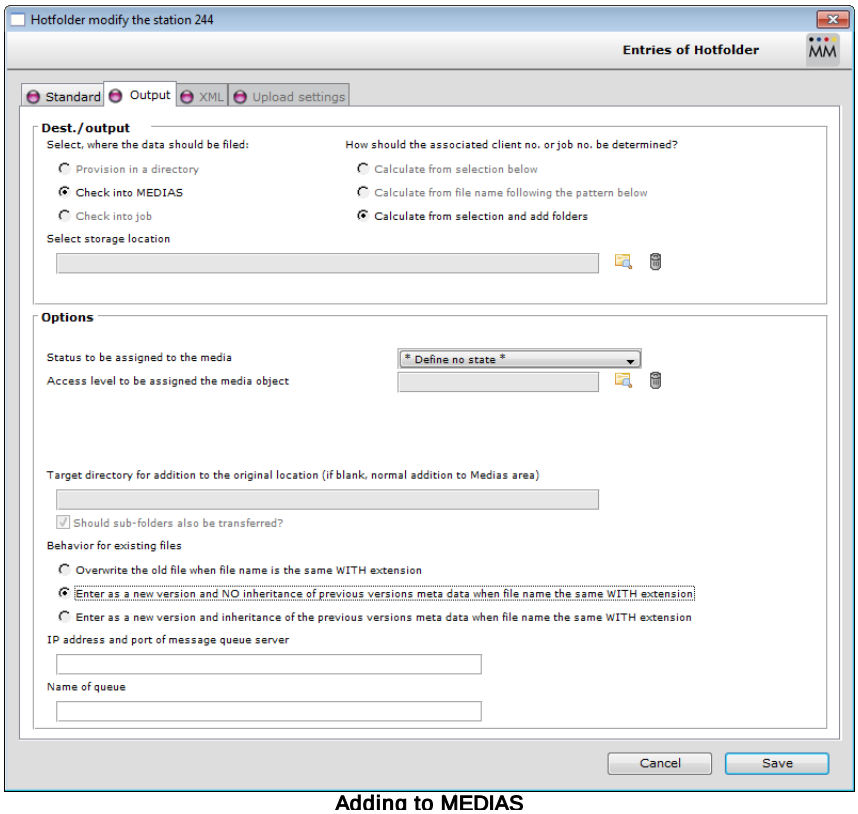

Adding to MEDIAS

- Under "Options", define the "Status to be assigned to media object", the "Access level to be assigned to media object" and the "Group to which the object is to be assigned".
- You can specify the property field number from which the directory names from a folder structure are to be entered. If you enter "0" here, the folder names are not transferred.
- You also have the option of transferring the layout files for the image data found.
- You can also specify a target directory if the customer's files are not located in the normal area of the file server.

6. To add files for a particular customer catalog, you must set the editing mode to "Catalog import" on the "Standard" tab. Option buttons are then displayed, which you can use to select the method you want to use to version these objects.

- "Overwrite the old file when file name is the same WITH extension"
- "Enter as a new version and NO application of previous version meta data when file name the same WITH extension"

- "Enter as a new version and application of the previous version meta data when file name the same WITH extension"

Note: The "XML" tab is only available if you are working with an Oracle database.

Note: The "XML" tab is only available if you have selected "Add to Medias" on the "Output" tab and enabled the "Calculate from selection below" or "Calculation from selection and add folders" options.

7. On the "XML" tab, you can transfer existing meta data when adding to the Medias module. XML data can be used as the data basis for indexing. Select the "Assignment of XML data" option.

Note: Only the set default language can be indexed in this way. Other languages must be indexed manually later.

- First, you need to gain an overview of the expected structure. To do this, click on .
- Adapt the XML tags manually if required. To do this, click on the corresponding tag and adapt it.
- Click on to view the current status of the definitions.
- You can also copy this report to the clipboard and use it as the basis of a template for adapting the Product 360 Media Manager interface.
- To add a file in a defined hotfolder with values from an XML file, the XML file must have the same name as the file to be added and it must also have the extension .xml. For example, if the file to be added is called test.jpg, the corresponding XML file must be called test.jpg.xml. The XML file is not added to the Medias module.

Note: Only Unicodes that are defined in the Administration module are compared when transferred. Unicode specifications in the XML header are ignored.

7. On the "Upload settings" tab, you can define up to ten properties as static text in the languages you are using, which will be transferred as features when uploading, e.g. "MEDIAS object created by hotfolder station <no.>".

7.2.3 Unpacking a ZIP file


This hotfolder monitors a directory for incoming ZIP files, which are then unpacked and provided in an output directory.

To unpack ZIP files:

1. Create a new hotfolder as described under Managing hotfolders.
2. Select the "Standard" option.
3. In the "Editing" section, specify "Unpack ZIP file" mode.
4. In the "Output" section, specify the location to which the unpacked content of the ZIP file is to be transferred.

5.Click on **Save** to save your entries.

This opens the "Hotfolder overview list".

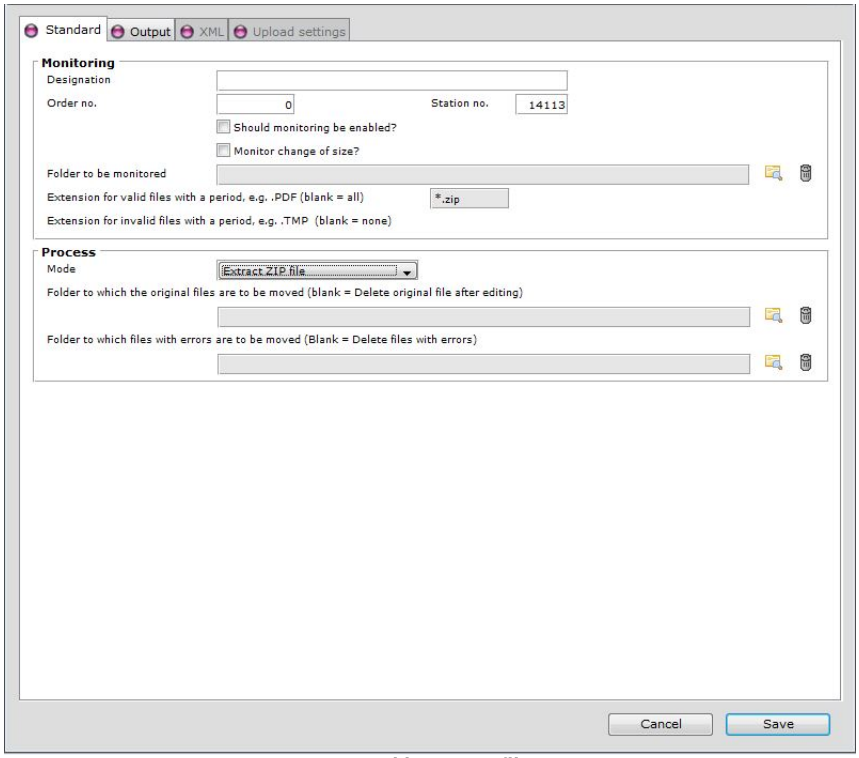

Unpacking a ZIP file


You can now monitor the directory in which the unpacked ZIP files are provided from another hotfolder,

which adds these files to a customer's MEDIAS area, for example.

8 Workflow Manager

The Workflow Manager module enables you to trigger actions based on events and cyclic checks. You can define workflows for almost any purpose, integrating automation functions from the Pipeline[156] and Hotfolder[168] modules. By finely detailing the defined processing segments, you can link any number of workflows and – as in a modular system – combine them repeatedly to create new "master workflows".

The default workflows can be flexibly extended using SQL instructions. The entire process is supported by an integrated e-mail notification system. This mechanism optimizes the working processes and the associated communication.

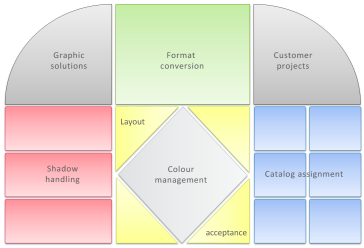

The Pipeline module is required. The following optional modules are supported:

- Archive[204]
- Hotfolder[168]
- Medias[73]
- Production[111]

Note: The Workflow Manager module is intended for administrators. End users should only use the module after consultation with your administrator. Improper handling and operation of the software described can cause damage to the data stock and result in data losses.

The Workflow Manager module can be used to coordinate, control and monitor standardized workflows. To round off the range of functions, the latest version also allows external programs to be integrated.

One example is the production of jobs in Product 360 Media Manager. The Workflow Manager module can monitor the status of job components. If an employee modifies a job component, causing a change to its status, the module can automatically inform the next employee in the workflow by e-mail. The Workflow Manager module can also monitor production times and costs for a job and inform the job representative of any critical developments.

This mechanism allows a seamless link between job production in the Production[111] module and the content and media database. One example of where this is useful is the production of a new media object for a job. To ensure that the object is not lost when job production is complete and will remain available for use, the Workflow Manager module can sort the object using various criteria and add it to the media database with indexing.

The Workflow Manager module can also monitor the validity periods of MEDIAS objects and archive them automatically when they reach a certain status or other criteria are met.

Note: To manage print templates, call up the Report overview list by selecting **Master data > Manage reports**.

8.1 Terminology used

- **Defined pipelines** in the Pipeline module are fully-automated processing cycles for media and production job objects, which can incorporate application programs such as Adobe Photoshop.
- **Defined hotfolders** in the Hotfolder module enable file system based folders to be monitored. These hotfolders primarily act as an interface between file system based workflows and database-based workflows in Product 360 Media Manager.
- **Defined messages** in the Workflow Manager module enable e-mails to be sent automatically for the following actions and events:
  a. Change of status of production jobs
  b. Production times or production costs are exceeded
  c. Production deadlines are exceeded
  d. Extra costs are incurred
  e. Production job memos are changed
- A **(business) process** defines the sequence in which activities are to be executed, either manually or automatically. A **workflow** represents the implementation of a business process using IT tools. To use workflows, you must be familiar with the process itself, and with the concept of modeling in the Workflow Manager module. There are two types of workflows:
  a. **System-based workflows** run automatically and only include tasks that can be processed automatically by Product 360 Media Manager.
  b. **Task-based workflows** also include tasks for users and can only proceed when a task has been completed. Pending tasks for a particular user can be viewed in the Info Center.
  c. Both workflow types can use checkpoints to check workflow steps and actionpoints to perform automated actions. The use of watchpoints is restricted to event-based workflows, while startpoints and taskpoints are only used in task-based workflows.

8.2 Administrative functions

The following administrative functions are available in the Workflow Manager module:

- Activate and lock workflows
- Parameterize workflows

You can specify what you want the response to be when the associated object has been completely processed. You can specify the number of days after which completely processed media objects, jobs, production components etc. are processed again by the workflow.

Note: When a media object is described as "completely processed", this means that the object that has gone through a complete workflow.

The Workflow Manager module provides the following options for controlling the time when a workflow will be re-applied to a completely processed media object:

- ">0": After the specified number of days
- "0": At every interval
- "-1": Only when the workflow has been saved again

Note: This setting is important because it may be the case that an e-mail notification is supposed to be sent when the status of a media object is changed.
If you were to set the parameter to "0", this would have the unwanted side effect that an e-mail would be sent at every interval. In this case, you should set the parameter to "-1" or ">0".

There is also the "Reset workflow trigger for object to be processed actionpoint, which deletes the entry made for this setting, with the result that processing takes place again at the next interval.

8.3 Workflow basic elements

In order to map a user-defined workflow, it must be possible to connect basic elements in any sequence. The basic elements available in the Workflow Manager module are as follows:

- Watchpoint 178
- Startpoint 180
- Checkpoint 182
- Actionpoint 185
- Taskpoint 188

8.3.1 Watchpoint

A watchpoint defines an event source to be monitored, e.g. the media area, a group for a particular customer, the status of a job for a particular customer or the validity period of a media asset for a particular customer.

The following categories of watchpoints exist:

- Cyclically monitored watchpoints: This category includes watchpoints that have to be checked cyclically, e.g. checking a MEDIAS object for a particular customer, for example because they are not triggered by a user interaction.
- Event monitored watchpoints: This category includes watchpoints that are triggered by a user interaction, e.g. creating a new MEDIAS object for a particular customer.

Tip: Event monitored watchpoints are preferable as they are considerably more effective and less time consuming.

A watchpoint only has one output. The output can be linked to a checkpoint or an actionpoint.

Note: Using a watchpoint means that you cannot use a startpoint.

Available watchpoints for MEDIAS objects:

Type	Media assets
Cyclically monitored media assets	All media assets
	Media assets from a defined group
	Media assets from a defined category for the defined customer
Event monitored media assets	Has a new media asset been created?
	Has a media asset been modified?
	Has a media asset been modified (except for rescan)?
	Has a media asset been created or modified?
Event monitored discussion postings for MEDIAS objects	Has a new discussion posting been created for a MEDIAS object?

Available watchpoints for production jobs:

Type	Production jobs
Cyclically monitored production jobs	All unfinished production jobs
	All unfinished production jobs for a defined campaign
	All production jobs
	All finished production jobs

Available watchpoints for production components:

Type	Production components
Cyclically monitored production components	All production components from unfinished production jobs
	Production components from a defined default group in unfinished production jobs
	Production components from a defined campaign in unfinished production jobs
Event monitored production components	Has a new production component been created?
	Has a production component been modified?
	Has a production component been modified (except for rescan)?
Event monitored discussion postings for production components	Has a new discussion posting been created for a production component?

Available watchpoints for media purchase orders:

Type	Media purchase orders
Cyclically monitored media purchase orders	All media purchase orders
	All media publisher purchase orders
Event monitored media purchase orders	Has a media purchase order been created?
	Has a media purchase order been modified?

Available watchpoints for media groups:

Type	MEDIAS groups
Cyclically monitored MEDIAS groups	All MEDIAS groups
Event monitored MEDIAS groups	Has a new MEDIAS group been created?
	Has a MEDIAS group been modified?

Available watchpoints for derivatives:

Type	Derivatives
Event monitored derivative definitions	Has a new derivative definition been created?
	Has a derivative definition been modified?
	Has a derivative definition been deleted?
Event monitored derivatives	Has a new derivative been created?
	Has a derivative been modified?

Available watchpoints for catalogs:

Type	Derivatives
Event monitored catalogs	Has a catalog been created?
	Has a catalog been modified?
	Has a catalog page been created?
	Has a catalog page been modified?

Tip: Watchpoints can be reactivated by actionpoints, thus enabling task loops to be mapped. The advantage of this is that workflow tasks that temporarily cannot be executed can be dealt with later or under different conditions.

8.3.2 Startpoint

A startpoint always acts as the entry point into a task-based workflow. The startpoint can refer to the objects in Product 360 Media Manager listed below.

Available startpoints for production jobs:

Objects	Description
Production job	You can assign the task-based workflow to any production job.

Objects	Description
Production job for a defined campaign	You can assign the task-based workflow to any production job within a campaign defined in the workflow template.

Available startpoints for production group:

Objects	Description
Production group in a production job	You can assign the task-based workflow to any production group.

Available startpoints for production components:

Objects	Description
Production component in a production job	You can assign the task-based workflow to any production component.
Production component from a defined default group in a production job	You can assign the task-based workflow to any production component within a defined default group.
Production component from a defined campaign in a production job	You can assign the task-based workflow to any production component in a production job within a campaign defined in the workflow template.

Available startpoints for MEDIAS objects:

Objects	Description
MEDIAS object	You can assign the task-based workflow to any MEDIAS object.

Available startpoints for groups:

Objects	Description
MEDIAS groups	You can assign the task-based workflow to any MEDIAS group.

8.3.3 Checkpoint

A checkpoint defines a specific check that is made, e.g. "Has the validity period for a media asset for a particular customer been exceeded?". A checkpoint returns a positive or a negative result. This allows you to use conditional ("branched") workflows. A checkpoint always has one input and two outputs. The outputs can be linked to a checkpoint, an actionpoint or a taskpoint.

Note: Dates must always be entered in the format `DD.MM.YY` or `DD.MM.YYYY`.

Available checkpoint types (depending on the selected start or watchpoint):

Query type	Checkpoint description
Status change	Have more than XXXXXX days elapsed since the last status change?
Status	Is status XXXXXX set?
	Is status XXXXXX NOT set?
	Is status XXXXXX set for Medias object?
	Is status XXXXXX set for production object?
	Has production component status been preselected?
Status	Is status s (locked) set?
	Is status a (archived) set?
	Is status - (released) set?
	Is status 0 (not checked and not up to date) set?
	Is status 1 (checked and not up to date) set?
	Is status 3 (checked and up to date) set?
	Is status NOT s (locked) set?
	Is status NOT a (archived) set?
	Is status NOT - (released) set?
	Is status NOT 0 (not checked and not up to date) set?
	Is status NOT 1 (checked and not up to date) set?
	Is status NOT 3 (checked and up to date) set?
Medias object validity period	Remaining rights period more than XXXXXX days?

Query type	Checkpoint description
	Remaining rights period less than XXXXXX days?
	Rights period exceeded?
	Is rights period blank?
Pipeline	Was processing of the last step, e.g. actionpoint with pipeline OK?
Medias objects	Data type of Medias object contains XXXXXX?
	Is MEDIAS object of type XXXXXX (e.g. image, document, etc.)?
	Does Medias object have the color space XXXXXX?
	Does Medias object have at least the resolution XXXXXX dpi?
	Does the file name of the Medias object consist of the characters XXXXXX and contain no more than YYYYYY characters?'
	Is the value in data field 1 greater than in data field 2
	Is the value in data field 1 less than in data field 2?
	Is the value in data field 1 equal to data field 2?
	Does Medias object have at least a size (width) of XXXXXX cm at a resolution of YYYYYY dpi?
	Does Medias object have at least a size (height) of XXXXXX cm at a resolution of YYYYYY dpi?
	Is the Medias object located in the hierarchical group XXXXXX?
	Is the Medias object part of a supplier catalog?
Job completion date	Is the number of days until the completion date greater than XXXXXX?
	Is the number of days until the completion date less than XXXXXX?
	Has the completion date been exceeded?
	Has the completion date been exceeded by XXXXXX days?
Date check	Is date XXXXXX exceeded?
Production components	Has production component been modified by user?
	Has production component been modified by user X1, X2 ... Xn?
Production component status	Is production component locked?
	Is production component NOT locked?
Property fields (can also be used for "Long text" type)	Does property field XXXXXX have the value YYYYYY?
	Does property field XXXXXX NOT have the value YYYYYY?
	Is the value in property field XXXXXX < date YYYYYY + ZZZZZZ days?
	Is the value in property field XXXXXX = date YYYYYY + ZZZZZZ days?

Query type	Checkpoint description
	Is the value in property field XXXXXX > date YYYYYY + ZZZZZZ days?
	Is property field XXXXXX empty?
	Is property field XXXXXX NOT empty?
	Does property field XXXXXX contain the value YYYYYY?
	Does property field XXXXXX NOT contain the value YYYYYY?
Property field	Does property field have the exact value XXXXXX?
	Does property field NOT have the exact value XXXXXX?
	Is property field empty?
	Is property field NOT empty?
	Does property field contain the value XXXXXX?
	Does property field NOT contain the value XXXXXX?
Finished flag	Set as finished?
	NOT set as finished?
Taskpoints	Is taskpoint XXXXXX not yet complete?
	Is taskpoint XXXXXX in progress?
	Is taskpoint XXXXXX complete?
	Is taskpoint XXXXXX skipped/refused?
Medias background addition	Is the Medias addition process finished (no background process active)?
Production component data type	Is production component of data type XXXXXX?
User-defined checkpoint (EXPERT mode)	Is the value YYYYYY set in data field XXXXXX? (user-defined)
	Is the value YYYYYY NOT set in data field XXXXXX? (user-defined)
	Is the value in data field XXXXXX greater than YYYYYY? (user-defined)
	Is the value in data field XXXXXX less than YYYYYY? (user-defined)
	Is the value in data field XXXXXX empty? (user-defined)
	Is the value in data field XXXXXX NOT empty? (user-defined)
	Is the date in data field XXXXXX before the date YYYYYY? (user-defined)
	Is the date in data field XXXXXX after the date YYYYYY? (user-defined)
Hotfolder-specific checkpoints	Asura: InFolder XXXXXX, OkFolder YYYYYY, ErrorFolder ZZZZZZ, Timeout(s) WWWWWW. Check ok?
File check	Check the file name syntax using the regular expression XXXXXX

Query type	Checkpoint description
Prepared	Is prepared?
	Is NOT prepared?
Released	Is released?
	Is NOT released?
Order type	Is order type = "by download"?
	Is order type = "on data carrier"?
	Is order type = "as shop product"?
Shop product	Is shop product of type XXXXXX?
Memo text	Does memo contain text XXXXXX?
Group status	Is group locked?
	Is group NOT locked?

8.3.4 Actionpoint

Available actionpoint types (depending on the selected start or watchpoint):

Action type	Actionpoint description
Status	Set status XXXXXX
	Mark current status on production component
	Set marked production component status
	Set status XXXXXX for associated MEDIAS object
Status	Set status s (locked)
	Set status - (released)
	Set status s (locked) for associated object
	Set status - (released) for associated object
	Set status 0 (not checked and not up to date)
	Set status 1 (checked and not up to date)
	Set status 3 (checked and up to date)
Pipeline	Execute pipeline XXXXXX and deliver in folder YYYYYY
	Execute pipeline XXXXXX and add to job YYYYYY and default group ZZZZZZ.
	Execute pipeline XXXXXX and add to Medias area for customer YYYYYY and group ZZZZZZ
MEDIAS objects	Delete MEDIAS object from database and move to folder XXXXXX
	Delete MEDIAS object
	Assign MEDIAS object to MEDIAS group XXXXXX
	Delete MEDIAS object from group XXXXXX

Action type	Actionpoint description
	Create XML file for MEDIAS object
Finished flag	Set finished flag
	Reset finished flag
Derivatives	Add derivative XXXXXX
	Copy derivative XXXXXX to folder XXXXXX
	Delete specific derivatives for media asset
E-mail	Send e-mail to user in property field XXXXXX or memo field with subject line ZZZZZZ and text YYYYYY
	Send e-mail to contact person for customer XXXXXX with subject line ZZZZZZ and text YYYYYY
	Send e-mail to customer XXXXXX with subject line ZZZZZZ and text YYYYYY
	Send e-mail to user X1, X2, …, Xn with subject line ZZZZZZ and text YYYYYY
	Send e-mail to admin with subject line ZZZZZZ and text YYYYYY
	Send e-mail to media object owner with subject line ZZZZZZ and text YYYYYY
	Send e-mail to person responsible for job with subject line ZZZZZZ and text YYYYYY
Archiving / restoration	Archive Medias object
	Restore media object
Media purchase orders	Create media purchase order with MEDIAS object
Modify property fields	Modify property field XXXXXX with value YYYYYY **(only this actionpoint can be used for the "Long text" type)**
	Populate property field XXXXXX with UNC path
	Transfer MEDIAS property field XXXXXX to production property field
XML file for RedLine connection	Deliver XML file with file identifier from property field XXXXXX and MEDIAS data in folder YYYYYY
Workflow trigger	Reset workflow trigger for object to be edited
Access level	Set access level XXXXXX
Control tools	Pause workflow for XXXXXX seconds
FTP sending	Access FTP server and upload MEDIAS object
Call	Call up external program
Create message queue entry	Create message queue entry
Delete job	Delete job with all components

Action type	Actionpoint description
Job status	Set status of associated job to XXXXXX
Production component status	Set status XXXXXX
	Set status XXXXXX for associated production component
Media publishing job for production components	Set media publishing job for production components
Contents	Populate production component property field with text XXXXXX
Production components	Copy, delete, link in customer XXXXXX
XML connector	Execute XML connector definition XXXXXX (manually defined only) with action YYYYYY

Placeholders for actionpoint e-mails:


Placeholder	Replaced content
%2	Customer number and name
%3	Job number and designation
%AK	Job campaign field
%BI	Discussion posting ID
%BT	Discussion posting text
%D	Media purchase order ID
%F	File name
%GC	Group/Item/Product code
%GN	Group/Item/Product name
%I	MEDIAS object ID
%L	Path for local Product 360 Media Manager storage location
%M???	Content of property field number ??? (object/group)
%NAME???	The first ??? characters of the file name
%P	Production component ID
%PB	Content from property field 14 (check report)
%T	Time flag (date/time)
%UA	URL for job in Internet Administration Console
%UB	URL for media purchase order in Internet Administration Console
%UC	URL for a catalog
%UCD	URL for a catalog page
%UCH	Name of the user who last modified the data record for the MEDIAS object
%UCR	Name of the user who created the data record for the MEDIAS object
%UD	URL for discussion forum for associated object
%UF	URL for media purchase order files in Internet Administration Console

Placeholder	Replaced content
%UG	URL for group/item/product in Internet Administration Console
%UM	URL for MEDIAS object in Internet Administration Console
%UP	URL for production component in Internet Administration Console

8.3.5 Taskpoint

A taskpoint defines a task to be completed interactively. The taskpoint has an input and two outputs. The output can be linked to a checkpoint, actionpoint, or taskpoint.

The task defined by a taskpoint contains parameters such as a deadline, an assigned user group (s), a processing status and rules to be followed if the deadline is exceeded.

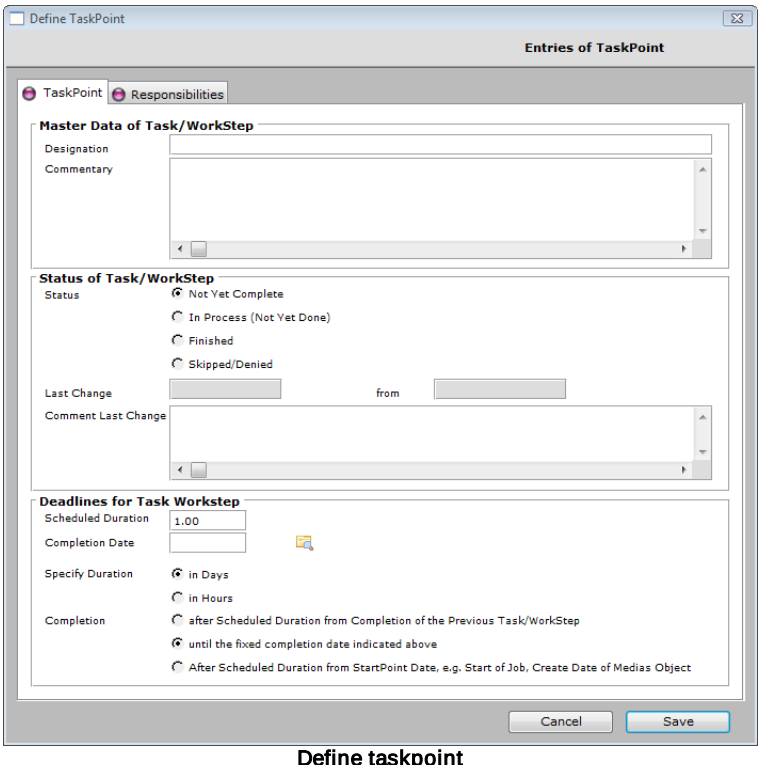

Define taskpoint


Taskpoints are only available in task-based workflows that are initiated by one of the following startpoints.

- Production group in a production job
- Production component in a production job
- Production component from a defined default group in a production job
- Production component from a defined campaign in a production job
- MEDIAS object
- MEDIAS group

8.4 Default settings

Note: If the module is running in automatic mode, click on ✖ to exit. Automatic mode for processing is enabled in the default settings. The program switches to automatic mode when it is restarted.

The default settings can be found under **Workflow operation > Presettings for workflow operation**.

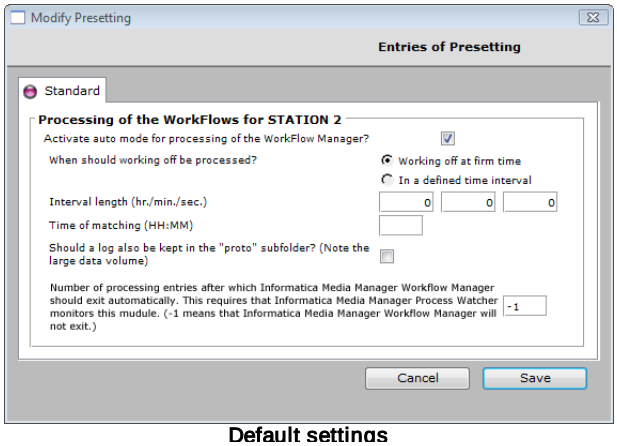

Default settings

You can also specify a time for processing, either a fixed time or at a defined interval, and the number of processing entries after which the Workflow Manager module will automatically be ended.

The module can then be automatically started again in conjunction with the Process Watcher 70 module.

Note: If you do not want automatic mode to be ended, enter the value "-1" here.

You can also keep a log that records the actions performed by the Workflow Manager module.

Note: Due to the large data volumes that arise, this function should only be used for control and testing purposes and should be enabled during the creation phase for a workflow. Logging all actions can result in huge log files on the local computer.

If you have only activated automatic mode in the default settings during the current session, you can also access the mode by selecting **Workflow operation > Start automatic mode for station <number>**.

8.5 Creating a workflow


Note: The "Create new workflow" and "Modify workflow" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **Master data > Management of WorkFlows** to create a workflow.

The "Workflow overview list" opens. This window provides you with standard functions. The following functions are also available:

- : Allows you to export a workflow definition, so you can simply transfer it from one computer to the other
- : Allows you to import a workflow definition

2. Click on to call up the "Create new workflow" window.

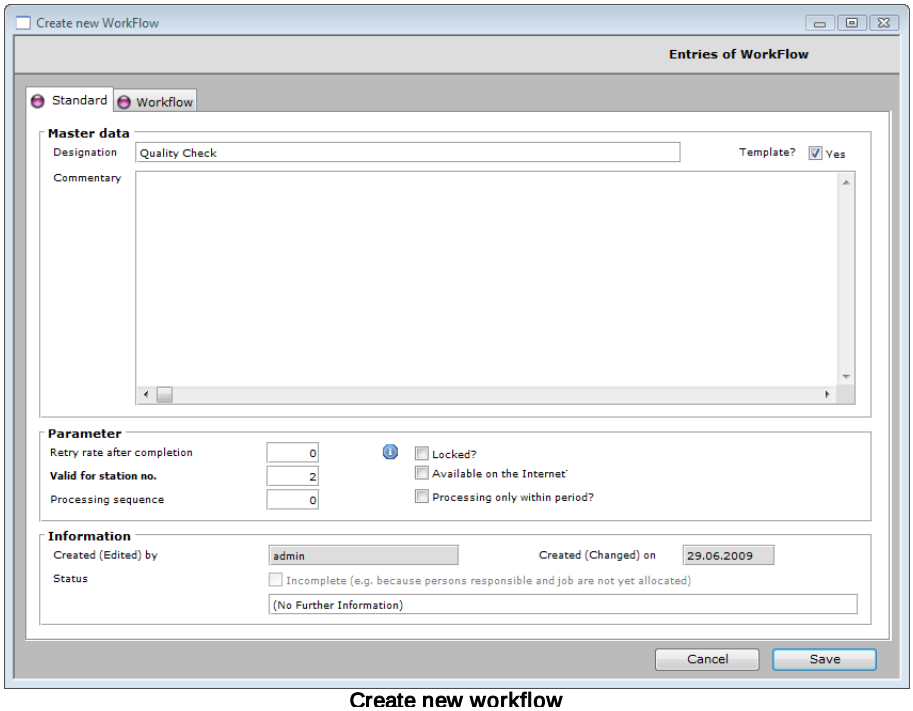

Create new workflow

3. On the "Standard" tab, enter the designation, the processing sequence, and, in particular, the number of days after which an object that is monitored by the watchpoint is re-processed by the workflow.
4. You can use the "Processing only within period" option to specify the time at which the workflow should be carried out.

Note: If you enter "0" as the number of days after which an object monitored by the watchpoint is re-processed by the workflow, you need to be very careful when defining the workflow, e.g. to prevent constantly recurring e-mail notifications from being sent.

5. The individual steps in the workflow are edited on the "Workflow" tab.
   - Click on to create watchpoints, on to create checkpoints and on to create actionpoints.
   - At a blank point on the screen, call up a pop-up menu with the appropriate options.
   - Clicking on enables you to automatically rearrange the icons.
   - To modify a workflow step, select it and click on .

- To connect the output of one workflow with the input of another, click next to the output arrow, hold down the mouse button, drag the icon that appears to the relevant input and release the mouse button.
- To delete the connection, call up the pop-up menu for the output and select "Remove output" .
- To delete a workflow step, select it and click on .
- To simplify the process of analyzing a workflow, information is provided about each workflow step in the lower part of the screen when you move your mouse over a step.
- You can view the sequence of the workflow steps by clicking on .
- Clicking on again displays the designations of the workflow steps.


Note: If you define a workflow as a "template", it is not automatically processed. A better approach is to duplicate this workflow and then to create other workflows based on the duplicates. A workflow template does not have to be complete. The template function helps you to create a basic structure for similar processes, and you do not have to start from scratch every time.

6. Click on **Save** to save your entries.

8.5.1 System-based example workflow


This section describes how to create a **system-based workflow** to check the quality of newly checked-in images:

1. Create a workflow as described in the Creating a workflow section.
2. Go to the "Workflow" tab.
3. Click on to define a watchpoint.

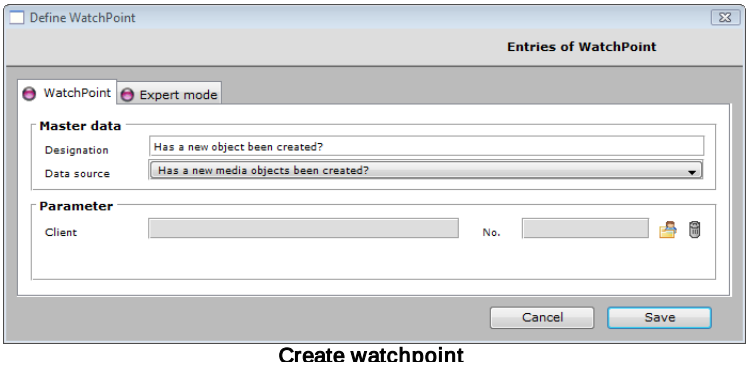

Create watchpoint

4. Fill the fields as shown in the screenshot.
5. Click on **Save**.
6. Click on to define a new checkpoint.

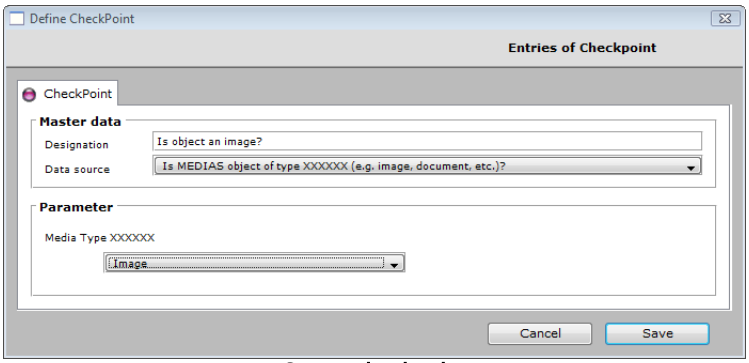

Create checkpoint


7.Fill the fields as shown in the screenshot.

8.Click on **Save**.

9.Separate the watchpoint and the checkpoint on the "Workflow" tab.

10.Link the watchpoint output with the checkpoint input as described in "Editing a workflow".

11.Click on to define another checkpoint.

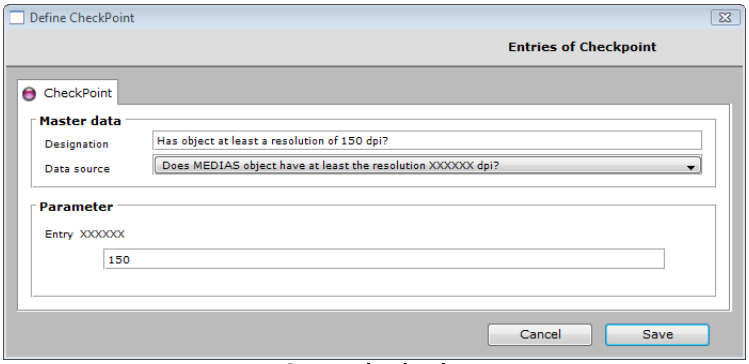


Create checkpoint

12.Fill the fields as shown in the screenshot.

13.Click on **Save**.


14.Separate the points and link the positive output from the first checkpoint to the input for the second.

15.Click on to create an actionpoint.

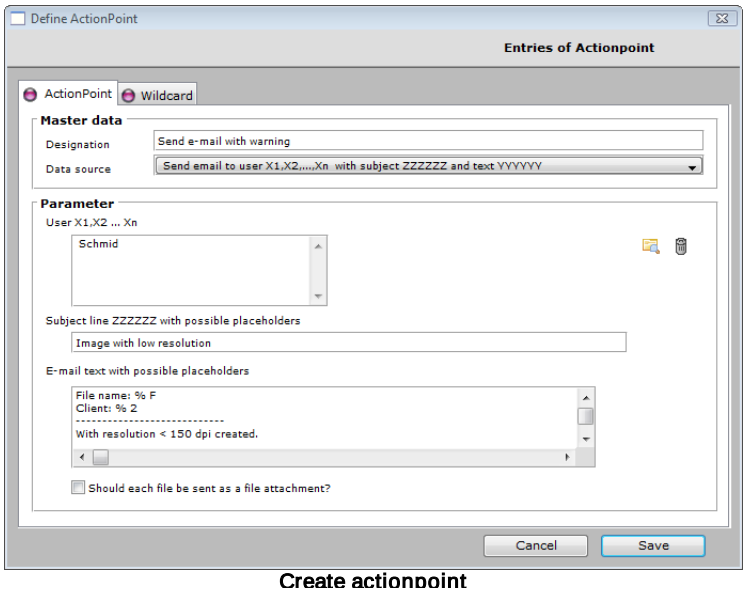

Create actionpoint

16. Fill the fields as shown in the screenshot.
17. Click on **Save**.
18. Link the negative output from the second checkpoint to the input for the actionpoint.
19. Click on to create another actionpoint.

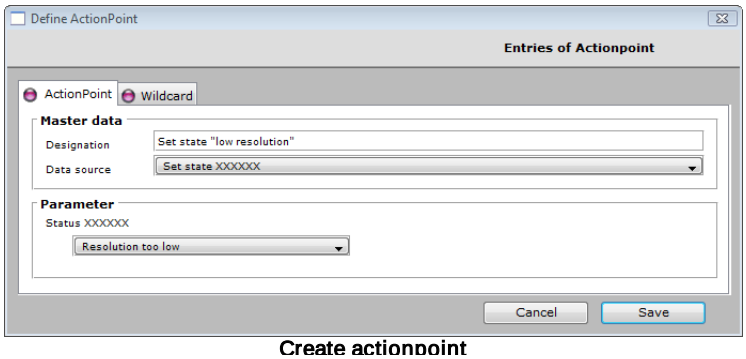


Create actionpoint

20. Fill the fields as shown in the screenshot.

Note: The status "Resolution too low" must be created first in the Administration module.

21. Click on **Save**.
22. Link the output from the first actionpoint to the input for the second.

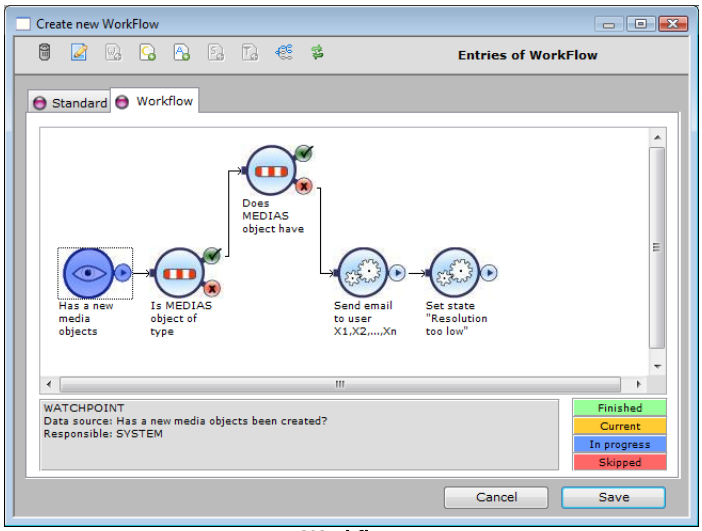

Workflow

23.Click on **Save**.

- Your system-based workflow is now complete. Once you start automatic mode, it will check the quality of newly checked-in media objects and issue a warning if their resolution is too low.


8.5.2 Task-based example workflow

This section describes how to create a **task-based workflow** to check the quality of newly checked-in images:

1.Create a workflow as described in "Creating a workflow".

2.Go to the "Workflow" tab.

3.Click on to define a startpoint.

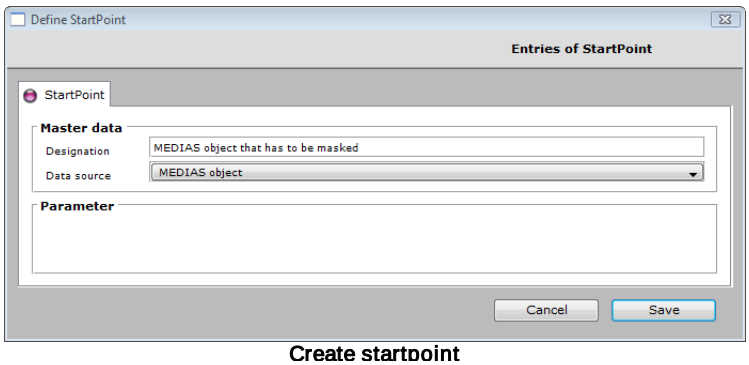


Create startpoint

4.Fill the fields as shown in the screenshot.

5.Click on **Save**.

6.Click on to define a new taskpoint.

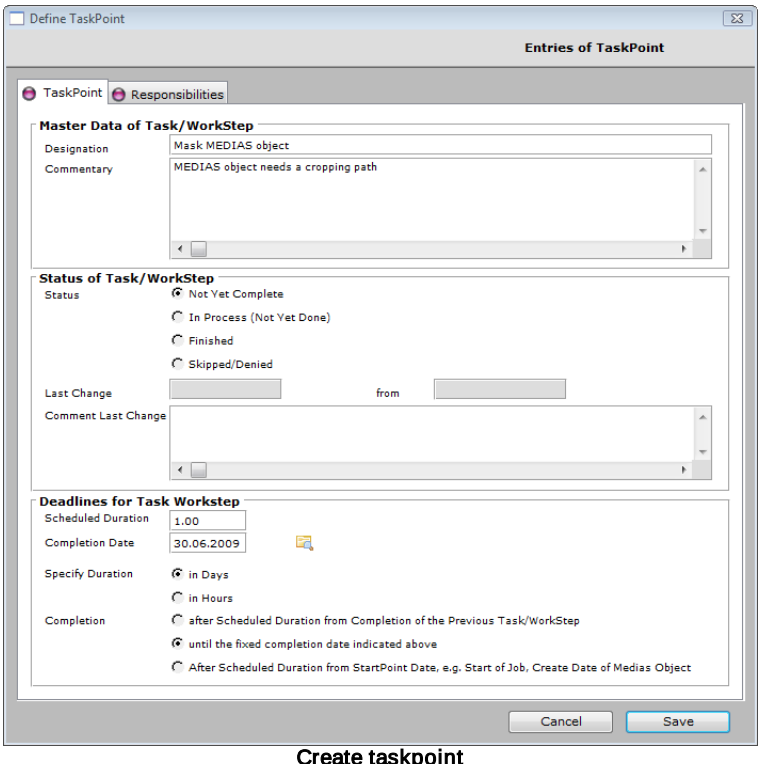

Create taskpoint

7.Fill the fields as shown in the screenshot.


8.Go to the "Responsibilities" tab to assign the task to a user.

9.Click on **Save**.

10.Separate the startpoint and the taskpoint on the "Workflow" tab.

11.Link the output from the startpoint to the input for the taskpoint.

12.Click on to define an actionpoint.

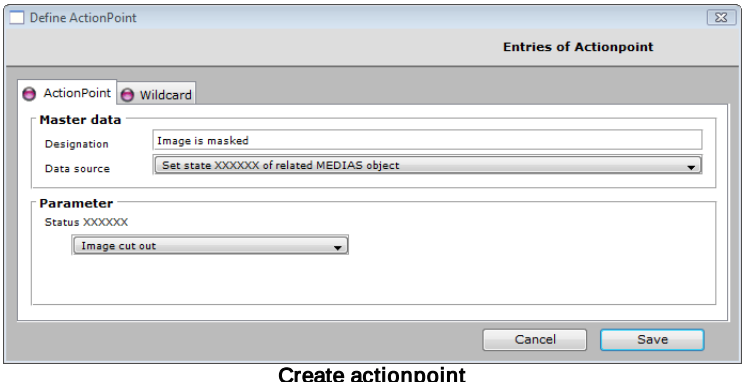


Create actionpoint

13.Fill the fields as shown in the screenshot.

14.Click on **Save**.


15.Link the positive output from the taskpoint to the input for the actionpoint.

16.Click on to create another actionpoint.

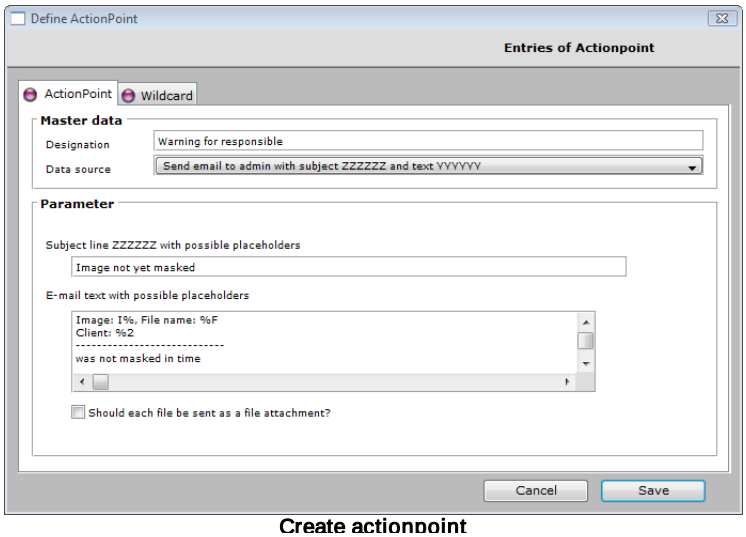

Create actionpoint

17. Fill the fields as shown in the screenshot.
18. Click on **Save**.
19. Link the negative output from the taskpoint to the actionpoint you have just created.
20. Go to the "Tasks" tab to check the assigned task.

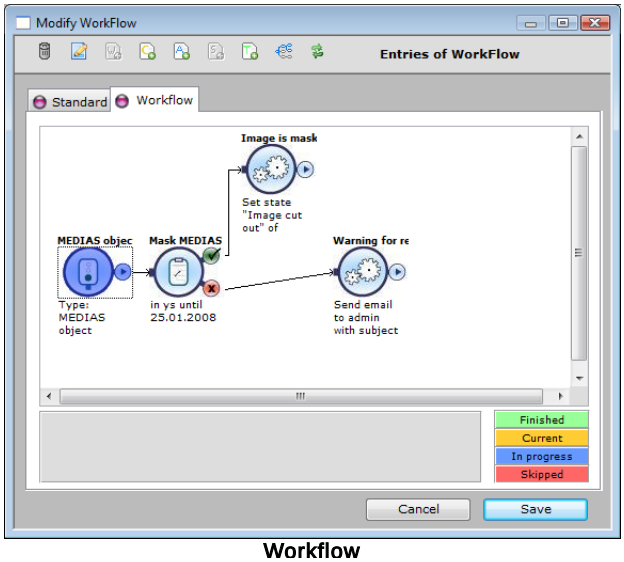

Workflow

21. Click on **Save** to save the workflow.


    ➪ Your task-based example workflow is now complete and can be applied to MEDIAS objects in the Medias module.

8.5.3 Further example workflows

In the latest version of Product 360 Media Manager the Workflow Manager provides new functions, which we will explain to you here.

Call up external program


This actionpoint is used to call up an external program within a workflow, for example to perform file modifications or integrate custom e-mail services. You can either specify an explicit storage location or use a placeholder as a reference.

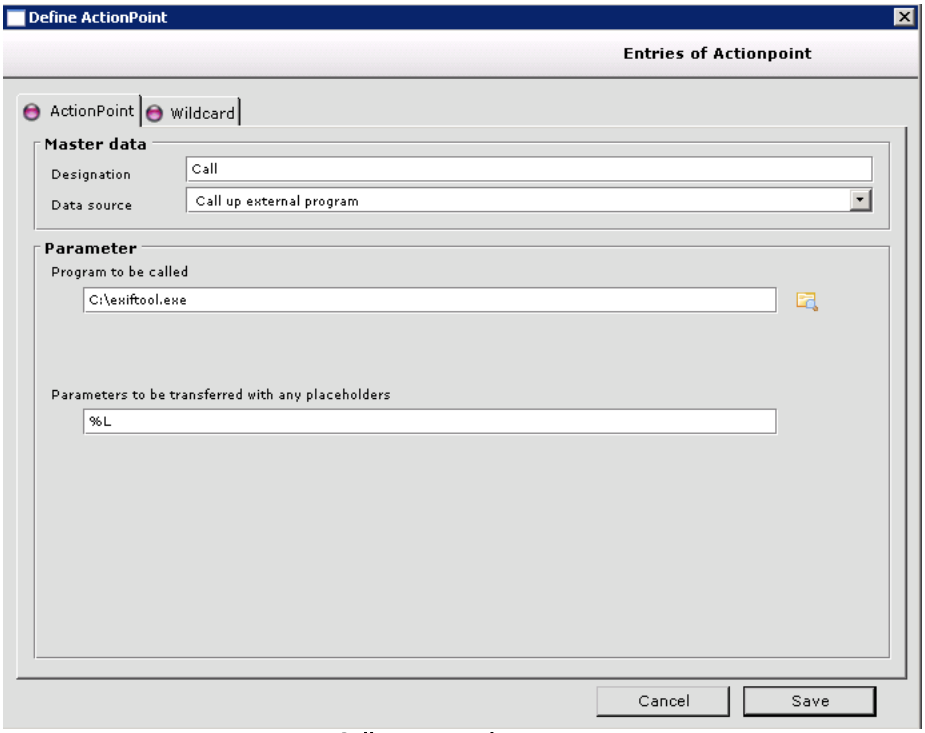


Call up external program

Link workflows

This actionpoint can be used to call up another workflow. This enables you to link several workflows together. "Fine tuning" the definition provides you with workflow modules that can be combined repeatedly. These are referred to as processing segments.

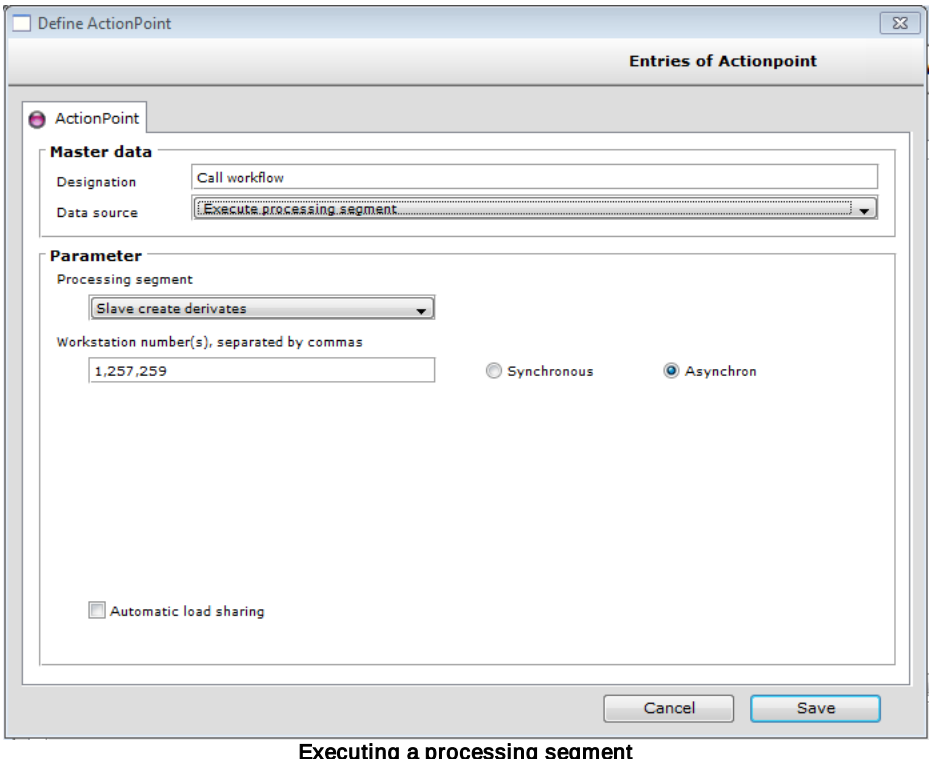

Executing a processing segment

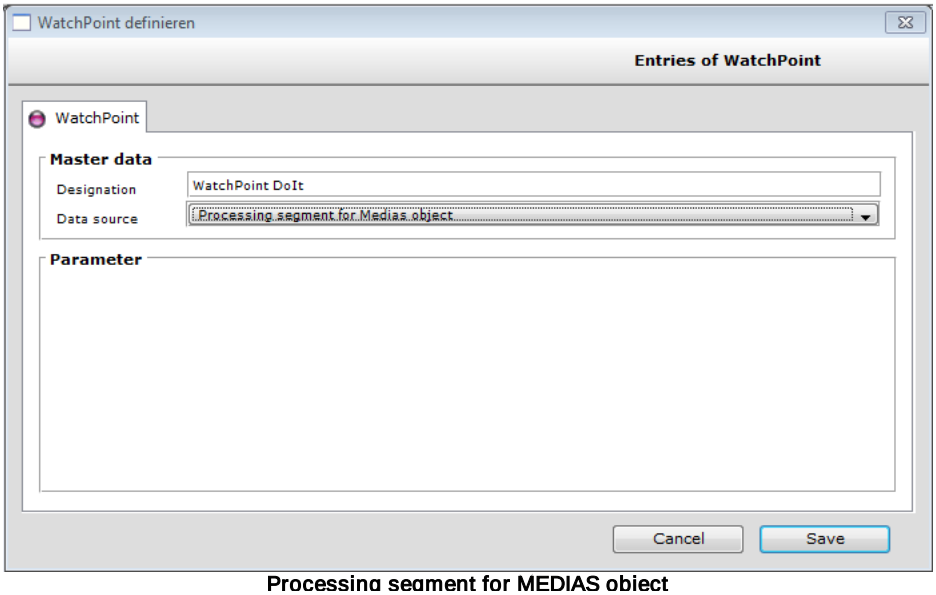


Processing segment for MEDIAS object

Reactivate workflow

The actionpoint described here can also be used to implement task loops. A workflow call can re-initiate the same workflow under certain conditions.

Execute SQL command

You can use an SQL command to identify the media attachments or project components, allowing them to be provided to other processing segments. The input field is designed to provide the option of linking different commands.

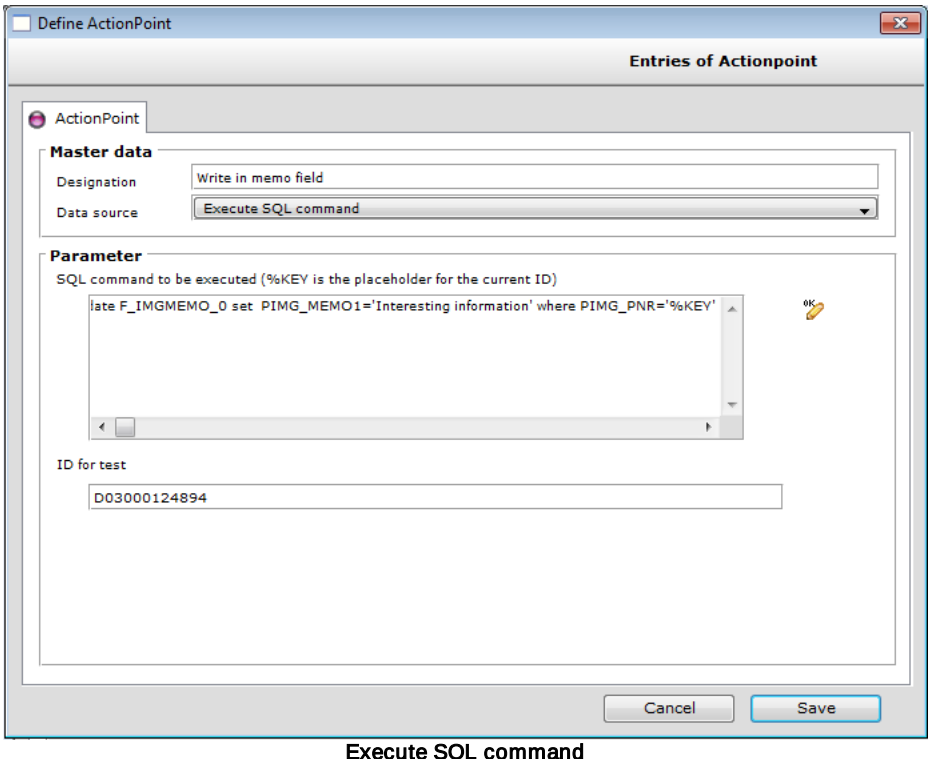

Execute SQL command

Here, you have the option to use to initiate a test run and thus identify any sources of errors.


8.6 Derivatives

Derivatives are MEDIAS objects derived from a master asset. For example, you may have an image with 300 dpi, and you require a reduced version with 150 dpi for the Internet. To avoid overwriting the original with a new version or creating a new MEDIAS object, create a derivative of the original image. Derivatives are created using the Pipeline and Workflow Manager modules. Derivatives can be downloaded directly without conversion in the Web client. Derivatives are indexed using the master asset.

Derivative definitions are managed in the Workflow Manager module.

Note: The "Create derivative" and "Modify derivatives" windows have the same content. The process is thus described using the example of creating a new workflow.

1. Select **Master data > Administer derivatives**.
   - The "Selection a client for MEDIAS derivatives" window opens.
2. Click on to display the customers.
3. Select the desired customer.
4. Click on .
   - The "Derivative overview list" window opens. This window provides you with standard functions.
5. Click on to open the "Create derivative" window.

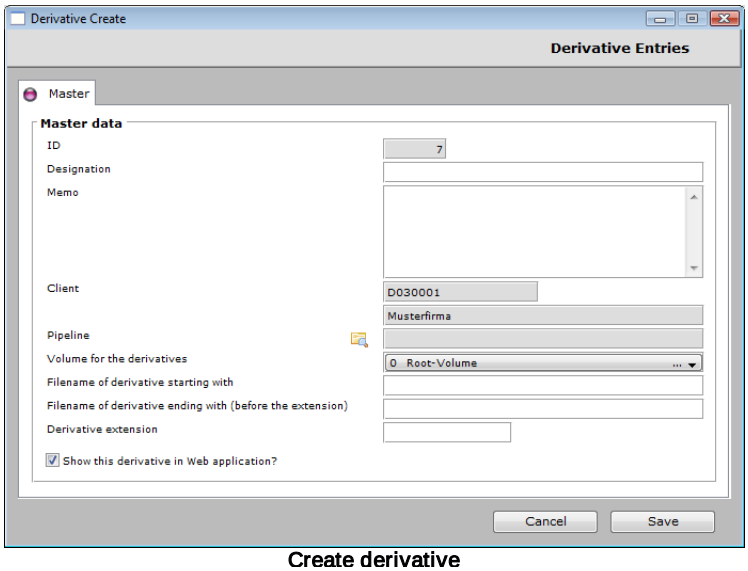


Create derivative

6. Enter a name for the derivative.
7. Click on to select a pipeline.
   - The pipeline selection window opens:
8. Click on to display the pipelines.
9. Select the desired pipeline.
10. Click on .
11. Specify the volume for the derivatives.
12. Specify whether the name of the derivative will differ from that of the original file by a prefix or suffix.
13. Specify the file extension under "Derivative extension".
14. Click on **Save**.
    - The derivative definition is created and can be used in a workflow.

8.7 Workflow for derivatives

You can define workflows to create derivatives for MEDIAS objects or report changes to derivative definitions. The following example workflow creates derivatives when adding or modifying MEDIAS objects, based on the specified derivative definitions.

1. To create a workflow, select **Master data > Management of workflows**.
   - The "Workflow overview list" opens.
2. Click on to call up the "Create new workflow" window.

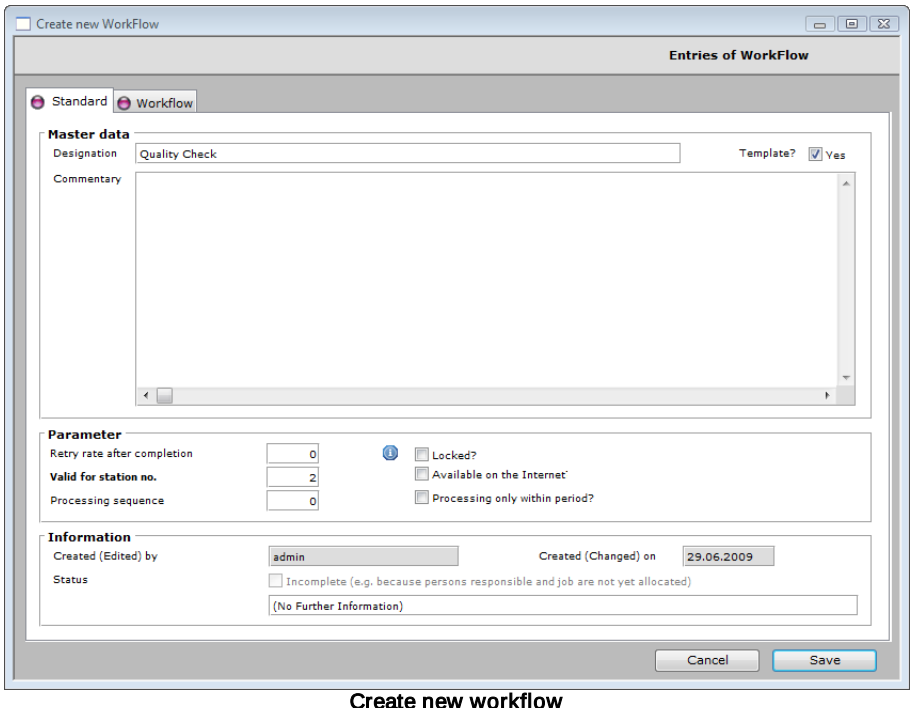

Create new workflow

3.Enter the name on the "Standard" tab.

4.Go to the "Workflow" tab.

5.Create a new watchpoint.

6.Select "Has a media object been created or changed?" as the data source.

7.Specify the customer under "Parameters".

8.Click on **Save**.

9.Create a new checkpoint.

10.Select "Is MEDIAS object of type XXXXXX (e.g. image, document, etc.)?" as the data source.

11.Select "Image" in the drop-down list under "Parameters".

12.Click on **Save**.

13.Create a new actionpoint.

14.Select "Add derivative XXXXXX" as the data source.

15.Under "Parameters", specify the derivative definition by clicking on .


16.Click on **Save**.

17.To create more derivatives, create further actionpoints as described above.

18.Connect the output from the watchpoint to the input for the checkpoint.

19.Connect the positive output from the checkpoint to the actionpoint.

20.If necessary, connect the output from the action point to other actionpoints.

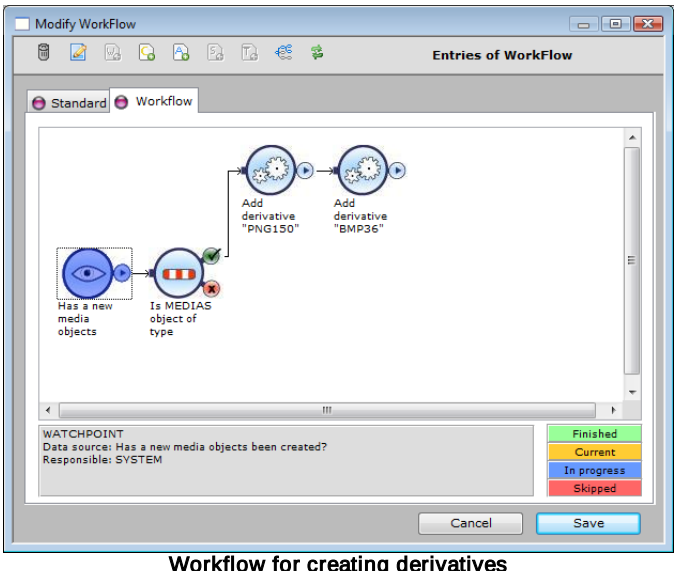

Workflow for creating derivatives


21. Click on **Save**.

    ⇨ The workflow for creating derivatives when adding or modifying MEDIAS objects is now created. For the derivatives to be created, the Workflow Manager module must be running in automatic mode.

Note: If you are using the notification system for transferring changes (e.g. change of status, new derivative, changed meta data, etc.) to Product 360 Desktop, you require additional workflows that trigger the notifications.

8.8 Defining an alternative derivative pipeline

By default, workflows for creating MEDIAS object derivatives use existing pipelines. In the latest version of Product 360 Media Manager it is possible to define specific pipelines for each workflow, which are then created when it is executed. This allows derivatives to be created with different resolutions and sizes and to be sorted when stored. This makes your data management much easier.

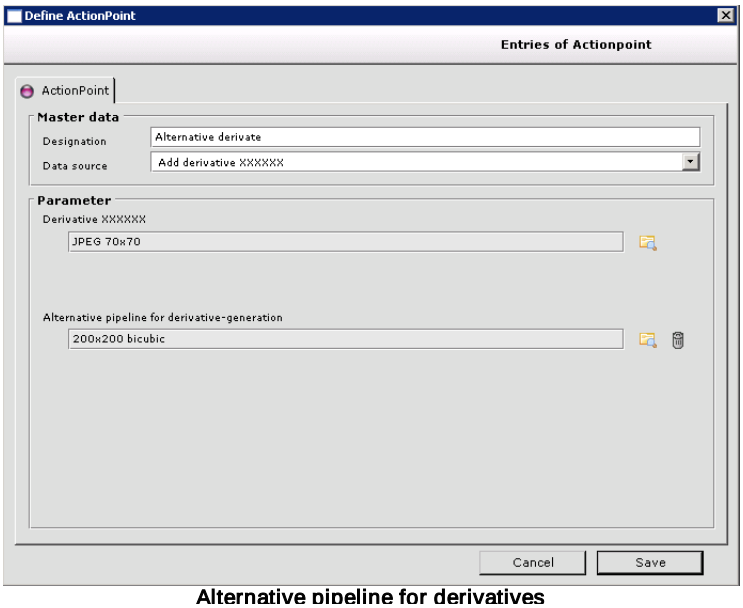

Alternative pipeline for derivatives

1. When selecting a new actionpoint, select "Add derivative XXXXXX" as the data source.
2. Under "Parameters", specify the derivative definition by clicking on .
3. Define the alternative pipeline by clicking on .
4. Click on **Save**.
5. To create more derivatives, create further actionpoints as described above.

   You complete the workflow in the normal way.

9 Archive

Caution: The **Archive** module is designed for administrators and experienced users. End users should only use the module after consultation with their administrator. Improper handling can cause damage to the data stock and result in data losses.

The Archive module enables you to archive and restore production data and data from the media database. This can be done either manually or automatically using data migration.

First of all, set up a backup drive.Product 360 Media Manager uses the following declarations for backup media:

Media ID	Backup media type
P	Tape production, automatic via DiMM
F	DVD production, automatic via DiMM
L	CD production, automatic via DiMM
D	CD production, manual
Q	MO production, manual
M	Tape MEDIAS, automatic via DiMM
G	DVD MEDIAS, automatic via DiMM
K	CD MEDIAS, automatic via DiMM
C	CD MEDIA, manual
E	MO MEDIAS, manual

The media ID indicates the type of archived components on the medium. The Archive module supports archiving and restoration of data on tape, DVD, CD and MO magneto-optical media. In addition to general archiving and restoration of complete jobs and MEDIAS data, it is also possible to create action baskets.

Generally speaking Jobs and associated files that are frequently reused should either be kept in the online memory or stored on media that can be accessed quickly, e.g. MOs. Because of the longer access time compared to online memory, archiving to an external medium should always be chosen either when no more online memory is actually available or the reuse of job files and the related work does not exceed a reasonable level and data security considerations require it.

General immediate storage on external media is not recommended if it can be expected that the files for a job will need to be accessed in the near future. Files of this kind should either remain in the online memory or be temporarily stored on quickly accessible external media such as DVDs. Product 360 Media Manager supports this two-stage approach to storing files. Mixed media can be added to the action basket and processed.

If your data backup system is connected directly to your file server, the Archive module can initiate a data backup from any workstation, with the files being copied directly from the server onto the connected backup system without causing unnecessary network load.

If you archive your data on a locally available data backup system, the data is first copied to your local workstation and then backed up.

Note: If your local client is a Windows computer rather than Macintosh, the data from the Apple resource fork is lost during this operation. Only the file itself is backed up, not the preview for example.

Assigning burning software

- Select **Settings > Assign burning software** to assign software for burning CDs and DVDs. The application must be set up and assigned as an application in the Administration module (see CD/MO archiving and restoration of MEDIAS objects).

Viewing a media archive

The media archive for CD, DVD and MO contains a list of all media. This can only be viewed, but not modified. The tape archive can be viewed under **"Settings > DIMM tools > DIMM AdminClient"** in the menu. It is operated in the same way as a normal overview list with no editing functions.

1. Navigate to **Archiving > Manage media archive**.
   - The "Media archive overview list" window opens.
2. Click on to display the list of media found, filtered by any filter criteria previously entered.

Note: To manage print templates, call up the Report overview list by selecting **Settings > Manage reports**.

9.1 Manual archiving and restoration

The following sections explain how to archive and restore jobs and MEDIAS objects manually. Various media with different IDs can be chosen as the backup media type.

Note: To archive jobs and MEDIAS objects, you must first choose the storage type.

9.1.1 Tape archiving and restoration of jobs

You can only archive locked production components. They can be locked by clicking on or or within production. You can only archive and restore groups or entire jobs.

The media type has the letter "P", e.g. Medium "P98000022".

1. Select **Archiving > Manual archiving/restore of orders/jobs**.
   - The "Archiving/restoration of orders" window opens.
2. Click on .

- Any jobs or groups found after entering filter criteria are displayed.

Caution: The jobs or groups are not displayed if "Show only main projects?" is enabled.

Note: Archived jobs can be checked on the file server. If this folder still contains files that have not been deleted, they will now be deleted. This does not affect the directories.

You can choose a selected job under **Archiving > Manual archiving/restore of orders/jobs**. Clicking on then allows you to check the directories for archived jobs.

The procedure for archiving one or more locked jobs is as follows:

1. Select one or more jobs.
2. Click on to archive the selected job(s).
   - Archiving starts after you select the storage type, e.g. automatic using DiMM or manual on various media.

Caution: When you are prompted to insert a new medium, make sure you mark it with the correct media type and the correct number.

When using a tape jukebox, you do not need to confirm any prompts if you use an old tape. If you use a new tape, you must also specify the slot in the jukebox that contains the new tape.

3. When you have inserted the medium, click on **Start**.
   - The selected jobs and groups are archived.

The procedure for restoring one or more jobs or groups is as follows:


1. Select one or more jobs.
2. Click on .
   - The "Media list for restoration" opens. This provides information about the media required for restoration.
3. Decide whether you want to restore the data to the original location or to a specified buffer directory, i.e. to a "selection".

9.1.2 Tape archiving and restoration of MEDIAS objects

The procedure for archiving and restoring MEDIAS objects is as follows:

1. Navigate to **Archiving > Manual archiving/restoration of medias objects**.
   - The "Archiving/restoration of Product 360 Media Manager MEDIAS components" window opens.
2. Click on to open the search dialog box. Here, you can run complex search queries on the MEDIAS objects.
   - The components found are displayed in the overview list.

Caution: MEDIAS objects can only be archived if they are locked. They can be locked by clicking on .

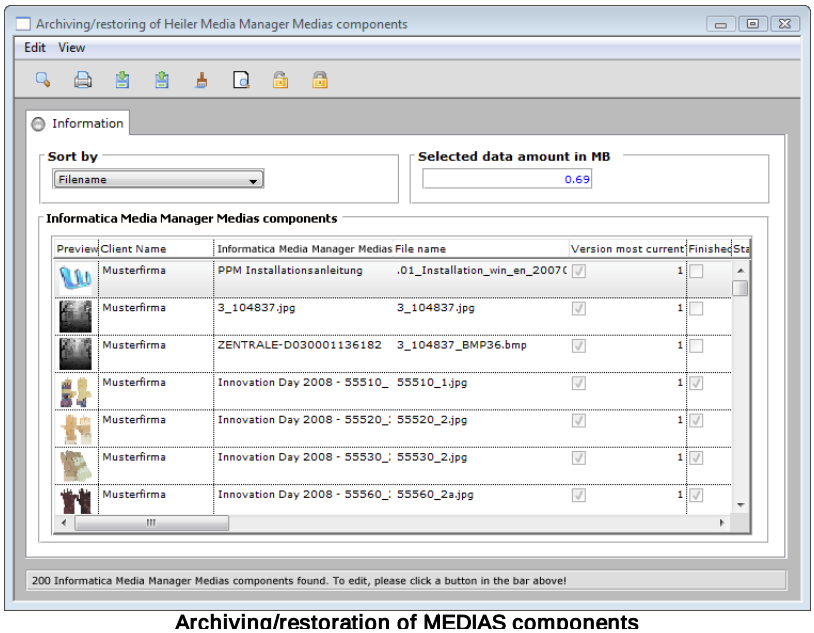

Archiving/restoration of MEDIAS components

The following functions are available under "Edit":

Menu option	Function
Search archived components of a media purchase order for restoration	This menu option allows you to select a job from a selection list of media transfer jobs. The MEDIAS objects belonging to the selected media transfer jobs that have not yet been archived are then copied to the current restoration list. Clear the current restoration list before use. You no longer need this option if you are using the Pipeline module.
Search linked Medias components of a job for restoration	This option allows you to choose a job from a list. The MEDIAS objects belonging to the selected job that are linked and still archived are copied to the current restoration list. Clear the current restoration list before use. You no longer need this option if you are using the Pipeline module.
Check for use in jobs	This menu option checks whether the selected component is used in a job.
Select all	Selects all list entries for archiving or restoration.
Show path	Displays the path to the component on the file server.
Copy path to clipboard	Copies the component path to the clipboard.

The procedure for archiving one or more MEDIAS objects is as follows:

1. Select one or more locked MEDIAS objects.
2. Click on to archive.
   - Archiving starts when the storage type has been selected.

Caution: When inserting a new medium, make sure you mark it with the correct media type and the correct number.

When using a tape jukebox, you do not need to confirm any prompts if you use an old tape. If you use a new tape, you must also specify the slot in the jukebox that contains the new tape.

3. When you have inserted the medium, click on **Start**.
   - The selected MEDIAS objects are archived.

The procedure for restoring one or more MEDIAS objects is as follows:

1. Select the corresponding archived MEDIAS objects.
2. Click on .
   - You will see a list containing information about the media required for restoration.
3. Decide whether you want to restore the data to the original location or to a specified buffer directory.

Note: After restoration of MEDIAS objects, the status of these objects is "locked" if you have enabled the "Should a MEDIAS file remain locked after restoration?" option in the "Archive settings" area of the "Archive/Pipe" tab in the Administration module under **System > System parameters**. This option is enabled by default.

9.1.3 CD/MO archiving and restoration of MEDIAS objects

For CD archiving, the files to be burned are copied into a selected directory, i.e. the Image directory. This folder is then selected for burning and is burned to CD.

For MO archiving, the files to be burned are copied directly to the selected MO.

When files are restored, a check is made as to whether the relevant MOs or CDs are mounted. If not, you are prompted to mount the relevant medium. Various jukeboxes can also be used. Before restoration, a list of the media required for restoration is always displayed. This list can also be printed out.

The process of archiving and restoring files on CD or MO is explained below using the example of MEDIAS objects. Jobs are archived and restored in the same way. Archiving can only be carried out with locked MEDIAS objects.

The media type is indicated by the letter "C" for CDs e.g. medium "C1.1" or "E" for MOs, e.g. medium "E1.1".

1. Select **Archiving > Manual archiving/restoration of MEDIAS objects**.
   - A blank overview list is opened.
2. Clicking on shows the MEDIAS objects found after entering any filter criteria in the list.

9.1.3.1 Archiving

Note: For security reasons, data can only be archived on a single MO/CD in each archiving run. For example, large groups must be structured using subgroups and archived in several stages. Therefore, when selecting the components to be archived, you must take care to ensure that the capacity limit of the MO or CD is not exceeded.

The procedure for archiving one or more MEDIAS objects is as follows:

1. Select one or more MEDIAS objects.
2. Click on to archive.
3. Select storage on CD or MO.
4. Select a folder.
   - Once the files have been copied to the selected folder, the user is notified.


Note: For CD archiving, this is the folder in which the image for burning will be located. For MO archiving, this is the MO volume itself. The files are stored in a subfolder of the selected folder or volume, the designation of which consists of the ID of the media type and a consecutive number.

Note: The button for launching the CD burning software is only displayed if this software has been assigned and is available.

5. Once a CD has been burned successfully, click on **Press only after CD burn!**.

Caution: Do not click on this button until the burning process has been completed successfully. This triggers deletion and entry of the archiving data in the database.

For MO archiving, the following message appears:

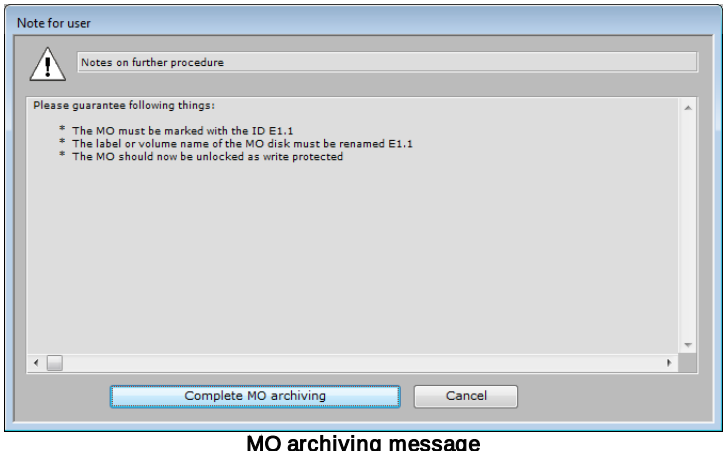

MO archiving message

1. Clicking on **Complete MO archiving** completes the MO archiving process.
2. Deletion and entry of the archiving data in the database is then triggered.
   - A message appears to query whether you want to set the archiving status.

3.Click on **Yes** to trigger entry of the archiving data in the database and therefore also deletion of the files.


Note: If any errors occur, they are displayed in a list.

9.1.3.2 Restoration

The procedure for restoring one or more MEDIAS objects is as follows:

1.Select the objects to be restored and click on .

- You will see a list containing information about the media required.

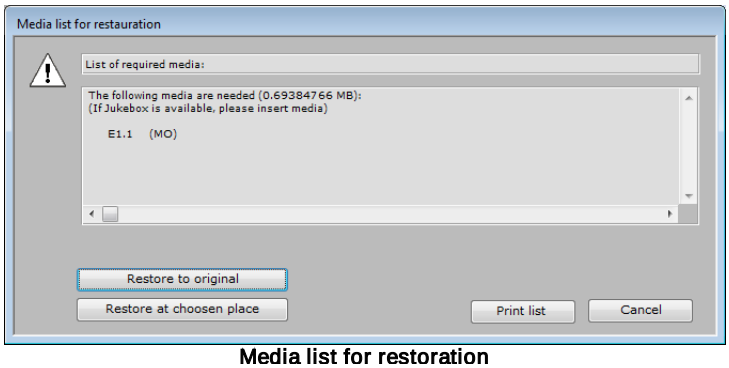

Media list for restoration

2.Decide whether you want to restore the files to a selected folder or to the original location. Depending on your choice, click on **Restore to original** or **Restore to selection**.

- The system checks whether the corresponding media are mounted. If any errors occur, they are displayed in a list.

Note: After restoring MEDIAS objects, unlike the job components the status of the MEDIAS objects is "locked".

Note: When restoring a job group to a selected location, only the content of that job group is restored to the selected location, not the entire job. By contrast, when restoring a job group using "Restore to original", the entire content of the associated job is restored to the original location.

9.1.4 Resetting the medium

If your workstation or the network server crashes while processing an archiving or restoration job, the corresponding medium should be reset after restarting.

- Navigate to **Settings > Reset drives**.
  - This resets the log file for the archiving and restoration jobs to a defined status.

Note: You should also make sure you reset the archiving drives after re-installing the system.

9.2 Automatic data migration


Data migration with the Archive module enables data to be automatically archived onto tape and DVD (for example, with DLT robots or DVD jukeboxes) during production.

Migration is triggered when certain defined criteria are fulfilled:

- Not edited for XX days
- Only XX GB disk space remaining
- Job or media data has the production status XX

The parameters for these criteria can be defined separately for jobs and MEDIAS objects. You can also make a distinction between "locked only" and "all".

1. Click on ⚙ or ✖ to start or stop automatic mode.
2. Select **Archiving > Automatic mode** to adjust the parameters.

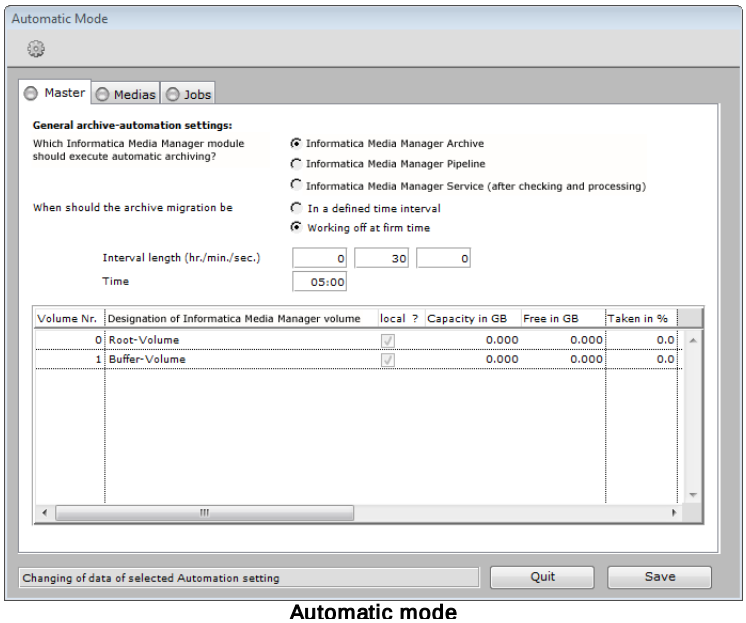

Automatic mode

3. On the "Master" tab you can see how full your Product 360 Media Manager volumes are.
4. Enter the general migration parameters. This includes setting whether you want the migration to be performed by the Archive module, Pipeline 158 or Service 69.

Note: The relevant module must be running constantly.

5. Decide whether you want the migration to take place at specified intervals or at a fixed time.
6. On the "Medias" tab, you can define the parameters for MEDIAS objects. Options are ignored during the migration unless they are activated.
7. On the "Jobs" tab, you can define the parameters for job components. Options are ignored during the migration unless they are activated.
8. Click on **Save** to save your entries.

9.3 Action basket in Archive module

If you have authorization to use the action basket, you can view and manage it by clicking on **Basket > Action basket**.

The action basket is normally specific to the workstation. In other words, a user sees only the action basket and content set for the specific workstation. The Archive module is an exception: In this case, you can view all archive baskets from all workstations. The basket is operated in exactly the same way as the action baskets in the core modules.

You can use the Pipeline module to process the items in the action basket automatically at particular intervals or at a fixed point in time.

A detailed description of the action basket can be found under Action basket in the Medias module.

9.4 DiMM tools

Tape archiving and restoration are carried out using the DiMM, Distributed Media Manager.

Under **Settings > DiMM tools** you will find various tools. The **DiMM manuals** explain how to use them.

9.5 Information for HELIOS users

HELIOS users should generally perform a rebuild of all EtherShare volumes once a day. This operation can be automated to be performed at night. This keeps your EtherShare volumes consistent.

10 XML Connector

The **XML Connector** module allows both customers and partners to exchange and synchronize data in two directions with XML-enabled systems. This module enables a high degree of automatic data synchronization between XML-enabled systems.

The interface is implemented as hotfolder technology. For details of which platforms are supported, refer to the Product 360 Media Manager system requirements.

Caution: The XML Connector module is designed for administrators and experienced users. End users should only use the module after consultation with their administrator. Improper handling can cause damage to the data and result in data losses.

The following data formats are supported:

- Boolean: `TRUE`, `ON` and `YES` (true) and `FALSE`, `OFF` and `NO` (false)
- Date: `DD.MM.YYYY`
- Time: `HH.MM.SS`
- Integer
- Float: With a full stop as the decimal separator
- Character: In Unicode

Note: The character symbols can be managed in the Administration module under **System > Unicode management for XML tools**.

Note: To manage print templates, call up the Report overview list by selecting **Master data > Manage reports**.

10.1 Managing the XML connector


Note: You need the administrator password to open this overview list.

1. Select **Master data > XML connector definition management**.
   - The "XML connector definitions" overview list opens. This window provides you with standard functions. The following functions are also available:
   - : Save counterpart to a defined XML connector
   - : Load counterpart to overview list
   - : Save all counterparts

Note: The "Create new XML connector definition" and "Modify XML connector definition" windows have the same content. The process is thus described using the example of creating a new hotfolder.

Note: To edit the XML connector for a different station, enter the corresponding number.

2.Click on to call up the "Create new XML connector definition" window.

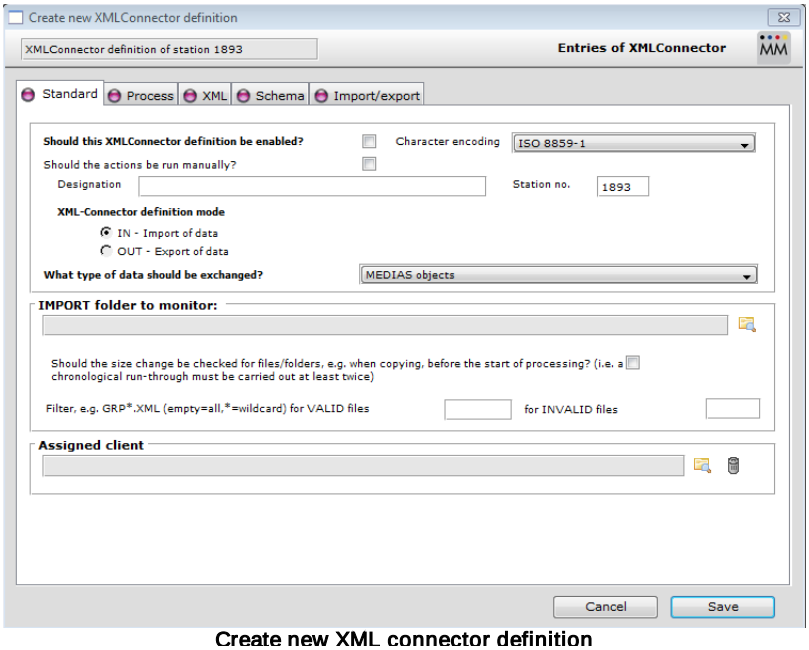

Create new XML connector definition

"Standard" tab

Option	Explanation
Should this XMLConnector definition be enabled?	-
Should the actions be run manually?	Select this option if you want the XML connector definition to be executed by a workflow. Within an action point the XML connector definition can only be called up in conjunction with particular watch points.
Station no.	Number of the station on which this XML connector definition is processed.
Processing sequence	In what order should the individual XML connector definitions be processed?
XML connector definition mode	IN XML data supplied by external systems is processed by the XML Connector module and updated in the Product 360 Media Manager system. OUT transactions within the Product 360 Media Manager system are written as XML data and supplied to external systems.
What type of data should be exchanged?	The data type to be processed is specified here – this depends on the assigned customer. The following data types can be exchanged:

Option	Explanation
	• MEDIAS objects for assigned customer • MEDIAS groups for assigned customer • MEDIAS level for assigned customer • MEDIAS statuses • MEDIAS data types • MEDIAS purchase orders for assigned customer • MEDIAS order items for assigned customer • MEDIAS transfer media • MEDIAS pipelines (Product 360 Media Manager interconnection only) • MEDIAS service provider for assigned customer (Product 360 Media Manager interconnection only), i.e. the service provider must be assigned to a specific customer • MEDIAS user for assigned customer (Product 360 Media Manager interconnection only), i.e. the user must be assigned to a specific customer • MEDIAS customers (Product 360 Media Manager interconnection only) • Import of item data from Product 360 Desktop • Import of structure groups and media assets from Product 360 Desktop
IMPORT/EXPORT folder to monitor	Folder to be monitored for incoming XML data or to be used to store outgoing XML data. The folder must be located on a defined Product 360 Media Manager volume, HELIOS OPI must be disabled (extension "%0" in folder name)
Should the resizing of files/ folders, e.g. during copy operations, be checked prior to the start of processing?	-
Filter, e.g. GRP*.XML, for VALID files or INVALID files	During an import, the filter defines which files are valid and are thus processed, and which are invalid and are not processed. During an export, the filter is used to name the XML files that are written.
Assigned client	If no customer is entered here, changes are exported to all MEDIAS objects.

"Process" tab

Option	Explanation
Should new media objects from the monitored folder be processed?	The options define whether the original file, a file converted by a pipeline or a JPEG preview will be supplied (this option only applies for the MEDIAS object type).
Folder to which the original files are to be moved	Import only: The folder must be located on a defined Product 360 Media Manager volume, HELIOS OPI must be disabled (extension `%0` in folder name)
Folder to which files with errors should be moved	Import only: The folder must be located on a defined Product 360 Media Manager volume, HELIOS OPI must be disabled (extension `%0` in folder name)
ACTION ID for "Create new"	How is a create new operation identified?
ACTION ID for "Edit data"	How are modifications identified?
ACTION ID for "Delete data"	How are deletions identified?
STATUS ID for "OK"	This option only applies for the MEDIAS object type.
STATUS ID for "locked"	This option only applies for the MEDIAS object type.
STATUS ID for "archived"	This option only applies for the MEDIAS object type.

"XML" tab

All available data fields are available in a table for the data transfer.

Option	Explanation
Enter the tag for the field group (without <> symbols).	XML tag that will enclose the data record and thus all the data.
Which field contains the unique object ID?	In which field is the unique code for the MEDIAS object located (this option only applies for the MEDIAS object type)? The unique code is automatically created from the client number, to be entered in the Administration module by selecting **System > System parameters** in the menu, and the unique local object ID.
Should media files also be synchronized when meta data is changed?	-
Should Product 360 Media Manager IDs be included when writing/reading XML?	-
Enter the XML start and end tags for the relevant fields.	In this table, you can define the individual start and end tags for the relevant data fields. The buttons can be used to automatically assign and supplement the tags.

Option	Explanation
Show XML structure	This button allows the structure of the XML files to be created to be displayed based on the set XML tags.

"Schema" tab

Here you will see an example explanation of a field group in an XML file.

"Import/Export" tab

Option	Explanation
Enter the POST command to be run AFTER successful processing	The POST commands allow the XML files read in or output to be post-processed, e.g. as e-mail notifications.
Enter the POST command to be run AFTER faulty processing	The POST commands allow the XML files read in or output to be post-processed, e.g. as e-mail notifications.

10.2 Logs and transactions

Note: You require the administrator password to view the transaction tables or change the default settings for automatic mode.

- **Transactions:** By selecting **Master data > List of Product 360 Media Manager transactions** you can view transactions that have not yet been executed. The actions listed in the transaction table are executed as soon as the XML connector is in automatic mode.
- **Automatic mode:** You can manage the default settings under **Master data > XML connector action settings**. Here, you can enable automatic mode and specify whether you want processing to take place at a fixed time or at a defined interval. You also specify whether you want a log to be kept.
- **Logs:** Under **Master data > Protocol listing** you can view the logs generated by the XML Connector module, provided that this option has been selected in the default settings. You will also find the logs in your local Product 360 Media Manager directory, in the `oxmlconn\proto` subdirectory.

10.3 Special features of the XML Connector module

- During the transfer, only those Unicode characters that are defined in the Administration module under **System > Unicode management for XML tools** are synchronized. Unicode specifications in the XML header are not taken into account.
- An XML connector definition (template) is used to export and import the (MEDIAS) data for a selected customer or all customers. Two definitions, for import and export, are required for bi-directional synchronization. Different XML connector definitions can be created for different customers. XML connector definitions are station-specific. Different stations can monitor different areas.

- The XML Connector module can also be used to exchange customers, provided that the second system is also a Product 360 Media Manager system. This function is only available if the Interface module is disabled.
- The input and output filters for the XML file names must contain the wildcard * because this generates a time code that ensures that the import is processed at the correct time.
- When MEDIAS objects are exchanged, they require a unique ID. Therefore, the locally unique PNR of an object (comprising the customer number plus a consecutive number) is prefixed by an additional, unique client number, which is defined in the Administration module under **System > System parameters**.
- Categories are not supported, i.e. you must use auto categories instead. This setting is made in the Administration module under **Personnel/Client > Client**. Customer-specific XML connector definitions are possible. Generally, when synchronizing two Product 360 Media Manager systems, the system settings for the unique/multiple meanings of file names, descriptions etc. must be set as identical in both systems.
- Synchronization is only carried out using the XML Connector module if:
  a. A XML Connector license has been acquired and entered.
  b. An XML connector definition (template) has been defined for the customer or for all customers.

10.4 Special points to note when importing XML files

When you import XML files, their file names should contain a time code to ensure that they are processed at the correct time. If several XML files are provided in the folder to be monitored, the time code in the file name influences the order in which they are processed.

10.5 Special points to note when connecting two Product 360 Media Manager systems

If you use the XML connector to connect two Product 360 Media Manager systems, the relevant XML connector definitions for imports and exports must be set up on both systems.

The relevant definitions for the target system can be generated from the source system. This is done in the "Overview of XML connector definitions" by clicking on to write a single assigned definition or on to write all assigned definitions in XML format. These XML files can then be imported to the target system by clicking on . You then only have to adjust the entries for the monitored folders and, if necessary, the designation.

You should also note the following points:

- The two systems must have different company IDs.
- The users entered must exist in both systems.


- The automatic check in marker (**Marker…) may not be used, otherwise the entry will not be transferred to the target system, resulting in inconsistencies.
- Customers whose MEDIAS objects are exchanged must exist in both systems. The customer-specific number range must be used. The customer numbers, also known as match codes, must be identical.
- Group codes must not be renamed.
- If access level "0" is deleted, this automatically results in changes to all MEDIAS objects that have been (implicitly) assigned to level "0".

10.6 Importing Product 360 Desktop data

You can import either item data or structure groups from Product 360 Desktop. The import of Product 360 Desktop item data illustrates the functioning of the XML connector.

Note: As the import of Product 360 Desktop data can include images, artificial names should not be used for the customer when adding MEDIAS objects. This setting is made in the Administration module for the customer on the "Medias settings" tab.

1. Select **Master data > XML connector definition management**.
   - This opens the overview of XML connector definitions.
2. Click on to create a new definition.
3. Enable the "Should this XML connector definition be enabled" option on the "Standard" tab.
4. Select the "Should the actions be run manually?" option if you want to execute the XML connector definition using a workflow.
5. Enter a name.
6. Under "XML-connector definition mode", select the "IN - Import of data" option.
7. Select "Import item data from Product 360 Desktop to product information system" as the type.

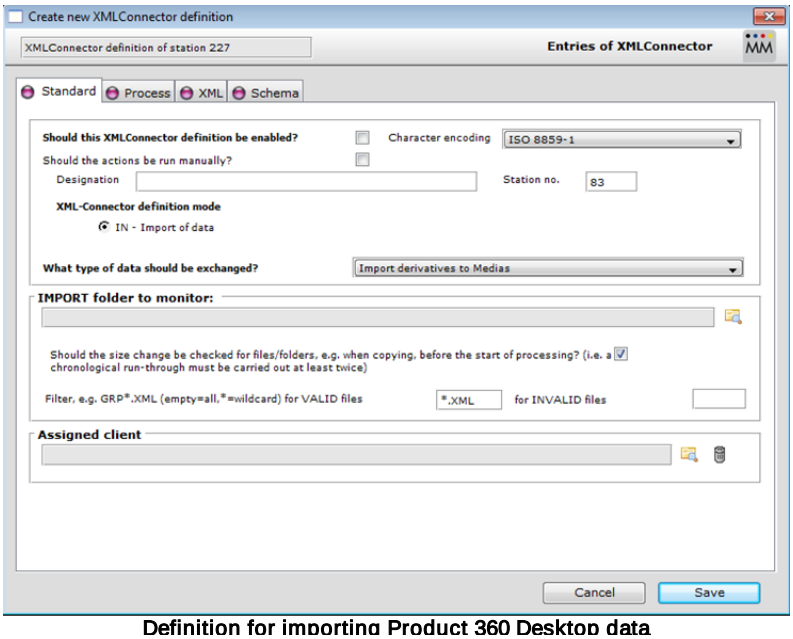

Definition for importing Product 360 Desktop data

8. Specify the import folder to be monitored.
9. Specify the root group under which the data is to be imported.
10. On the "Process" tab, enter the folder to which you want to move the original files and/or files with errors.
11. Click on **Save**.
12. Start automatic mode for the module under **XML connector mode > Start automatic mode for station <no.>**.
    - You can now use the hotfolders defined to import item data. Default settings for the XML file containing the item data can be found in the Product 360 Desktop - Product 360 Media Manager interface description.

10.7 Import Derivate

You can import either item data or structure groups from Product 360 Desktop. The import of Product 360 Desktop item data illustrates the functioning of the XML connector.


Note: As the import of Product 360 Desktop data can include images, artificial names should not be used for the customer when adding MEDIAS objects. This setting is made in the Administration module for the customer on the "Medias settings" tab.

1. Select **Master data > XML connector definition management**.
   - This opens the overview of XML connector definitions.
2. Click on to create a new definition.
3. Enable the "Should this XML connector definition be enabled" option on the "Standard" tab.
4. Select the "Should the actions be run manually?" option if you want to execute the XML connector definition using a workflow.

5.Enter a name.

6.Under "XML-connector definition mode", select the "IN - Import of data" option.

1.Select "Import derivates to Medias".

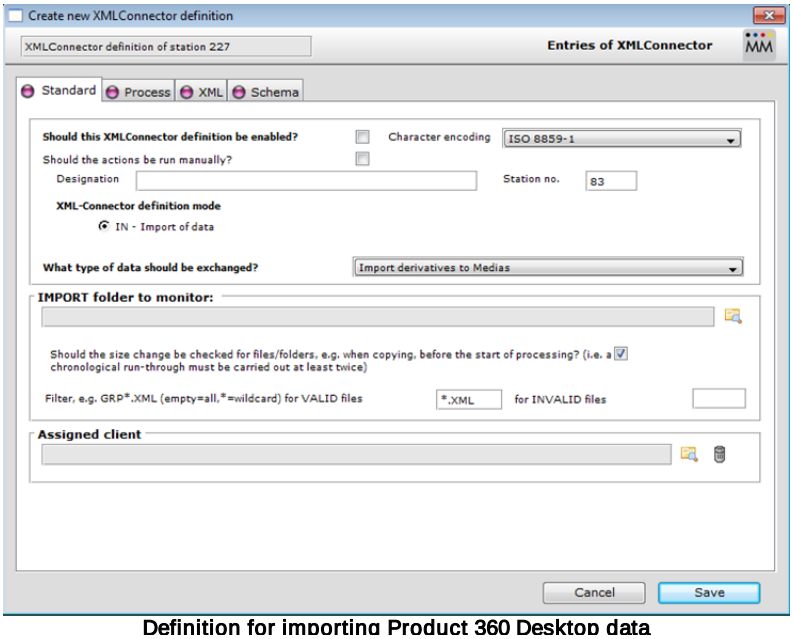

Definition for importing Product 360 Desktop data

7.Specify the import folder to be monitored.

8.Under „Assigned customer“ choose the customer.

9.On the "Process" tab, enter the folder to which you want to move the original files and/or files with errors.

10.On the tab “XML” enter the XML tag for the fields group.


11.Click on

12.Click on **Save**.

13.Start automatic mode for the module under **XML connector mode > Start automatic mode for station <no.>**.

10.8 Exporting Product 360 Media Manager data

1. Select **Master data > XML connector definition management**.
   - This opens the overview of XML connector definitions.
2. Click on to create a new definition.
3. Enable the "Should this XML connector definition be enabled" option on the "Standard" tab.
4. Enter a name.
5. Under "XML-connector definition mode", select the "OUT - Export of data" option.
6. Select the type, e.g. "MEDIAS groups".

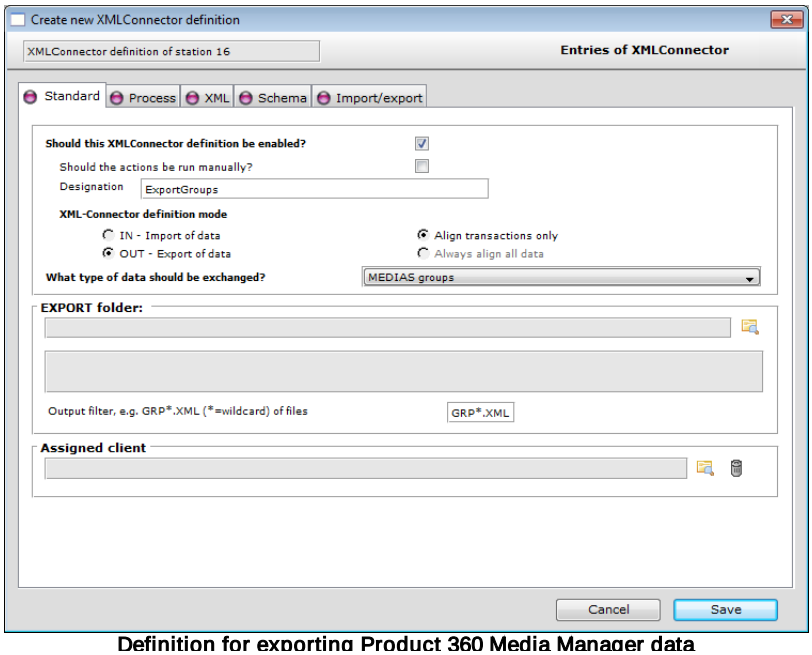

Definition for exporting Product 360 Media Manager data

7. Specify the export folder. This directory must be located on an Product 360 Media Manager buffer volume.
8. Under "Output filter" enter a name pattern for the export file, e.g. GRP*.XML.
9. Select a client.
10. On the "Process" tab, specify a flag for new, changed or deleted groups under "Action code", e.g. "M" (modify) for changed groups.
11. On the "XML" tab, define the XML root node under "Enter the tag for the field groups", e.g. "group".
12. Click on to create a default structure for the output file.
13. Click on **Save**.
    - The XML connector definition is now active. If the module is running in automatic mode, the corresponding XML files are exported, e.g. if a MEDIAS group is created or changed.

11 Interface

The **Interface** module allows data to be exchanged between Product 360 Media Manager and external applications. In general, data such as master data is imported from an external ERP system into Product 360 Media Manager and transaction data, e.g. accrued production times or materials is exported from Product 360 Media Manager.

Caution: The Interface module is designed for administrators and experienced users. End users should only use the module after consultation with their administrator. Improper handling can cause damage to the data stock and result in data losses.

Note: To manage print templates, call up the Report overview list by selecting **Interface > Manage reports**.

11.1 ASCII interface

Data is exchanged via the ASCII interface using a directory defined in the system parameters, which contains the two subdirectories `in` and `out`. In the `in` directory, the external ERP system provides the data to be added to Product 360 Media Manager in the form of ASCII files based on the format below. By contrast, in the `out` directory, Product 360 Media Manager provides the data for the external ERP system in the form of ASCII files.

Caution: If the accounting system provides the ASCII files on a PC, the Interface module must also be running on a PC. Especially on a PC, the ASCII characters must conform to the Window ASCII code. The same applies to Macintosh systems.

You can configure the Interface module in such a way that it reads and processes the ASCII files to be imported into Product 360 Media Manager at defined intervals. In the same way, the ASCII files intended for the external ERP system are provided at the specified intervals.

The ASCII file names are composed as follows: `<FPRO_TABLE>_YYYYMMDD_hhmm.asc`

- `<FPRO_TABELLE>` = Table name from transfer rules (see below), e.g. `KOSTENSTELLE`, `PRDAUFT` etc.
- `YYYY` = Year
- `MM = Month`
- `DD` = Day
- `hh` = Hour
- `mm` = Minutes

After successful processing by the Interface module, the files are given the extension `ok`.

In terms of the external ERP system, the extension `.asc` is only assigned once all data is completely contained in the ASCII file. The structure of the ASCII files is the same as that in the Interface module with the exception of the first letter. The first letter of the data record determines the action:

- C = Create new
- M = Modify
- D = Delete

Caution: All other fields in the data record must have the exact length described in the Interface module. The data record must be completed by a line feed or a carriage return.

There is a special feature for jobs and multi-line memos: If a job memo is included when creating or modifying a job, the corresponding memo lines must be transferred in the following format:

- File name: `JOB_19990419_1045.asc` or `Job_19990419_1045.asc`
- File contents:
  - C<JOB NUMBER> … (as shown in the JOB transfer rules)
  - E<JOB NUMBER> <MEMO line 1 (max. 80 characters)>
  - E<JOB NUMBER> <MEMO line 2 (max. 80 characters)>
  - ....
  - E<JOB NUMBER> <MEMO line X (max. 80 characters)>

The <JOBNUMBER> is 25 characters long, while the individual <MEMO lines> are max. 80 characters long.

11.2 Transfer rules

Transfer rules specify which data needs to be transferred for a particular action or table.

The rules first specify the table (`FPR0_TABELLE`), followed by the relevant character fields or numerical fields. The format field defines the length of the character or numerical field. An "X" indicates which fields can be edited.

Index

- A -

Access level
  create 84
  edit 84
  manage 84
Action basket 105, 135, 143, 212
  Special features 135
  use 135
Actionpoint 185
  Alternative pipeline 202
  Derivative 202
  E-mail placeholder 185
Activities
  create 50
  edit 50
Activity
  assign 55
Administration 11
Analysis of jobs 67
Application
  job component 129
Applications
  Create 43
  Edit 43
  Manage 43
Archiving 204
  automatic mode 211
  CD 208, 209
  DiMM 212
  distributed Media Manager 212
  error 210
  Helios 212
  manual 205, 206
  MO 208, 209
  reset 210
  tape 212
Audit logging 107, 109
Audit Trail
  Activate 107
  Activation 107
  Basic information 107
  Definition 107
  Technical background 109
  Use 108
Automatic mode
  default settings 217
  exit 143
Automatic module
  Logged in users 64
  Monitor 62, 64
  State 62
Automation 156

- B -

Backup strategies 204
Burning 204

- C -

Cart 212
Category 77
Change log 108
Check media orders 67
Checkpoint 182
Class 77
Classes
  create 80
  edit 80
  manage 80
Clear editing history 116
Color signs
  manage 46
Component
  unlock 132
Cost centers
  create 45
  edit 45
  manage 45
Customer 217
Customers 49
  Create 32
  Edit 32
  Manage 32
  Overview list 32
  Specific preview size 32

- D -

DALiM TWiST call 162, 163, 165
  workflow 166
Data exchange 223
  ASCII 223
  interface 223
  transfer rule 224
  XML 213
Data lifecycle 49
Data migration 211
Data organization 49
Data type 143

Definition 217
Derivative 160
create 199
definition 199
new 199
pipeline 199
Digital job bag 49, 111

- E -

Employees
create 30
edit 30
manage 30
overview list 30
ERP system 223
Evaluation of direct client costs 67
External storage
automatic 211
data 211

- F -

Features
Create 74
Exclude from search 74
Link 74
File types
Create 78
Edit 78
Manage 78
Suppress preview generation 78
Forms
create 48
edit 48
manage 48

- G -

Group
Assign 82
Create 80
Edit 80
hierarchical 77
Manage 80
MEDIAS object 82
Meta data 83
move 81

- H -

Helios 212
Hierarchical group 77
History logging 107, 109
Hotfolders 168, 177
Add to MEDIAS 172
automatic mode 168
Create 170
default settings 168
Edit 170
Manage 170
providing in a directory 171

- I -

Image container 148
Import
item data 219
XML 218
InDesign
check documents 133
insert image 131
Indexing 73
Features 74
Info Center 60, 111
Interface 213
IPTC 32

- J -

Job 49, 59, 111
archiving 205
check 123
component 112, 124
create resubmission 57
dreate 55
edit 55, 117, 130
groups 58
job component 130
restoration 205
select 115
Status 117
Job bag 117
display 118
edit 118
group 118
icons 122
job 118
job component 125
macros 118
menu function 118
production component 125
sample file 125
services 118
template 125
Job component 112, 131
add 124, 126, 128

Job component 112, 131
application 129, 130
Change 141
characteristic 142
create 125
edit 129, 130
job files 126
MEDIAS database 124
MEDIAS object 128
modify 142
multiple 142
production time 130
Progress 139
Property 141
sample file 125
template 125
transfer 124
unlock 132
Job group
create 58, 132
edit 58
status 58
Job number 115
Jobs
create 112
edit 112
manage 112

- L -

Languages
Create 47
Manage 47
Last jobs edited 116
Lifecycle 49
Log 217

- M -

Master asset 199
Master data 223
Master report
Manage fonts 23
Material assignment 55
Materials
assign 55
create 54
edit 54
Media archive 204
Media database 73
Media ID 204
Media Publisher 143
Media purchase orders
create 103
edit 103
manage 103
Media type 204
MEDIAS content system 85
Adapt 90
basic functions 94
Clear editing history 89
Last customer objects edited 89
Services 99
View editing history 89
MEDIAS object 73, 217
application 103
archiving 206, 208, 209
Assign 82
category 77
CD 208, 209, 210
class 77
context 89
convert 98
file type 77
group 77
integrate 103
link 77
make available 98
MO 208, 209, 210
PDF proxy 102
pipeline 98
Preview 76
restoration 206, 210
search 85, 86, 89
Search criteria 86
structuring 77
MEDIAS objects
add 91, 93
create 91, 93
edit 95, 97
group 93
modify 95, 97
Modify preview 95
Specify preview 95
View job links 95
Message 177
Meta data
Assignment 32
Embedded 32
Metadata field 74
Monitoring 168
Automatic mode 70
Module 70

- O -

Operation 8

- P -

Pipeline 156, 177, 199
action basket 162
automatic mode 157
convert 136
create 158, 163
customized 163
DALiM TWiST call 162, 163, 165, 166
default settings 157
edit 158
image conversion 160
manage 158
new 160
processing 165
workflow 166
Preview
MEDIAS object 76
Status 76
Print templates
Align fields 24
Change font 24
Corporate Identity 22
Create 23
Edit 24
Exchange font 22
Exchange logo 22
Revision number 23
Process monitoring 71
Process watcher
automatic mode 71
default settings 71
example 71
hotfolders 71
Processing segments 196
Product container 150
Product information system 81, 82
Group 80
Production 49
Consumption 138
Daily times 137
Data organization 111
Data workflow 111
Job 111
Job bag 111
Job component 139
monitoring 137
Production material 138
Production times 137
Progress 139
Record 138
Production component
add 126, 128
create 125
job files 126
MEDIAS database 124
MEDIAS object 128
sample file 125
transfer 124
Production group templates
Create 59
Production jobs 55
Production material 65
Production materials
create 54
edit 54
Production process 156
Production states
create 52
edit 52
Production time 65
Publishing element 143
create 153
edit 153
manage 153
Publishing list 143
create 151
edit 151
element 151
manage 151
Publishing project 143
authorization 147
create 144, 147, 148, 149, 150
edit 144, 147, 148, 149, 150
frame attributes 147
frame settings 147
image attributes 148
manage 144
product attributes 150
text attributes 149

- R -

Relationship 143
Report editor
Grid setting 24
Requirement 176
Resources
create 43
edit 43

Resources
manage 43
overview list 43
Restoration
CD 210
DiMM 212
distributed Media Manager 212
error 210
manual 205, 206
MO 210
reset 210
tape 212

- S -

Sample file 125
Search
Advanced 86
By date 9
By field content 9
By object 9
By object type 9
By period 9
General 9
Group-specific 86
MEDIAS object 86
Save 86
Selection list 86
Using field selection 9
Using search criterion 9
Search function 73
Service
check 69
Service providers
create 31
edit 31
manage 31
overview list 31
Services
Automatic indexing 99
Check media use in job 99
Do touch 99
Export database 99
Import database changes 99
Media analysis > Selected object/Select file 99
Publish objects/media 99
Select objects without proxy 99
Update paths for DBPublish 99
Shortcuts 9
Startpoint 180
States
create 52
edit 52
Statistics 65
evaluation of direct client costs 67
evaluation of media purchase orders 67
job analysis 67
production material 65
production time 65
Storage type 205
Syllable division 154
Symbol signs
manage 47
System data
Change 11
Parameter 11

- T -

Taskpoint 188
Template 125
Text container 149
Transaction 217
Transaction data 223
Transfer media
create 45
edit 45
manage 45

- U -

Unicode characters 217
User groups 27
add user 39
create 39
delete user 39
edit 39
managing 39
overview list 39
Users
Create 28, 36
customers 27
Edit 36
E-mail administration 36
employees 27
Manage 36
Modifying user rights 42
Overview list 36
service providers 27

- V -

View editing history 116
Volumes 21

- W -

Watchpoint 178
Web front end
  syllable division 154
Wildcard
  % 88
Workflow 199
  Actionpoint 178, 185
  administration 177
  automatic mode 189
  Call up external program 196
  Call up SQL command 196
  Checkpoint 178, 182
  create 189
  default settings 189
  derivative 200
  edit 189
  Loop 178
  manage 189
  Reactivate 178, 196
  startpoint 178, 180
  system-based 177, 191
  task-based 177, 194
  taskpoint 178, 188
  terms 177
  Watchpoint 178
Workflow manager
  Possible applications 176
  Range of functions 176
Workflows
  Link 196

- X -

XML connector 213, 217
  Default settings 213
  Definition 213
  Export 218, 222
  import 218
  interconnection 218
  Manage 213