How-To Library

Informatica

Address Verification 6.x Best Practices for China

© Copyright Informatica LLC 2023, 2026. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

This document tells you how to connect the elements in a China address to the appropriate address elements in Informatica Address Verification. This document also describes best practices that you can implement when you verify addresses in France.

Supported Versions

- Informatica Address Verification (On-Premises) 6.4
- Informatica Address Verification 6.4

Table of Contents

Introduction. . . . 2
Process Modes. . . . 2
Character Set. . . . 3
Address Format and Address Structure. . . . 3
Key Address Elements. . . . 3
Administrative Divisions of China. . . . 3
Mapping Input Address Data to Address Elements. . . . 5
Input and Result JSON in Address Verification (On-Premises). . . . 5
Input and Result JSON in Address Verification. . . . 7
Reference Address Databases. . . . 9
Additional Documentation Resources. . . . 9

Introduction

Informatica Address Verification can validate and enhance addresses in China. This how-to article provides you with configuration information and best practices that you can follow to get the most from the addresses. The best practices include advice on how to select the appropriate JSON elements for China address data.

To verify the quality of an input address, Address Verification compares the address information to the data in one or more reference data files. You can configure Address Verification to identify the different types of address information in the input data. You must map each item of address information to an appropriate element in Address Verification.

When you select the input address elements, you must ensure that the elements are correct for the different types of input information. The country that the address identifies determines the elements that you need.

Process Modes

Informatica Address Verification supports the following process modes for China addresses:

- BATCH
- INTERACTIVE
- QUICK CAPTURE

Character Set

Informatica Address Verification can verify China addresses in the simplified Chinese and Latin-1 scripts.

China reference address databases store the addresses in the simplified Chinese script (Hanzi). China post specifies simplified Chinese as the default script and traditional Chinese as the alternative script. Address Verification uses the Latin script for transliteration.

Address Format and Address Structure

The format of a Chinese address is based on the script in which the address is written.

A Chinese address begins with a postal code, and the address elements continue from the largest geographical element to the smallest element.

A Chinese address contains address elements in the following order:

```
POSTAL_CODE PROVINCE_1 LOCALITY_1 LOCALITY_2 LOCALITY_3 STREET HOUSE_NUMBER BUILDING SUBBUILDING
```

The following sample address demonstrates the corresponding simplified Chinese address format:

```
353099 福建省南平市文体路 338 号塔园外交公寓
```

An address in the Latin-1 script lists the address elements on multiple lines. The address reverses the order of the elements in the corresponding simplified Chinese address.

The following sample address demonstrates the Latin-1 address format:

```
TǍYUÁN WÀIJIĀOGŌNGYÙ
338 HÀO WÉNTILÙ
NÁNPÍNGSHÌ FÚJIÀNSHENG 353099
```

Key Address Elements


Address Verification is unlikely to verify an address successfully if one of the following items is absent from the address:

- Street
- House number
- Subbuilding
- Province
- Locality
- Postal Code

Administrative Divisions of China

The Chinese address system begins with the largest division of the country followed by smaller divisions. China has a street-based address structure.

The following image shows the address elements of a Chinese address and how the elements are parsed to the Address Verification fields:

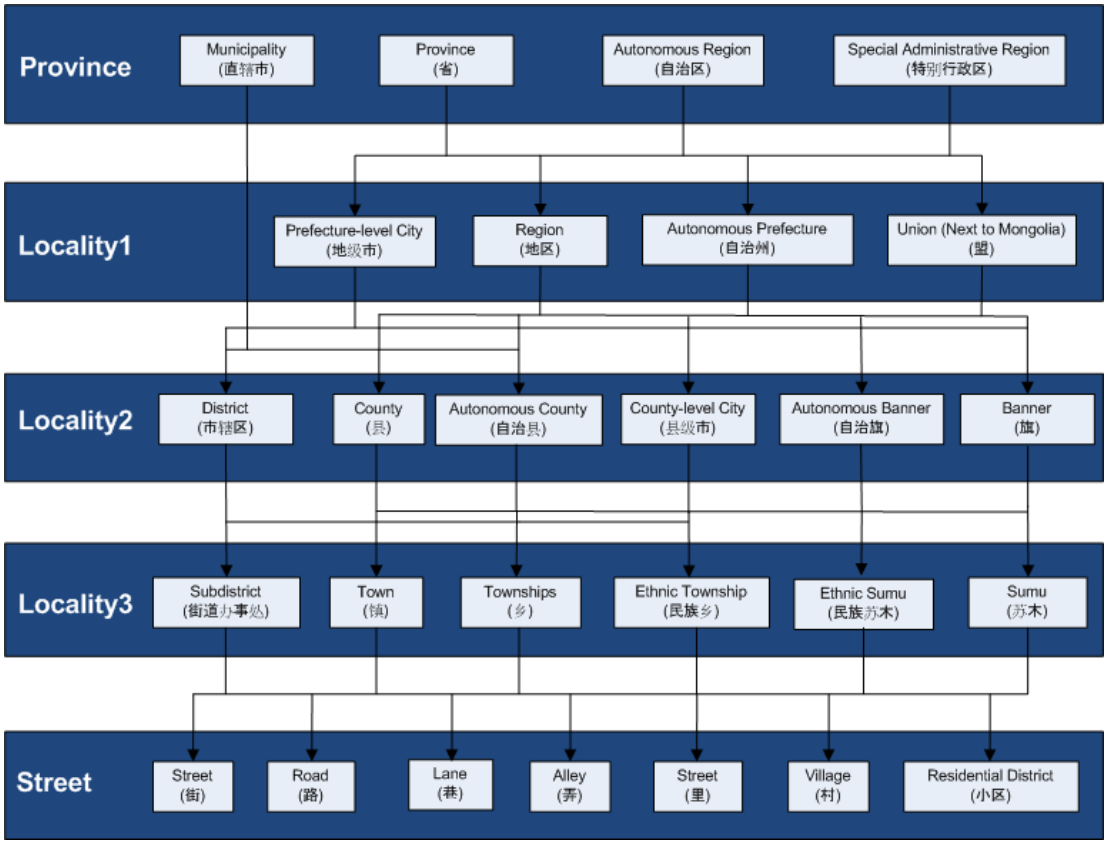

Note: For Beijing, Chongqing, Shanghai, and Tianjin, if you enter the city name once, the city name is parsed to Province. If you enter the city name twice, the second city name is parsed to Locality1.

China is divided into the following administrative-level divisions:

Provincial level

China is divided into the following provincial-level divisions:

- Province. Called Shěng, denoted by 省.
- Municipality. Called Zhíxiáshì, denoted by 直辖市.
- Autonomous region. Called Zìzhìqū, denoted by 自治区.
- Special administrative region (SAR). Called Tèbié Xíngzhèngqū, denoted by 特别行政区.

Prefectural level

China is divided into the following prefectural-level divisions:

- Prefectural-level cities. Called Dìjíshì, denoted by 地级市.
- Prefectures. Called Dìqū, denoted by 地区.
- Autonomous prefectures. Called Zìzhìzhōu, denoted by 自治州.
- Leagues. Called Méng, denoted by 盟.

County level

China is divided into the following county-level divisions:

- Counties. Called Xiàn, denoted by 县.

- Autonomous counties. Called Zìzhìxiàn, denoted by 自治县.
- County-level cities. Called Xiànjíshì, denoted by 县级市.
- Districts. Called Shìxiáqū, denoted by 市辖区.
- Banners. Called Qí, denoted by 旗.
- Autonomous banners. Called Zìzhìqí, denoted by 自治旗.

Township level

China is divided into the following township-level divisions:

- Towns. Called Zhèn, denoted by 镇.
- Townships. Called Xiāng, denoted by 乡.
- Subdistricts. Called Jiēdàobànshìchù, denoted by 街道办事处.
- Ethnic townships. Called Mínzúxiāng, denoted by 民族乡.

Mapping Input Address Data to Address Elements

To verify an address, map the input address information to appropriate elements in Address Verification.

The following table shows how you can map the input address to the address elements:

Information Type	Address Information Example	Address Elements
Street Name	文体路	Street
House Number	338 号	HouseNumber
Postal Code	353099	PostalCode
City	南平市	Locality
Province	福建省	Province
Building	塔园外交公寓	Building

Input and Result JSON in Address Verification (On-Premises)

The following example shows how you can map the address information to the JSON address elements in Address Verification (On-Premises).

You enter the following input address:

```
{
  "Parameters": {
    "Mode": "Batch",
    "CountryDetermination": {},
    "DataSetDetermination": {}
  },
 "IO": {
    "Inputs": [
      {
        "AddressElements": {
          "Street": [ { "Value": "孙洼" } ],
          "HouseNumber": [ { "Value": "1" } ],
          "Locality": [
            { "Value": "洛阳市" }, { "Value": "新安县" }, { "Value": "李村乡" }
          ],
```

```
            "PostalCode": [ { "Value": "471899" } ],
            "AdministrativeDivision": [ { "Value": "河南省" } ],
            "Country": "CHINA"
          }
        }
      ]
    }
  }
```

Informatica Address Verification (On-Premises) returns the following result:

```
{
  "Parameters": {
    "Mode": "Batch",
    "CountryDetermination": {},
    "DataSetDetermination": {}
  },
  "IO": {
    "Inputs": [
      {
        "AddressElements": {
          "Street": [ { "Value": "孙洼" } ],
          "HouseNumber": [ { "Value": "1" } ],
          "Locality": [
            { "Value": "洛阳市" }, { "Value": "新安县" }, { "Value": "李村乡" }
          ],
          "PostalCode": [ { "Value": "471899" } ],
          "AdministrativeDivision": [ { "Value": "河南省" } ],
          "Country": "CHINA"
        }
      }
    ],
    "Outputs": [
      {
        "ResultInfo": {
          "ProcessStatus": "V",
          "ProcessModeUsed": "Batch",
          "DeliverAdditionalSuggestions": "No",
          "ResultCount": 1,
          "ResultCountOverflow": false,
          "ResultCountries": [ "CHN" ]
        },
        "Results": [
          {
            "Variants": [
              {
                "StatusValues": {
                  "AddressType": "S",
                  "LanguageISO3": "ZHO",
                  "UsedVerificationLevel": "All",
                  "MatchPercentage": "100.00",
                  "Script": "Native Primary",
                  "AddressCount": "",
                  "ResultQuality": 6
                },
                "AddressElements": {
                  "Street": [ { "Value": "孙洼" } ],
                  "HouseNumber": [ { "Value": "1" } ],
                  "Locality": [
                    { "Value": "洛阳市" }, { "Value": "新安县" }, { "Value": "李村乡" }
                  ],
                  "PostalCode": [ { "Value": "471899" } ],
                  "AdministrativeDivision": [ { "Value": "河南省" } ],
                  "Country": [ { "Code": "CHN", "Name": "CHINA" } ]
                },
                "PreformattedData": {
                  "PostalDeliveryAddressLines": [ { "Value": "孙洼 1" } ],
                  "PostalFormattedAddressLines": [
                    { "Value": "471899 河南省洛阳市新安县李村乡孙洼 1" }
                  ],
                  "PostalLocalityLine": { "Value": "洛阳市 河南省 471899" }
```

```
                }
              }
            ]
          }
        ]
      }
    ]
  }
}
```

Input and Result JSON in Address Verification

The following example shows how you can verify a China address in a REST call to Address Verification.

You submit the following request:

```
{
  "Login": *****,
  "Password": *****,
  "CampaignId": "Campaign222",
  "UseTransactions": "TEST",
  "Request": {
    "Parameters": {
      "Mode": "Batch",
      "CountryDetermination": {},
      "DataSetDetermination": {},
      "CountrySets": [
        {
          "Process": {
            "AlternativeHandling": {
              "OutdatedAddresses": { "Match": "Off", "GetNewAddress": false },
              "AliasAddresses": { "Match": "Off" }
            },
            "VerificationLevel": {
              "PreferredVerificationLevel": "All",
              "MinimumVerificationLevel": "All"
            },
            "Geocode": { "SearchRadius": "50" },
            "Enrichments": {
              "Geocoding": {
                "Rooftop": false,
                "ArrivalPoint": false,
                "StreetCenter": false,
                "PostalCodeCenter": false,
                "LocalityCenter": false
              },
              "Global": false,
              "CountrySpecific": false,
              "CAMEO": false
            }
          }
        }
      ]
    },
         "IO": {
    "Inputs": [
      {
        "AddressElements": {
          "Street": [ { "Value": "孙洼" } ],
          "HouseNumber": [ { "Value": "1" } ],
          "Locality": [
            { "Value": "洛阳市" }, { "Value": "新安县" }, { "Value": "李村乡" }
          ],
          "PostalCode": [ { "Value": "471899" } ],
          "AdministrativeDivision": [ { "Value": "河南省" } ],
          "Country": "CHINA"
        }
      }
    ]
  }
```

```
  }
}
```

Informatica Address Verification returns the following response:

```
{
    "Status": "Ok",
    "StatusDescription": "No error",
    "TransactionInfo": {
        "TotalTransactionsCharged": 1,
        "TransactionPools": [
            {
                "Type": "BATCH",
                "TransactionsCharged": 1
            }
        ]
    },
    "CampaignId": "Campaign222",
    "Response": [
        {
            "ResultInfo": {
                "ProcessStatus": "V",
                "ProcessModeUsed": "Batch",
                "DeliverAdditionalSuggestions": "No",
                "ResultCount": 1,
                "ResultCountOverflow": false,
                "ResultCountries": [
                    "CHN"
                ]
            },
            "Results": [
                {
                    "Variants": [
                        {
                            "StatusValues": {
                                "AddressType": "S",
                                "LanguageISO3": "ZHO",
                                "UsedVerificationLevel": "All",
                                "MatchPercentage": "100.00",
                                "Script": "Native Primary",
                                "AddressCount": "",
                                "ResultQuality": 6
                            },
                            "AddressElements": {
                                "Street": [
                                    {
                                        "Value": "孙洼"
                                    }
                                ],
                                "HouseNumber": [
                                    {
                                        "Value": "1"
                                    }
                                ],
                                "Locality": [
                                    {
                                        "Value": "洛阳市"
                                    },
                                    {
                                        "Value": "新安县"
                                    },
                                    {
                                        "Value": "李村乡"
                                    }
                                ],
                                "PostalCode": [
                                    {
                                        "Value": "471899"
                                    }
                                ],
                                "AdministrativeDivision": [
```

```
                                {
                                    "Value": "河南省"
                                }
                            ],
                            "Country": [
                                {
                                    "Code": "CHN",
                                    "Name": "CHINA"
                                }
                            ]
                        },
                        "PreformattedData": {
                            "PostalDeliveryAddressLines": [
                                {
                                    "Value": "孙洼 1"
                                }
                            ],
                            "PostalFormattedAddressLines": [
                                {
                                    "Value": "471899 河南省洛阳市新安县李村乡孙洼 1"
                                }
                            ],
                            "PostalLocalityLine": {
                                "Value": "洛阳市 河南省 471899"
                            }
                        }
                    }
                ]
            }
        ]
    }
}
```


Reference Address Databases

Informatica updates the China reference address databases yearly. You can download the latest database packages from the Informatica Database Download portal. For news about reference address databases and software updates for Address Verification, subscribe to the Informatica DaaS Newsletter from Informatica.

Informatica Address Verification provides the following reference databases for China addresses:

- `CHN_ADV_VRF_BIA_000_6_x_0.MD6`. Batch and interactive data.
- `CHN_ADV_VRF_QCP_000_6_x_0.MD6`. QuickCapture data.

Note: You download databases for Informatica Address Verification (On-Premises). You do not need to download databases for Informatica Address Verification, as Informatica Address Verification uses a cloud interface.

Additional Documentation Resources

To view the latest documentation for Informatica Address Verification, click the following links:

https://docs.informatica.com/data-as-a-service/address-verification-(on-premises)/6-4-0.html

https://docs.informatica.com/data-as-a-service/address-verification/6-4-0.html

Author

Dishari Dutta

Acknowledgements