How-To Library

Informatica

Using the Secure@Source cURL Utility

© Copyright Informatica LLC 2015, 2021. Informatica LLC. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. All other company and product names may be trade names or trademarks of their respective owners and/or copyrighted materials of such owners.

Abstract

Use the Secure@Source cURL (SATSCURL) utility to perform a variety of tasks from the command line. You can create and schedule scans for data stores. You can also generate or export a list of Secure@Source objects.

Supported Versions

- Secure@Source 3.x

Table of Contents

Using the Secure@Source cURL Utility Overview. 2
Prerequisites. 3
Data Store Repository Type Support. 3
SATSCURL Syntax. 3
Create a Scan. 5
Steps to Create a Scan. 5
Example: Creating a Database Scan. 6
Example: Creating an Informatica PowerCenter Scan. 6
Generate the User Authorization File. 6
Example: Creating a Database Scan Without Listing User Credentials in the SATSCURL Command. 7
Generate a List of Secure@Source Objects. 7
Example: Generating a List of Data Stores. 8
Example: Generating a List of Scans. 8
Export a List of Secure@Source Objects to a File. 9
Example: Exporting a List of Data Stores. 9

Using the Secure@Source cURL Utility Overview

You can perform the following tasks with the SATSCURL utility:

- Create and schedule a scan to run immediately or at a future date and time.
- Generate a user authorization file if you do not want to enter your user credentials on the command line.
- Generate a list of the following Secure@Source objects:
  - Policies
  - Data stores
  - Locations
  - Scans
  - Data domains
- Export a list of the following Secure@Source objects to a file:
  - Data stores
  - Scans

When you create a scan or generate or export a list of Secure@Source objects, you must provide the Secure@Source URL and your user credentials to access the Secure@Source repository.

If you do not want to enter your user credentials on the command line, you can generate a user authorization file. The SATSCURL utility creates the user authorization file `satscurl.auth`. The file contains an encrypted version of the user ID and password.

Prerequisites

Verify that the server you plan to run the SATSCURL utility on meets the following requirements:

- A Windows or Linux operating system.
- HTTPS access to the Secure@Source server.

Data Store Repository Type Support

The SATSCURL utility supports the following data store repository types:

- Database
- PowerCenter repository
- Cloud application

SATSCURL Syntax

You can start SATSCURL from any directory prompt. The SATSCURL command uses the following syntax:

```
satscurl <flags>
```

Use flags to specify the action you want to perform. You can list the flag options in any order.

The following table shows the SATSCURL flag options:

Flag	Description
`-a https://<Secure@Source URL>`	Specifies the Secure@Source URL that the SATSCURL utility must use to access the Secure@Source server. Contact the administrator to get the Secure@Source URL. The administrator configures the Secure@Source URL when the administrator creates the Secure@Source Service in Informatica Administrator.
`-b`	Generates a list of policies in the Secure@Source repository.
`-c`	Generates a list of data stores in the Secure@Source repository.
`-d <data store name>`	Includes the data store in the scan definition. You can only specify one data store in a scan.
`-e`	Excludes the default policies, PCI and PHI, from the scan definition. If you use this flag, you must use the `-n <policy name>` flag to specify the custom policies you want to use in the scan.

-f	Specifies a full Informatica PowerCenter scan. A full scan includes the following scan options: - Include Data Stores and Catalog - Identify Proliferation and Data Protection If you do not include the -f option, Secure@Source runs a quick scan. A quick scan only includes the Include Data Stores and Catalog scan option.
-g <file name>	Exports the list of scans to a file with the file name you provided.
-h	Displays a list of SATSCURL flag options with descriptions.
-i <yyyy-mm-dd>	Schedules the scan job to run at a future date. If you do not include the -i <yyyy-mm-dd> option, the scan job runs immediately.
-j <hh:mm>	Schedules the scan job to run at the specified time on the day specified by the -i <yyyy-mm-dd> option. Specify the hour and minutes in local time. If you specify the -i <yyyy-mm-dd> option but not the -j <hh:mm> option, the scan job runs at 00:00 hours on the day specified in the -i <yyyy-mm-dd> option.
-k	Generates a list of the locations of the data stores in the Secure@Source repository.
-l	Generates a list of all scans in the Secure@Source repository.
-m	Generates a list of the data domains.
-n <policy name>	Required if you include the -e option. Includes the custom policy to the scan definition. To add more than one policy, separate the policy names with a comma.
-o <file name>	Exports the list of data stores to a zip file with the file name you provided. The zip file contains the following files: - DataStores.csv - DataStoresSummary.csv
-p <password>	Specifies the password for the user account that the SATSCURL utility must use to connect to the Secure@Source server.
-r <scan name suffix>	Assigns the specified suffix to the name of the scan. If you do not include the -r option, the default suffix AUTO applies. The default scan name is: SATSCURL_<SCAN ID>_AUTO
-s <sampling option>	S pecifies the rows to sample in a data profile. Use one of the following options: - 1 Samples the first 10,000 rows. - 2 Samples a random number of rows. - 3 Samples the first 100,000 rows. - 4 Samples the first 500,0000 rows. - 5 Samples all rows. - 6 Samples 10,000 rows randomly. - 7 Samples 100,000 rows randomly. - 8 Samples 500,000 rows randomly. If you do not specify a sampling option, the scan profiles the first 10,000 rows.

`-t <profile type option>`	Specifies the profile type. Use one of the following options: - `1` Specifies the Metadata profile option. - `2` Specifies the Data profile option. - `3` Specifies the Metadata with Data profile option. If you do not specify a profile option, the scan profiles the metadata of the data store.
`-u <user ID>`	Specifies the user ID that the SATSCURL utility must use to connect to the Secure@Source server.
`-x`	Generates a user authorization file. The file contains the encrypted version of your user credentials.

Create a Scan

A scan is a Secure@Source repository object that defines how to discover and classify sensitive data in data stores.

When you use the SATSCURL utility to define and schedule the scan, you must include the following information:

- Secure@Source URL. Use the flag: `-a https://<Secure@Source URL>`
- Name of the data store you want to scan. Use the flag: `-d <data store name>`
- User ID of the account the SATSCURL utility can use to access the Secure@Source server. Use the flag: `-u <user ID>`
- Password of the account the SATSCURL utility can use to access the Secure@Source server. Use the flag: `-p <password>`

The SATSCURL utility creates a scan with the following default options:

- Assigns the following name to the scan: `SATSCURL_<SCAN ID>_AUTO`
- Specifies a quick scan.
- Includes the PCI and PHI policies.
- Uses the Metadata profile type.
- Runs the scan immediately.

To customize the scan name, definition, or schedule, include the relevant SATSCURL flags.

Steps to Create a Scan

Perform the following steps to create a scan.

1. Run the SASCURL utility from the command line:


   ```
   satscurl -a https://<Secure@Source URL> -d <data store name> -u <user ID> -p <password>
   ```

   For example:


   ```
   satscurl -a https://satssite.ilmrnd.com:18295 -d ORA_AWS -u Administrator -p
   Administrator
   ```

2. Optionally, include other flags to customize the scan and the run time.

   The following image shows a scan with the default options. It runs immediately.

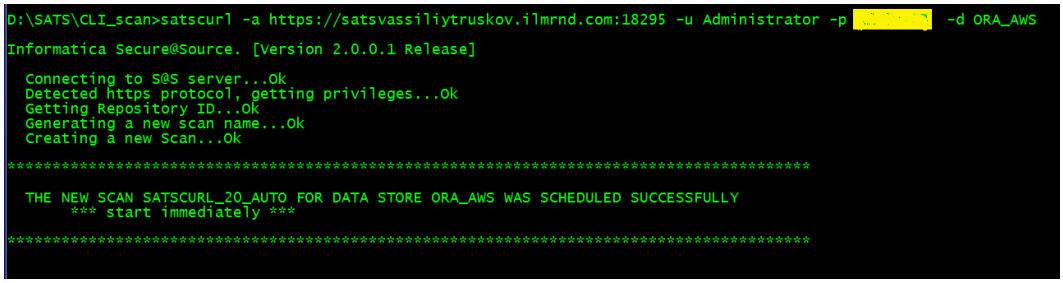

   The following image shows a scan scheduled to run at a future date and time:

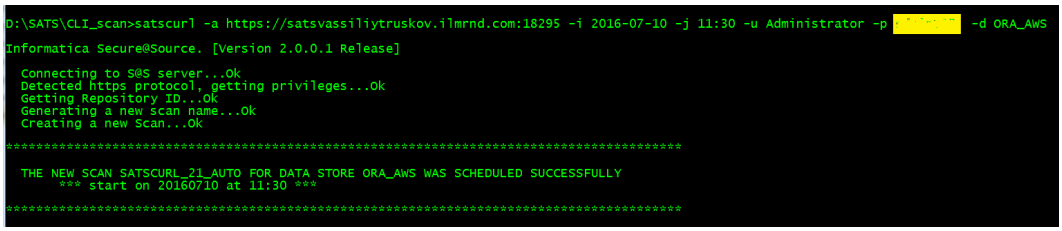

Example: Creating a Database Scan

In this example, the Secure@Source URL is: `https://satssite.ilmrnd.com:18295`

You want to create a database scan to scan the data store ORA_AWS. You want to profile the metadata and then the data. You want to sample the first 100,000 rows.

Run the SATSCURL utility with the following command:

```
satscurl -a https://satssite.ilmrnd.com:18295 -d ORA_AWS -u Administrator -p Administrator -t 3
-s 3
```

Example: Creating an Informatica PowerCenter Scan

In this example, the Secure@Source URL is: `https://satssite.ilmrnd.com:18295`

You want a full scan of the PowerCenter repository PWC1_AWS. You want the scan to run at a future date and time, December 28, 2016 at 11:30am local time.

Run the SATSCURL utility with the following command:

```
satscurl -a https://satssite.ilmrnd.com:18295 -i 2016-12-28 -j 11:30 -d PWC1_AWS -f -u
Administrator -p Administrator
```

Generate the User Authorization File

If you do not want to enter your user credentials every time you use the SATSCURL utility, generate a user authorization file. To generate the file, use the `-x` flag.

Run the SATSCURL utility with the following command:

```
satscurl -x -u <user ID> -p <password>
```

For example:

```
satscurl -x -u Administrator -p Administrator
```

The SATSCURL utility creates a file with file name `satscurl.auth` in the same folder that contains the SATSCURL utility. The `satscurl.auth` file contains an encrypted version of the user ID and password that you use to access the Secure@Source repository.

For example, the contents of a sample `satscurl.auth` file are:

```
UID=4A41026F03FF4AA005867CA31C4E833758E12419CB4F7A3186EA87D1EB4A9ED8
PWD=FDC742D1940589DE411F0625DADCAD74
```

Note: Do not modify or update the file.

After you generate the `satscurl.auth` file, you can enter SATSCURL commands without including your user credentials. The SATSCURL utility automatically checks for the presence of the `satscurl.auth` file and uses the user credentials stored in the file to access the Secure@Source server.

Example: Creating a Database Scan Without Listing User Credentials in the SATSCURL Command


You want to create a database scan with the default options to scan the data store ORA_AWS. You do not want to list the user credentials when you create the scan.

Perform the following tasks:

1. Generate the `satscurl.auth` file with the following SATSCURL command:

   ```
   satscurl -x -u <user ID> -p <password>
   ```

   A success message appears.

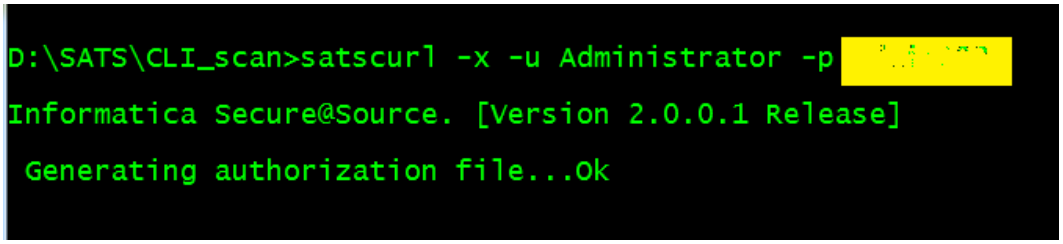2. Create a database scan with the following SATSCURL command:

   ```
   satscurl -a https://satssite.ilmrnd.com:18295 -d ORA_AWS
   ```

Generate a List of Secure@Source Objects

You can generate lists of Secure@Source objects.

The following table shows the flags you use to generate the lists:

Flag	Secure@Source Object
`-b`	Policies
`-c`	Data stores
`-k`	Locations of data stores
`-l`	Scans
`-m`	Data domains

Run the SATSCURL utility with the following command syntax:

```
satscurl -a https://<Secure@Source URL> <flag for specific list> -u <user ID> -p <password>
```

Tip: To avoid entering user credentials in the command, generate the user authorization file first.

Example: Generating a List of Data Stores

You want to generate a list of the data stores in the Secure@Source repository. The Secure@Source URL is: `https://satssite.ilmrnd.com:18295`

Run the SATSCURL utility with the following command:


```
satscurl -a https://satssite.ilmrnd.com:18295 -c -u Administrator -p Administrator
```

The list that appears has the following columns:

- Data Store Name
- Data Store Type
- Description

Use this list to get the name of the data stores that you want to scan.

The following image shows a list of data stores:

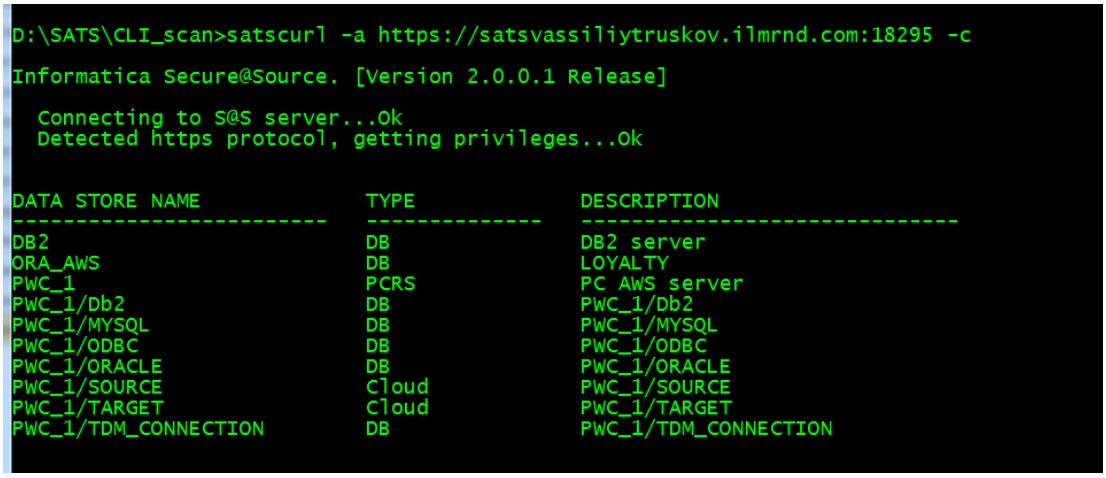

Example: Generating a List of Scans

You want to generate a list of the scans in the Secure@Source repository. You generated the user authorization file. The Secure@Source URL is: `https://satssite.ilmrnd.com:18295`

Run the SATSCURL utility with the following command:


```
satscurl -a https://satssite.ilmrnd.com:18295 -l
```

The list that appears has the following columns:

- Scan Name
- Status
- Description

Use this list to determine the status of a newly created or existing scan.

The following image shows a list of scans:

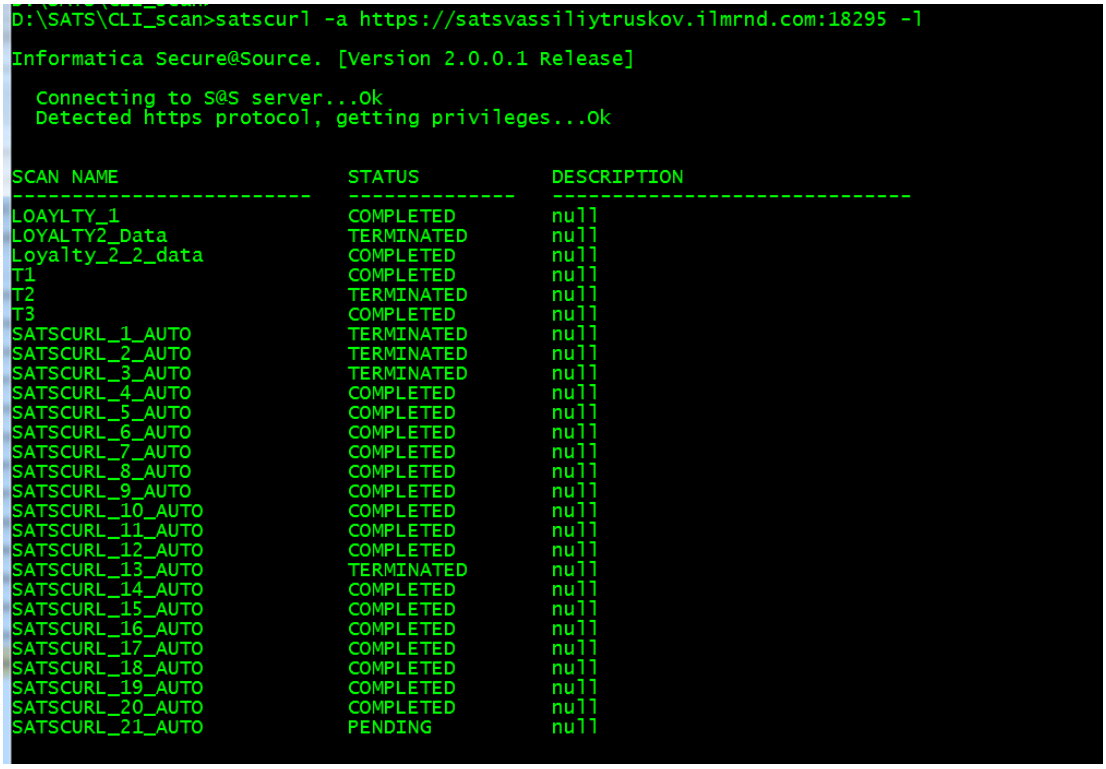

Export a List of Secure@Source Objects to a File

You can export a list of data stores or scans to a file.

The following table shows the flags you use to export:

Flag	Secure@Source Object
`-o <file name>`	Data stores
`-g <file name>`	Scans

Run the SATSCURL utility with the following command syntax:

```
satscurl -a https://<Secure@Source URL> <flag to export specific list> -u <user ID> -p
<password>
```

Tip: To avoid entering user credentials in the command, generate the user authorization file first.

Example: Exporting a List of Data Stores

You want to export a list and a summary of the data stores that are in the Secure@Source repository to a file. You want the export file name to be `datastores.zip`. You generated the user authorization file. The Secure@Source URL is: `https://satssite.ilmrnd.com:18295`


Run the SATSCURL utility with the following command:

```
satscurl -a https://satssite.ilmrnd.com:18295 -o datastores.zip
```

The SATSCURL utility creates the `datastores.zip` file with the following files:

- `DataStores.csv`
- `DataStoresSummary.csv`

The following image shows the SATSCURL command and success message:

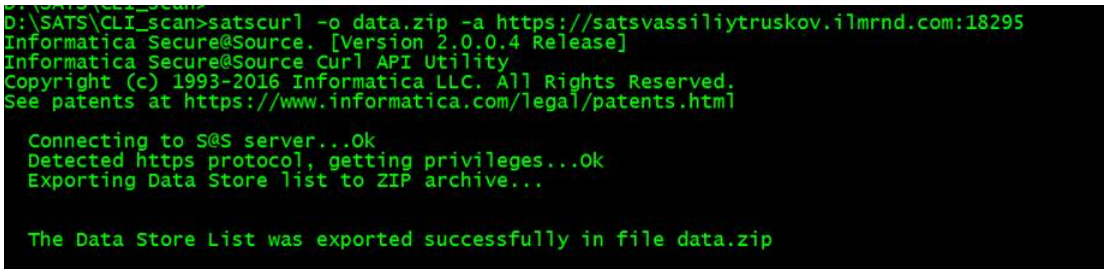

Author

Vassiliy Truskov